

7.6.5. Test Result

Test Mode:	802.11b	Test Site:	AC1
Test Channel:	01	Test Engineer:	Roy Cheng
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
	7487.9	36.7	8.2	44.9	74.0	-29.1	Peak	Horizontal
*	8736.2	35.6	8.9	44.5	85.0	-40.5	Peak	Horizontal
	11406.2	34.6	12.6	47.2	74.0	-26.8	Peak	Horizontal
*	13173.7	35.1	12.5	47.6	85.0	-37.4	Peak	Horizontal
	3618.0	48.1	-0.6	47.5	74.0	-26.5	Peak	Vertical
*	4425.7	35.6	1.5	37.1	85.0	-47.9	Peak	Vertical
	4825.0	40.9	2.7	43.6	74.0	-30.4	Peak	Vertical
*	6253.7	35.1	4.7	39.8	85.0	-45.2	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is 20dBc of the fundamental emission level (105.0dB μ V/m).

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Mode:	802.11b	Test Site:	AC1
Test Channel:	06	Test Engineer:	Roy Cheng
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
	4876.0	38.8	2.7	41.5	74.0	-32.5	Peak	Horizontal
*	6253.4	34.5	4.7	39.2	84.6	-45.4	Peak	Horizontal
	8247.2	35.4	8.1	43.5	74.0	-30.5	Peak	Horizontal
*	9253.8	34.4	10.2	44.6	84.6	-40.0	Peak	Horizontal
	3652.0	45.8	-0.6	45.2	74.0	-28.8	Peak	Vertical
*	4426.4	35.2	1.5	36.7	84.6	-47.9	Peak	Vertical
	4876.0	42.3	2.7	45.0	74.0	-29.0	Peak	Vertical
*	6523.2	35.7	5.9	41.6	84.6	-43.0	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is 20dBc of the fundamental emission level (104.6dB μ V/m).

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Mode:	802.11b	Test Site:	AC1
Test Channel:	11	Test Engineer:	Roy Cheng
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
	4871.3	35.1	2.7	37.8	74.0	-36.2	Peak	Horizontal
*	6253.3	34.7	4.7	39.4	83.7	-44.3	Peak	Horizontal
	7516.6	36.2	8.3	44.5	74.0	-29.5	Peak	Horizontal
*	8642.3	35.1	8.8	43.9	83.7	-39.8	Peak	Horizontal
	3694.5	44.7	-0.6	44.1	74.0	-29.9	Peak	Vertical
*	4482.7	35.3	1.6	36.9	83.7	-46.8	Peak	Vertical
	4927.0	39.2	2.8	42.0	74.0	-32.0	Peak	Vertical
*	6923.5	35.6	6.6	42.2	83.7	-41.5	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is 20dBc of the fundamental emission level (103.7dB μ V/m).

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Mode:	802.11g	Test Site:	AC1
Test Channel:	01	Test Engineer:	Roy Cheng
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
	4872.3	35.4	2.7	38.1	74.0	-35.9	Peak	Horizontal
*	6253.3	34.8	4.7	39.5	86.5	-47.0	Peak	Horizontal
	7692.3	35.6	8.0	43.6	74.0	-30.4	Peak	Horizontal
*	8647.2	35.8	8.8	44.6	86.5	-41.9	Peak	Horizontal
	3618.0	48.1	-0.6	47.5	74.0	-26.5	Peak	Vertical
*	4452.6	36.4	1.5	37.9	86.5	-48.6	Peak	Vertical
	4833.5	39.2	2.7	41.9	74.0	-32.1	Peak	Vertical
*	6252.7	34.8	4.7	39.5	86.5	-47.0	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is 20dBc of the fundamental emission level (106.5dB μ V/m).

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Mode:	802.11g	Test Site:	AC1
Test Channel:	06	Test Engineer:	Roy Cheng
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
	4000.5	40.5	0.4	40.9	74.0	-33.1	Peak	Horizontal
*	4471.3	35.6	1.6	37.2	85.3	-48.1	Peak	Horizontal
	4925.4	35.1	2.8	37.9	74.0	-36.1	Peak	Horizontal
*	6836.0	35.6	6.3	41.9	85.3	-43.4	Peak	Horizontal
	3652.0	45.0	-0.6	44.4	74.0	-29.6	Peak	Vertical
*	4415.2	35.6	1.4	37.0	85.3	-48.3	Peak	Vertical
	4867.5	38.8	2.7	41.5	74.0	-32.5	Peak	Vertical
*	6274.3	35.0	4.8	39.8	85.3	-45.5	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is 20dBc of the fundamental emission level (105.3dB μ V/m).

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Mode:	802.11g	Test Site:	AC1
Test Channel:	11	Test Engineer:	Roy Cheng
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
	3672.5	36.7	-0.6	36.1	74.0	-37.9	Peak	Horizontal
*	4416.6	35.8	1.4	37.2	83.9	-46.7	Peak	Horizontal
	4826.5	34.7	2.7	37.4	74.0	-36.6	Peak	Horizontal
*	6272.3	35.9	4.8	40.7	83.9	-43.2	Peak	Horizontal
	3694.5	44.2	-0.6	43.6	74.0	-30.4	Peak	Vertical
*	4471.2	35.7	1.6	37.3	83.9	-46.6	Peak	Vertical
	4927.0	39.5	2.8	42.3	74.0	-31.7	Peak	Vertical
*	6383.7	35.6	5.3	40.9	83.9	-43.0	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is 20dBc of the fundamental emission level (103.9dB μ V/m).

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Mode:	802.11n-HT20	Test Site:	AC1
Test Channel:	01	Test Engineer:	Roy Cheng
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
	3682.5	37.4	-0.6	36.8	74.0	-37.2	Peak	Horizontal
*	4478.2	35.9	1.6	37.5	84.6	-47.1	Peak	Horizontal
	4826.8	35.1	2.7	37.8	74.0	-36.2	Peak	Horizontal
*	6825.4	35.4	6.2	41.6	84.6	-43.0	Peak	Horizontal
	3618.0	46.8	-0.6	46.2	74.0	-27.8	Peak	Vertical
*	4472.3	35.4	1.6	37.0	84.6	-47.6	Peak	Vertical
	4875.3	34.6	2.7	37.3	74.0	-36.7	Peak	Vertical
*	6872.1	35.0	6.4	41.4	84.6	-43.2	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is 20dBc of the fundamental emission level (104.6dB μ V/m).

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Mode:	802.11n-HT20	Test Site:	AC1
Test Channel:	06	Test Engineer:	Roy Cheng
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
	3682.4	36.8	-0.6	36.2	74.0	-37.8	Peak	Horizontal
*	4416.8	36.2	1.4	37.6	84.6	-47.0	Peak	Horizontal
	4873.0	35.0	2.7	37.7	74.0	-36.3	Peak	Horizontal
*	6813.6	35.1	6.1	41.2	84.6	-43.4	Peak	Horizontal
	3652.0	44.3	-0.6	43.7	74.0	-30.3	Peak	Vertical
*	4491.6	34.8	1.6	36.4	84.6	-48.2	Peak	Vertical
	4867.5	38.3	2.7	41.0	74.0	-33.0	Peak	Vertical
*	6253.6	35.4	4.7	40.1	84.6	-44.5	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is 20dBc of the fundamental emission level (104.6dB μ V/m).

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Mode:	802.11n-HT20	Test Site:	AC1
Test Channel:	11	Test Engineer:	Roy Cheng
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
	3652.7	36.5	-0.6	35.9	74.0	-38.1	Peak	Horizontal
*	4416.5	35.5	1.4	36.9	84.4	-47.5	Peak	Horizontal
	4873.7	35.1	2.7	37.8	74.0	-36.2	Peak	Horizontal
*	6935.7	35.6	6.6	42.2	84.4	-42.2	Peak	Horizontal
	3694.5	42.8	-0.6	42.2	74.0	-31.8	Peak	Vertical
*	4461.4	35.5	1.5	37.0	84.4	-47.4	Peak	Vertical
	4918.5	38.4	2.8	41.2	74.0	-32.8	Peak	Vertical
*	6925.5	35.5	6.6	42.1	84.4	-42.3	Peak	Vertical


Note 1: "*" is not in restricted band, its limit is 20dBc of the fundamental emission level (104.4dB μ V/m).

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

The worst case of Radiated Emission below 1GHz:

Site: AC1	Time: 2015/04/04 - 18:53
Limit: FCC_Part15.209_RE(3m)_Class B	Engineer: Eric Wang
Probe: VULB9162_0.03-8GHz	Polarity: Horizontal
EUT: Tablet PC	Power: AC 120V/60Hz
Worst Case Mode: Transmit at channel 2412MHz by 802.11b	

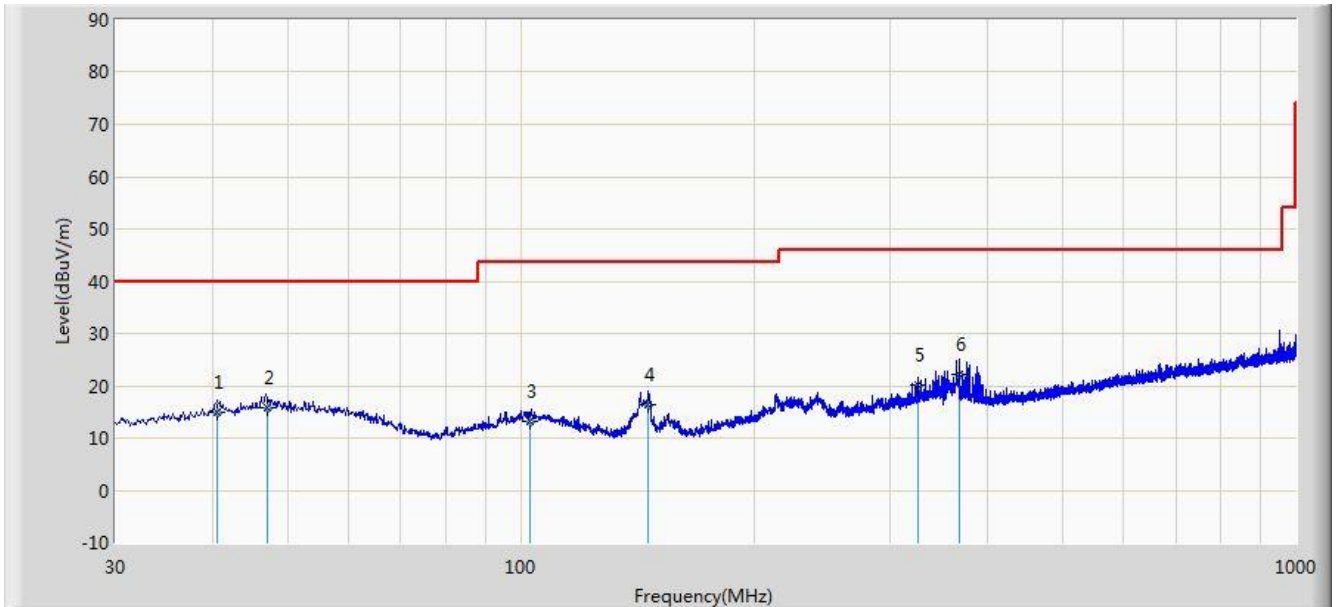


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			40.580	15.039	1.085	-24.961	40.000	13.954	QP
2			47.138	15.937	0.985	-24.063	40.000	14.952	QP
3			102.952	13.282	0.147	-30.218	43.500	13.135	QP
4			146.032	16.272	6.852	-27.228	43.500	9.420	QP
5			326.074	20.035	4.850	-25.965	46.000	15.185	QP
6		*	368.159	22.212	6.158	-23.788	46.000	16.054	QP

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/04/04 - 19:01
Limit: FCC_Part15.209_RE(3m)_Class B	Engineer: Eric Wang
Probe: VULB9162_0.03-8GHz	Polarity: Vertical
EUT: Tablet PC	Power: AC 120V/60Hz
Worst Case Mode: Transmit at channel 2412MHz by 802.11b	

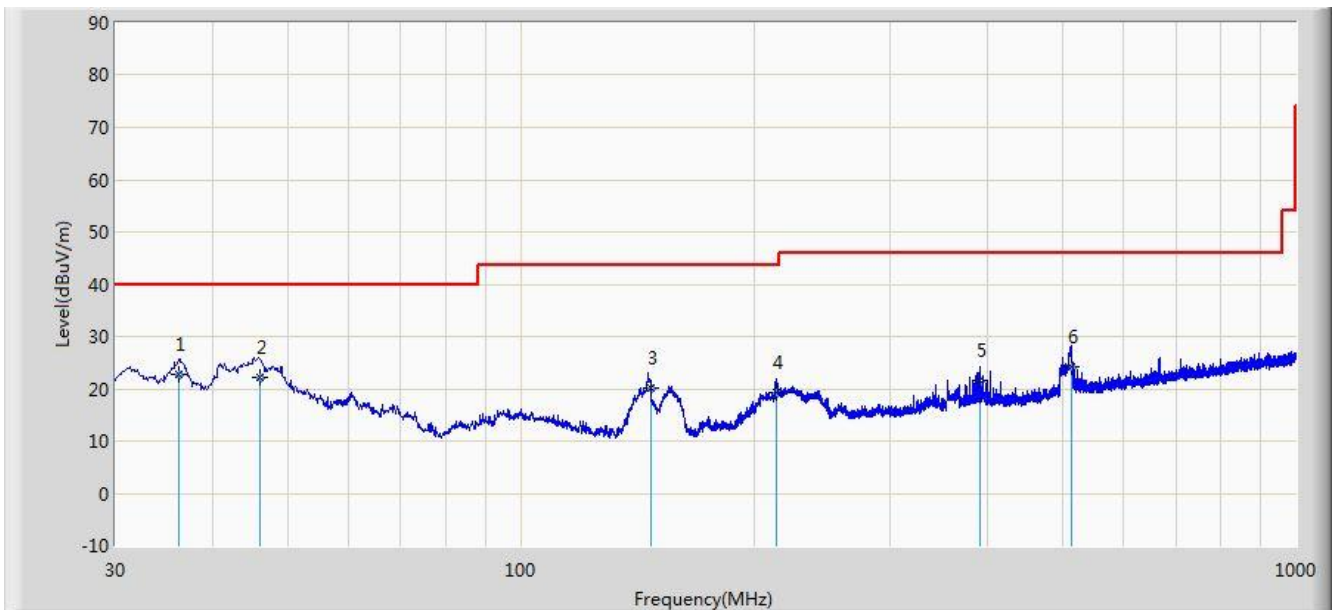


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	36.258	22.623	9.478	-17.377	40.000	13.145	QP
2			46.123	22.126	7.158	-17.874	40.000	14.968	QP
3			147.014	20.076	10.654	-23.424	43.500	9.422	QP
4			214.010	19.311	6.850	-24.189	43.500	12.461	QP
5			392.086	21.633	5.147	-24.367	46.000	16.487	QP
6			513.008	24.154	5.740	-21.846	46.000	18.414	QP

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/04/04 - 09:44
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: FMZB1519_0.009-30MHz	Polarity: Face on
EUT: Tablet PC	Power: AC 120V/60Hz
Note: There is the ambient noise within frequency range 9kHz~30MHz.	

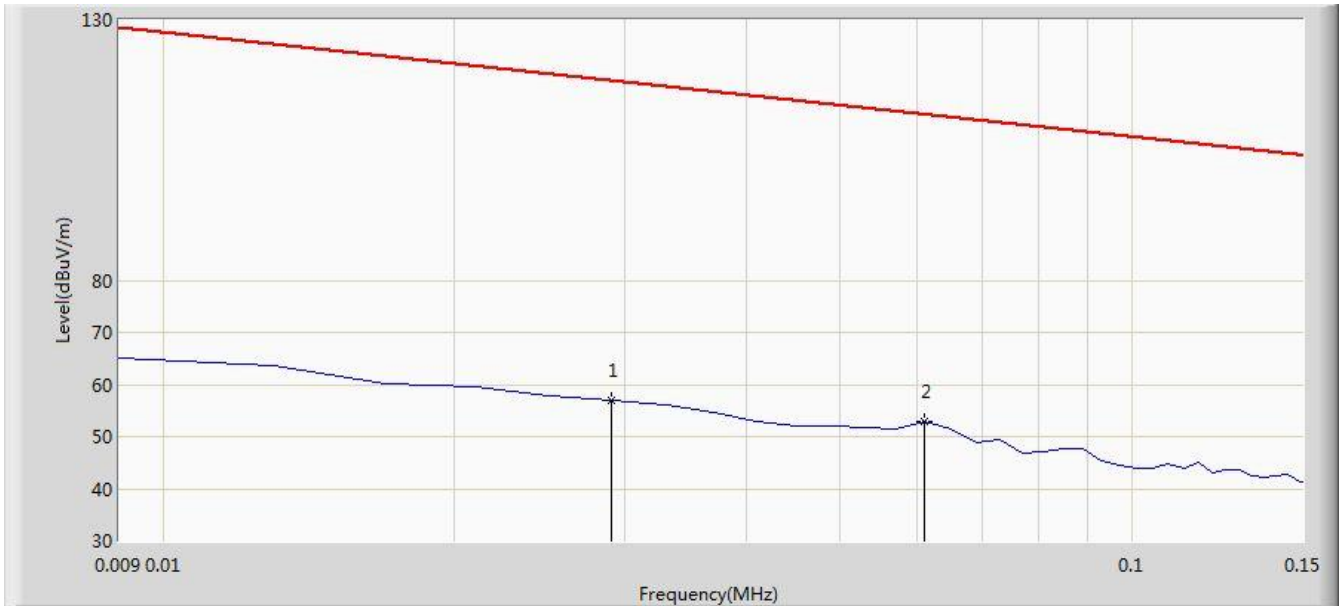


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			0.029	56.893	35.844	-61.463	118.356	21.049	QP
2		*	0.061	52.853	32.542	-59.045	111.898	20.311	QP

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/04/04 - 09:44
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: FMZB1519_0.009-30MHz	Polarity: Face on
EUT: Tablet PC	Power: AC 120V/60Hz
Note: There is the ambient noise within frequency range 9kHz~30MHz.	

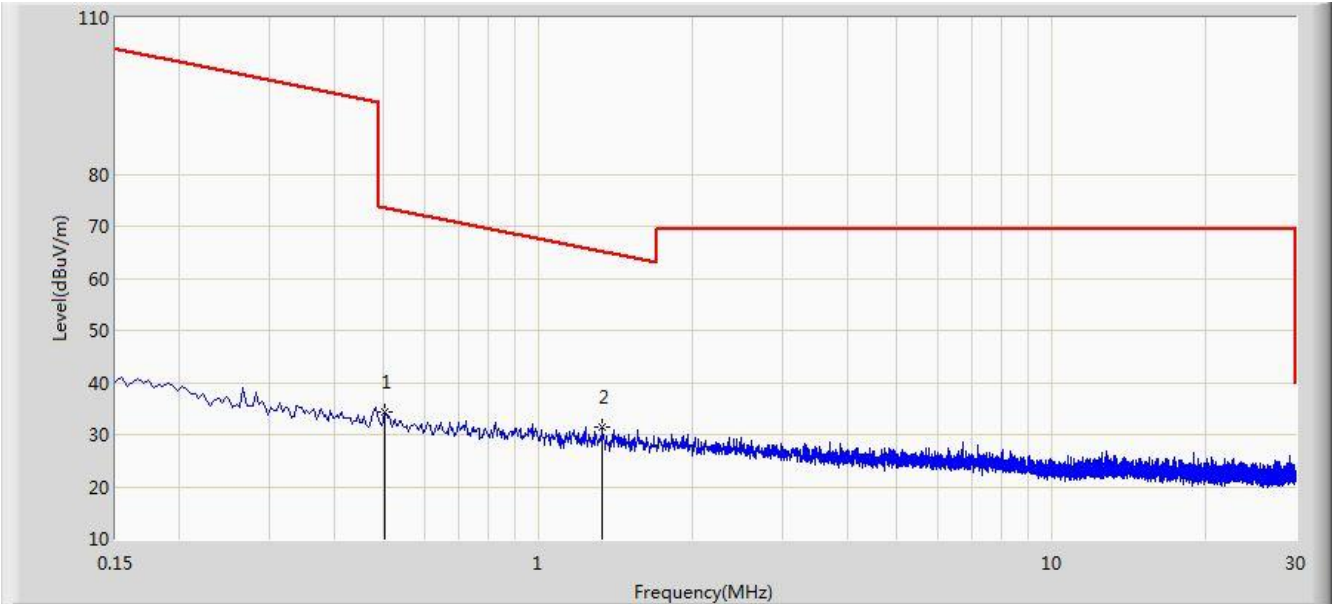


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			0.502	34.370	13.947	-39.220	73.590	20.423	QP
2		*	1.334	31.595	11.104	-33.530	65.125	20.491	QP

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/04/04 - 10:21
Limit: FCC_Part15.209_RE(1m)	Engineer: Roy Cheng
Probe: BBHA9170_18-40GHz	Polarity: Horizontal
EUT: Tablet PC	Power: AC 120V/60Hz
Note: There is the ambient noise within frequency range 18GHz~25GHz.	

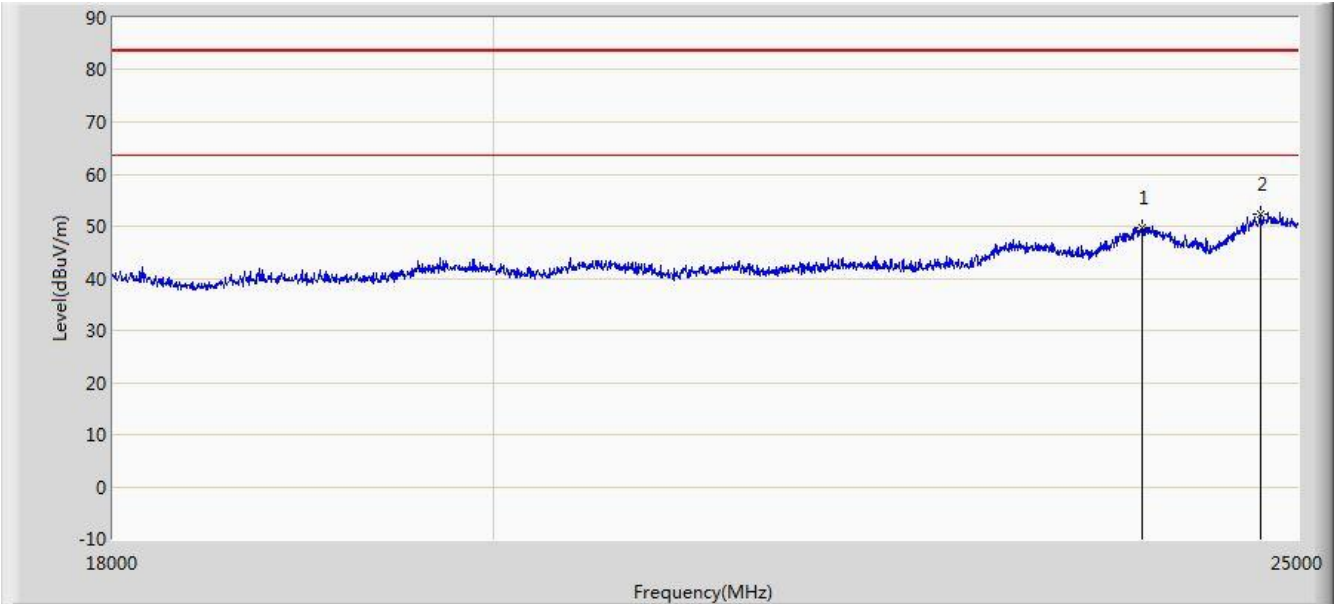


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			23943.000	49.776	35.866	-33.724	83.500	13.910	PK
2		*	24741.000	52.375	37.681	-31.125	83.500	14.694	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2015/04/04 - 10:21
Limit: FCC_Part15.209_RE(1m)	Engineer: Roy Cheng
Probe: BBHA9170_18-40GHz	Polarity: Vertical
EUT: Tablet PC	Power: AC 120V/60Hz
Note: There is the ambient noise within frequency range 18GHz~25GHz.	

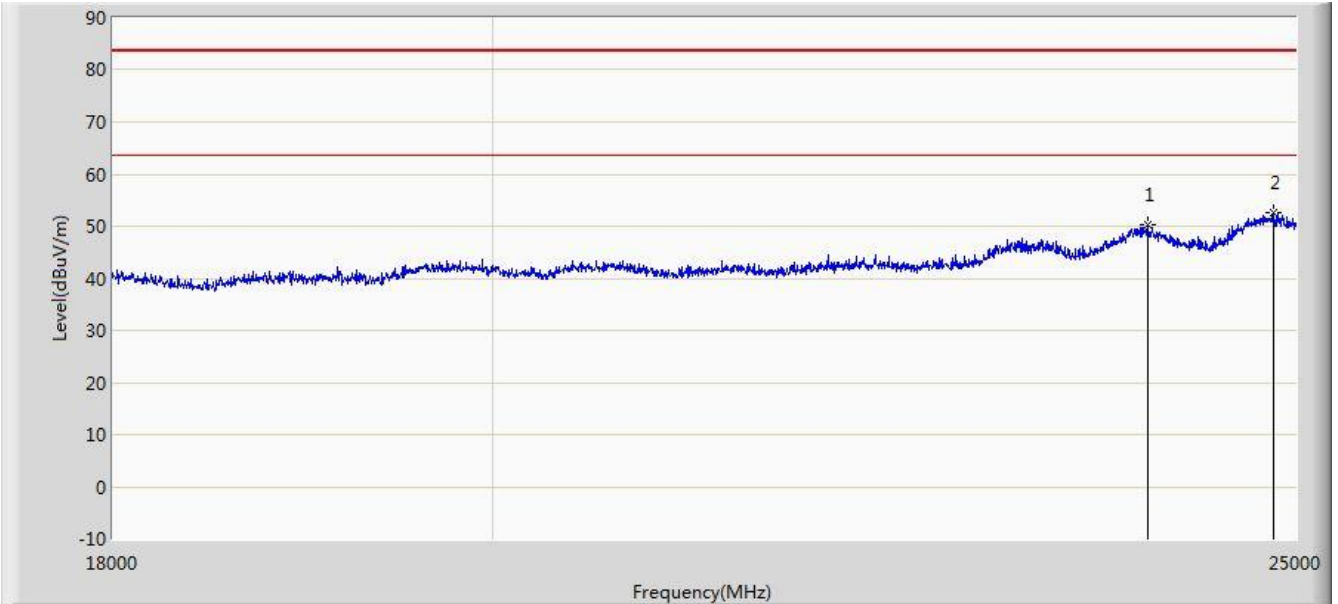

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			23999.000	50.379	36.435	-33.121	83.500	13.944	PK
2		*	24846.000	52.503	37.735	-30.997	83.500	14.768	PK


Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

7.7. Radiated Restricted Band Edge Measurement

7.7.1. Test Result

Site: AC1	Time: 2015/04/03 - 18:57
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Tablet PC	Power: AC 120V/60Hz
Note: Test Mode: Transmit at channel 2412MHz by 802.11b	

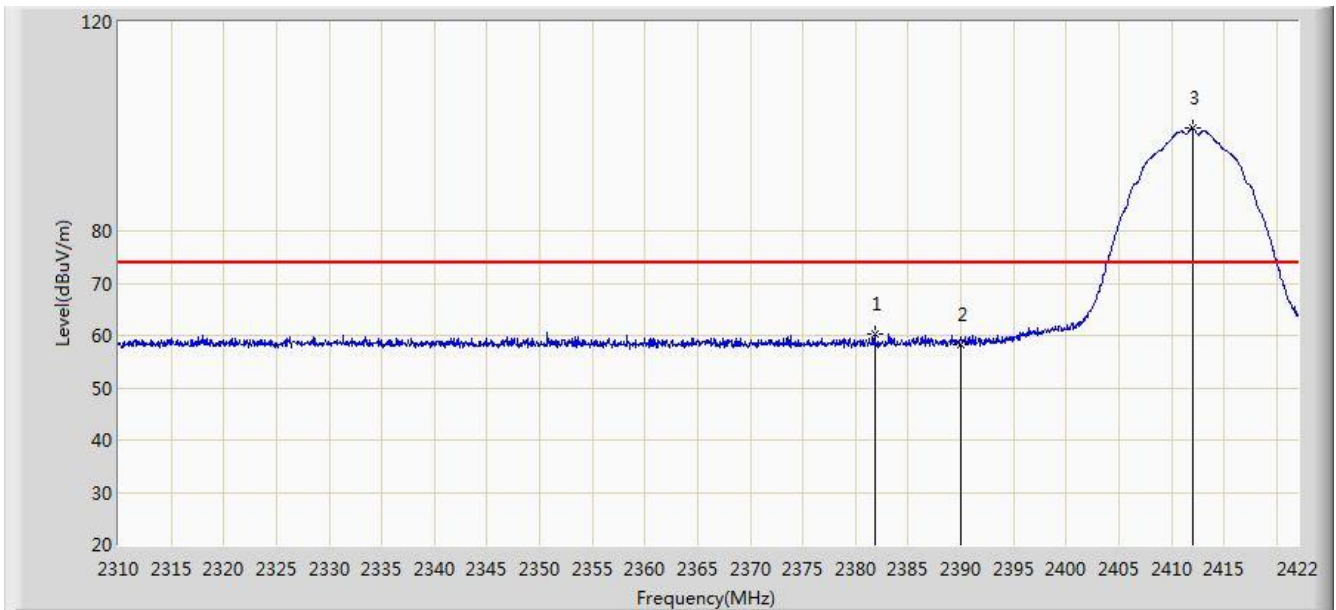


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2381.792	60.234	29.016	-13.766	74.000	31.218	PK
2			2390.000	58.250	27.047	-15.750	74.000	31.203	PK
3		*	2411.976	99.677	68.507	N/A	N/A	31.170	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/04/03 - 19:01
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Tablet PC	Power: AC 120V/60Hz
Note: Test Mode: Transmit at channel 2412MHz by 802.11b	

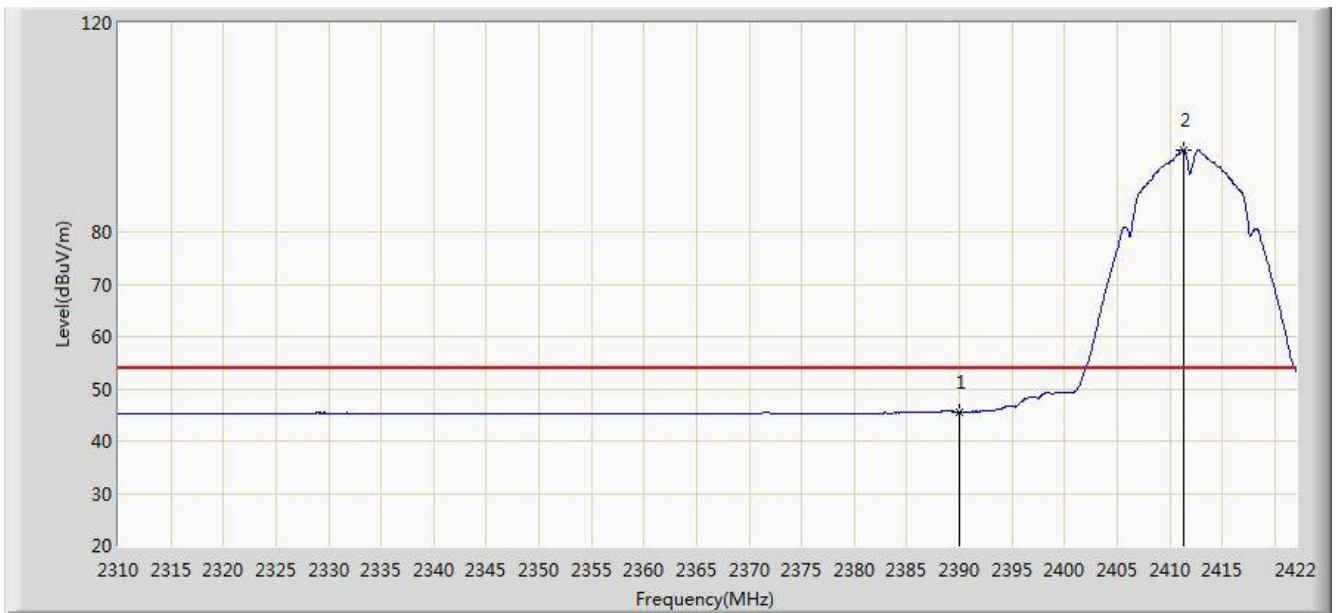


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	45.524	14.321	-8.476	54.000	31.203	AV
2		*	2411.304	95.766	64.595	N/A	N/A	31.171	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/04/03 - 19:01
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Tablet PC	Power: AC 120V/60Hz
Note: Test Mode: Transmit at channel 2412MHz by 802.11b	

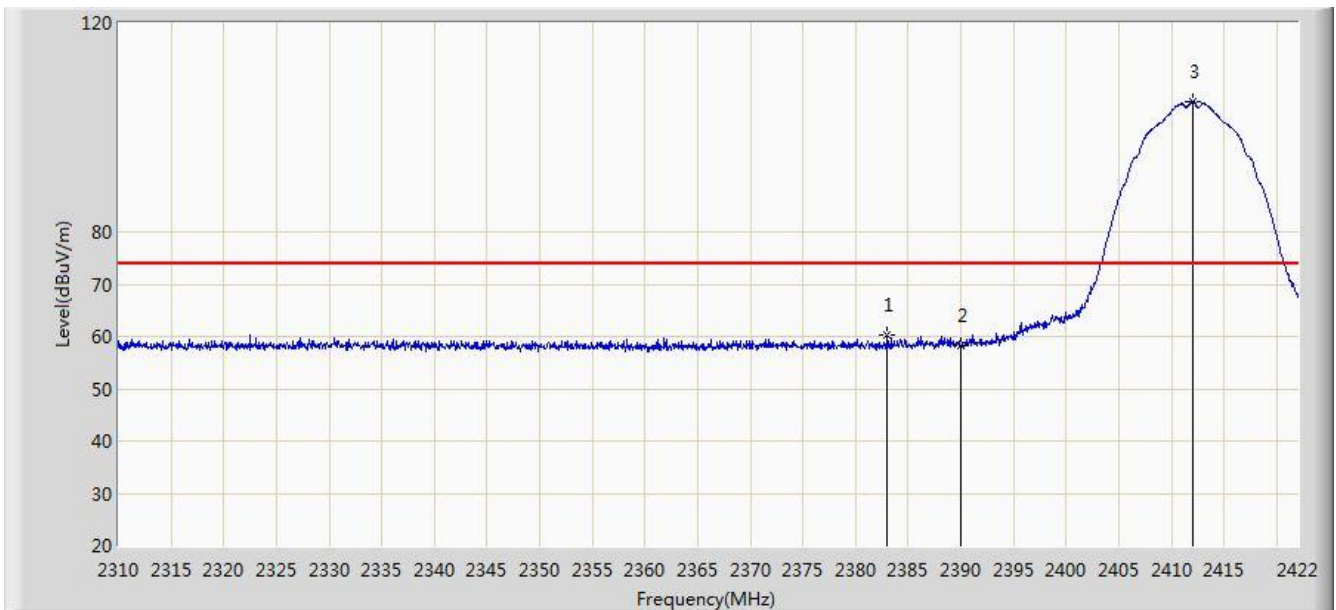


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2383.024	60.268	29.052	-13.732	74.000	31.216	PK
2			2390.000	58.129	26.926	-15.871	74.000	31.203	PK
3		*	2412.032	104.999	73.829	N/A	N/A	31.170	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/04/03 - 19:03
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Tablet PC	Power: AC 120V/60Hz
Note: Test Mode: Transmit at channel 2412MHz by 802.11b	

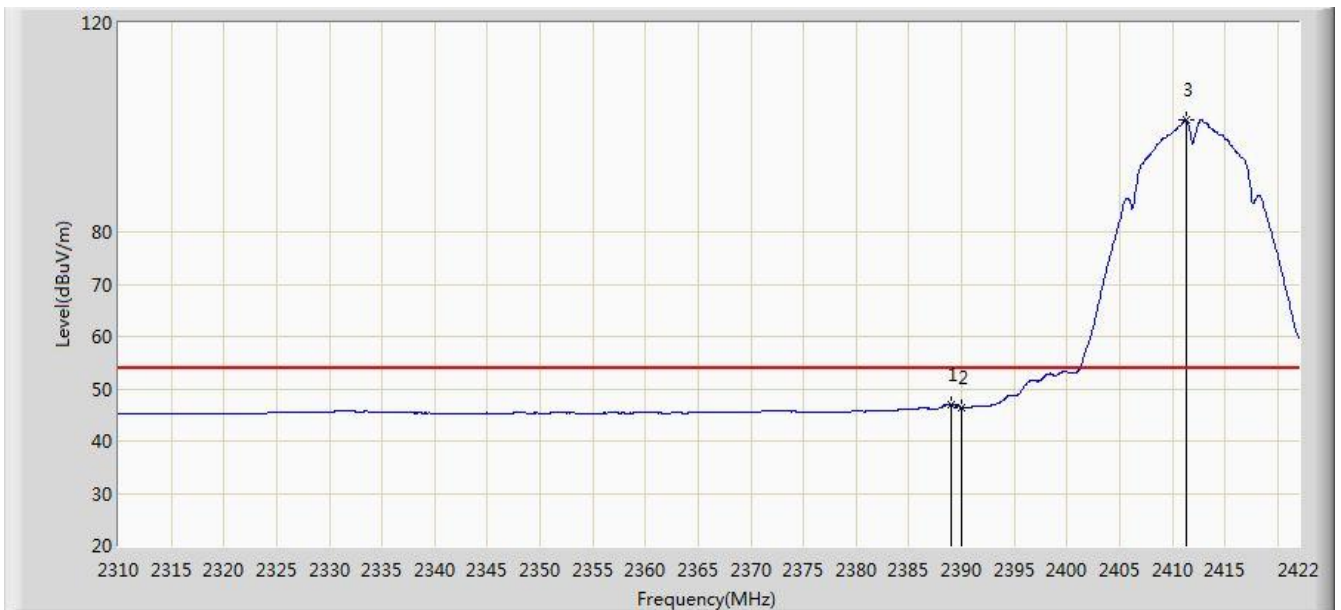


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.016	46.959	15.754	-7.041	54.000	31.204	AV
2			2390.000	46.402	15.199	-7.598	54.000	31.203	AV
3		*	2411.304	101.423	70.252	N/A	N/A	31.171	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/04/03 - 19:03
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Tablet PC	Power: AC 120V/60Hz
Note: Test Mode: Transmit at channel 2412MHz by 802.11b	

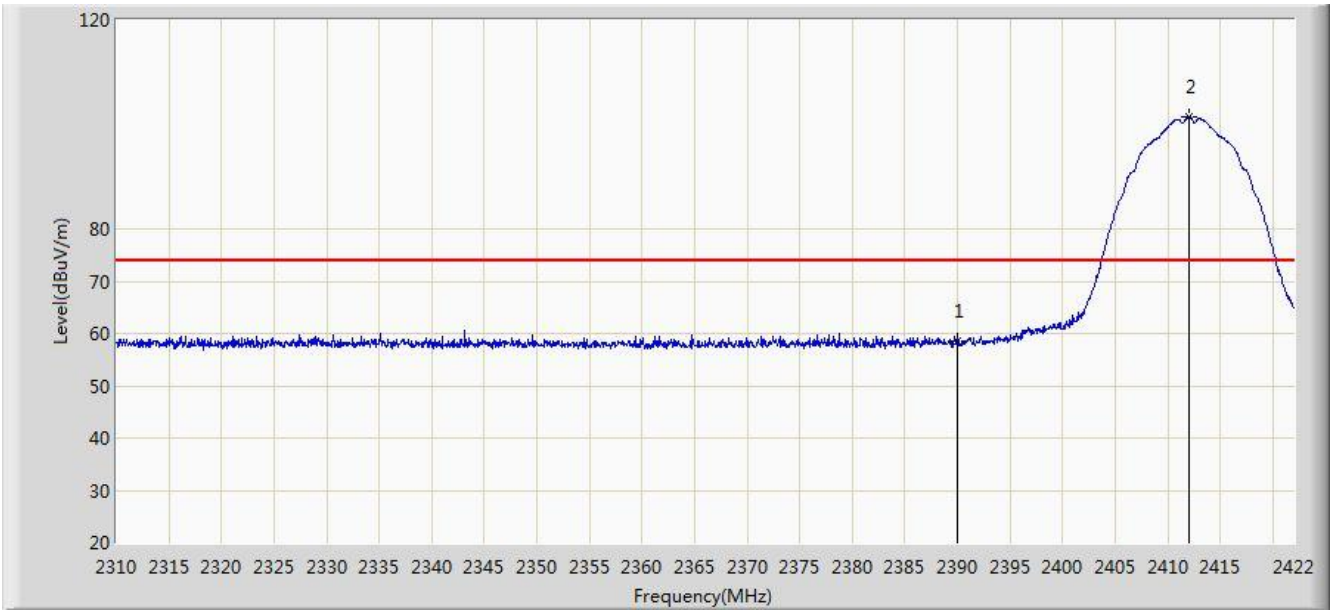


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	58.605	27.402	-15.395	74.000	31.203	PK
2		*	2412.032	101.526	70.356	N/A	N/A	31.170	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/04/03 - 19:05
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Tablet PC	Power: AC 120V/60Hz
Note: Test Mode: Transmit at channel 2412MHz by 802.11b	

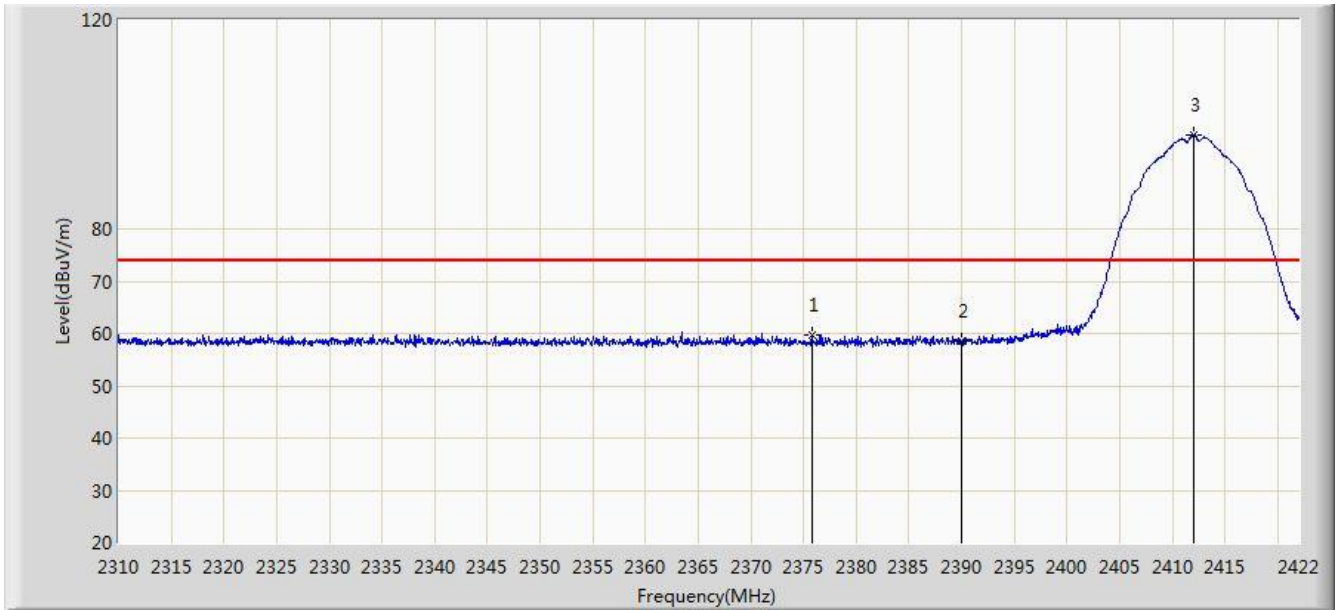


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2375.800	59.656	28.427	-14.344	74.000	31.229	PK
2			2390.000	58.429	27.226	-15.571	74.000	31.203	PK
3		*	2412.032	98.007	66.837	N/A	N/A	31.170	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/04/03 - 19:09
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Tablet PC	Power: AC 120V/60Hz
Note: Test Mode: Transmit at channel 2462MHz by 802.11b	

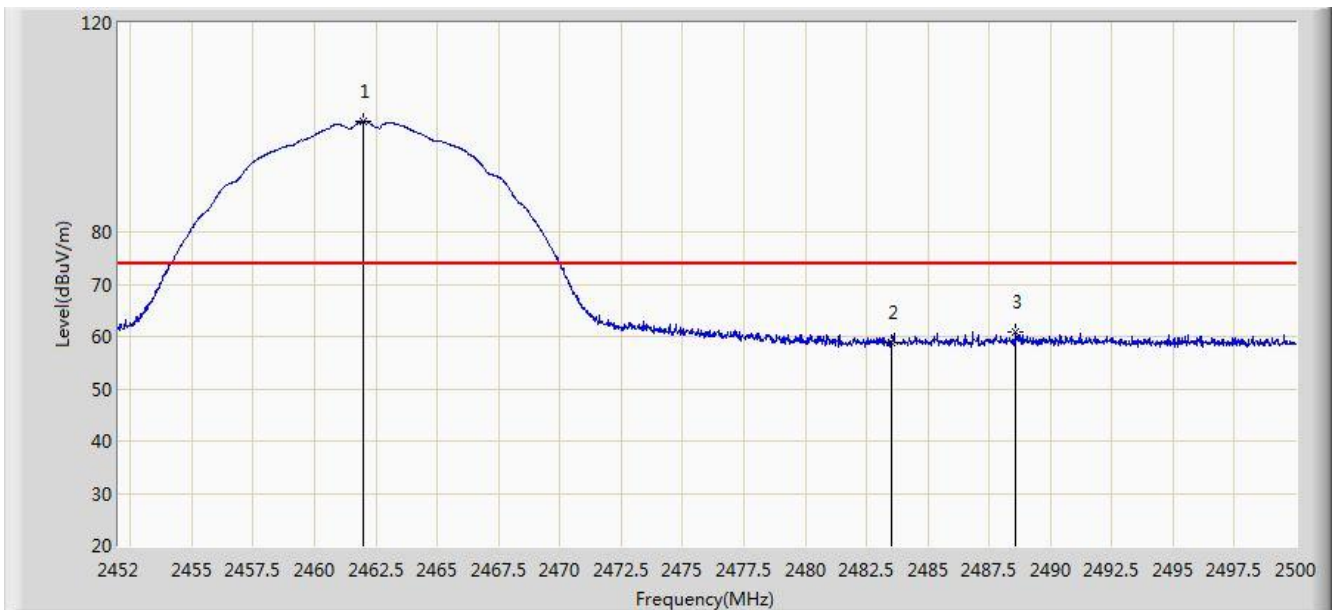

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2461.984	101.136	70.001	N/A	N/A	31.135	PK
2			2483.500	58.927	27.734	-15.073	74.000	31.194	PK
3			2488.600	60.875	29.668	-13.125	74.000	31.207	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/04/03 - 19:11
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Tablet PC	Power: AC 120V/60Hz
Note: Test Mode: Transmit at channel 2462MHz by 802.11b	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2461.240	97.187	66.053	N/A	N/A	31.134	AV
2			2483.500	46.238	15.045	-7.762	54.000	31.194	AV
3			2491.768	46.586	15.371	-7.414	54.000	31.216	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/04/03 - 19:12
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Tablet PC	Power: AC 120V/60Hz
Note: Test Mode: Transmit at channel 2462MHz by 802.11b	

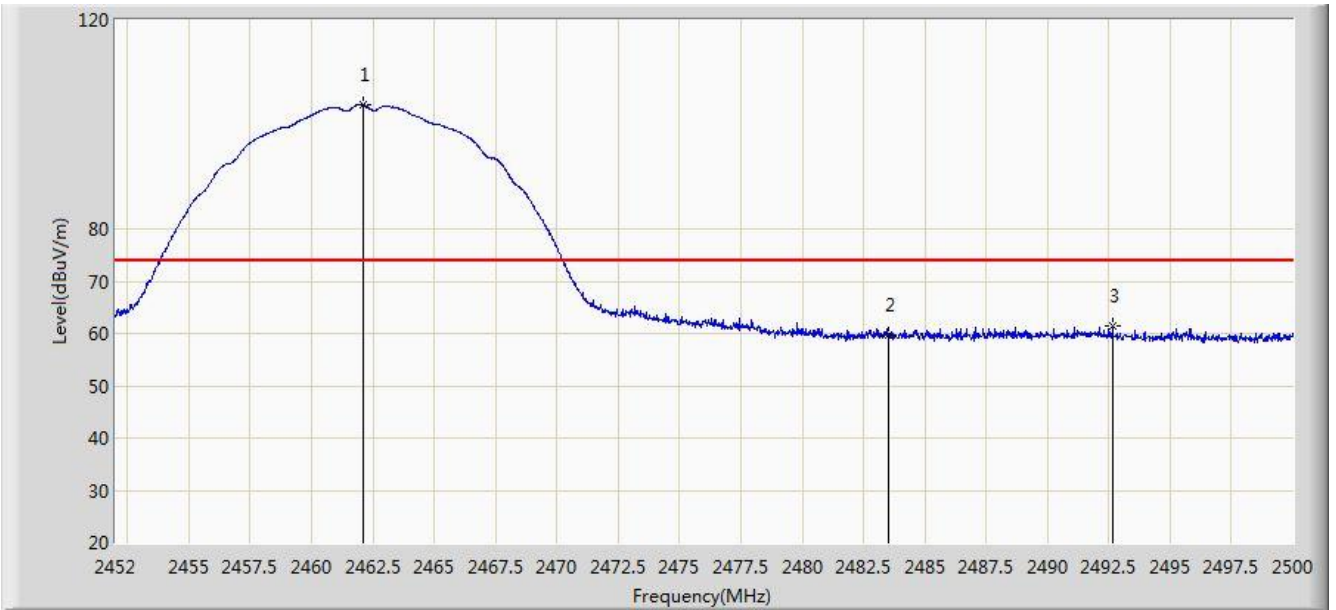

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2462.128	103.725	72.589	N/A	N/A	31.135	PK
2			2483.500	59.754	28.561	-14.246	74.000	31.194	PK
3			2492.656	61.514	30.297	-12.486	74.000	31.217	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/04/03 - 19:14
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Tablet PC	Power: AC 120V/60Hz
Note: Test Mode: Transmit at channel 2462MHz by 802.11b	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2461.312	99.779	68.645	N/A	N/A	31.134	AV
2			2483.500	46.890	15.697	-7.110	54.000	31.194	AV
3			2491.840	47.283	16.068	-6.717	54.000	31.216	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/04/03 - 19:15
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Tablet PC	Power: AC 120V/60Hz
Note: Test Mode: Transmit at channel 2412MHz by 802.11g	

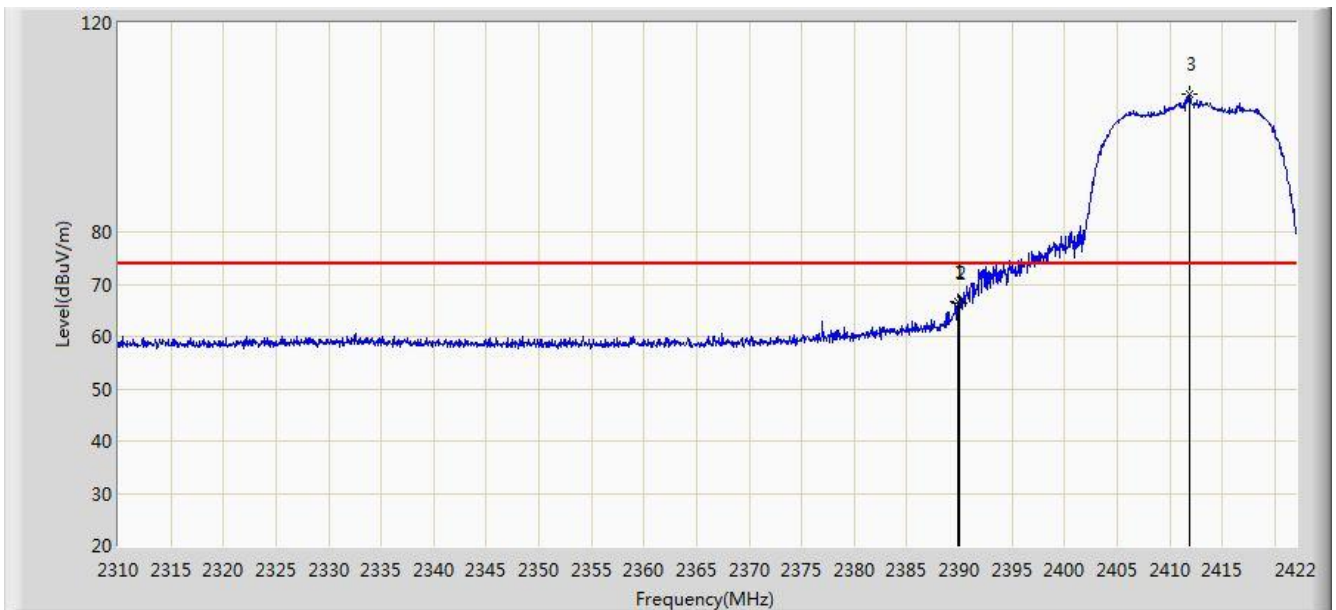


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.800	66.526	35.323	-7.474	74.000	31.203	PK
2			2390.000	66.235	35.032	-7.765	74.000	31.203	PK
3		*	2411.920	106.485	75.315	N/A	N/A	31.170	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/04/03 - 19:18
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Tablet PC	Power: AC 120V/60Hz
Note: Test Mode: Transmit at channel 2412MHz by 802.11g	

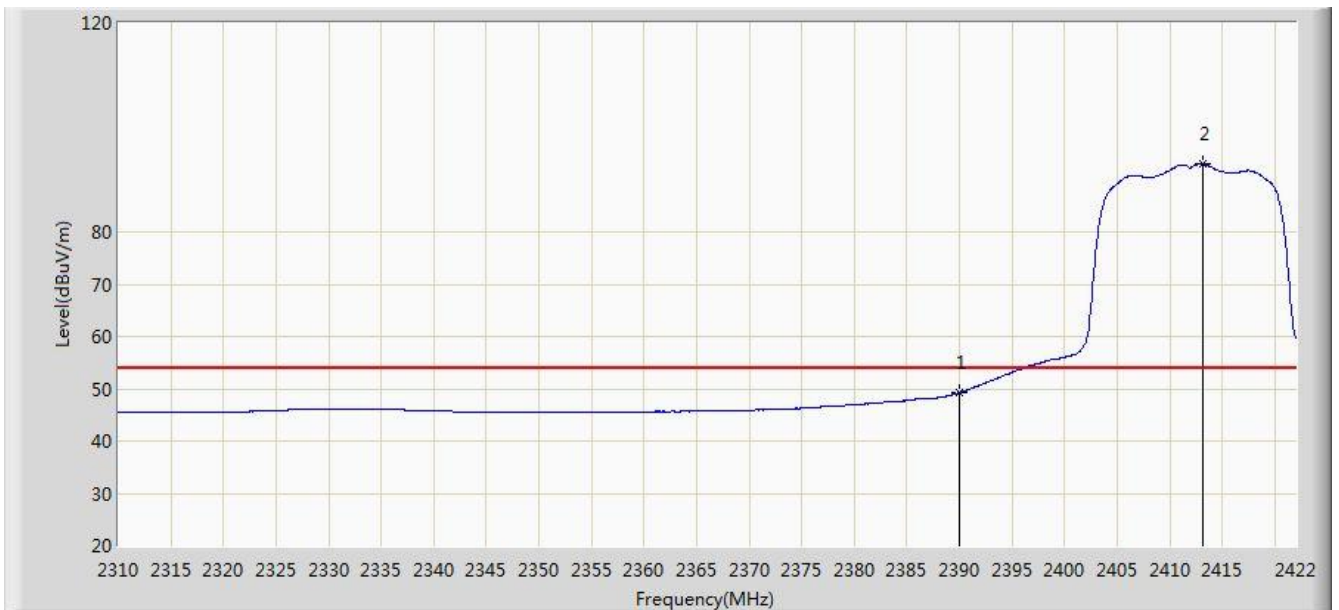


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	49.204	18.001	-4.796	54.000	31.203	AV
2		*	2413.208	92.926	61.759	N/A	N/A	31.167	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/04/03 - 19:20
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Tablet PC	Power: AC 120V/60Hz
Note: Test Mode: Transmit at channel 2412MHz by 802.11g	

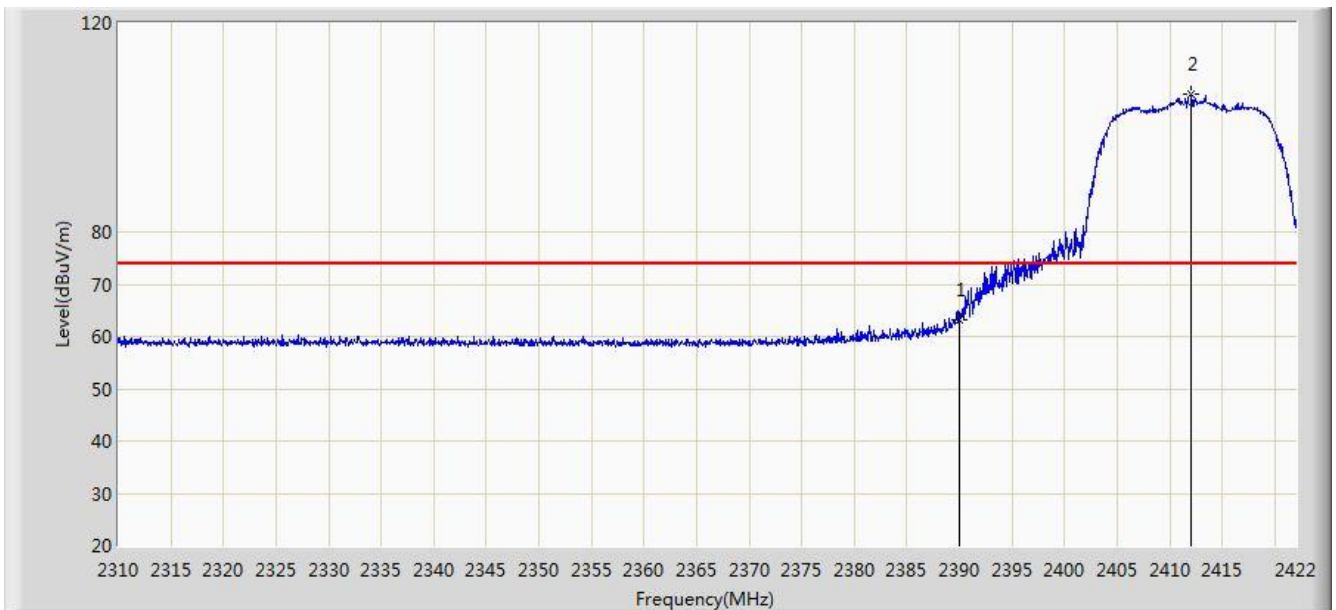


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	63.113	31.910	-10.887	74.000	31.203	PK
2		*	2412.088	106.265	75.096	N/A	N/A	31.170	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/04/03 - 19:26
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Tablet PC	Power: AC 120V/60Hz
Note: Test Mode: Transmit at channel 2412MHz by 802.11g	

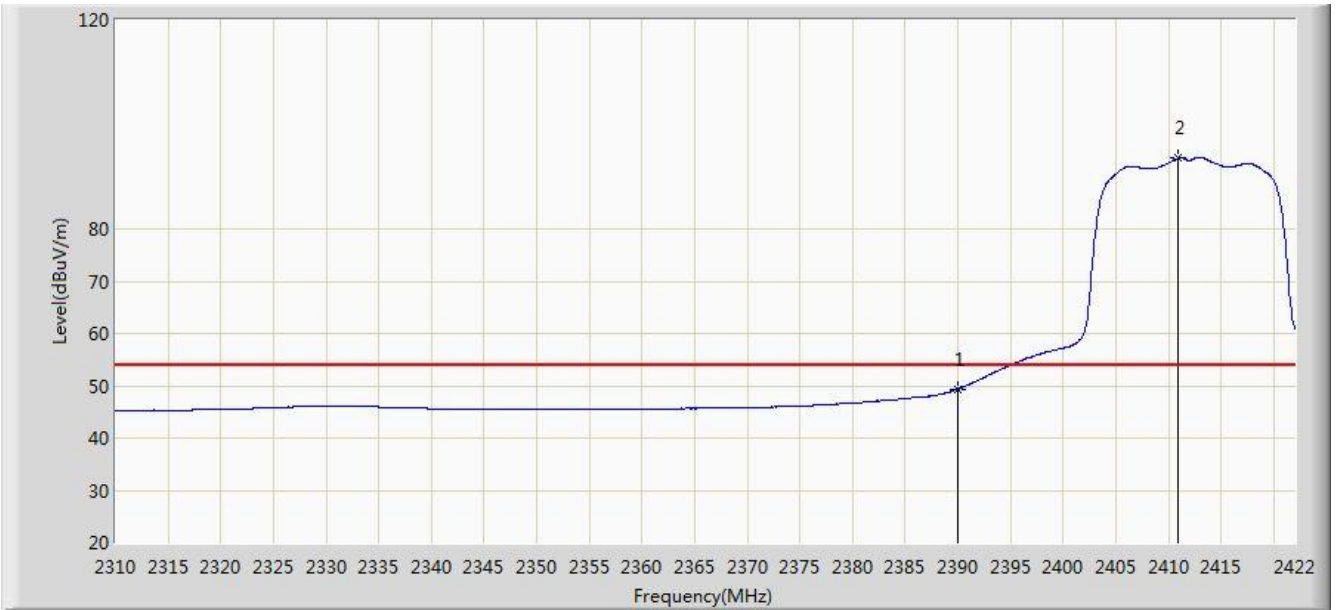


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	49.399	18.196	-4.601	54.000	31.203	AV
2		*	2410.968	93.536	62.365	N/A	N/A	31.171	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/04/03 - 19:29
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Tablet PC	Power: AC 120V/60Hz
Note: Test Mode: Transmit at channel 2462MHz by 802.11g	

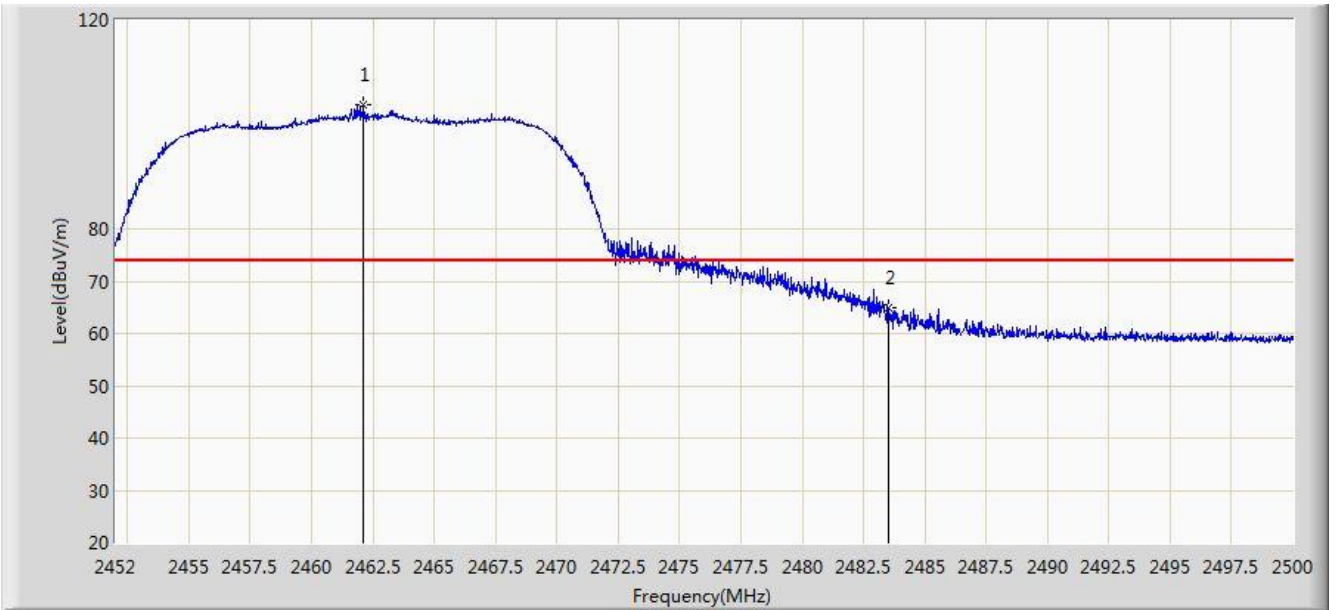


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2462.128	103.643	72.507	N/A	N/A	31.135	PK
2			2483.500	65.011	33.818	-8.989	74.000	31.194	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/04/03 - 19:34
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Tablet PC	Power: AC 120V/60Hz
Note: Test Mode: Transmit at channel 2462MHz by 802.11g	

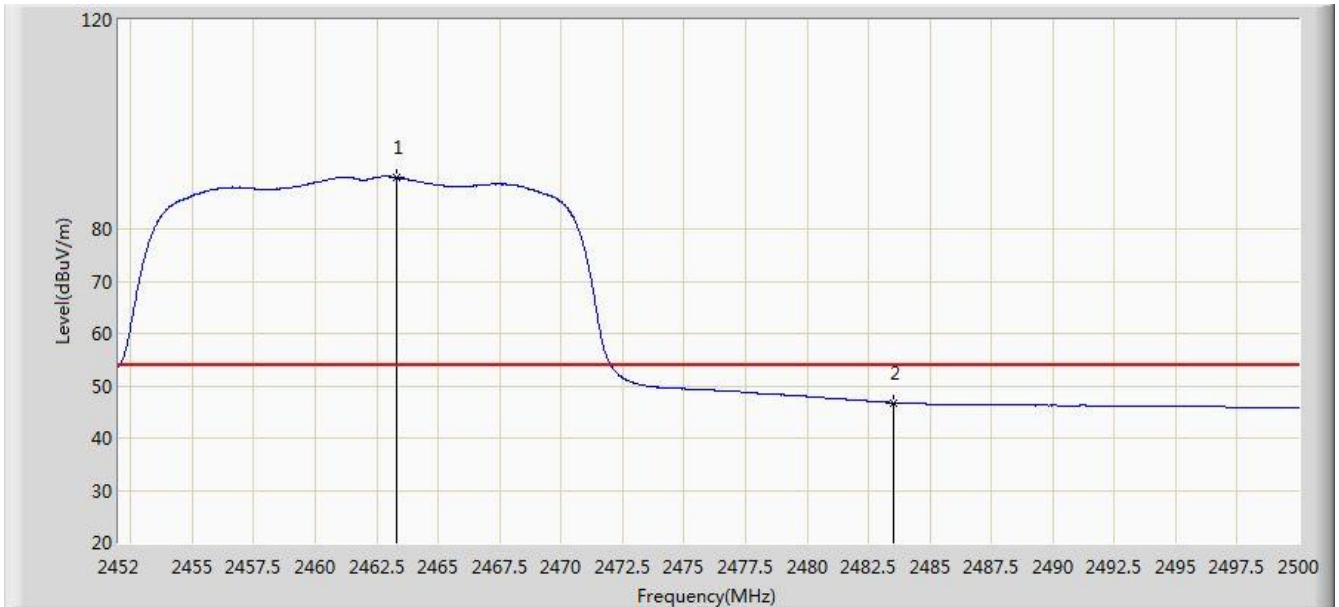


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2463.328	89.810	58.672	N/A	N/A	31.138	AV
2			2483.500	46.733	15.540	-7.267	54.000	31.194	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/04/03 - 19:35
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Tablet PC	Power: AC 120V/60Hz
Note: Test Mode: Transmit at channel 2462MHz by 802.11g	

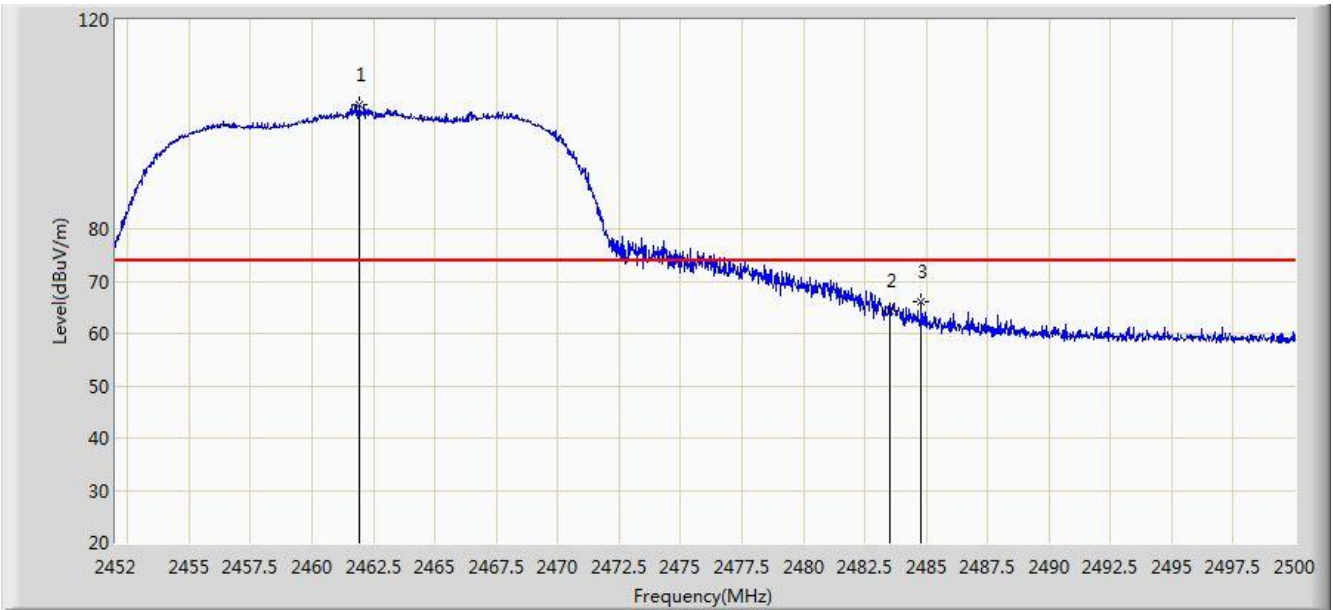


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2461.936	103.881	72.746	N/A	N/A	31.135	PK
2			2483.500	64.332	33.139	-9.668	74.000	31.194	PK
3			2484.808	66.010	34.813	-7.990	74.000	31.197	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/04/03 - 19:39
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Tablet PC	Power: AC 120V/60Hz
Note: Test Mode: Transmit at channel 2462MHz by 802.11g	

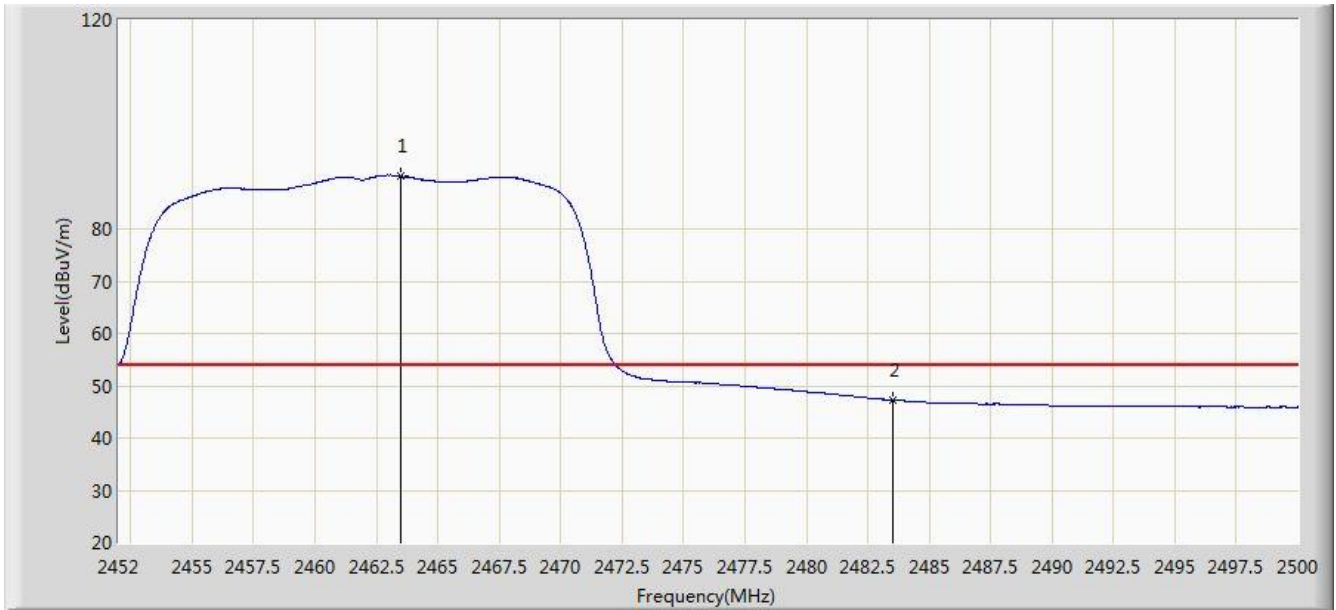


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2463.472	90.067	58.929	N/A	N/A	31.138	AV
2			2483.500	47.284	16.091	-6.716	54.000	31.194	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/04/03 - 19:40
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Tablet PC	Power: AC 120V/60Hz
Note: Test Mode: Transmit at channel 2412MHz by 802.11n-HT20	

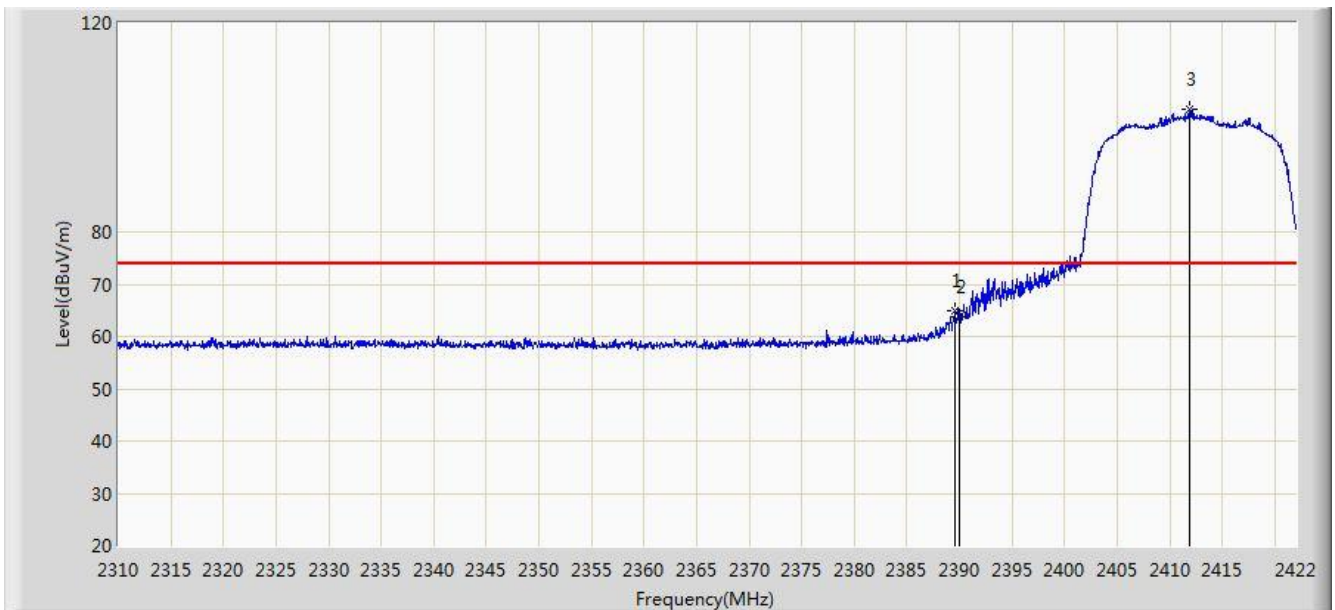


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.520	64.921	33.717	-9.079	74.000	31.204	PK
2			2390.000	63.663	32.460	-10.337	74.000	31.203	PK
3		*	2411.920	103.594	72.424	N/A	N/A	31.170	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/04/03 - 19:44
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Tablet PC	Power: AC 120V/60Hz
Note: Test Mode: Transmit at channel 2412MHz by 802.11n-HT20	

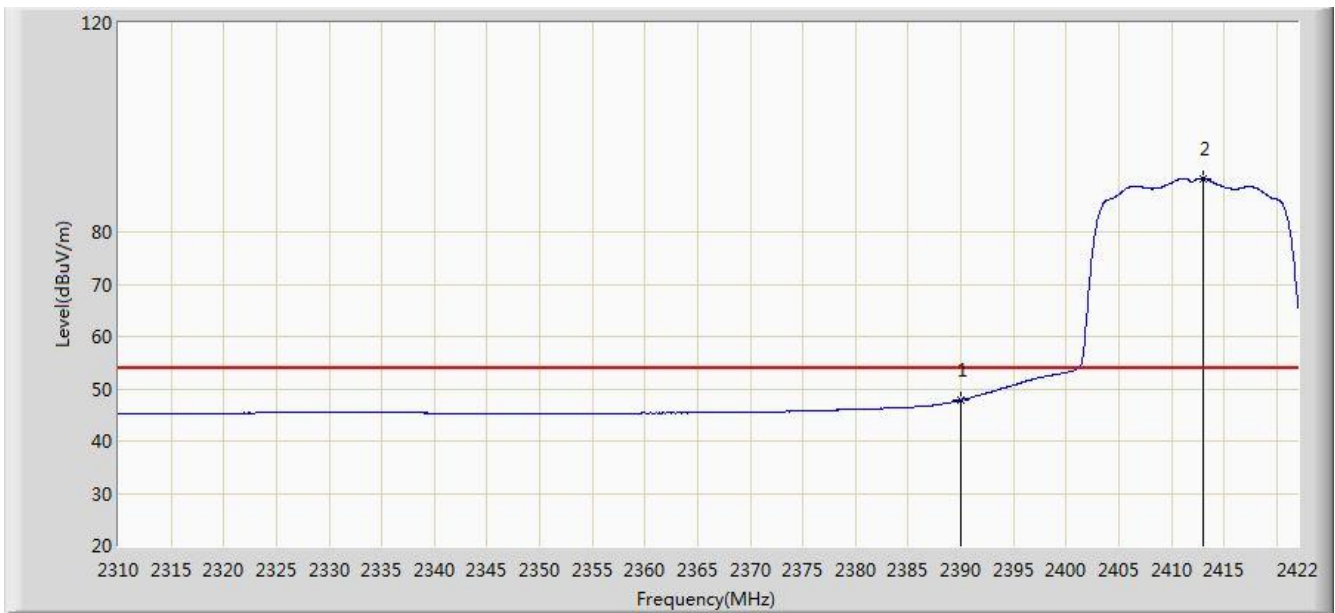


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	47.885	16.682	-6.115	54.000	31.203	AV
2		*	2413.040	90.289	59.121	N/A	N/A	31.167	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/04/03 - 19:45
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Tablet PC	Power: AC 120V/60Hz
Note: Test Mode: Transmit at channel 2412MHz by 802.11n-HT20	

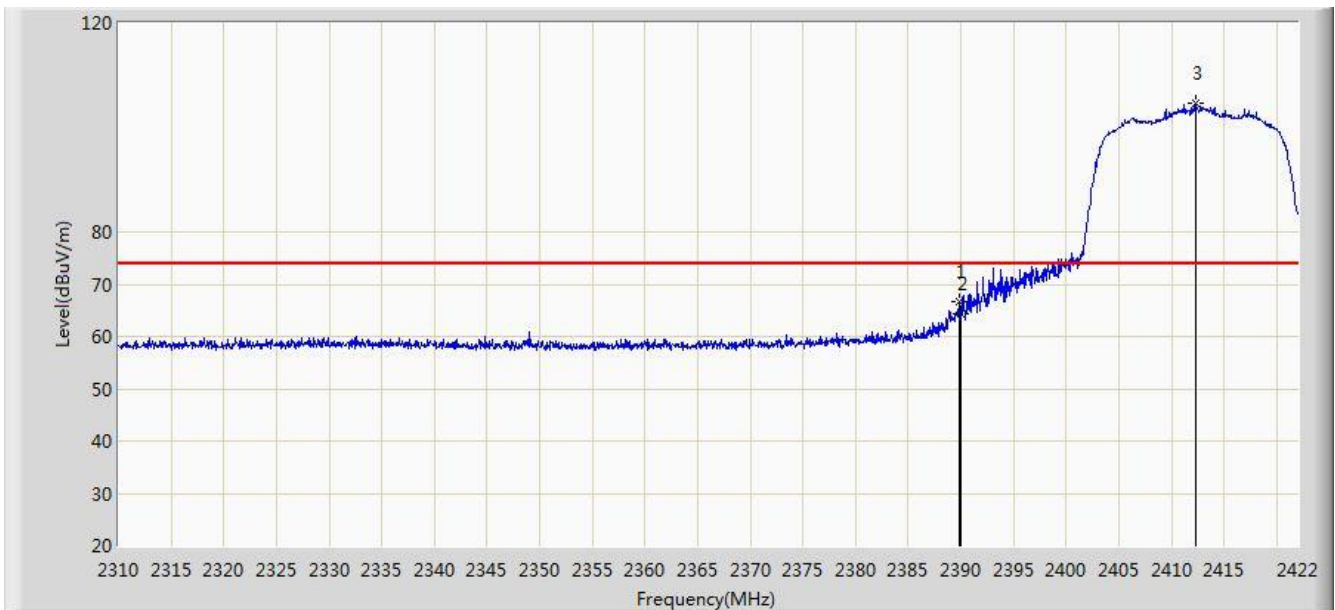


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.912	66.564	35.361	-7.436	74.000	31.203	PK
2			2390.000	64.367	33.164	-9.633	74.000	31.203	PK
3		*	2412.256	104.640	73.471	N/A	N/A	31.169	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/04/03 - 19:48
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Tablet PC	Power: AC 120V/60Hz
Note: Test Mode: Transmit at channel 2412MHz by 802.11n-HT20	

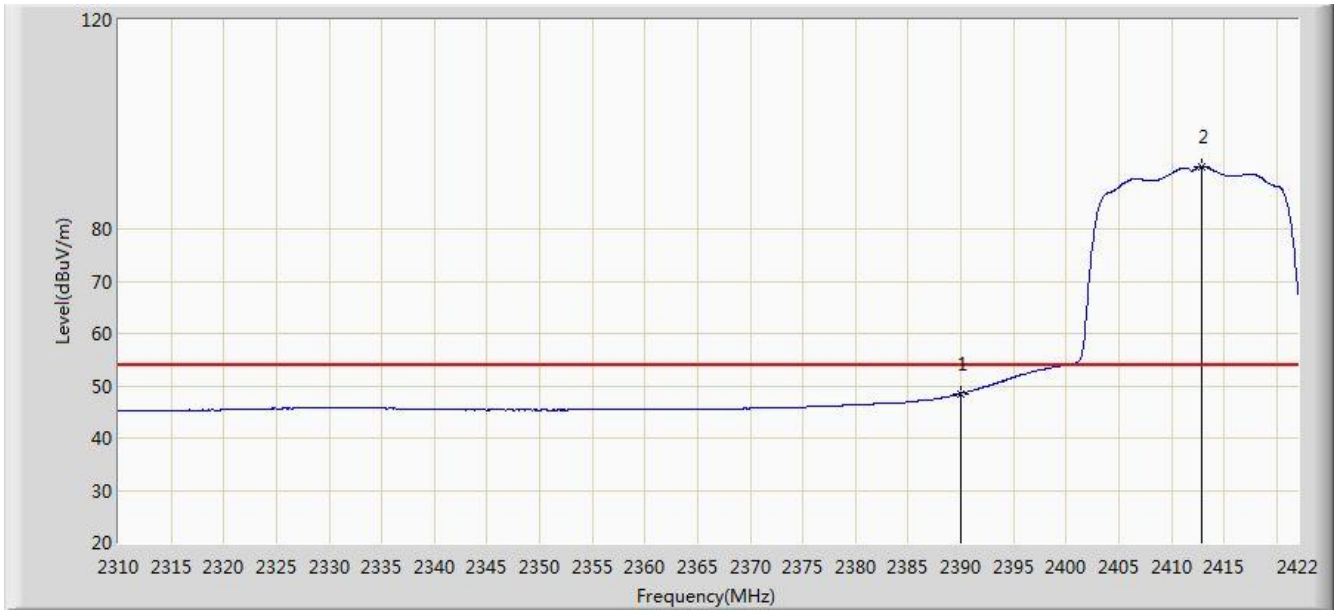


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	48.541	17.338	-5.459	54.000	31.203	AV
2		*	2412.872	91.896	60.728	N/A	N/A	31.168	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/04/03 - 19:49
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Tablet PC	Power: AC 120V/60Hz
Note: Test Mode: Transmit at channel 2462MHz by 802.11n-HT20	

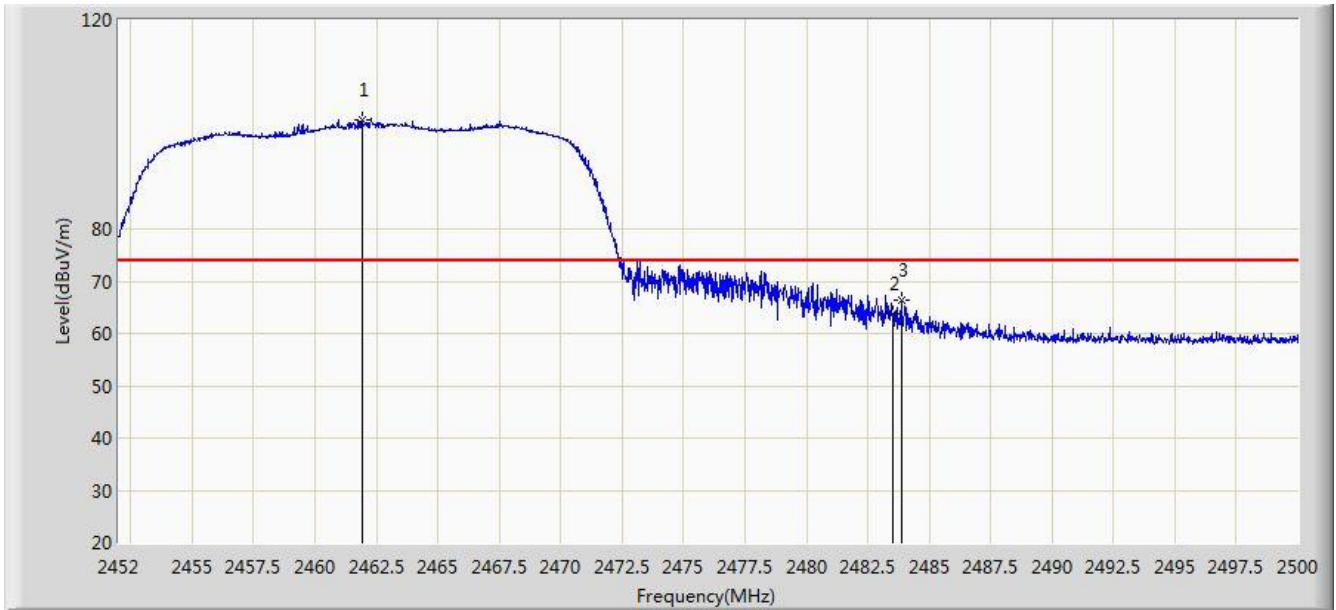


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2461.912	100.908	69.773	N/A	N/A	31.135	PK
2			2483.500	63.809	32.616	-10.191	74.000	31.194	PK
3			2483.872	66.343	35.149	-7.657	74.000	31.194	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/04/03 - 19:52
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Tablet PC	Power: AC 120V/60Hz
Note: Test Mode: Transmit at channel 2462MHz by 802.11n-HT20	

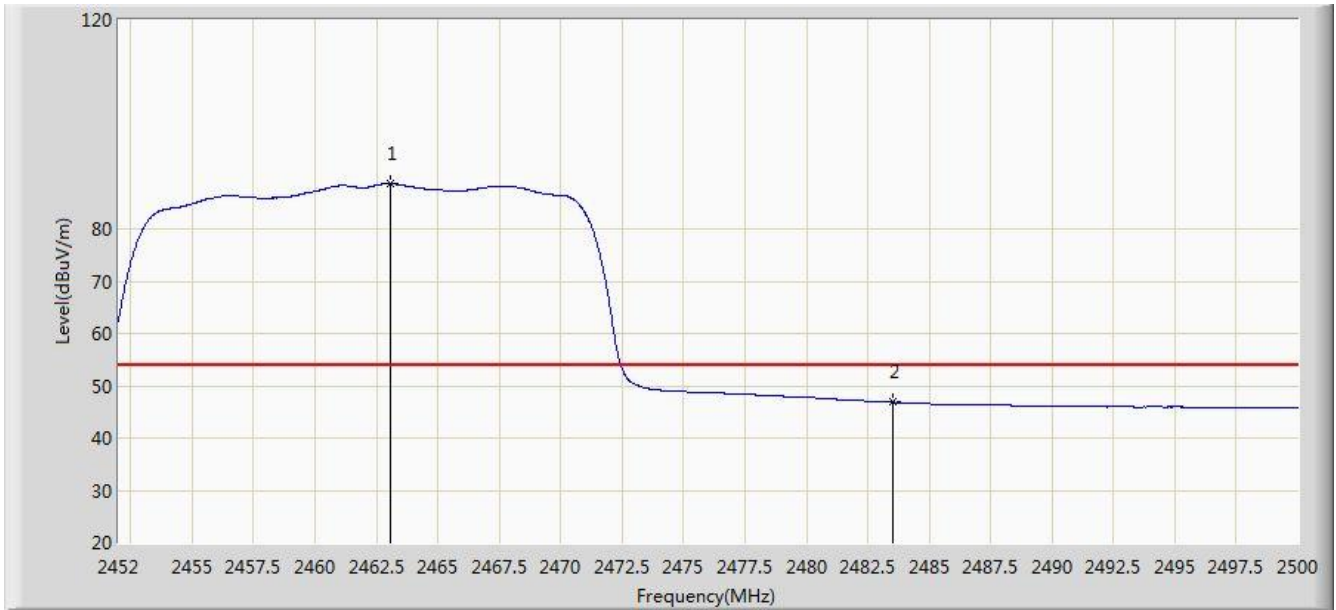


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2463.088	88.614	57.477	N/A	N/A	31.137	AV
2			2483.500	46.845	15.652	-7.155	54.000	31.194	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/04/03 - 19:54
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Tablet PC	Power: AC 120V/60Hz
Note: Test Mode: Transmit at channel 2462MHz by 802.11n-HT20	

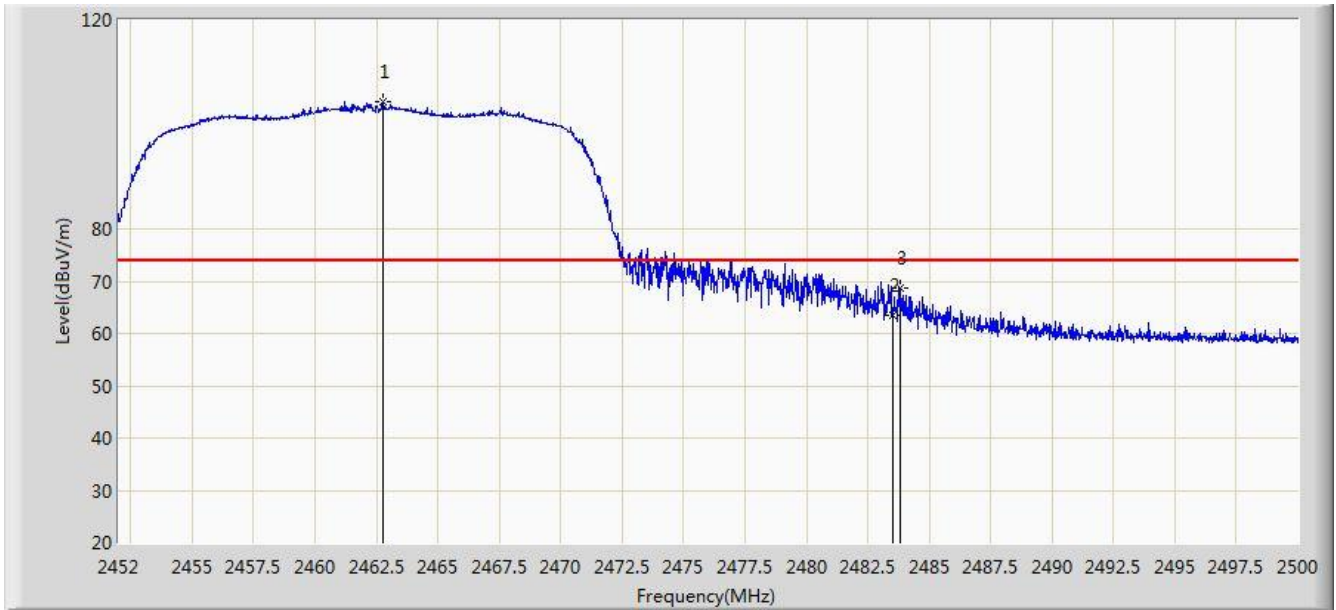


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2462.776	104.373	73.236	N/A	N/A	31.137	PK
2			2483.500	63.612	32.419	-10.388	74.000	31.194	PK
3			2483.848	68.837	37.643	-5.163	74.000	31.194	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2015/04/03 - 19:56
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Tablet PC	Power: AC 120V/60Hz
Note: Test Mode: Transmit at channel 2462MHz by 802.11n-HT20	

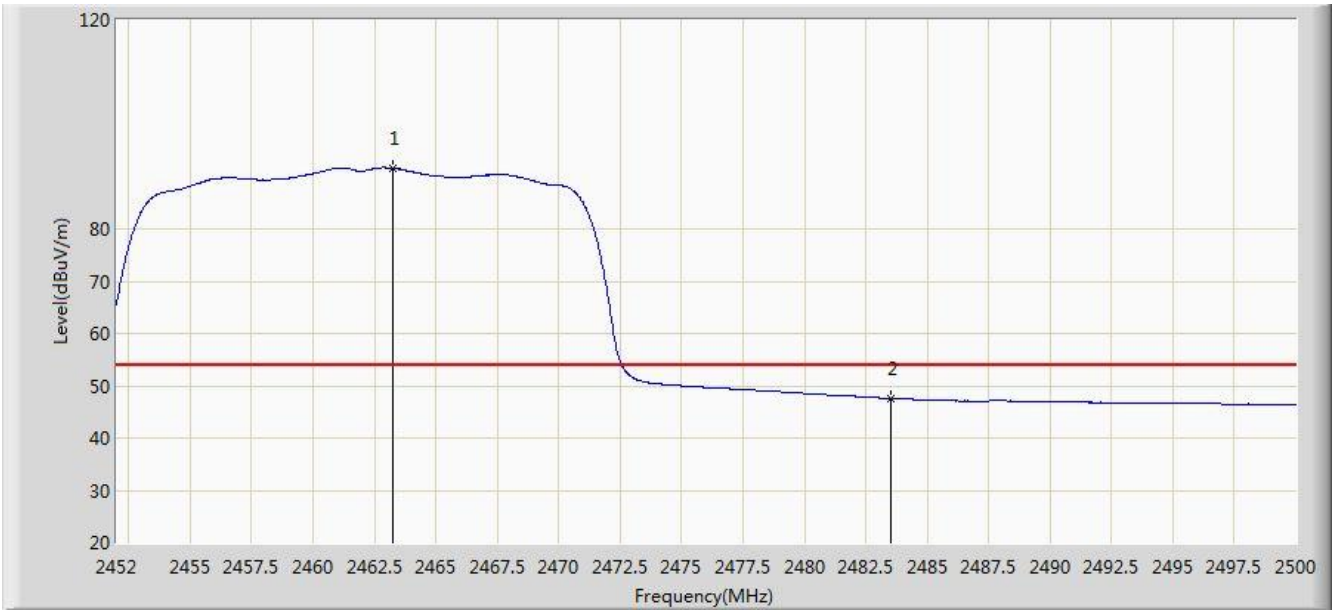

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2463.256	91.631	60.493	N/A	N/A	31.138	AV
2			2483.500	47.595	16.402	-6.405	54.000	31.194	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

7.8. AC Conducted Emissions Measurement


7.8.1. Test Limit

FCC Part 15 Subpart C Paragraph 15.207 Limits		
Frequency (MHz)	QP (dBuV)	AV (dBuV)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.


Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

7.8.2. Test Setup

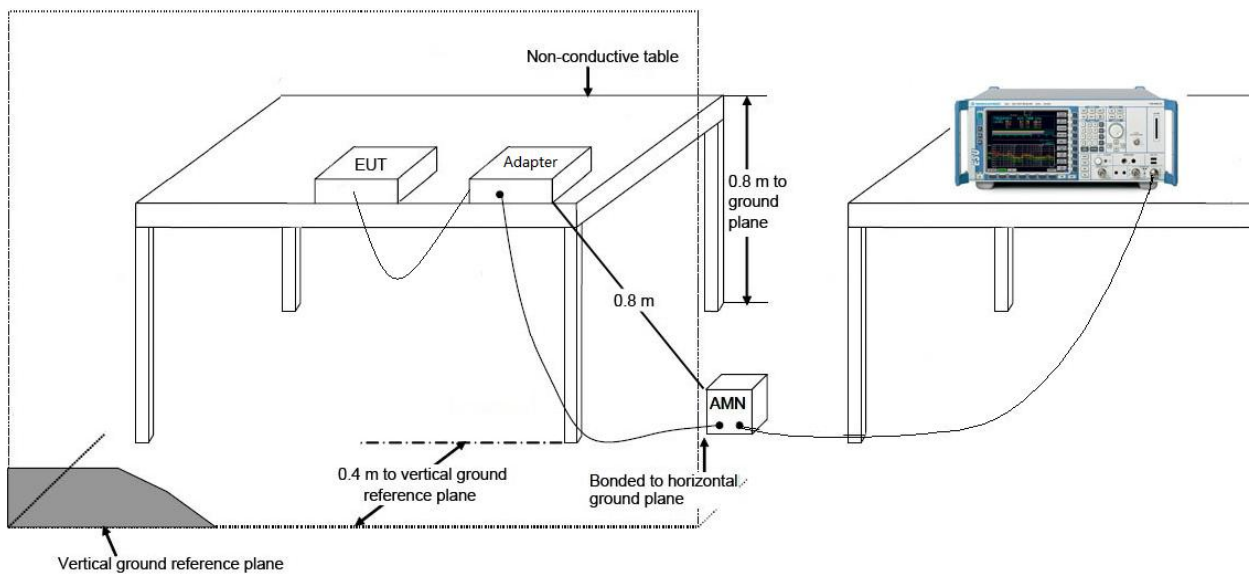

7.8.3. Test Result

Site: SR2	Time: 2015/04/04 - 00:03
Limit: FCC_Part15.207_CE_AC Power	Engineer: Sunny Sun
Probe: ENV216_101683_Filter On	Polarity: Line
EUT: Tablet PC	Power: AC 120V/60Hz
Note: Mode 1	

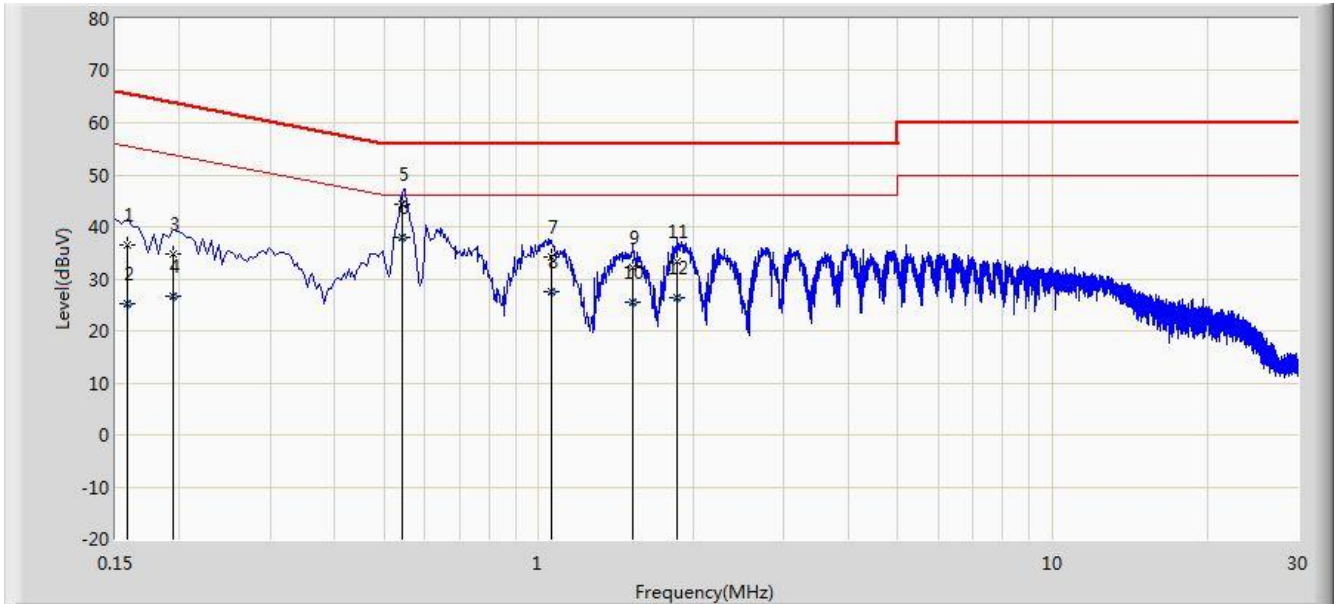


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV)	Factor (dB)	Type
1			0.158	36.458	26.147	-29.111	65.568	10.311	QP
2			0.158	25.192	14.881	-30.376	55.568	10.311	AV
3			0.194	34.672	24.656	-29.191	63.864	10.017	QP
4			0.194	26.676	16.659	-27.188	53.864	10.017	AV
5			0.542	44.419	34.274	-11.581	56.000	10.145	QP
6		*	0.542	38.005	27.860	-7.995	46.000	10.145	AV
7			1.058	34.096	24.190	-21.904	56.000	9.906	QP
8			1.058	27.455	17.548	-18.545	46.000	9.906	AV
9			1.526	32.055	22.167	-23.945	56.000	9.887	QP
10			1.526	25.584	15.697	-20.416	46.000	9.887	AV
11			1.862	33.383	23.507	-22.617	56.000	9.875	QP
12			1.862	26.354	16.479	-19.646	46.000	9.875	AV

Note: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB)

Site: SR2	Time: 2015/04/04 - 00:11
Limit: FCC_Part15.207_CE_AC Power	Engineer: Sunny Sun
Probe: ENV216_101683_Filter On	Polarity: Neutral
EUT: Tablet PC	Power: AC 120V/60Hz
Note: Mode 1	

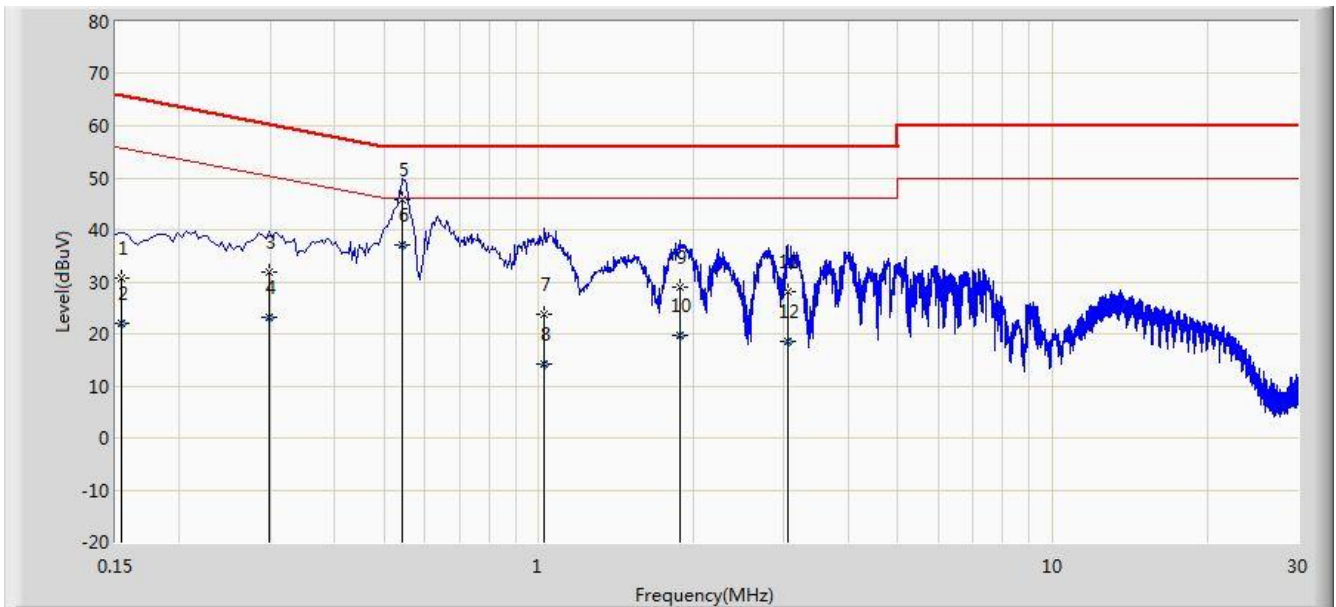

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV)	Factor (dB)	Type
1			0.154	30.655	19.939	-35.127	65.781	10.716	QP
2			0.154	22.006	11.290	-33.776	55.781	10.716	AV
3			0.298	31.789	21.753	-28.509	60.298	10.036	QP
4			0.298	23.126	13.090	-27.172	50.298	10.036	AV
5			0.542	45.806	35.643	-10.194	56.000	10.163	QP
6		*	0.542	37.106	26.942	-8.894	46.000	10.163	AV
7			1.026	23.871	13.963	-32.129	56.000	9.908	QP
8			1.026	14.281	4.373	-31.719	46.000	9.908	AV
9			1.886	29.097	19.220	-26.903	56.000	9.877	QP
10			1.886	19.710	9.833	-26.290	46.000	9.877	AV
11			3.046	28.061	18.195	-27.939	56.000	9.867	QP
12			3.046	18.567	8.700	-27.433	46.000	9.867	AV

Note: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB)

8. CONCLUSION

The data collected relate only the item(s) tested and show that the **Tablet PC FCC ID:**

WL6-TR10RS1AP6330 is in compliance with Part 15C of the FCC Rules.

————— The End —————