

FCC 15.247 2.4GHz Test Report

for

Elitegroup Computer Systems Co., Ltd.

No. 239, Sec. 2., TiDing Blvd., Taipei, Taiwan 11493

Product Name : Computer
Model Name : LIVA M300-WXXXX
(X=A to Z,a-z,0-9 or blank)
Brand : LIVA
FCC ID : WL6LIVAM300-W

Prepared by: : AUDIX Technology Corporation,
EMC Department



The test report is based on a single evaluation of one sample of the above-mentioned products. It does not imply an assessment of the whole production and does not permit the use of the test lab logo.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.

TABLE OF CONTENTS

Description	Page
TEST REPORT.....	4
1. REVISION RECORD OF TEST REPORT	5
2. SUMMARY OF TEST RESULTS	6
3. GENERAL INFORMATION	7
3.1. Description of Application	7
3.2. Description of EUT	7
3.3. Reference Test Guidance.....	8
3.4. Antenna Information	8
3.5. EUT Specifications Assessed in Current Report.....	8
3.6. Descriptions of Key Components.....	9
3.7. Test Configuration.....	10
3.8. Output Power Setting	10
3.9. Tested Supporting System List.....	11
3.10. Setup Configuration.....	11
3.11. Operating Condition of EUT	11
3.12. Description of Test Facility	12
3.13. Measurement Uncertainty	13
4. MEASUREMENT EQUIPMENTLIST.....	14
4.1. Conducted Emission Measurement	14
4.2. Radiated Emission Measurement	14
4.3. RF Conducted Measurement	15
5. CONDUCTED EMISSION.....	16
5.1. Block Diagram of Test Setup	16
5.2. Conducted Emission Limit	16
5.3. Test Procedure	16
5.4. Test Results	16
6. RADIATED EMISSION	17
6.1. Block Diagram of Test Setup	17
6.2. Radiated Emission Limits.....	19
6.3. Test Procedure	20
6.4. Measurement Result Explanation.....	21
6.5. Test Results	21
7. 20dB/OCCUPIED BANDWIDTH.....	22
7.1. Block Diagram of Test Setup	22
7.2. Specification Limits.....	22
7.3. Test Procedure	22
7.4. Test Results	22
8. CARRIER FREQUENCY SEPARATION	23
8.1. Block Diagram of Test Setup	23
8.2. Specification Limits.....	23
8.3. Test Procedure	23
8.4. Test Results	23
9. TIME OF OCCUPANCY	24
9.1. Block Diagram of Test Setup	24
9.2. Specification Limits.....	24
9.3. Test Procedure	24



Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

9.4. Test Results	24
10. NUMBER OF HOPPING CHANNELS	25
10.1. Block Diagram of Test Setup	25
10.2. Specification Limits.....	25
10.3. Test Procedure	25
10.4. Test Results	25
11. MAXIMUM PEAK OUTPUT POWER	26
11.1. Block Diagram of Test Setup	26
11.2. Specification Limits.....	26
11.3. Test Procedure	26
11.4. Test Results	26
12. EMISSION LIMITATIONS	27
12.1. Block Diagram of Test Setup	27
12.2. Specification Limits.....	27
12.3. Test Procedure	27
12.4. Test Results	27
13. DEVIATION TO TEST SPECIFICATIONS	28

APPENDIX A TEST DATA AND PLOTS
APPENDIX B TESTPHOTOGRAPHS

TEST REPORT

Applicant : Elitegroup Computer Systems Co., Ltd.
EUT Description
(1) Product : Computer
(2) Model : LIVA M300-WXXXX (X=A to Z,a-z,0-9 or blank)
(3) Brand : LIVA
(4) Power Supply : DC 12V, 4.17A

Applicable Standards:

Title 47 CFR FCC Part 15 Subpart C
ANSI C63.10:2013

Audix Technology Corp. tested the equipment mentioned in accordance with the requirements set forth in the above standards. Test results indicate that the equipment tested is capable of demonstrating compliance with the requirements as documented within this report.

Audix Technology Corp. does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens and samples.

Date of Report: 2021. 03. 29

Reviewed by:



(Sabrina Wang/Administrator)

Approved by:



(Johnny Hsueh/Section Manager)

1. REVISION RECORD OF TEST REPORT

Edition No	Issued Date	Revision Summary	Report Number
0	2021. 03. 29	Original Report	EM-F210078

2. SUMMARY OF TEST RESULTS

Rule	Description	Results
15.207	Conducted Emission	PASS
15.247(d)/15.205	Radiated Band Edge and Radiated Spurious Emission	PASS
15.247(a)(1)	20dB/Occupied Bandwidth	PASS
15.247(a)(1)	Carrier Frequency Separation	PASS
15.247(a)(1)(iii)	Time of Occupancy	PASS
15.247(a)(1)(iii)	Number of Hopping Channels	PASS
15.247(b)(1)	Maximum Peak Output Power	PASS
15.247(d)	Conducted Band Edges and Conducted Spurious Emission	PASS
15.203	Antenna Requirement	Compliance
Note: The uncertainties value is not used in determining the result.		

3. GENERAL INFORMATION

3.1. Description of Application

Applicant	Elitegroup Computer Systems Co., Ltd. No. 239, Sec. 2., TiDing Blvd., Taipei, Taiwan 11493
Product	Computer
Brand	LIVA
Model	LIVA M300-WXXXX (X=A to Z,a-z,0-9 or blank) for marketing.

3.2. Description of EUT

Test Model	LIVA M300-W		
Serial Number	N/A		
Power Rating	DC 12V, 4.17A (Refer to AC adapter rating)		
RF Features	WLAN:802.11 b/g/n Bluetooth: BT and BLE (BT 5.2)		
Transmit Type	2.4 GHz		
	802.11b	1T1R	
	802.11g	1T1R	
	802.11n-HT20	1T1R	
	BT/BLE	1T1R	
Test Sample	Sample No.	Test Item	Firmware
	03	AC Conduction, RSE, Output Power	N/A
Sample Status	Mass production		
Date of Receipt	2021. 01. 28		
Date of Test	2021. 02. 17 ~ 03. 08		
Interface Ports of EUT	<ul style="list-style-type: none"> • Three USB 2.0 Ports • One USB 3.0 Ports • One HDMI Port • One DP Port • One COM (RS232/422/485) Port • One Audio Out Port • One MIC In Port • One LAN Port • One DC IN Port • One Antenna fixture 		
Accessories Supplied	<ul style="list-style-type: none"> • AC Adapter • VESA Mount • Dipole Antenna 		

3.3. Reference Test Guidance

None

3.4. Antenna Information

Antenna Part Number	Manufacture	Antenna Type	Frequency (MHz)	Max Gain(dBi)
EGM30APDI01+A	WELL GREEN Technology Co., LTD	Dipole Type	2400~2500	2.75

3.5. EUT Specifications Assessed in Current Report

Mode	Fundamental Range (MHz)	Channel Number	Modulation	Data Rate (Mbps)
Bluetooth	2402-2480	79	FHSS (GFSK, 1/4 DQPSK, 8-DPSK)	1/2/3

Channel List							
Channel Number	Frequency (MHz)	Channel Number	Frequency (MHz)	Channel Number	Frequency (MHz)	Channel Number	Frequency (MHz)
00	2402	20	2422	40	2442	60	2462
01	2403	21	2423	41	2443	61	2463
02	2404	22	2424	42	2444	62	2464
03	2405	23	2425	43	2445	63	2465
04	2406	24	2426	44	2446	64	2466
05	2407	25	2427	45	2447	65	2467
06	2408	26	2428	46	2448	66	2468
07	2409	27	2429	47	2449	67	2469
08	2410	28	2430	48	2450	68	2470
09	2411	29	2431	49	2451	69	2471
10	2412	30	2432	50	2452	70	2472
11	2413	31	2433	51	2453	71	2473
12	2414	32	2434	52	2454	72	2474
13	2415	33	2435	53	2455	73	2475
14	2416	34	2436	54	2456	74	2476
15	2417	35	2437	55	2457	75	2477
16	2418	36	2438	56	2458	76	2478
17	2419	37	2439	57	2459	77	2479
18	2420	38	2440	58	2460	78	2480
19	2421	39	2441	59	2461		

3.6. Descriptions of Key Components

Item	Supplier	Model / Type	Character
Main board	ECS	AR3399-NI	w/RK3399KSoC, 2GB DDR3L, 32GB eMMC, DP/HDMI/GbE, USB, WLAN+BT
CPU	Rockchip	RK3399K	2.0GHz (CPU socket: FCBGA 828P)
eMMC (Storage)	Kingston	EMMC32G-TA28	32GB
DRAM	Kingston	D2516ECMDXGJD1	2GB, DDR3L 1600MHz
WLAN Combo Card	AMPAK	AP6236	802.11 b/g/n+BT 5.2 +BLE
Antenna	WELL GREEN Technology Co., LTD	EGM30APDI01+A	Dipole Antenna
AC Adapter	FSP	FSP050-DHAN3	I/P: 100-240Vac, 50-60Hz, 1.8A O/P: 12Vdc, 4.17A, 50.0W BSMI: R43001
	DC Power Cord: Non-Shielded, Undetached, 1.2m, Bonded a ferrite core AC Power Cord: Non-Shielded, Detached, 1.8m (3C)		

Remark: For more detailed features description, please refer to the manufacturer's specifications or the user manual.

3.7. Test Configuration

Mode	Duty Cycle (x)	T (ms)	Duty Cycle Correction Factor (dB)
BT	N/A	2.9	N/A

AC Conduction
Normal operation

Item		Modulation	Data Rate	Test Channel
Radiated Test Case	Radiated Band Edge ^{Note 1 & 2}	GFSK	1Mbps	00/78
		8-DPSK	3Mbps	00/78
	Radiated Spurious Emission ^{Note 1 & 2}	8-DPSK	3Mbps	00/39/78
Conducted Test Case	20dB/Occupied Bandwidth	GFSK	1Mbps	00/39/78
		8-DPSK	3Mbps	00/39/78
	Carrier Frequency Separation	GFSK	1Mbps	00/39/78
		8-DPSK	3Mbps	00/39/78
	Time of Occupancy	GFSK	1Mbps	00/39/78
		8-DPSK	3Mbps	00/39/78
	Number of Hopping Channels	GFSK	1Mbps	39
		8-DPSK	3Mbps	39
	Maximum Peak Output Power	GFSK	1Mbps	00/39/78
		8-DPSK	3Mbps	00/39/78
	Band Edges	GFSK	1Mbps	00/78
		8-DPSK	3Mbps	00/78
	Spurious Emission	GFSK	1Mbps	00/39/78
		8-DPSK	3Mbps	00/39/78

Note 1: Mobile Device
Portable Device, and 3 axis were assessed. The worst scenario for Radiated Spurious Emission as follow: Lie Side Stand

Note 2: We performed testing of the highest and lowest data rate.

3.8. Output Power Setting

Mode	Centre Frequency (MHz)	Power Setting	
		GFSK	8-DPSK
BLE	2402	None	None
	2440	None	None
	2480	None	None

3.9. Tested Supporting System List

3.9.1. Support Peripheral Unit


No.	Product	Brand	Model No.	Serial No.	Approval
1.	LCD Monitor	DELL	U2718Qb	N/A	FCC By DoC
2.	USB Mouse	Lenovo	45J4886	N/A	FCC By DoC
3.	Earphone (Emission Test Used)	APPLE	N/A	N/A	N/A
4.	Modem (Emission Test Used)	ACEEX	DM-1414	980034395	FCC ID: IFAXDM1414
5.	Notebook PC	ASUS	E403SA	N/A	FCC By DoC

3.9.2. Cable Lists


No.	Cable Description Of The Above Support Units
1.	HDMI Cable: Shielded, Detachable, 1.8m DP Cable: Shielded, Detachable, 1.8m AC Power Cord: Unshielded, Detachable, 1.8m
2.	USB Cable: Unshielded, Undetachable, 1.8m
3.	Earphone Cable: Unshielded, Undetachable, 0.9mx2
4.	RS-232 Cable: Shielded, Detachable, 1.8m AC Power Cord: Unshielded, Detachable, 1.8m
5.	USB Cable: Shielded, Detachable, 1.8m LAN Cable: Shielded, Detachable, 1.8m (Emission Test Used) AC adapter(Wall-mounted 2C): ASUS, M/N AD890526 DC Power Cord: Unshielded, Detachable, 2.0m

3.10. Setup Configuration

3.10.1. EUT Configuration for Power Line & Radiated Emission

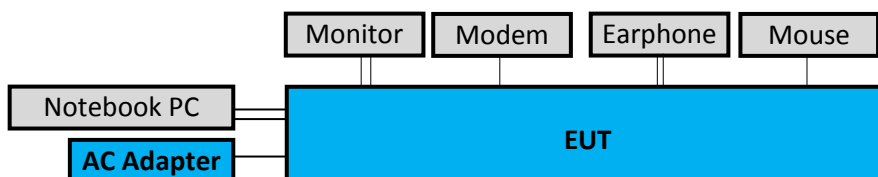

3.10.2. EUT Configuration for RF Conducted Test Items

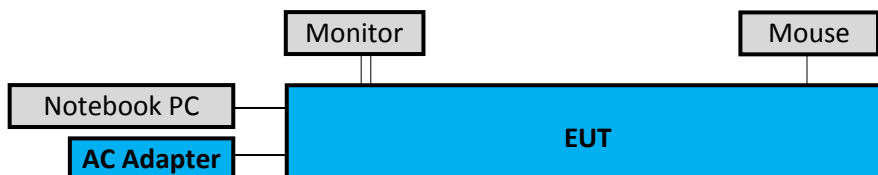

3.11. Operating Condition of EUT

Test program “RF Test Tool” is used for enabling EUT BT function under continues transmitting and choosing data rate/ channel.

3.12. Description of Test Facility

Name of Test Firm	Audix Technology Corporation / EMC Department No. 491, Zhongfu Rd., Linkou Dist., New Taipei City 244, Taiwan Tel: +886-2-26092133 Fax: +886-2-26099303 Website : www.audixtech.com Contact e-mail: attemc_report@audixtech.com
Accreditations	The laboratory is accredited by following organizations under ISO/IEC 17025:2017 (1) NVLAP(USA) NVLAP Lab Code 200077-0 (2) TAF(Taiwan) No. 1724
Test Facilities	FCC OET Designation Number under APEC MRA by NCC is : TW1724 ISED CAB Identifier Number under APEC TEL MRA by NCC is TW1724 (1) No.8 Shielded Room (2) No.1 3m Semi Anechoic Chamber (3) Fully Anechoic Chamber

3.13.Measurement Uncertainty

Test Items/Facilities		Frequency Range	Uncertainty	
Conduction Test		9kHz-150kHz	±3.7dB	
		150kHz-30MHz	±3.4dB	
Radiation Test	<input checked="" type="checkbox"/>	No.1 3m Semi Anechoic Chamber	30MHz-200MHz, 3m, Horizontal	±3.8dB
			200MHz-1000MHz, 3m, Horizontal	±4.1dB
			30MHz-200MHz, 3m, Vertical	±4.5dB
			200MHz-1000MHz, 3m, Vertical	±4.5dB
			1GHz-6GHz, 3m	±4.7dB
			6GHz-18GHz, 3m	±4.1dB
	<input type="checkbox"/>	No.3 3m Semi Anechoic Chamber	30MHz-200MHz, 3m, Horizontal	±3.9dB
			200MHz-1000MHz, 3m, Horizontal	±4.2dB
			30MHz-200MHz, 3m, Vertical	±4.3dB
			200MHz-1000MHz, 3m, Vertical	±4.5dB
	<input type="checkbox"/>	No.4 3m Semi Anechoic Chamber	30MHz-200MHz, 3m, Horizontal	±4.1dB
			200MHz-1000MHz, 3m, Horizontal	±4.5dB
			30MHz-200MHz, 3m, Vertical	±4.4dB
			200MHz-1000MHz, 3m, Vertical	±4.8dB
			1GHz-6GHz, 3m	±5.0dB
			6GHz-18GHz, 3m	±4.7dB
	<input type="checkbox"/>	No.5 3m Semi Anechoic Chamber	30MHz-200MHz, 3m, Horizontal	±4.2dB
			200MHz-1000MHz, 3m, Horizontal	±4.3dB
			30MHz-200MHz, 3m, Vertical	±4.3dB
			200MHz-1000MHz, 3m, Vertical	±4.7dB
			1GHz-6GHz, 3m	±4.8dB
			6GHz-18GHz, 3m	±4.5dB
	<input checked="" type="checkbox"/>	Fully Anechoic Chamber	30MHz~1000MHz	±4.6dB
			1GHz~18GHz	±5.4dB
18GHz~40GHz			±3.52dB	
40GHz~260GHz			±3.56dB	

Remark : Uncertainty = $ku_c(y)$

Test Item	Uncertainty
20dB Bandwidth	±0.2kHz
99% Occupied Bandwidth	±0.38%
Carrier Frequency Separation	±0.2kHz
Time of Occupancy	±0.03sec
Maximum peak Output power	± 0.52dB
Conducted Emission Limitations	± 0.13dB

4. MEASUREMENT EQUIPMENT LIST

4.1. Conducted Emission Measurement

Item	Type	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Interval
1.	Test Receiver	R&S	ESR3	101774	2021.02.02	1 Year
2.	A.M.N.	R&S	ENV432	101567	2020.04.20	1 Year
3.	L.I.S.N.	Kyoritsu	KNW-407	8-855-9	2020.12.10	1 Year
4.	Pulse Limiter	R&S	ESH3-Z2	100354	2021.01.04	1 Year
5.	Digital Thermo-Hygro Meter	iMax	HTC-1	No.8 S/R	2020.04.17	1 Year
6.	Coaxial Cable	Yeida	RG/58AU	CE-08	2020.09.19	1 Year
7.	Test Software	Audix	e3	V6.120619c	N.C.R.	N.C.R.

4.2. Radiated Emission Measurement

Item	Type	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Interval
1.	Spectrum Analyzer	Agilent	N9010A-526	MY53400071	2020.09.16	1 Year
2.	Spectrum Analyzer	Keysight	N9010B-544	MY55460198	2020.04.29	1 Year
3.	Spectrum Analyzer	Agilent	N9030A-526	MY53310269	2021.01.14	1 Year
4.	Test Receiver	R&S	ESCS30	100039	2020.06.05	1 Year
5.	Amplifier	HP	8447D	2944A07178	2020.04.29	1 Year
6.	Microwave Preamplifier	HP	8449B	3008A01284	2020.05.26	1 Year
7.	Microwave Amplifier	Keysight	83051A	MY53010042	2020.08.05	1 Year
8.	Microwave Amplifier	Agilent	8449B	3008A02678	2021.02.27	1 Year
9.	Loop Antenna	R&S	HFH2-Z2	891847/27	2019.12.26	2 Years
10.	Bilog Antenna	TESEQ	CBL6112D	33821	2021.01.15	1 Year
11.	Horn Antenna	ETS-Lindgren	3117	00135902	2020.03.10	1 Year
12.	Horn Antenna	COM-POWER	AH-840	101092	2020.05.08	1 Year
13.	2.4GHz Notch Filter	K&L Microwave	7NSL10-2441.5 /E130.5-O/O	1	2020.07.24	1 Year
14.	3GHz Notch Filter	Microwave	H3G018G1	484796	2020.08.20	1 Year
15.	Coaxial Cable	MIYAZAKI	5D2W	RE-11	2021.01.29	1 Year
16.	Coaxial Cable	HUBER+ SUHNER	SUCOFLEX 104	RE-29	2020.09.19	1 Year
17.	Coaxial Cable	HUBER+ SUHNER	SUCOFLEX 102	RE-30	2020.09.19	1 Year
18.	Digital Thermo-Hygro Meter	iMax	HTC-1	No.1 3m A/C	2020.04.17	1 Year
19.	Digital Thermo-Hygro Meter	EVERY DAY	E-512	RF-02	2020.04.17	1 Year
20.	Test Software	Audix	e3	V6.120619c	N.C.R.	N.C.R.
21.	Test Software	Audix	e3	V6.110601	N.C.R.	N.C.R.

4.3.RF Conducted Measurement

Item	Type	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Interval
1.	Spectrum Analyzer	Keysight	N9020B-544	MY57120357	2021.01.06	1 Year
2.	Digital Thermo-Hygro Meter	Shenzhen Datronn Electronics	KT-905	RF	2020.04.17	1 Year


5. CONDUCTED EMISSION

5.1. Block Diagram of Test Setup

5.1.1. Block Diagram of EUT

Indicated as section 3.10

5.1.2. Shielded Room Setup Diagram

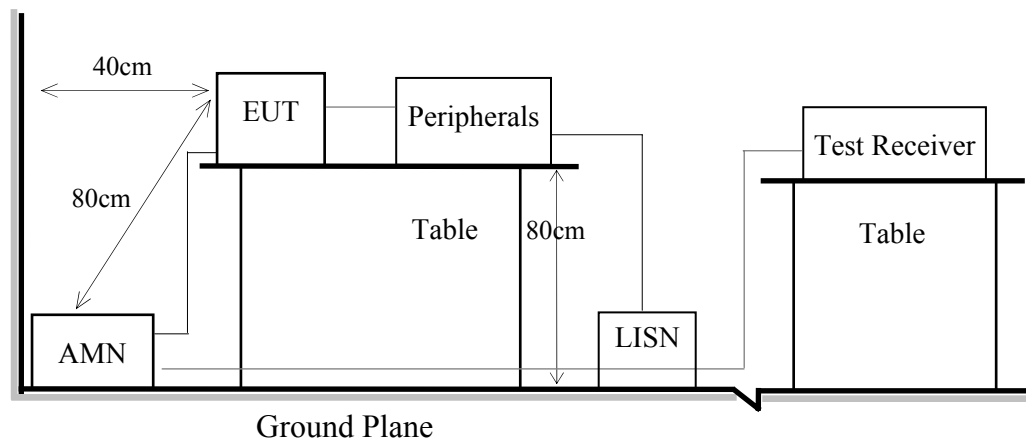

5.2. Conducted Emission Limit

Frequency	Conducted Limit	
	Quasi-Peak Level	Average Level
150kHz ~ 500kHz	66 ~ 56 dB μ V	56 ~ 46 dB μ V
500kHz ~ 5MHz	56 dB μ V	46 dB μ V
5MHz ~ 30MHz	60 dB μ V	50 dB μ V

Remark1.: If the average limit is met when using a Quasi-Peak detector, the measurement using the average detector is not required.

2.: The lower limit applies to the band edges.

5.3. Test Procedure

- 5.3.1. To set up the EUT as indicated in ANSI C63.10. The EUT was placed on the table which has 80 cm height to the ground and 40 cm distance to the conducting wall.
- 5.3.2. Power supplier of the EUT was connected to the AC mains through an Artificial Mains Network (A.M.N.).
- 5.3.3. The AC power supplies to all peripheral devices must be provided through line impedance stabilization network (L.I.S.N.)
- 5.3.4. Checking frequency range from 150kHz to 30 MHz and record the emission which does not have 20 dB below limit.

5.4. Test Results

Please refer to Appendix A.


6. RADIATED EMISSION

6.1. Block Diagram of Test Setup


6.1.1. Block Diagram of EUT

Indicated as section 3.10

6.1.2. Setup Diagram for 9kHz-30MHz

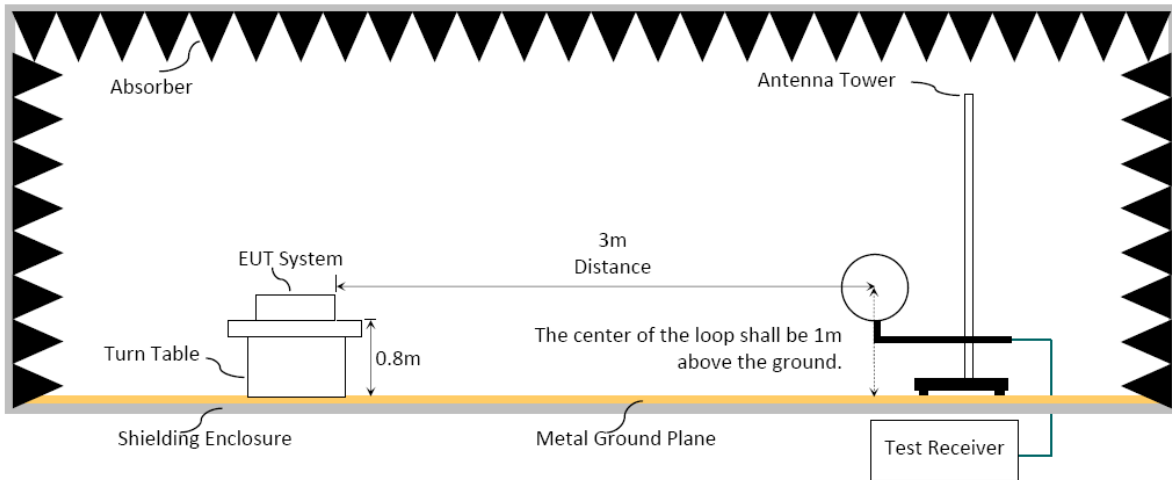


6.1.3. Setup Diagram for 30-1000MHz

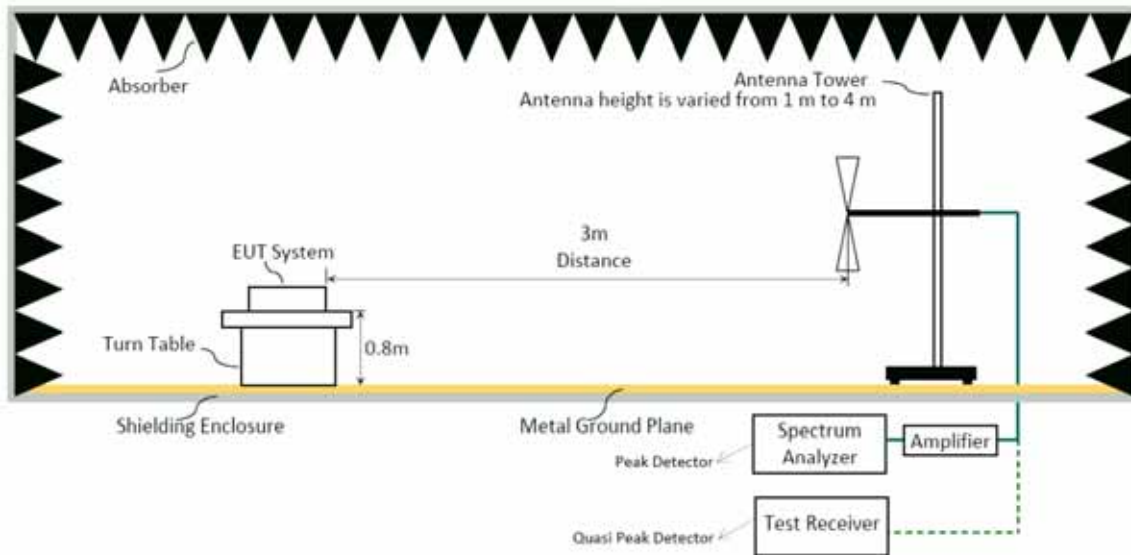


6.1.4. Setup Diagram for above 1GHz

Fully Anechoic Chamber

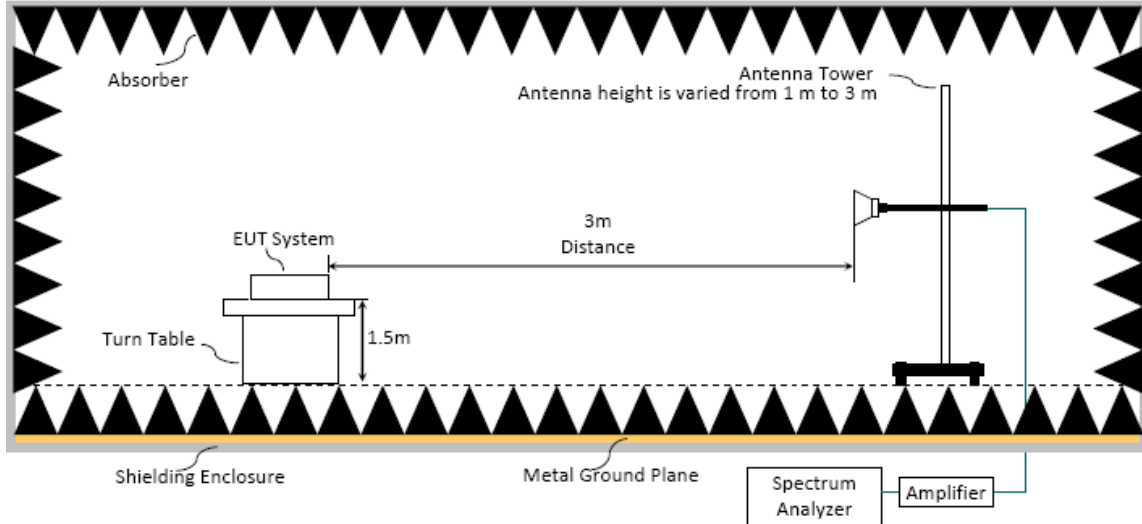

Semi Anechoic Chamber

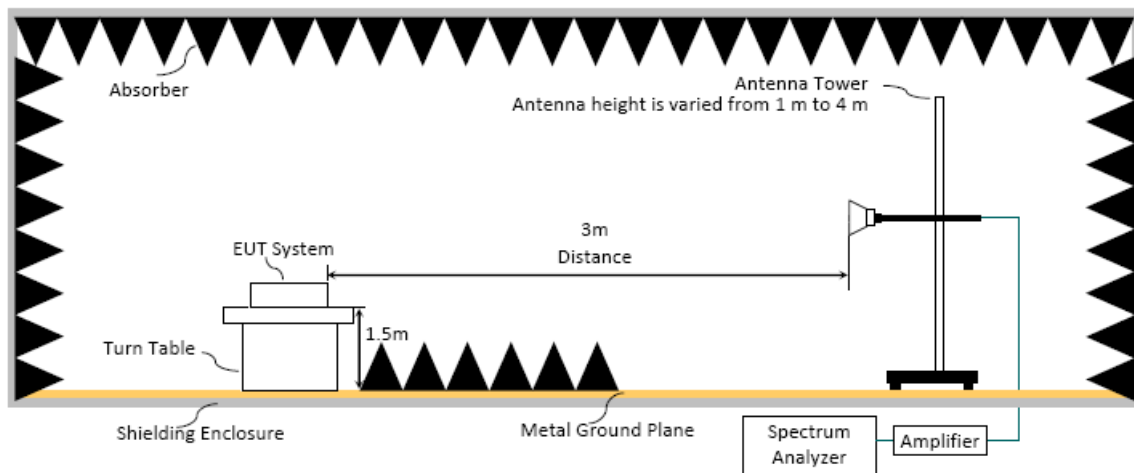

6.2. Radiated Emission Limits

In any 100kHz bandwidth outside the frequency band, the radio frequency power produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level. In addition, radiated emissions which fall in restricted bands, as defined in Section 15.205 Section 8.10 table 6, must also comply with the radiated emission limits specified as below.

Frequency (MHz)	Distance(m)	Limits	
		dB μ V/m	μ V/m
0.009 - 0.490	300	67.6-20 log f(kHz)	2400/f kHz
0.490 - 1.705	30	87.6-20 log f(kHz)	24000/f kHz
1.705 - 30	30	29.5	30
30 - 88	3	40.0	100
88- 216	3	43.5	150
216- 960	3	46.0	200
Above 960	3	54.0	500
Above 1000	3	74.0 dB μ V/m (Peak) 54.0 dB μ V/m (Average)	

Remark : (1) dB μ V/m = 20 log (μ V/m)

- (2) The tighter limit applies to the edge between two frequency bands.
- (3) Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.
- (4) Fundamental and emission fall within operation band are exempted from this section.
- (5) Pursuant to ANSI C63.10: 6.6.4.3, if the maximized peak measured value complies with the average limit, then it is unnecessary to perform an average measurement.

6.3. Test Procedure

Frequency Range 9kHz~30MHz:

The EUT setup on the turntable which has 0.8 m height to the ground. The turn table rotated 360 degrees and antenna fixed to 1 m to find the maximum emission level. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10-2013 regulation.

- (1) RBW = 9kHz with peak and average detector.
- (2) Detector: average and peak (9kHz-490kHz)
Q.P. (490kHz-30MHz)

Frequency Range 30MHz ~ 25GHz:

The EUT setup on the turn table which has 80cm (for 30-1000MHz) and 1.5m (for above 1GHz) height to the ground. The turn table rotated 360 degrees and antenna varied from 1 m to 4 m (for 30-1000MHz) and from 1m to 3m (for above 1GHz at fully Anechoic Chamber) or from 1 m to 4 m (for above 1GHz at Semi Anechoic Chamber) to find the maximum emission level. Both horizontal and vertical polarization are required. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10-2013 regulation.

Frequency below 1GHz:

Spectrum Analyzer is used for pre-testing with following setting:

- (1) RBW = 120KHz
- (2) VBW \geq 3 x RBW.
- (3) Detector = Peak.
- (4) Sweep time = auto.
- (5) Trace mode = max hold.
- (6) Allow sweeps to continue until the trace stabilizes.

Note 1: When peak-detected value is lower than limit that the measurement using the Q.P. detector is not required, otherwise using Q.P. for final measurement.

Note 2: When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds.

Frequency above 1GHz to 10th harmonic(up to 25 GHz):

Peak Detector:

- (1) RBW = 1MHz
- (2) VBW \geq 3 x RBW.
- (3) Detector = Peak.
- (4) Sweep time = auto.
- (5) Trace mode = max hold.
- (6) Allow sweeps to continue until the trace stabilizes.

Note: When peak-detected value is lower than limit that the measurement using the average detector is not required, otherwise using average detector for final measurement.

Average Detector:

Option 1:

- (1) RBW = 1MHz
- (2) VBW \geq 1/ T.
- (3) Detector = Peak.
- (4) Sweep time = auto.
- (5) Trace mode = max hold.
- (6) Allow sweeps to continue until the trace stabilizes.

Option 2:

Average Emission Level = Peak Emission Level + D.C.C.F.

6.4. Measurement Result Explanation

Peak Emission Level = Antenna Factor + Cable Loss + Meter Reading (including Preamp factor if test used)

Average Emission Level = Antenna Factor + Cable Loss + Meter Reading (including Preamp factor if test used)

Average Emission Level = Peak Emission Level + DCCF

Duty Cycle Correction Factor (DCCF) = $20\log(TX_{on}/TX_{on+off})$ presented in section 3.7


ERP = Peak Emission Level - 95.2dB - 2.14dB

6.5. Test Results

Please refer to Appendix A.

7. 20dB/OCCUPIED BANDWIDTH

7.1. Block Diagram of Test Setup

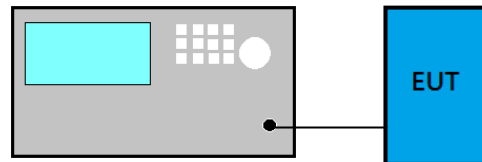

7.2. Specification Limits

Alternatively, frequency hopping systems operating in the 2400-2483.5MHz band may have hopping channel carrier frequencies that are separated by 25kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater.

7.3. Test Procedure

Following measurement procedure is reference to ANSI C63.10:2013:

For 20dB Bandwidth

- (1) Set Span range 2~5 times the OBW
- (2) Set $VBW \geq 3 \times RBW$.
- (3) Detector = Peak.
- (4) Trace mode = Max hold.
- (5) Sweep = Auto couple.
- (6) Allow the trace to stabilize.
- (7) Setting channel bandwidth function x dB to -20 dB to record the final bandwidth.

For 99% Occupied Bandwidth


- (8) Set Span range 1.5~5 times the OBW
- (9) Set RBW close to 1% to 5% of OBW.
- (10) Set $VBW \geq 3 \times RBW$.
- (11) Detector = Peak.
- (12) Trace mode = Max hold
- (13) Sweep = Auto couple.
- (14) Allow the trace to stabilize.

7.4. Test Results

Please refer to Appendix A

8. CARRIER FREQUENCY SEPARATION

8.1. Block Diagram of Test Setup

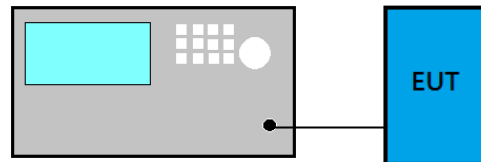

8.2. Specification Limits

Alternatively, frequency hopping systems operating in the 2400-2483.5MHz band may have hopping channel carrier frequencies that are separated by 25kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output no greater than 125mW.

8.3. Test Procedure

Following measurement procedure is reference to ANSI C63.10:2013:


- (1) Span = Wide enough to capture the peaks of two adjacent channels
- (2) RBW: Start with the RBW set to approximately 30% of the channel spacing; adjust as necessary to best identify the center of each individual channel.
- (3) $VBW \geq RBW$
- (4) Sweep = Auto
- (5) Detector function = Peak
- (6) Trace = Max hold
- (7) Allow the trace to stabilize.

8.4. Test Results

Please refer to Appendix A

9. TIME OF OCCUPANCY

9.1. Block Diagram of Test Setup

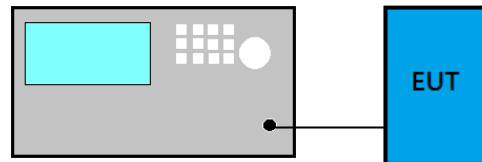

9.2. Specification Limits

Frequency hopping systems in the 2400-2483.5MHz shall use at least 15 non-overlapping channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by number of hopping channels employed.

9.3. Test Procedure

Following measurement procedure is reference to ANSI C63.10:2013:


- (1) Span: Zero span, centered on a hopping channel.
- (2) RBW shall be \leq channel spacing and where possible RBW should be set $\gg 1/T$, where T is the expected dwell time per channel.
- (3) Sweep: As necessary to capture the entire dwell time per hopping channel; where possible use a video trigger and trigger delay so that the transmitted signal starts a little to the right of the start of the plot. The trigger level might need slight adjustment to prevent triggering when the system hops on an adjacent channel; a second plot might be needed with a longer sweep time to show two successive hops on a channel.
- (4) Detector function = Peak
- (5) Trace = Max hold

9.4. Test Results

Please refer to Appendix A

10. NUMBER OF HOPPING CHANNELS

10.1. Block Diagram of Test Setup

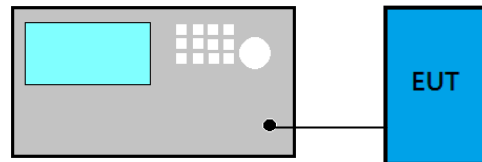

10.2. Specification Limits

Frequency hopping systems which use fewer than 20 hopping frequencies may employ intelligent hopping techniques to avoid interference to other transmissions. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 non-overlapping channels.

10.3. Test Procedure

Following measurement procedure is reference to ANSI C63.10:2013:


- (1) Span: The frequency band of operation. Depending on the number of channels the device supports, it may be necessary to divide the frequency range of operation across multiple spans, to allow the individual channels to be clearly seen.
- (2) RBW: To identify clearly the individual channels, set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.
- (3) VBW \geq RBW
- (4) Sweep = Auto
- (5) Detector function = Peak
- (6) Trace = m=Max hold
- (7) Allow the trace to stabilize.

10.4. Test Results

Please refer to Appendix A

11. MAXIMUM PEAK OUTPUT POWER

11.1. Block Diagram of Test Setup

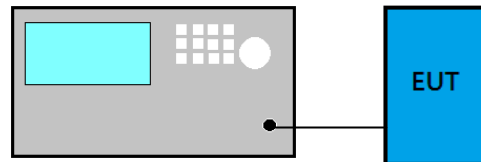

11.2. Specification Limits

The Limits of maximum Peak Output Power for frequency hopping systems in 2400-2483.5MHz is: 0.125Watt. (21dBm)

11.3. Test Procedure

Following measurement procedure is reference to ANSI C63.10:2013:


- (a) Use the following spectrum analyzer settings
 - (1) Span: Approximately five times the 20 dB bandwidth, centered on a hopping channel.
 - (2) RBW > 20 dB bandwidth of the emission being measured.
 - (3) VBW \geq RBW
 - (4) Sweep: Auto
 - (5) Detector function: Peak
 - (6) Trace: Max hold
- (b) Allow trace to stabilize.
- (c) Use the marker-to-peak function to set the marker to the peak of the emission.

11.4. Test Results

Please refer to Appendix A

12. EMISSION LIMITATIONS

12.1. Block Diagram of Test Setup

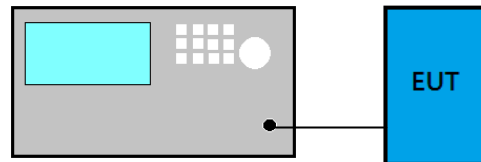

12.2. Specification Limits

In any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, that the required attenuation shall be 30 dB instead of 20 dB.

Attenuation below the general limits specified in Section 15.209(a) Section 8.9 table 4 is not required. In addition, radiated emissions which fall in restricted bands, as defined in Section 15.205(a) Section 8.10 table 6,, must also comply with the radiated emission limits specified in Section 15.209(a) Section 8.9 table 4 (See Section 15.205(c)).

12.3. Test Procedure

Following measurement procedure is reference to ANSI C63.10:2013:

- (1) Set span wide enough to capture the peak level of the in-band emission and all spurious emissions; up to 10th harmonic.
- (2) RBW = 100 kHz
- (3) VBW \geq RBW
- (4) Sweep = Auto
- (5) Detector function = Peak
- (6) Trace = Max hold

12.4. Test Results

Please refer to Appendix A



Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

13.DEVIATION TO TEST SPECIFICATIONS

【NONE】



Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

APPENDIX A

Tel: +886 2 26099301
Fax: +886 2 26099303

APPDNDIX A

TEST DATA AND PLOTS


(Model: LIVA M300-W)

TABLE OF CONTENTS

A.1 CONDUCTED EMISSION	2
A.2 RADIATED EMISSION	4
A.2.1 Emissions within Restricted Frequency Bands.....	4
A.2.2 Emissions outside the frequency band:.....	9
A.2.3 Emissions in Non-restricted Frequency Bands:.....	9
A.3 20dB BANDWIDTH	10
A.3.1 20dB Bandwidth Result.....	10
A.3.2 Measurement Plots	11
A.4 CARRIER FREQUENCY SEPARATION	12
A.5 TIME OF OCCUPANCY	14
A.5.1 Time of Occupancy	14
A.6 NUMBER OF HOPPING CHANNELS	24
A.7 MAXIMUM PEAK OUTPUT POWER	25
A.7.1 Maximum Peak Output Power	25
A.7.2 Measurement Plots	26
A.8 EMISSION LIMITATIONS MEASUREMENT	27
A.8.1 Band Edge.....	27
A.8.2 Spurious Emission	29

A.1 CONDUCTED EMISSION

Test Date	2021/03/08	Temp./Hum.	20°C/72%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Chucky Chiu

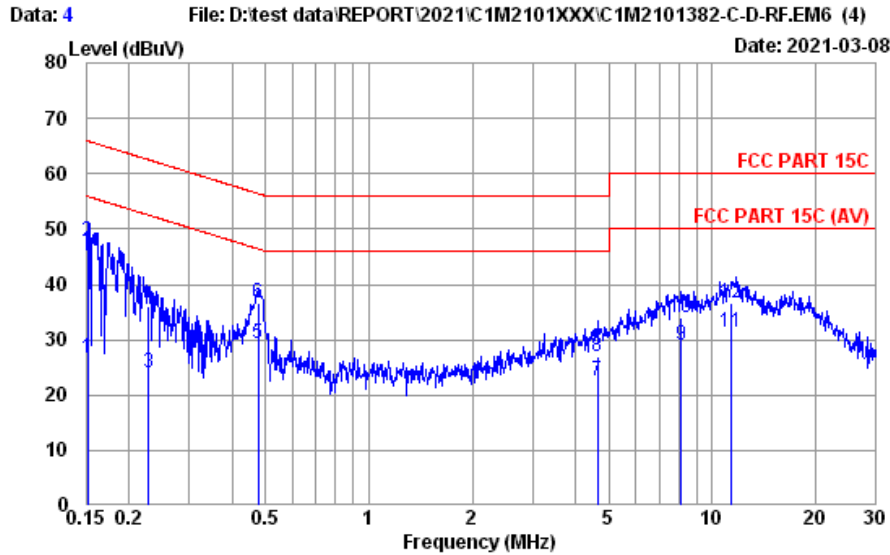


Site No.	: No.8 Shielded Room	Data No.	: 4
Instrument 1	: Receiver ESR3(774)		
Instrument 2	: EIV432 (567)(A) CE-08 ESH3-Z2 (354)		
Limit	: FCC PART 15C	Phase	: NEUTRAL
Environment	: 20°C / 72%	Engineer	: Chucky Chiu
EUT Model	: LIVA M300-W	Test Rating	: 120Vac/60Hz
Test Mode	: Operating		

	Freq. (MHz)	AMI Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBµV)	Emission Level (dBµV)	Limits (dBµV)	Margin (dB)	Remark
1	0.152	10.20	0.03	9.85	6.71	26.79	55.91	29.12	Average
2	0.152	10.20	0.03	9.85	27.65	47.73	65.91	18.18	QP
3	0.228	10.20	0.03	9.85	4.07	24.15	52.52	28.37	Average
4	0.228	10.20	0.03	9.85	16.06	36.14	62.52	26.38	QP
5	0.476	10.20	0.03	9.85	9.08	29.16	46.41	17.25	Average
6	0.476	10.20	0.03	9.85	16.45	36.53	56.41	19.88	QP
7	4.622	10.30	0.10	9.87	2.19	22.46	46.00	23.54	Average
8	4.622	10.30	0.10	9.87	6.75	27.02	56.00	28.98	QP
9	8.105	10.44	0.12	9.88	8.69	29.13	50.00	20.87	Average
10	8.105	10.44	0.12	9.88	13.52	33.96	60.00	26.04	QP
11	11.377	10.56	0.15	9.90	10.70	31.31	50.00	18.69	Average
12	11.377	10.56	0.15	9.90	15.89	36.50	60.00	23.50	QP

Remarks: 1. Emission Level= AMI Factor + Cable Loss + Pulse Att. + Reading.

Test Date	2021/03/08	Temp./Hum.	20°C/72%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Chucky Chiu

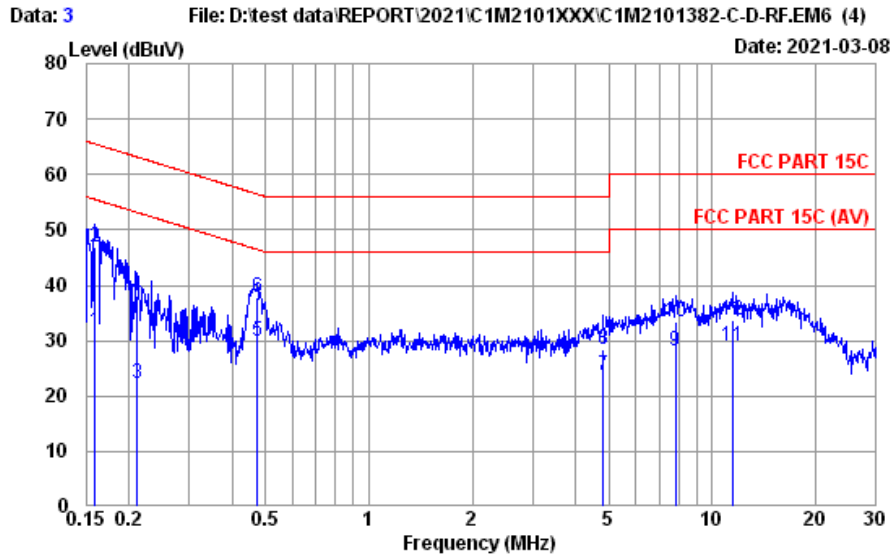

Site No.	: No.8 Shielded Room	Data No.	: 3
Instrument 1	: Receiver ESR3(774)		
Instrument 2	: EHV432 (567)(A) CE-08 ESH3-Z2 (354)		
Limit	: FCC PART 15C	Phase	: LINE
Environment	: 20°C / 72%	Engineer	: Chucky Chiu
EUT Model	: LIVA M300-W	Test Rating	: 120Vac/60Hz
Test Mode	: Operating		

	Freq. (MHz)	AMI Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBµV)	Emission Level (dBµV)	Limits (dBµV)	Margin (dB)	Remark
1	0.159	10.20	0.03	9.85	11.43	31.51	55.52	24.01	Average
2	0.159	10.20	0.03	9.85	26.78	46.86	65.52	18.66	QP
3	0.212	10.20	0.03	9.85	2.07	22.15	53.14	30.99	Average
4	0.212	10.20	0.03	9.85	17.89	37.97	63.14	25.17	QP
5	0.474	10.20	0.03	9.85	9.77	29.85	46.45	16.60	Average
6	0.474	10.20	0.03	9.85	17.61	37.69	56.45	18.76	QP
7	4.822	10.30	0.10	9.87	3.52	23.79	46.00	22.21	Average
8	4.822	10.30	0.10	9.87	8.22	28.49	56.00	27.51	QP
9	7.810	10.33	0.12	9.88	7.95	28.28	50.00	21.72	Average
10	7.810	10.33	0.12	9.88	12.95	33.28	60.00	26.72	QP
11	11.438	10.43	0.15	9.90	8.58	29.06	50.00	20.94	Average
12	11.438	10.43	0.15	9.90	13.23	33.71	60.00	26.29	QP

Remarks: 1. Emission Level= AMI Factor + Cable Loss + Pulse Att. + Reading.

A.2 RADIATED EMISSION

Test Date	2021/02/26~03/02	Temp./Hum.	20~23°C /58~64%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Hua Wu

A.2.1 Emissions within Restricted Frequency Bands

A.2.1.1 Frequency 9kHz~30MHz

The emissions (9kHz~30MHz) not reported for there is no emission be found.

A.2.1.2 Frequency Below 1GHz

Mode	8-DPSK	Frequency	TX 2480MHz
------	--------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
32.91	23.30	1.24	28.14	31.68	28.08	40.00	11.92	Peak
70.74	12.59	1.89	28.09	37.05	23.44	40.00	16.56	Peak
101.78	17.43	2.29	28.04	36.30	27.98	43.50	15.52	Peak
174.53	15.95	3.12	27.75	42.53	33.85	43.50	9.65	Peak
237.58	18.06	3.74	27.63	43.89	38.06	46.00	7.94	Peak
299.66	19.71	4.30	27.56	37.44	33.89	46.00	12.11	Peak


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
30.97	23.89	1.20	28.14	41.09	38.04	40.00	1.96	Peak
41.64	18.41	1.42	28.13	40.19	31.89	40.00	8.11	Peak
71.71	12.71	1.91	28.09	43.98	30.51	40.00	9.49	Peak
97.90	16.97	2.25	28.05	37.47	28.64	43.50	14.86	Peak
113.42	18.28	2.44	27.98	39.54	32.28	43.50	11.22	Peak
236.61	18.01	3.73	27.63	40.72	34.83	46.00	11.17	Peak

A.2.1.3 Frequency Above 1 GHz to 10th harmonics


Band Edge:

Mode	8-DPSK	Frequency	TX 2402MHz
------	--------	-----------	------------

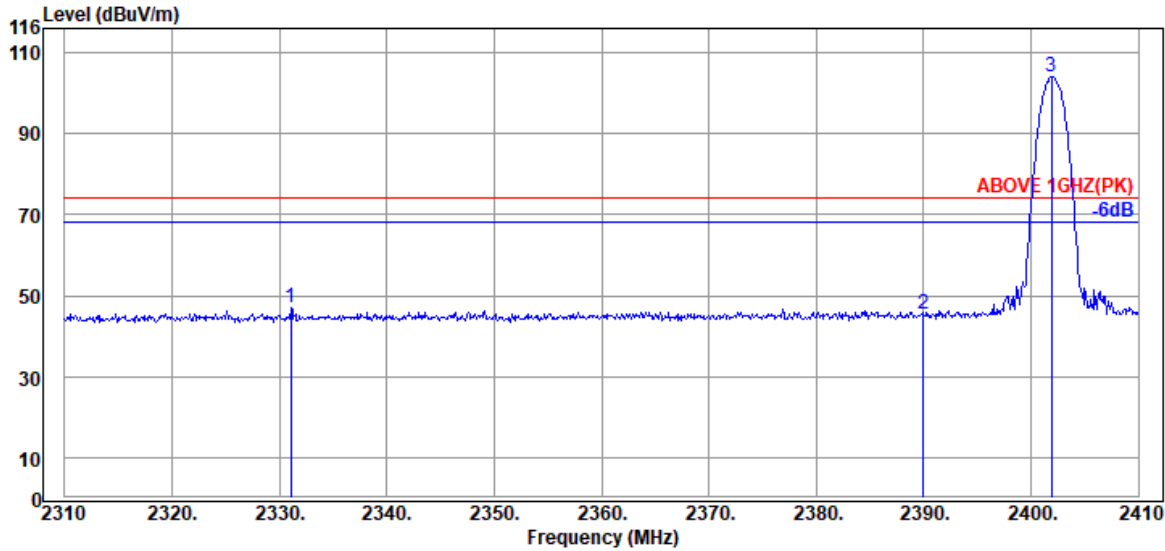

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2331.10	32.11	7.92	34.57	41.41	46.87	74.00	27.13	Peak
2390.00	32.44	7.95	34.58	39.54	45.35	74.00	28.65	Peak
@ 2401.90	32.50	7.95	34.59	98.24	104.10	---	---	Peak

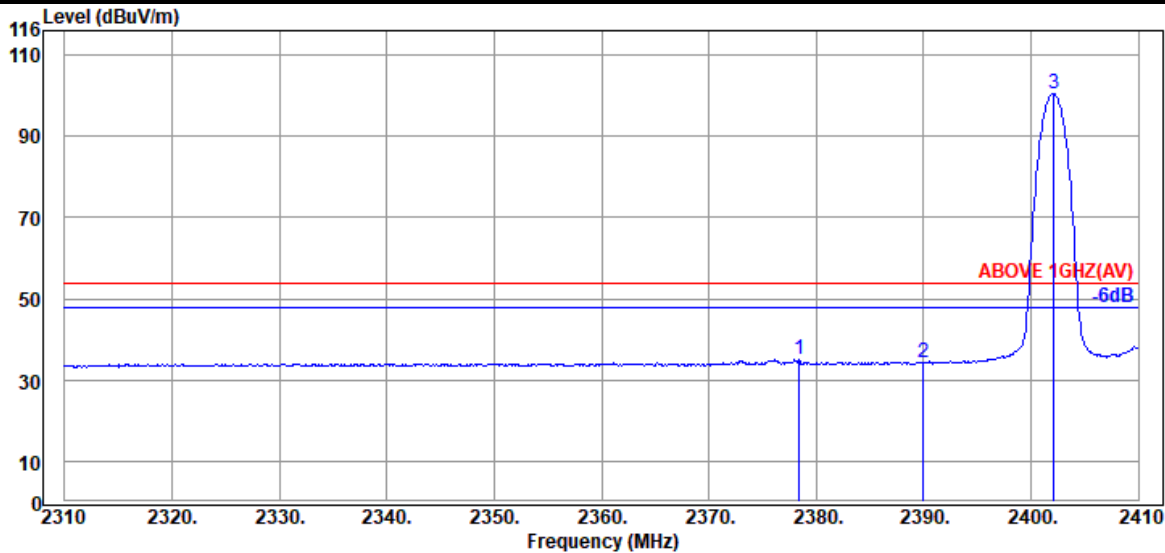


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2378.40	32.41	7.95	34.58	29.16	34.94	54.00	19.06	Average
2390.00	32.44	7.95	34.58	28.35	34.16	54.00	19.84	Average
@ 2402.10	32.50	7.95	34.59	94.72	100.58	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	8-DPSK	Frequency	TX 2402MHz
------	--------	-----------	------------

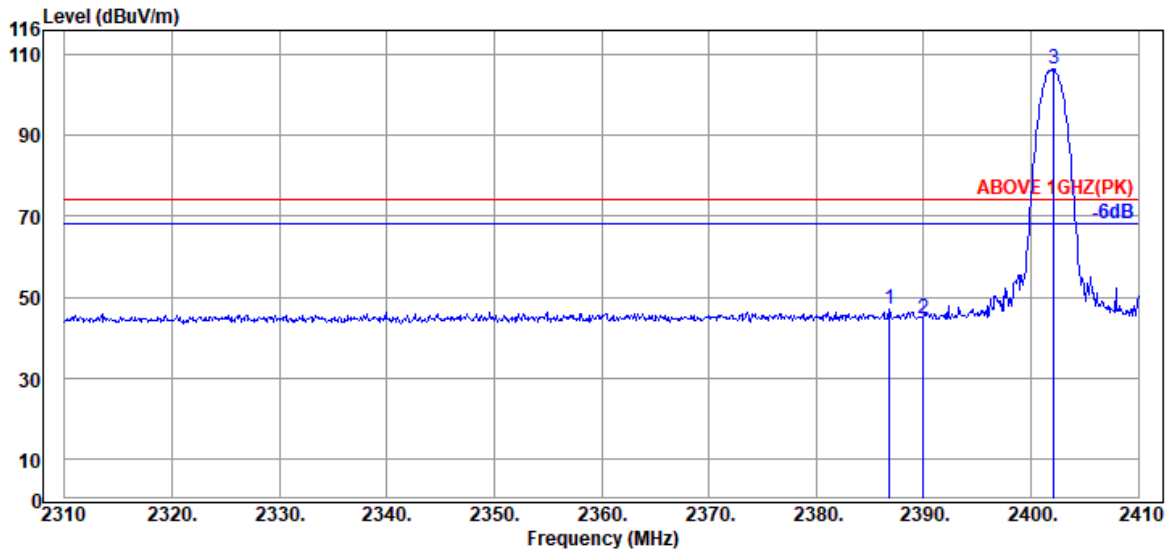

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2386.80	32.44	7.95	34.58	41.05	46.86	74.00	27.14	Peak
2390.00	32.44	7.95	34.58	38.88	44.69	74.00	29.31	Peak
@ 2402.10	32.50	7.95	34.59	100.74	106.60	---	---	Peak

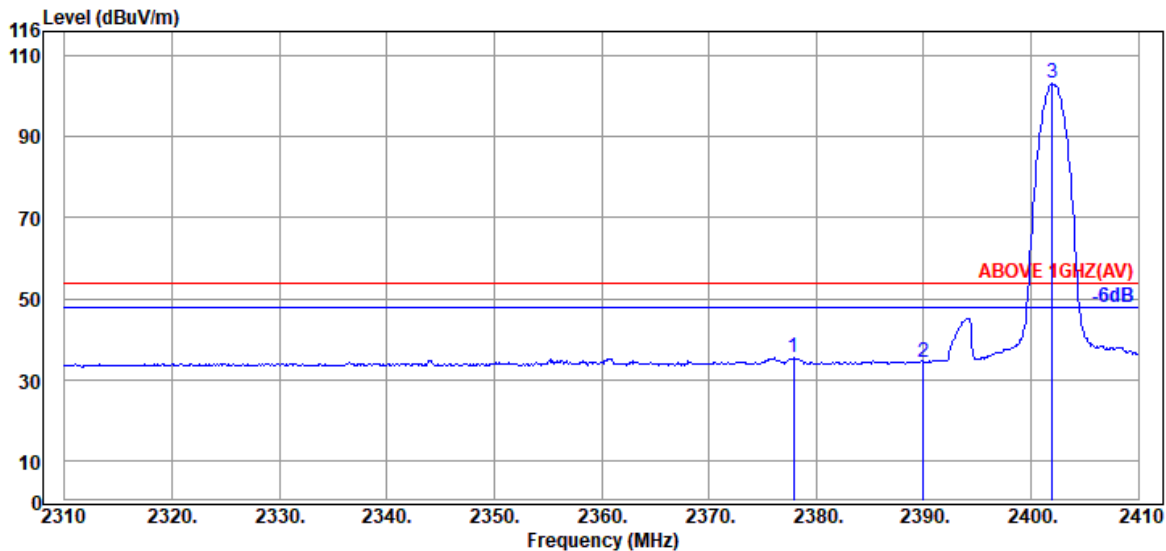


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2377.90	32.41	7.95	34.58	29.62	35.40	54.00	18.60	Average
2390.00	32.44	7.95	34.58	28.59	34.40	54.00	19.60	Average
@ 2402.00	32.50	7.95	34.59	97.20	103.06	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	8-DPSK	Frequency	TX 2480MHz
------	--------	-----------	------------

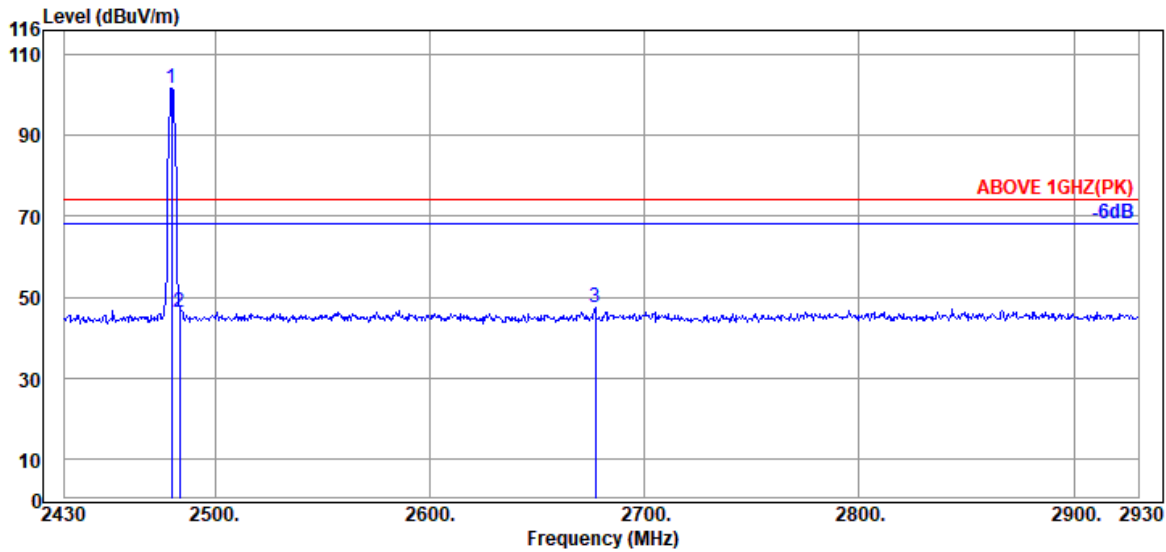

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.00	32.11	7.99	34.60	96.34	101.84	---	---	Peak
2483.50	32.14	7.99	34.61	40.66	46.18	74.00	27.82	Peak
2677.00	32.31	8.08	34.64	41.85	47.60	74.00	26.40	Peak

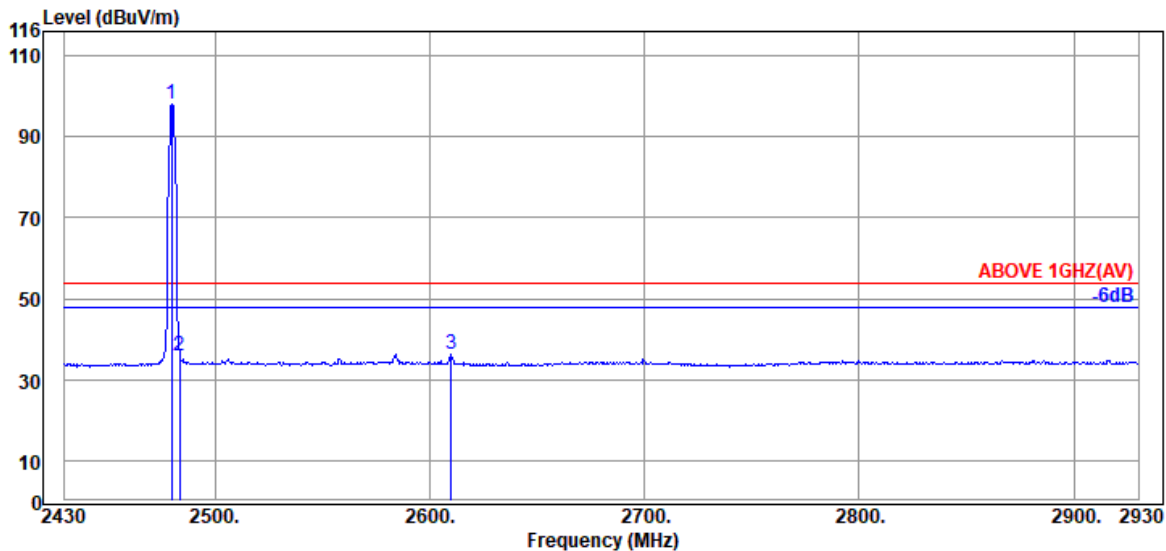


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.00	32.11	7.99	34.60	92.70	98.20	---	---	Average
2483.50	32.14	7.99	34.61	30.23	35.75	54.00	18.25	Average
2610.00	32.20	8.05	34.63	30.77	36.39	54.00	17.61	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	8-DPSK	Frequency	TX 2480MHz
------	--------	-----------	------------

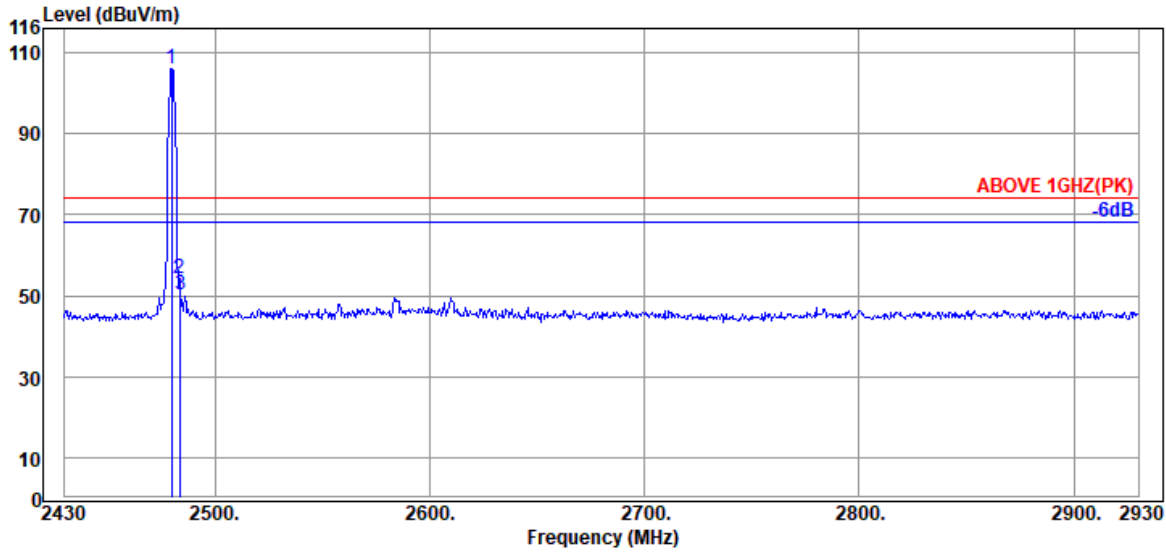

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.00	32.11	7.99	34.60	100.52	106.02	---	---	Peak
2483.50	32.14	7.99	34.61	48.83	54.35	74.00	19.65	Peak
2484.00	32.14	7.99	34.61	44.59	50.11	74.00	23.89	Peak

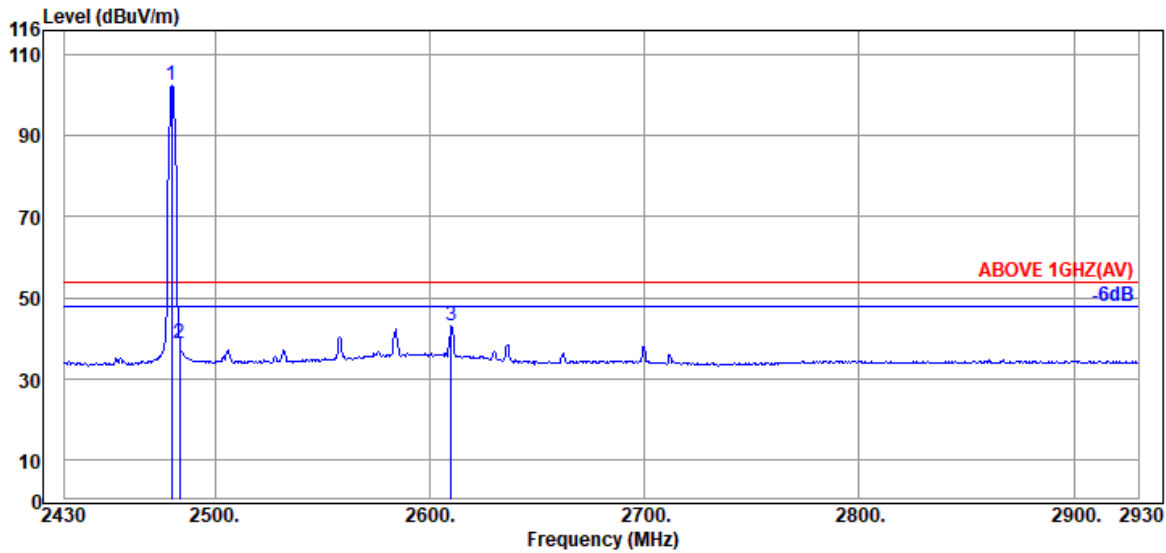

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.00	32.11	7.99	34.60	97.05	102.55	---	---	Average
2483.50	32.14	7.99	34.61	33.00	38.52	54.00	15.48	Average
2610.00	32.20	8.05	34.63	37.45	43.07	54.00	10.93	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

A.2.2 Emissions outside the frequency band:

The emissions (up to 25GHz) not reported for there is no emission be found.

Mode	8-DPSK	Frequency	TX 2402MHz
------	--------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4804.00	34.10	10.49	34.47	31.82	41.94	54.00	12.06	Peak
7205.00	35.60	12.25	34.60	30.10	43.35	54.00	10.65	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4804.00	34.10	10.49	34.47	38.98	49.10	54.00	4.90	Peak
7205.00	35.60	12.25	34.60	28.90	42.15	54.00	11.85	Peak

Mode	8-DPSK	Frequency	TX 2441MHz
------	--------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4882.00	34.03	10.54	34.45	32.14	42.26	54.00	11.74	Peak
7322.00	35.60	12.29	34.70	29.96	43.15	54.00	10.85	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4882.00	34.03	10.54	34.45	39.19	49.31	54.00	4.69	Peak
7322.00	35.60	12.29	34.70	29.79	42.98	54.00	11.02	Peak

Mode	8-DPSK	Frequency	TX 2480MHz
------	--------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4960.00	34.10	10.60	34.44	31.31	41.57	54.00	12.43	Peak
7439.00	35.63	12.36	34.78	29.41	42.62	54.00	11.38	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4960.00	34.10	10.60	34.44	38.43	48.69	54.00	5.31	Peak
7439.00	35.63	12.36	34.78	29.06	42.27	54.00	11.73	Peak

A.2.3 Emissions in Non-restricted Frequency Bands:

All emission levels below the FCC 15.209(a) Section 8.9 table 4 general radiated emissions limits is not required.

A.3 20dB BANDWIDTH


Test Date	2021/02/17	Temp./Hum.	19°C/57%
Cable Loss	1.6dB	Tested By	Hua Wu
Test Voltage	AC 120V, 60Hz (via AC Adapter)		

A.3.1 20dB Bandwidth Result

Mode	Centre Frequency (MHz)	20dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz) (Reference only)	2/3 (20dB Bandwidth)
GFSK	2402	0.9233	0.87818	0.616
	2441	0.9222	0.87770	0.615
	2480	0.9364	0.88240	0.624
8-DPSK	2402	1.284	1.1928	0.856
	2441	1.280	1.1922	0.853
	2480	1.283	1.1942	0.855


Remark: The maximum two-thirds of the 20dB bandwidth is the limit for carrier frequency separation presented.


A.3.2 Measurement Plots

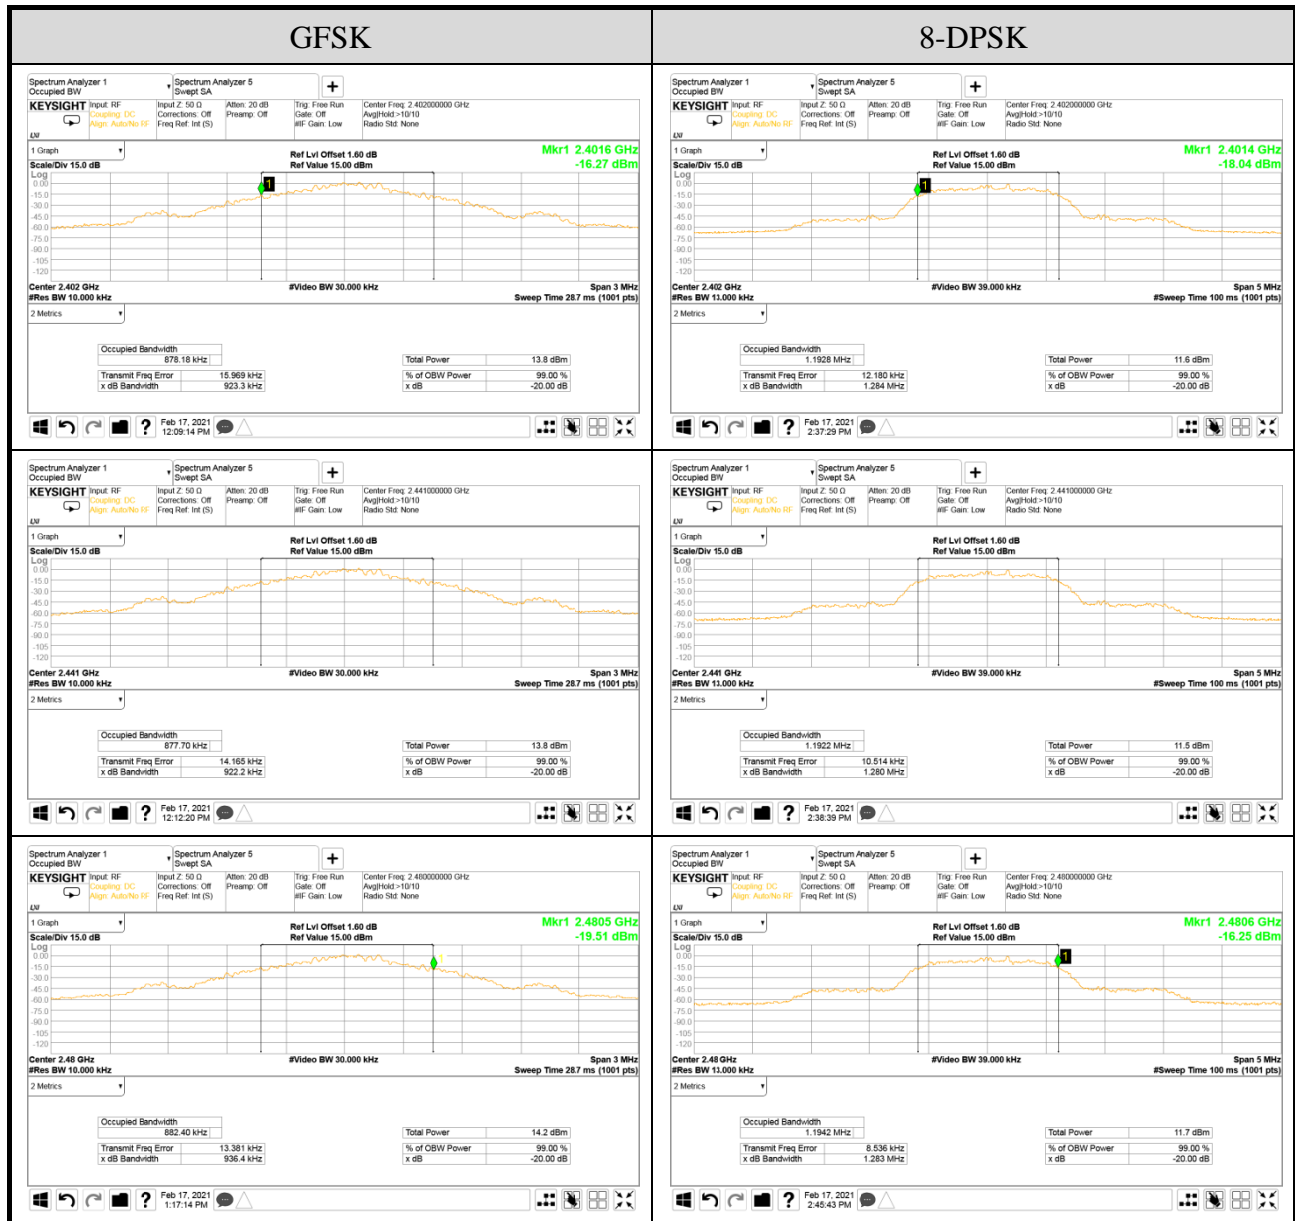

A.4 CARRIER FREQUENCY SEPARATION

Test Date	2021/02/17	Temp./Hum.	19°C/57%
Cable Loss	1.6dB	Tested By	Hua Wu
Test Voltage	AC 120V, 60Hz (via AC Adapter)		

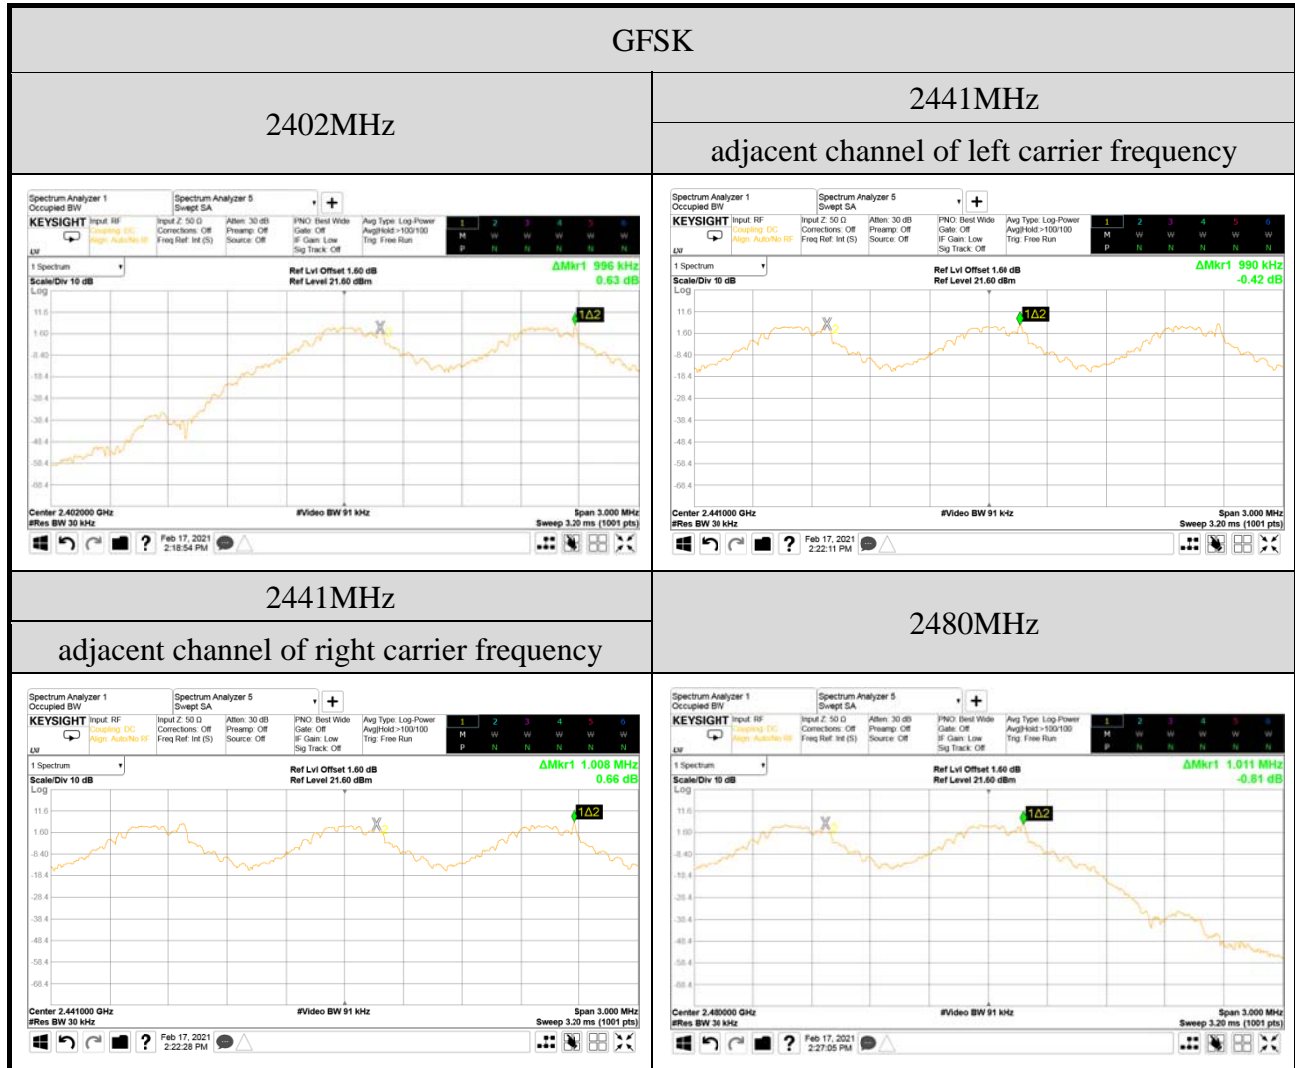

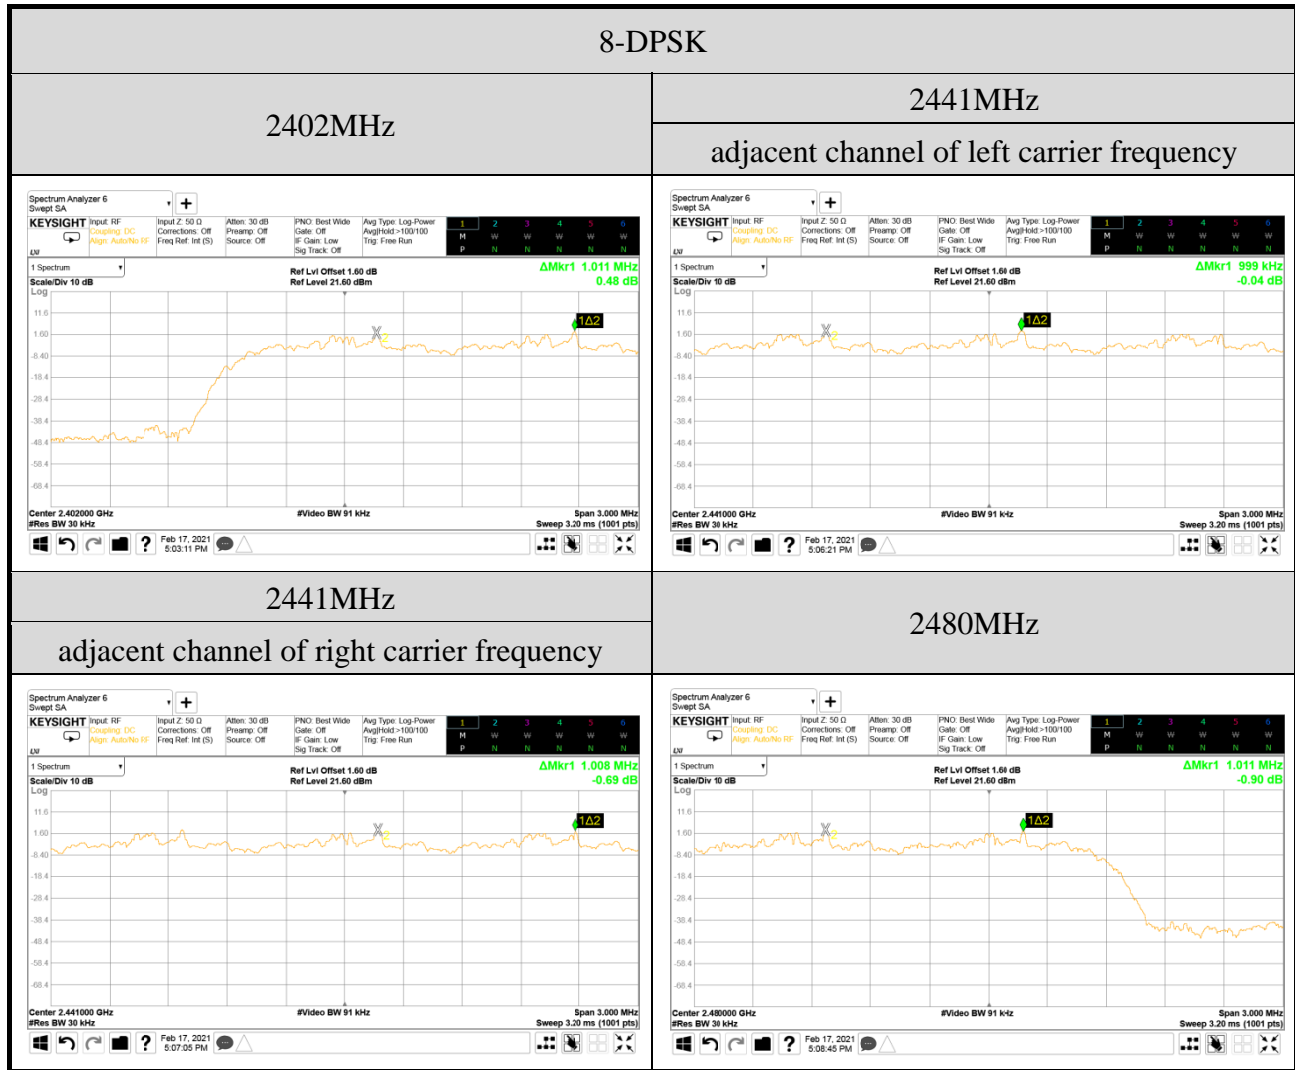

A.5 TIME OF OCCUPANCY

Test Date	2021/02/17	Temp./Hum.	19°C/57%
Cable Loss	1.6dB	Tested By	Hua Wu
Test Voltage	AC 120V, 60Hz (via AC Adapter)		

A.5.1 Time of Occupancy

Mode	Centre Frequency (MHz)	Mode	Each second appearance transmission	Time of Occupancy (ms)	Maximum accumulated Time of Occupancy (ms)	Limit (ms)
GFSK	2402	DH1	10	0.380	120.080	<400
		DH3	3	1.630	154.524	<400
		DH5	1	2.900	91.640	<400

Observation Period:

$$79 \text{ channels} * 0.4 \text{ seconds} = 31.6 \text{ seconds}$$

DH1 Mode

For each second of 10 transmission appearance, the longest time of occupancy is
 10 transmission * 31.6 seconds * 0.380 ms = 120.080 ms (<400ms)

DH3 Mode

For each second of 3 transmission appearance, the longest time of occupancy is
 3 transmission * 31.6 seconds * 1.630 ms = 154.524 ms (<400ms)

DH5 Mode

For each second of 1 transmission appearance, the longest time of occupancy is
 1 transmission * 31.6 seconds * 2.900 ms = 91.640 ms (<400ms)

Mode	Centre Frequency (MHz)	Mode	Each second appearance transmission	Time of Occupancy (ms)	Maximum accumulated Time of Occupancy (ms)	Limit (ms)
GFSK	2441	DH1	10	0.380	120.080	<400
		DH3	3	1.630	154.524	<400
		DH5	1	2.900	91.640	<400

Observation Period:

$$79 \text{ channels} * 0.4 \text{ seconds} = 31.6 \text{ seconds}$$

DH1 Mode

For each second of 10 transmission appearance, the longest time of occupancy is
 10 transmission * 31.6 seconds * 0.380 ms = 120.080 ms (<400ms)

DH3 Mode

For each second of 3 transmission appearance, the longest time of occupancy is
 3 transmission * 31.6 seconds * 1.630 ms = 154.524 ms (<400ms)

DH5 Mode

For each second of 1 transmission appearance, the longest time of occupancy is
 1 transmission * 31.6 seconds * 2.900 ms = 91.640 ms (<400ms)

Mode	Centre Frequency (MHz)	Mode	Each second appearance transmission	Time of Occupancy (ms)	Maximum accumulated Time of Occupancy (ms)	Limit (ms)
GFSK	2480	DH1	10	0.380	120.080	<400
		DH3	3	1.630	154.524	<400
		DH5	1	2.900	91.640	<400

Observation Period:

79 channels* **0.4** seconds= **31.6** seconds

DH1 Mode

For each second of **10** transmission appearance, the longest time of occupancy is
10 transmission* **31.6** seconds* **0.380** ms= **120.080** ms (<400ms)


DH3 Mode

For each second of **3** transmission appearance, the longest time of occupancy is
3 transmission* **31.6** seconds* **1.630** ms= **154.524** ms (<400ms)

DH5 Mode

For each second of **1** transmission appearance, the longest time of occupancy is
1 transmission* **31.6** seconds* **2.900** ms= **91.640** ms (<400ms)

● Measurement Plots

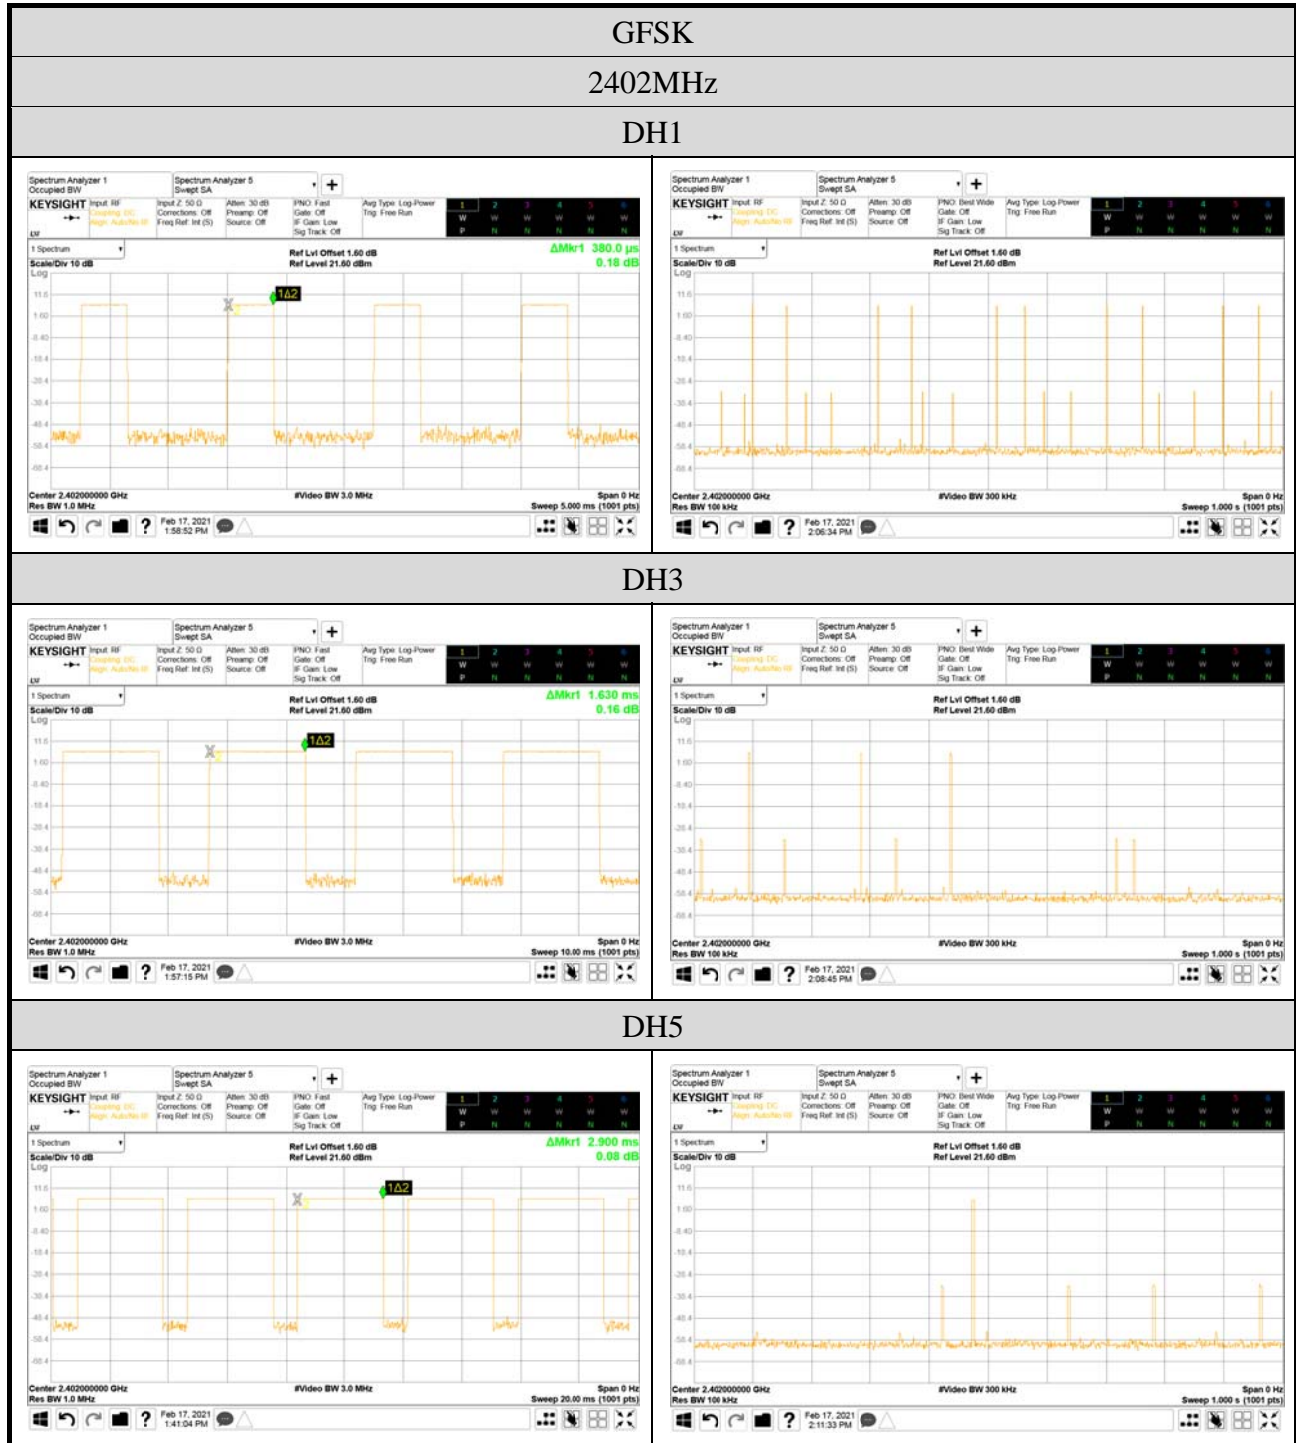

GFSK
 2441MHz
 DH1



DH3




DH5




GFSK
 2480MHz
 DH1



DH3

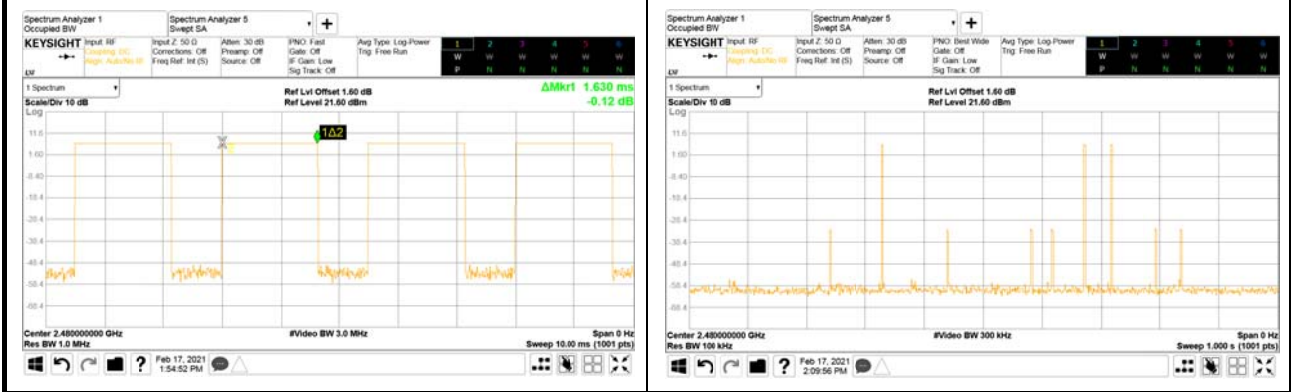

DH5

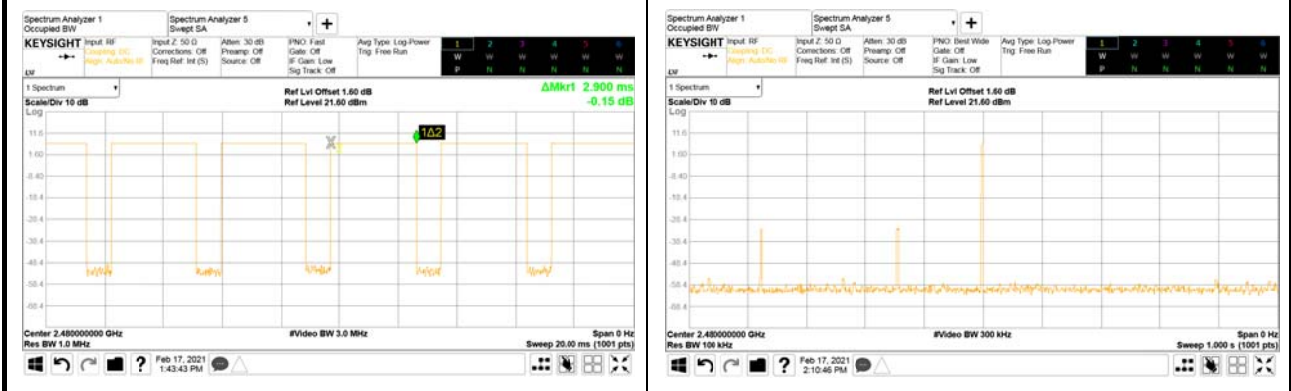

Mode	Centre Frequency (MHz)	Mode	Each second appearance transmission	Time of Occupancy (ms)	Maximum accumulated Time of Occupancy (ms)	Limit (ms)
8-DPSK	2402	3DH1	10	0.385	121.660	<400
		3DH3	3	1.640	155.472	<400
		3DH5	2	2.900	183.280	<400

Observation Period:

79 channels * 0.4 seconds = 31.6 seconds

3DH1 Mode

For each second of **10** transmission appearance, the longest time of occupancy is
10 transmission * 31.6 seconds * 0.385 ms = 121.660 ms (<400ms)

3DH3 Mode

For each second of **3** transmission appearance, the longest time of occupancy is
3 transmission * 31.6 seconds * 1.640 ms = 155.472 ms (<400ms)

3DH5 Mode

For each second of **2** transmission appearance, the longest time of occupancy is
2 transmission * 31.6 seconds * 2.900 ms = 183.280 ms (<400ms)

Mode	Centre Frequency (MHz)	Mode	Each second appearance transmission	Time of Occupancy (ms)	Maximum accumulated Time of Occupancy (ms)	Limit (ms)
8-DPSK	2441	3DH1	10	0.390	123.240	<400
		3DH3	3	1.640	155.472	<400
		3DH5	2	2.900	183.280	<400

Observation Period:

79 channels * 0.4 seconds = 31.6 seconds

3DH1 Mode

For each second of **10** transmission appearance, the longest time of occupancy is
10 transmission * 31.6 seconds * 0.390 ms = 123.240 ms (<400ms)

3DH3 Mode

For each second of **3** transmission appearance, the longest time of occupancy is
3 transmission * 31.6 seconds * 1.640 ms = 155.472 ms (<400ms)

3DH5 Mode

For each second of **2** transmission appearance, the longest time of occupancy is
2 transmission * 31.6 seconds * 2.900 ms = 183.280 ms (<400ms)

Mode	Centre Frequency (MHz)	Mode	Each second appearance transmission	Time of Occupancy (ms)	Maximum accumulated Time of Occupancy (ms)	Limit (ms)
8-DPSK	2480	3DH1	10	0.390	123.240	<400
		3DH3	3	1.640	155.472	<400
		3DH5	2	2.900	183.280	<400

Observation Period:

$$79 \text{ channels} * 0.4 \text{ seconds} = 31.6 \text{ seconds}$$

3DH1 Mode

For each second of **10** transmission appearance, the longest time of occupancy is
10 transmission * **31.6** seconds * **0.390** ms = **123.240** ms (<400ms)


3DH3 Mode

For each second of **3** transmission appearance, the longest time of occupancy is
3 transmission * **31.6** seconds * **1.640** ms = **155.472** ms (<400ms)

3DH5 Mode

For each second of **2** transmission appearance, the longest time of occupancy is
2 transmission * **31.6** seconds * **2.900** ms = **183.280** ms (<400ms)

● Measurement Plots

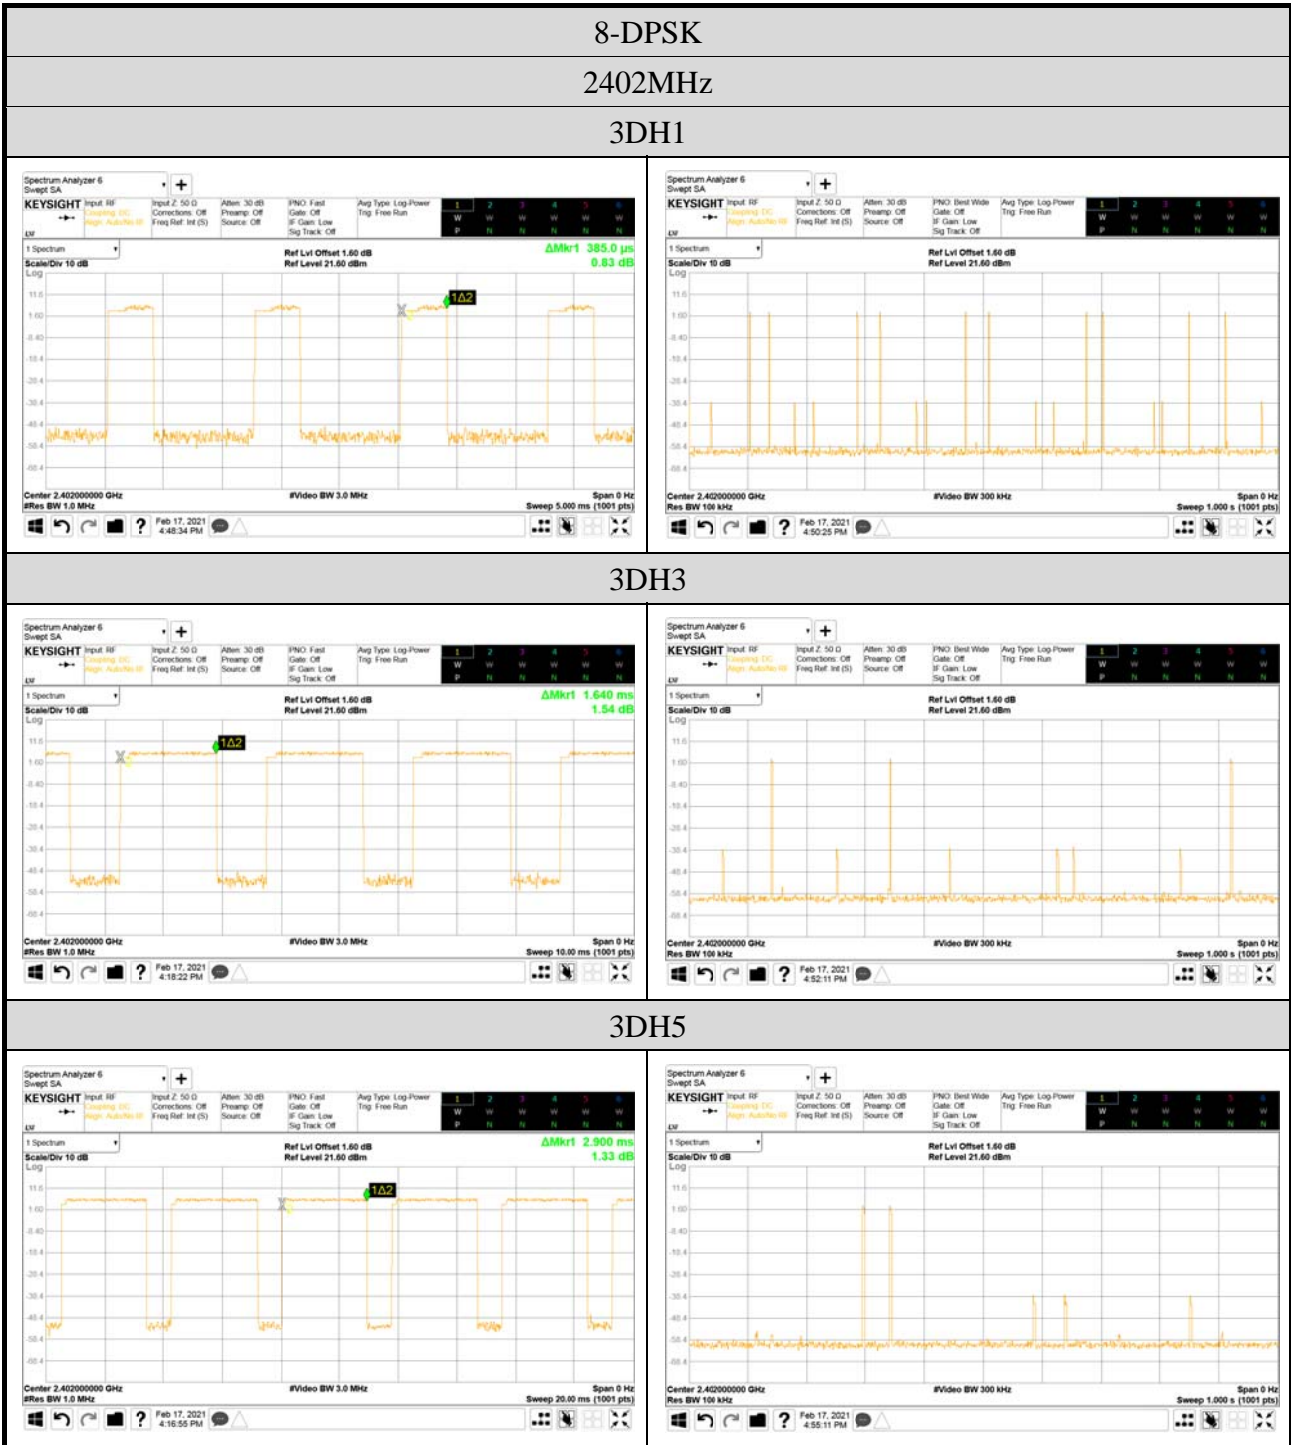


8-DPSK

2441MHz


3DH1



3DH3

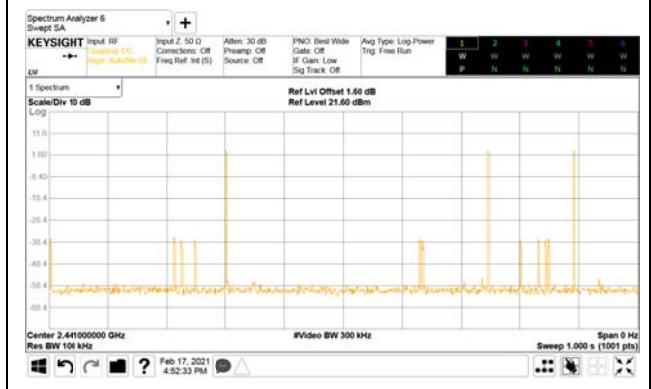

3DH5

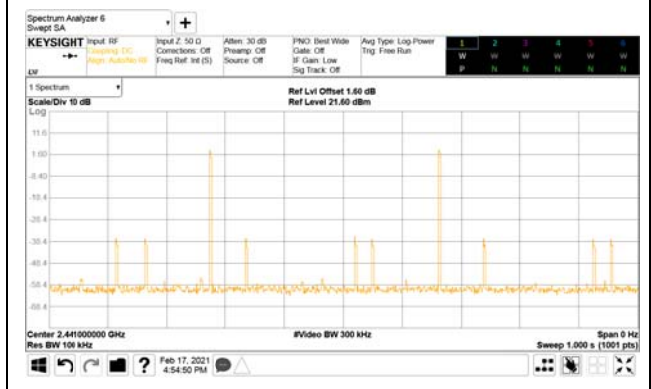


8-DPSK

2480MHz


3DH1



3DH3

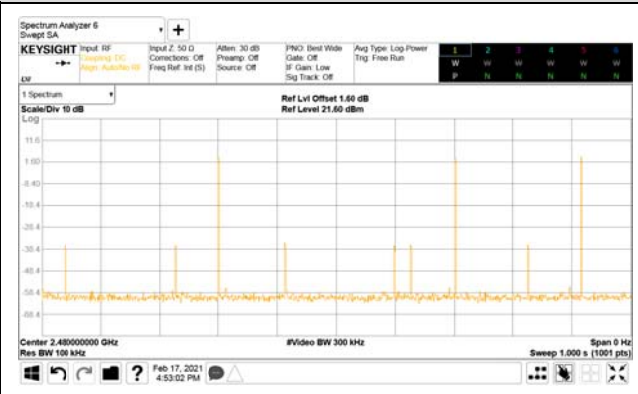

3DH5

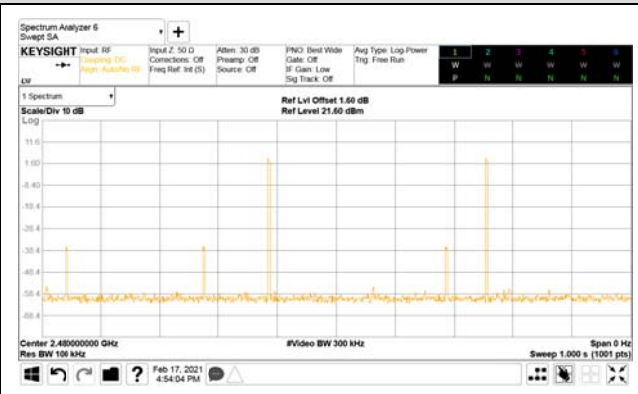

A.6 NUMBER OF HOPPING CHANNELS

Test Date	2021/02/17	Temp./Hum.	19°C/57%
Cable Loss	1.6dB	Tested By	Hua Wu
Test Voltage	AC 120V, 60Hz (via AC Adapter)		

Mode: GFSK	Mode: 8-DPSK
The number hopping channel is 79.	The number hopping channel is 79.


A.7 MAXIMUM PEAK OUTPUT POWER

Test Date	2021/02/17	Temp./Hum.	19°C/57%
Cable Loss	1.6dB	Tested By	Hua Wu
Test Voltage	AC 120V, 60Hz (via AC Adapter)		

A.7.1 Maximum Peak Output Power

Mode	Centre Frequency (MHz)	Maximum Peak Output Power		Limit
		dBm	W	
GFSK	2402	6.95	0.005	21dBm (0.125W)
	2441	7.23	0.005	
	2480	7.31	0.005	
8-DPSK	2402	7.32	0.005	
	2441	7.57	0.006	
	2480	7.68	0.006	


A.7.2 Measurement Plots

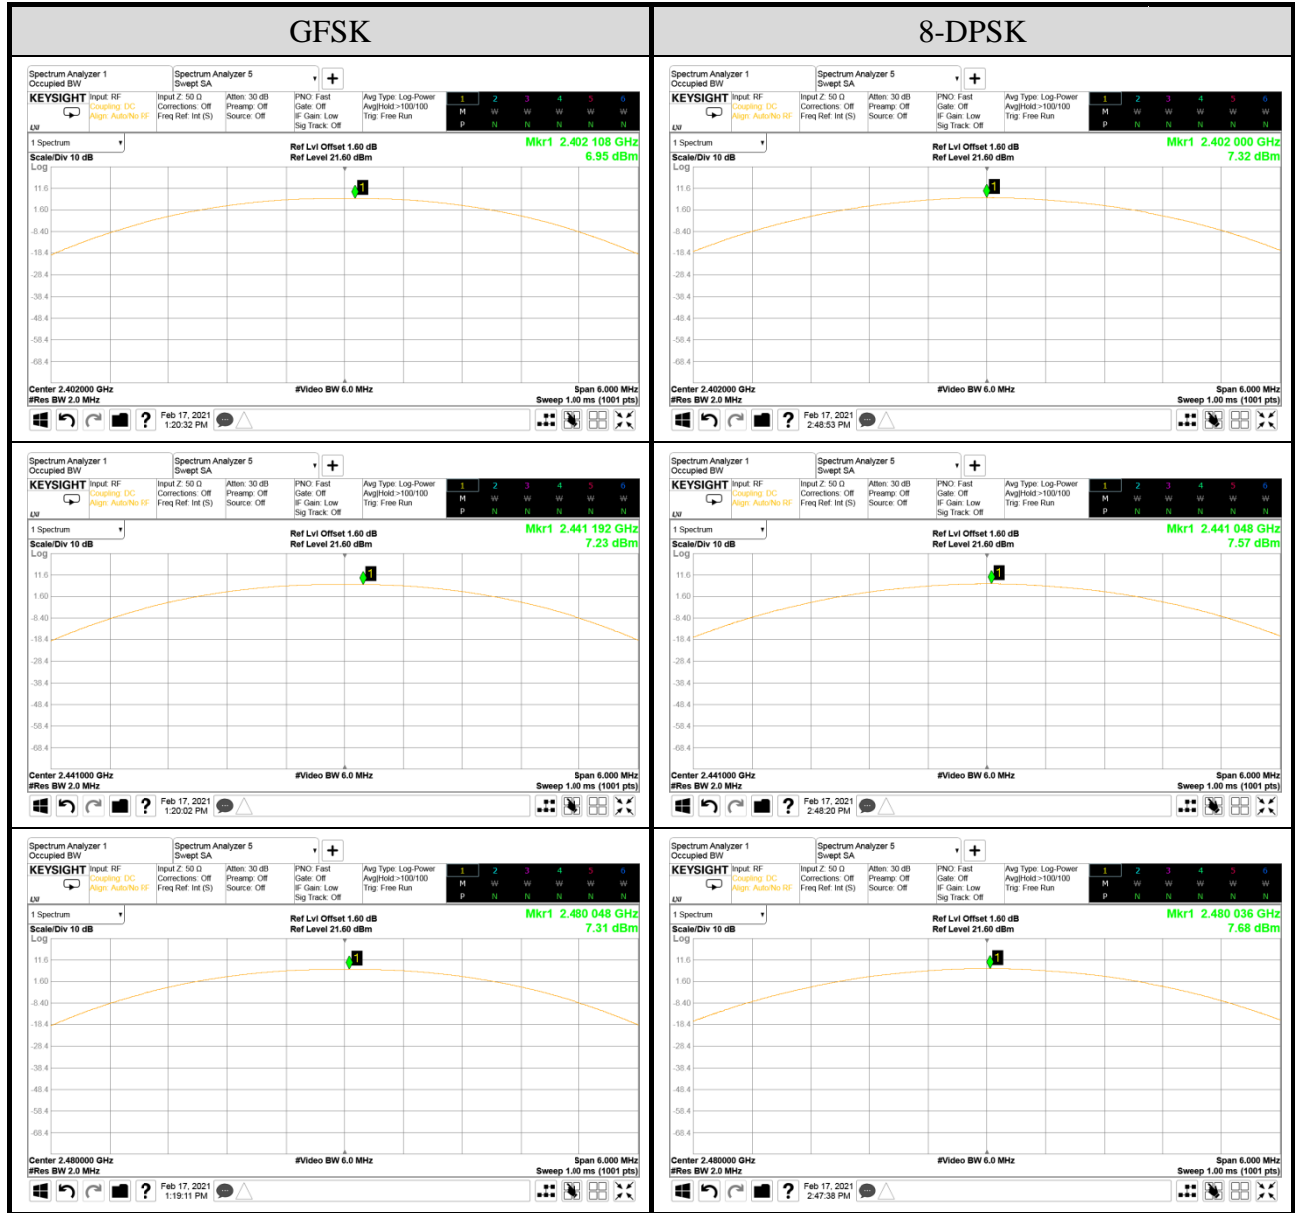


A.8 EMISSION LIMITATIONS MEASUREMENT


Test Date	2021/02/17	Temp./Hum.	19°C/57%
Cable Loss	1.6dB	Tested By	Hua Wu
Test Voltage	AC 120V, 60Hz (via AC Adapter)		

A.8.1 Band Edge

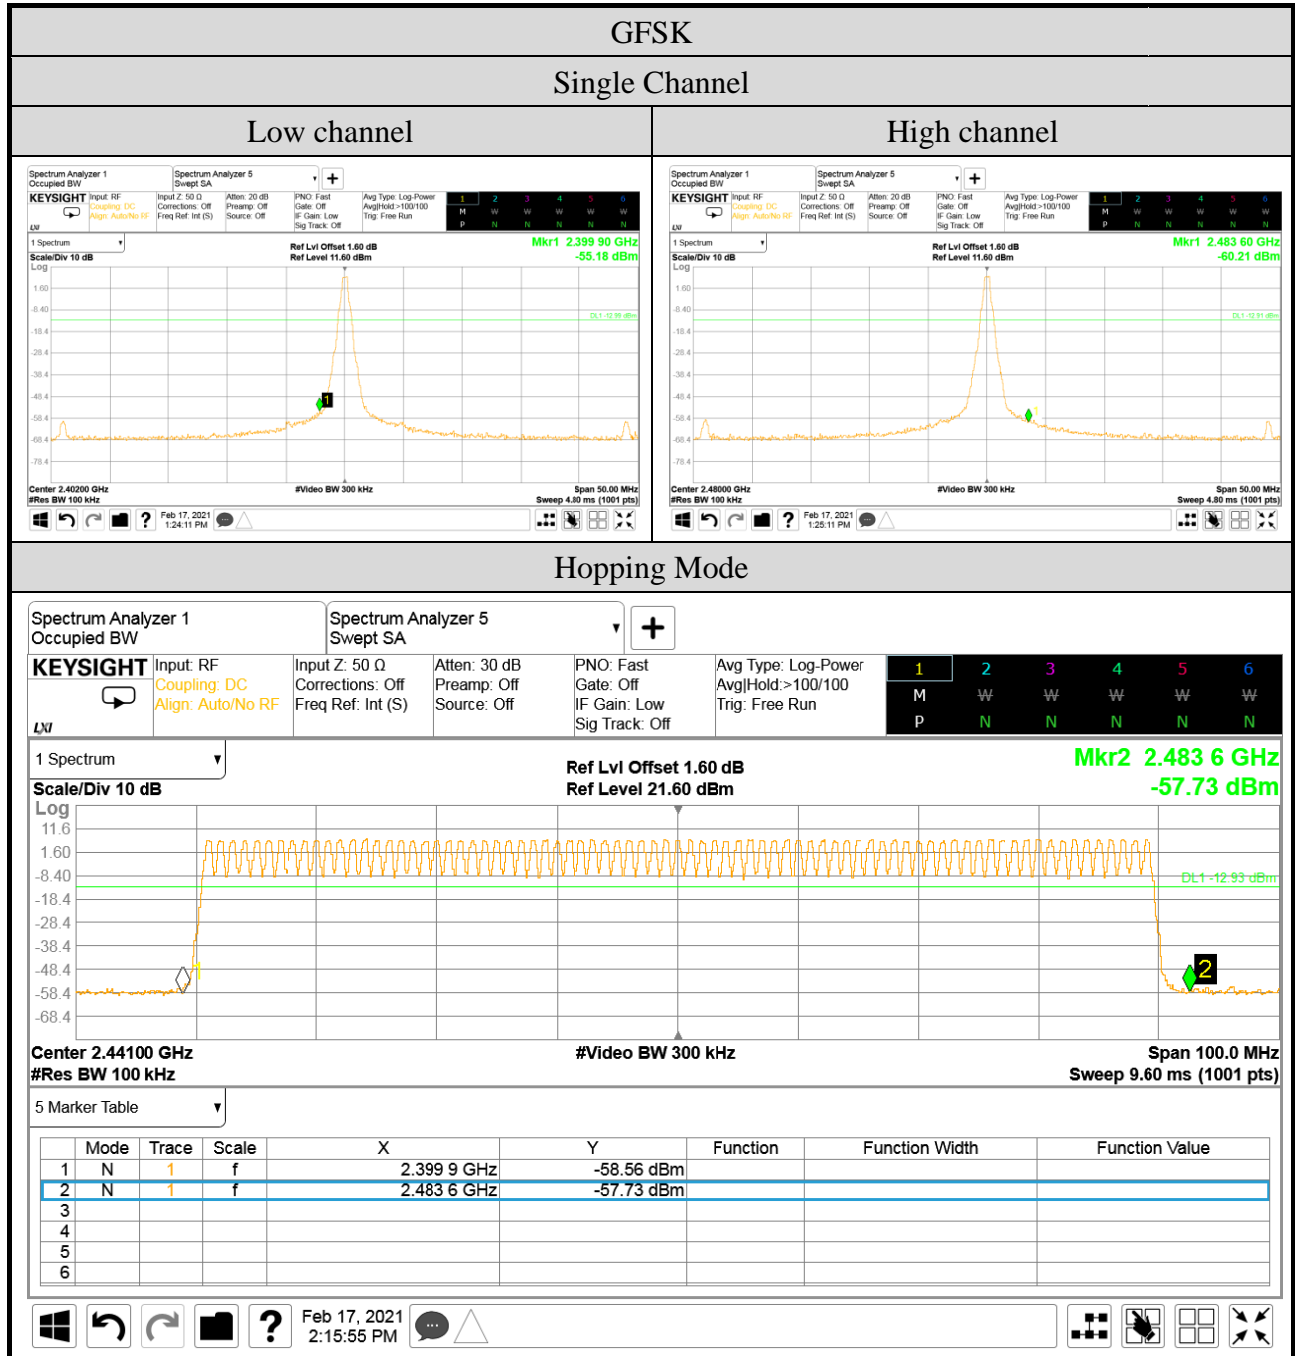


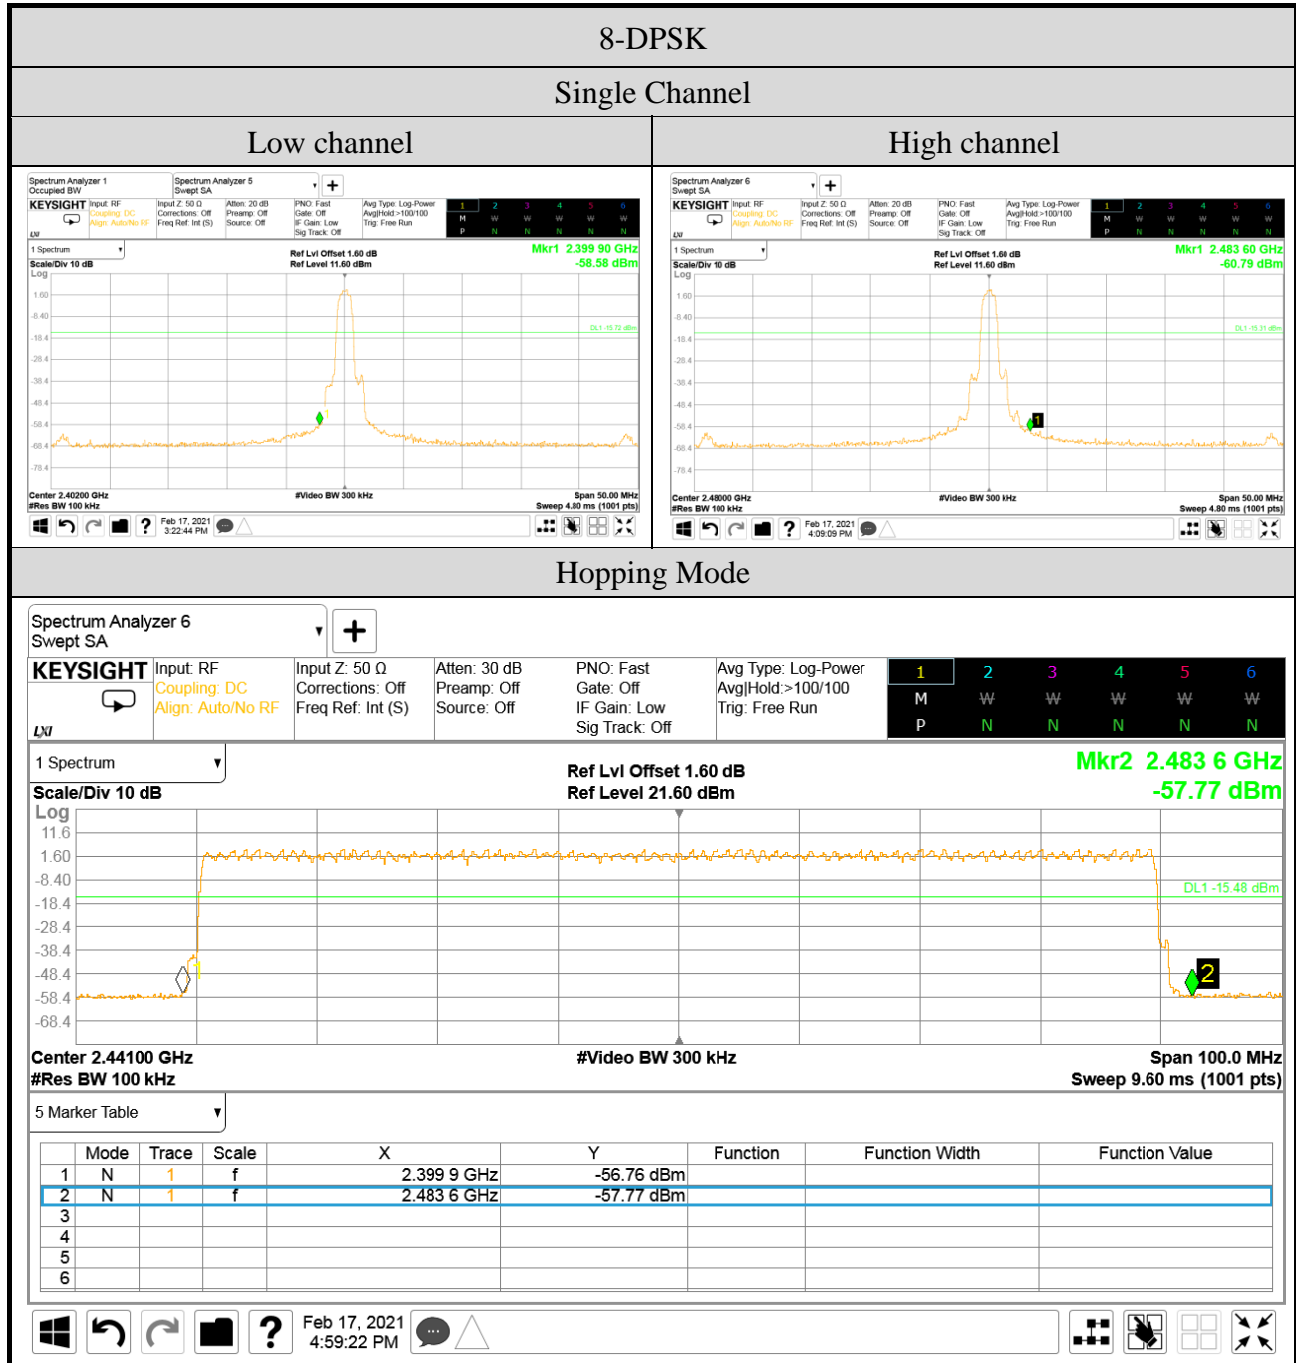


A.8.2 Spurious Emission

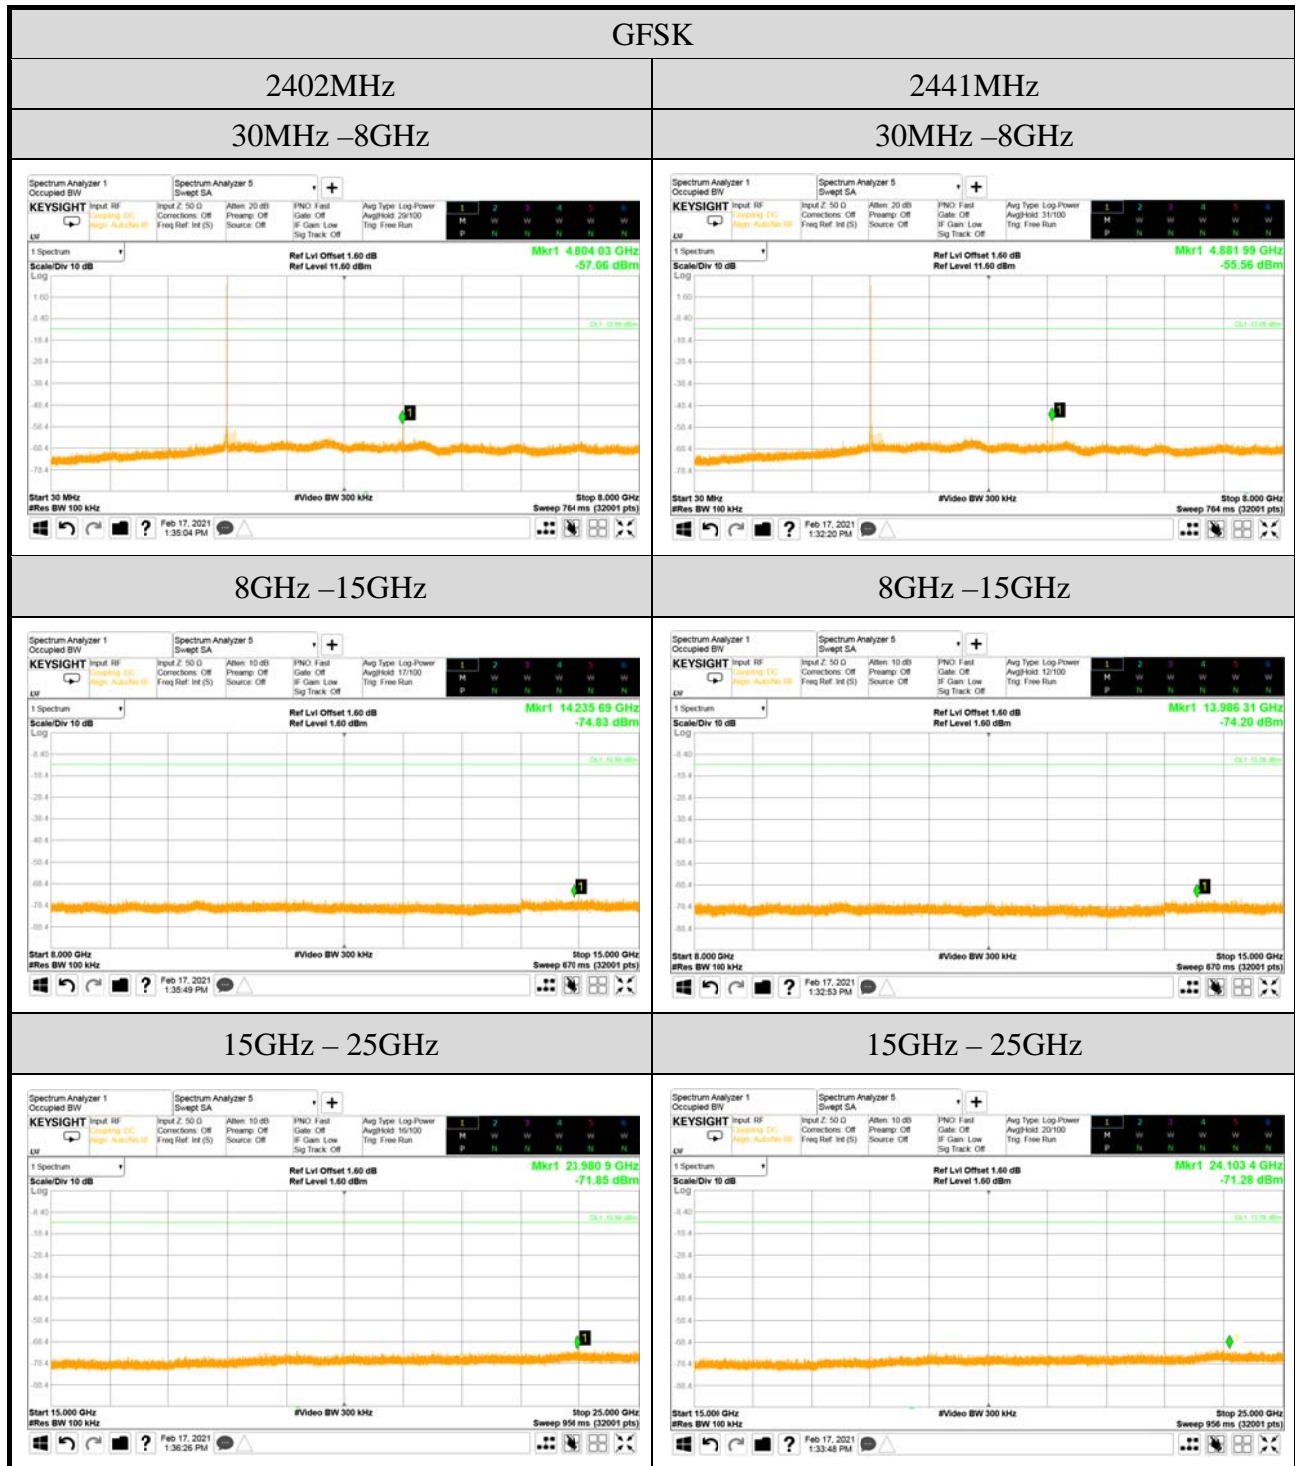

Note: All results have been included cable loss.

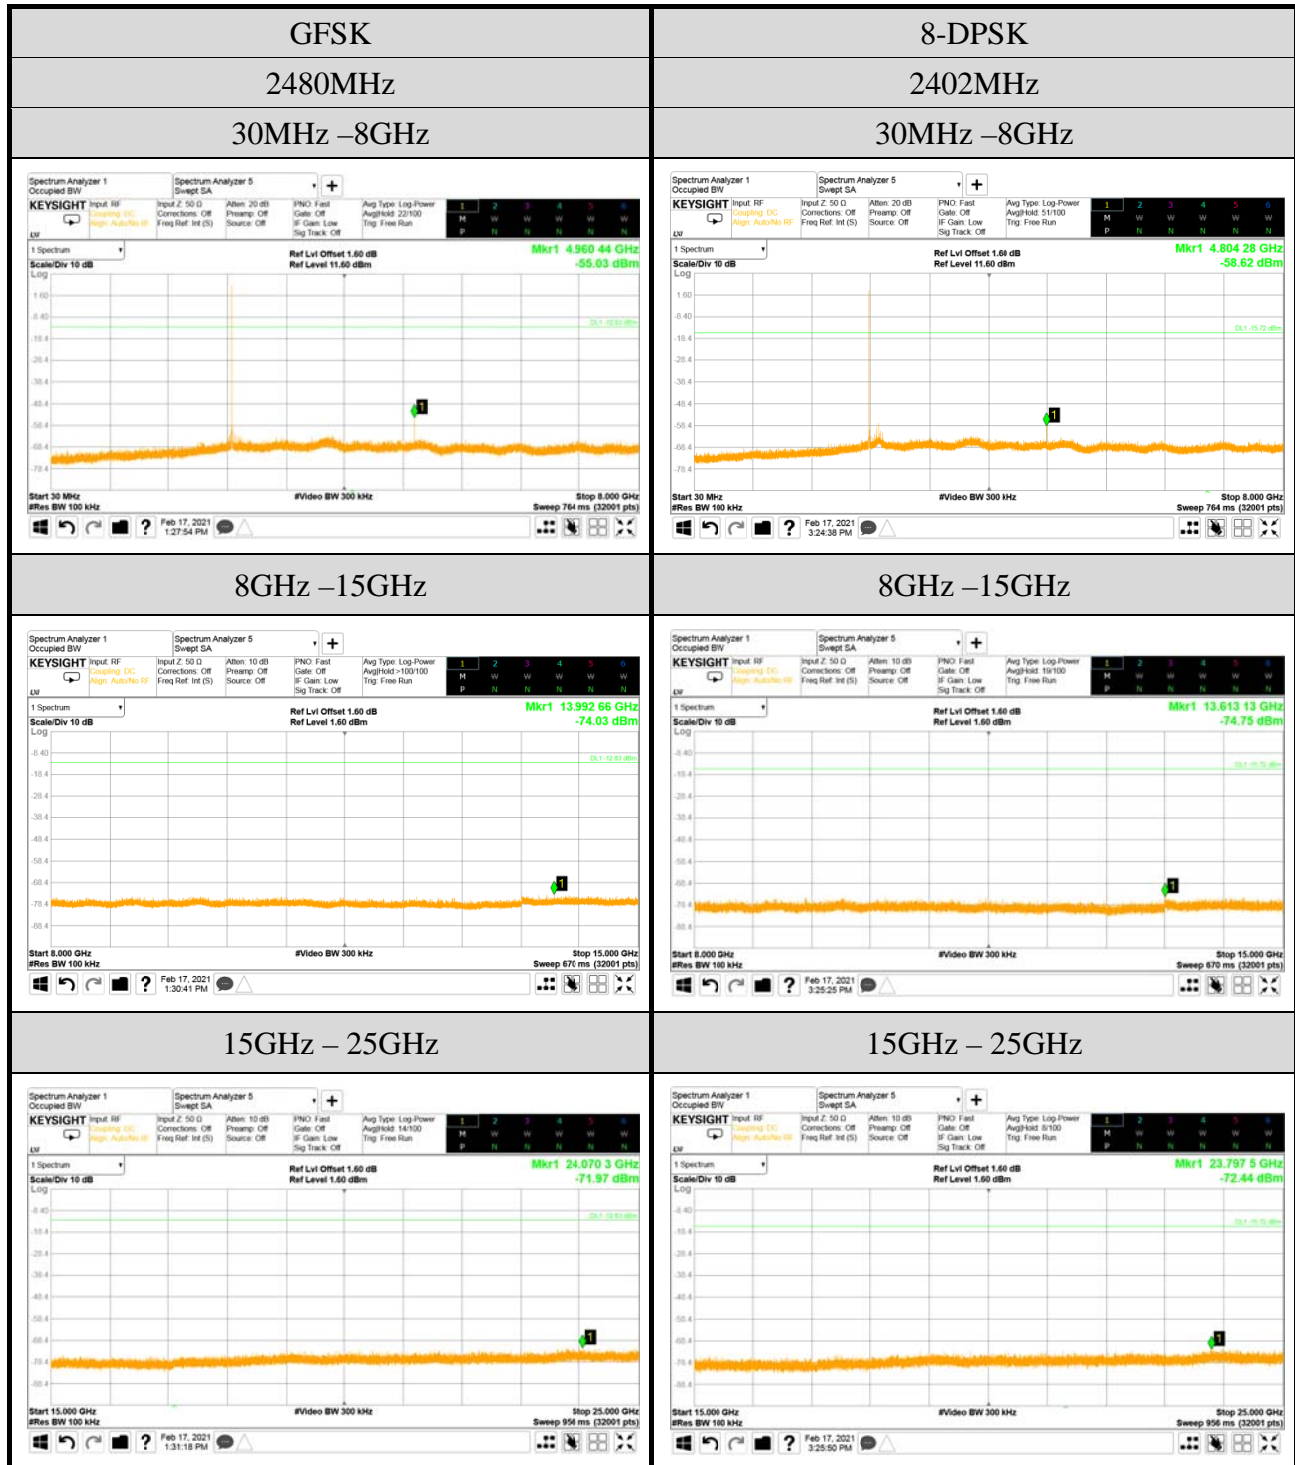

Note: All results have been included cable loss.

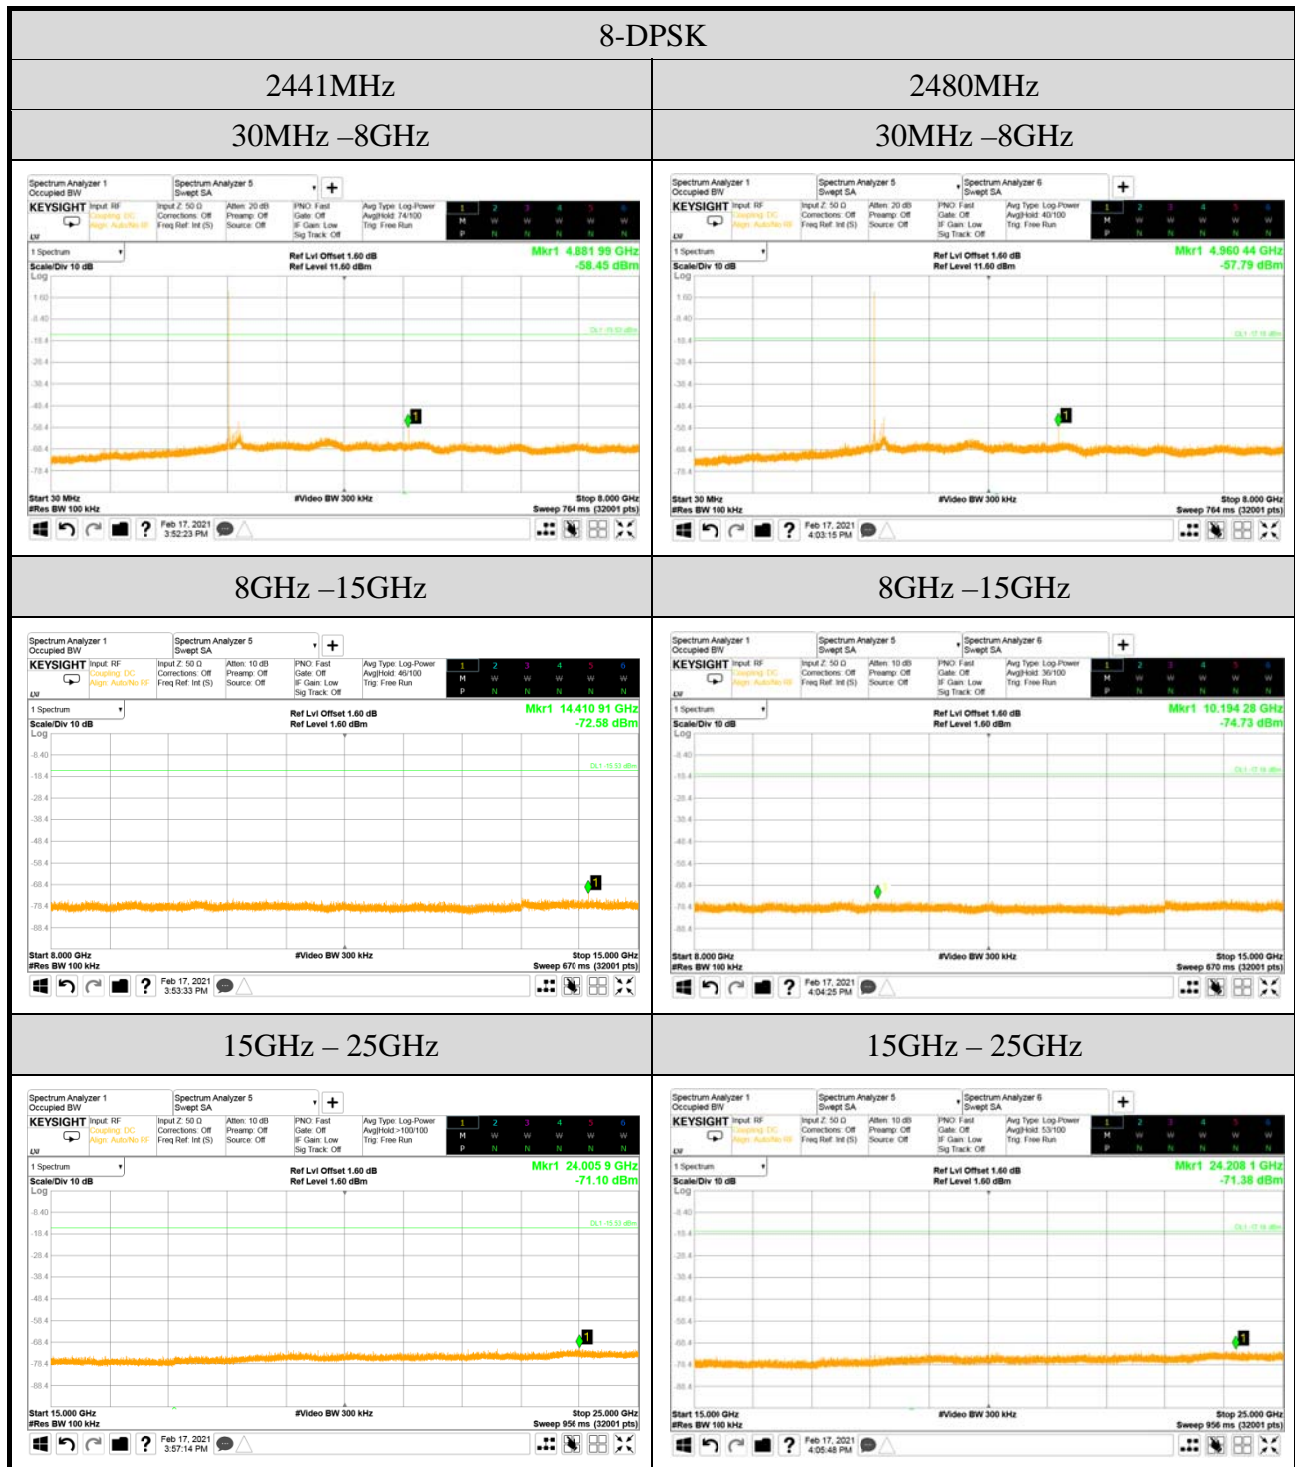

Note: All results have been included cable loss.