

FCC 15.225
13.56MHz Test Report

for

Elitegroup Computer Systems Co., Ltd.

No. 239, Sec. 2., TiDing Blvd., Taipei,
Taiwan 11493

Brand : ECS
Product Name : Personal Computer
Model Name : SKM-U mPC
Family Name : SKM-U mPC.....
(The dots "." in the model name can be 0 to 9, A to Z,
a-z, "-", "_", "\", "/" or blank, for marketing use only.)
FCC ID : WL6SKM-U-MPCM

Prepared by: : AUDIX Technology Corporation,
EMC Department



TABLE OF CONTENTS

Description	Page
TEST REPORT CERTIFICATION	4
1. REPORT HISTORY	4
2. SUMMARY OF TEST RESULTS	5
3. GENERAL INFORMATION	6
3.1. Description of EUT	6
3.2. EUT Specifications Assessed in Current Report	6
3.3. Descriptions of Key Components and Operating Modes	7
3.4. Tested Supporting System List	9
3.5. Setup Configuration	9
3.6. Operating Condition of EUT	9
3.7. Description of Test Facility	10
3.8. Measurement Uncertainty	10
4. MEASUREMENT EQUIPMENT LIST	11
4.1. Conducted Emission Measurement	11
4.2. Radiated Emission Measurement	11
4.3. RF Conducted Measurement	11
5. CONDUCTED EMISSION MEASUREMENT	12
5.1. Block Diagram of Test Setup	12
5.2. Power Line Conducted Emission Limit	12
5.3. Test Procedure	12
5.4. Conducted Emission Measurement Results	13
6. RADIATED SPURIOUS EMISSION MEASUREMENT (IN-BAND)	15
6.1. Block Diagram of Test Setup	15
6.2. IN-Band Radiated Spurious Emission Limits	16
6.3. Test Procedure	16
6.4. Test Results	17
7. RADIATED SPURIOUS EMISSION MEASUREMENT (OUT-BAND)	18
7.1. Block Diagram of Test Setup	18
7.2. Out-Band Radiated Spurious Emission Limits	19
7.3. Test Procedure	19
7.4. Measurement Result Explanation	20
7.5. Test Results	20
8. 20dB BANDWIDTH MEASUREMENT	22
8.1. Block Diagram of Test Setup	22
8.2. Specification Limits	22
8.3. Test Procedure	22
8.4. Test Results	23
9. FREQUENCY STABILITY MEASUREMENT	24
9.1. Block Diagram of Test Setup	24
9.2. Specification Limits	24
9.3. Test Procedure	24
9.4. Test Results	25
10. DEVIATION TO TEST SPECIFICATIONS	26
APPENDIX A TEST PHOTOGRAPHS	

TEST REPORT CERTIFICATION

Applicant : Elitegroup Computer Systems Co., Ltd.
Product Name : Personal Computer
Model No. : SKM-U mPC
Family Name : SKM-U mPC.....
(The dots "." in the model name can be 0 to 9, A to Z, a-z, "-", "_", "\", "/" or blank, for marketing use only.)
Serial No. : N/A
Brand : ECS
Power Supply : DC 19V

Applicable Standards:

47 CFR FCC Part 15 Subpart C: 2015
ANSI C63.10:2013

AUDIX Technology Corp. tested the equipment mentioned in accordance with the requirements set forth in the above standards. Test results indicate that the equipment tested is capable of demonstrating compliance with the requirements as documented within this report. AUDIX Technology Corp. does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens and samples.

Date of Test: 2016. 08. 03~09. 02

Date of Report: 2016. 09. 07

Producer: Sabrina Wang
(Sabrina Wang / Administrator)

Signatory: Ben Cheng
(Ben Cheng / Manager)

1. REPORT HISTORY

Revision	Date	Revision Summary	Report Number
0	2016. 09. 07	Original Report.	EM-F160582

2. SUMMARY OF TEST RESULTS

Rule	Description	Results
15.207	Conducted Emission	PASS
15.225(a)(b)(c)	In-Band Emission	PASS
15.225(d)/15.209	Out-of-Band Emission	PASS
15.215 (c)	20dB Bandwidth	PASS
15.225(e)	Frequency Stability Tolerance	PASS

3. GENERAL INFORMATION

3.1. Description of EUT

Product	Personal Computer
Model No.	SKM-U mPC
Family Name	SKM-U mPC..... (The dots "." in the model name can be 0 to 9, A to Z, a-z, "-", "_", "\", "/" or blank, for marketing use only.)
Serial Number	N/A
Brand	ECS
Applicant	Elitegroup Computer Systems Co., Ltd. No. 239, Sec. 2., TiDing Blvd., Taipei, Taiwan 11493
Power Supply Rating	Refer to AC adapter rating.
RF Features	NFC (Reader)
Antenna Type	Loop antenna
Date of Receipt of Sample	2016. 07. 05
Interface Ports	Front Side: USB 3.1(Type A/BC1.2) Ports *1 USB 3.1(Type C) Ports *1 Audio Jack *1 Back Side: DC Jack *1 HDMI Port *1 RJ45 Port *1 USB 3.0 Ports *2 DP Port *1

3.2. EUT Specifications Assessed in Current Report

Fundamental Range (MHz)	Channel Number	Modulation
13.56	1	ASK

3.3. Descriptions of Key Components and Operating Modes

3.3.1. List of key components under test

Item	Supplier	Description	Character
Main Board	ECS	SKM-U	---
Chassis	Hunt key	mPC_L_TO_BO_WC_SPK	white
CPU (BGA1356)	Intel	i7-6650U	2.2 GHz
	Intel	i5-6260U	1.8 GHz
	Intel	i3-6100U	2.3 GHz
	Intel	3955U	2.0 GHz
Memory	ADATA	H5AN4G6NAFR-TFC	DDR4-2133MHz (2GB)
	Transcend	TS512MSH64V1H	DDR4-2133MHz (4GB)
	Transcend	TS1GSH64V1H	DDR4-2133MHz (8GB)
SSD	Transcend	TS32GMTS800	32GB, SATA III
	Transcend	TS128GMTS800	128GB, SATA III
	Transcend	TS256GMTS800	256GB, SATA III
ANTENNA (L)	VSO	S11-Black	Main, PIFA Antenna Black Antenna
ANTENNA (R)	VSO	S22-Gray	AUX, PIFA Antenna Gray Antenna
WLAN Combo Module	Intel	3165NGW	802.11a/b/g/n/ac+BT4.2+BLE
Wireless Charger Card (Option)	ECS	WCPTI-S(1.0)	---
NFC Module (Option)	ASTAG	RFM-ECS-8640	---
AC Adapter	FSP GROUP INC.	FSP065-10AABA	I/P: 100-240Vac, 50-60Hz, 1.5A. O/P: 19Vdc, 3.43A, 65W max
		AC: Wall-mount, 2C DC Power Cord: Unshielded, Undetachable, 1.8m	
	Asian Power Devices Inc.	WA-65B19R	I/P: 100-240Vac, 50-60Hz, 1.5A. O/P: 19Vdc, 3.43A, 65W max
		AC: Wall-mount, 2C DC Power Cord: Unshielded, Undetachable, 1.8m	
	Asian Power Devices Inc.	DA-90F19	I/P: 100-240Vac, 50-60Hz, 1.5A Max. O/P: 19Vdc, 4.74A (90W)
		AC Power Cord: Unshielded, Undetachable, 1.8m (2C) DC Power Cord: Unshielded, Undetachable, 1.8m (Bonded one ferrite core)	

Remark: For more detailed features description, please refer to the manufacturer's specifications or the user manual.

3.3.2. List of operating modes under test:

Item	Supplier	Model/Type	Description	Configuration Mode
Main Board	ECS	SKM-U	---	V
Chassis	Hunt key	mPC_L_TO_BO_WC_SPK	white	V
CPU (BGA1356)	Intel	i7-6650U	2.2 GHz	V
Memory	ADATA	H5AN4G6NAFR-TFC	DDR4-2133MHz (2GB)	V
SSD	Transcend	TS32GMTS800	32GB, SATA III	V
ANTENNA (L)	VSO	S11-Black	Main, PIFA Antenna	V
ANTENNA (R)	VSO	S22-Gray	AUX, PIFA Antenna	V
WLAN Combo Module	Intel	3165NGW	802.11 a/b/g/n/ac+BT 4.2+BLE	V
NFC Module	ASTAG	RFM-ECS-8640	---	V
AC Adapter	FSP	FSP065-10AABA	19Vdc, 3.43A, 65W max	V

3.4. Tested Supporting System List

3.4.1. Support Peripheral Unit


No.	Product	Brand	Model No.	Serial No.	FCC ID
1.	Power Socket	N/A	N/A	N/A	N/A

3.4.2. Cable Lists


No.	Cable Description Of The Above Support Units
1.	Power Cord: Unshielded, Detachable, 1.8m

3.5. Setup Configuration

3.5.1. EUT Configuration for Power Line and Radiated Emission



3.5.2. EUT Configuration for Conducted Test Items



3.6. Operating Condition of EUT

To Set EUT on RF function under continues transmitting.

3.7. Description of Test Facility

Test Firm Name	:	AUDIX Technology Corporation EMC Department No. 53-11, Dingfu, Linkou Dist., New Taipei City 244, Taiwan
Test Location & Facility	:	No. 7 Shielded Room & No. 1 Semi-Anechoic Chamber No. 53-11, Dingfu, Linkou Dist., New Taipei City 244, Taiwan
NVLAP Lab. Code	:	200077-0
TAF Accreditation No	:	1724
FCC OET Designation	:	TW1004 & TW1090

3.8. Measurement Uncertainty

Test Item	Frequency Range	Uncertainty
Conduction Test	150kHz~30MHz	± 3.5dB
Radiation Test (Distance: 3m)	30MHz~1000MHz	± 3.68dB
	Above 1GHz	± 5.82dB

Remark : Uncertainty = $ku_c(y)$

Test Item	Uncertainty
20dB Bandwidth	± 0.2kHz
Frequency Stability	±0.78ppm

4. MEASUREMENT EQUIPMENT LIST

4.1. Conducted Emission Measurement

Item	Type	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due
1.	Test Receiver	R&S	ESCI	101276	2016. 03. 31	2017. 03. 30
2.	A.M.N.	R&S	ESH3-Z5	861189/008	2015. 12. 02	2016. 12. 01
3.	L.I.S.N.	Kyoritsu	KNW-407	8-881-13	2016. 01. 17	2017. 01. 16
4.	Pulse Limiter	R&S	ESH3-Z2	101495	2016. 01. 17	2017. 01. 16
5.	Test Software	Audix	e3	V.120619C	N.C.R.	N.C.R.

4.2. Radiated Emission Measurement

4.2.1. Frequency Range 9kHz~30MHz (No.1 Semi-Anechoic Chamber)

Item	Type	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due
1.	Spectrum Analyzer	Agilent	N9010A-526	MY53400071	2015. 09. 14	2016. 09. 13
2.	Test Receiver	R & S	ESCS30	100338	2016. 06. 22	2017. 06. 21
3.	Loop Antenna	R&S	HFH2-Z2	891847/27	2015. 12. 24	2016. 12. 23
4.	Test Software	Audix	e3	V.6.110601	N.C.R.	N.C.R.

4.2.2. Frequency Range 30MHz~1000MHz (No.1 Semi-Anechoic Chamber)


Item	Type	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due
1.	Spectrum Analyzer	Agilent	N9010A-526	MY53400071	2015. 09. 14	2016. 09. 13
2.	Test Receiver	R & S	ESCS30	100338	2016. 06. 22	2017. 06. 21
3.	Amplifier	HP	8447D	2944A06305	2016. 02. 23	2017. 02. 22
4.	Bilog Antenna	CHASE	CBL6112D	33821	2016. 01. 30	2017. 01.29
5.	Test Software	Audix	e3	V.6.110601	N.C.R.	N.C.R.

4.3. RF Conducted Measurement

Item	Type	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due
1.	Spectrum Analyzer	Agilent	N9030A-544	US51350140	2016. 06. 07	2017. 06. 06
2.	Programmable Temperature & Humidity Chamber	GIANT	GTH-150-40-CP-AR	MAA1505-008	2016. 05. 11	2017. 05. 10
3.	Transformer	TAILI	TL-220	N/A	N.C.R.	N.C.R.

5. CONDUCTED EMISSION MEASUREMENT

5.1. Block Diagram of Test Setup

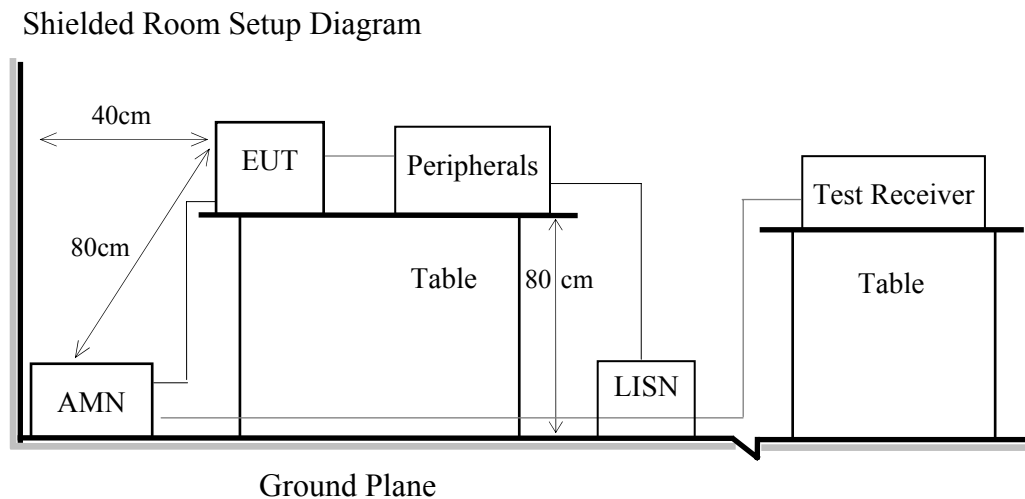

5.2. Power Line Conducted Emission Limit

Frequency	Conducted Limit	
	Quasi-Peak Level	Average Level
150kHz ~ 500kHz	66 ~ 56 dB μ V	56 ~ 46 dB μ V
500kHz ~ 5MHz	56 dB μ V	46 dB μ V
5MHz ~ 30MHz	60 dB μ V	50 dB μ V

Remark 1.: If the average limit is met when using a Quasi-Peak detector, the measurement using the average detector is not required.

2.: The lower limit applies to the band edges.


5.3. Test Procedure

- 5.3.1. To set up the EUT as indicated in ANSI C 63.10 The EUT was placed on the table which has 80 cm height to the ground and 40 cm distance to the conducting wall.
- 5.3.2. Power supplier of the EUT was connected to the AC mains through an Artificial Mains Network (A.M.N.).
- 5.3.3. The AC power supplies to all peripheral devices must be provided through line impedance stabilization network (L.I.S.N.)
- 5.3.4. Checking frequency range from 150 kHz to 30 MHz and record the emission which does not have 20 dB below limit.

5.4. Conducted Emission Measurement Results

PASSED.

Test Date	2016/09/02	Temp./Hum.	26 /60%
Test Voltage	AC 120V/60Hz (Via AC Adapter)		

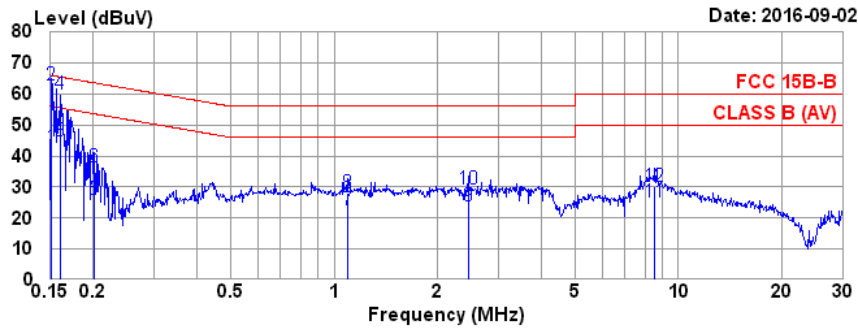


Site no. : No.7 Shielded Room Data no. : 4
 Condition : ESH3-Z5 861189/008 Phase : NEUTRAL
 Limit : FCC 15B-B
 Env. / Ins. : 26*C / 60% ESCI (1276) Engineer : Nick Du
 EUT : SKM-U mPC
 Power Rating : 120Vac/60Hz
 Test Mode : Operating

	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.151	0.10	0.03	9.85	32.95	42.93	55.96	13.03	Average
2	0.151	0.10	0.03	9.85	53.06	63.04	65.96	2.92	QP
3	0.161	0.10	0.03	9.85	34.87	44.85	55.43	10.58	Average
4	0.161	0.10	0.03	9.85	50.12	60.10	65.43	5.33	QP
5	0.202	0.12	0.04	9.85	16.03	26.04	53.54	27.50	Average
6	0.202	0.12	0.04	9.85	26.60	36.61	63.54	26.93	QP
7	1.094	0.18	0.06	9.91	12.62	22.77	46.00	23.23	Average
8	1.094	0.18	0.06	9.91	18.08	28.23	56.00	27.77	QP
9	2.448	0.20	0.08	9.94	13.84	24.06	46.00	21.94	Average
10	2.448	0.20	0.08	9.94	19.28	29.50	56.00	26.50	QP
11	8.546	0.48	0.16	9.87	14.53	25.04	50.00	24.96	Average
12	8.546	0.48	0.16	9.87	19.76	30.27	60.00	29.73	QP

Remarks: 1. Emission Level= AMN Factor + Cable Loss + Pulse Att. + Reading.

Test Date	2016/09/02	Temp./Hum.	26 /60%
Test Voltage	AC 120V/60Hz (Via AC Adapter)		

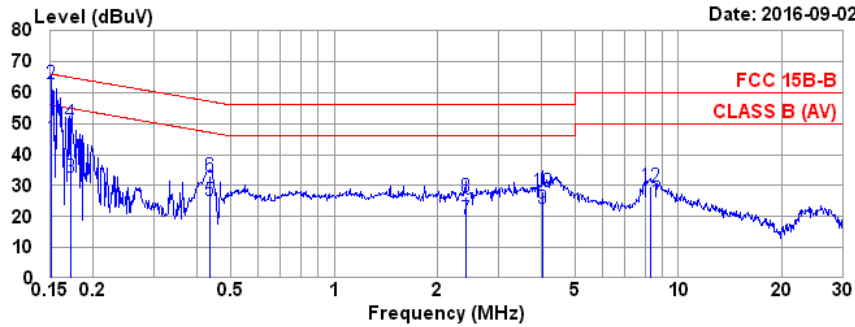

Site no. : No.7 Shielded Room Data no. : 3
 Condition : ESH3-Z5 861189/008 Phase : LINE
 Limit : FCC 15B-B
 Env. / Ins. : 26°C / 60% ESCI (1276) Engineer : Nick Du
 EUT : SKM-U mPC
 Power Rating : 120Vac/60Hz
 Test Mode : Operating

	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.151	0.16	0.03	9.85	35.14	45.18	55.96	10.78	Average
2	0.151	0.16	0.03	9.85	52.97	63.01	65.96	2.95	QP
3	0.172	0.15	0.03	9.85	22.55	32.58	54.86	22.28	Average
4	0.172	0.15	0.03	9.85	40.16	50.19	64.86	14.67	QP
5	0.435	0.16	0.04	9.85	14.96	25.01	47.15	22.14	Average
6	0.435	0.16	0.04	9.85	23.24	33.29	57.15	23.86	QP
7	2.409	0.21	0.08	9.94	8.87	19.10	46.00	26.90	Average
8	2.409	0.21	0.08	9.94	15.99	26.22	56.00	29.78	QP
9	4.027	0.31	0.11	9.88	12.13	22.43	46.00	23.57	Average
10	4.027	0.31	0.11	9.88	17.69	27.99	56.00	28.01	QP
11	8.323	0.56	0.16	9.87	14.20	24.79	50.00	25.21	Average
12	8.323	0.56	0.16	9.87	19.10	29.69	60.00	30.31	QP

Remarks: 1. Emission Level= AMN Factor + Cable Loss + Pulse Att. + Reading.


6. RADIATED SPURIOUS EMISSION MEASUREMENT (IN-BAND)

6.1. Block Diagram of Test Setup

6.1.1. Block Diagram of EUT

Indicated as section 3.5

6.1.2. Setup Diagram for 9kHz-30MHz

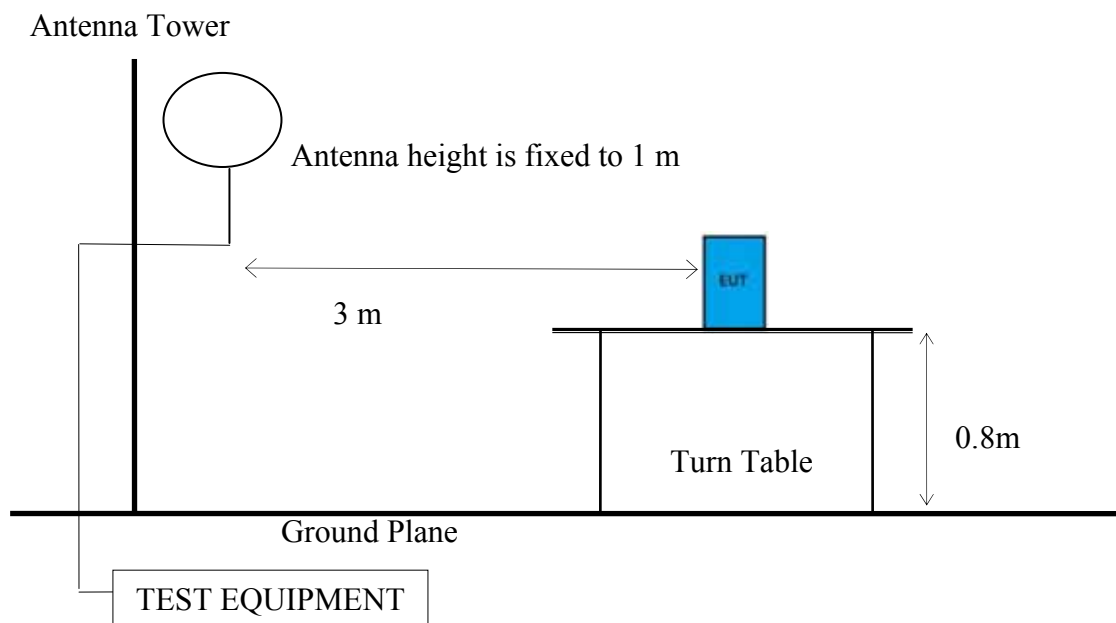

6.2. IN-Band Radiated Spurious Emission Limits

Frequency (MHz)	Distance (m)	Limits	
		$\mu\text{V/m}$	$\text{dB}\mu\text{V/m}$
13.553-13.567	30	15848	84
	3	1584893	124
13.410 -13.553 and 13.567-13.710	30	334	50.50
	3	33381	90.50
13.110 -13.410 and 13.710-14.010	30	106	40.5
	3	10592	80.50

Remark : (1) $\text{dB}\mu\text{V/m} = 20 \log (\mu\text{V/m})$

$$(2) 15848\mu\text{V/m} = 84\text{dB}\mu\text{V/m} = 84 + 40\log(30\text{m}/3\text{m}) = 124\text{dB}\mu\text{V/m}$$

$$334\mu\text{V/m} = 50.5\text{dB}\mu\text{V/m} = 50.5 + 40\log(30\text{m}/3\text{m}) = 90.5\text{dB}\mu\text{V/m}$$

$$106\mu\text{V/m} = 40.5\text{dB}\mu\text{V/m} = 40.5 + 40\log(30\text{m}/3\text{m}) = 80.5\text{dB}\mu\text{V/m}$$

6.3. Test Procedure

The EUT setup on the turn table which has 0.8 m height to the ground. The turn table rotated 360 degrees and antenna fixed to 2 m to find the maximum emission level. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.4-2013 regulation.

Below 30MHz:

(1) RBW = 9kHz with peak and average detector.

(2) Detector: average and peak (10kHz-490kHz)

Q.P. (490kHz-30MHz)

6.4. Test Results

PASSED.

Test Date	2016/08/03	Temp./Hum.	24 /56%
Test Voltage	AC 120V/60Hz (Via AC Adapter)		

Antenna at 0 Degree

Test Frequency (MHz)	Test Result (dB μ V/m at 3m)	Limits (dB μ V/m at 3m)	Margin (dB)	Detector
13.560	41.50	123.99	82.49	Peak

Antenna at 90 Degree

Test Frequency (MHz)	Test Result (dB μ V/m at 3m)	Limits (dB μ V/m at 3m)	Margin (dB)	Detector
13.560	36.20	123.99	87.79	Peak

Note: All emissions are lower than the ambient level cannot be measured.


7. RADIATED SPURIOUS EMISSION MEASUREMENT (OUT-BAND)

7.1. Block Diagram of Test Setup

7.1.1. Block Diagram of EUT

Indicated as section 3.5

7.1.2. Setup Diagram for 30MHz-1000MHz

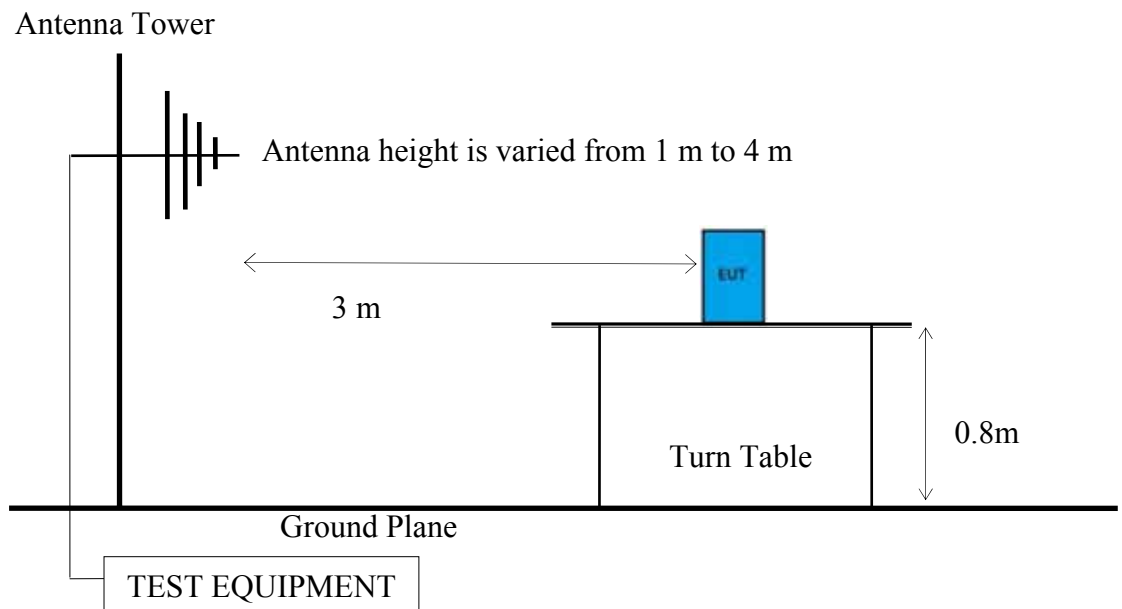

7.2. Out-Band Radiated Spurious Emission Limits

In any 100kHz bandwidth outside the frequency band, the radio frequency power produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level. In addition, radiated emissions which fall in restricted bands, as defined in Section 15.205, must also comply with the radiated emission limits specified as below.

Frequency (MHz)	Distance (m)	Field Strengths Limits	
		$\mu\text{V/m}$	$\text{dB}\mu\text{V/m}$
1.705 ~ 30	30 (3)	30 (2985)	29.54 (69.54)
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
Above 960	3	500	54.0
Above 1000	3	74.0 $\text{dB}\mu\text{V/m}$ (Peak) 54.0 $\text{dB}\mu\text{V/m}$ (Average)	

Remark : (1) $\text{dB}\mu\text{V/m} = 20 \log (\mu\text{V/m})$

- (2) The tighter limit applies to the edge between two frequency bands.
- (3) Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.
- (4) Fundamental and emission fall within operation band are exempted from this section.
- (5) Pursuant to ANSI C63.10: 6.6.4.3, if the maximized peak measured value complies with the average limit, then it is unnecessary to perform an average measurement.

7.3. Test Procedure

The EUT setup on the turn table which has 0.8 m height to the ground. The turn table rotated 360 degrees and antenna varied from 1 m to 4 m to find the maximum emission level. Both horizontal and vertical polarization are required. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10: 2013 regulation.

Spectrum Analyzer is used for pre-testing with following setting:

- (1) RBW = 120KHz
- (2) VBW $\geq 3 \times$ RBW.
- (3) Detector = Peak.
- (4) Sweep time = auto.
- (5) Trace mode = max hold.
- (6) Allow sweeps to continue until the trace stabilizes.
- (7) When peak-detected value is lower than limit that the measurement using the Q.P. detector is not required. Otherwise using Q.P. for finally measurement.

7.4. Measurement Result Explanation

Emission Level=Antenna Factor + Cable Loss + Meter Reading

7.5. Test Results

PASSED.

Test Date	2016/08/03	Temp./Hum.	24 /56%
Test Voltage	AC 120V/60Hz (Via AC Adapter)		

7.5.1. Emissions within Restricted Frequency Bands

7.5.1.1. Frequency Range 9kHz~30MHz

Antenna at 0 Degree

Test Frequency (MHz)	Test Result (dB μ V/m at 3m)	Limits (dB μ V/m at 3m)	Margin (dB)	Detector
27.12	--- ^{Note}	69.54	---	Peak

Antenna at 90 Degree

Test Frequency (MHz)	Test Result (dB μ V/m at 3m)	Limits (dB μ V/m at 3m)	Margin (dB)	Detector
27.12	--- ^{Note}	69.54	---	Peak

Note: All emissions are lower than the ambient level cannot be measured.

7.5.1.2. Frequency Range 30MHz ~ 1000MHz

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
30.97	20.57	1.22	2.15	23.94	40.00	16.06	Peak
122.15	12.97	2.53	9.00	24.50	43.50	19.00	Peak
159.98	10.76	2.93	10.98	24.67	43.50	18.83	Peak
278.32	13.34	4.10	8.94	26.38	46.00	19.62	Peak
577.08	18.14	6.68	1.94	26.76	46.00	19.24	Peak
901.06	20.44	8.17	2.25	30.86	46.00	15.14	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
41.64	14.04	1.43	14.97	30.44	40.00	9.56	Peak
122.15	12.97	2.53	12.60	28.10	43.50	15.40	Peak
163.86	10.45	2.97	18.13	31.55	43.50	11.95	Peak
278.32	13.34	4.10	6.72	24.16	46.00	21.84	Peak
354.95	15.05	5.04	3.88	23.97	46.00	22.03	Peak

8. 20dB BANDWIDTH MEASUREMENT

8.1. Block Diagram of Test Setup

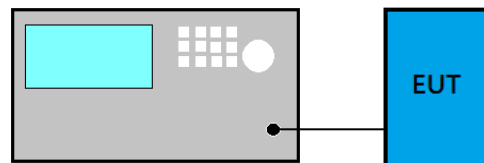

8.2. Specification Limits

The 20dB bandwidth shall be specified in operating frequency band.

8.3. Test Procedure

Following measurement procedure is reference to KDB 558074 D01 DTS Meas Guidance v03r02:

Option 2

- (1) Set RBW = 1% of Span.
- (2) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- (3) Detector = Peak.
- (4) Trace mode = max hold.
- (5) Sweep = auto couple.
- (6) Allow the trace to stabilize.
- (7) Setting channel bandwidth function x dB to -20 dB to record the final bandwidth.


8.4. Test Results

Test Date	2016/07/24	Temp./Hum.	24 /50%
Cable Loss	---	Test Voltage	AC 120V/60Hz (Via AC Adapter)

8.4.1. 20dB Bandwidth Result


Centre Frequency (MHz)	20 dB Bandwidth (kHz)
13.56	0.456

8.4.2. Measurement Plots

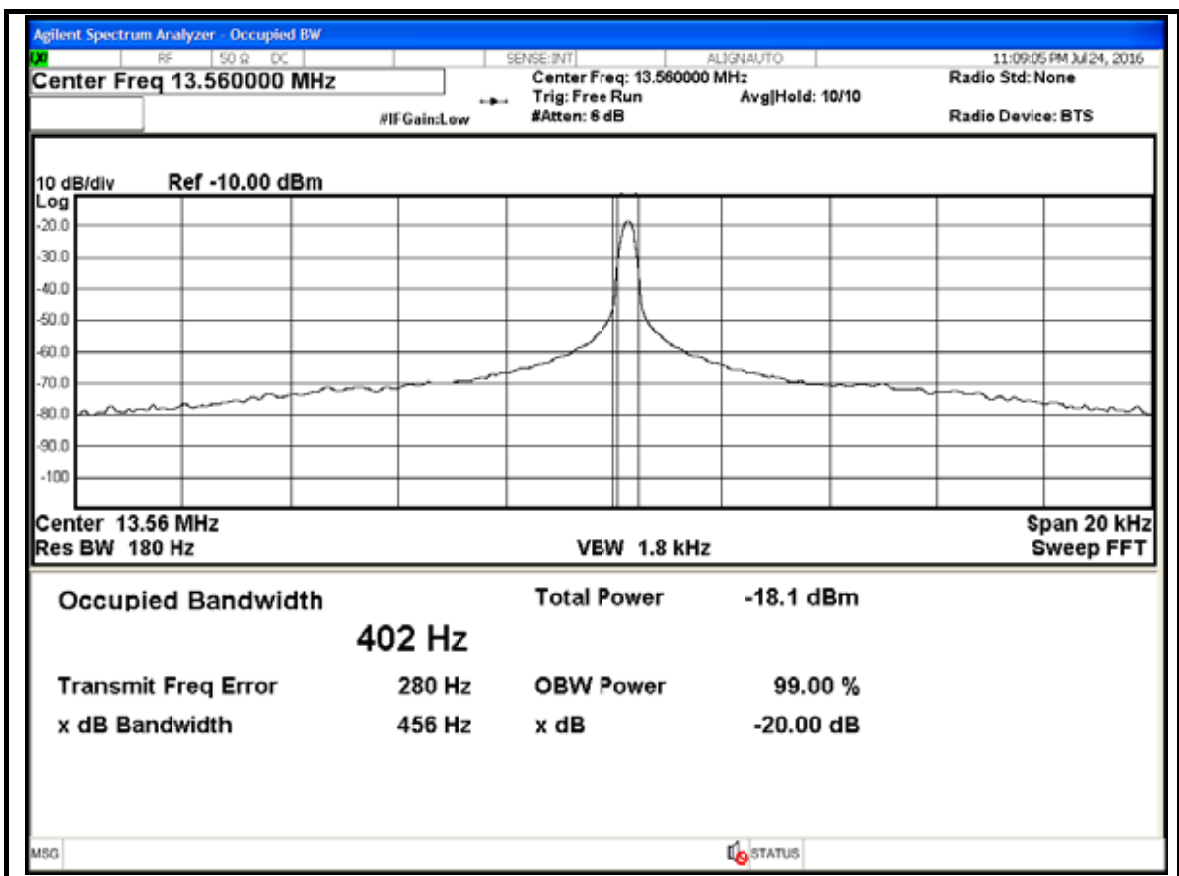

9. FREQUENCY STABILITY MEASUREMENT

9.1. Block Diagram of Test Setup

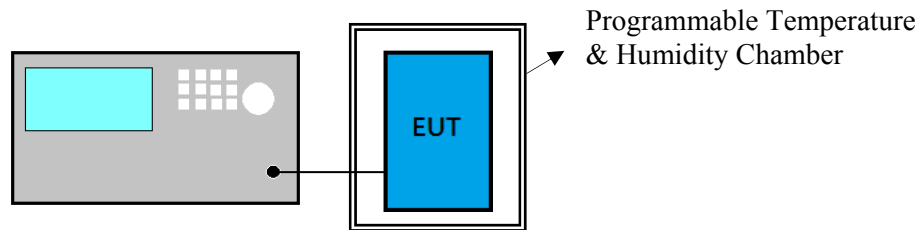

9.2. Specification Limits

The frequency tolerance of the carrier signal shall be maintained within $\pm 0.01\%$ of the operating frequency over a temperature variation of -20 degrees to 50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degree C.

9.3. Test Procedure

The device operating in the 13.553 - 13.567 MHz shall maintain the carrier frequency within 0.01% of the operating frequency over the temperature variation of -20 degrees to $+50$ degree C at normal supply voltage.

9.4. Test Results

Test Date	2016/07/24	Temp./Hum.	25 /62%
Cable Loss	---	Test Voltage	AC 120V/60Hz (Via AC Adapter)

Test Mode: 2 Minute

Temperature()	-20	-10	0	10	20
Voltage	AC 120V	AC 120V	AC 120V	AC 120V	AC 138V
Frequency(MHz)	13.55895	13.55902	13.55929	13.55975	13.56024
Error (%)	-0.00774	0.00723	-0.00524	-0.00184	0.00177

Temperature()	20	30	40	50	20
Voltage	AC 102V	AC 120V	AC 120V	AC 120V	AC 120V
Frequency(MHz)	13.55988	13.56035	13.56061	13.56092	13.56013
Error (%)	-0.00088	0.00258	0.00450	0.00678	0.00096

Test Mode: 5 Minute

Temperature()	-20	-10	0	10	20
Voltage	AC 120V	AC 120V	AC 120V	AC 120V	AC 138V
Frequency(MHz)	13.55928	13.55952	13.55975	13.55986	13.56038
Error (%)	-0.00531	-0.00354	-0.00184	-0.00103	0.00280

Temperature()	20	30	40	50	20
Voltage	AC 102V	AC 120V	AC 120V	AC 120V	AC 120V
Frequency(MHz)	13.56011	13.56025	13.56038	13.56049	13.56015
Error (%)	0.00081	0.00184	0.00280	0.00361	0.00111

Test Mode: 10 Minute

Temperature()	-20	-10	0	10	20
Voltage	AC 120V	AC 120V	AC 120V	AC 120V	AC 138V
Frequency(MHz)	13.55894	13.55916	13.55937	13.55943	13.55968
Error (%)	-0.00782	-0.00619	-0.00465	-0.00420	-0.00236

Temperature()	20	30	40	50	20
Voltage	AC 102V	AC 120V	AC 120V	AC 120V	AC 120V
Frequency(MHz)	13.55972	13.56014	13.56023	13.56029	13.55978
Error (%)	-0.00206	0.00103	0.00170	0.00214	-0.00162

10. DEVIATION TO TEST SPECIFICATIONS

【NONE】