



## A.5 EMISSION LIMITATIONS MEASUREMENT

Test Date	2016/03/01	Temp./Hum.	25°C/55%
Mode	802.11a	UNII Band	I
		Frequency	TX 5180MHz
Cable Loss	4dB	Test Voltage	AC 120V, 60Hz (with Docking via AC Adapter)
Simultaneous Factor 10 log(n) (Note: "n" is antenna number)		3	



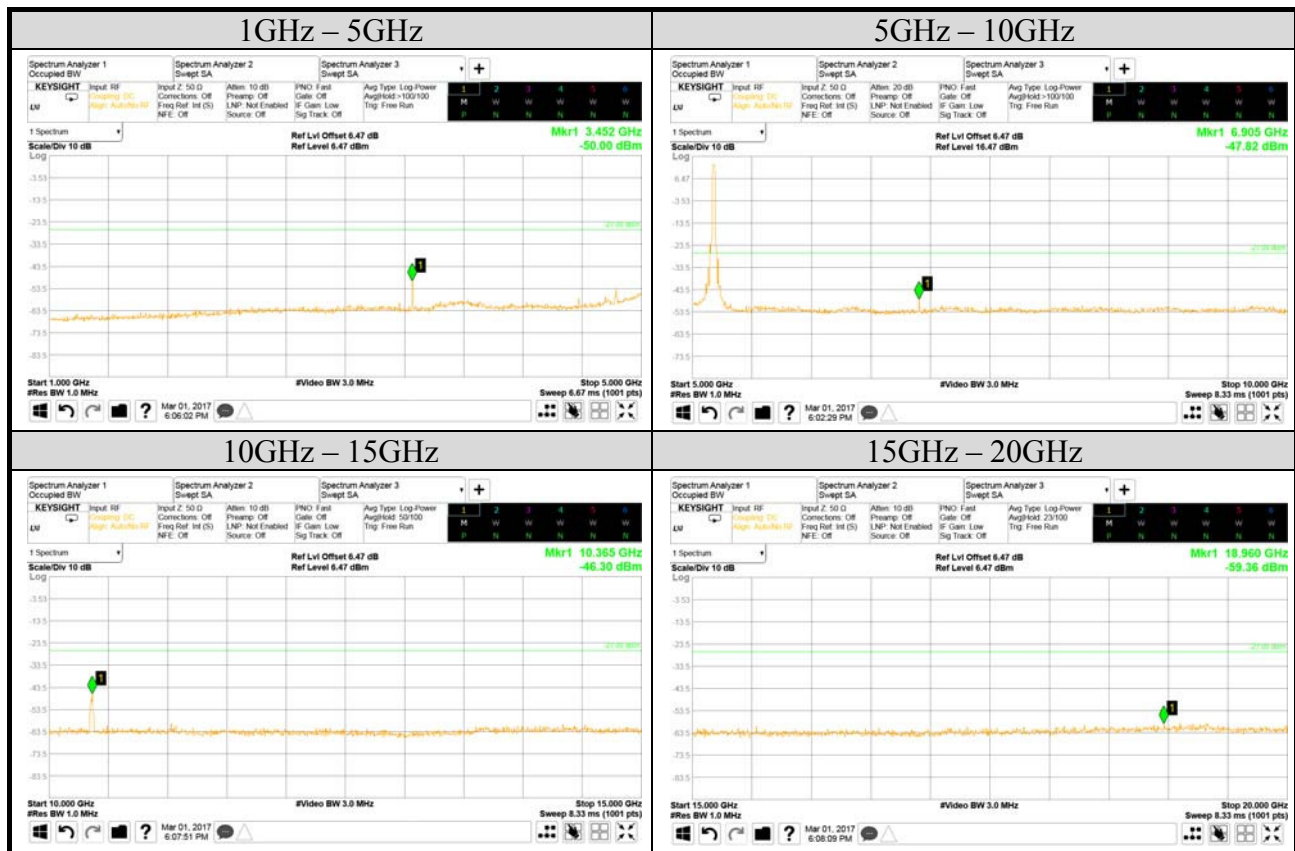

Test Date	2016/03/01	Temp./Hum.	25°C/55%
Mode	802.11a	UNII Band	I
		Frequency	TX 5200MHz
Cable Loss	4dB	Test Voltage	AC 120V, 60Hz (with Docking via AC Adapter)
Simultaneous Factor 10 log(n) (Note: "n" is antenna number)		3	

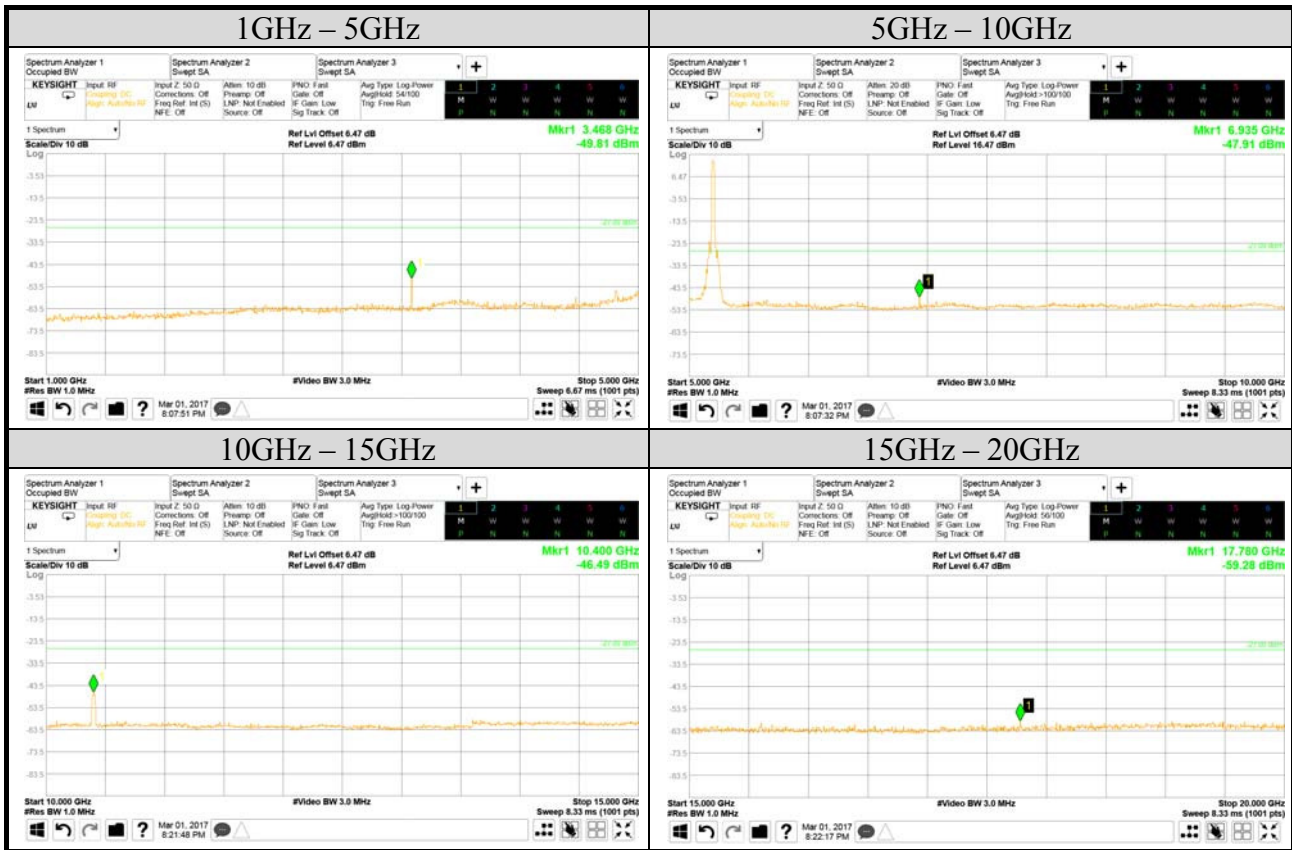



Test Date	2017/03/01	Temp./Hum.	25°C/55%
Mode	802.11a	UNII Band	I
		Frequency	TX 5240MHz
Cable Loss	4dB	Test Voltage	AC 120V, 60Hz (with Docking via AC Adapter)
Simultaneous Factor 10 log(n) (Note: "n" is antenna number)		3	





Test Date	2017/03/02	Temp./Hum.	24°C/56%
Mode	802.11a	UNII Band	II-2A
		Frequency	TX 5260MHz
Cable Loss	4dB	Test Voltage	AC 120V, 60Hz (with Docking via AC Adapter)
Simultaneous Factor 10 log(n) (Note: "n" is antenna number)		3	







Test Date	2017/03/02	Temp./Hum.	24°C/56%
Mode	802.11a	UNII Band	II-2A
		Frequency	TX 5300MHz
Cable Loss	4dB	Test Voltage	AC 120V, 60Hz (with Docking via AC Adapter)
Simultaneous Factor 10 log(n) (Note: "n" is antenna number)		3	





**AUDIX Technology Corp.**  
 No. 53-11, Dingfu, Linkou, Dist.,  
 New Taipei City 244, Taiwan


Tel: +886 2 26099301  
 Fax: +886 2 26099303

Test Date	2017/03/02	Temp./Hum.	24°C/56%
Mode	802.11a	UNII Band	II-2A
		Frequency	TX 5320MHz
Cable Loss	4dB	Test Voltage	AC 120V, 60Hz (with Docking via AC Adapter)
Simultaneous Factor 10 log(n) (Note: "n" is antenna number)		3	





Test Date	2017/03/02	Temp./Hum.	24°C/56%
Mode	802.11a	UNII Band	II-2C
		Frequency	TX 5500MHz
Cable Loss	4dB	Test Voltage	AC 120V, 60Hz (with Docking via AC Adapter)
Simultaneous Factor 10 log(n) (Note: "n" is antenna number)		3	

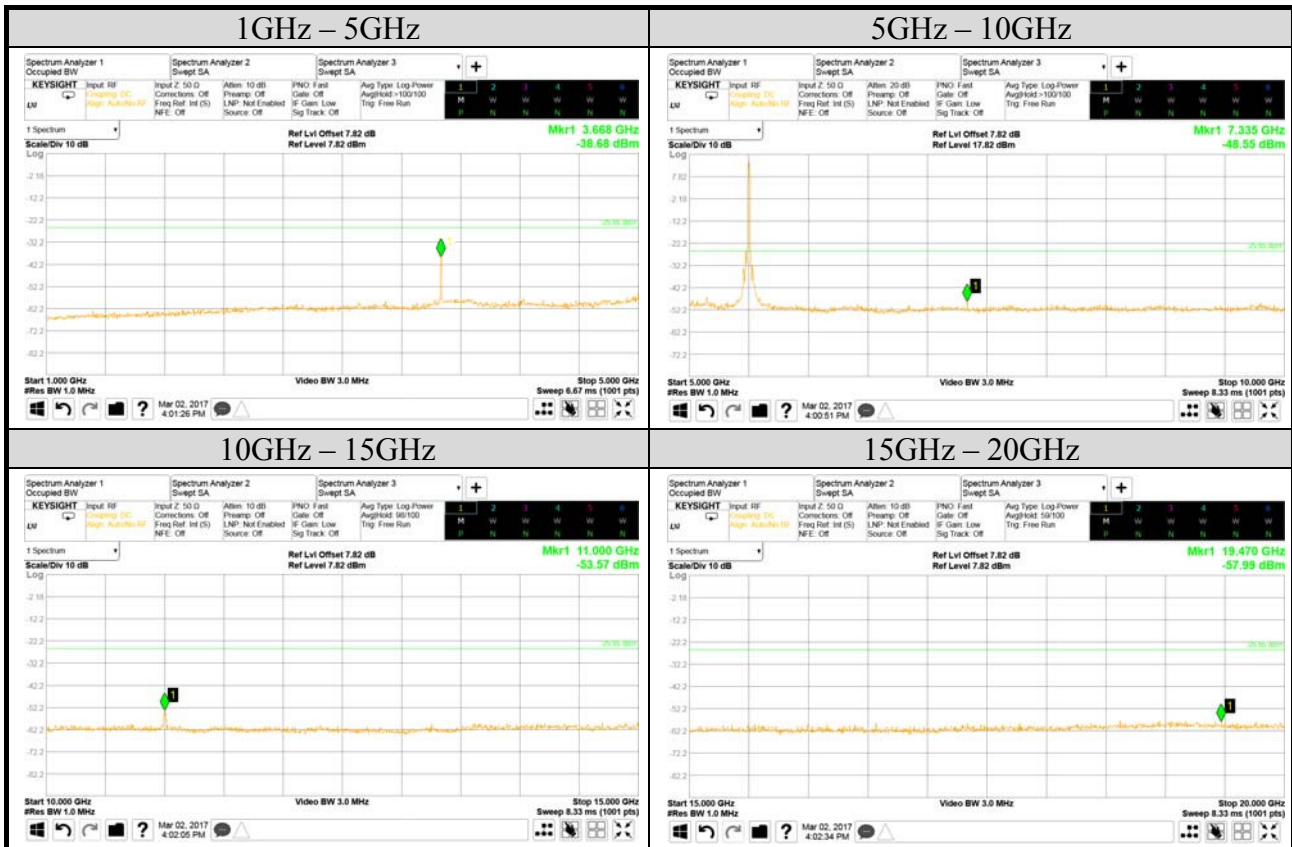



Test Date	2017/03/09	Temp./Hum.	24°C/56%
Mode	802.11a	UNII Band	II-2C
		Frequency	TX 5600MHz
Cable Loss	4dB	Test Voltage	AC 120V, 60Hz (with Docking via AC Adapter)
Simultaneous Factor 10 log(n) (Note: "n" is antenna number)		3	







Test Date	2017/03/09	Temp./Hum.	24°C/56%
Mode	802.11a	UNII Band	II-2C
		Frequency	TX 5700MHz
Cable Loss	3.4dB	Test Voltage	AC 120V, 60Hz (with Docking via AC Adapter)
Simultaneous Factor 10 log(n) (Note: “n” is antenna number)		3	





Test Date	2017/03/02	Temp./Hum.	24°C/56%
Mode	802.11a	UNII Band	II-2C
		Frequency	TX 5720MHz
Cable Loss	4dB	Test Voltage	AC 120V, 60Hz (with Docking via AC Adapter)
Simultaneous Factor 10 log(n) (Note: "n" is antenna number)		3	







**AUDIX Technology Corp.**  
 No. 53-11, Dingfu, Linkou, Dist.,  
 New Taipei City 244, Taiwan


Tel: +886 2 26099301  
 Fax: +886 2 26099303

Test Date	2017/03/02	Temp./Hum.	24°C/56%
Mode	802.11a	UNII Band	III
		Frequency	TX 5745MHz
Cable Loss	4dB	Test Voltage	AC 120V, 60Hz (with Docking via AC Adapter)
Simultaneous Factor 10 log(n) (Note: "n" is antenna number)		3	

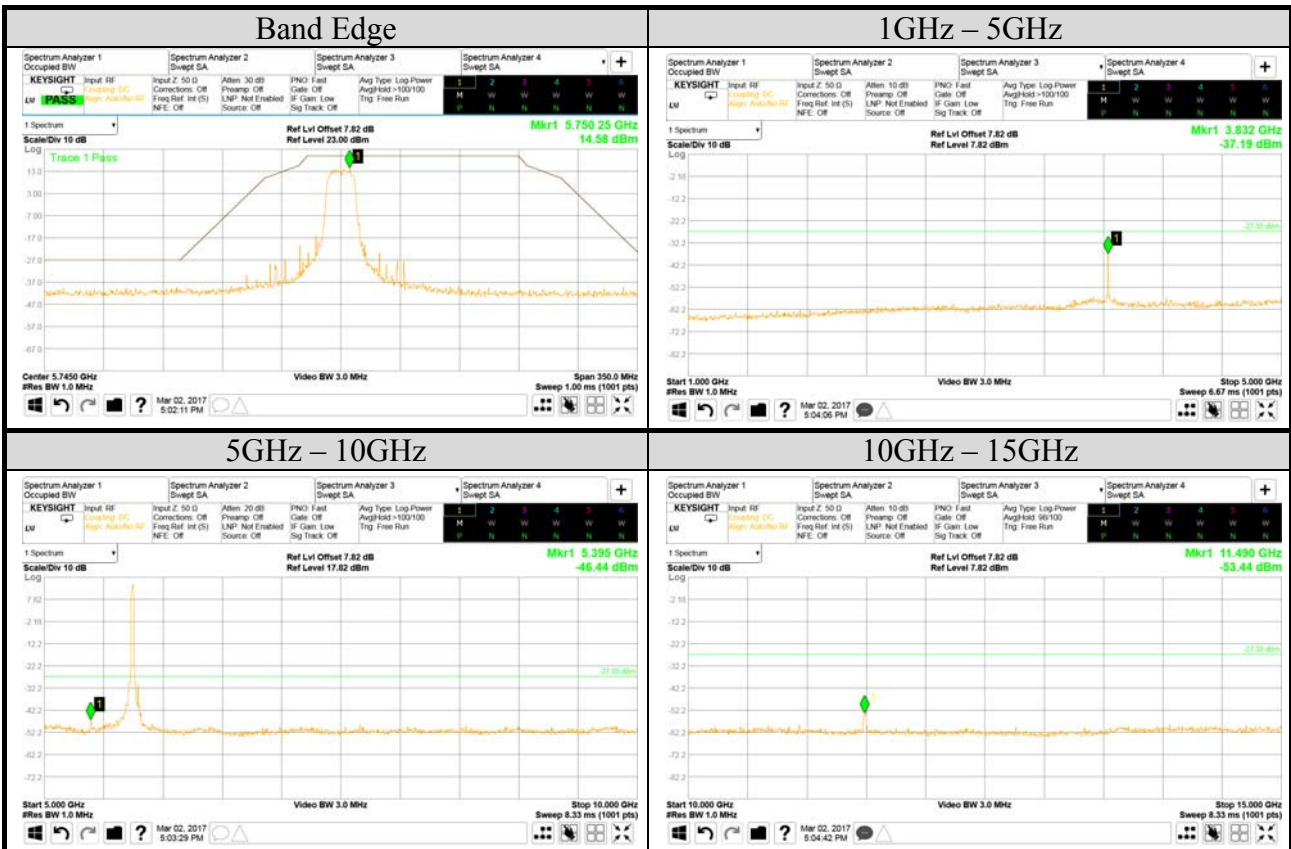

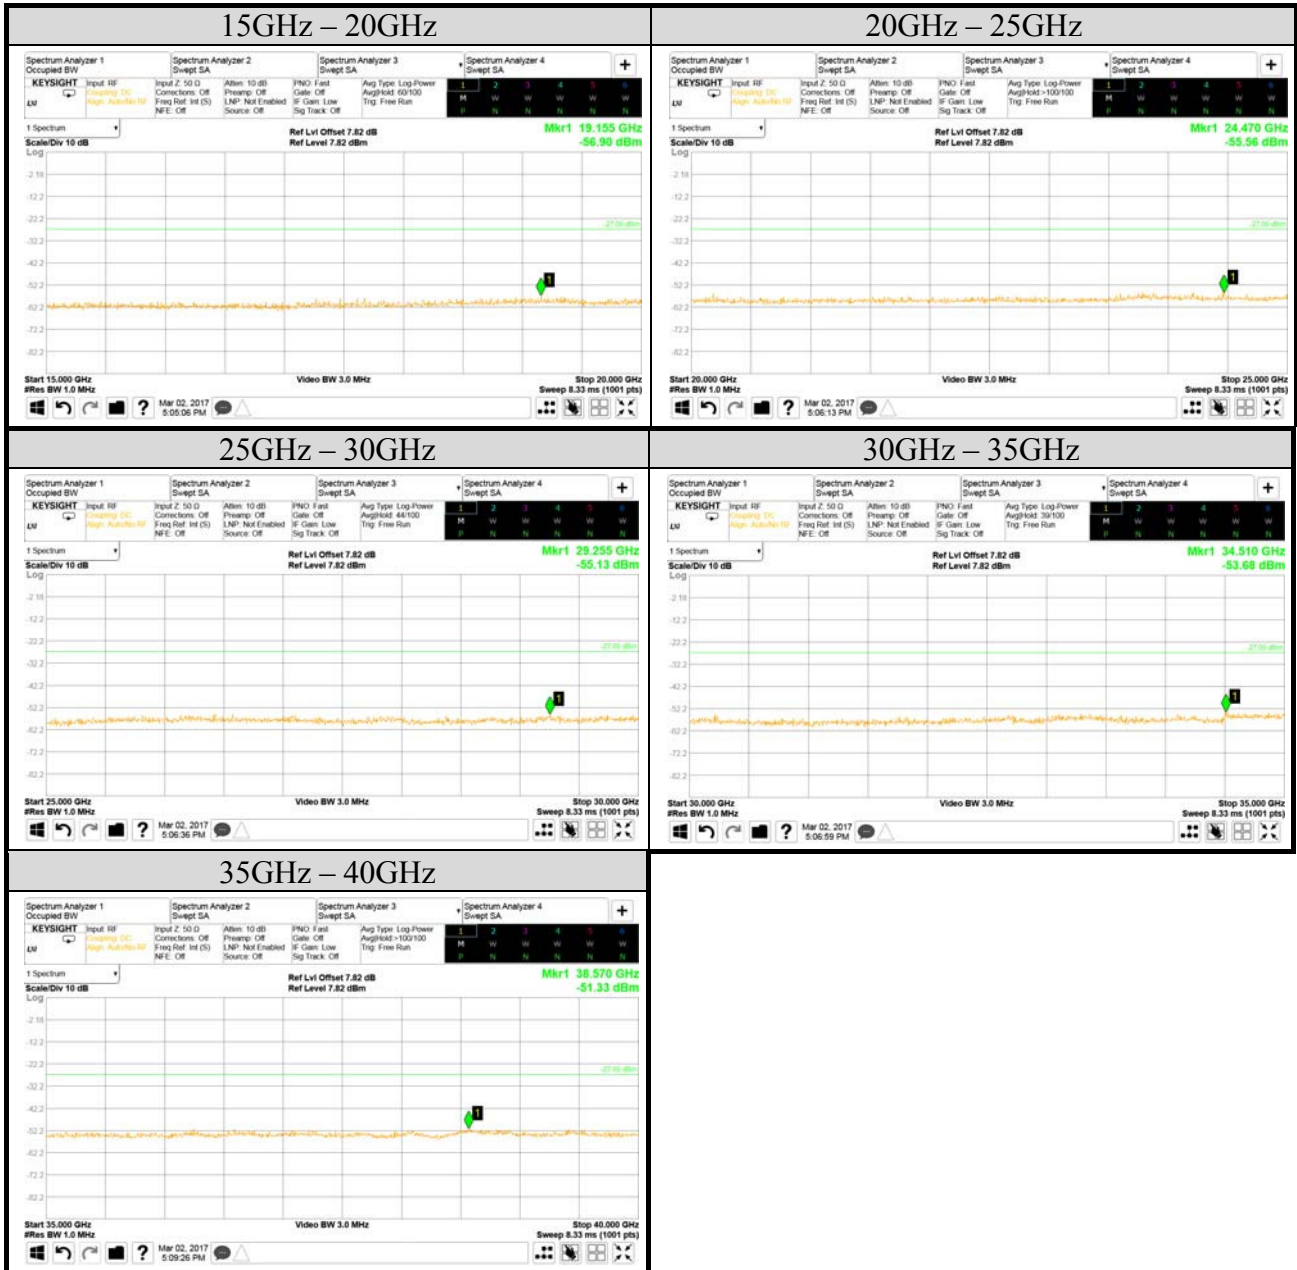

Test Date	2017/03/02	Temp./Hum.	24°C/56%
Mode	802.11a	UNII Band	III
		Frequency	TX 5785MHz
Cable Loss	4dB	Test Voltage	AC 120V, 60Hz (with Docking via AC Adapter)
Simultaneous Factor 10 log(n) (Note: "n" is antenna number)		3	

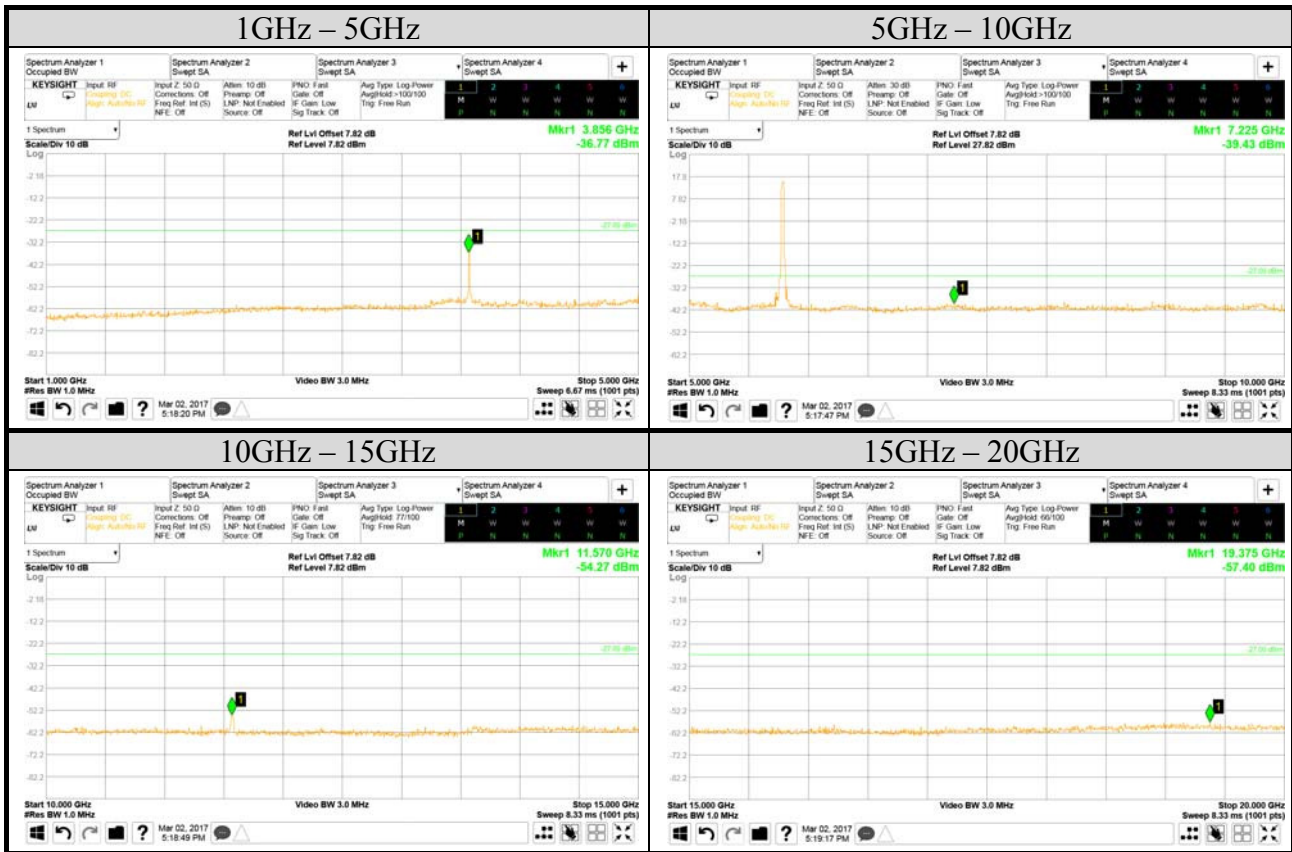






**AUDIX Technology Corp.**  
 No. 53-11, Dingfu, Linkou, Dist.,  
 New Taipei City244, Taiwan

Tel: +886 2 26099301  
 Fax: +886 2 26099303

Test Date	2017/03/02	Temp./Hum.	24°C/56%
Mode	802.11a	UNII Band	III
		Frequency	TX 5825MHz
Cable Loss	4dB	Test Voltage	AC 120V, 60Hz (with Docking via AC Adapter)
Simultaneous Factor 10 log(n) (Note: “n” is antenna number)		3	

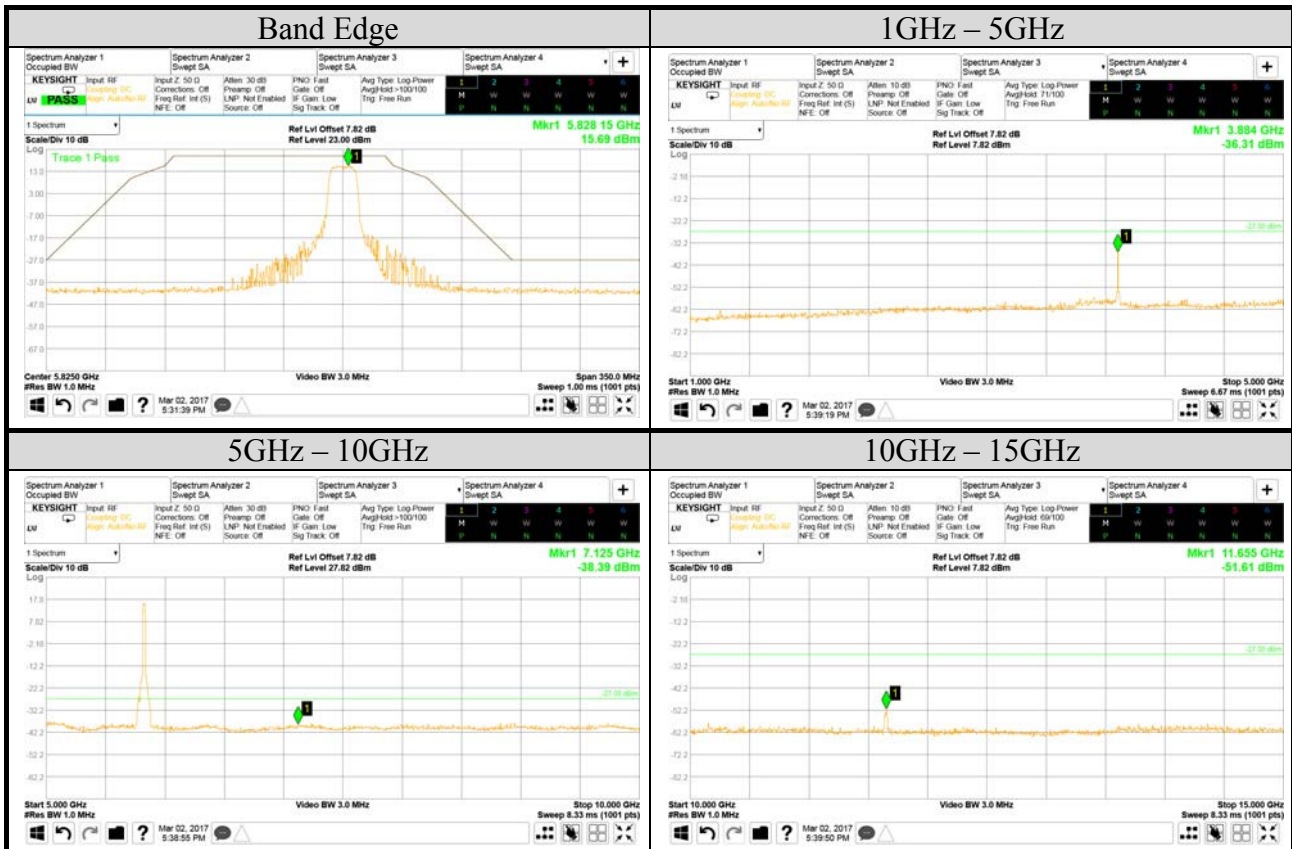



Test Date	2017/03/02	Temp./Hum.	24°C/56%
Mode	802.11ac-VHT20	UNII Band	I
		Frequency	TX 5180MHz
Cable Loss	4dB	Test Voltage	AC 120V, 60Hz (with Docking via AC Adapter)
Simultaneous Factor 10 log(n) (Note: "n" is antenna number)		3	





Test Date	2017/03/02	Temp./Hum.	24°C/56%
Mode	802.11ac-VHT20	UNII Band	I
		Frequency	TX 5200MHz
Cable Loss	4dB	Test Voltage	AC 120V, 60Hz (with Docking via AC Adapter)
Simultaneous Factor 10 log(n) (Note: "n" is antenna number)		3	





Test Date	2017/03/02	Temp./Hum.	24°C/56%
Mode	802.11ac-VHT20	UNII Band	I
		Frequency	TX 5240MHz
Cable Loss	4dB	Test Voltage	AC 120V, 60Hz (with Docking via AC Adapter)
Simultaneous Factor 10 log(n) (Note: "n" is antenna number)		3	



