

FCC 2.1093 SAR Report

for

Elitegroup Computer Systems Co., Ltd.

**No. 239, Sec. 2, Ti Ding Blvd,
Taipei, Taiwan 11493**

Product Name : 7" Multi Function Pad
Model Name : mPAD2-7.....
Brand : ECS
FCC ID : WL6TC7A-W

**Prepared by: : AUDIX Technology Corporation,
EMC Department**



TABLE OF CONTENTS

| Description | Page |
|---|-----------|
| TEST REPORT CERTIFICATION..... | 4 |
| 1. REVISION RECORD OF TEST REPORT..... | 4 |
| 2. SUMMARY OF TEST RESULTS..... | 5 |
| 3. GENERAL INFORMATION..... | 6 |
| 3.1. Description of Application..... | 6 |
| 3.2. Description of EUT..... | 7 |
| 3.3. EUT Specifications Assessed in Current Report..... | 8 |
| 3.4. Antenna Information..... | 10 |
| 3.5. Description of Key Components..... | 11 |
| 3.6. Test Environment..... | 13 |
| 3.7. Description of Test Facility..... | 13 |
| 3.8. Measurement Uncertainty..... | 14 |
| 4. MEASUREMENT EQUIPMENT LIST..... | 15 |
| 5. SAR MEASUREMENT SYSTEM..... | 16 |
| 5.1. Definition of Specific Absorption Rate (SAR)..... | 16 |
| 5.2. SPEAG DASY System..... | 16 |
| 5.3. SAR System Verification..... | 24 |
| 5.4. SAR Measurement Procedure..... | 30 |
| 6. SAR MEASUREMENT EVALUATION..... | 33 |
| 6.1. EUT Configuration and Setting..... | 33 |
| 6.2. EUT Testing Position..... | 34 |
| 6.3. Tissue Calibration Result..... | 35 |
| 6.4. SAR Exposure Limits..... | 36 |
| 6.5. Conducted Power Measurement..... | 37 |
| 6.6. Exposure Positions Consideration..... | 39 |
| 6.7. SAR Test Result..... | 40 |

APPENDIX A TEST DATA AND PLOTS

APPENDIX B TEST PHOTOGRAPHS

TEST REPORT CERTIFICATION

Applicant : Elitegroup Computer Systems Co., Ltd.
EUT Description
(1) Product : 7" Multi Function Pad
(2) Model : mPAD2-7.....
(3) Brand : ECS

Applicable Standards:

47 CFR FCC Part 2 (§2.1093)
IEEE 1528-2013

KDB 248227 D01 802.11 Wi-Fi SAR v02r02
KDB 447498 D01 General RF Exposure Guidance v06
KDB 865664 D01 SAR Measurement 100MHz to 6GHz v01r04

Audix Technology Corp. tested the equipment mentioned in accordance with the requirements set forth in the above standards. Test results indicate that the equipment tested is capable of demonstrating compliance with the requirements as documented within this report. **Audix Technology Corp.** does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens and samples.

Date of Report: 2017. 04. 19

Reviewed by: Tina Huang (Tina Huang/Administrator)

Approved by: Ben Cheng (Ben Cheng/Manager)

1. REVISION RECORD OF TEST REPORT

| Edition No | Issued Data | Revision Summary | Report Number |
|------------|--------------|------------------|---------------|
| 0 | 2017. 04. 19 | Original Report | EM-SA170002 |

2. SUMMARY OF TEST RESULTS

| Mode | Highest Reported Body SAR _{1g} | Scale SAR |
|-----------|---|-------------------|
| WLAN 2.4G | 0.332(W/kg) | 0.35W/kg) |
| WLAN 5G | 0.781(W/kg) | 0.86(W/kg) |

Note: 1. The SAR limit (SAR_{1g} 1.6 W/kg) for general population / uncontrolled exposure is specified in FCC 47 CFR part 2 (2.1093).
2. WLAN and BT cannot support transmit simultaneously, and WLAN only transmit at either 2.4GHz or 5GHz at the same time.

| Mode | Simultaneous Transmission Antenna SAR | Highest Reported Total Body SAR _{1g} |
|----------------------------------|--|---|
| 802.11b | Main ANT (Back)+AUX ANT (Back) | 0.05 (W/kg) |
| 802.11g | Main ANT (Back)+AUX ANT (Back) | 0.08 (W/kg) |
| 802.11ac-VHT20 (UNII Band I) | Main ANT (Back)+AUX ANT (Back) | 0.12 (W/kg) |
| 802.11ac-VHT20 (UNII Band II-2A) | Main ANT (Back)+AUX ANT (Back) | 0.11 (W/kg) |
| 802.11ac-VHT80 (UNII Band II-2C) | Main ANT (Back)+AUX ANT (Back) | 0.25 (W/kg) |
| 802.11ac-VHT20 (UNII Band III) | Main ANT (Back)+AUX ANT (Back) | 0.27 (W/kg) |
| | Main ANT (Back with Case)+ AUX ANT (Back with Case) | 0.19 (W/kg) |

Note: 1. The SAR limit (SAR_{1g} 1.6 W/kg) for general population / uncontrolled exposure is specified in FCC 47 CFR part 2 (2.1093).
2. It is calculated from scale SAR.
3. Pursuant to section 2.8 of KDB 865664 when measured SAR larger than 0.8W/Kg not scale SAR, thus repeat SAR is not needed.

3. GENERAL INFORMATION

3.1. Description of Application

| | |
|-----------|---|
| Applicant | Elitegroup Computer Systems Co., Ltd. No. 239, Sec. 2., TiDing Blvd., Taipei, Taiwan 11493 |
| Product | 7" Multi Function Pad |
| Model | mPAD2-7..... (The "." in the model name can be 0 to 9, A to Z, a to z, "-", "_", "\", "/" or blank for marketing use only) |
| Brand | ECS |

3.2. Description of EUT

| | | |
|-----------------|---|------|
| Test Model | mPAD2-7-CHT4-I | |
| Serial Number | N/A | |
| Power Rating | Refer to AC adapter rating. | |
| RF Features | WLAN:802.11a/b/g/n/ac Bluetooth: BT and BLE NFC, GPS | |
| Transmit Type | 2.4 GHz | |
| | 802.11b | 2T2R |
| | 802.11g | 2T2R |
| | 802.11n-HT20 | 2T2R |
| | 802.11n-HT40 | 2T2R |
| | BT/BLE | 1T1R |
| | UNII Bands | |
| | 802.11a | 2T2R |
| | 802.11n-HT20/ 802.11ac-VHT20 | 2T2R |
| | 802.11n-HT40/ 802.11ac-VHT40 | 2T2R |
| | 802.11ac-VHT80 | 2T2R |
| | 13.56MHz | |
| NFC | 1T1R | |
| Accessories | <ul style="list-style-type: none"> • Barcode Scanner mPAD (Option) • SCR mPAD (Option) • MSR Module (Option) • USB Ethernet mPAD (Option) • 7" Pad Docking (Option) • 30 Pin to USB Cable • 30 Pin to HDMI Cable • 30 Pin to DC Jack Cable • Power Adapter | |
| Date of Receipt | 2017. 01. 25 | |
| Date of Test | 2017. 03. 08 ~ 13 | |

3.3. EUT Specifications Assessed in Current Report

| 2.4GHz | | |
|--------------|-------------------------|----------------|
| Mode | Fundamental Range (MHz) | Channel Number |
| 802.11b | 2412-2462 | 11 |
| 802.11g | | 11 |
| 802.11n-HT20 | | 11 |
| 802.11n-HT40 | 2422-2452 | 7 |
| Bluetooth | 2402-2480 | 79 |
| BLE | 2402-2480 | 40 |

| 5GHz | | | |
|--|-----------|-------------------------|----------------|
| Mode | UNII Band | Fundamental Range (MHz) | Channel Number |
| 802.11a | I | 5180-5240 | 4 |
| | II-2A | 5260-5320 | 4 |
| | II-2C | 5500-5720 | 12 |
| | III | 5745-5825 | 5 |
| 802.11n-HT20/ 802.11ac-VHT20 | I | 5180-5240 | 4 |
| | II-2A | 5260-5320 | 4 |
| | II-2C | 5500-5720 | 12 |
| | III | 5745-5825 | 5 |
| 802.11n-HT40/ 802.11ac-VHT40 | I | 5190-5230 | 2 |
| | II-2A | 5270-5310 | 2 |
| | II-2C | 5510-5710 | 6 |
| | III | 5755-5795 | 2 |
| 802.11ac-VHT80 | I | 5210 | 1 |
| | II-2A | 5290 | 1 |
| | II-2C | 5530-5690 | 3 |
| | III | 5775 | 1 |
| Remark: UNII Band II (DFS Function, Slave/no In service monitor, no Ad-Hoc mode) | | | |

| Mode | Modulation | Data Rate (Mbps) |
|----------------|-------------------------------------|------------------|
| 802.11b | DSSS (DBPSK/DQPSK/CCK) | Up to 11 |
| 802.11g | OFDM (BPSK/QPSK/16QAM/64QAM) | Up to 54 |
| 802.11a | | Up to 54 |
| 802.11n-HT20 | OFDM (BPSK/QPSK/16QAM/64QAM) | Up to 144.4 |
| 802.11n-HT40 | | Up to 300 |
| 802.11ac-HT20 | OFDM (BPSK/QPSK/16QAM/64QAM/256QAM) | Up to 173.3 |
| 802.11ac-HT40 | | Up to 400 |
| 802.11ac-VHT80 | | Up to 866.7 |
| Bluetooth | FHSS (GFSK, $\pi/4$ DQPSK, 8-DPSK) | 1/2/3 |
| BLE | GFSK | 1 |

3.4. Antenna Information

| GPS Antenna | | | | | |
|-------------|---------------------|-----------------------------------|--------------|-----------------|----------------|
| No. | Antenna Part Number | Manufacture | Antenna Type | Frequency (MHz) | Max Gain (dBi) |
| 1 | 13-130-JC5150 | Joinsoon Electronics MFG. CO.,LTD | PCB | 1510 to 1602 | 4.62 |

| 2.4G Antenna | | | | | |
|--------------|-----------------------------|-----------------------------------|--------------|-----------------|----------------|
| No. | Antenna Part Number | Manufacture | Antenna Type | Frequency (MHz) | Max Gain (dBi) |
| 1 | 13-130-002075 (Tx1 Antenna) | Joinsoon Electronics MFG. CO.,LTD | PIFA | 2400 to 2500 | -2.53 |
| 2 | 13-130-002076 (Tx2 Antenna) | | PIFA | 2400 to 2500 | -1.15 |

| 5G Antenna | | | | | |
|------------|-----------------------------|-----------------------------------|--------------|-----------------|----------------|
| No. | Antenna Part Number | Manufacture | Antenna Type | Frequency (MHz) | Max Gain (dBi) |
| 1 | 13-130-002075 (Tx1 Antenna) | Joinsoon Electronics MFG. CO.,LTD | PIFA | 5150 to 5350 | -0.53 |
| 2 | | | | 5470 to 5725 | 0.82 |
| 3 | | | | 5725 to 5850 | 0.82 |
| 4 | 13-130-002076 (Tx2 Antenna) | Joinsoon Electronics MFG. CO.,LTD | PIFA | 5150 to 5350 | 0.90 |
| 5 | | | | 5470 to 5725 | 0.53 |
| 6 | | | | 5725 to 5850 | 0.53 |

3.5. Description of Key Components

3.5.1. For the All Component Lists

| Item | Supplier | Model / Type | Character |
|-------------------------|-----------------------------|---|---|
| Main Board | ECS | TC71A | --- |
| CPU (Socket: BGA1380) | Intel | Z8550 | 1.44GHz, up to 2.4GHz |
| Memory (On Board) | SK hynix | H9CCNNNBPTBL | LPDDR3 1600MHz 4GB |
| 7" LCD Panel | KD | KD070D30-31NB-A18 | LCD.WXGA.7.800*1280 |
| Touch Module | TOPGROUP EETI | ZC-122A-0776AT EXC3102 | Support 10-points multi-touch(Capacitive) |
| Storage | SanDisk | SDINADF4-64G | 64GB |
| | SanDisk | SDIN9DW4-32G | 32GB |
| Front Camera | Broadsands | BLX2722E-TC7AW-F | Front Camera : 2.0M |
| Rear Camera | Broadsands | BLX8858E-TC7AW-CB | Rear Camera: 8.0M |
| Wi-Fi +BT Module | Qualcomm (Azurewave) | QCNFA324 (AW-CM217NF) | Wi-Fi 802.11 a/b/g/n/ac + BT 4.0 |
| GPS | Boradcam | BCM4752 | GPS&GLONASS |
| NFC | NXP | NPC100 | --- |
| Battery | Sunwoda | MICA-071 | 3.7Vdc,4100mAh / 15.17Wh |
| AC Adapter | Asian Power Devices Inc. | WA-36A12R (Wall-mount, 2C) | I/P: AC 100-240V, 50-60Hz, 0.9A Max. O/P: DC 12V, 3A |
| | | DC Power Cord: Unshielded, Undetachable, 1.8m With one ferrite core | |
| mPad Module (Option) | ECS | Barcode Scanner mPAD | Barcode Scanner |
| | ECS | SCR mPAD | Smart Card Reader (SCR) |
| | ECS | MSR mPAD | Magnetic Stripe Reader (MSR) |
| | ECS | USB Ethernet mPAD | Giga LAN Port |
| 7" Pad Docking (Option) | ECS | DOCKING mPAD-7 | Docking |

Remark: For more detailed features description, please refer to the manufacturer's specifications or the user manual.

3.5.2. The EUT collocates with following worst components, which are used to establish a basic configuration of system during test:

| Item | Supplier | Model / Type | Character |
|-------------------------|-----------------------------|---|---|
| Main Board | ECS | TC71A | --- |
| CPU (Socket: BGA1380) | Intel | Z8550 | 1.44GHz, up to 2.4GHz |
| Memory (On Board) | SK hynix | H9CCNNNBPTBL | LPDDR3 1600MHz 4GB |
| 7" LCD Panel | KD | KD070D30-31NB-A18 | LCD.WXGA.7.800*1280 |
| Touch Module | TOPGROUP EETI | ZC-122A-0776AT EXC3102 | Support 10-points multi-touch(Capacitive) |
| Storage | SanDisk | SDIN9DW4-32G | 32GB |
| Front Camera | Brodsands | BLX2722E-TC7AW-F | Front Camera : 2.0M |
| Rear Camera | Brodsands | BLX8858E-TC7AW-CB | Rear Camera: 8.0M |
| Wi-Fi +BT Module | Qualcomm (Azurewave) | QCNFA324 (AW-CM217NF) | Wi-Fi 802.11 a/b/g/n/ac + BT 4.0 |
| GPS | Boradcam | BCM4752 | GPS&GLONASS |
| NFC | NXP | NPC100 | --- |
| Battery | Sunwoda | MICA-071 | 3.7Vdc,4100mAh / 15.17Wh |
| AC Adapter | Asian Power Devices Inc. | WA-36A12R (Wall-mount, 2C) | I/P: AC 100-240V, 50-60Hz, 0.9A Max. O/P: DC 12V, 3A |
| | | DC Power Cord: Unshielded, Undetachable, 1.8m With one ferrite core | |
| mPad Module (Option) | ECS | Barcode Scanner mPAD | Barcode Scanner |
| 7" Pad Docking (Option) | ECS | DOCKING mPAD-7 | Docking |

3.6. Test Environment

Ambient conditions in the laboratory:

| Item | Require | Actual |
|------------------|---------|--------|
| Temperature (°C) | 18-25 | 22 ± 2 |
| Humidity (%RH) | 30-70 | 48 ± 2 |

3.7. Description of Test Facility

| | |
|-------------------|---|
| Name of Test Firm | Audix Technology Corporation / EMC Department No. 53-11, Dingfu, Linkou Dist., New Taipei City 244, Taiwan Tel: +886-2-26092133 Fax: +886-2-26099303 Website : www.audixtech.com Contact e-mail: sales@audixtech.com |
| Accreditations | The laboratory is accredited by following organizations under ISO/IEC 17025:2005 (1) NVLAP(USA) NVLAP Lab Code 200077-0 (2) TAF(Taiwan) No. 1724 (3) FCC OET Designation No. TW1004 & TW1090 |
| Test Facilities | (1) SAR Room |

3.8. Measurement Uncertainty

| DASY5 Uncertainty | | | | | | | | |
|--|---------------|-------------|------------|---------|----------|----------------|-----------------|-----------------------|
| Measurement uncertainty for 300 MHz to 3 GHz averaged over 1 gram / 10 gram. | | | | | | | | |
| Error Description | Uncert. value | Prob. Dist. | Div. | (ci) 1g | (ci) 10g | Std. Unc. (1g) | Std. Unc. (10g) | (vi) v _{eff} |
| Measurement System | | | | | | | | |
| Probe Calibration | ±6.0% | N | 1 | 1 | 1 | ±6.0% | ±6.0% | ∞ |
| Axial Isotropy | ±4.7% | R | $\sqrt{3}$ | 0.7 | 0.7 | ±1.9% | ±1.9% | ∞ |
| Hemispherical Isotropy | ±9.6% | R | $\sqrt{3}$ | 0.7 | 0.7 | ±3.9% | ±3.9% | ∞ |
| Boundary Effects | ±1.0% | R | $\sqrt{3}$ | 1 | 1 | ±0.6% | ±0.6% | ∞ |
| Linearity | ±4.7% | R | $\sqrt{3}$ | 1 | 1 | ±2.7% | ±2.7% | ∞ |
| System Detection Limits | ±1.0% | R | $\sqrt{3}$ | 1 | 1 | ±0.6% | ±0.6% | ∞ |
| Readout Electronics | ±0.3% | N | 1 | 1 | 1 | ±0.3% | ±0.3% | ∞ |
| Response Time | ±0.8% | R | $\sqrt{3}$ | 1 | 1 | ±0.5% | ±0.5% | ∞ |
| Integration Time | ±2.6% | R | $\sqrt{3}$ | 1 | 1 | ±1.5% | ±1.5% | ∞ |
| RF Ambient Noise | ±3.0% | R | $\sqrt{3}$ | 1 | 1 | ±1.7% | ±1.7% | ∞ |
| RF Ambient Reflections | ±3.0% | R | $\sqrt{3}$ | 1 | 1 | ±1.7% | ±1.7% | ∞ |
| Probe Positioner | ±0.4% | R | $\sqrt{3}$ | 1 | 1 | ±0.2% | ±0.2% | ∞ |
| Probe Positioning | ±2.9% | R | $\sqrt{3}$ | 1 | 1 | ±1.7% | ±1.7% | ∞ |
| Max. SAR Eval. | ±1.0% | R | $\sqrt{3}$ | 1 | 1 | ±0.6% | ±0.6% | ∞ |
| Test Sample Related | | | | | | | | |
| Device Positioning | ±2.9% | N | 1 | 1 | 1 | ±2.9% | ±2.9% | 145 |
| Device Holder | ±3.6% | N | 1 | 1 | 1 | ±3.6% | ±3.6% | 5 |
| Power Drift | ±5.0% | R | $\sqrt{3}$ | 1 | 1 | ±2.9% | ±2.9% | ∞ |
| Phantom and Setup | | | | | | | | |
| Phantom Uncertainty | ±4.0% | R | $\sqrt{3}$ | 1 | 1 | ±2.3% | ±2.3% | ∞ |
| Liquid Conductivity (target) | ±5.0% | R | $\sqrt{3}$ | 0.64 | 0.43 | ±1.8% | ±1.2% | ∞ |
| Liquid Conductivity (meas.) | ±2.5% | N | 1 | 0.64 | 0.43 | ±1.6% | ±1.1% | ∞ |
| Liquid Permittivity (target) | ±5.0% | R | $\sqrt{3}$ | 0.6 | 0.49 | ±1.7% | ±1.4% | ∞ |
| Liquid Permittivity (meas.) | ±2.5% | N | 1 | 0.6 | 0.49 | ±1.5% | ±1.2% | ∞ |
| Combined Std. Uncertainty | | | | | | ±11% | ±10.8% | 387 |
| Expanded STD Uncertainty | | | | | | ±22% | ±21.5% | |

4. MEASUREMENT EQUIPMENT LIST

| Item | Type | Manufacturer | Model No. | Serial No. | Cal. Date | Cal. Due |
|------|--------------------------------|--------------|-----------|---------------------|--------------|--------------|
| 1. | Stäubli Robot TX90 XL | Stäubli | TX90 | F12/5K9SA1/ A101 | N/A | N/A |
| 2. | Controller | SPEAG | CS8c | N/A | N/A | N/A |
| 3. | SAM Twin Phantom | SPEAG | N/A | 1706 | N/A | N/A |
| 4. | ELI5 Phantom | SPEAG | N/A | 1170 | N/A | N/A |
| 5. | Device Holder | SPEAG | N/A | N/A | N/A | N/A |
| 6. | Data Acquisition Electronic | SPEAG | DAE4 | 1337 | 2016. 09. 28 | 2017. 09. 27 |
| 7. | E-Field Probe | SPEAG | EX3DV4 | 3855 | 2016. 09. 30 | 2017. 09. 29 |
| 8. | SAR Software | SPEAG | DASY52 | V.52.8.8.1222 | N/A | N/A |
| 9. | ENA Network Analyzer | Agilent | E5071C | Y46214331 | 2016. 09. 29 | 2017. 09. 28 |
| 10. | Signal Generator | Aglient | N5181A | MY50143917 | 2016. 09. 19 | 2017. 09. 18 |
| 11. | Power Meter | Aglient | ML2487A | MY52180007 | 2016. 09. 19 | 2017. 09. 18 |
| 12. | Power Sensor | Aglient | N8481 | MY52080006 | 2016. 09. 19 | 2017. 09. 18 |
| 13. | Dipole Antenna | SPEAG | D2450V2 | 888 | 2015. 09. 28 | 2018 09. 27 |
| 14. | Dipole Antenna | SPEAG | D5GHzV2 | 1203 | 2015. 01. 06 | 2018. 01 06 |

5. SAR MEASUREMENT SYSTEM

5.1. Definition of Specific Absorption Rate (SAR)

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$\text{SAR} = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)

SAR measurement can be related to the electrical field in the tissue by

$$\text{SAR} = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

5.2. SPEAG DASY System

DASY system consists of high precision robot, probe alignment sensor, phantom, robot controller, controlled measurement server and near-field probe. The robot includes six axes that can move to the precision position of the DASY5 software defined. The DASY software can define the area that is detected by the probe. The robot is connected to controlled box. Controlled measurement server is connected to the controlled robot box. The DAE includes amplifier, signal multiplexing, AD converter, offset measurement and surface detection. It is connected to the Electro-optical coupler (ECO). The ECO performs the conversion from the optical into digital electric signal of the DAE and transfers data to the PC.


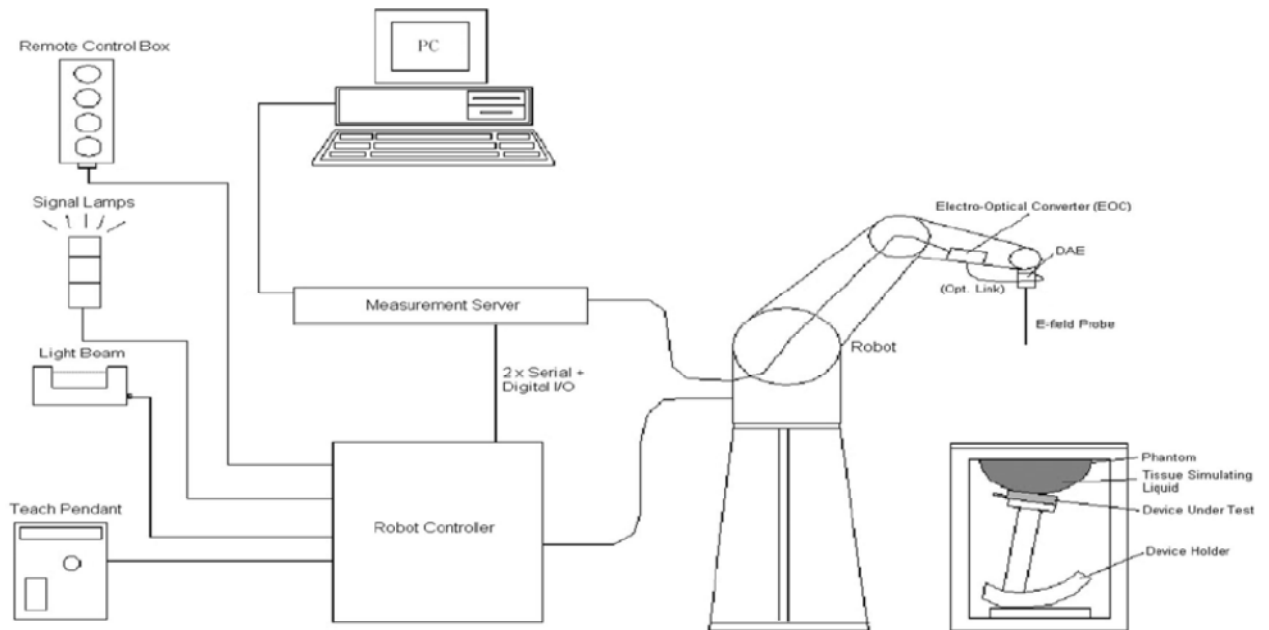


Fig-3.1 DASY System Setup


5.2.1. Robot

The DASY system uses the high precision robots from Stäubli SA (France). For the 6-axis controller system, the robot controller version (DASY5: CS8c) from Stäubli is used. The Stäubli robot series have many features that are important for our application:


- High precision (repeatability ± 0.035 mm)
- High reliability (industrial design)
- Jerk-free straight movements
- Low ELF interference (the closed metallic construction shields against motor control fields)

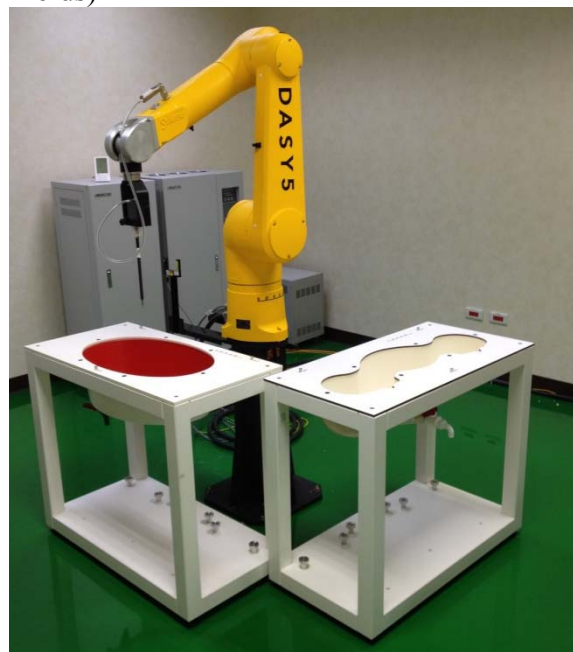


5.2.2. Probes


| | | |
|---------------|---|---|
| Model | Ex3DV4 |  |
| Construction | Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE) | |
| Frequency | 10 MHz to 6 GHz Linearity: ± 0.2 dB | |
| Directivity | ± 0.3 dB in HSL (rotation around probe axis) ± 0.5 dB in tissue material (rotation normal to probe axis) | |
| Dynamic Range | 10 μ W/g to 100 mW/g Linearity: ± 0.2 dB (noise: typically < 1 μ W/g) | |
| Dimensions | Overall length: 337 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm | |

5.2.3. Data Acquisition Electronics (DAE)


| | | |
|----------------------|--|---|
| Model | DAE4 |  |
| Construction | Signal amplifier, multiplexer, A/D converter and control logic. Serial optical link for communication with DASY4/5 embedded system (fully remote controlled). Two step probe touch detector for mechanical surface detection and emergency robot stop. | |
| Measurement Range | -100 to +300 mV (16 bit resolution and two range settings: 4mV, 400mV) | |
| Input Offset Voltage | $< 5\mu$ V (with auto zero) | |
| Input Bias Current | < 50 fA | |
| Dimensions | 60 x 60 x 68 mm | |


5.2.4. Probes

| | | |
|-----------------|---|---|
| Model | Twin SAM |  |
| Construction | The shell corresponds to the specifications of the Specific Anthropomorphic Mannequin (SAM) phantom defined in IEEE 1528 and IEC 62209-1. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by teaching three points with the robot. | |
| Material | Vinylester, glass fiber reinforced (VE-GF) | |
| Shell Thickness | 2 ± 0.2 mm (6 ± 0.2 mm at ear point) | |
| Dimensions | Length: 1000 mm Width: 500 mm Height: adjustable feet | |
| Filling Volume | approx. 25 liters | |


| | | |
|-----------------|---|---|
| Model | ELI |  |
| Construction | Phantom for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI is fully compatible with the IEC 62209-2 standard and all known tissue simulating liquids. ELI has been optimized regarding its performance and can be integrated into our standard phantom tables. A cover prevents evaporation of the liquid. Reference markings on the phantom allow installation of the complete setup, including all predefined phantom positions and measurement grids, by teaching three points. The phantom is compatible with all SPEAG dosimetric probes and dipoles. | |
| Material | Vinylester, glass fiber reinforced (VE-GF) | |
| Shell Thickness | 2.0 ± 0.2 mm (bottom plate) | |
| Dimensions | Major axis: 600 mm Minor axis: 400 mm | |
| Filling Volume | approx. 30 liters | |

5.2.5. Device Holder

| | | |
|--------------|---|---|
| Model | Mounting Device |  |
| Construction | In combination with the Twin SAM Phantom or ELI4, the Mounting Device enables the rotation of the mounted transmitter device in spherical coordinates. Rotation point is the ear opening point. Transmitter devices can be easily and accurately positioned according to IEC, IEEE, FCC or other specifications. The device holder can be locked for positioning at different phantom sections (left head, right head, flat). | |
| Material | POM | |


| | | |
|--------------|---|--|
| Model | Laptop Extensions Kit |  |
| Construction | Simple but effective and easy-to-use extension for Mounting Device that facilitates the testing of larger devices according to IEC 62209-2 (e.g., laptops, cameras, etc.). It is lightweight and fits easily on the upper part of the Mounting Device in place of the phone positioner. | |
| Material | POM, Acrylic glass, Foam | |

5.2.6. Device Holder

| | | |
|------------------|--|---|
| Model | System Validation Dipoles |  |
| Construction | Symmetrical dipole with 1/4 balun. Enables measurement of feed point impedance with NWA. Matched for use near flat phantoms filled with tissue simulating solutions. | |
| Frequency | 750 MHz to 5800 MHz | |
| Return Loss | > 20 dB | |
| Power Capability | > 100 W (f < 1GHz), > 40 W (f > 1GHz) | |

5.2.7. Device Holder

For SAR measurement of the field distribution inside the phantom, the phantom must be filled with homogeneous tissue simulating liquid to a depth of at least 15 cm. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm. The nominal dielectric values of the tissue simulating liquids in the phantom and the tolerance of 5% are listed in Table-5.1.

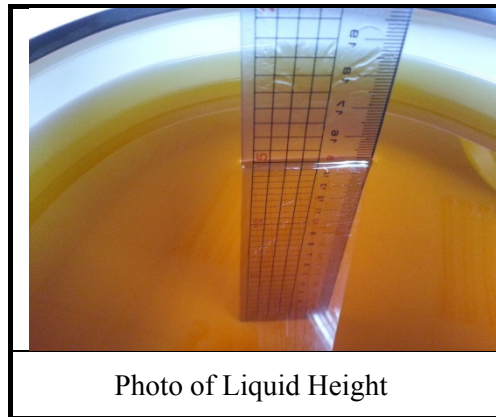

The dielectric properties of the head tissue simulating liquids are defined in IEEE 1528 and FCC OET 65 Supplement C Appendix C. For the body tissue simulating liquids, the dielectric properties are defined in FCC OET 65 Supplement C Appendix C. The dielectric properties of the tissue simulating liquids were verified prior to the SAR evaluation using an Agilent 85070D Dielectric Probe Kit and an Agilent Network Analyzer.

Table-5.1 Targets of Tissue Simulating Liquid


| Target Frequency [MHz] | Target Permittivity (ϵ_r) | Range of $\pm 5\%$ | Target Conductivity σ [s/m] | Range of $\pm 5\%$ |
|------------------------|--------------------------------------|--------------------|------------------------------------|--------------------|
| For Head | | | | |
| 750 | 41.9 | 39.8 ~ 44.0 | 0.89 | 0.85 ~ 0.93 |
| 835 | 41.5 | 39.4 ~ 43.6 | 0.90 | 0.86 ~ 0.95 |
| 900 | 41.5 | 39.4 ~ 43.6 | 0.97 | 0.92 ~ 1.02 |
| 1450 | 40.5 | 38.5 ~ 42.5 | 1.20 | 1.14 ~ 1.26 |
| 1640 | 40.3 | 38.3 ~ 42.3 | 1.29 | 1.23 ~ 1.35 |
| 1750 | 40.1 | 38.1 ~ 42.1 | 1.37 | 1.30 ~ 1.44 |
| 1800 | 40.0 | 38.0 ~ 42.0 | 1.40 | 1.33 ~ 1.47 |
| 1900 | 40.0 | 38.0 ~ 42.0 | 1.40 | 1.33 ~ 1.47 |
| 2000 | 40.0 | 38.0 ~ 42.0 | 1.40 | 1.33 ~ 1.47 |
| 2300 | 39.5 | 37.5 ~ 41.5 | 1.67 | 1.59 ~ 1.75 |
| 2450 | 39.2 | 37.2 ~ 41.2 | 1.80 | 1.71 ~ 1.89 |
| 2600 | 39.0 | 37.1 ~ 41.0 | 1.96 | 1.86 ~ 2.06 |
| 3500 | 37.9 | 36.0 ~ 39.8 | 2.91 | 2.76 ~ 3.06 |
| 5200 | 36.0 | 34.2 ~ 37.8 | 4.66 | 4.43 ~ 4.89 |
| 5300 | 35.9 | 34.1 ~ 37.7 | 4.76 | 4.52 ~ 5.00 |
| 5500 | 35.6 | 33.8 ~ 37.4 | 4.96 | 4.71 ~ 5.21 |
| 5600 | 35.5 | 33.7 ~ 37.3 | 5.07 | 4.82 ~ 5.32 |
| 5800 | 35.3 | 33.5 ~ 37.1 | 5.27 | 5.01 ~ 5.53 |
| For Body | | | | |
| 750 | 55.5 | 52.7 ~ 58.3 | 0.96 | 0.91 ~ 1.01 |
| 835 | 55.2 | 52.4 ~ 58.0 | 0.97 | 0.92 ~ 1.02 |
| 900 | 55.0 | 52.3 ~ 57.8 | 1.05 | 1.00 ~ 1.10 |
| 1450 | 54.0 | 51.3 ~ 56.7 | 1.30 | 1.24 ~ 1.37 |
| 1640 | 53.8 | 51.1 ~ 56.5 | 1.40 | 1.33 ~ 1.47 |
| 1750 | 53.4 | 50.7 ~ 56.1 | 1.49 | 1.42 ~ 1.56 |
| 1800 | 53.3 | 50.6 ~ 56.0 | 1.52 | 1.44 ~ 1.60 |
| 1900 | 53.3 | 50.6 ~ 56.0 | 1.52 | 1.44 ~ 1.60 |
| 2000 | 53.3 | 50.6 ~ 56.0 | 1.52 | 1.44 ~ 1.60 |
| 2300 | 52.9 | 50.3 ~ 55.5 | 1.81 | 1.72 ~ 1.90 |
| 2450 | 52.7 | 50.1 ~ 55.3 | 1.95 | 1.85 ~ 2.05 |
| 2600 | 52.5 | 49.9 ~ 55.1 | 2.16 | 2.05 ~ 2.27 |
| 3500 | 51.3 | 48.7 ~ 53.9 | 3.31 | 3.14 ~ 3.48 |
| 5200 | 49.0 | 46.6 ~ 51.5 | 5.30 | 5.04 ~ 5.57 |
| 5300 | 48.9 | 46.5 ~ 51.3 | 5.42 | 5.15 ~ 5.69 |
| 5500 | 48.6 | 46.2 ~ 51.0 | 5.65 | 5.37 ~ 5.93 |
| 5600 | 48.5 | 46.1 ~ 50.9 | 5.77 | 5.48 ~ 6.06 |
| 5800 | 48.2 | 45.8 ~ 50.6 | 6.00 | 5.70 ~ 6.30 |

Table-5.2 Recipes of Tissue Simulating Liquid

| Tissue Type | Bactericide | DGBE | HEC | NaCl | Sucrose | Triton X-100 | Water | Diethylene Glycol Mono-hexylether |
|-------------|-------------|------|-----|------|---------|--------------|-------|-----------------------------------|
| For Head | | | | | | | | |
| H750 | 0.2 | - | 0.2 | 1.5 | 56.0 | - | 42.1 | - |
| H835 | 0.2 | - | 0.2 | 1.5 | 57.0 | - | 41.1 | - |
| H900 | 0.2 | - | 0.2 | 1.4 | 58.0 | - | 40.2 | - |
| H1450 | - | 43.3 | - | 0.6 | - | - | 56.1 | - |
| H1640 | - | 45.8 | - | 0.5 | - | - | 53.7 | - |
| H1750 | - | 47.0 | - | 0.4 | - | - | 52.6 | - |
| H1800 | - | 44.5 | - | 0.3 | - | - | 55.2 | - |
| H1900 | - | 44.5 | - | 0.2 | - | - | 55.3 | - |
| H2000 | - | 44.5 | - | 0.1 | - | - | 55.4 | - |
| H2300 | - | 44.9 | - | 0.1 | - | - | 55.0 | - |
| H2450 | - | 45.0 | - | 0.1 | - | - | 54.9 | - |
| H2600 | - | 45.1 | - | 0.1 | - | - | 54.8 | - |
| H3500 | - | 8.0 | - | 0.2 | - | 20.0 | 71.8 | - |
| H5G | - | - | - | - | - | 17.2 | 65.5 | 17.3 |
| For Body | | | | | | | | |
| B750 | 0.2 | - | 0.2 | 0.8 | 48.8 | - | 50.0 | - |
| B835 | 0.2 | - | 0.2 | 0.9 | 48.5 | - | 50.2 | - |
| B900 | 0.2 | - | 0.2 | 0.9 | 48.2 | - | 50.5 | - |
| B1450 | - | 34.0 | - | 0.3 | - | - | 65.7 | - |
| B1640 | - | 32.5 | - | 0.3 | - | - | 67.2 | - |
| B1750 | - | 31.0 | - | 0.2 | - | - | 68.8 | - |
| B1800 | - | 29.5 | - | 0.4 | - | - | 70.1 | - |
| B1900 | - | 29.5 | - | 0.3 | - | - | 70.2 | - |
| B2000 | - | 30.0 | - | 0.2 | - | - | 69.8 | - |
| B2300 | - | 31.0 | - | 0.1 | - | - | 68.9 | - |
| B2450 | - | 31.4 | - | 0.1 | - | - | 68.5 | - |
| B2600 | - | 31.8 | - | 0.1 | - | - | 68.1 | - |
| B3500 | - | 28.8 | - | 0.1 | - | - | 71.1 | - |
| B5G | - | - | - | - | - | 10.7 | 78.6 | 10.7 |

5.3. SAR System Verification

The system check verifies that the system operates within its specifications. It is performed daily or before every SAR measurement. The system check uses normal SAR measurements in the flat section of the phantom with a matched dipole at a specified distance. The system verification setup is shown as below.

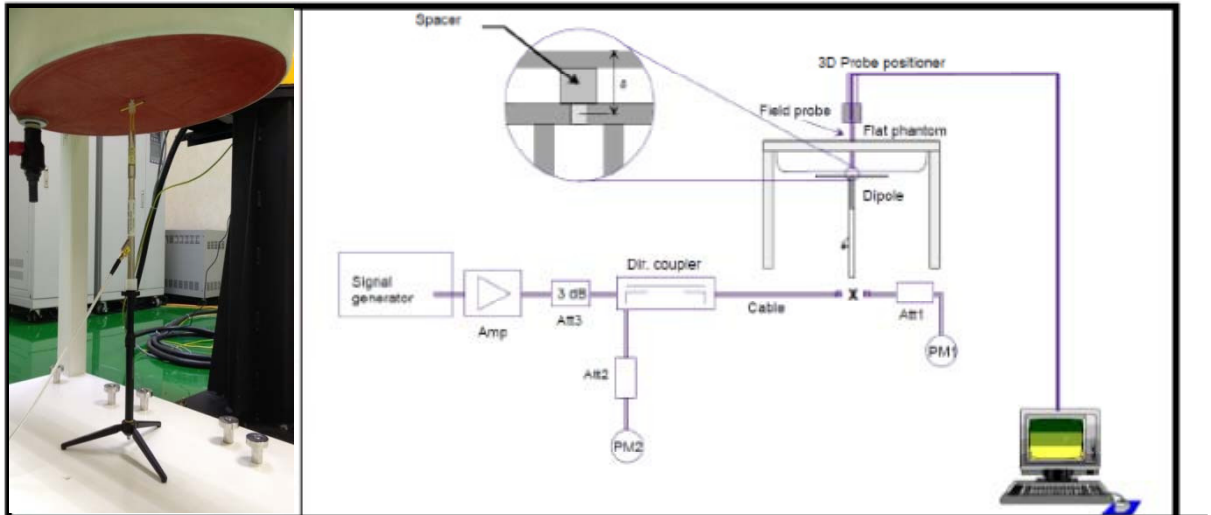

The validation dipole is placed beneath the flat phantom with the specific spacer in place. The distance spacer is touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom. The power meter PM1 measures the forward power at the location of the system check dipole connector. The signal generator is adjusted for the desired forward power (250 mW is used for 700 MHz to 3 GHz, 100 mW is used for 3.5 GHz to 6 GHz) at the dipole connector and the power meter PM2 is read at that level. After connecting the cable to the dipole, the signal generator is readjusted for the same reading at power meter PM2.

After system check testing, the SAR result will be normalized to 1W forward input power and compared with the reference SAR value derived from validation dipole certificate report. The deviation of system check should be within 10 %.

5.3.1. SAR System Verification Result

| System Performance Check at WLAN | | | | |
|---|------------------|------------------|----------------|-------------------|
| Dipole Kit: D2450V2 (Body) | | | | |
| Frequency [MHz] | Description | SAR [w/kg] 1g | SAR [w/kg] 10g | Tissue Temp. [°C] |
| 2450MHz | Reference result | 12.90 | 6.00 | N/A |
| | ± 10% window | 11.610 to 14.190 | 5.400 to 6.600 | |
| | 2017. 03. 08 | 13.5 | 6.07 | 22.1 |
| Note: All SAR values are normalized to 250mW forward power. | | | | |

| System Performance Check at WLAN | | | | |
|---|------------------|----------------|----------------|-------------------|
| Dipole Kit: D5GHzV2 (Body) | | | | |
| Frequency [MHz] | Description | SAR [w/kg] 1g | SAR [w/kg] 10g | Tissue Temp. [°C] |
| 5200MHz | Reference result | 7.69 | 2.14 | N/A |
| | ± 10% window | 6.921 to 8.459 | 1.926 to 2.354 | |
| | 2017. 03. 09 | 8.24 | 2.29 | 22.2 |
| Note: All SAR values are normalized to 250mW forward power. | | | | |

| System Performance Check at WLAN | | | | |
|---|------------------|----------------|----------------|-------------------|
| Dipole Kit: D5GHzV2 (Body) | | | | |
| Frequency [MHz] | Description | SAR [w/kg] 1g | SAR [w/kg] 10g | Tissue Temp. [°C] |
| 5500MHz | Reference result | 8.26 | 2.28 | N/A |
| | ± 10% window | 7.434 to 9.086 | 2.052 to 2.508 | |
| | 2017. 03. 13 | 8.69 | 2.39 | 22.1 |
| Note: All SAR values are normalized to 250mW forward power. | | | | |

| System Performance Check at WLAN | | | | |
|---|------------------|----------------|----------------|-------------------|
| Dipole Kit: D5GHzV2 (Body) | | | | |
| Frequency [MHz] | Description | SAR [w/kg] 1g | SAR [w/kg] 10g | Tissue Temp. [°C] |
| 5800MHz | Reference result | 7.88 | 2.16 | N/A |
| | ± 10% window | 7.092 to 8.668 | 1.944 to 2.376 | |
| | 2017. 03. 10 | 7.19 | 1.99 | 22.3 |
| Note: All SAR values are normalized to 250mW forward power. | | | | |

5.3.2. SAR System Check Data

Date: 3/8/2017

Test Laboratory: Audix_SAR Lab

System Check_B2450**DUT: Dipole 2450 MHz D2450V2; Type: D2450V2; Serial: D2450V2 - SN:888**

Communication System: UID 0, CW (0); Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2450$ MHz; $\sigma = 2.036$ S/m; $\epsilon_r = 53.461$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3855; ConvF(7.54, 7.54, 7.54); Calibrated: 9/30/2016;
- Sensor-Surface: 2mm (Mechanical Surface Detection), Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1337; Calibrated: 9/28/2016
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1170
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Area Scan (8x8x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 16.4 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 85.21 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 28.9 W/kg

SAR(1 g) = 13.5 W/kg; SAR(10 g) = 6.07 W/kg

Maximum value of SAR (measured) = 15.1 W/kg

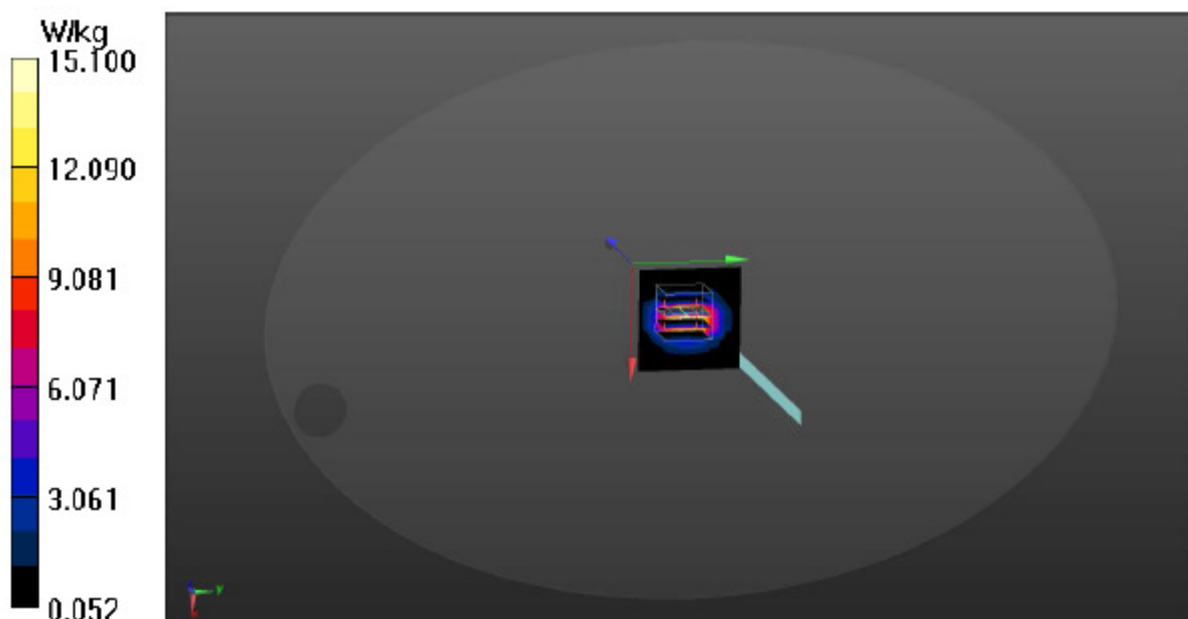

Date: 3/9/2017

Test Laboratory: Audix_SAR Lab

System Check_B5200**DUT: Dipole D5GHzV2; Type: D5GHzV2; Serial: D5GHzV2 - SN:1203**

Communication System: UID 0, CW (0); Frequency: 5200 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5200$ MHz; $\sigma = 5.34$ S/m; $\epsilon_r = 47.596$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3855; ConvF(4.79, 4.79, 4.79); Calibrated: 9/30/2016;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1337; Calibrated: 9/28/2016
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1170
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Area Scan (7x7x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 15.2 W/kg


Configuration/CW 2450/Zoom Scan (7x7x9)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2.5$ mm

Reference Value = 31.48 V/m; Power Drift = 0.27 dB

Peak SAR (extrapolated) = 34.7 W/kg

SAR(1 g) = 8.24 W/kg; SAR(10 g) = 2.29 W/kg

Maximum value of SAR (measured) = 17.5 W/kg

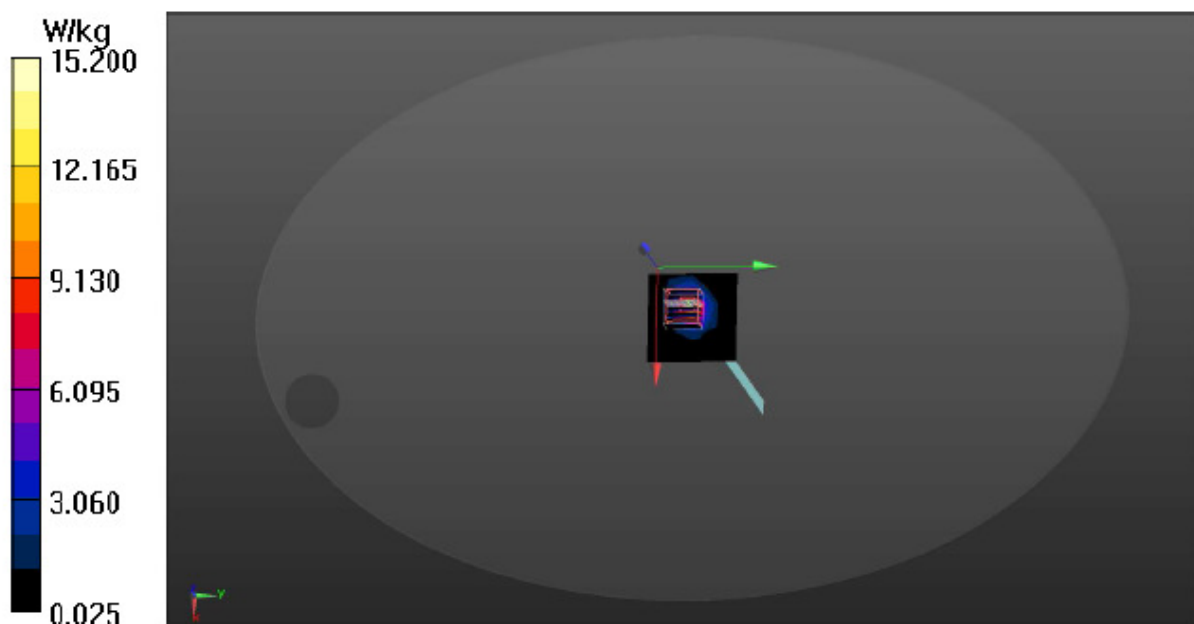

Date: 3/13/2017

Test Laboratory: Audix_SAR Lab

System Check_B5500**DUT: Dipole D5GHzV2; Type: D5GHzV2; Serial: D5GHzV2 - SN:1203**

Communication System: UID 0, CW (0); Frequency: 5500 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5500$ MHz; $\sigma = 5.753$ S/m; $\epsilon_r = 46.944$; $\rho = 1000$ kg/m³


Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3855; ConvF(4.11, 4.11, 4.11); Calibrated: 9/30/2016;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1337; Calibrated: 9/28/2016
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1170
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Area Scan (7x7x1): Measurement grid: $dx=10$ mm, $dy=10$ mm
Maximum value of SAR (measured) = 15.5 W/kg

Zoom Scan (7x7x9)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2.5$ mm
Reference Value = 31.27 V/m; Power Drift = 0.23 dB
Peak SAR (extrapolated) = 34.5 W/kg
SAR(1 g) = 8.69 W/kg; SAR(10 g) = 2.39 W/kg
Maximum value of SAR (measured) = 18.0 W/kg

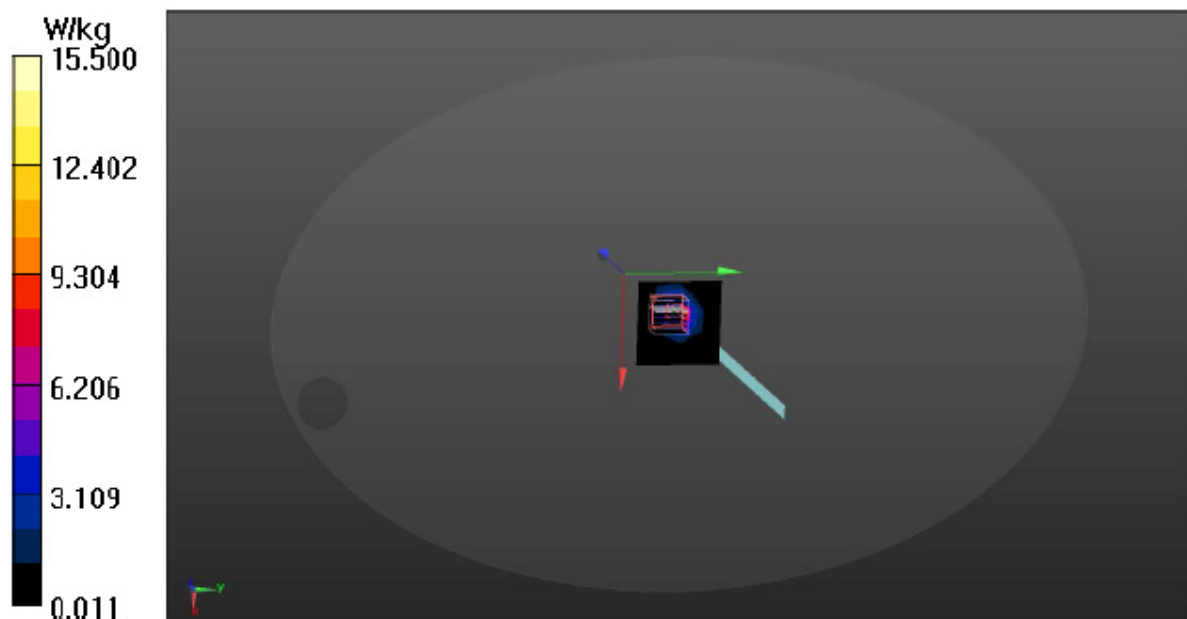

Date: 3/10/2017

Test Laboratory: Audix_SAR Lab

System Check_B5800**DUT: Dipole D5GHzV2; Type: D5GHzV2; Serial: D5GHzV2 - SN:1203**


Communication System: UID 0, CW (0); Frequency: 5800 MHz;Duty Cycle:1:1

Medium parameters used: $f = 5800$ MHz; $\sigma = 6.163$ S/m; $\epsilon_r = 46.419$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3855; ConvF(4.14, 4.14, 4.14); Calibrated: 9/30/2016;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1337; Calibrated: 9/28/2016
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1170
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

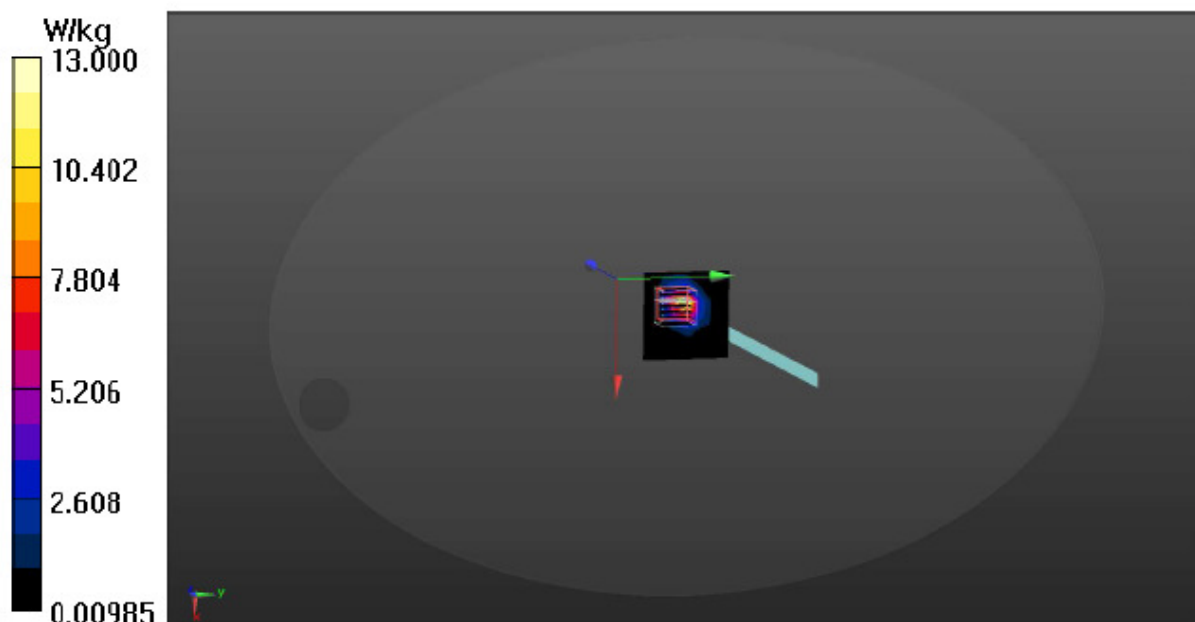Area Scan (7x7x1): Measurement grid: $dx=10$ mm, $dy=10$ mm
Maximum value of SAR (measured) = 13.0 W/kg**Zoom Scan (7x7x9)/Cube 0:** Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2.5$ mm
Reference Value = 27.54 V/m; Power Drift = 0.26 dB
Peak SAR (extrapolated) = 29.1 W/kg
SAR(1 g) = 7.19 W/kg; SAR(10 g) = 1.99 W/kg
Maximum value of SAR (measured) = 14.7 W/kg

5.4. SAR Measurement Procedure

According to the SAR test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

The SAR measurement procedures for each of test conditions are as follows:

- (a) Make EUT to transmit maximum output power
- (b) Measure conducted output power through RF cable
- (c) Place the EUT in the specific position of phantom
- (d) Perform SAR testing steps on the DASY system
- (e) Record the SAR value

5.4.1. Area & Zoom Scan Procedure

First Area Scan is used to locate the approximate location(s) of the local peak SAR value(s). The measurement grid within an Area Scan is defined by the grid extent, grid step size and grid offset. Next, in order to determine the EM field distribution in a three-dimensional spatial extension, Zoom Scan is required. The Zoom Scan is performed around the highest E-field value to determine the averaged SAR-distribution over 10 g. According to KDB 865664 D01 v01r03, the resolution for Area and Zoom scan is specified in the table below.

| Items | <= 2 GHz | 2-3 GHz | 3-4 GHz | 4-5 GHz | 5-6 GHz |
|---------------------------------------|----------|---------|---------|---------|---------|
| Area Scan ($\Delta x, \Delta y$) | <= 15mm | <= 12mm | <= 12mm | <= 10mm | <= 10mm |
| Zoom Scan ($\Delta x, \Delta y$) | <= 8mm | <= 5mm | <= 5mm | <= 4mm | <= 4mm |
| Zoom Scan (Δz) | <= 5mm | <= 5mm | <= 4mm | <= 3mm | <= 2mm |
| Zoom Scan Volume | >= 30mm | >= 30mm | >= 28mm | >= 25mm | >= 22mm |

Note:

When zoom scan is required and report SAR is <= 1.4 W/kg, the zoom scan resolution of $\Delta x / \Delta y$ (2-3GHz: <= 8 mm, 3-4GHz: <= 7 mm, 4-6GHz: <= 5 mm) may be applied.

5.4.2. Volume Scan Procedure

The volume scan is used for assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

5.4.3. Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASY measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drift more than 5%, the SAR will be retested.

5.4.4. Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values form the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

5.4.5. SAR Averaged Methods

In DASYS, the interpolation and extrapolation are both based on the modified Quadratic Shepard's method. The interpolation scheme combines a least-square fitted function method and a weighted average method which are the two basic types of computational interpolation and approximation.

Extrapolation routines are used to obtain SAR values between the lowest measurement points and the inner phantom surface. The extrapolation distance is determined by the surface detection distance and the probe sensor offset. The uncertainty increases with the extrapolation distance. To keep the uncertainty within 1% for the 1 g and 10 g cubes, the extrapolation distance should not be larger than 5 mm.

6. SAR MEASUREMENT EVALUATION

6.1. EUT Configuration and Setting

Body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in KDB 447498 D01 are used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode. When the reported SAR for a body-worn accessory, measured without a headset connected to the handset, is > 1.2 W/kg, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.

Body-worn accessories that do not contain metallic or conductive components may be tested according to worst-case exposure configurations, typically according to the smallest test separation distance required for the group of body-worn accessories with similar operating and exposure characteristics. All body-worn accessories containing metallic components are tested in conjunction with the host device.


Body-worn accessory SAR compliance is based on a single minimum test separation distance for all wireless and operating modes applicable to each body-worn accessory used by the host, and according to the relevant voice and/or data mode transmissions and operations. If a body-worn accessory supports voice only operations in its normal and expected use conditions, testing of data mode for body-worn compliance is not required.

A conservative minimum test separation distance for supporting off-the-shelf body-worn accessories that may be acquired by users of consumer handsets is used to test for body-worn accessory SAR compliance. This distance is determined by the handset manufacturer, according to the requirements of Supplement C 01-01. Devices that are designed to operate on the body of users using lanyards and straps, or without requiring additional body-worn accessories, will be tested using a conservative minimum test separation distance ≤ 5 mm to support compliance.

6.2. EUT Testing Position

The wireless router device is tested for SAR compliance in body configurations described in the following subsections.

A test separation of 0 mm is required. SAR must be measured for all sides and surfaces with a transmitting antenna located within 25 mm from that surface or edge, for the data modes, wireless technologies and frequency bands supporting hotspot mode. The standalone SAR results in each device test orientation must be analyzed for the applicable hotspot mode simultaneous transmission configurations to determine SAR test exclusion and volume scan requirements. The simultaneous transmission configurations must be clearly described in the SAR report to support the analyses or test results. When the device form factor is smaller than 9 cm x 5 cm, unless a test separation distance of 5 mm or less is used a KDB inquiry is required to determine the acceptable test distance.

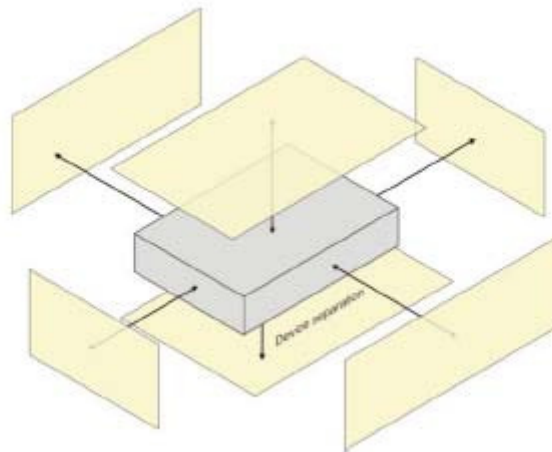

The SAR testing required mode is listed as below.

| Antenna | Front Face | Rear Face | Top Side | Bottom Side | Left Side | Right Side |
|---------|------------|-----------|----------|-------------|-----------|------------|
| WLAN | | | √ | √ | | √ |

Note: When surface or edge with distance antenna is greater than 25mm that exempted from SAR evaluation.

6.3. Tissue Calibration Result

The dielectric parameters of the liquids were verified prior to the SAR evaluation using Aligent Dielectric Probe Kit and Aligent E5071C Vector Network Analyzer.

| Body Tissue Simulate Measurement | | | | | |
|----------------------------------|---------------------------------|-----------------------|--|----------------|-------------------|
| Frequency [MHz] | Description | Dielectric Parameters | | | Tissue Temp. [°C] |
| | | ϵ_r | | σ [s/m] | |
| 2450MHz | Reference result ± 5% window | 52.70 | | 1.95 | N/A |
| | | 50.065 to 55.335 | | 1.853 to 2.048 | |
| | 2017. 03. 08 | 53.461 | | 2.036 | 22.1 |

| Body Tissue Simulate Measurement | | | | | |
|----------------------------------|---------------------------------|-----------------------|--|----------------|-------------------|
| Frequency [MHz] | Description | Dielectric Parameters | | | Tissue Temp. [°C] |
| | | ϵ_r | | σ [s/m] | |
| 5200MHz | Reference result ± 5% window | 49.01 | | 5.299 | N/A |
| | | 46.560 to 51.461 | | 5.034 to 5.564 | |
| | 2017. 03. 09 | 47.596 | | 5.34 | 22.2 |

| Body Tissue Simulate Measurement | | | | | |
|----------------------------------|---------------------------------|-----------------------|--|----------------|-------------------|
| Frequency [MHz] | Description | Dielectric Parameters | | | Tissue Temp. [°C] |
| | | ϵ_r | | σ [s/m] | |
| 5500MHz | Reference result ± 5% window | 48.61 | | 5.650 | N/A |
| | | 46.180 to 51.041 | | 5.368 to 5.933 | |
| | 2017. 03. 13 | 49.944 | | 5.753 | 22.1 |

| Body Tissue Simulate Measurement | | | | | |
|----------------------------------|---------------------------------|-----------------------|--|----------------|-------------------|
| Frequency [MHz] | Description | Dielectric Parameters | | | Tissue Temp. [°C] |
| | | ϵ_r | | σ [s/m] | |
| 5800MHz | Reference result ± 5% window | 48.20 | | 6.00 | N/A |
| | | 45.790 to 50.610 | | 5.700 to 6.300 | |
| | 2017. 03. 10 | 46.419 | | 6.163 | 22.3 |

6.4. SAR Exposure Limits

SAR assessments have been made in line with the requirements of IEEE-1528, FCC Supplement C, and comply with ANSI/IEEE C95.1-1992 “Uncontrolled Environments” limits. These limits apply to a location which is deemed as “Uncontrolled Environment” which can be described as a situation where the general public may be exposed to an RF source with no prior knowledge or control over their exposure.

Limits for General Population/Uncontrolled Exposure (W/kg)

| Type Exposure | Uncontrolled Environment Limit |
|---|--------------------------------|
| Spatial Peak SAR (1g cube tissue for brain or body) | 1.60 W/kg |
| Spatial Average SAR (whole body) | 0.08 W/kg |
| Spatial Peak SAR (10g for hands, feet, ankles and wrist) | 4.00 W/kg |

6.5. Conducted Power Measurement

6.5.1. For WLAN Function


| Type of Network | Channel | Frequency (MHz) | Average Output Power (dBm) | Tune-Up Limit | Scale Factor | |
|-----------------|-----------------|-----------------|----------------------------|---------------|--------------|-----|
| 802.11b | CH 1 | 2412 | 20.64 | 21.00 | --- | |
| | CH 6 | 2437 | 20.97 | 21.20 | --- | |
| | CH 11 | 2462 | 21.22 | 21.50 | 1.07 | |
| 802.11g | CH 1 | 2412 | 16.51 | 17.00 | --- | |
| | CH 2 | 2417 | 21.34 | 21.50 | --- | |
| | CH 6 | 2437 | 21.56 | 22.00 | 1.11 | |
| | CH 10 | 2457 | 21.33 | 21.50 | --- | |
| | CH 11 | 2462 | 15.99 | 16.50 | --- | |
| 802.11n-HT20 | CH 1 | 2412 | 16.69 | 17.00 | --- | |
| | CH 2 | 2417 | 21.34 | 21.50 | --- | |
| | CH 6 | 2437 | 21.52 | 22.00 | --- | |
| | CH 10 | 2457 | 21.48 | 21.90 | --- | |
| | CH 11 | 2462 | 15.34 | 15.60 | --- | |
| 802.11n-HT40 | CH 3 | 2422 | 14.76 | 15.00 | --- | |
| | CH 4 | 2427 | 17.43 | 17.80 | --- | |
| | CH 6 | 2437 | 17.56 | 18.00 | --- | |
| | CH 8 | 2447 | 17.76 | 18.00 | --- | |
| | CH 9 | 2452 | 11.47 | 12.00 | --- | |
| 802.11a | UNII Band I | CH 36 | 5180 | 16.96 | 17.50 | --- |
| | | CH 40 | 5200 | 17.71 | 18.20 | --- |
| | | CH 48 | 5240 | 17.68 | 18.00 | --- |
| | UNII Band II-2A | CH 52 | 5260 | 18.31 | 18.50 | --- |
| | | CH 60 | 5300 | 18.22 | 18.50 | --- |
| | | CH 64 | 5320 | 16.37 | 16.50 | --- |
| | UNII Band II-2C | CH 100 | 5500 | 16.27 | 16.50 | --- |
| | | CH 120 | 5600 | 17.95 | 18.50 | --- |
| | | CH 140 | 5700 | 15.96 | 16.50 | --- |
| | | CH 144 | 5720 | 15.56 | 16.00 | --- |
| | UNII Band III | CH 144 | 5720 | 8.20 | 8.50 | --- |
| | | CH 149 | 5745 | 16.60 | 17.00 | --- |
| | | CH 157 | 5785 | 18.11 | 18.50 | --- |
| CH 165 | | 5825 | 17.97 | 18.40 | --- | |

Note: 1. Scale factor is applied to calculated scale SAR presented in section 6.7.
2. Scale factor not listed for channels are exempted from SAR testing.

| Type of Network | | Channel | Frequency (MHz) | Average Output Power (dBm) | Tune-Up Limit | Scale Factor |
|-----------------|-----------------|---------|-----------------|----------------------------|---------------|--------------|
| 802.11ac-VHT20 | UNII Band I | CH 36 | 5180 | 19.12 | 19.50 | --- |
| | | CH 40 | 5200 | 19.48 | 19.80 | 1.08 |
| | | CH 48 | 5240 | 20.07 | 20.50 | 1.10 |
| | UNII Band II-2A | CH 52 | 5260 | 19.75 | 20.00 | 1.06 |
| | | CH 60 | 5300 | 19.35 | 19.50 | 1.04 |
| | | CH 64 | 5320 | 18.86 | 19.10 | --- |
| | UNII Band II-2C | CH 100 | 5500 | 18.11 | 18.50 | --- |
| | | CH 120 | 5600 | 19.04 | 19.50 | --- |
| | | CH 140 | 5700 | 17.70 | 18.00 | --- |
| | | CH 144 | 5720 | 16.97 | 17.20 | --- |
| | UNII Band III | CH 144 | 5720 | 11.45 | 12.00 | --- |
| | | CH 149 | 5745 | 18.12 | 18.50 | --- |
| | | CH 157 | 5785 | 18.69 | 19.00 | 1.07 |
| | | CH 165 | 5825 | 19.34 | 19.50 | 1.04 |
| 802.11ac-VHT40 | UNII Band I | CH 38 | 5190 | 13.43 | 13.80 | --- |
| | | CH 46 | 5230 | 19.13 | 19.50 | --- |
| | UNII Band II-2A | CH 54 | 5270 | 18.99 | 19.30 | --- |
| | | CH 62 | 5310 | 14.17 | 14.50 | --- |
| | UNII Band II-2C | CH 102 | 5510 | 14.22 | 14.50 | --- |
| | | CH 118 | 5590 | 19.02 | 19.50 | --- |
| | | CH 134 | 5670 | 17.94 | 18.50 | --- |
| | | CH 142 | 5710 | 17.95 | 18.50 | --- |
| | UNII Band III | CH 142 | 5710 | 8.06 | 8.50 | --- |
| | | CH 151 | 5755 | 17.29 | 17.50 | --- |
| CH 159 | | 5795 | 18.57 | 19.00 | --- | |
| 802.11ac-VHT80 | UNII Band I | CH 52 | 5210 | 13.25 | 13.50 | --- |
| | UNII Band II-2A | CH 58 | 5290 | 15.43 | 16.00 | --- |
| | UNII Band II-2C | CH 106 | 5530 | 13.53 | 14.00 | --- |
| | | CH 133 | 5610 | 19.69 | 20.00 | 1.07 |
| | | CH 138 | 5690 | 19.52 | 20.00 | 1.12 |
| | UNII Band III | CH 138 | 5690 | 5.95 | 6.50 | --- |
| CH 155 | | 5775 | 16.98 | 17.30 | --- | |

Note: 1. Scale factor is applied to calculated scale SAR presented in section 6.7.
 2. Scale factor not listed for channels are exempted from SAR testing.

6.6. Exposure Positions Consideration

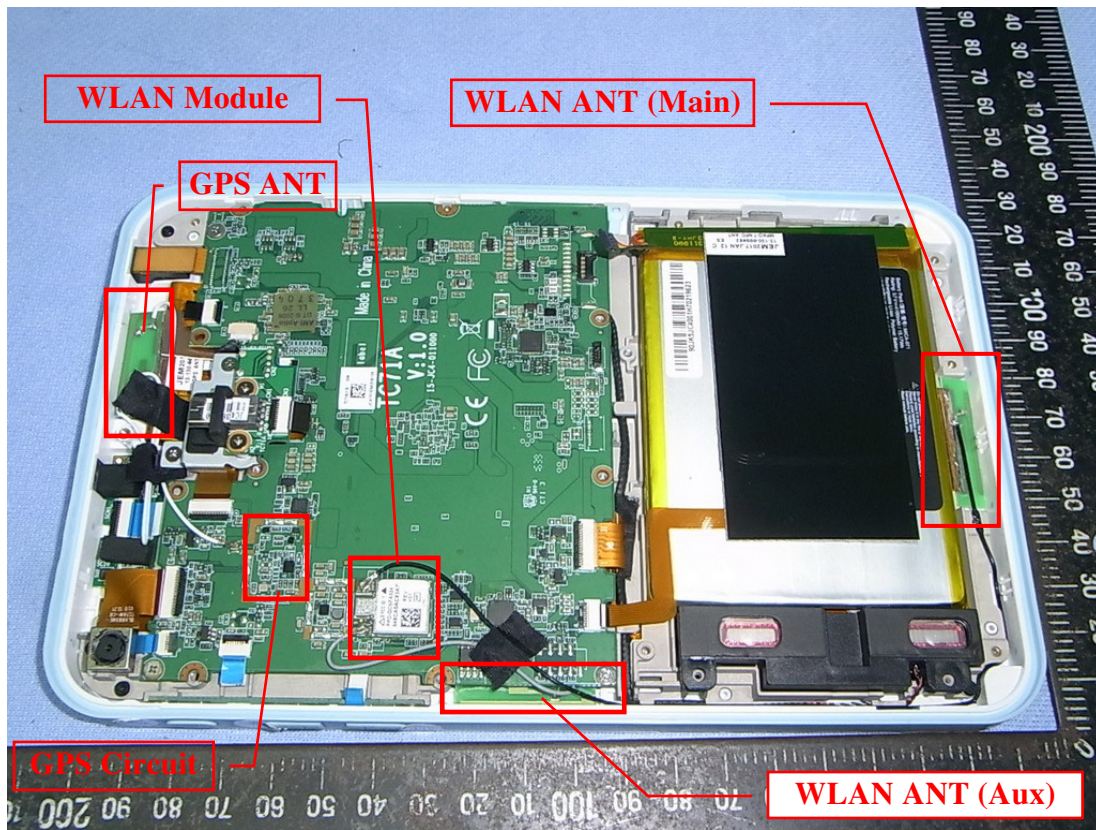

6.7. SAR Test Result

| | | | |
|--------------|---|------------|----------|
| Test Date | 2017/03/08 | Temp./Hum. | 23°C/55% |
| Test Voltage | AC 120V, 60Hz (with Docking via AC Adapter) | | |

| Liquid Temperature : 22.1°C | | | | Depth of Liquid: > 15cm | | | | |
|-----------------------------|---------------------|-----------------------------|-----------|--------------------------|------------------|-----------------|--------------|-----------------|
| Test Mode: 2.4GHz | | | | | | | | |
| Test Position: Body | Antenna Position | Separation Distance (cm) | Frequency | Conducted power (dBm) | SAR 1g (W/kg) | Scale Factor | Scale SAR | Limit (W/kg) |
| 802.11b | | | | | | | | |
| Antenna: Main | | | | | | | | |
| Back | Fixed | 0 | 2462 | 21.22 | 0.042 | 1.07 | 0.04 | 1.6 |
| Right | Fixed | 0 | 2462 | 21.22 | 0.332 | 1.07 | 0.35 | 1.6 |
| Antenna: AUX | | | | | | | | |
| Back | Fixed | 0 | 2462 | 21.22 | 0.014 | 1.07 | 0.01 | 1.6 |
| Top | Fixed | 0 | 2462 | 21.22 | 0.302 | 1.07 | 0.32 | 1.6 |
| 802.11g | | | | | | | | |
| Antenna: Main | | | | | | | | |
| Back | Fixed | 0 | 2437 | 21.56 | 0.066 | 1.11 | 0.07 | 1.6 |
| Right | Fixed | 0 | 2437 | 21.56 | 0.267 | 1.11 | 0.30 | 1.6 |
| Antenna: AUX | | | | | | | | |
| Back | Fixed | 0 | 2437 | 21.56 | 0.013 | 1.11 | 0.01 | 1.6 |
| Top | Fixed | 0 | 2437 | 21.56 | 0.184 | 1.11 | 0.20 | 1.6 |

| | | | |
|--------------|---|------------|----------|
| Test Date | 2017/03/09 | Temp./Hum. | 23°C/55% |
| Test Voltage | AC 120V, 60Hz (with Docking via AC Adapter) | | |

| Liquid Temperature : 22.2°C | | | | Depth of Liquid: > 15cm | | | | |
|---|---------------------|-----------------------------|-----------|--------------------------|------------------|-----------------|--------------|-----------------|
| Test Mode: 5GHz | | | | | | | | |
| Test Position: Body | Antenna Position | Separation Distance (cm) | Frequency | Conducted power (dBm) | SAR 1g (W/kg) | Scale Factor | Scale SAR | Limit (W/kg) |
| 802.11ac-VHT20 (UNII Band I) | | | | | | | | |
| Main Antenna | | | | | | | | |
| Back | Fixed | 0 | 5240 | 20.07 | 0.094 | 1.10 | 0.10 | 1.6 |
| Right | Fixed | 0 | 5240 | 20.07 | 0.781 | 1.10 | 0.86 | 1.6 |
| Right | Fixed | 0 | 5200 | 19.48 | 0.685 | 1.08 | 0.74 | 1.6 |
| AUX Antenna | | | | | | | | |
| Back | Fixed | 0 | 5240 | 20.07 | 0.019 | 1.10 | 0.02 | 1.6 |
| Top | Fixed | 0 | 5240 | 20.07 | 0.253 | 1.10 | 0.28 | 1.6 |
| 802.11ac-VHT20 (UNII Band II-2A) | | | | | | | | |
| Main Antenna | | | | | | | | |
| Back | Fixed | 0 | 5260 | 19.75 | 0.095 | 1.06 | 0.10 | 1.6 |
| Right | Fixed | 0 | 5260 | 19.75 | 0.613 | 1.06 | 0.65 | 1.6 |
| Right | Fixed | 0 | 5300 | 0.500 | 0.500 | 1.04 | 0.52 | 1.6 |
| AUX Antenna | | | | | | | | |
| Back | Fixed | 0 | 5260 | 19.75 | 0.014 | 1.06 | 0.01 | 1.6 |
| Top | Fixed | 0 | 5260 | 19.75 | 0.218 | 1.06 | 0.23 | 1.6 |

| | | | |
|--------------|---|------------|----------|
| Test Date | 2017/03/13 | Temp./Hum. | 22°C/54% |
| Test Voltage | AC 120V, 60Hz (with Docking via AC Adapter) | | |

| | | | | | | | | |
|---|---------------------|-----------------------------|-----------|--------------------------|------------------|-----------------|--------------|-----------------|
| Liquid Temperature : 22.1°C | | | | Depth of Liquid: > 15cm | | | | |
| Test Mode: 5GHz | | | | | | | | |
| Test Position: Body | Antenna Position | Separation Distance (cm) | Frequency | Conducted power (dBm) | SAR 1g (W/kg) | Scale Factor | Scale SAR | Limit (W/kg) |
| 802.11ac-VHT80 (UNII Band II-2C) | | | | | | | | |
| Main Antenna | | | | | | | | |
| Back | Fixed | 0 | 5610 | 19.69 | 0.198 | 1.07 | 0.21 | 1.6 |
| Right | Fixed | 0 | 5610 | 19.69 | 0.438 | 1.07 | 0.47 | 1.6 |
| Right | Fixed | 0 | 5690 | 19.52 | 0.503 | 1.12 | 0.56 | 1.6 |
| AUX Antenna | | | | | | | | |
| Back | Fixed | 0 | 5610 | 19.69 | 0.041 | 1.07 | 0.04 | 1.6 |
| Top | Fixed | 0 | 5610 | 19.69 | 0.363 | 1.07 | 0.39 | 1.6 |

| | | | |
|--------------|---|------------|----------|
| Test Date | 2017/03/10 | Temp./Hum. | 23°C/54% |
| Test Voltage | AC 120V, 60Hz (with Docking via AC Adapter) | | |

| Liquid Temperature : 22.3°C | | | | Depth of Liquid: > 15cm | | | | |
|---------------------------------------|---------------------|-----------------------------|-----------|--------------------------|------------------|-----------------|--------------|-----------------|
| Test Mode: 5GHz | | | | | | | | |
| Test Position: Body | Antenna Position | Separation Distance (cm) | Frequency | Conducted power (dBm) | SAR 1g (W/kg) | Scale Factor | Scale SAR | Limit (W/kg) |
| 802.11ac-VHT20 (UNII Band III) | | | | | | | | |
| Main Antenna | | | | | | | | |
| Back | Fixed | 0 | 5825 | 19.34 | 0.201 | 1.04 | 0.21 | 1.6 |
| Right | Fixed | 0 | 5825 | 19.34 | 0.423 | 1.04 | 0.15 | 1.6 |
| Back with Case | Fixed | 0 | 5825 | 19.34 | 0.157 | 1.04 | 0.16 | 1.6 |
| AUX Antenna | | | | | | | | |
| Back | Fixed | 0 | 5825 | 19.34 | 0.055 | 1.04 | 0.06 | 1.6 |
| Top | Fixed | 0 | 5825 | 19.34 | 0.557 | 1.04 | 0.28 | 1.6 |
| Top | Fixed | 0 | 5785 | 18.69 | 0.480 | 1.07 | 0.52 | 1.6 |
| Back with Case | Fixed | 0 | 5825 | 19.34 | 0.027 | 1.04 | 0.03 | 1.6 |



Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan

APPENDIX A

Tel: +886 2 26099301
Fax: +886 2 26099303

APPENDIX A

GRAPH RESULT

(Model: mPAD2-7-CHT4-I)

Date: 3/8/2017

Test Laboratory: Audix_SAR Lab

P01 Wi-Fi 802.11b CH 11 2462MHz Back Main

DUT: mPAD2-7-CHT4-I

Communication System: UID 0, WIFI 2.4G 802.11B (0); Frequency: 2462 MHz;Duty Cycle:1:1.010

Medium parameters used: $f = 2462$ MHz; $\sigma = 2.046$ S/m; $\epsilon_r = 53.426$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3855; ConvF(7.54, 7.54, 7.54); Calibrated: 9/30/2016;
- Sensor-Surface: 2mm (Mechanical Surface Detection), Sensor-Surface: 4mm (Mechanical Surface Detection), $z = -19.0, 31.0$
- Electronics: DAE4 Sn1337; Calibrated: 9/28/2016
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1170
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Area Scan (9x5x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (measured) = 0.0519 W/kg


Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 0.4870 V/m; Power Drift = 1.02 dB

Peak SAR (extrapolated) = 0.0730 W/kg

SAR(1 g) = 0.042 W/kg; SAR(10 g) = 0.022 W/kg

Maximum value of SAR (measured) = 0.0477 W/kg

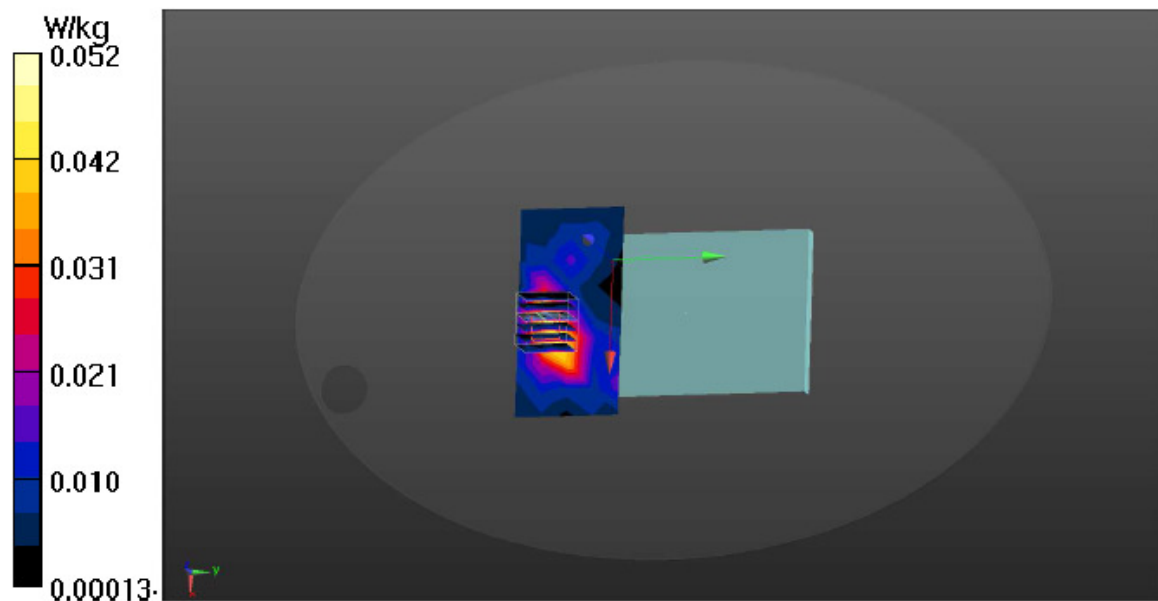

Date: 3/8/2017

Test Laboratory: Audix_SAR Lab

P04 Wi-Fi 802.11b CH 11 2462MHz Main Right

DUT: mPAD2-7-CHT4-I

Communication System: UID 0, WIFI 2.4G 802.11B (0); Frequency: 2462 MHz:Duty Cycle:1:1.010

Medium parameters used: $f = 2462$ MHz; $\sigma = 2.046$ S/m; $\epsilon_r = 53.426$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3855; ConvF(7.54, 7.54, 7.54); Calibrated: 9/30/2016;
- Sensor-Surface: 2mm (Mechanical Surface Detection), Sensor-Surface: 4mm (Mechanical Surface Detection), $z = -19.0, 31.0$
- Electronics: DAE4 Sn1337; Calibrated: 9/28/2016
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1170
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Area Scan (5x9x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (measured) = 0.241 W/kg


Zoom Scan (6x8x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.681 V/m; Power Drift = 0.41 dB

Peak SAR (extrapolated) = 0.887 W/kg

SAR(1 g) = 0.332 W/kg; SAR(10 g) = 0.116 W/kg

Maximum value of SAR (measured) = 0.379 W/kg

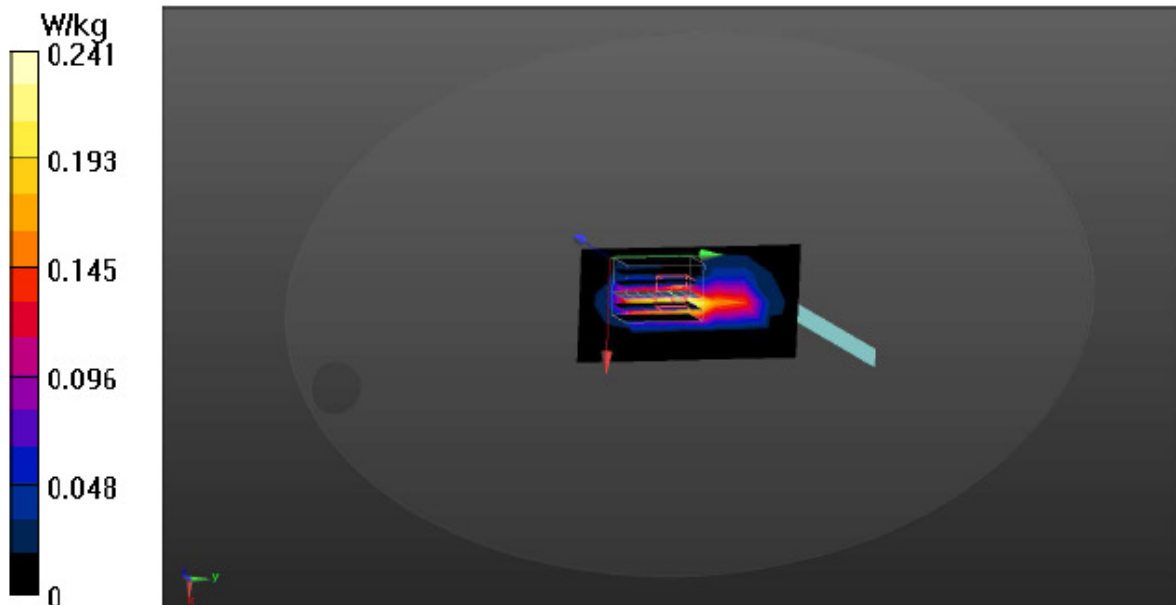

Date: 3/8/2017

Test Laboratory: Audix_SAR Lab

P02 Wi-Fi 802.11b CH 11 2462MHz Aux Back

DUT: mPAD2-7-CHT4-I


Communication System: UID 0, WIFI 2.4G 802.11B (0); Frequency: 2462 MHz;Duty Cycle:1:1.010
 Medium parameters used: $f = 2462 \text{ MHz}$; $\sigma = 2.046 \text{ S/m}$; $\epsilon_r = 53.426$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3855; ConvF(7.54, 7.54, 7.54); Calibrated: 9/30/2016;
- Sensor-Surface: 2mm (Mechanical Surface Detection), Sensor-Surface: 4mm (Mechanical Surface Detection), $z = -19.0, 31.0$
- Electronics: DAE4 Sn1337; Calibrated: 9/28/2016
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1170
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Area Scan (9x12x1): Measurement grid: $dx=20\text{mm}$, $dy=20\text{mm}$
 Maximum value of SAR (measured) = 0.0184 W/kg

Zoom Scan (6x6x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 1.608 V/m; Power Drift = 0.20 dB
 Peak SAR (extrapolated) = 0.0250 W/kg
SAR(1 g) = 0.014 W/kg; SAR(10 g) = 0.00805 W/kg
 Maximum value of SAR (measured) = 0.0166 W/kg

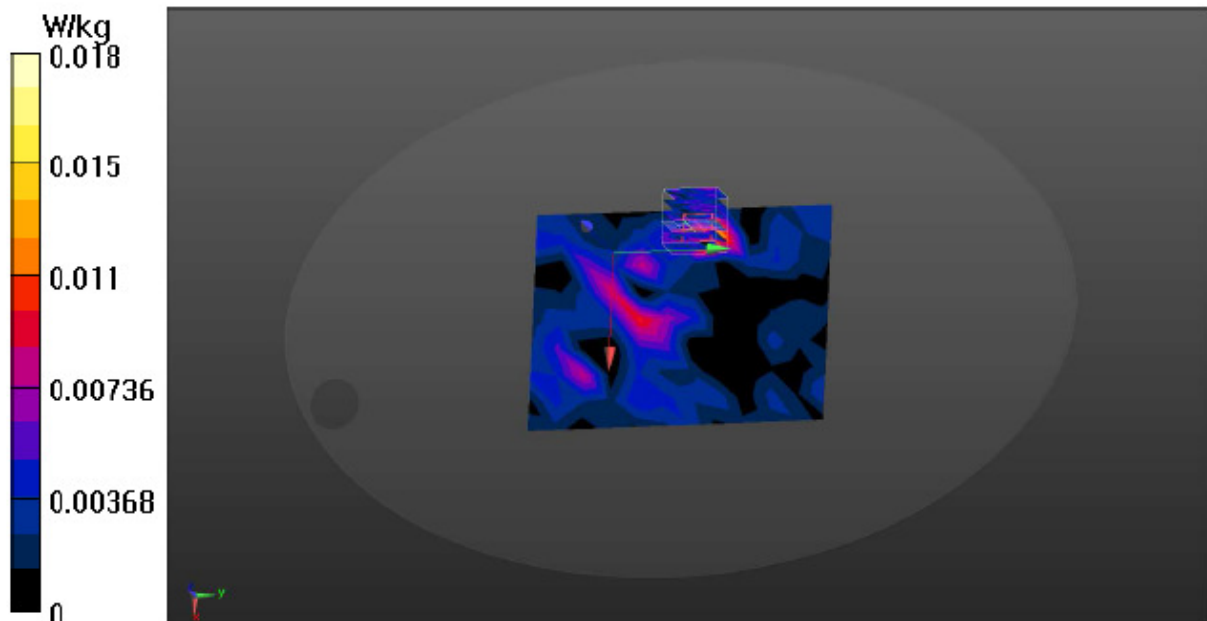

Date: 3/8/2017

Test Laboratory: Audix_SAR Lab

P03 Wi-Fi 802.11b CH 11 2462MHz Aux Top

DUT: mPAD2-7-CHT4-I

Communication System: UID 0, WIFI 2.4G 802.11B (0); Frequency: 2462 MHz;Duty Cycle:1:1.010

Medium parameters used: $f = 2462 \text{ MHz}$; $\sigma = 2.046 \text{ S/m}$; $\epsilon_r = 53.426$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3855; ConvF(7.54, 7.54, 7.54); Calibrated: 9/30/2016;
- Sensor-Surface: 2mm (Mechanical Surface Detection), Sensor-Surface: 4mm (Mechanical Surface Detection), $z = -19.0, 31.0$
- Electronics: DAE4 Sn1337; Calibrated: 9/28/2016
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1170
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Area Scan (5x12x1): Measurement grid: $dx=20\text{mm}$, $dy=20\text{mm}$

Maximum value of SAR (measured) = 0.393 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 9.390 V/m; Power Drift = 0.57 dB

Peak SAR (extrapolated) = 0.756 W/kg

SAR(1 g) = 0.302 W/kg; SAR(10 g) = 0.116 W/kg

Maximum value of SAR (measured) = 0.357 W/kg

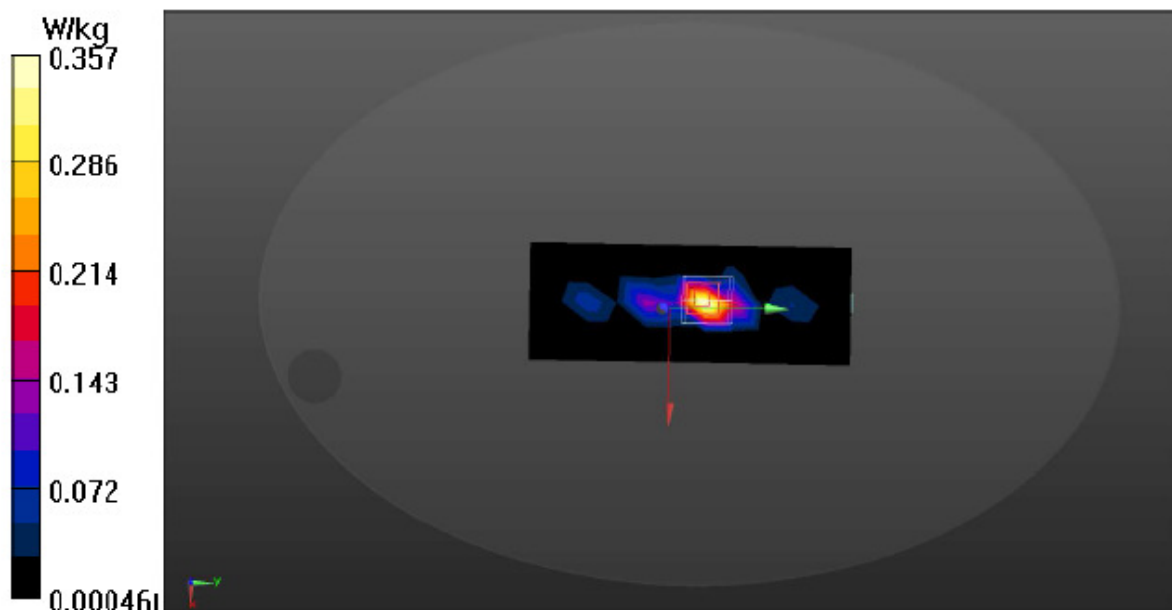

Date: 3/8/2017

Test Laboratory: Audix_SAR Lab

P40 Wi-Fi 802.11g CH 6 2437MHz Back Main

DUT: mPAD2-7-CHT4-I

Communication System: UID 0, WIFI 2.4G 802.11G (0); Frequency: 2437 MHz; Duty Cycle: 1:1.053

Medium parameters used: $f = 2437$ MHz; $\sigma = 2.018$ S/m; $\epsilon_r = 53.499$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3855; ConvF(7.54, 7.54, 7.54); Calibrated: 9/30/2016;
- Sensor-Surface: 2mm (Mechanical Surface Detection), Sensor-Surface: 4mm (Mechanical Surface Detection), $z = -19.0, 31.0$
- Electronics: DAE4 Sn1337; Calibrated: 9/28/2016
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1170
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Area Scan (9x5x1): Measurement grid: $dx=20$ mm, $dy=20$ mm

Maximum value of SAR (measured) = 0.0807 W/kg


Zoom Scan (6x6x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 1.923 V/m; Power Drift = 1.21 dB

Peak SAR (extrapolated) = 0.134 W/kg

SAR(1 g) = 0.066 W/kg; SAR(10 g) = 0.034 W/kg

Maximum value of SAR (measured) = 0.0725 W/kg

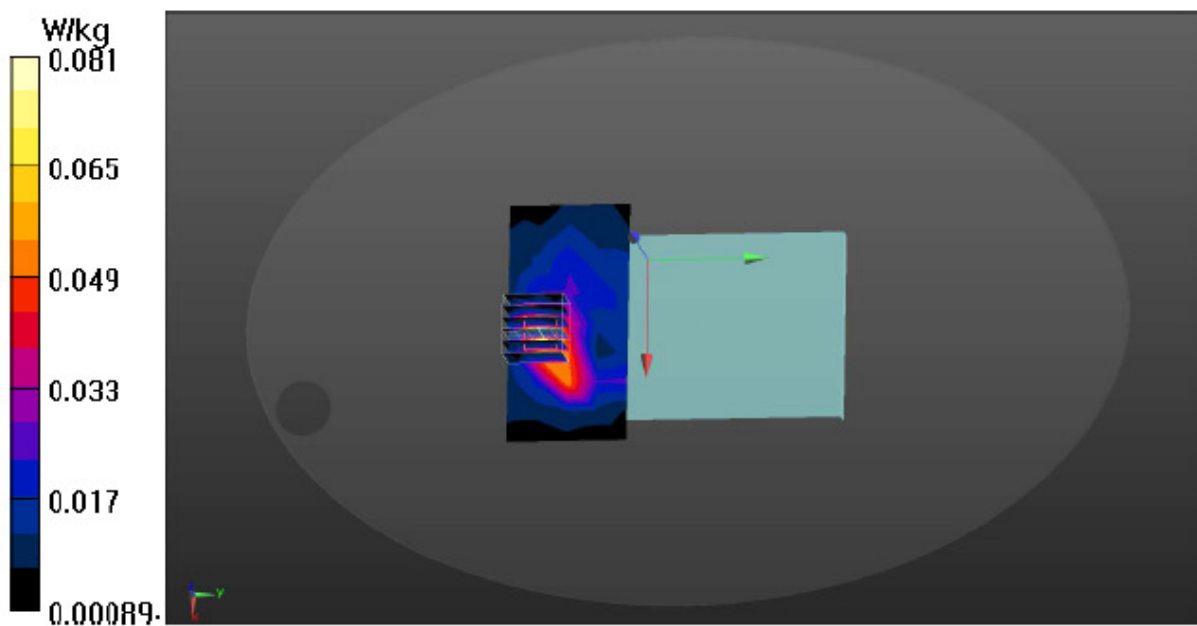

Date: 3/8/2017

Test Laboratory: Audix_SAR Lab

P42 Wi-Fi 802.11g CH 6 2437MHz Right Main

DUT: mPAD2-7-CHT4-I

Communication System: UID 0, WIFI 2.4G 802.11G (0); Frequency: 2437 MHz; Duty Cycle: 1:1.053

Medium parameters used: $f = 2437$ MHz; $\sigma = 2.018$ S/m; $\epsilon_r = 53.499$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3855; ConvF(7.54, 7.54, 7.54); Calibrated: 9/30/2016;
- Sensor-Surface: 2mm (Mechanical Surface Detection), Sensor-Surface: 4mm (Mechanical Surface Detection), $z = -19.0, 31.0$
- Electronics: DAE4 Sn1337; Calibrated: 9/28/2016
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1170
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Area Scan (5x9x1): Measurement grid: $dx=20$ mm, $dy=20$ mm

Maximum value of SAR (measured) = 0.253 W/kg


Zoom Scan (6x6x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 9.510 V/m; Power Drift = 0.58 dB

Peak SAR (extrapolated) = 0.670 W/kg

SAR(1 g) = 0.267 W/kg; SAR(10 g) = 0.095 W/kg

Maximum value of SAR (measured) = 0.312 W/kg

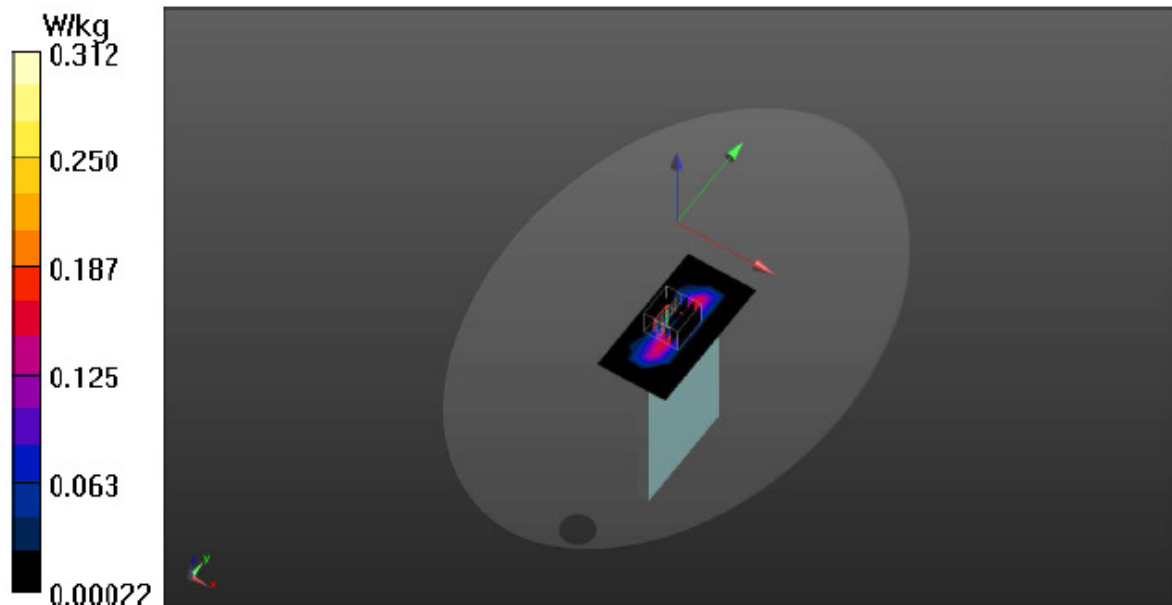

Date: 3/8/2017

Test Laboratory: Audix_SAR Lab

P41 Wi-Fi 802.11g CH 6 2437MHz Back Aux

DUT: mPAD2-7-CHT4-I

Communication System: UID 0, WIFI 2.4G 802.11G (0); Frequency: 2437 MHz; Duty Cycle: 1:1.053

Medium parameters used: $f = 2437$ MHz; $\sigma = 2.018$ S/m; $\epsilon_r = 53.499$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3855; ConvF(7.54, 7.54, 7.54); Calibrated: 9/30/2016;
- Sensor-Surface: 2mm (Mechanical Surface Detection), Sensor-Surface: 4mm (Mechanical Surface Detection), $z = -19.0, 31.0$
- Electronics: DAE4 Sn1337; Calibrated: 9/28/2016
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1170
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Area Scan (7x8x1): Measurement grid: $dx=20$ mm, $dy=20$ mm

Maximum value of SAR (measured) = 0.0130 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 1.856 V/m; Power Drift = 0.78 dB

Peak SAR (extrapolated) = 0.0250 W/kg

SAR(1 g) = 0.013 W/kg; SAR(10 g) = 0.00722 W/kg

Maximum value of SAR (measured) = 0.0141 W/kg

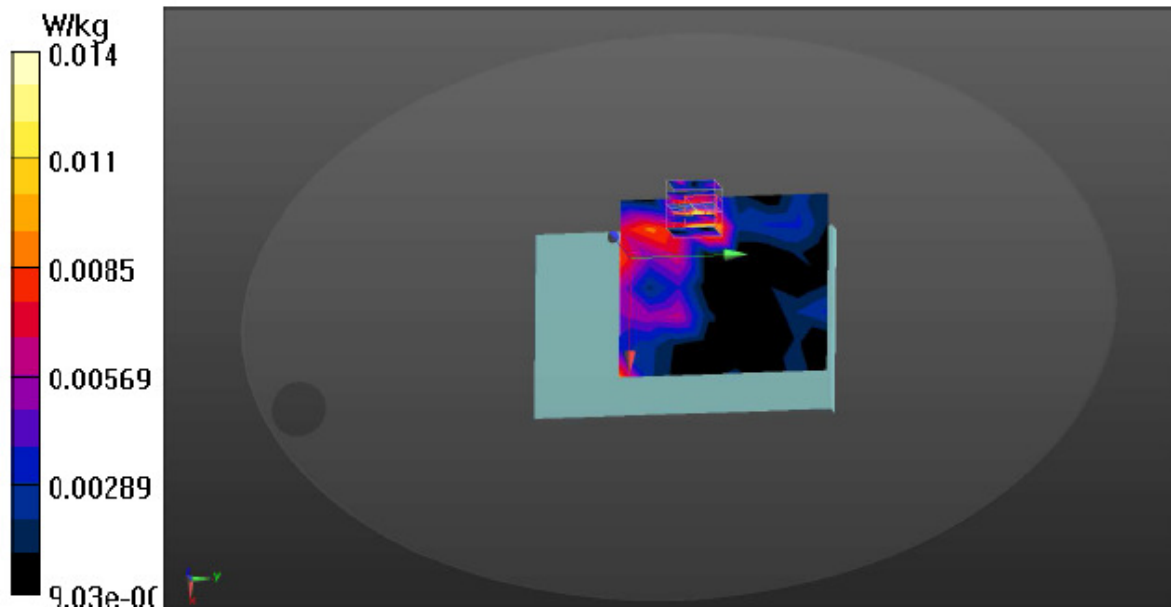

Date: 3/8/2017

Test Laboratory: Audix_SAR Lab

P43 Wi-Fi 802.11g CH 6 2437MHz Top Aux

DUT: mPAD2-7-CHT4-I


Communication System: UID 0, WIFI 2.4G 802.11G (0); Frequency: 2437 MHz;Duty Cycle:1:1.053
 Medium parameters used: $f = 2437$ MHz; $\sigma = 2.018$ S/m; $\epsilon_r = 53.499$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3855; ConvF(7.54, 7.54, 7.54); Calibrated: 9/30/2016;
- Sensor-Surface: 2mm (Mechanical Surface Detection), Sensor-Surface: 4mm (Mechanical Surface Detection), $z = -19.0, 31.0$
- Electronics: DAE4 Sn1337; Calibrated: 9/28/2016
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1170
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Area Scan (5x12x1): Measurement grid: $dx=20$ mm, $dy=20$ mm
 Maximum value of SAR (measured) = 0.309 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm
 Reference Value = 8.485 V/m; Power Drift = 0.23 dB
 Peak SAR (extrapolated) = 0.409 W/kg
SAR(1 g) = 0.184 W/kg; SAR(10 g) = 0.075 W/kg
 Maximum value of SAR (measured) = 0.231 W/kg

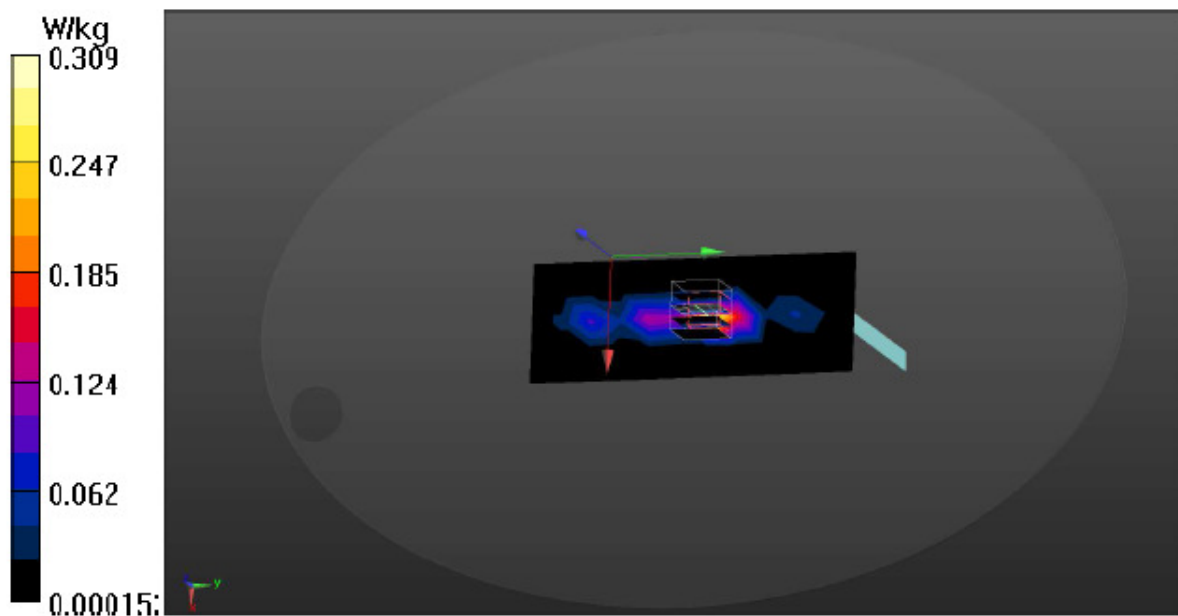

Date: 3/9/2017

Test Laboratory: Audix_SAR Lab

P05 Wi-Fi 802.11ac-VHT20 CH 48 5240MHz Back Main

DUT: mPAD2-7-CHT4-I

Communication System: UID 0, WIFI 5G 802.11VHT_20 (0); Frequency: 5240 MHz; Duty Cycle: 1:1.538

Medium parameters used: $f = 5240$ MHz; $\sigma = 5.386$ S/m; $\epsilon_r = 47.513$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3855; ConvF(4.79, 4.79, 4.79); Calibrated: 9/30/2016;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = -19.0, 31.0$
- Electronics: DAE4 Sn1337; Calibrated: 9/28/2016
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1170
- DASYS2 52.8.8(1258); SEMCAD X 14.6.10(7373)

Area Scan (17x9x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 0.163 W/kg


Zoom Scan (7x7x9)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2.5$ mm

Reference Value = 0 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.346 W/kg

SAR(1 g) = 0.094 W/kg; SAR(10 g) = 0.032 W/kg

Maximum value of SAR (measured) = 0.191 W/kg

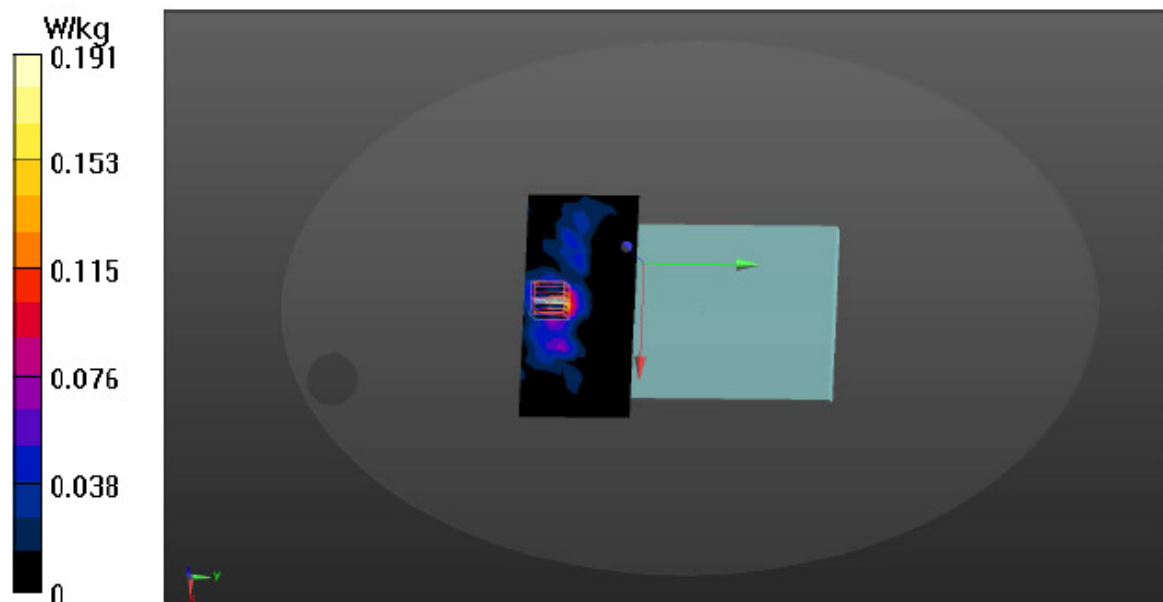

Date: 3/9/2017

Test Laboratory: Audix_SAR Lab

P08 Wi-Fi 802.11ac-VHT20 CH 48 5240MHz Main Right

DUT: mPAD2-7-CHT4-I

Communication System: UID 0, WIFI 5G 802.11VHT_20 (0); Frequency: 5240 MHz;Duty Cycle:1:1.538

Medium parameters used: $f = 5240 \text{ MHz}$; $\sigma = 5.386 \text{ S/m}$; $\epsilon_r = 47.513$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3855; ConvF(4.79, 4.79, 4.79); Calibrated: 9/30/2016;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = -19.0, 31.0$
- Electronics: DAE4 Sn1337; Calibrated: 9/28/2016
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1170
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Area Scan (5x9x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 1.01 W/kg


Zoom Scan (8x8x9)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2.5\text{mm}$

Reference Value = 10.34 V/m; Power Drift = 0.47 dB

Peak SAR (extrapolated) = 3.15 W/kg

SAR(1 g) = 0.781 W/kg; SAR(10 g) = 0.237 W/kg

Maximum value of SAR (measured) = 1.58 W/kg

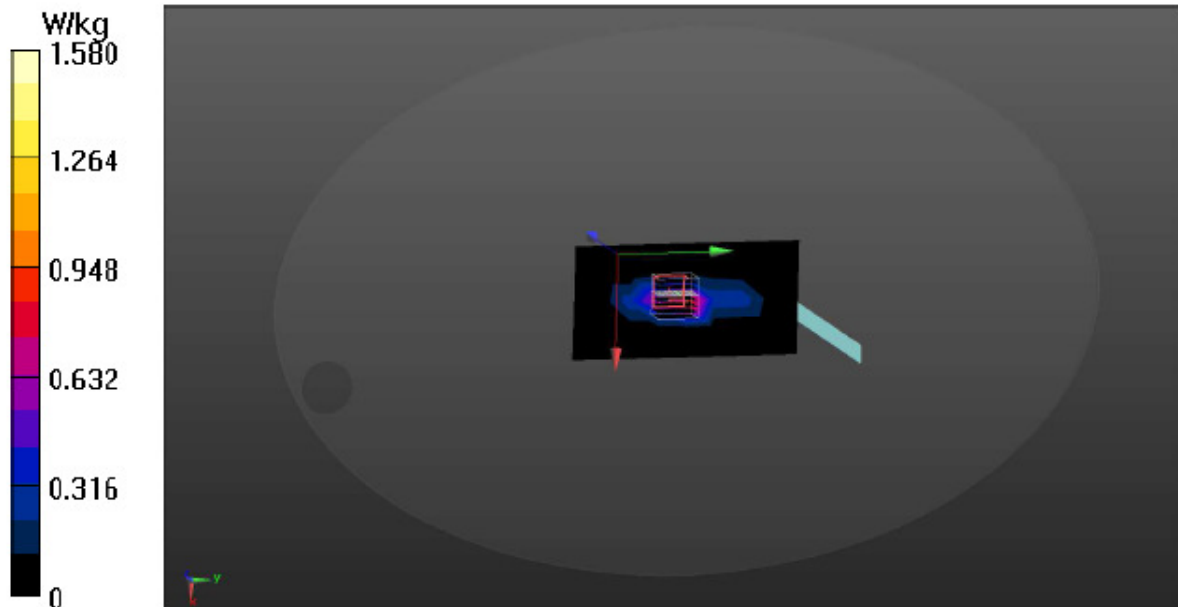

Date: 3/9/2017

Test Laboratory: Audix_SAR Lab

P37 Wi-Fi 802.11ac-VHT20 CH 40 5200MHz Main Right

DUT: mPAD2-7-CHT4-I

Communication System: UID 0, WIFI 5G 802.11VHT_20 (0); Frequency: 5200 MHz;Duty Cycle:1:1.53

Medium parameters used: $f = 5200 \text{ MHz}$; $\sigma = 5.34 \text{ S/m}$; $\epsilon_r = 47.596$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3855; ConvF(4.79, 4.79, 4.79); Calibrated: 9/30/2016;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1337; Calibrated: 9/28/2016
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1170
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Area Scan (9x17x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 0.987 W/kg


Zoom Scan (8x8x9)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2.5\text{mm}$

Reference Value = 10.57 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 2.71 W/kg

SAR(1 g) = 0.685 W/kg; SAR(10 g) = 0.203 W/kg

Maximum value of SAR (measured) = 1.38 W/kg

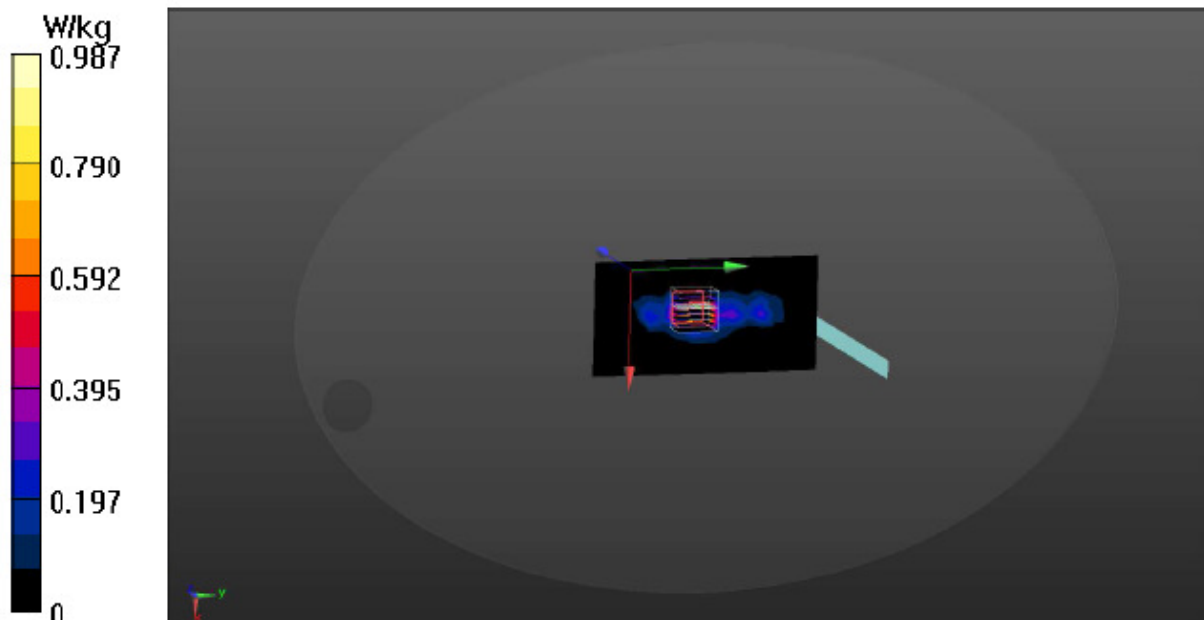

Date: 3/9/2017

Test Laboratory: Audix_SAR Lab

P06 Wi-Fi 802.11ac-VHT20 CH 48 5240MHz Aux Back

DUT: mPAD2-7-CHT4-I

Communication System: UID 0, WIFI 5G 802.11VHT_20 (0); Frequency: 5240 MHz;Duty Cycle:1:1.538

Medium parameters used: $f = 5240$ MHz; $\sigma = 5.386$ S/m; $\epsilon_r = 47.513$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3855; ConvF(4.79, 4.79, 4.79); Calibrated: 9/30/2016;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = -19.0, 31.0$
- Electronics: DAE4 Sn1337; Calibrated: 9/28/2016
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1170
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Area Scan (9x7x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 0.0403 W/kg


Zoom Scan (9x9x9)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2.5$ mm

Reference Value = 0 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.176 W/kg

SAR(1 g) = 0.019 W/kg; SAR(10 g) = 0.00718 W/kg

Maximum value of SAR (measured) = 0.0433 W/kg

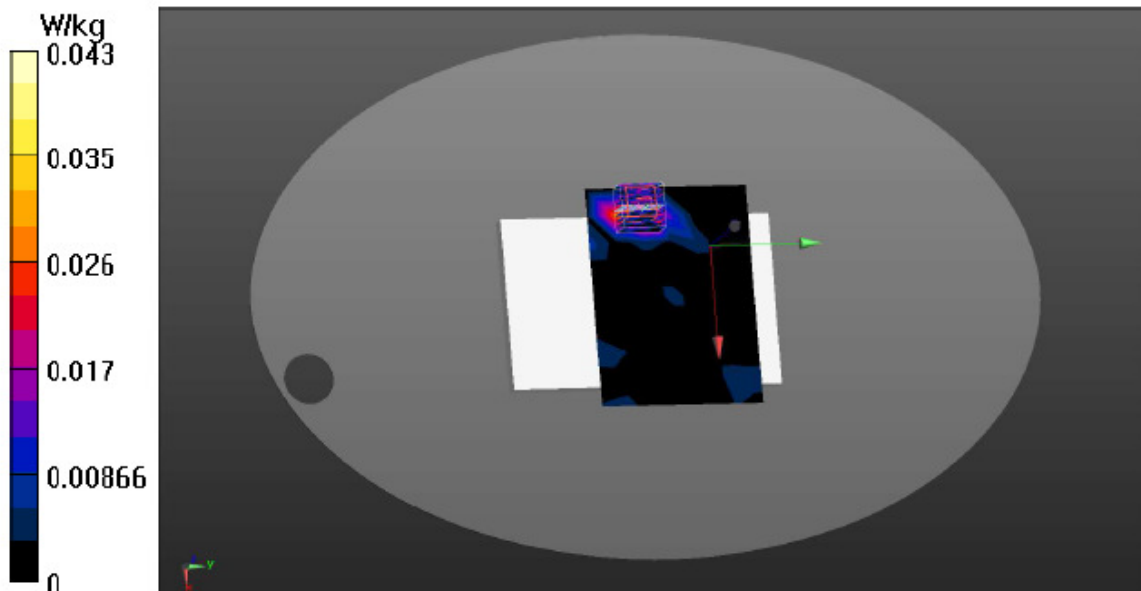

Date: 3/9/2017

Test Laboratory: Audix_SAR Lab

P07 Wi-Fi 802.11ac-VHT20 CH 48 5240MHz Aux Top

DUT: mPAD2-7-CHT4-I

Communication System: UID 0, WIFI 5G 802.11VHT_20 (0); Frequency: 5240 MHz; Duty Cycle: 1:1.538

Medium parameters used: $f = 5240$ MHz; $\sigma = 5.386$ S/m; $\epsilon_r = 47.513$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3855; ConvF(4.79, 4.79, 4.79); Calibrated: 9/30/2016;
- Sensor-Surface: 2mm (Mechanical Surface Detection), Sensor-Surface: 4mm (Mechanical Surface Detection), $z = -19.0, 31.0$
- Electronics: DAE4 Sn1337; Calibrated: 9/28/2016
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1170
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Area Scan (5x12x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 0.339 W/kg


Zoom Scan (9x9x9)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2.5$ mm

Reference Value = 6.799 V/m; Power Drift = 1.32 dB

Peak SAR (extrapolated) = 0.916 W/kg

SAR(1 g) = 0.253 W/kg; SAR(10 g) = 0.073 W/kg

Maximum value of SAR (measured) = 0.300 W/kg

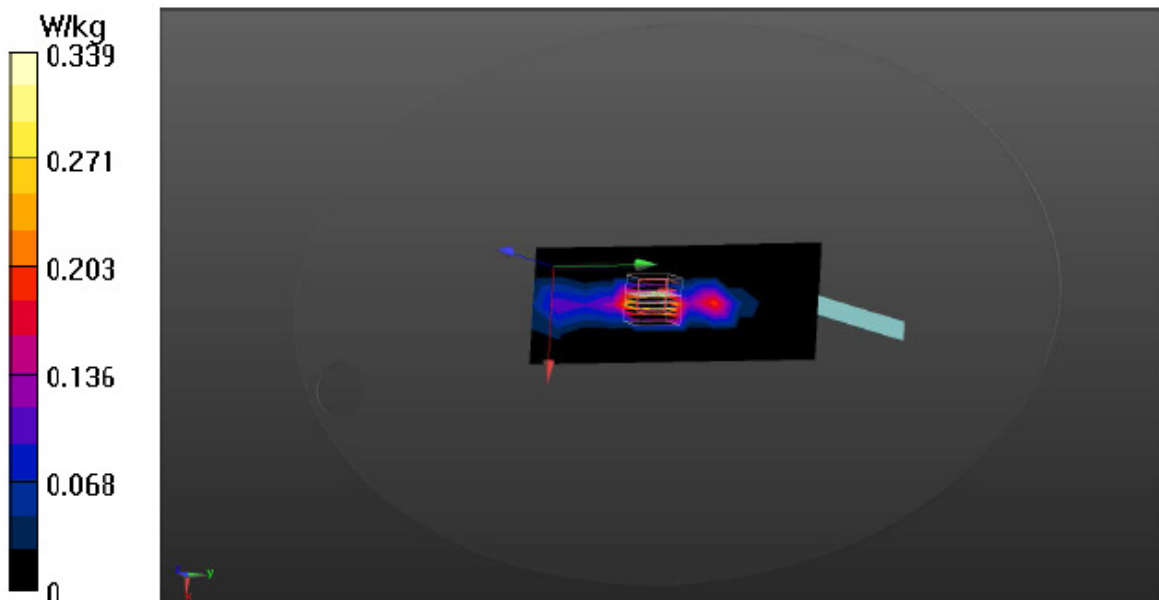

Date: 3/9/2017

Test Laboratory: Audix_SAR Lab

P11 Wi-Fi 802.11ac-VHT20 CH 52 5260MHz Main Back

DUT: mPAD2-7-CHT4-I


Communication System: UID 0, WIFI 5G 802.11VHT_20 (0); Frequency: 5260 MHz; Duty Cycle: 1:1.538
 Medium parameters used: $f = 5260$ MHz; $\sigma = 5.41$ S/m; $\epsilon_r = 47.449$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3855; ConvF(4.48, 4.48, 4.48); Calibrated: 9/30/2016;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = -19.0, 31.0$
- Electronics: DAE4 Sn1337; Calibrated: 9/28/2016
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1170
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Area Scan (9x5x1): Measurement grid: $dx=10$ mm, $dy=10$ mm
 Maximum value of SAR (measured) = 0.158 W/kg

Zoom Scan (7x7x9)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2.5$ mm
 Reference Value = 0 V/m; Power Drift = 0.00 dB
 Peak SAR (extrapolated) = 0.377 W/kg
SAR(1 g) = 0.095 W/kg; SAR(10 g) = 0.025 W/kg
 Maximum value of SAR (measured) = 0.198 W/kg

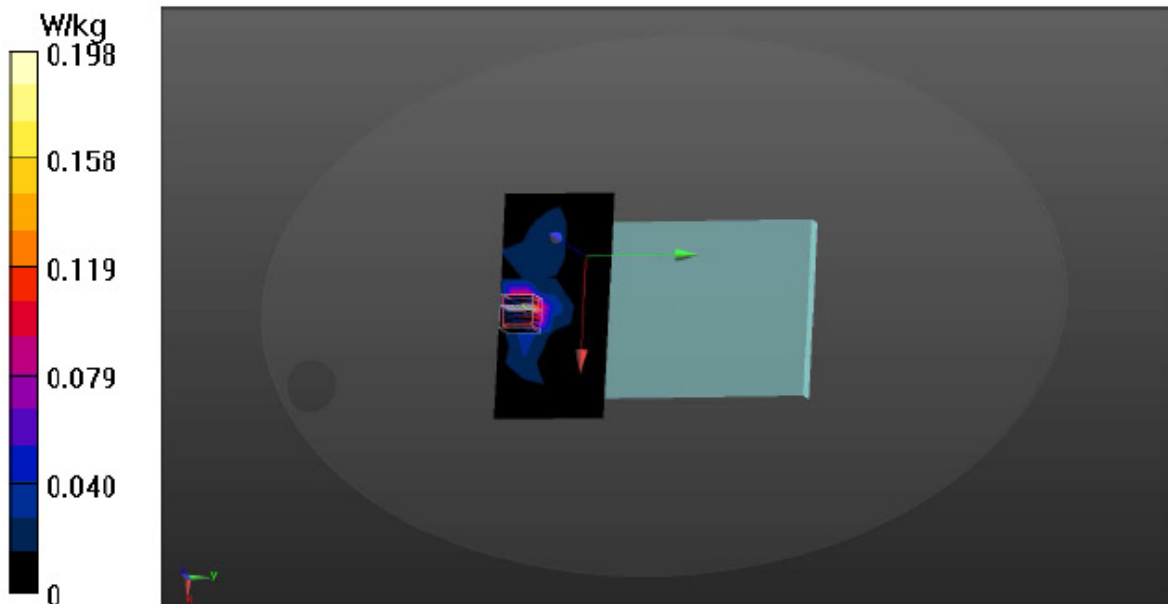

Date: 3/9/2017

Test Laboratory: Audix_SAR Lab

P09 Wi-Fi 802.11ac-VHT20 CH 52 5260MHz Main Right

DUT: mPAD2-7-CHT4-I

Communication System: UID 0, WIFI 5G 802.11VHT_20 (0); Frequency: 5260 MHz; Duty Cycle: 1:1.538

Medium parameters used: $f = 5260 \text{ MHz}$; $\sigma = 5.41 \text{ S/m}$; $\epsilon_r = 47.449$; $\rho = 1000 \text{ kg/m}^3$


Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3855; ConvF(4.48, 4.48, 4.48); Calibrated: 9/30/2016;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = -19.0, 31.0$
- Electronics: DAE4 Sn1337; Calibrated: 9/28/2016
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1170
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Area Scan (5x9x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$
 Maximum value of SAR (measured) = 0.660 W/kg

Zoom Scan (9x9x9)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2.5\text{mm}$
 Reference Value = 6.679 V/m; Power Drift = 0.54 dB
 Peak SAR (extrapolated) = 2.43 W/kg
SAR(1 g) = 0.613 W/kg; SAR(10 g) = 0.184 W/kg
 Maximum value of SAR (measured) = 1.25 W/kg

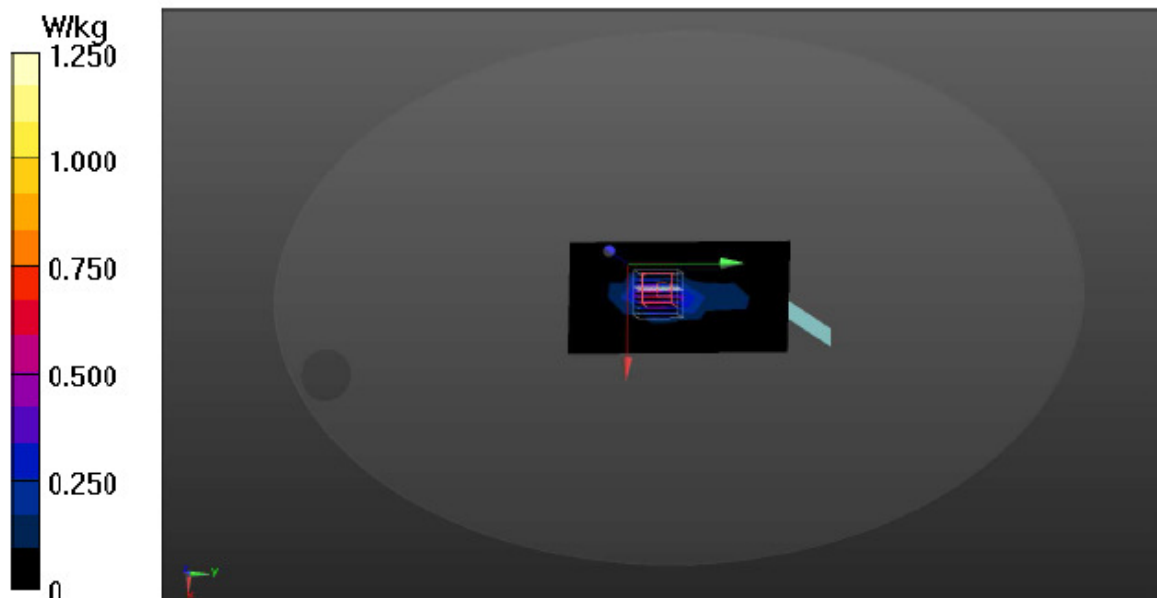

Date: 3/9/2017

Test Laboratory: Audix_SAR Lab

P38 Wi-Fi 802.11ac-VHT20 CH 60 5300MHz Main Right

DUT: mPAD2-7-CHT4-I

Communication System: UID 0, WIFI 5G 802.11VHT_20 (0); Frequency: 5300 MHz; Duty Cycle: 1:1.538

Medium parameters used: $f = 5300$ MHz; $\sigma = 5.481$ S/m; $\epsilon_r = 47.372$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3855; ConvF(4.48, 4.48, 4.48); Calibrated: 9/30/2016;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1337; Calibrated: 9/28/2016
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1170
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Area Scan (9x17x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 0.709 W/kg


Zoom Scan (8x8x9)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2.5$ mm

Reference Value = 7.719 V/m; Power Drift = 0.88 dB

Peak SAR (extrapolated) = 2.12 W/kg

SAR(1 g) = 0.500 W/kg; SAR(10 g) = 0.152 W/kg

Maximum value of SAR (measured) = 1.01 W/kg

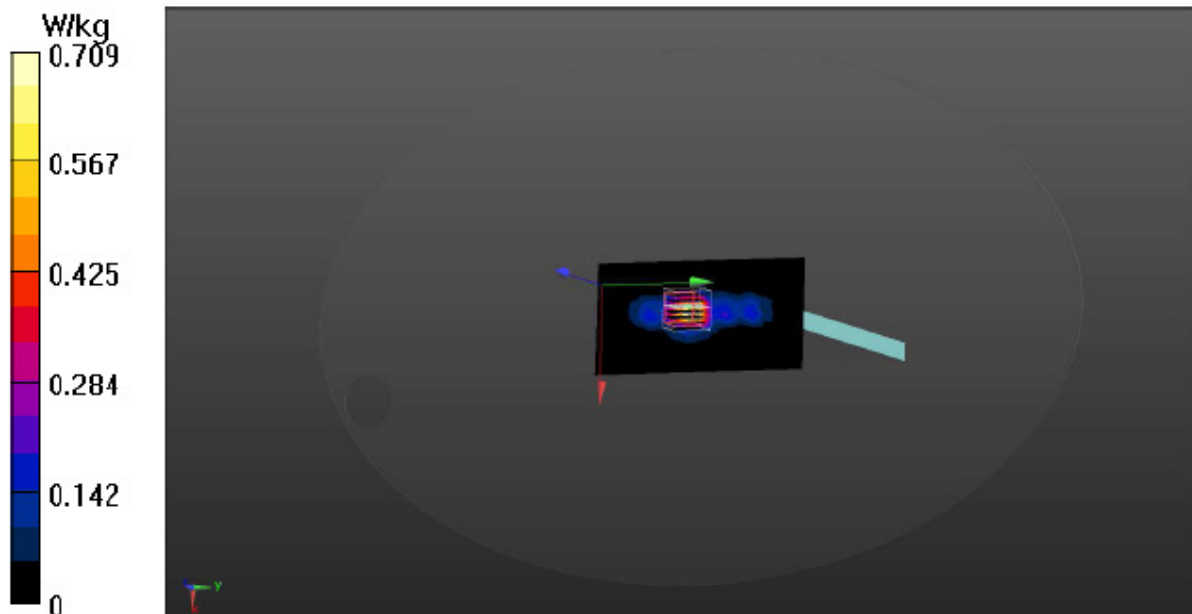

Date: 3/9/2017

Test Laboratory: Audix_SAR Lab

P12 Wi-Fi 802.11ac-VHT20 CH 52 5260MHz Aux Back

DUT: mPAD2-7-CHT4-I


Communication System: UID 0, WIFI 5G 802.11VHT_20 (0); Frequency: 5260 MHz;Duty Cycle:1:1.538
 Medium parameters used: $f = 5260 \text{ MHz}$; $\sigma = 5.41 \text{ S/m}$; $\epsilon_r = 47.449$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3855; ConvF(4.48, 4.48, 4.48); Calibrated: 9/30/2016;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = -19.0, 31.0$
- Electronics: DAE4 Sn1337; Calibrated: 9/28/2016
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1170
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Area Scan (9x7x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$
 Maximum value of SAR (measured) = 0.0247 W/kg

Zoom Scan (9x9x9)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2.5\text{mm}$
 Reference Value = 0 V/m; Power Drift = 0.00 dB
 Peak SAR (extrapolated) = 0.151 W/kg
SAR(1 g) = 0.014 W/kg; SAR(10 g) = 0.00479 W/kg
 Maximum value of SAR (measured) = 0.0319 W/kg

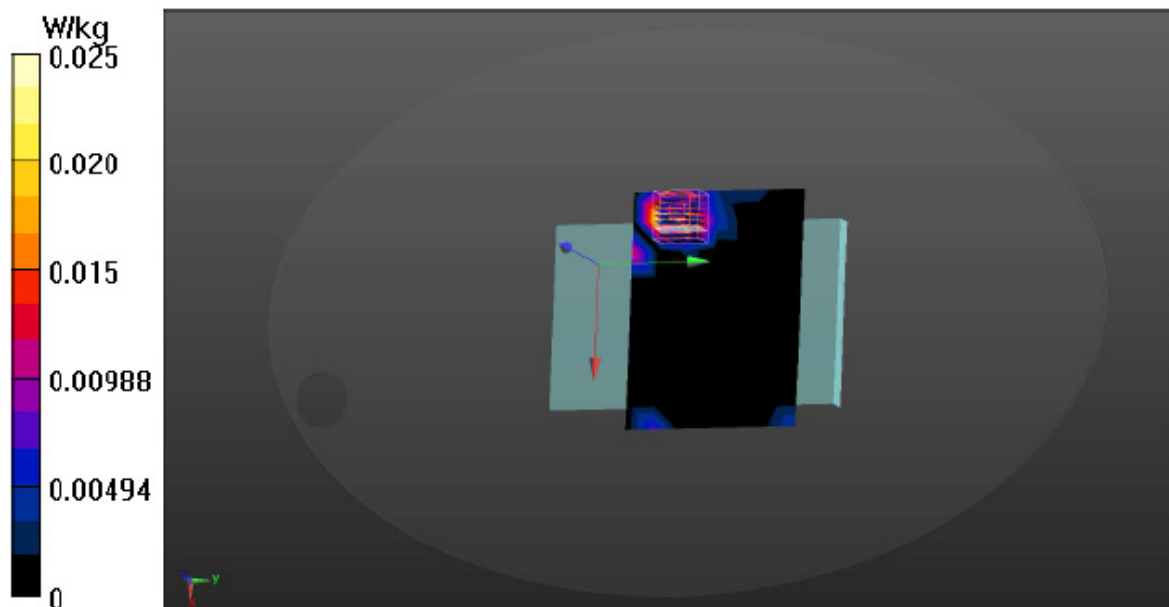

Date: 3/9/2017

Test Laboratory: Audix_SAR Lab

P10 Wi-Fi 802.11ac-VHT20 CH 52 5260MHz Main Top

DUT: mPAD2-7-CHT4-I


Communication System: UID 0, WIFI 5G 802.11VHT_20 (0); Frequency: 5260 MHz;Duty Cycle:1:1.538
 Medium parameters used: $f = 5260$ MHz; $\sigma = 5.41$ S/m; $\epsilon_r = 47.449$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3855; ConvF(4.48, 4.48, 4.48); Calibrated: 9/30/2016;
- Sensor-Surface: 2mm (Mechanical Surface Detection), Sensor-Surface: 4mm (Mechanical Surface Detection), $z = -19.0, 31.0$
- Electronics: DAE4 Sn1337; Calibrated: 9/28/2016
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1170
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Area Scan (5x12x1): Measurement grid: $dx=10$ mm, $dy=10$ mm
 Maximum value of SAR (measured) = 0.344 W/kg

Zoom Scan (9x9x9)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2.5$ mm
 Reference Value = 6.637 V/m; Power Drift = 1.12 dB
 Peak SAR (extrapolated) = 0.888 W/kg
SAR(1 g) = 0.218 W/kg; SAR(10 g) = 0.064 W/kg
 Maximum value of SAR (measured) = 0.281 W/kg

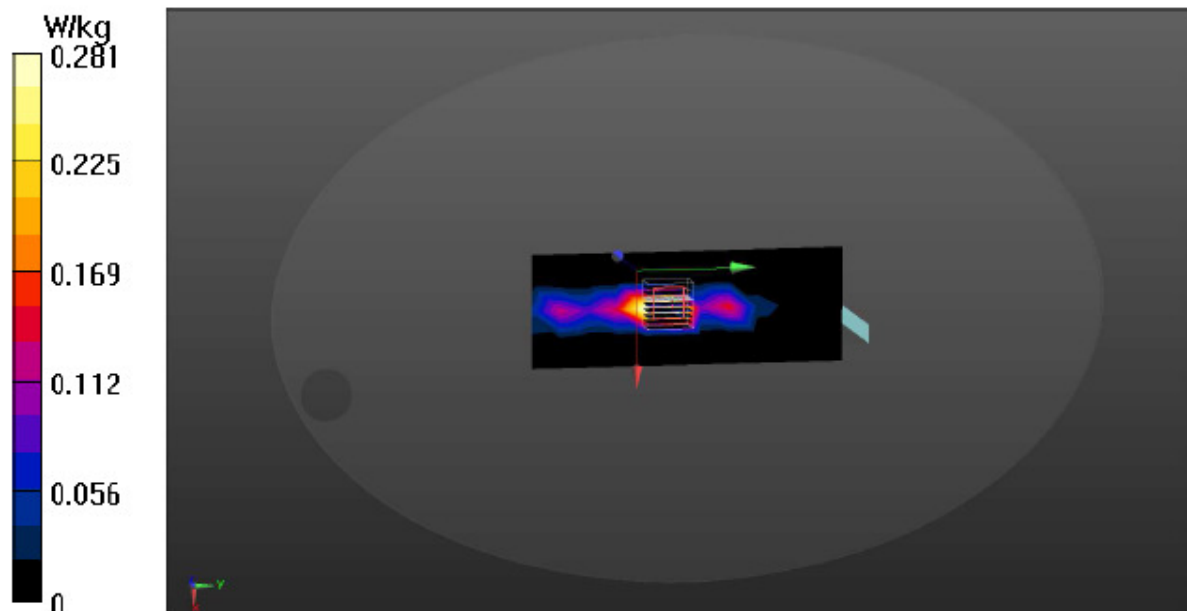

Date: 3/13/2017

Test Laboratory: Audix_SAR Lab

P33 Wi-Fi 802 .11ac-VHT80 CH 122 5610MHz Main Back

DUT: mPAD2-7-CHT4-I

Communication System: UID 0, WIFI 5G 802.11VHT_80 (0); Frequency: 5610 MHz;Duty Cycle:1:2.174
 Medium parameters used: $f = 5610 \text{ MHz}$; $\sigma = 5.906 \text{ S/m}$; $\epsilon_r = 46.725$; $\rho = 1000 \text{ kg/m}^3$


Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3855; ConvF(3.96, 3.96, 3.96); Calibrated: 9/30/2016;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = -19.0, 31.0$
- Electronics: DAE4 Sn1337; Calibrated: 9/28/2016
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1170
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Area Scan (17x9x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$
 Maximum value of SAR (measured) = 0.400 W/kg

Zoom Scan (9x9x9)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2.5\text{mm}$
 Reference Value = 0 V/m; Power Drift = 0.00 dB
 Peak SAR (extrapolated) = 0.818 W/kg
SAR(1 g) = 0.198 W/kg; SAR(10 g) = 0.064 W/kg
 Maximum value of SAR (measured) = 0.439 W/kg

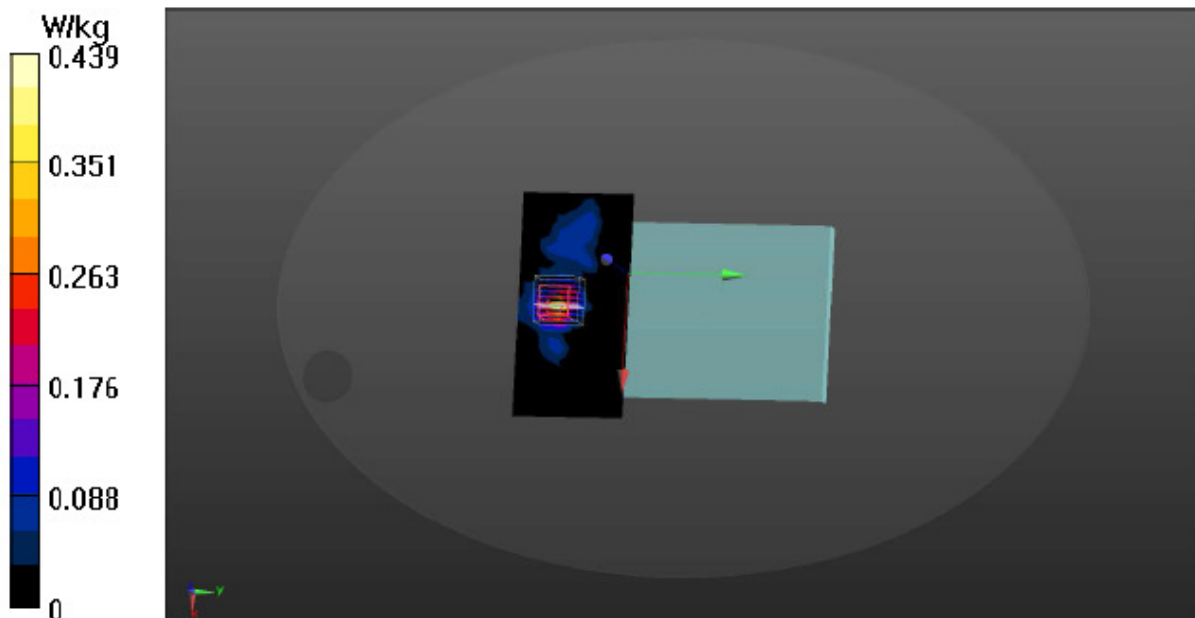

Date: 3/13/2017

Test Laboratory: Audix_SAR Lab

P31 Wi-Fi 802 .11ac-VHT80 CH 122 5610MHz Main Right

DUT: mPAD2-7-CHT4-I

Communication System: UID 0, WIFI 5G 802.11VHT_80 (0); Frequency: 5610 MHz;Duty Cycle:1:2.174

Medium parameters used: $f = 5610$ MHz; $\sigma = 5.906$ S/m; $\epsilon_r = 46.725$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3855; ConvF(3.96, 3.96, 3.96); Calibrated: 9/30/2016;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = -19.0, 31.0$
- Electronics: DAE4 Sn1337; Calibrated: 9/28/2016
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1170
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Area Scan (9x17x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 0.769 W/kg


Zoom Scan (8x8x9)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2.5$ mm

Reference Value = 8.175 V/m; Power Drift = 0.77 dB

Peak SAR (extrapolated) = 1.84 W/kg

SAR(1 g) = 0.438 W/kg; SAR(10 g) = 0.147 W/kg

Maximum value of SAR (measured) = 0.851 W/kg

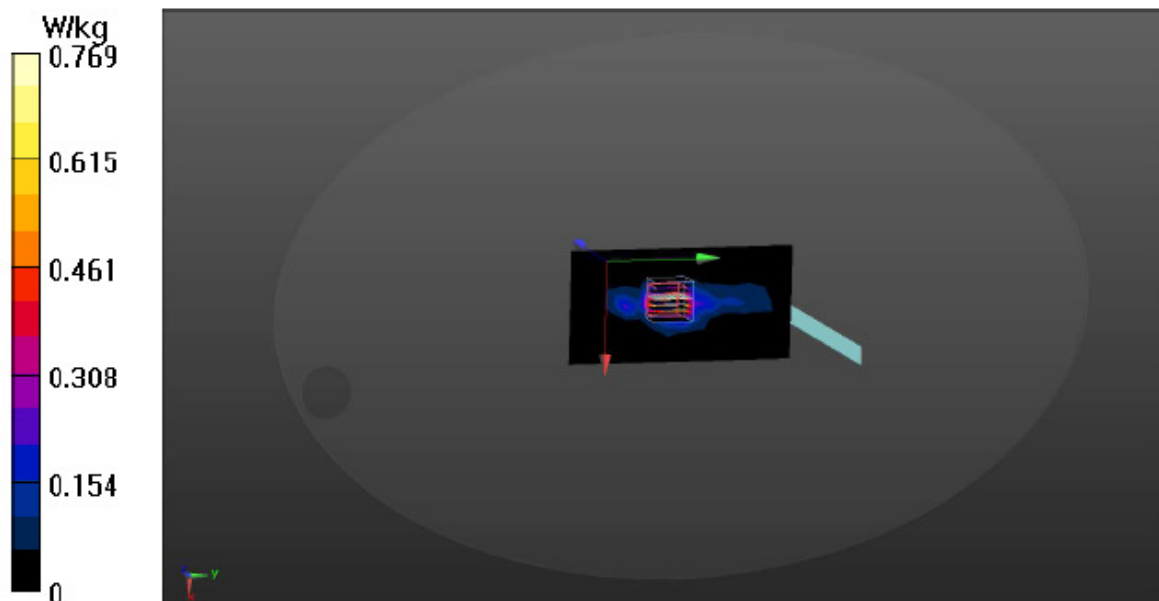

Date: 3/13/2017

Test Laboratory: Audix_SAR Lab

P36 Wi-Fi 802 .11ac-VHT80 CH 138 5690MHz Main Right

DUT: mPAD2-7-CHT4-I

Communication System: UID 0, WIFI 5G 802.11VHT_80 (0); Frequency: 5610 MHz;Duty Cycle:1:2.17

Medium parameters used: $f = 5610$ MHz; $\sigma = 5.906$ S/m; $\epsilon_r = 46.725$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3855; ConvF(3.96, 3.96, 3.96); Calibrated: 9/30/2016;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = -19.0, 31.0$
- Electronics: DAE4 Sn1337; Calibrated: 9/28/2016
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1170
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Area Scan (9x17x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 0.817 W/kg


Zoom Scan (9x9x9)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2.5$ mm

Reference Value = 9.038 V/m; Power Drift = -0.25 dB

Peak SAR (extrapolated) = 2.09 W/kg

SAR(1 g) = 0.503 W/kg; SAR(10 g) = 0.166 W/kg

Maximum value of SAR (measured) = 1.02 W/kg

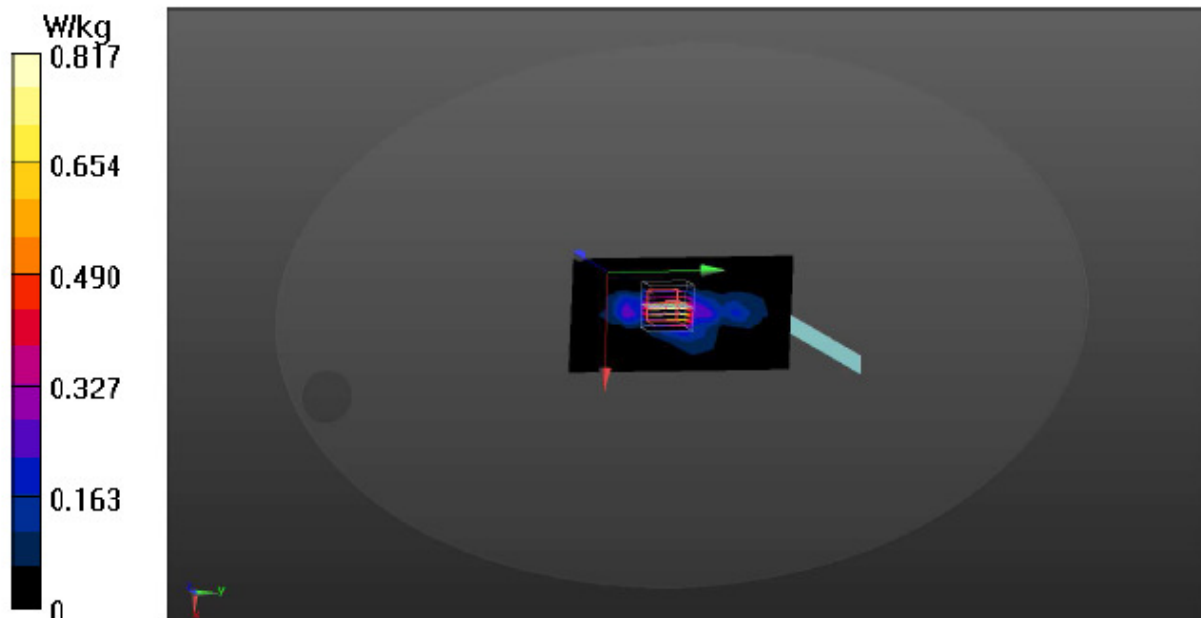

Date: 3/13/2017

Test Laboratory: Audix_SAR Lab

P34 Wi-Fi 802 .11ac-VHT80 CH 122 5610MHz Aux Back

DUT: mPAD2-7-CHT4-I

Communication System: UID 0, WIFI 5G 802.11VHT_80 (0); Frequency: 5610 MHz;Duty Cycle:1:2.17

Medium parameters used: $f = 5610$ MHz; $\sigma = 5.906$ S/m; $\epsilon_r = 46.725$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3855; ConvF(3.96, 3.96, 3.96); Calibrated: 9/30/2016;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = -19.0, 31.0$
- Electronics: DAE4 Sn1337; Calibrated: 9/28/2016
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1170
- DASYS52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Area Scan (15x13x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 0.0788 W/kg


Zoom Scan (9x9x9)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2.5$ mm

Reference Value = 0 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.388 W/kg

SAR(1 g) = 0.041 W/kg; SAR(10 g) = 0.015 W/kg

Maximum value of SAR (measured) = 0.0879 W/kg

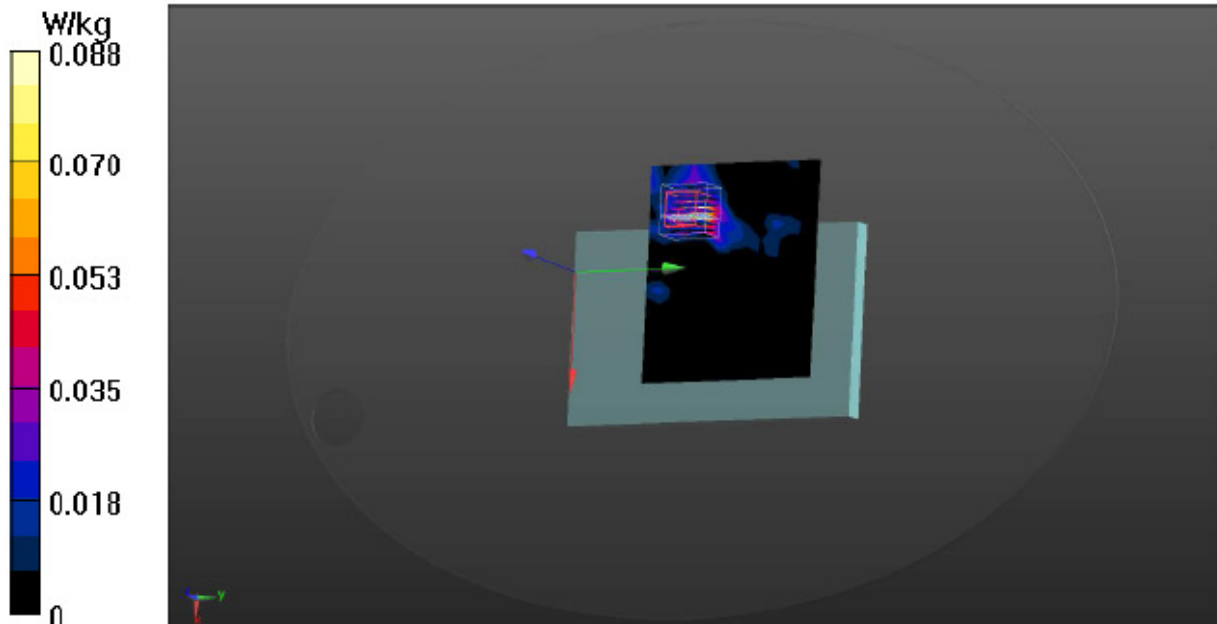

Date: 3/13/2017

Test Laboratory: Audix_SAR Lab

P32 Wi-Fi 802 .11ac-VHT80 CH 122 5610MHz Aux Top

DUT: mPAD2-7-CHT4-I

Communication System: UID 0, WIFI 5G 802.11VHT_80 (0); Frequency: 5610 MHz; Duty Cycle: 1:2.174

Medium parameters used: $f = 5610$ MHz; $\sigma = 5.906$ S/m; $\epsilon_r = 46.725$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3855; ConvF(3.96, 3.96, 3.96); Calibrated: 9/30/2016;
- Sensor-Surface: 2mm (Mechanical Surface Detection), z = -19.0, 31.0
- Electronics: DAE4 Sn1337; Calibrated: 9/28/2016
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1170
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Area Scan (9x23x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.386 W/kg


Zoom Scan (9x10x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 5.634 V/m; Power Drift = 1.11 dB

Peak SAR (extrapolated) = 2.18 W/kg

SAR(1 g) = 0.363 W/kg; SAR(10 g) = 0.096 W/kg

Maximum value of SAR (measured) = 0.822 W/kg

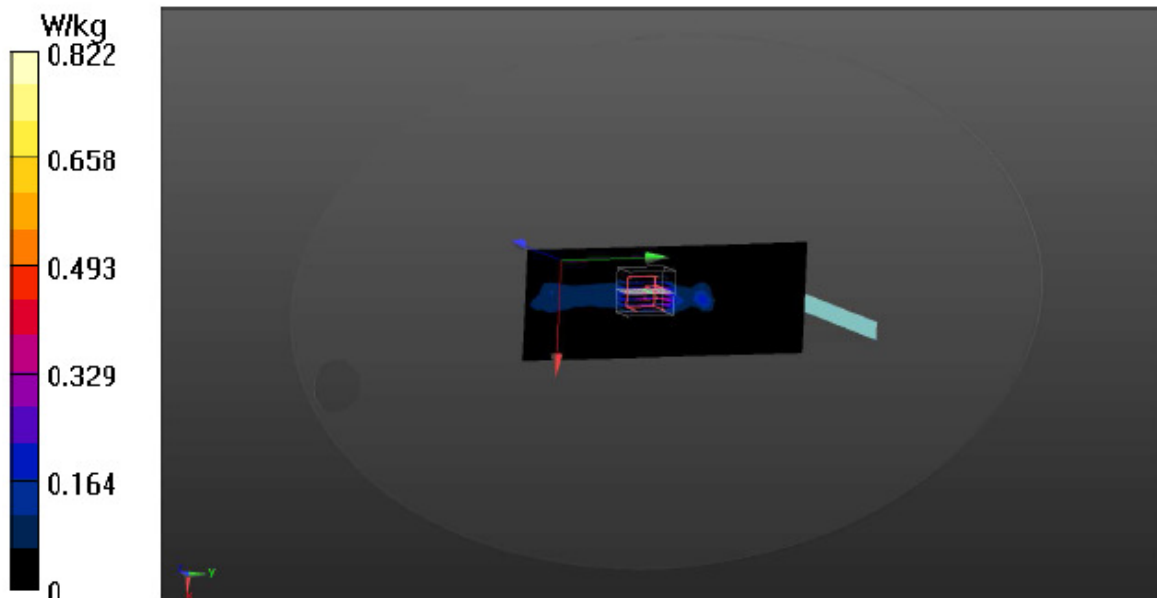

Date: 3/10/2017

Test Laboratory: Audix_SAR Lab

P19 Wi-Fi 802.11ac-VHT20 CH 165 5825MHz Main Back

DUT: mPAD2-7-CHT4-I

Communication System: UID 0, WIFI 5G 802.11VHT_20 (0); Frequency: 5825 MHz;Duty Cycle:1:1.538

Medium parameters used: $f = 5825$ MHz; $\sigma = 6.208$ S/m; $\epsilon_r = 46.303$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3855; ConvF(4.14, 4.14, 4.14); Calibrated: 9/30/2016;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = -19.0, 31.0$
- Electronics: DAE4 Sn1337; Calibrated: 9/28/2016
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1170
- DASYS2 52.8.8(1258); SEMCAD X 14.6.10(7373)

Area Scan (9x5x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 0.260 W/kg


Zoom Scan (7x7x9)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2.5$ mm

Reference Value = 0 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.752 W/kg

SAR(1 g) = 0.201 W/kg; SAR(10 g) = 0.066 W/kg

Maximum value of SAR (measured) = 0.401 W/kg

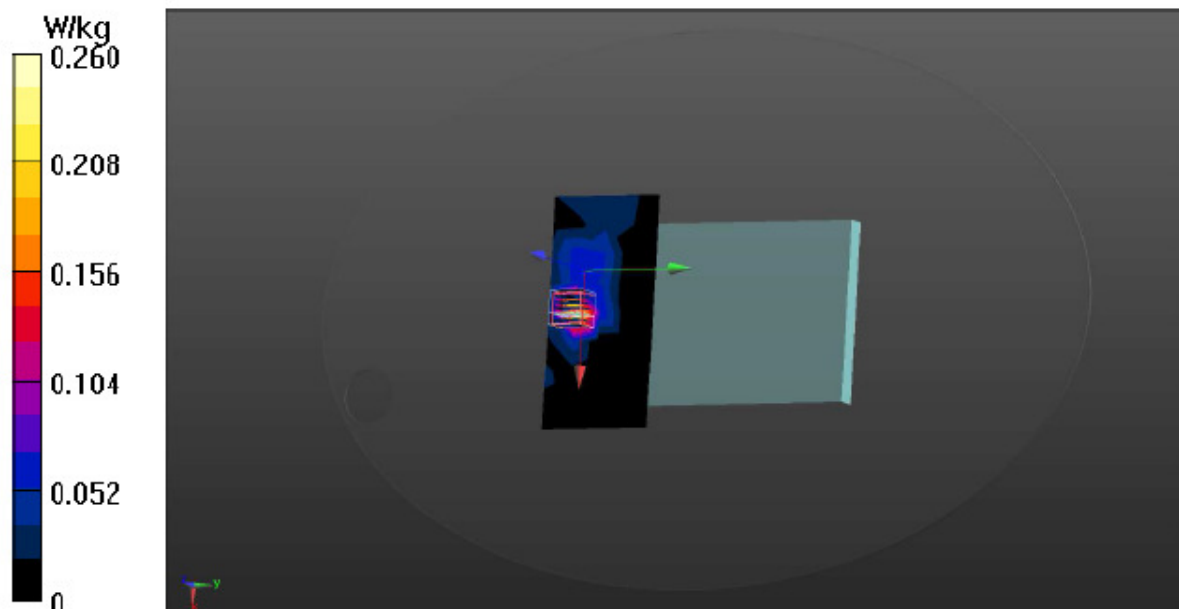

Date: 3/10/2017

Test Laboratory: Audix_SAR Lab

P17 Wi-Fi 802 .11ac-VHT20 CH 165 5825MHz Main Right

DUT: mPAD2-7-CHT4-I


Communication System: UID 0, WIFI 5G 802.11VHT_20 (0); Frequency: 5825 MHz;Duty Cycle:1:1.53
 Medium parameters used: $f = 5825 \text{ MHz}$; $\sigma = 6.208 \text{ S/m}$; $\epsilon_r = 46.303$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3855; ConvF(4.14, 4.14, 4.14); Calibrated: 9/30/2016;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = -19.0, 31.0$
- Electronics: DAE4 Sn1337; Calibrated: 9/28/2016
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1170
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Area Scan (9x17x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$
 Maximum value of SAR (measured) = 0.722 W/kg

Zoom Scan (9x10x9)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2.5\text{mm}$
 Reference Value = 7.651 V/m; Power Drift = 0.92 dB
 Peak SAR (extrapolated) = 1.84 W/kg
SAR(1 g) = 0.423 W/kg; SAR(10 g) = 0.147 W/kg
 Maximum value of SAR (measured) = 0.886 W/kg

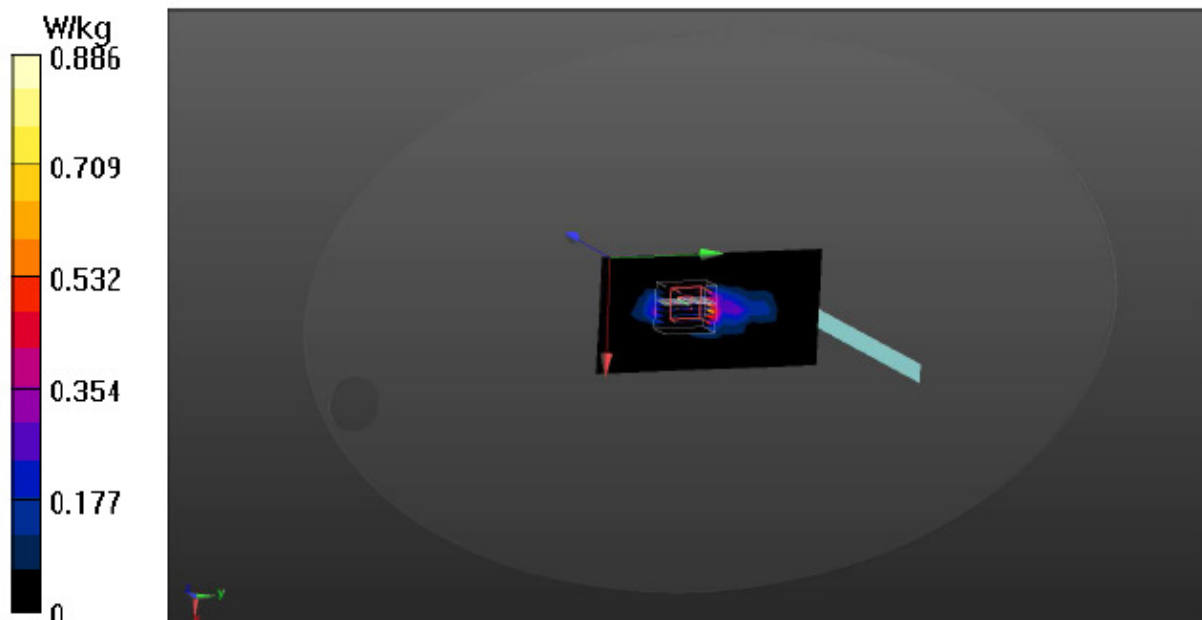

Date: 3/10/2017

Test Laboratory: Audix_SAR Lab

P19-1 Wi-Fi 802 .11ac-VHT20 CH 165 5825MHz Main Back with Case

DUT: mPAD2-7-CHT4-I


Communication System: UID 0, WIFI 5G 802.11VHT_20 (0); Frequency: 5825 MHz;Duty Cycle:1:1.538
 Medium parameters used: $f = 5825 \text{ MHz}$; $\sigma = 6.208 \text{ S/m}$; $\epsilon_r = 46.303$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3855; ConvF(4.14, 4.14, 4.14); Calibrated: 9/30/2016;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = -19.0, 31.0$
- Electronics: DAE4 Sn1337; Calibrated: 9/28/2016
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1170
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Area Scan (11x8x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$
 Maximum value of SAR (measured) = 0.254 W/kg

Zoom Scan (7x7x9)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2.5\text{mm}$
 Reference Value = 3.082 V/m; Power Drift = -1.16 dB
 Peak SAR (extrapolated) = 0.403 W/kg
SAR(1 g) = 0.157 W/kg; SAR(10 g) = 0.088 W/kg
 Maximum value of SAR (measured) = 0.241 W/kg

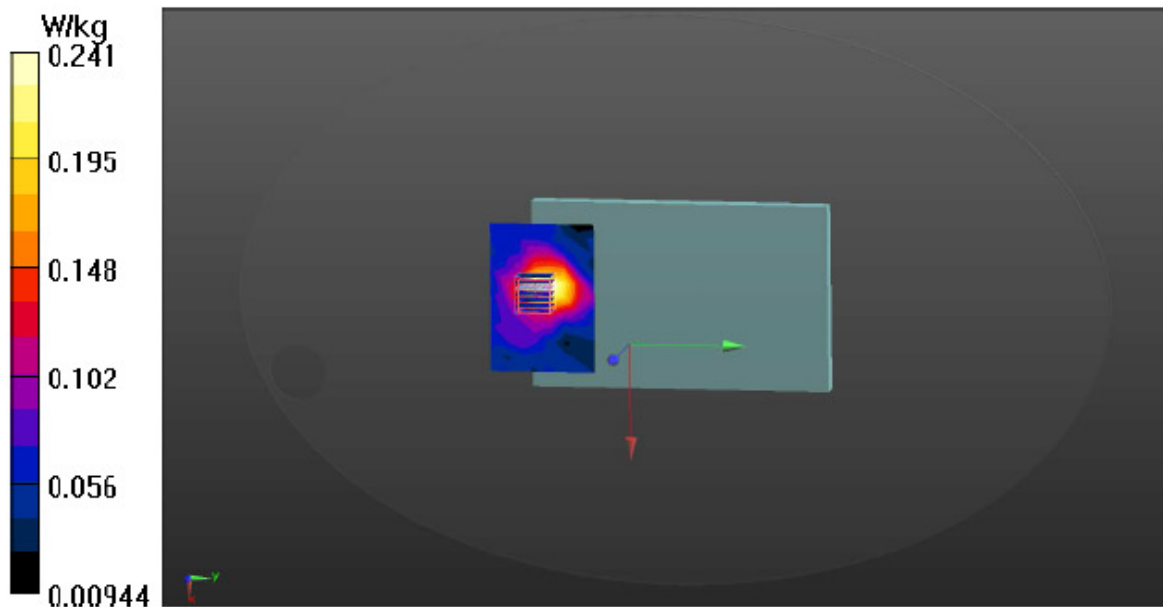

Date: 3/10/2017

Test Laboratory: Audix_SAR Lab

P20 Wi-Fi 802 .11ac-VHT20 CH 165 5825MHz Aux Back

DUT: mPAD2-7-CHT4-I

Communication System: UID 0, WIFI 5G 802.11VHT_20 (0); Frequency: 5825 MHz; Duty Cycle: 1:1.538

Medium parameters used: $f = 5825$ MHz; $\sigma = 6.208$ S/m; $\epsilon_r = 46.303$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3855; ConvF(4.14, 4.14, 4.14); Calibrated: 9/30/2016;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = -19.0, 31.0$
- Electronics: DAE4 Sn1337; Calibrated: 9/28/2016
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1170
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Area Scan (17x13x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 0.0914 W/kg


Zoom Scan (9x9x9)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2.5$ mm

Reference Value = 0 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.313 W/kg

SAR(1 g) = 0.055 W/kg; SAR(10 g) = 0.019 W/kg

Maximum value of SAR (measured) = 0.145 W/kg

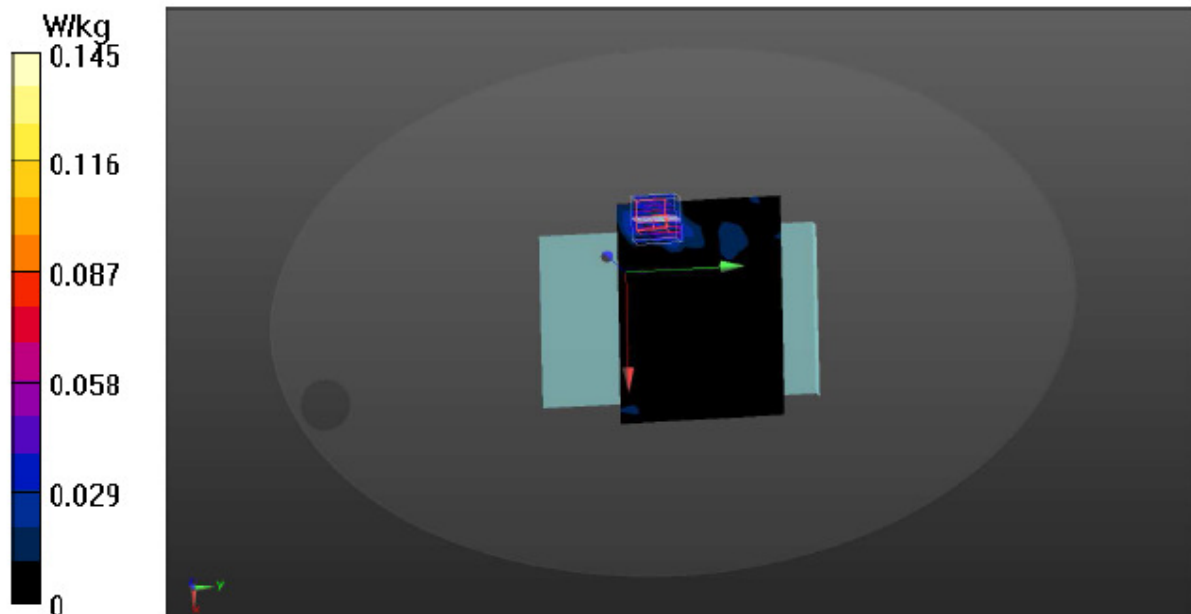

Date: 3/10/2017

Test Laboratory: Audix_SAR Lab

P18 Wi-Fi 802 .11ac-VHT20 CH 165 5825MHz Aux Top

DUT: mPAD2-7-CHT4-I

Communication System: UID 0, WIFI 5G 802.11VHT_20 (0); Frequency: 5825 MHz;Duty Cycle:1:1.538

Medium parameters used: $f = 5825 \text{ MHz}$; $\sigma = 6.208 \text{ S/m}$; $\epsilon_r = 46.303$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3855; ConvF(4.14, 4.14, 4.14); Calibrated: 9/30/2016;
- Sensor-Surface: 2mm (Mechanical Surface Detection), Sensor-Surface: 4mm (Mechanical Surface Detection), $z = -19.0, 31.0$
- Electronics: DAE4 Sn1337; Calibrated: 9/28/2016
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1170
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Area Scan (9x23x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 1.02 W/kg


Zoom Scan (8x8x9)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2.5\text{mm}$

Reference Value = 5.087 V/m; Power Drift = 1.41 dB

Peak SAR (extrapolated) = 2.23 W/kg

SAR(1 g) = 0.557 W/kg; SAR(10 g) = 0.136 W/kg

Maximum value of SAR (measured) = 0.690 W/kg

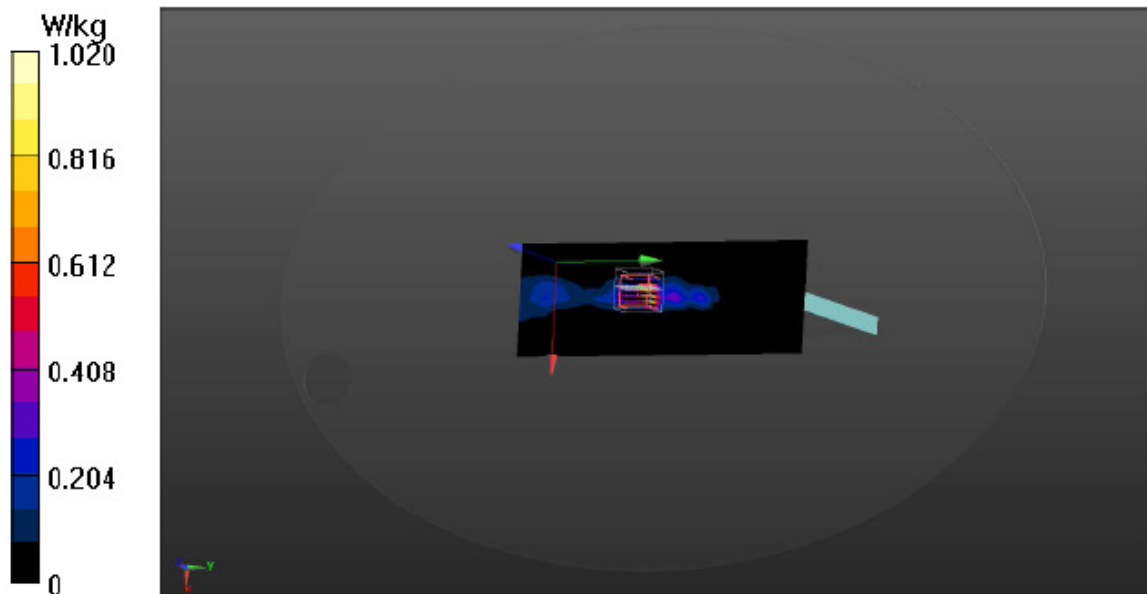

Date: 3/10/2017

Test Laboratory: Audix_SAR Lab

P39 Wi-Fi 802.11ac-VHT20 CH 157 5785MHz Aux Top

DUT: mPAD2-7-CHT4-I


Communication System: UID 0, WIFI 5G 802.11VHT_20 (0); Frequency: 5785 MHz;Duty Cycle:1:1.538
 Medium parameters used: $f = 5785 \text{ MHz}$; $\sigma = 6.15 \text{ S/m}$; $\epsilon_r = 46.477$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3855; ConvF(4.14, 4.14, 4.14); Calibrated: 9/30/2016;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1337; Calibrated: 9/28/2016
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1170
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Area Scan (9x23x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$
 Maximum value of SAR (measured) = 0.618 W/kg

Zoom Scan (9x10x9)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2.5\text{mm}$
 Reference Value = 7.220 V/m; Power Drift = 1.14 dB
 Peak SAR (extrapolated) = 2.80 W/kg
SAR(1 g) = 0.480 W/kg; SAR(10 g) = 0.113 W/kg
 Maximum value of SAR (measured) = 1.05 W/kg

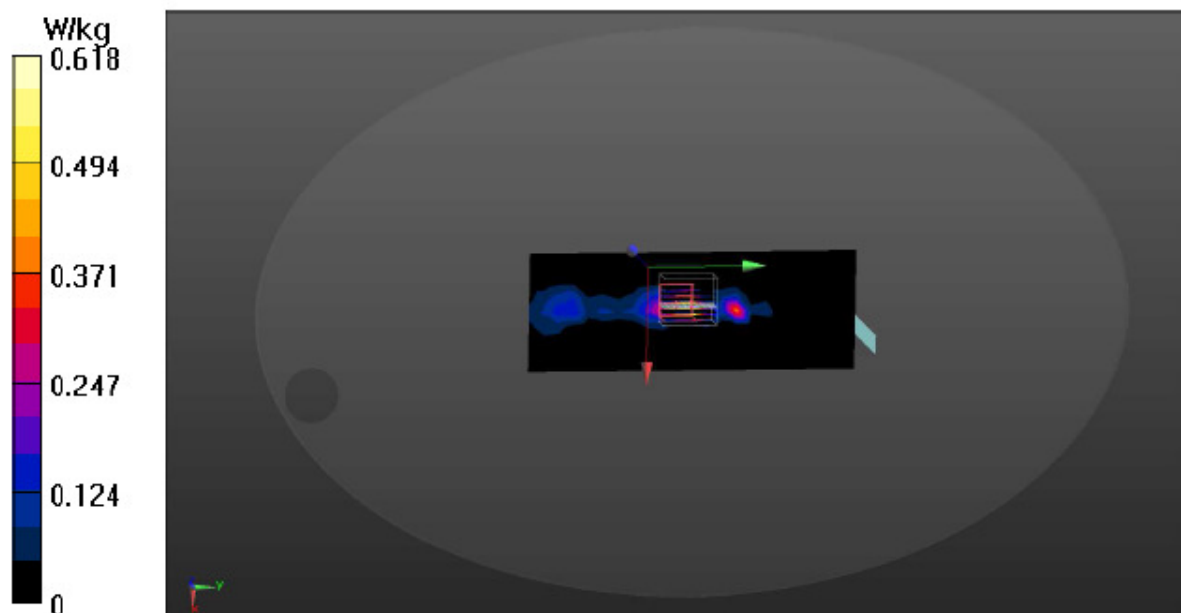

Date: 3/10/2017

Test Laboratory: Audix_SAR Lab

P20-1 Wi-Fi 802 .11ac-VHT20 CH 165 5825MHz Aux Back with Case

DUT: mPAD2-7-CHT4-I

Communication System: UID 0, WIFI 5G 802.11VHT_20 (0); Frequency: 5825 MHz; Duty Cycle: 1:1.538

Medium parameters used: $f = 5825$ MHz; $\sigma = 6.208$ S/m; $\epsilon_r = 46.303$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3855; ConvF(4.14, 4.14, 4.14); Calibrated: 9/30/2016;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = -19.0, 31.0$
- Electronics: DAE4 Sn1337; Calibrated: 9/28/2016
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1170
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Area Scan (11x11x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 0.0610 W/kg


Zoom Scan (8x8x9)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2.5$ mm

Reference Value = 0.758V/m; Power Drift = 0.49 dB

Peak SAR (extrapolated) = 0.247 W/kg

SAR(1 g) = 0.027 W/kg; SAR(10 g) = 0.011 W/kg

Maximum value of SAR (measured) = 0.0664 W/kg

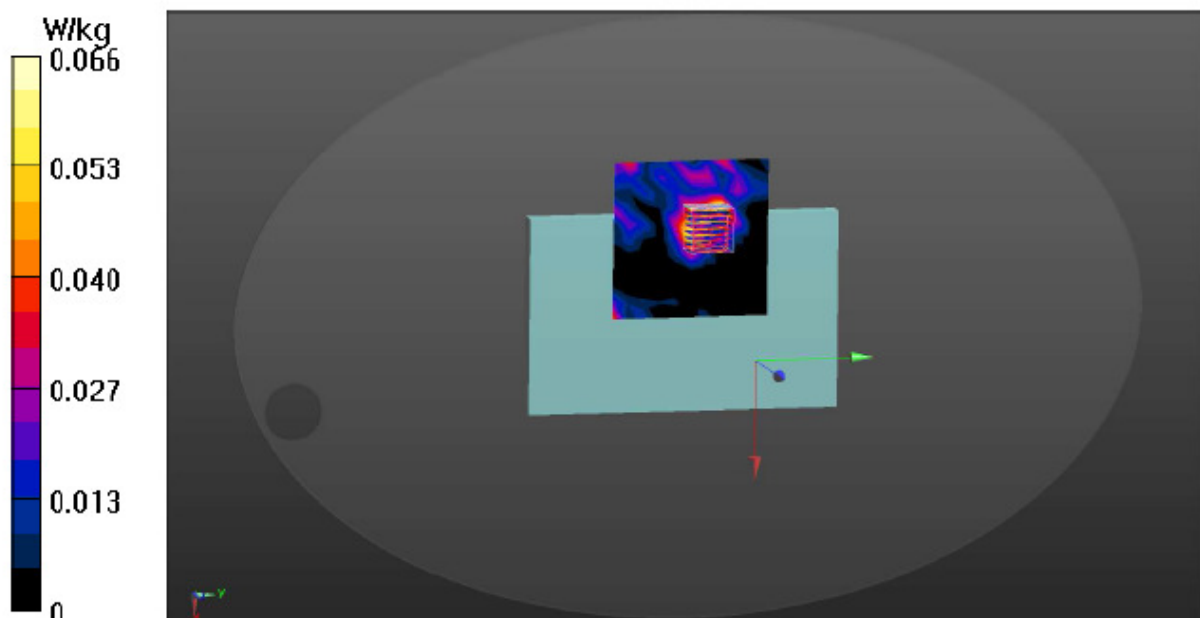



*Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan*

APPENDIX B

*Tel: +886 2 26099301
Fax: +886 2 26099303*

APPENDIX B

TEST PHOTOGRAPHS

(Model: mPAD2-7-CHT4-I)



*Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan*

*Tel: +886 2 26099301
Fax: +886 2 26099303*

APPENDIX C

Test Equipment Calibration Data