



Test Report No.: RF2203WDG0011-3



# TEST REPORT



Applicant	DEI Sales Inc., dba Polk Audio
Address	5541 Fermi Court Carlsbad CA 92008 United States Of America

Manufacturer or Supplier	Sound United, LLC
Address	5541 Fermi Court Carlsbad, CA 92008, USA
Product	MAGNIFI MAX AX SR SOUND BAR SYSTEM
Additional Product	MAGNIFI MAX AX SOUND BAR SYSTEM
Brand Name	POLK
Model	MAGNIFI MAX AX SOUND BAR
Additional Model & Model Difference	N/A
Date of tests	Apr. 19, 2022 ~ Jun. 07, 2022

The tests have been carried out according to the requirements of the following standard:

**FCC Part 15, Subpart C, Section 15.247**

**CONCLUSION: The submitted sample was found to COMPLY with the test requirement**

Tested by Lucas Chen Project Engineer / EMC Department	Approved by Glyn He Assistant Manager / EMC Department
	 Date: Jun. 30, 2022

This report is governed by, and incorporates by reference, CPS Conditions of Service as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

Bureau Veritas Shenzhen Co., Ltd.  
Dongguan Branch

No. 96, Guantai Road (Houjie Section), Houjie Town, Dongguan City, Guangdong Province. 523942. People's Republic of China.

Tel: +86 769 8998 2098  
Fax: +86 769 8593 1080  
Email: [customerservice.dg@bureauveritas.com](mailto:customerservice.dg@bureauveritas.com)



## TABLE OF CONTENTS

<b>RELEASE CONTROL RECORD .....</b>	<b>4</b>
<b>1 SUMMARY OF TEST RESULTS.....</b>	<b>5</b>
<b>2 MEASUREMENT UNCERTAINTY .....</b>	<b>5</b>
<b>3 GENERAL INFORMATION .....</b>	<b>6</b>
3.1 GENERAL DESCRIPTION OF EUT .....	6
3.2 DESCRIPTION OF TEST MODES .....	7
3.2.1 CONFIGURATION OF SYSTEM UNDER TEST .....	8
3.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL.....	8
3.3 DUTY CYCLE OF TEST SIGNAL .....	10
3.4 GENERAL DESCRIPTION OF APPLIED STANDARDS .....	11
3.5 DESCRIPTION OF SUPPORT UNITS .....	11
<b>4 TEST TYPES AND RESULTS.....</b>	<b>12</b>
4.1. CONDUCTED EMISSION MEASUREMENT .....	12
4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT .....	12
4.1.2 TEST INSTRUMENTS.....	12
4.1.3 TEST PROCEDURES .....	13
4.1.4 DEVIATION FROM TEST STANDARD .....	13
4.1.5 TEST SETUP.....	14
4.1.6 EUT OPERATING CONDITIONS .....	14
4.1.7 TEST RESULTS .....	15
4.2. RADIATED EMISSION MEASUREMENT .....	17
4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT .....	17
4.2.2 TEST INSTRUMENTS.....	18
4.2.3 TEST PROCEDURES .....	19
4.2.4 DEVIATION FROM TEST STANDARD .....	20
4.2.5 TEST SETUP.....	20
4.2.6 EUT OPERATING CONDITIONS .....	21
4.2.7 TEST RESULTS .....	22
4.3 6DB BANDWIDTH MEASUREMENT .....	36
4.3.1 LIMITS OF 6DB BANDWIDTH MEASUREMENT .....	36
4.3.2 TEST INSTRUMENTS.....	36
4.3.3 TEST PROCEDURE.....	36
4.3.4 DEVIATION FROM TEST STANDARD .....	37
4.3.5 TEST SETUP.....	37
4.3.6 EUT OPERATING CONDITIONS .....	37



**Test Report No.: RF2203WDG0011-3**

4.3.7	TEST RESULTS .....	38
4.4	CONDUCTED OUTPUT POWER.....	48
4.4.1	LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT .....	48
4.4.2	TEST SETUP .....	48
4.4.3	TEST INSTRUMENTS.....	48
4.4.4	TEST PROCEDURES .....	48
4.4.5	DEVIATION FROM TEST STANDARD .....	48
4.4.6	EUT OPERATING CONDITIONS .....	48
4.4.7	TEST RESULTS .....	49
4.5	POWER SPECTRAL DENSITY MEASUREMENT .....	53
4.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT .....	53
4.5.2	TEST SETUP .....	53
4.5.3	TEST INSTRUMENTS.....	53
4.5.4	TEST PROCEDURE.....	53
4.5.5	DEVIATION FROM TEST STANDARD .....	53
4.5.6	EUT OPERATING CONDITION .....	54
4.5.7	TEST RESULTS .....	54
4.6	OUT OF BAND EMISSION MEASUREMENT .....	58
4.6.1	LIMITS OF OUT OF BAND EMISSION MEASUREMENT .....	58
4.6.2	TEST SETUP .....	58
4.6.3	TEST INSTRUMENTS.....	58
4.6.4	TEST PROCEDURE.....	58
4.6.5	DEVIATION FROM TEST STANDARD .....	59
4.6.6	EUT OPERATING CONDITION .....	59
4.6.7	TEST RESULTS .....	60
5	<b>PHOTOGRAPHS OF THE TEST CONFIGURATION .....</b>	<b>71</b>
6	<b>APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB .....</b>	<b>72</b>



Test Report No.: RF2203WDG0011-3

## RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF2203WDG0011-3	Original release	Jun. 30, 2022

## 1 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC PART 15, SUBPART C (SECTION 15.247)			
STANDARD SECTION	TEST TYPE AND LIMIT	RESULT	REMARK
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit.
15.247(d) 15.209	Radiated Emissions	PASS	Meet the requirement of limit.
15.247(d)	Band Edge Measurement	PASS	Meet the requirement of limit.
15.247(a)(2)	6dB bandwidth	PASS	Meet the requirement of limit.
15.247(b)	Conducted Output power	PASS	Meet the requirement of limit.
15.247(e)	Power Spectral Density	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	Antenna connector is i-pex not a standard connector.

## 2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted emissions	9kHz~30MHz	3.05dB
Radiated emissions	9KHz ~ 30MHz	2.16dB
	30MHz ~ 1GMHz	3.63dB
	1GHz ~ 18GHz	4.96dB
	18GHz ~ 40GHz	4.37dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k = 2$ .



### 3 GENERAL INFORMATION

#### 3.1 GENERAL DESCRIPTION OF EUT

<b>PRODUCT</b>	MAGNIFI MAX AX SR SOUND BAR SYSTEM
<b>ADDITIONAL PRODUCT</b>	MAGNIFI MAX AX SOUND BAR SYSTEM
<b>BRAND</b>	POLK
<b>MODEL NO.</b>	MAGNIFI MAX AX SOUND BAR
<b>ADDITIONAL NO.</b>	N/A
<b>FCC ID</b>	WLQMAXXSB
<b>NOMINAL VOLTAGE</b>	AC 100-240V 50/60Hz
<b>MODULATION TECHNOLOGY</b>	DSSS, OFDM
<b>MODULATION TYPE</b>	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
<b>OPERATING FREQUENCY</b>	2412MHz ~ 2462MHz for 11b/g/n(HT20) 2422MHz ~ 2452MHz for 11n(HT40)
<b>PEAK OUTPUT POWER</b>	138.676mW (Measured Max.)
<b>ANTENNA TYPE</b>	Chain 0: FPCB Antenna, with 3.67dBi gain Chain 1: FPCB Antenna, with 3.73dBi gain
<b>I/O PORTS</b>	Refer to user's manual
<b>CABLE SUPPLIED</b>	Refer to user's manual

**NOTES:**

1. The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.
2. Please refer to the EUT photo document (Reference No.: 2203WDG0011-1) for detailed product photo.
3. The working status of the two antennas is as follows.

MODULATION MODE	FUNCTION
802.11b	2 Chains (SISO)
802.11g	2 Chains (SISO)
802.11n (HT20)	2 Chains (MIMO)
802.11n (HT40)	2 Chains (MIMO)

\* 802.11b/g provided a SISO function, the radiated emission above 1GHz test item is carried out on the maximum power "chain 1" antenna.

### 3.2 DESCRIPTION OF TEST MODES

11 channels are provided for 802.11b, 802.11g and 802.11n (HT20):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
1	2412 MHz	7	2442 MHz
2	2417 MHz	8	2447 MHz
3	2422 MHz	9	2452 MHz
4	2427 MHz	10	2457 MHz
5	2432 MHz	11	2462 MHz
6	2437 MHz		

7 channels are provided for 802.11n (HT40):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
3	2422MHz	7	2442MHz
4	2427MHz	8	2447MHz
5	2432MHz	9	2452MHz
6	2437MHz		

### 3.2.1 CONFIGURATION OF SYSTEM UNDER TEST

Please see section 5 photographs of the test configuration for reference.

### 3.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis, power supply voltage range and antenna ports. The worst case was found when positioned on X axis for radiated emission. Following test modes were selected for the final test, and the final worst case is marked in boldface and recorded in the report:

EUT CONFIGURE MODE	APPLICABLE TO				MODE
	RE<1G	RE≥1G	PLC	APCM	
<b>A</b>	√	√	√	√	<b>AC 120V 60Hz with WIFI function</b>

Where **RE<1G**: Radiated Emission below 1GHz      **RE≥1G**: Radiated Emission above 1GHz  
**PLC**: Power Line Conducted Emission      **APCM**: Antenna Port Conducted Measurement

#### **POWER LINE CONDUCTED EMISSION TEST:**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	TESTED CONDITION
A	WIFI (2.4G) Link

#### **RADIATED EMISSION TEST (BELOW 1GHz):**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A	802.11b	1 to 11	1	DSSS	DBPSK	1.0

For the test results, only the worst case was shown in test report.



**RADIATED EMISSION TEST (ABOVE 1GHz):**

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A	802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1.0
A	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0
A	802.11n HT20	1 to 11	1, 6, 11	OFDM	BPSK	6.5
A	802.11n HT40	3 to 9	3, 6, 9	OFDM	BPSK	13.5

**ANTENNA PORT CONDUCTED MEASUREMENT:**

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A	802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1.0
A	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0
A	802.11n HT20	1 to 11	1, 6, 11	OFDM	BPSK	6.5
A	802.11n HT40	3 to 9	3, 6, 9	OFDM	BPSK	13.5

**TEST CONDITION:**

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
RE<1G	25deg. C, 54%RH	AC 120V 60Hz	Jelly
RE≥1G	25deg. C, 54%RH	AC 120V 60Hz	Jelly
PLC	23deg. C, 56%RH	AC 120V 60Hz	Summer
APCM	25deg. C, 58%RH	AC 120V 60Hz	Vincent


### 3.3 DUTY CYCLE OF TEST SIGNAL

802.11b: Duty cycle = 8.360/8.435 =99.1%

802.11g: Duty cycle = 1.392/1.447 =96.2%

802.11n (HT20): Duty cycle = 1.299/1.373 =94.6%

802.11n (HT40): Duty cycle = 0.645/0.708 =91.1%

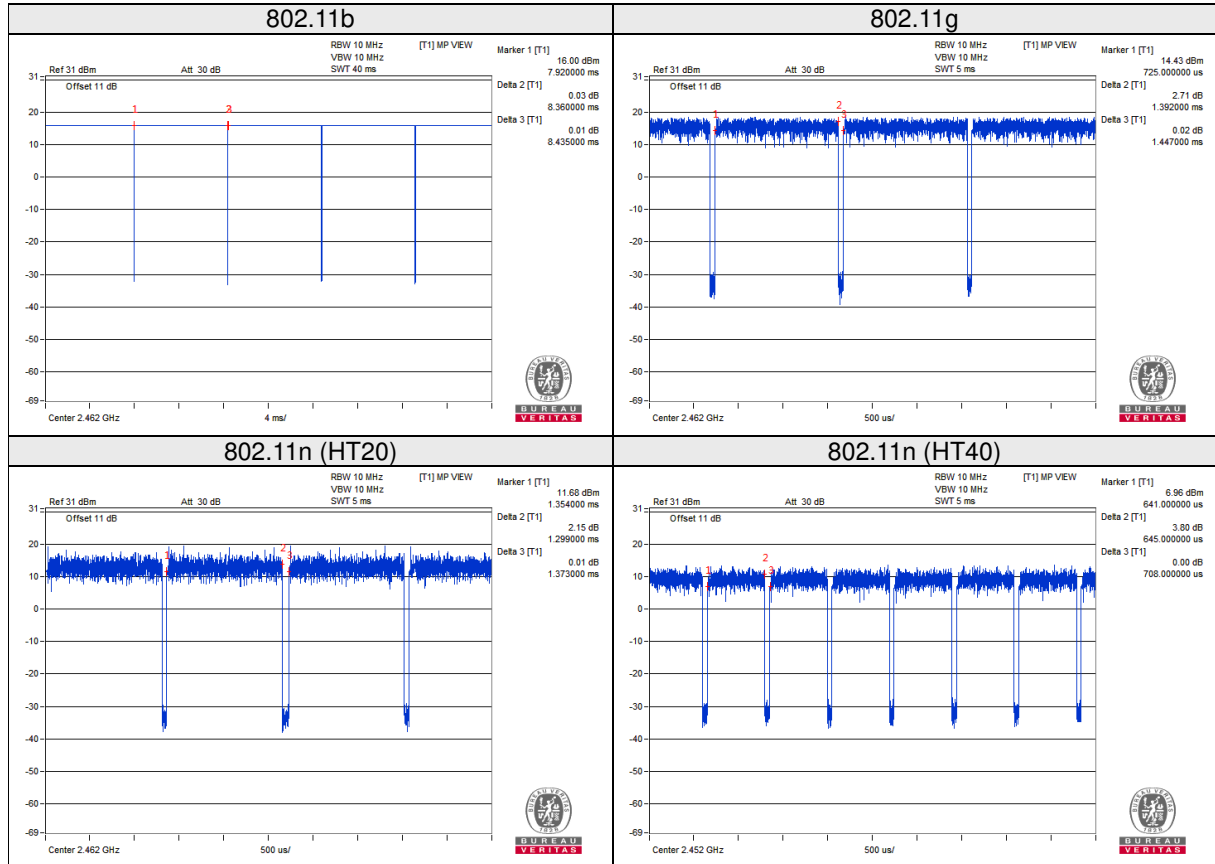



### 3.4 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

- FCC Part 15, Subpart C, Section 15.247**
- KDB 558074 D01 15.247 Meas Guidance v05r02**
- KDB 662911 D01 Multiple Transmitter Output v02r01**
- ANSI C63.10-2013**

All test items have been performed and recorded as per the above standards.

### 3.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as a dependent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	Dummy Load	N/A	N/A	N/A	N/A
2	USB Driver	Kingston	DataTraveler	3RJD8-68DC4U-3VFWW	N/A
3	iPhone X	Apple	MQA52CH/A	N/A	N/A

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	Optical Cable: Unshielded, detachable, 1.5m. HDMI Cable: Shielded, detachable, 200cm with two cores; 2*HDMI Cable: Shielded, detachable, 150cm
2	N/A
3	N/A

## 4 TEST TYPES AND RESULTS

### 4.1. CONDUCTED EMISSION MEASUREMENT

#### 4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB $\mu$ V)	
	Quasi-peak	Average
0.15 ~ 0.5	66 to 56	56 to 46
0.5 ~ 5	56	46
5 ~ 30	60	50

- NOTES:**
1. The lower limit shall apply at the transition frequencies.
  2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.
  3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

#### 4.1.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESR7	101494	Mar. 07,23
Artificial Mains Network	Rohde&Schwarz	ENV216	101173	Mar. 07,23
Artificial Mains Network	Rohde&Schwarz	ESH3-Z5	100317	Mar. 07,23
Voltage probe	SCHWARZBECK	TK 9421	TK 9421-176	Aug. 05,22
Coaxial RF Cable	/	CE CABLE	C2310066D G	Jul. 27,22
Test software	ADT	ADT_Cond_V7.3.7	N/A	N/A

- NOTES:**
1. The test was performed in shielded room 553. (Chenwu)
  2. The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.



#### 4.1.3 TEST PROCEDURES


- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

**NOTE:** All modes of operation were investigated and the worst-case emissions are reported.

#### 4.1.4 DEVIATION FROM TEST STANDARD

No deviation.

#### 4.1.5 TEST SETUP

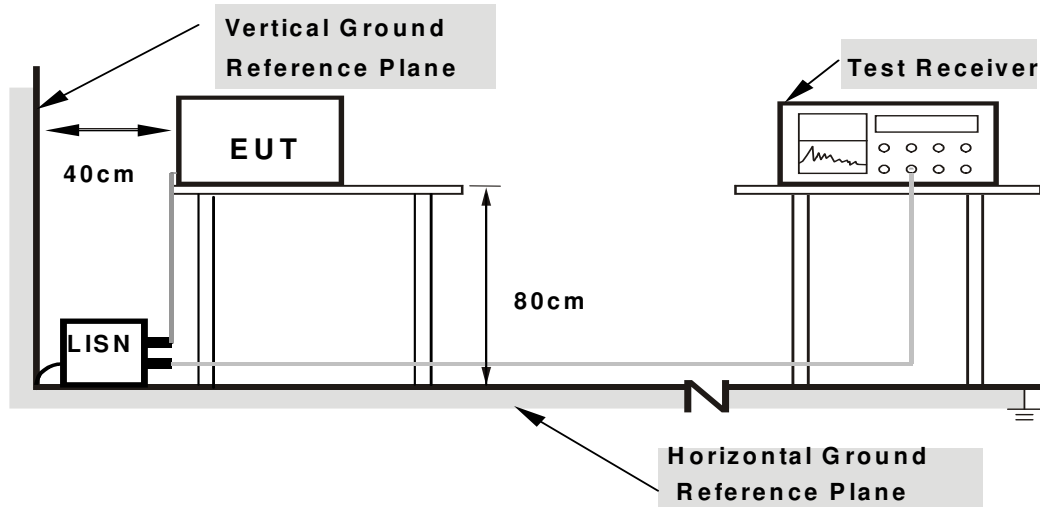

- Note: 1.Support units were connected to second LISN.**  
**2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes**

For the actual test configuration, please refer to the attached file (Test Setup Photo).

#### 4.1.6 EUT OPERATING CONDITIONS

- a. Turned on the power and connected of all equipment.
- b. EUT was operated according to the type used was description in manufacturer's specifications or the User's Manual.


### 4.1.7 TEST RESULTS

**CONDUCTED WORST-CASE DATA: WIFI Link**

<b>PHASE</b>	Line	<b>6dB BANDWIDTH</b>	9kHz
--------------	------	----------------------	------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	9.90	44.47	35.86	54.37	45.76	66.00	56.00	-11.63	-10.24
2	0.17605	9.91	41.56	33.23	51.47	43.14	64.67	54.67	-13.20	-11.53
3	0.54357	9.97	36.80	28.68	46.77	38.65	56.00	46.00	-9.23	-7.35
4	1.92075	10.10	26.65	19.94	36.75	30.04	56.00	46.00	-19.25	-15.96
5	6.91125	10.25	30.31	24.24	40.56	34.49	60.00	50.00	-19.44	-15.51
6	16.41300	10.42	30.49	23.53	40.91	33.95	60.00	50.00	-19.09	-16.05


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

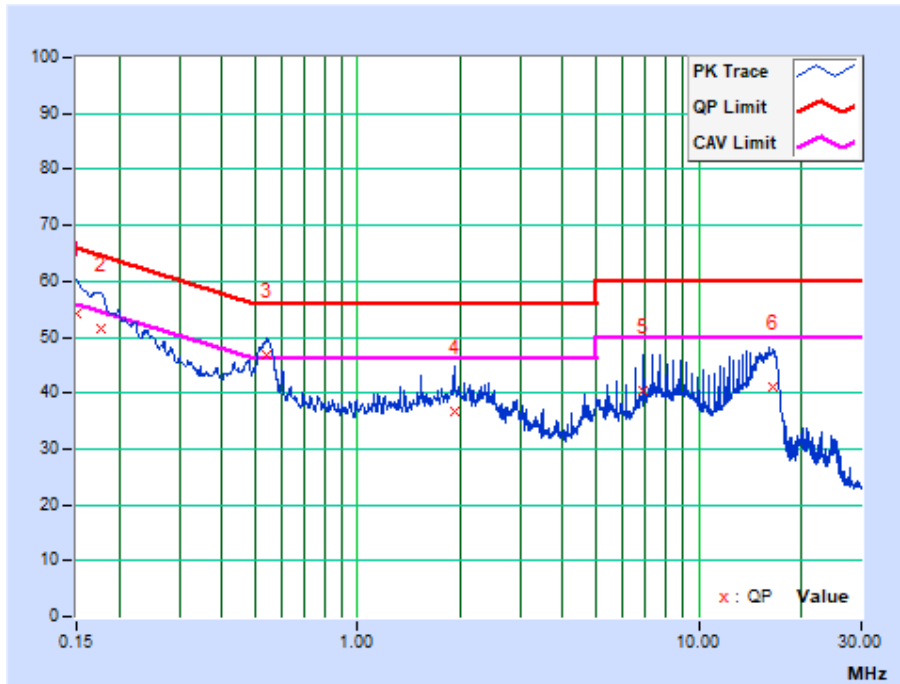

<b>PHASE</b>	Neutral	<b>6dB BANDWIDTH</b>	9kHz
--------------	---------	----------------------	------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	9.84	47.51	36.67	57.35	46.51	66.00	56.00	-8.65	-9.49
2	0.16966	9.84	44.37	33.46	54.21	43.30	64.98	54.98	-10.76	-11.67
3	0.19721	9.85	39.21	28.14	49.06	37.99	63.73	53.73	-14.67	-15.74
4	0.53786	9.86	38.30	31.16	48.16	41.02	56.00	46.00	-7.84	-4.98
5	7.29600	10.07	32.24	26.37	42.31	36.44	60.00	50.00	-17.69	-13.56
6	16.30275	10.27	30.25	22.73	40.52	33.00	60.00	50.00	-19.48	-17.00

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

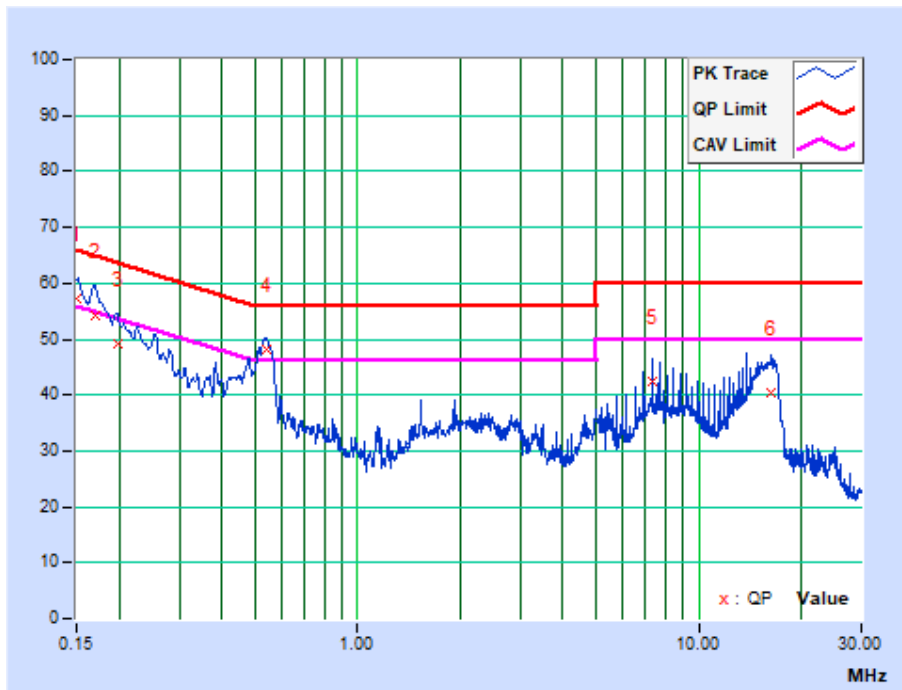



## 4.2. RADIATED EMISSION MEASUREMENT

### 4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

#### NOTES:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



4.2.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESU40	100449	Feb. 22, 23
Signal and Spectrum Analyzer	Rohde&Schwarz	FSV7	102331	May 09, 23
Active Loop Antenna (9KHz -30MHz)	SCHWARZBECK	FMZB 1519B	1519B-045	May 20, 23
Amplifier (9KHz -1GHz)	Burgeon	BPA-530	100210	Mar. 08, 23
Trilog-Broadband Antenna(20M-2G)	SCHWARZBECK	VULB 9168	01263	Sep. 30, 22
Horn Antenna (1GHz -18GHz)	ETS -Lindgren	3117	00062558	May 21, 23
Horn Antenna (18GHz -40GHz)	SCHWARZBECK	BBHA 9170	BBHA9170147	May 14, 23
3m Semi-anechoic Chamber	ETS-LINDGREN	9m*6m*6m	NSEMC003	May 22, 23
Test Software	ADT	ADT_Radiated_V7.6.15.9.2	N/A	N/A
Broadband Preamplifier (1GHz~18GHz)	SCHWARZBECK	BBV9718	305	May 12, 23
Pre-Amplifier (18GHz-40GHz)	EMCI	EMC 184045	980102	Jan. 10, 23
Test Software	ADT	ADT_Radiated_V7.6.15.9.2	N/A	N/A
BLUETOOTH TESTER	Rohde&Schwarz	CBT32	100811	N/A

NOTES:

1. The test was performed in 966 Chamber. (Chenwu)
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.
3. The horn antenna is used only for the measurement of emission frequency above 1GHz if tested.
4. The FCC Site Registration No. is 749762.



#### 4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 1.5 meters (above 1GHz) and 0.8 meters (below 1GHz) above the ground at a 3 meters semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. For below 1GHz was used bilog antenna, and above 1GHz was used horn antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. For below 30MHz, a loop antenna with its vertical plane is place 3m from the EUT and rotated about its vertical axis for maximum response at each azimuth about the EUT. And the centre of the loop shall be 1m above the ground.
- g. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, For battery operated equipment, the equipment tests shall be perform using fresh batteries. The turntable was rotated to maximize the emission level.

#### NOTES:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is  $\geq 1/T$  (Duty cycle < 98%) or 10Hz(Duty cycle > 98%) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.
5. The testing of the EUT was performed on all 3 orthogonal axes, the worst-case test configuration was reported on the file test setup photo.

#### 4.2.4 DEVIATION FROM TEST STANDARD


No deviation.

#### 4.2.5 TEST SETUP

##### Below 30MHz test setup

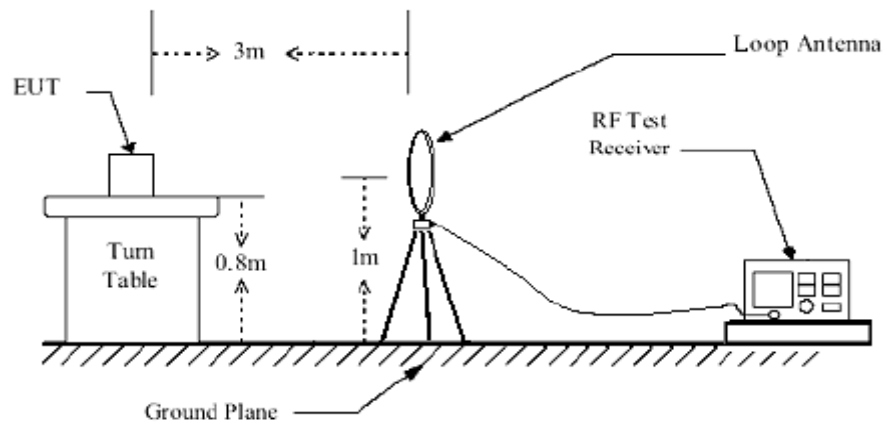


##### Below 1GHz test setup

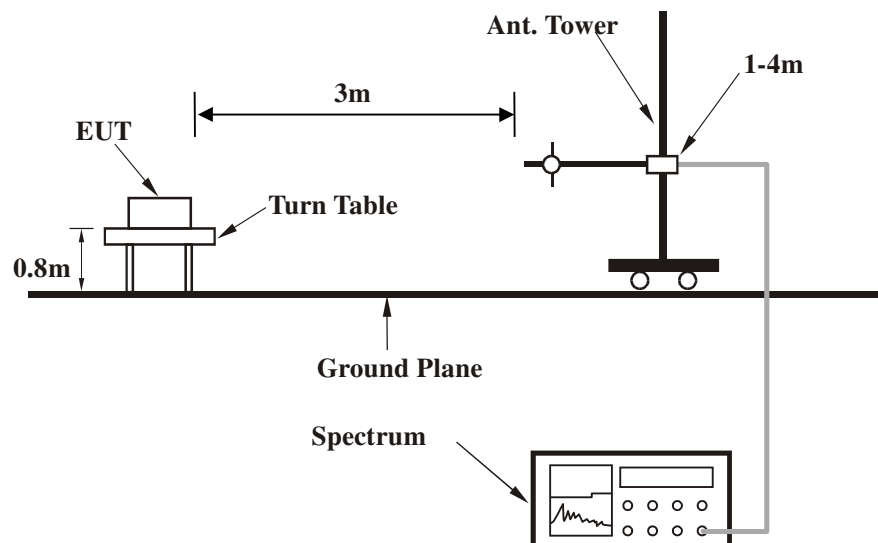

**Note:** For the actual test configuration, please refer to the attached file (Test Setup Photo).

## Above 1GHz test setup

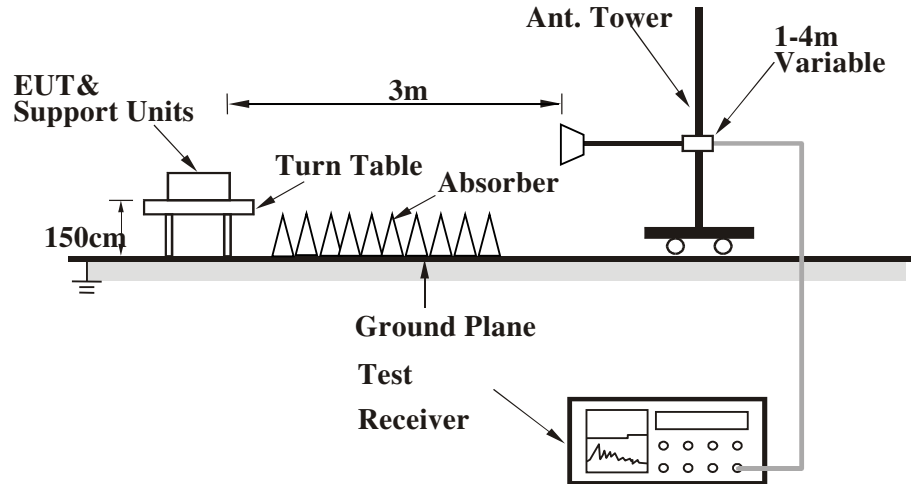

**Note:** For the actual test configuration, please refer to the attached file (Test Setup Photo).

### 4.2.6 EUT OPERATING CONDITIONS

- Placed the EUT on a testing table.
- Set the transmitter part of EUT under transmission condition continuously at specific channel frequency.
- The necessary accessories enable the EUT in full functions.

### 4.2.7 TEST RESULTS

**BELOW 1GHz WORST-CASE DATA:**


**802.11b**

<b>CHANNEL</b>	TX Channel 1	<b>DETECTOR FUNCTION</b>	Quasi-Peak (QP)
<b>FREQUENCY RANGE</b>	9KHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	58.12	24.1 QP	40.0	-15.9	2.00 H	109	38.2	-14.0
2	72.17	31.5 QP	40.0	-8.5	1.00 H	45	47.3	-15.8
3	437.68	30.8 QP	46.0	-15.2	1.00 H	117	40.9	-10.1
4	589.51	35.7 QP	46.0	-10.3	1.00 H	303	42.5	-6.8
5	609.19	39.6 QP	46.0	-6.4	1.00 H	152	46.0	-6.4
6	630.28	34.6 QP	46.0	-11.5	1.00 H	217	40.7	-6.2

**REMARKS:**

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were greater than 20dB margin.
4. 9KHz~30MHz have been test and test data more than 20dB margin.
5. Margin value = Emission level – Limit value.

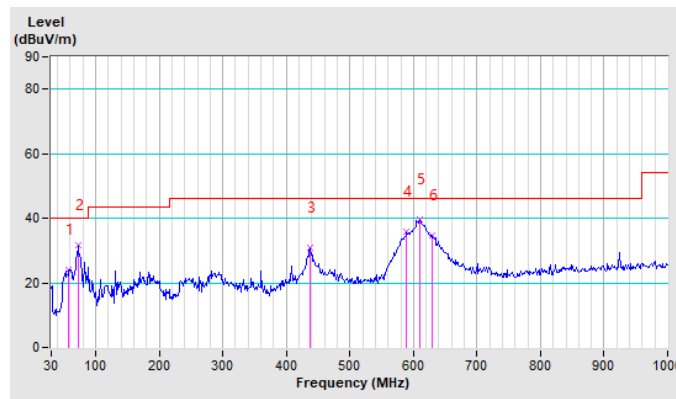


<b>CHANNEL</b>	TX Channel 1	<b>DETECTOR FUNCTION</b>	Quasi-Peak (QP)
<b>FREQUENCY RANGE</b>	9KHz ~ 1GHz		

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	31.41	30.9 QP	40.0	-9.1	1.00 V	59	47.3	-16.4
2	49.68	35.0 QP	40.0	-5.0	1.00 V	178	49.1	-14.1
3	72.17	29.6 QP	40.0	-10.4	1.00 V	103	45.4	-15.8
4	437.68	26.2 QP	46.0	-19.8	1.00 V	47	36.3	-10.1
5	592.32	33.9 QP	46.0	-12.1	1.00 V	219	40.6	-6.7
6	610.59	35.9 QP	46.0	-10.2	1.00 V	56	42.3	-6.4

**REMARKS:**

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were greater than 20dB margin.
4. 9KHz~30MHz have been test and test data more than 20dB margin.
5. Margin value = Emission level – Limit value.

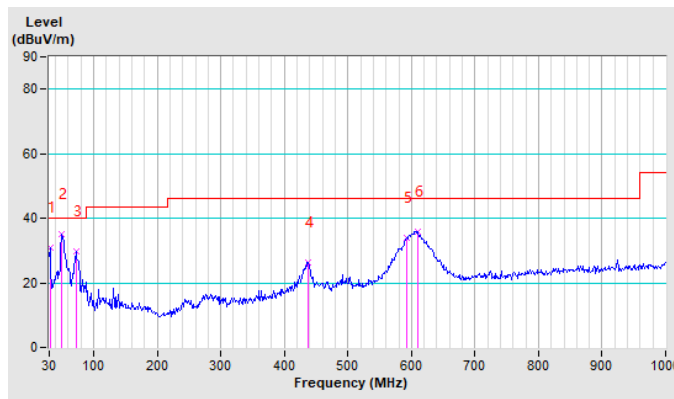



**ABOVE 1GHz DATA**  
802.11b

<b>CHANNEL</b>	TX Channel 1	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	45.8 PK	74.0	-28.2	1.20 H	155	43.8	2.0
2	2390.00	35.4 AV	54.0	-18.6	1.20 H	155	33.5	2.0
3	*2412.00	109.0 PK			1.20 H	155	107.0	2.0
4	*2412.00	104.4 AV			1.20 H	155	102.4	2.0
5	4824.00	49.2 PK	74.0	-24.9	1.00 H	125	44.2	5.0
6	4824.00	38.5 AV	54.0	-15.6	1.00 H	125	33.5	5.0
7	#7236.00	51.2 PK	74.0	-22.8	1.29 H	205	41.5	9.7
8	#7236.00	40.9 AV	54.0	-13.2	1.29 H	205	31.2	9.7

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	46.0 PK	74.0	-28.0	1.35 V	178	44.0	2.0
2	2390.00	35.1 AV	54.0	-18.9	1.35 V	178	33.1	2.0
3	*2412.00	103.0 PK			1.35 V	178	101.0	2.0
4	*2412.00	100.4 AV			1.35 V	178	98.4	2.0
5	4824.00	50.4 PK	74.0	-23.6	1.23 V	210	45.5	5.0
6	4824.00	38.8 AV	54.0	-15.2	1.23 V	210	33.9	5.0
7	#7236.00	52.7 PK	74.0	-21.3	1.00 V	165	43.0	9.7
8	#7236.00	41.6 AV	54.0	-12.4	1.00 V	165	31.9	9.7

**REMARKS:**

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were greater than 20dB margin.
4. Margin value = Emission level – Limit value.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.





Test Report No.: RF2203WDG0011-3

<b>CHANNEL</b>	TX Channel 6	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	109.3 PK			1.33 H	254	107.3	2.0
2	*2437.00	104.6 AV			1.33 H	254	102.6	2.0
3	4874.00	48.8 PK	74.0	-25.2	2.00 H	220	43.6	5.2
4	4874.00	38.9 AV	54.0	-15.1	2.00 H	220	33.8	5.2
5	7311.00	50.2 PK	74.0	-23.8	1.00 H	136	40.2	10.0
6	7311.00	40.1 AV	54.0	-13.9	1.00 H	136	30.1	10.0
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	103.9 PK			1.22 V	154	101.9	2.0
2	*2437.00	100.0 AV			1.22 V	154	98.0	2.0
3	4874.00	48.6 PK	74.0	-25.5	1.45 V	166	43.4	5.2
4	4874.00	38.9 AV	54.0	-15.1	1.45 V	166	33.8	5.2
5	7311.00	50.9 PK	74.0	-23.1	1.00 V	171	40.9	10.0
6	7311.00	40.6 AV	54.0	-13.5	1.00 V	171	30.6	10.0

**REMARKS:**

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were greater than 20dB margin.
4. Margin value = Emission level – Limit value.
5. " \* " : Fundamental frequency.



Test Report No.: RF2203WDG0011-3

<b>CHANNEL</b>	TX Channel 11	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	109.3 PK			1.00 H	125	107.2	2.0
2	*2462.00	104.5 AV			1.00 H	125	102.5	2.0
3	2483.50	47.2 PK	74.0	-26.9	1.00 H	125	45.1	2.0
4	2483.50	36.5 AV	54.0	-17.5	1.00 H	125	34.5	2.0
5	4924.00	50.1 PK	74.0	-23.9	1.08 H	142	44.8	5.4
6	4924.00	40.1 AV	54.0	-13.9	1.08 H	142	34.8	5.4
7	7386.00	52.5 PK	74.0	-21.5	1.66 H	158	42.2	10.3
8	7386.00	43.1 AV	54.0	-10.9	1.66 H	158	32.8	10.3
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	103.2 PK			1.44 V	158	101.1	2.0
2	*2462.00	100.1 AV			1.44 V	158	98.1	2.0
3	2483.50	45.2 PK	74.0	-28.8	1.44 V	158	43.2	2.0
4	2483.50	35.8 AV	54.0	-18.2	1.44 V	158	33.8	2.0
5	4924.00	50.8 PK	74.0	-23.2	1.00 V	150	45.5	5.4
6	4924.00	39.1 AV	54.0	-14.9	1.00 V	150	33.8	5.4
7	7386.00	53.4 PK	74.0	-20.6	1.00 V	125	43.1	10.3
8	7386.00	42.7 AV	54.0	-11.3	1.00 V	125	32.4	10.3

**REMARKS:**

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were greater than 20dB margin.
4. Margin value = Emission level – Limit value.
5. "\*" : Fundamental frequency.

802.11g

<b>CHANNEL</b>	TX Channel 1	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	52.1 PK	74.0	-21.9	1.40 H	135	50.2	2.0
2	2390.00	42.0 AV	54.0	-12.0	1.40 H	135	40.0	2.0
3	*2412.00	108.1 PK			1.40 H	135	106.1	2.0
4	*2412.00	98.3 AV			1.40 H	135	96.4	2.0
5	4824.00	48.9 PK	74.0	-25.1	1.00 H	159	44.0	5.0
6	4824.00	38.5 AV	54.0	-15.5	1.00 H	159	33.5	5.0
7	#7236.00	51.4 PK	74.0	-22.6	1.00 H	125	41.7	9.7
8	#7236.00	41.5 AV	54.0	-12.5	1.00 H	125	31.8	9.7
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	51.3 PK	74.0	-22.8	1.48 V	153	49.3	2.0
2	2390.00	41.6 AV	54.0	-12.5	1.48 V	153	39.6	2.0
3	*2412.00	106.3 PK			1.48 V	153	104.3	2.0
4	*2412.00	96.1 AV			1.48 V	153	94.1	2.0
5	4824.00	49.2 PK	74.0	-24.8	1.00 V	190	44.3	5.0
6	4824.00	38.5 AV	54.0	-15.6	1.00 V	190	33.5	5.0
7	#7236.00	51.8 PK	74.0	-22.2	1.00 V	183	42.1	9.7
8	#7236.00	39.4 AV	54.0	-14.6	1.00 V	183	29.8	9.7

**REMARKS:**

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were greater than 20dB margin.
4. Margin value = Emission level – Limit value.
5. " \* " : Fundamental frequency.
6. " # " : The radiated frequency is out of the restricted band.



Test Report No.: RF2203WDG0011-3

<b>CHANNEL</b>	TX Channel 6	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	108.2 PK			1.00 H	150	106.2	2.0
2	*2437.00	98.2 AV			1.00 H	150	96.2	2.0
3	4874.00	49.0 PK	74.0	-25.0	1.37 H	126	43.8	5.2
4	4874.00	39.3 AV	54.0	-14.8	1.37 H	126	34.1	5.2
5	7311.00	51.5 PK	74.0	-22.5	1.33 H	158	41.5	10.0
6	7311.00	42.4 AV	54.0	-11.6	1.33 H	158	32.4	10.0

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	106.5 PK			1.00 V	128	104.5	2.0
2	*2437.00	96.2 AV			1.00 V	128	94.2	2.0
3	4874.00	50.0 PK	74.0	-24.0	1.00 V	125	44.8	5.2
4	4874.00	49.0 AV	54.0	-5.0	1.00 V	125	43.8	5.2
5	7311.00	52.2 PK	74.0	-21.8	1.35 V	158	42.2	10.0
6	7311.00	39.9 AV	54.0	-14.2	1.35 V	158	29.9	10.0

**REMARKS:**

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were greater than 20dB margin.
4. Margin value = Emission level – Limit value.
5. " \* " : Fundamental frequency.



Test Report No.: RF2203WDG0011-3

<b>CHANNEL</b>	TX Channel 11	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	108.9 PK			1.00 H	125	106.9	2.0
2	*2462.00	98.3 AV			1.00 H	125	96.3	2.0
3	2483.50	52.3 PK	74.0	-21.7	1.00 H	125	50.3	2.0
4	2483.50	42.0 AV	54.0	-12.1	1.00 H	125	39.9	2.0
5	4924.00	49.4 PK	74.0	-24.7	1.22 H	185	44.0	5.4
6	4924.00	38.4 AV	54.0	-15.6	1.22 H	185	33.1	5.4
7	7386.00	51.9 PK	74.0	-22.1	1.20 H	187	41.6	10.3
8	7386.00	40.6 AV	54.0	-13.5	1.20 H	187	30.3	10.3
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	106.5 PK			1.54 V	135	104.5	2.0
2	*2462.00	96.6 AV			1.54 V	135	94.5	2.0
3	2483.50	53.0 PK	74.0	-21.0	1.54 V	135	51.0	2.0
4	2483.50	41.5 AV	54.0	-12.5	1.54 V	135	39.5	2.0
5	4924.00	48.9 PK	74.0	-25.1	1.40 V	129	43.6	5.4
6	4924.00	38.9 AV	54.0	-15.1	1.40 V	129	33.6	5.4
7	7386.00	50.1 PK	74.0	-23.9	1.37 V	142	39.8	10.3
8	7386.00	40.9 AV	54.0	-13.1	1.37 V	142	30.6	10.3

**REMARKS:**

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were greater than 20dB margin.
4. Margin value = Emission level – Limit value.
5. " \* ": Fundamental frequency.

802.11n HT20

<b>CHANNEL</b>	TX Channel 1	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	54.0 PK	74.0	-20.0	1.20 H	150	52.0	2.0
2	2390.00	39.5 AV	54.0	-14.5	1.20 H	150	37.5	2.0
3	*2412.00	106.7 PK			1.20 H	150	104.8	2.0
4	*2412.00	96.5 AV			1.20 H	150	94.6	2.0
5	4824.00	50.2 PK	74.0	-23.9	1.37 H	142	45.2	5.0
6	4824.00	39.5 AV	54.0	-14.6	1.37 H	142	34.5	5.0
7	#7236.00	53.1 PK	74.0	-20.9	1.00 H	125	43.4	9.7
8	#7236.00	43.5 AV	54.0	-10.5	1.00 H	125	33.9	9.7
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	54.6 PK	74.0	-19.4	1.83 V	144	52.6	2.0
2	2390.00	40.6 AV	54.0	-13.4	1.83 V	144	38.6	2.0
3	*2412.00	103.7 PK			1.83 V	144	101.7	2.0
4	*2412.00	94.5 AV			1.83 V	144	92.5	2.0
5	4824.00	49.0 PK	74.0	-25.0	1.00 V	163	44.0	5.0
6	4824.00	38.0 AV	54.0	-16.0	1.00 V	163	33.0	5.0
7	#7236.00	51.2 PK	74.0	-22.8	1.00 V	184	41.6	9.7
8	#7236.00	39.5 AV	54.0	-14.5	1.00 V	184	29.8	9.7

**REMARKS:**

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were greater than 20dB margin.
4. Margin value = Emission level – Limit value.
5. " \* " : Fundamental frequency.
6. " # " : The radiated frequency is out of the restricted band.



Test Report No.: RF2203WDG0011-3

<b>CHANNEL</b>	TX Channel 6	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	106.6 PK			1.00 H	125	104.6	2.0
2	*2437.00	96.2 AV			1.00 H	125	94.2	2.0
3	4874.00	51.6 PK	74.0	-22.4	1.59 H	138	46.4	5.2
4	4874.00	39.7 AV	54.0	-14.3	1.59 H	138	34.5	5.2
5	7311.00	53.2 PK	74.0	-20.9	1.05 H	140	43.2	10.0
6	7311.00	43.7 AV	54.0	-10.4	1.05 H	140	33.7	10.0
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	103.6 PK			1.00 V	190	101.6	2.0
2	*2437.00	93.6 AV			1.00 V	190	91.6	2.0
3	4874.00	52.1 PK	74.0	-21.9	1.25 V	149	46.9	5.2
4	4874.00	39.8 AV	54.0	-14.3	1.25 V	149	34.6	5.2
5	7311.00	53.1 PK	74.0	-20.9	1.00 V	179	43.1	10.0
6	7311.00	43.7 AV	54.0	-10.3	1.00 V	179	33.7	10.0

**REMARKS:**

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were greater than 20dB margin.
4. Margin value = Emission level – Limit value.
5. " \* ": Fundamental frequency.



Test Report No.: RF2203WDG0011-3

<b>CHANNEL</b>	TX Channel 11	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	106.2 PK			1.00 H	145	104.2	2.0
2	*2462.00	96.6 AV			1.00 H	145	94.6	2.0
3	2483.50	54.1 PK	74.0	-19.9	1.00 H	145	52.1	2.0
4	2483.50	40.1 AV	54.0	-13.9	1.00 H	145	38.1	2.0
5	4924.00	49.8 PK	74.0	-24.2	1.22 H	125	44.4	5.4
6	4924.00	38.4 AV	54.0	-15.6	1.22 H	125	33.1	5.4
7	7386.00	52.1 PK	74.0	-21.9	1.36 H	187	41.8	10.3
8	7386.00	40.6 AV	54.0	-13.4	1.36 H	187	30.3	10.3
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	103.6 PK			1.70 V	128	101.6	2.0
2	*2462.00	93.9 AV			1.70 V	128	91.8	2.0
3	2483.50	54.2 PK	74.0	-19.9	1.70 V	128	52.1	2.0
4	2483.50	39.4 AV	54.0	-14.6	1.70 V	128	37.4	2.0
5	4924.00	51.3 PK	74.0	-22.7	1.21 V	152	46.0	5.4
6	4924.00	39.1 AV	54.0	-14.9	1.21 V	152	33.7	5.4
7	7386.00	51.0 PK	74.0	-23.1	1.45 V	147	40.7	10.3
8	7386.00	40.8 AV	54.0	-13.2	1.45 V	147	30.5	10.3

**REMARKS:**

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were greater than 20dB margin.
4. Margin value = Emission level – Limit value.
5. "\*" : Fundamental frequency.





802.11n HT40

<b>CHANNEL</b>	TX Channel 3	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	52.2 PK	74.0	-21.8	1.00 H	150	50.2	2.0
2	2390.00	40.1 AV	54.0	-13.9	1.00 H	150	38.1	2.0
3	*2422.00	103.9 PK			1.00 H	150	101.9	2.0
4	*2422.00	93.7 AV			1.00 H	150	91.7	2.0
5	4844.00	51.7 PK	74.0	-22.3	1.41 H	126	46.7	5.0
6	4844.00	41.5 AV	54.0	-12.5	1.41 H	126	36.5	5.0
7	7266.00	53.1 PK	74.0	-20.9	1.80 H	174	43.3	9.8
8	7266.00	44.5 AV	54.0	-9.5	1.80 H	174	34.7	9.8
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	51.3 PK	74.0	-22.8	1.00 V	360	49.3	2.0
2	2390.00	38.4 AV	54.0	-15.6	1.00 V	360	36.4	2.0
3	*2422.00	98.5 PK			1.00 V	125	96.5	2.0
4	*2422.00	88.5 AV			1.00 V	125	86.5	2.0
5	4844.00	51.7 PK	74.0	-22.3	1.26 V	185	46.7	5.0
6	4844.00	39.0 AV	54.0	-15.0	1.26 V	185	34.0	5.0
7	7266.00	54.0 PK	74.0	-20.0	1.00 V	191	44.2	9.8
8	7266.00	44.0 AV	54.0	-10.0	1.00 V	191	34.2	9.8

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were greater than 20dB margin.
4. Margin value = Emission level – Limit value.
5. " \* ": Fundamental frequency.



Test Report No.: RF2203WDG0011-3

<b>CHANNEL</b>	TX Channel 6	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	103.2 PK			1.00 H	179	101.2	2.0
2	*2437.00	93.5 AV			1.00 H	179	91.5	2.0
3	4874.00	51.0 PK	74.0	-23.0	1.00 H	195	45.8	5.2
4	4874.00	40.0 AV	54.0	-14.0	1.00 H	195	34.8	5.2
5	7311.00	53.0 PK	74.0	-21.0	1.00 H	158	43.0	10.0
6	7311.00	43.7 AV	54.0	-10.3	1.00 H	158	33.7	10.0

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	98.5 PK			1.00 V	180	96.5	2.0
2	*2437.00	88.1 AV			1.00 V	180	86.1	2.0
3	4874.00	51.3 PK	74.0	-22.8	1.00 V	200	46.1	5.2
4	4874.00	40.5 AV	54.0	-13.5	1.00 V	200	35.4	5.2
5	7311.00	53.7 PK	74.0	-20.3	1.00 V	136	43.7	10.0
6	7311.00	43.3 AV	54.0	-10.8	1.00 V	136	33.3	10.0

**REMARKS:**

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were greater than 20dB margin.
4. Margin value = Emission level – Limit value.
5. " \* " : Fundamental frequency.



Test Report No.: RF2203WDG0011-3

<b>CHANNEL</b>	TX Channel 9	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	103.3 PK			1.00 H	227	101.3	2.0
2	*2452.00	93.5 AV			1.00 H	227	91.5	2.0
3	2483.50	52.6 PK	74.0	-21.4	1.00 H	227	50.6	2.0
4	2483.50	37.0 AV	54.0	-17.0	1.00 H	227	35.0	2.0
5	4904.00	50.9 PK	74.0	-23.2	1.26 H	173	45.6	5.3
6	4904.00	39.4 AV	54.0	-14.6	1.26 H	173	34.2	5.3
7	7356.00	53.1 PK	74.0	-20.9	1.80 H	162	42.9	10.2
8	7356.00	43.7 AV	54.0	-10.3	1.80 H	162	33.5	10.2
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	97.5 PK			1.00 V	125	95.5	2.0
2	*2452.00	88.4 AV			1.00 V	125	86.4	2.0
3	2483.50	52.1 PK	74.0	-21.9	1.00 V	125	50.1	2.0
4	2483.50	39.2 AV	54.0	-14.8	1.00 V	125	37.2	2.0
5	4904.00	51.7 PK	74.0	-22.3	1.25 V	155	46.5	5.3
6	4904.00	39.5 AV	54.0	-14.5	1.25 V	155	34.3	5.3
7	7356.00	54.0 PK	74.0	-20.0	1.20 V	159	43.8	10.2
8	7356.00	43.5 AV	54.0	-10.5	1.20 V	159	33.3	10.2

**REMARKS:**

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were greater than 20dB margin.
4. Margin value = Emission level – Limit value.
5. " \* ": Fundamental frequency.

### 4.3 6dB BANDWIDTH MEASUREMENT

#### 4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

#### 4.3.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Next Cal.
Power Sensor	Keysight	U2021XA	MY57320002	Feb. 23, 23
Power Sensor	Keysight	U2021XA	MY55060018	May 09, 23
Digital Multimeter	FLUKE	15B	A1220010DG	N/A
Humid & Temp Programmable Tester	Haida	HD-225T	110807201	Nov. 03, 22
Oscilloscope	Agilent	DSO9254A	MY51260160	Aug. 11, 22
Signal and Spectrum Analyzer	Rohde&Schwarz	FSV40	101094	Jan. 16, 23
Signal Generator	Agilent	N5183A	MY50140980	Sep. 18, 22
MXG-B RF Vector Signal Generator	Keysight	N5182B	MY56200288	Sep. 14, 22
BLUETOOTH TESTER	Rohde&Schwarz	CBT32	100811	N/A
Attenuator	MINI	BW-S10W2+	S130129FGE2	N/A
DC Source	Keysight	E3642A	MY56146098	N/A
Test software	ADT	ADT_RF Test Software V6.6.5.3	N/A	N/A

- NOTES:** 1. The test was performed in RF Oven room. (Chenwu)  
 2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.

#### 4.3.3 TEST PROCEDURE


1. Set resolution bandwidth (RBW) = 100KHz
2. Set the video bandwidth (VBW)  $\geq 3 \times$  RBW, Detector = Peak.
3. Trace mode = max hold.
4. Sweep = auto couple.
5. Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.



#### 4.3.4 DEVIATION FROM TEST STANDARD

No deviation.

#### 4.3.5 TEST SETUP

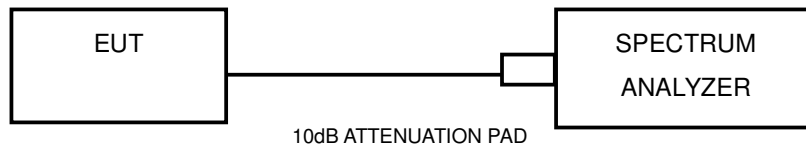

#### 4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

#### 4.3.7 TEST RESULTS

##### 802.11b

##### Chain 0

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2412	8.60	0.5	PASS
6	2437	9.09	0.5	PASS
11	2462	9.08	0.5	PASS

##### Chain 1

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2412	9.09	0.5	PASS
6	2437	9.11	0.5	PASS
11	2462	9.10	0.5	PASS

##### 802.11g

##### Chain 0

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2412	15.16	0.5	PASS
6	2437	15.17	0.5	PASS
11	2462	15.16	0.5	PASS

##### Chain 1

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2412	15.17	0.5	PASS
6	2437	15.16	0.5	PASS
11	2462	15.19	0.5	PASS


802.11n HT20

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)		MINIMUM LIMIT (MHz)	PASS / FAIL
		Chain0	Chain1		
1	2412	15.17	15.16	0.5	PASS
6	2437	15.17	15.18	0.5	PASS
11	2462	15.18	15.17	0.5	PASS

802.11n HT40


CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)		MINIMUM LIMIT (MHz)	PASS / FAIL
		Chain0	Chain1		
3	2422	35.27	35.24	0.5	PASS
6	2437	35.24	35.22	0.5	PASS
9	2452	35.21	35.21	0.5	PASS

Chain 0

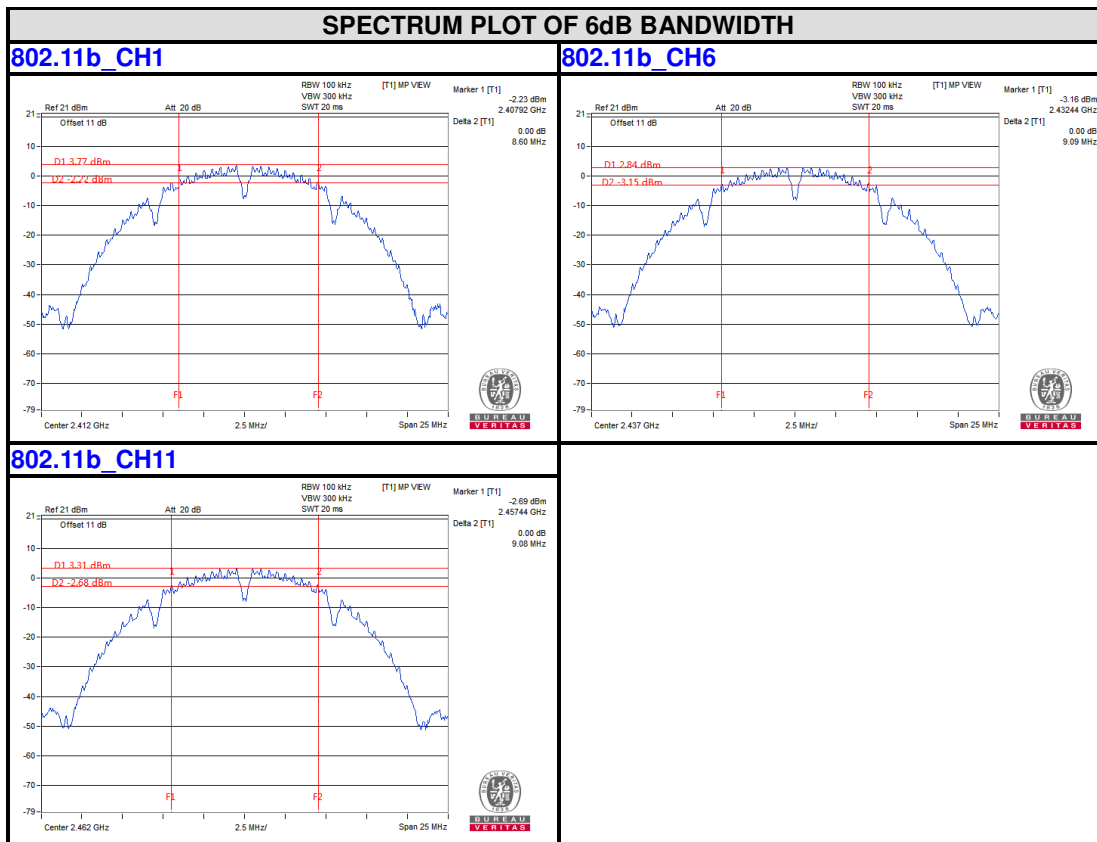




Chain 1

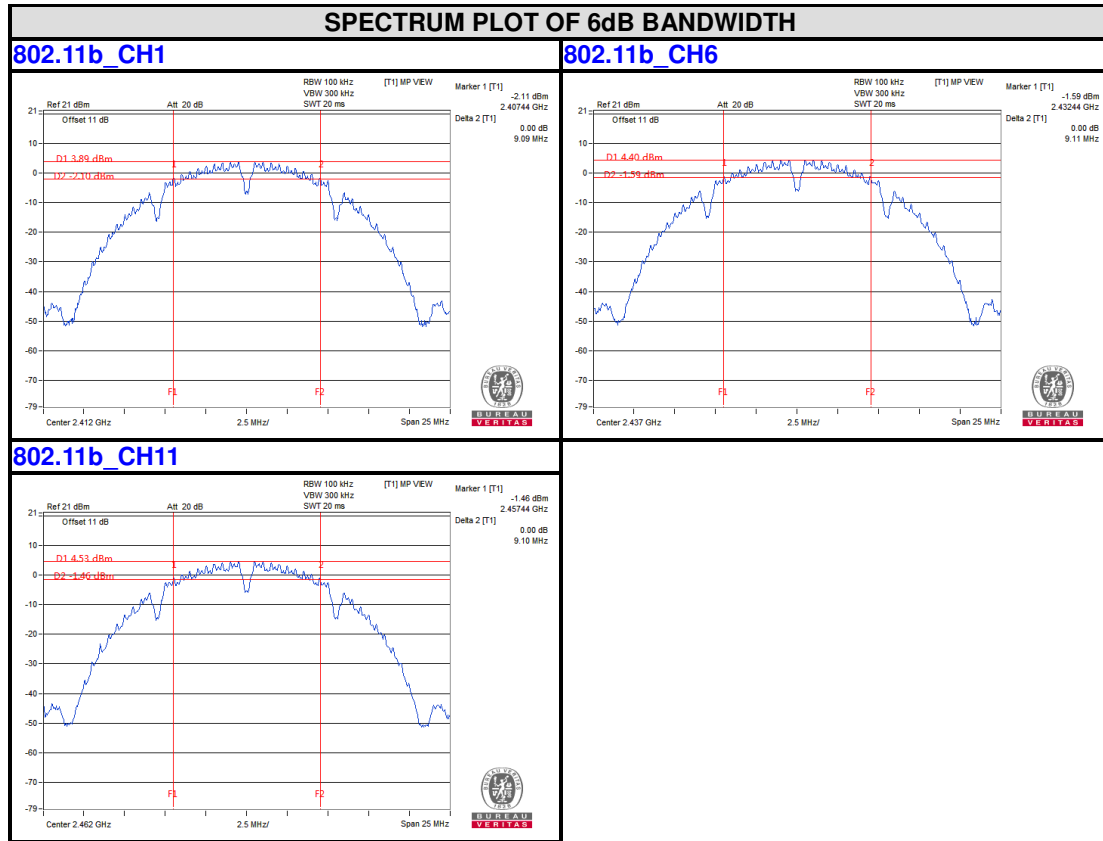


Chain 0

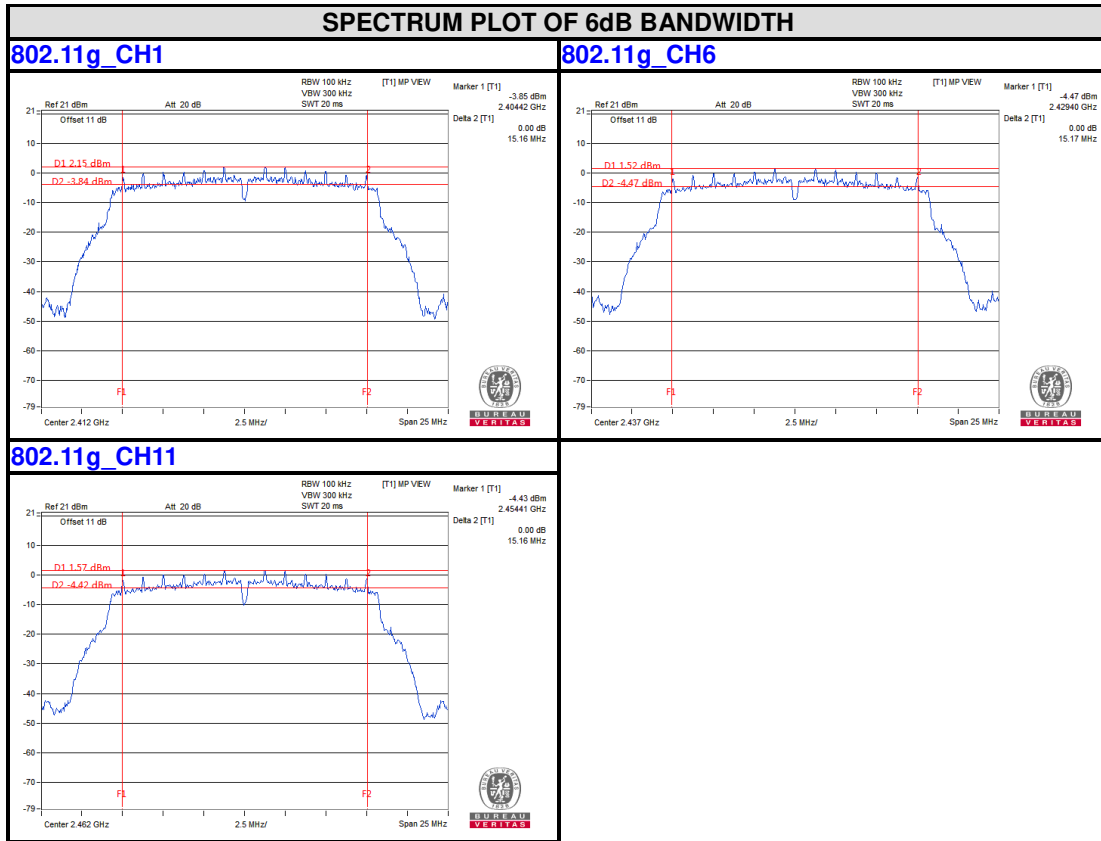




Chain 1

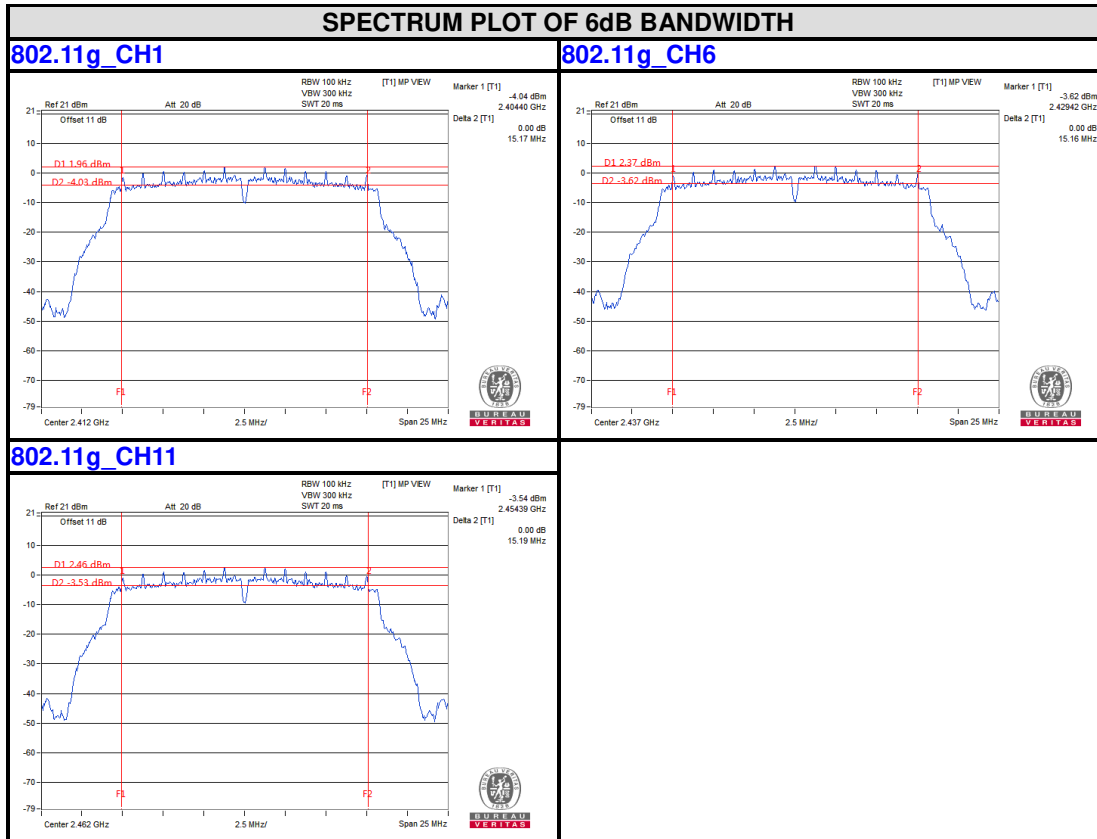


Chain 0

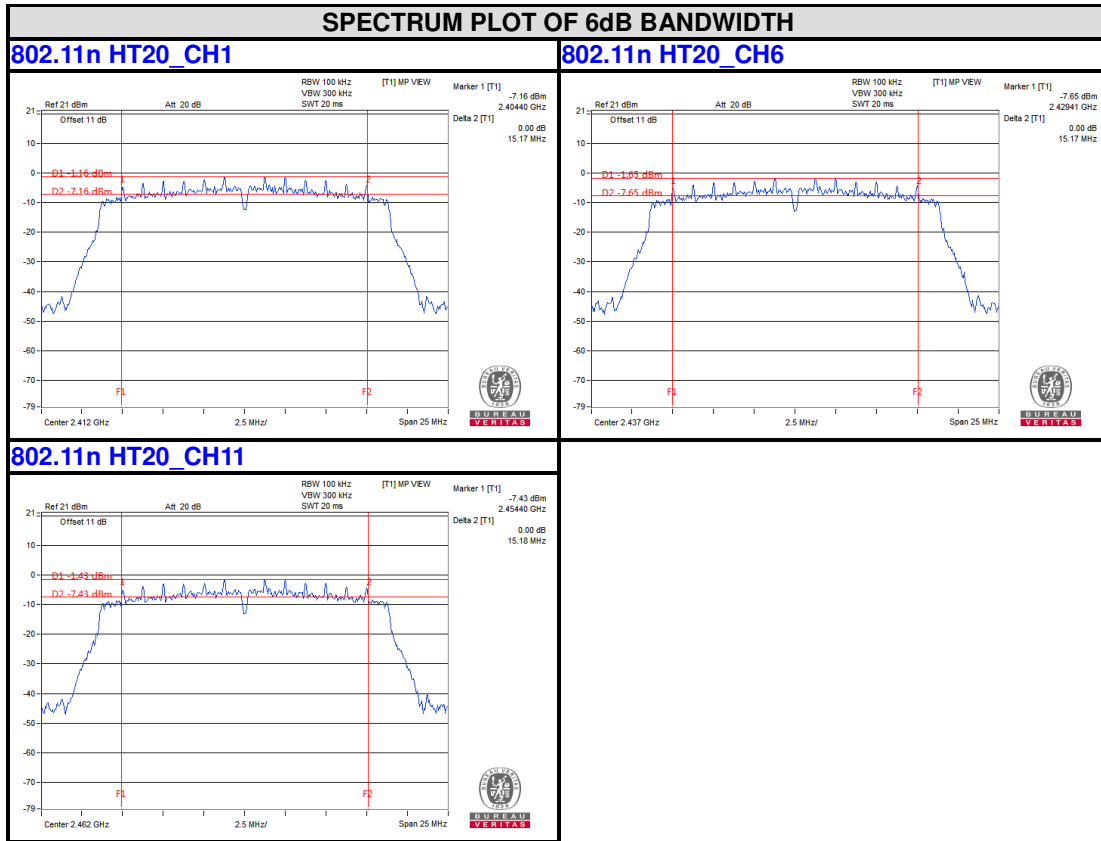




Chain 1

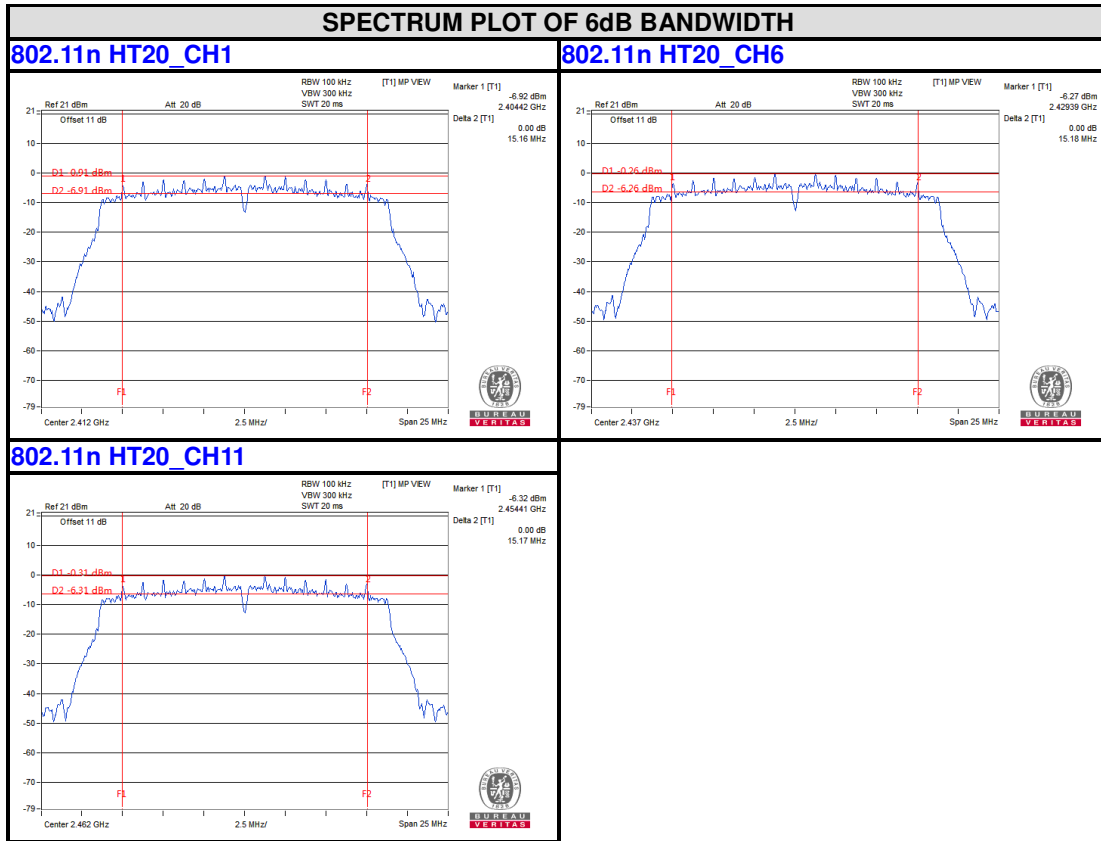




Chain 0

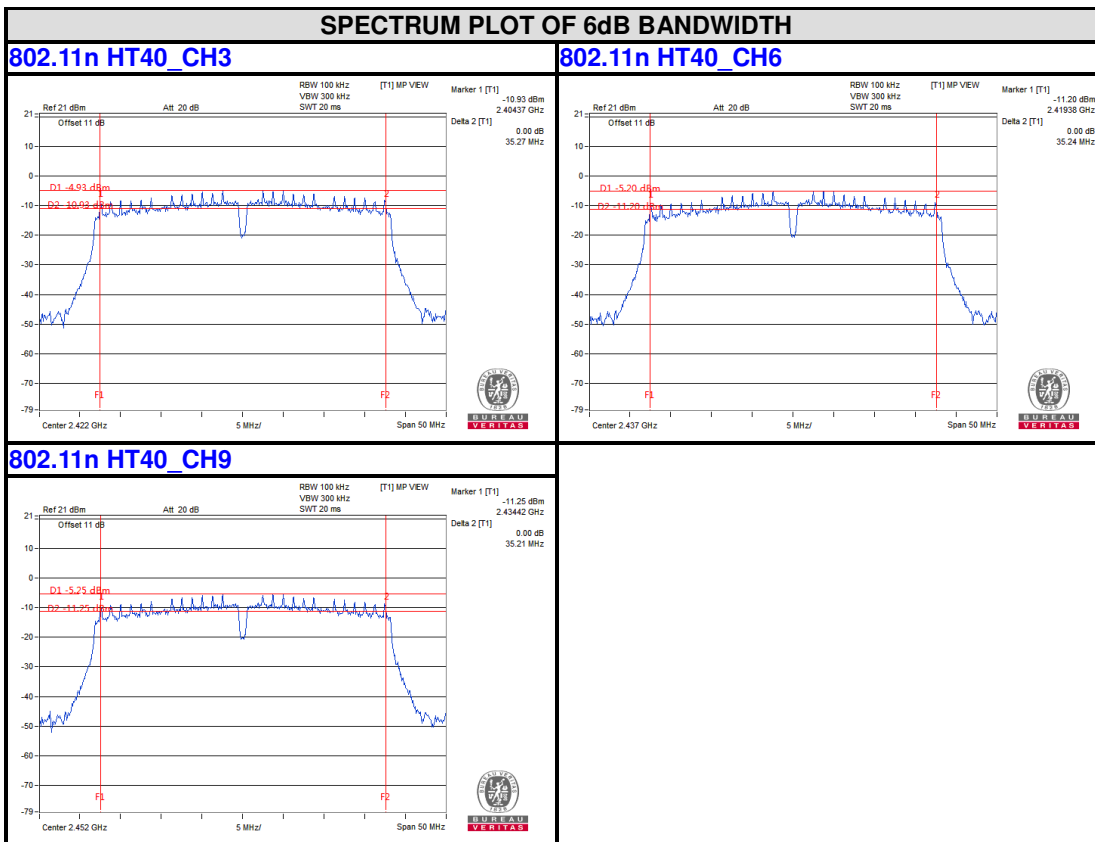

Chain 1

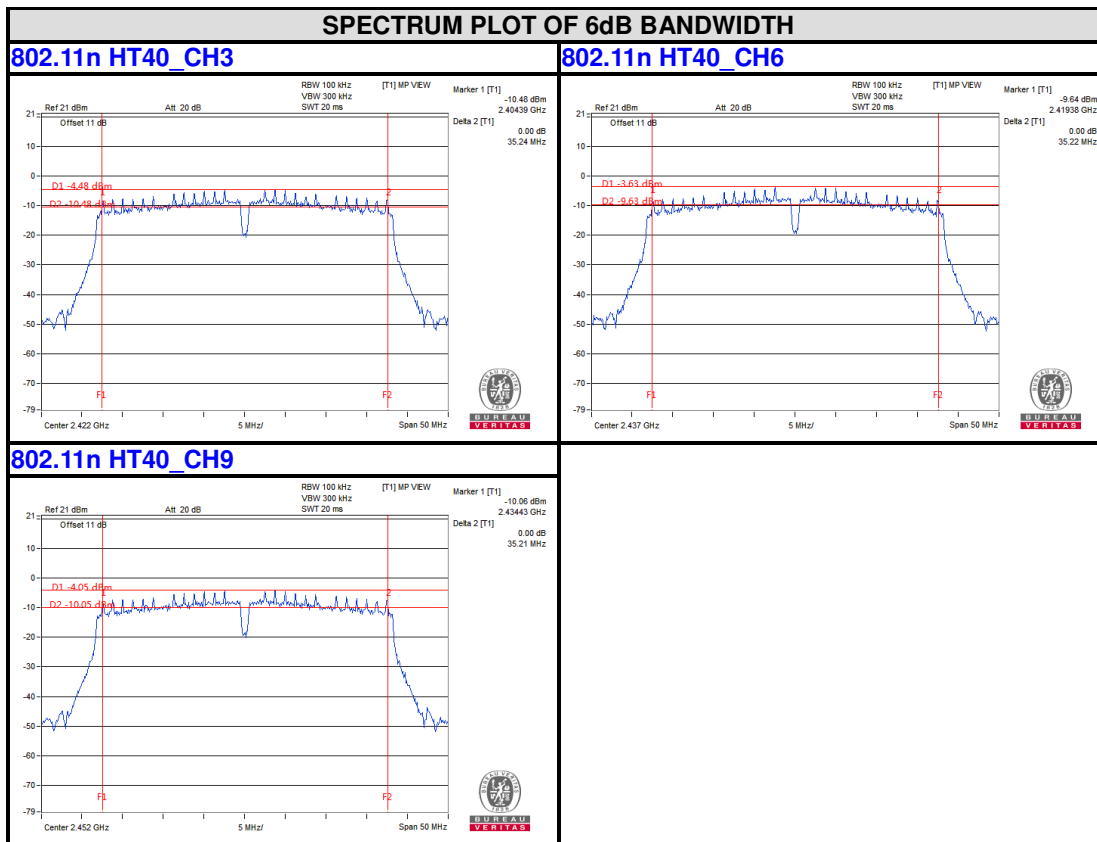


## 4.4 CONDUCTED OUTPUT POWER

### 4.4.1 LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT

For systems using digital modulation in the 2400–2483.5 MHz band: 1 Watt (30dBm).

### 4.4.2 TEST SETUP

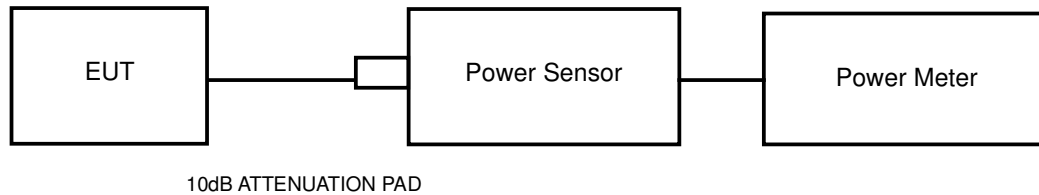

### 4.4.3 TEST INSTRUMENTS

Refer to section 4.3.2 to get information of above instrument.

### 4.4.4 TEST PROCEDURES

A peak power sensor was used on the output port of the EUT. A peak power meter was used to read the response of the peak power sensor. Record the peak power level.

### 4.4.5 DEVIATION FROM TEST STANDARD

No deviation.

### 4.4.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.



#### 4.4.7 TEST RESULTS

##### MAXIMUM PEAK OUTPUT POWER

###### 802.11b

###### Chain 0

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER (dBm)	PEAK POWER (mW)	PEAK POWER LIMIT (W)	PASS/FAIL
1	2412	16.48	44.463	1	PASS
6	2437	16.02	39.994	1	PASS
11	2462	16.32	42.855	1	PASS

###### Chain 1

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER (dBm)	PEAK POWER (mW)	PEAK POWER LIMIT (W)	PASS/FAIL
1	2412	16.42	43.853	1	PASS
6	2437	17.23	52.845	1	PASS
11	2462	16.84	48.306	1	PASS

###### 802.11g

###### Chain 0

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER (dBm)	PEAK POWER (mW)	PEAK POWER LIMIT (W)	PASS/FAIL
1	2412	20.99	125.603	1	PASS
6	2437	20.49	111.944	1	PASS
11	2462	20.64	115.878	1	PASS

###### Chain 1

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER (dBm)	PEAK POWER (mW)	PEAK POWER LIMIT (W)	PASS/FAIL
1	2412	20.68	116.95	1	PASS
6	2437	<b>21.42</b>	<b>138.676</b>	1	PASS
11	2462	20.83	121.06	1	PASS

802.11n HT20

CHAN.	FRE. (MHz)	PEAK POWER (dBm)		PEAK POWER (mW)		TOTAL POWER (mW)	TOTAL POWER (dBm)	PEAK POWER LIMIT (W)	PASS/ FAIL
		CHAIN 0	CHAIN 1	CHAIN 0	CHAIN 1				
1	2412	17.74	18.31	59.429	67.764	127.193	21.04	1	PASS
6	2437	17.39	19.08	54.828	80.91	135.738	21.33	1	PASS
11	2462	17.59	18.69	57.412	73.961	131.373	21.19	1	PASS

**Note:** 1.Direction Gain=3.73 +10\*log(2)=6.74dBi, not exceed 3dB, so the limit is no need to be reduced.

802.11n HT40

CHAN.	FRE. (MHz)	PEAK POWER (dBm)		PEAK POWER (mW)		TOTAL POWER (mW)	TOTAL POWER (dBm)	PEAK POWER LIMIT (W)	PASS/ FAIL
		CHAIN 0	CHAIN 1	CHAIN 0	CHAIN 1				
3	2422	16.92	17.39	49.204	54.828	104.032	20.17	1	PASS
6	2437	16.58	17.94	45.499	62.23	107.729	20.32	1	PASS
9	2452	16.59	18.09	45.604	64.417	110.021	20.41	1	PASS

**Note:** 1.Direction Gain=3.73 +10\*log(2)=6.74dBi, not exceed 3dB, so the limit is no need to be reduced.

**AVERAGE OUTPUT POWER (FOR REFERENCE)**

The average power sensor was used on the output port of the EUT. A power meter was used to read the response of the power sensor. Record the power level.

**802.11b**  
**Chain 0**

CHANNEL	CHANNEL FREQUENCY (MHz)	AVERAGE POWER (dBm)	AVG. POWER (mW)
1	2412	13.42	21.979
6	2437	13.06	20.230
11	2462	13.36	21.677

**Chain 1**

CHANNEL	CHANNEL FREQUENCY (MHz)	AVERAGE POWER (dBm)	AVG. POWER (mW)
1	2412	13.41	21.928
6	2437	14.21	26.363
11	2462	13.84	24.210

**802.11g**  
**Chain 0**

CHANNEL	CHANNEL FREQUENCY (MHz)	AVERAGE POWER (dBm)	AVG. POWER (mW)
1	2412	12.96	19.770
6	2437	12.49	17.742
11	2462	12.62	18.281

**Chain 1**

CHANNEL	CHANNEL FREQUENCY (MHz)	AVERAGE POWER (dBm)	AVG. POWER (mW)
1	2412	12.52	17.865
6	2437	13.12	20.512
11	2462	12.63	18.323

802.11n HT20

CHANNEL	CHANNEL FREQUENCY (MHz)	AVERAGE POWER (dBm)		AVG. POWER (mW)		TOTAL POWER (dBm)	TOTAL POWER (mW)
		CHAIN 0	CHAIN 1	CHAIN 0	CHAIN 1		
1	2412	9.69	9.98	9.311	9.954	12.85	19.265
6	2437	9.58	10.74	9.078	11.858	13.21	20.936
11	2462	9.68	10.29	9.290	10.691	13.01	19.980

802.11n HT40


CHANNEL	CHANNEL FREQUENCY (MHz)	AVERAGE POWER (dBm)		AVG. POWER (mW)		TOTAL POWER (dBm)	TOTAL POWER (mW)
		CHAIN 0	CHAIN 1	CHAIN 0	CHAIN 1		
3	2422	8.98	8.96	7.907	7.870	11.98	15.777
6	2437	8.67	9.59	7.362	9.099	12.16	16.461
9	2452	8.72	9.63	7.447	9.183	12.21	16.631

## 4.5 POWER SPECTRAL DENSITY MEASUREMENT

### 4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm/3KHz.

### 4.5.2 TEST SETUP

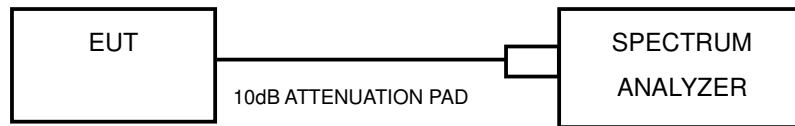

### 4.5.3 TEST INSTRUMENTS

Refer to section 4.3.2 to get information of above instrument.

### 4.5.4 TEST PROCEDURE

- a) Set instrument center frequency to DTS channel center frequency.
- b) Set span to 1.5 times the DTS bandwidth.
- c) Set RBW to: 3KHz
- d) Set VBW  $\geq 3 \times$  RBW.
- e) Detector = peak
- f) Ensure that the number of measurement points in the sweep  $\geq 2 \times$  span/RBW.
- g) Sweep time = auto couple.
- h) Use the peak marker function to determine the maximum amplitude level.

### 4.5.5 DEVIATION FROM TEST STANDARD

No deviation.

#### 4.5.6 EUT OPERATING CONDITION

Same as item 4.3.6.

#### 4.5.7 TEST RESULTS

##### 802.11b

###### Chain 0

Channel	FREQ. (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
1	2412	-11.46	8.00	PASS
6	2437	-14.09	8.00	PASS
11	2462	-13.75	8.00	PASS

###### Chain 1

Channel	FREQ. (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
1	2412	-12.95	8.00	PASS
6	2437	-10.27	8.00	PASS
11	2462	-12.02	8.00	PASS

##### 802.11g

###### Chain 0

Channel	FREQ. (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
1	2412	-13.93	8.00	PASS
6	2437	-14.15	8.00	PASS
11	2462	-13.91	8.00	PASS

###### Chain 1

Channel	FREQ. (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
1	2412	-13.37	8.00	PASS
6	2437	-13.76	8.00	PASS
11	2462	-12.98	8.00	PASS

802.11n HT20


Channel	FREQ. (MHz)	PSD (dBm/3kHz)		TOTAL (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
		Chain 0	Chain 1			
1	2412	-17.20	-15.17	-13.06	8.00	PASS
6	2437	-17.89	-14.82	-13.08	8.00	PASS
11	2462	-17.26	-14.91	-12.92	8.00	PASS

**Note:** 1. Directional Gain=3.73+10\*log(2)=6.74dBi, not exceed 3dB, so the limit is no need to be reduced.

802.11n HT40

Channel	FREQ. (MHz)	PSD (dBm/3kHz)		TOTAL (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
		Chain 0	Chain 1			
3	2422	-20.44	-20.83	-17.62	8.00	PASS
6	2437	-20.71	-19.41	-17.00	8.00	PASS
9	2452	-20.68	-20.02	-17.33	8.00	PASS

**Note:** 1. Directional Gain=3.73+10\*log(2)=6.74dBi, not exceed 3dB, so the limit is no need to be reduced.

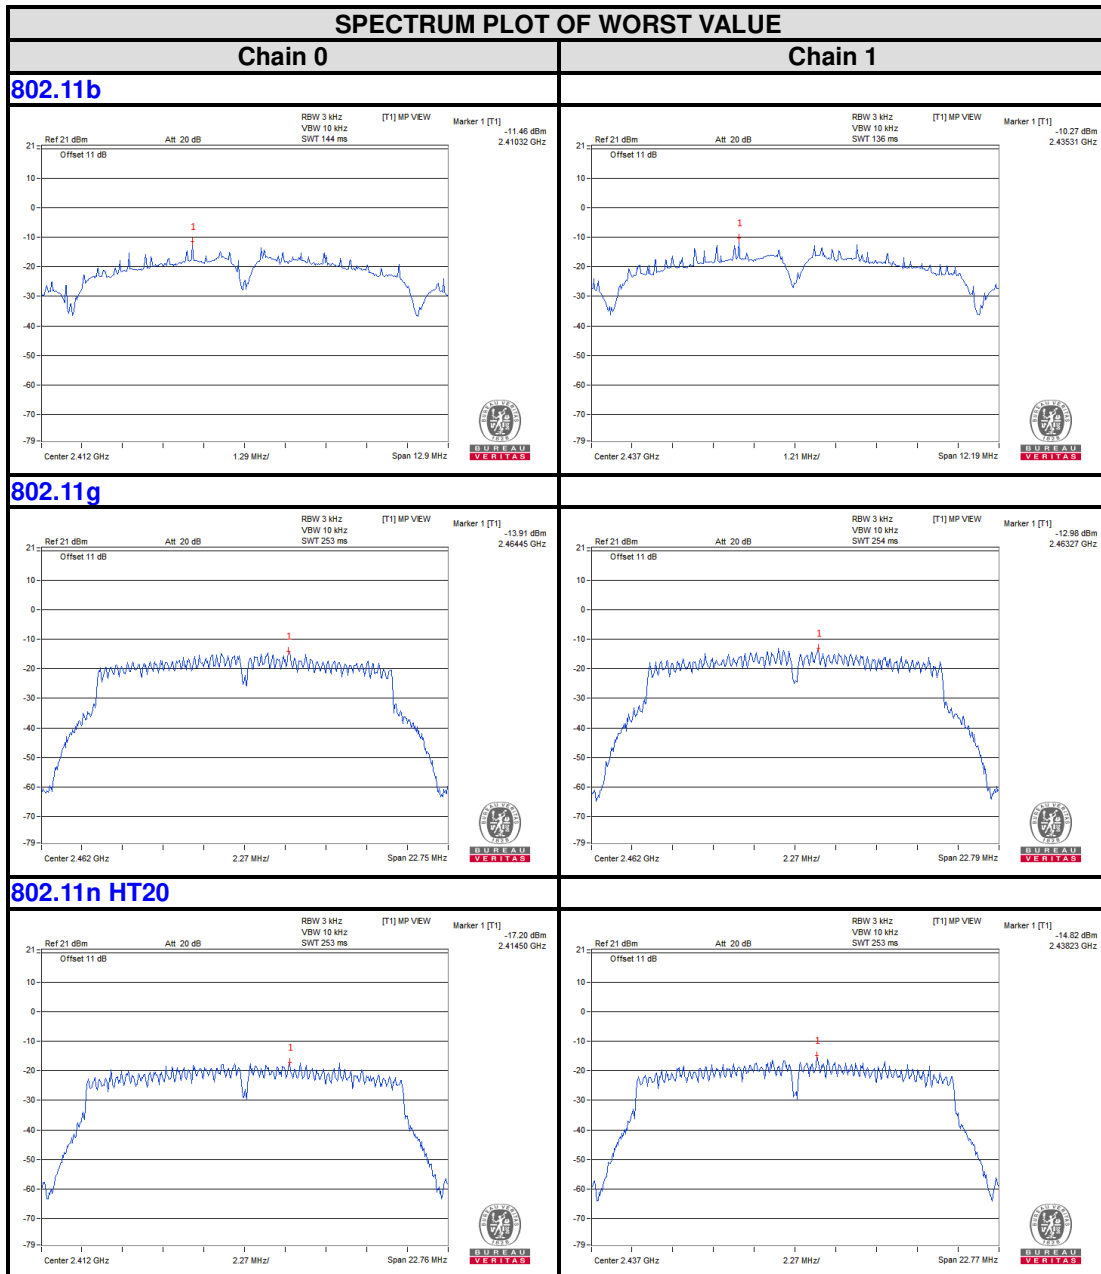






BUREAU  
VERITAS

Test Report No.: RF2203WDG0011-3

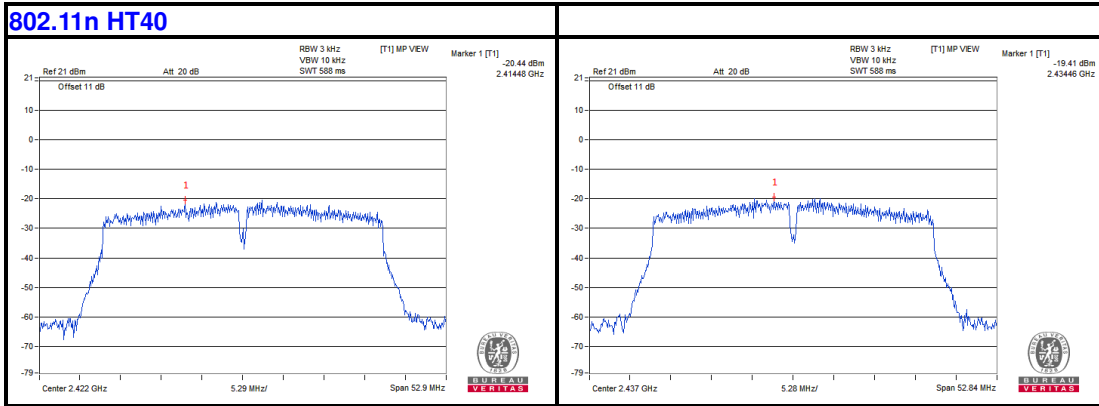

Bureau Veritas Shenzhen Co., Ltd.  
Dongguan Branch

No. 96, Guantai Road (Houjie Section), Houjie  
Town, Dongguan City, Guangdong Province.  
523942, People's Republic of China.

Tel: +86 769 8998 2098  
Fax: +86 769 8593 1080  
Email: [customerservice.dg@bureauveritas.com](mailto:customerservice.dg@bureauveritas.com)

## 4.6 OUT OF BAND EMISSION MEASUREMENT

### 4.6.1 LIMITS OF OUT OF BAND EMISSION MEASUREMENT

Below  $-20\text{dB}$  of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

### 4.6.2 TEST SETUP



### 4.6.3 TEST INSTRUMENTS

Refer to section 4.3.2 to get information of above instrument.

### 4.6.4 TEST PROCEDURE

#### Measurement Procedure - Reference Level

1. Set the RBW = 100 kHz.
2. Set the VBW  $\geq$  300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.



Test Report No.: RF2203WDG0011-3

### Measurement Procedure –Unwanted Emission Level

1. Set RBW = 100 kHz.
2. Set VBW  $\geq$  300 kHz.
3. Set span to encompass the spectrum to be examined
4. Detector = peak.
5. Trace Mode = max hold.
6. Sweep = auto couple.

#### 4.6.5 DEVIATION FROM TEST STANDARD

No deviation.


#### 4.6.6 EUT OPERATING CONDITION

Same as item 4.3.6




### 4.6.7 TEST RESULTS


802.11b  
Chain 0

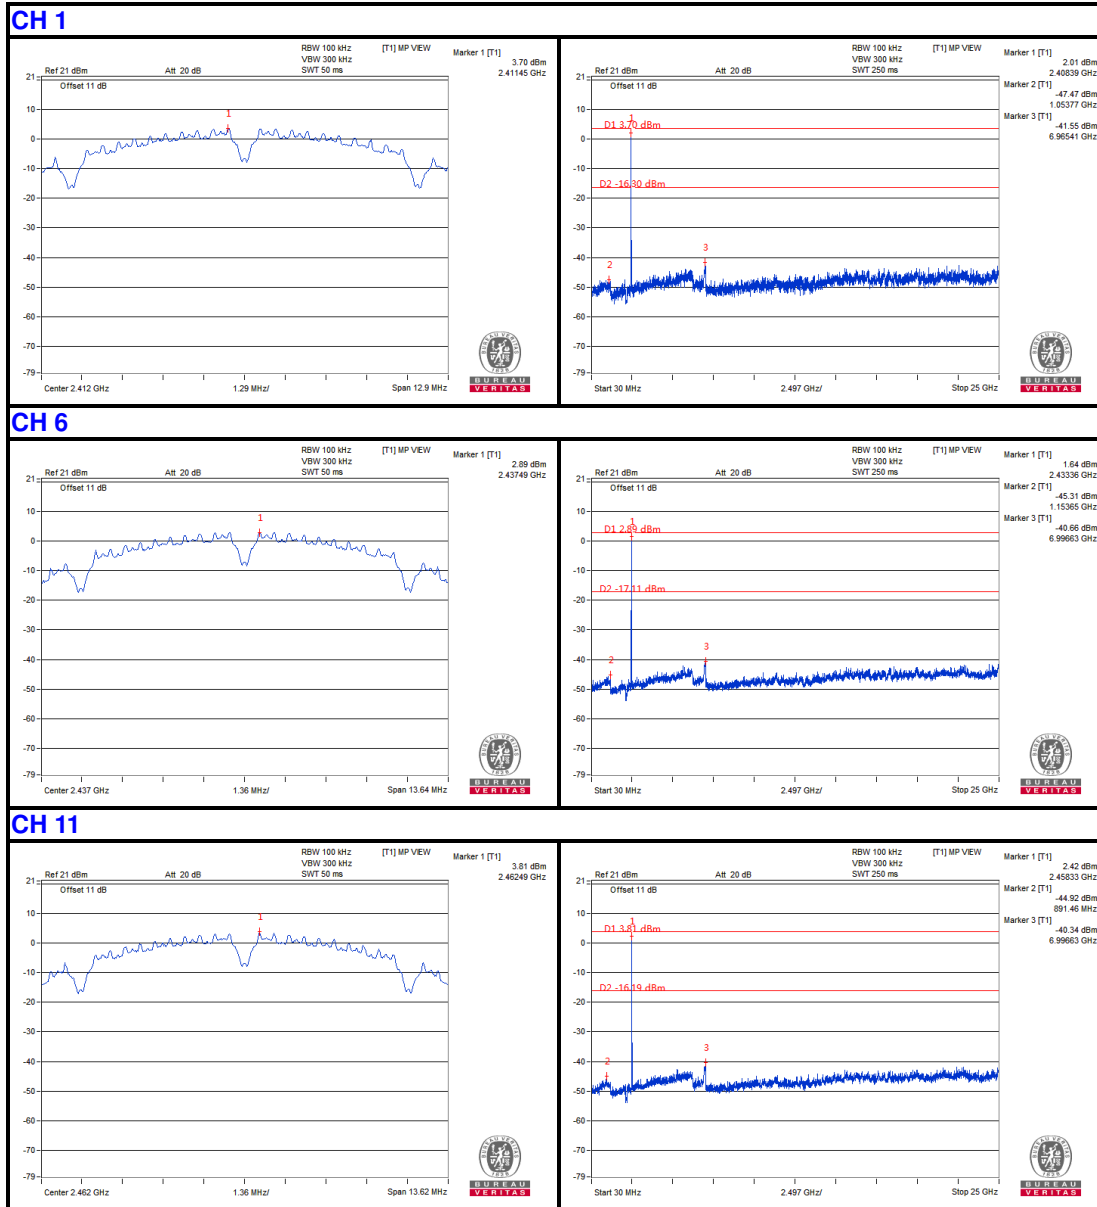

Chain 1

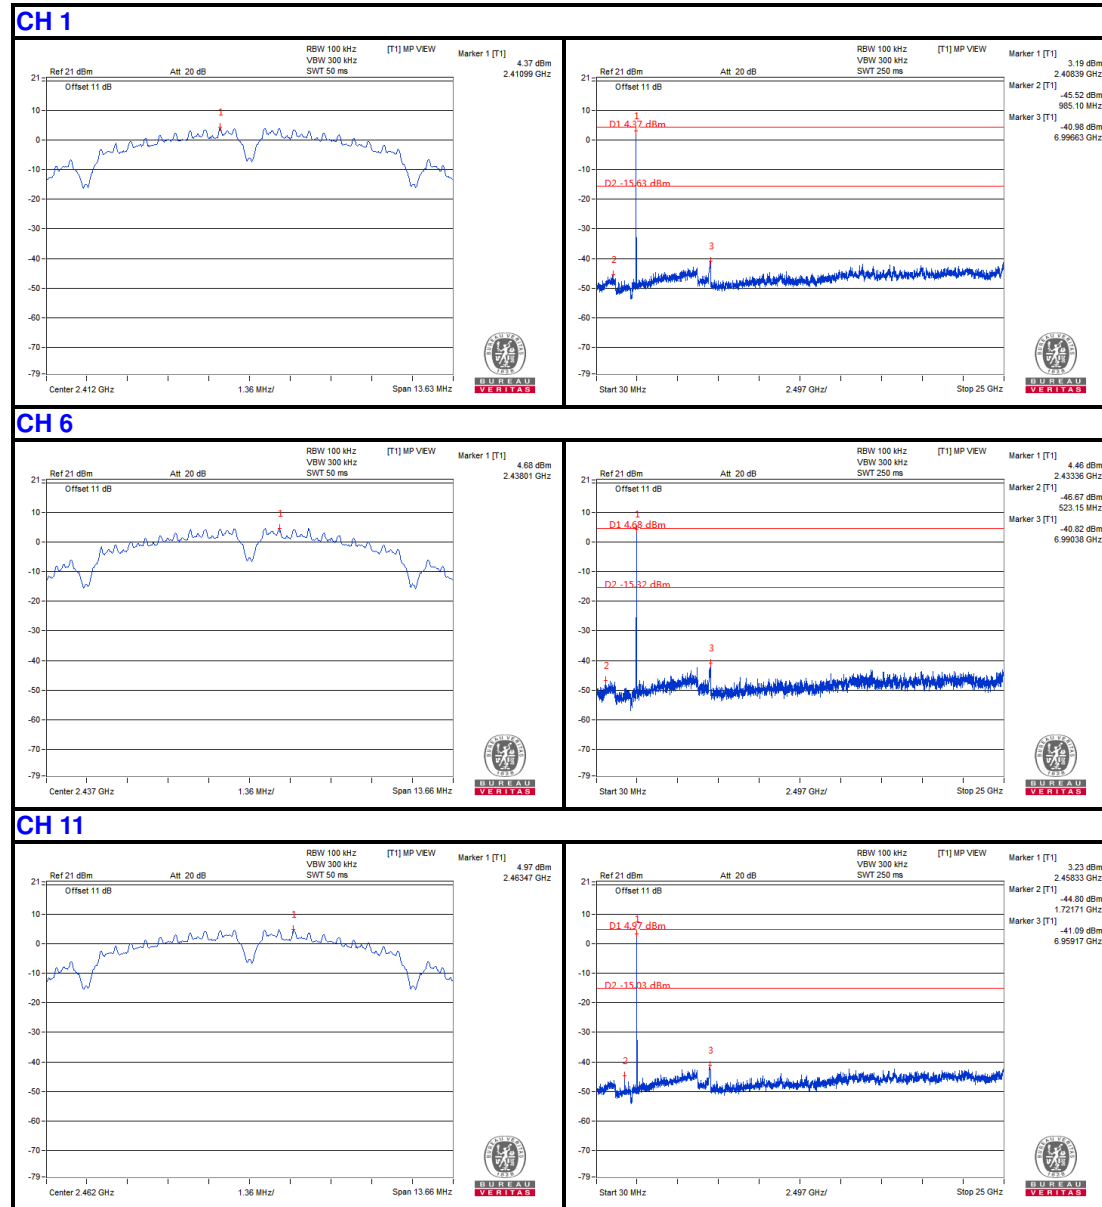


802.11g  
Chain 0

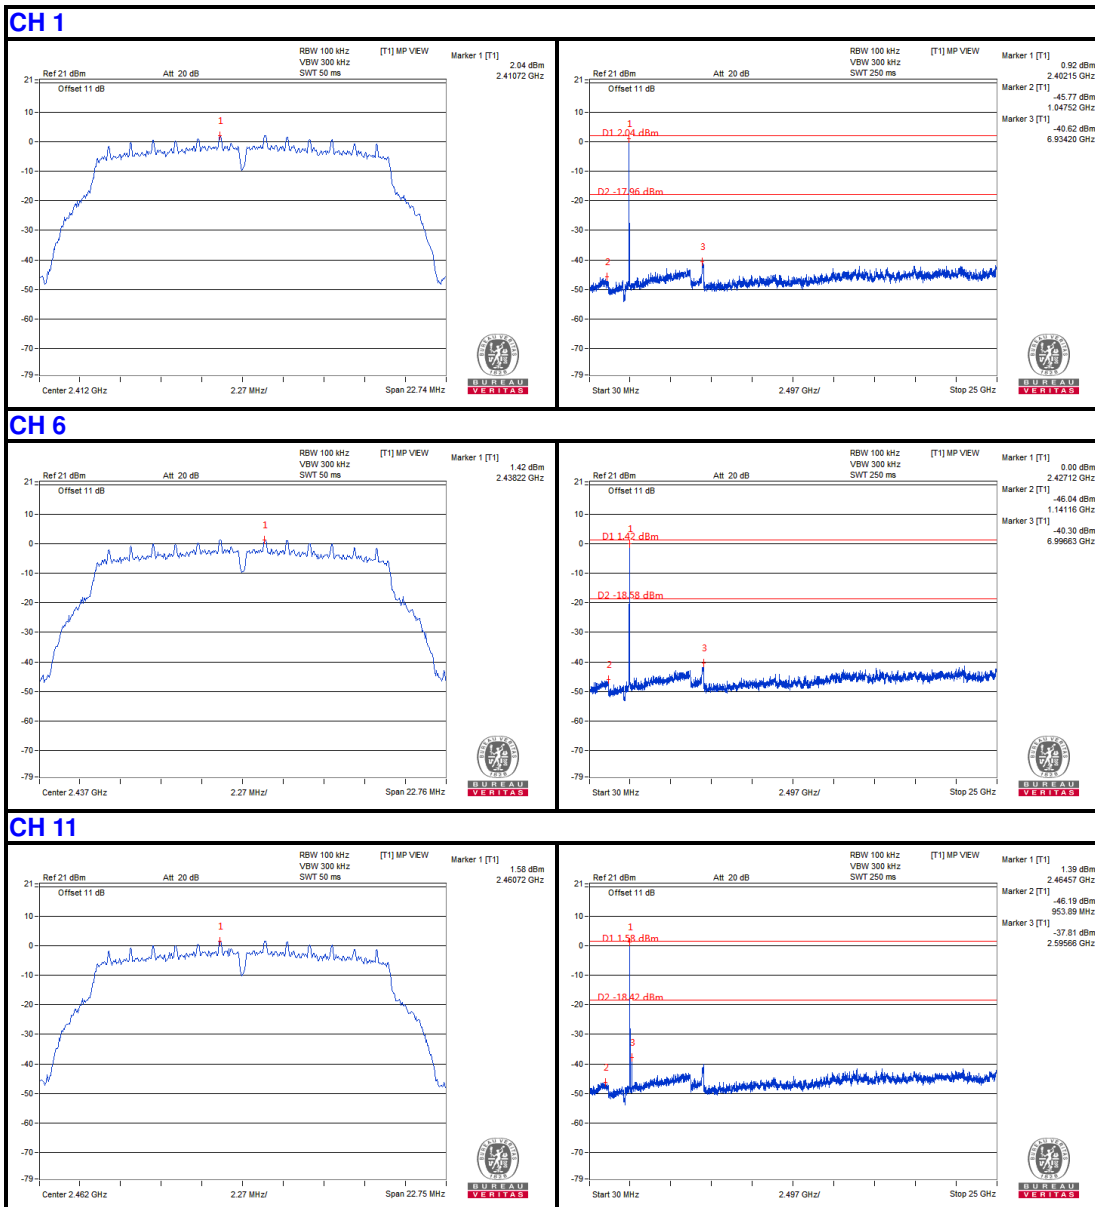



Chain 1

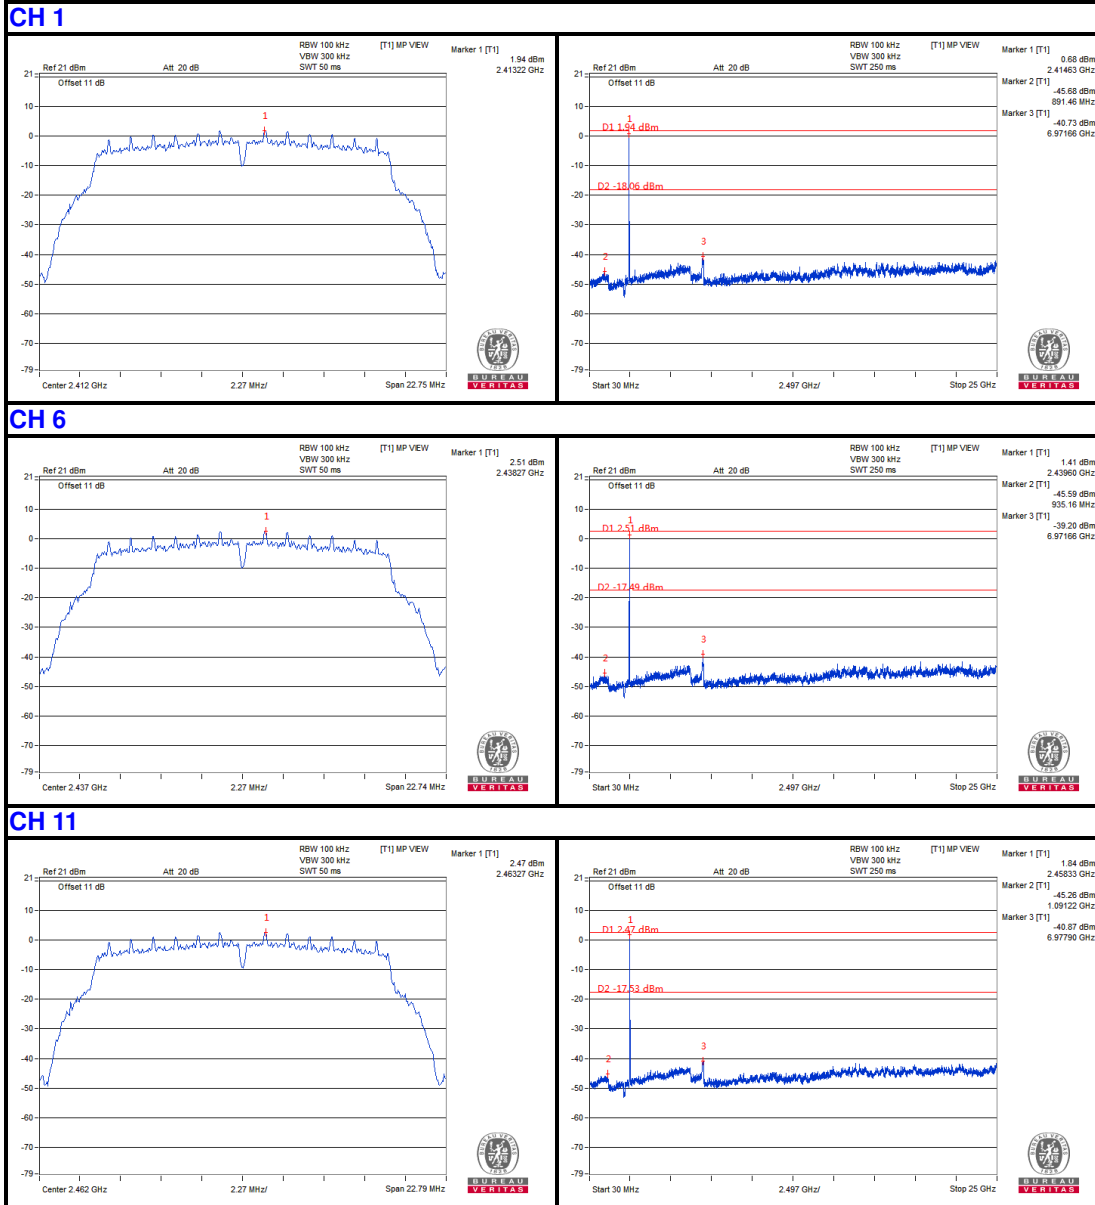





802.11n HT20

Chain 0


CH 1

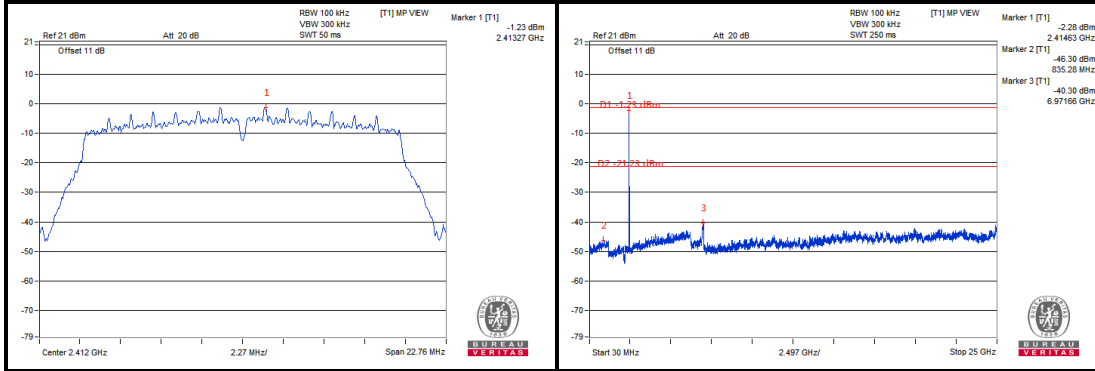

CH 6

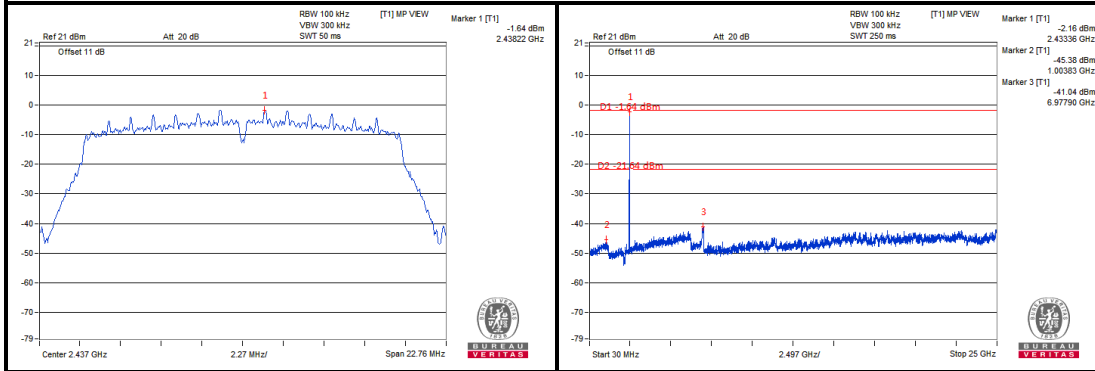


CH 11

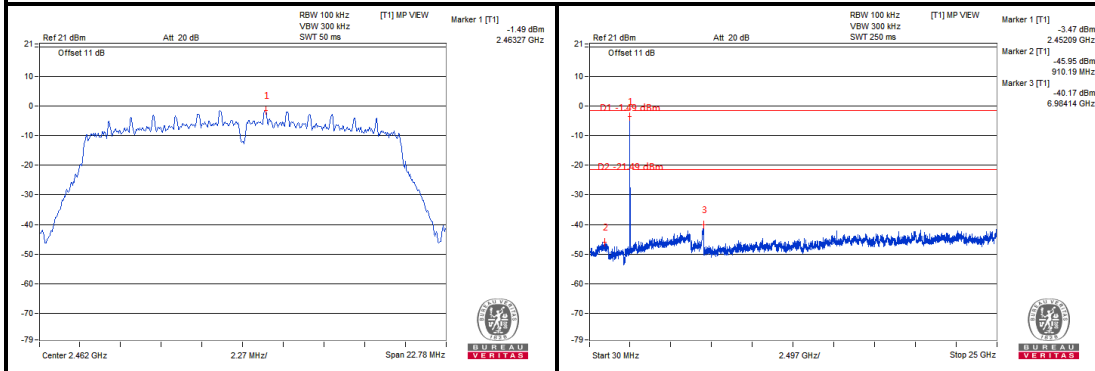



Chain 1

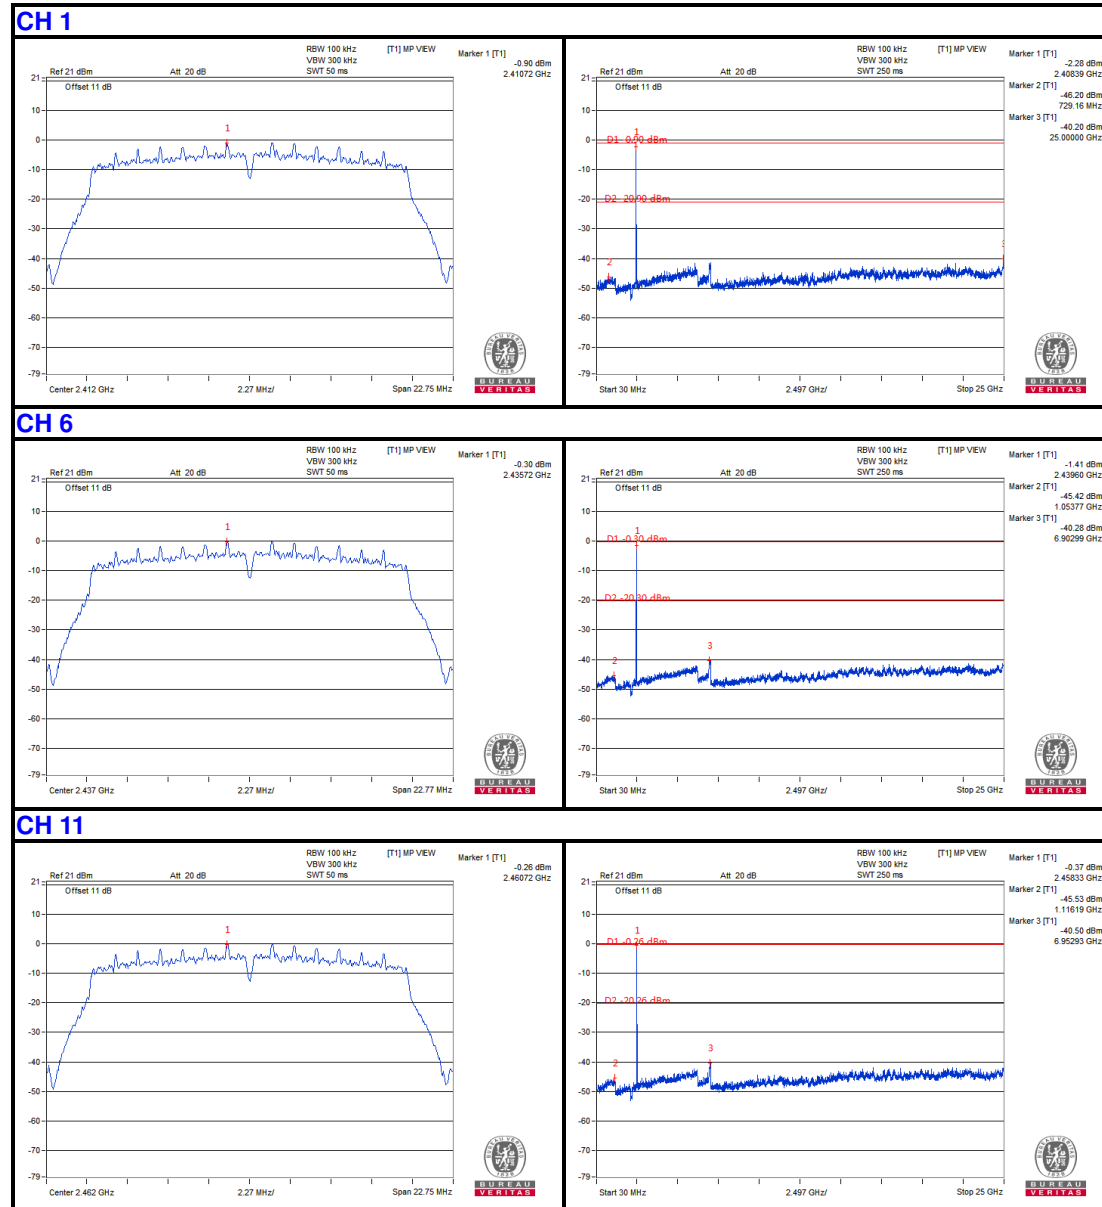





802.11n HT40

Chain 0


CH 3

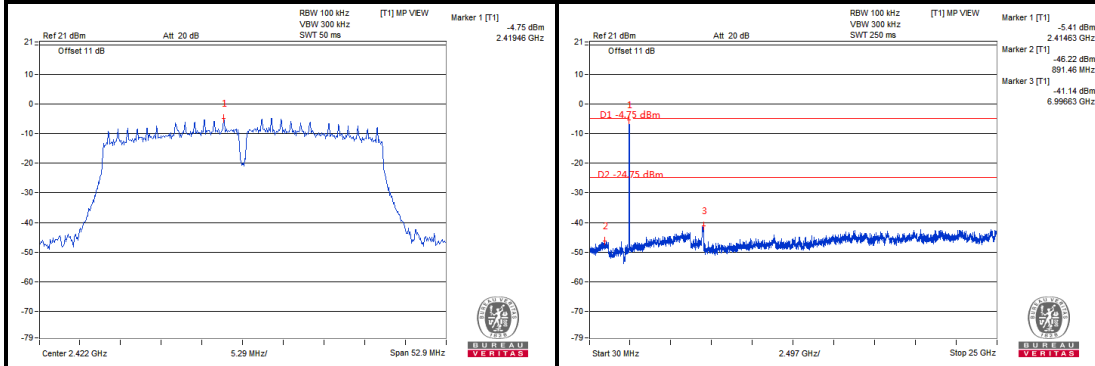


CH 6

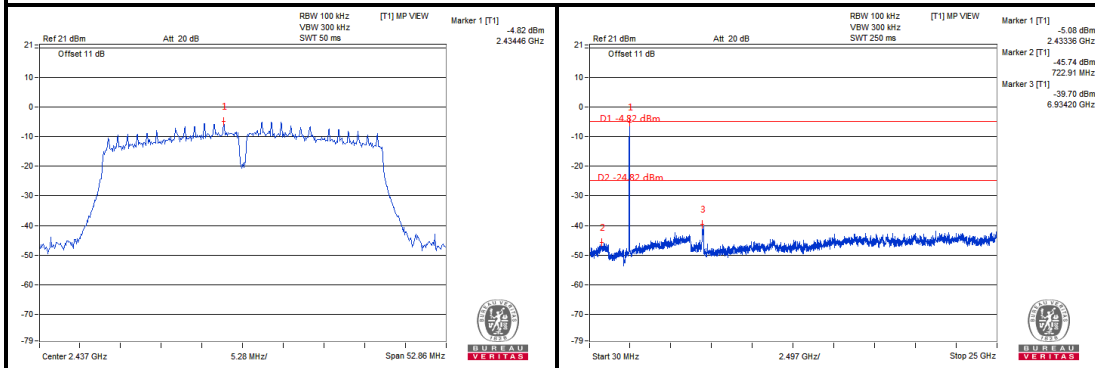

CH 9

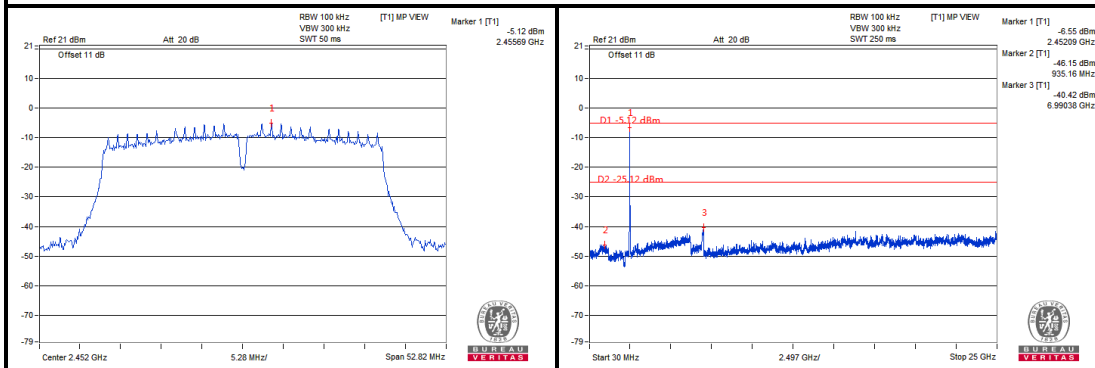


Chain 1

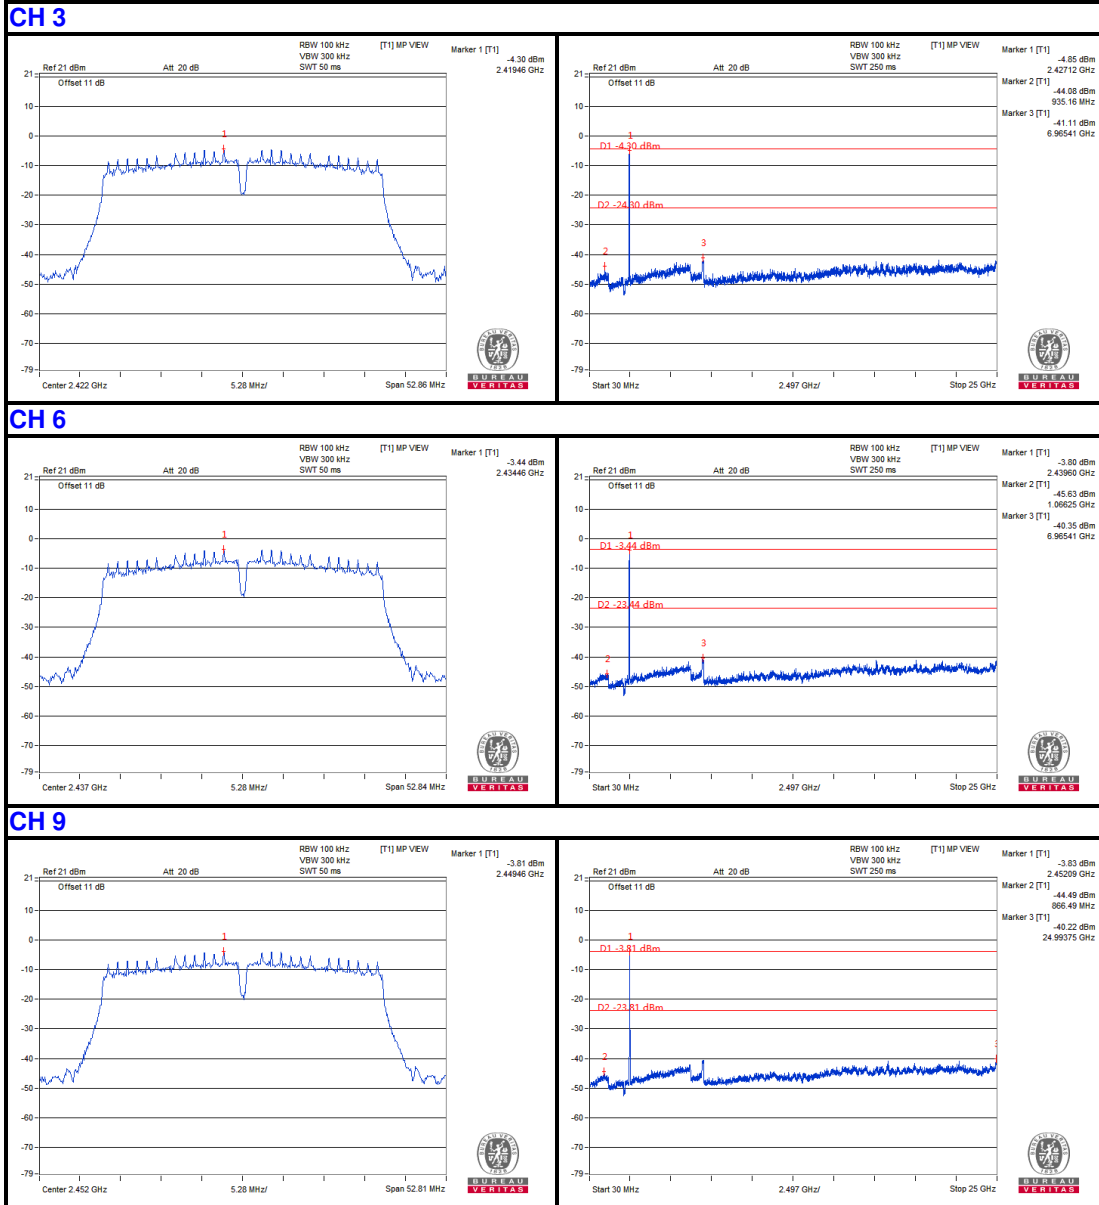


802.11b.

Chain 0

**CH 1 Band edge**

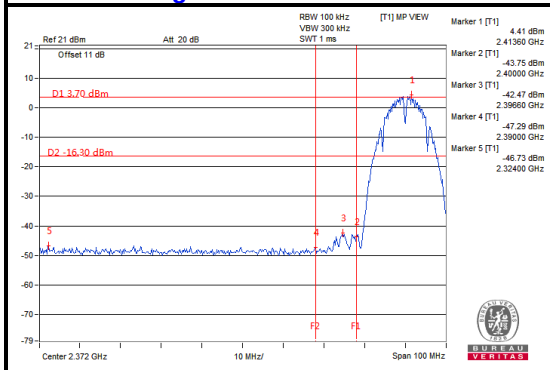


**CH 11 Band edge**

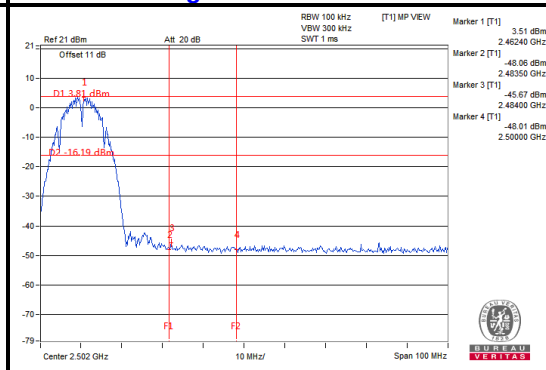


Chain 1

**CH 1 Band edge**

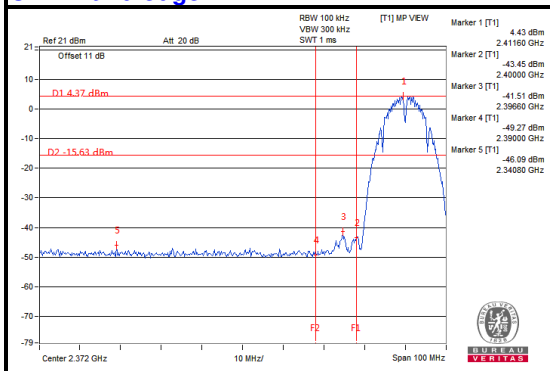


**CH 11 Band edge**

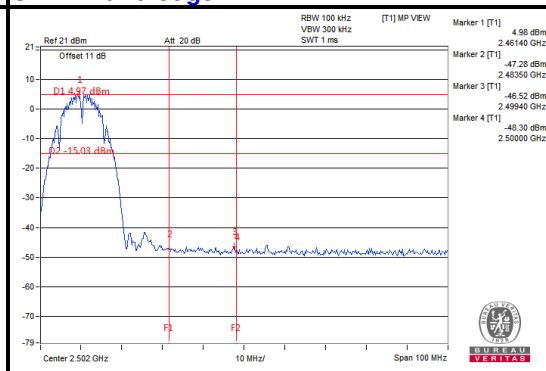


802.11g

Chain 0


**CH 1 Band edge**

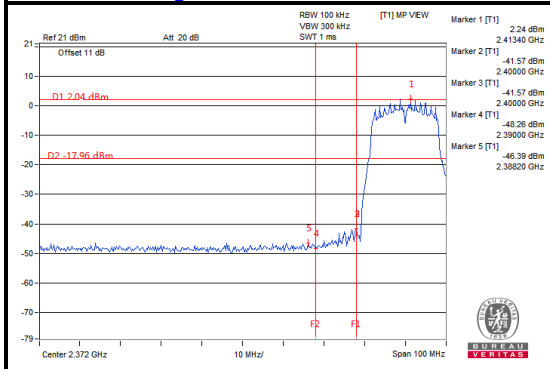

**CH 11 Band edge**

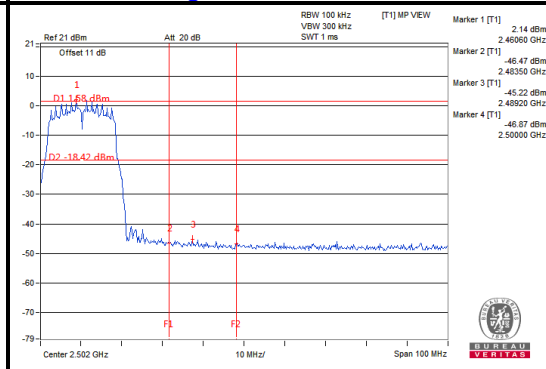


Chain 1

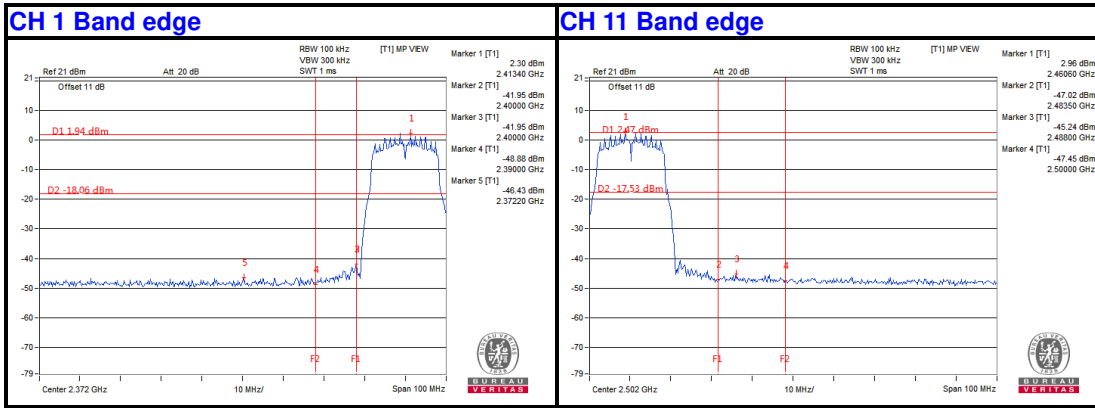


802.11n HT20

Chain 0

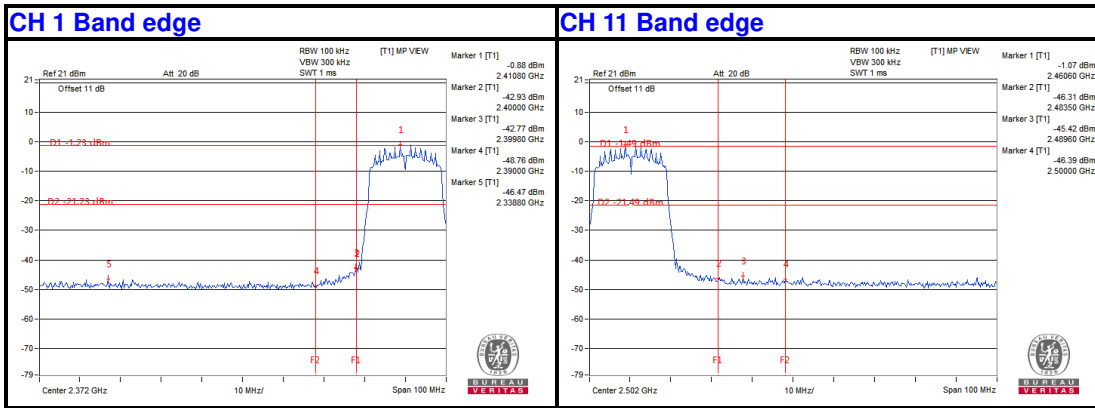


Chain 1

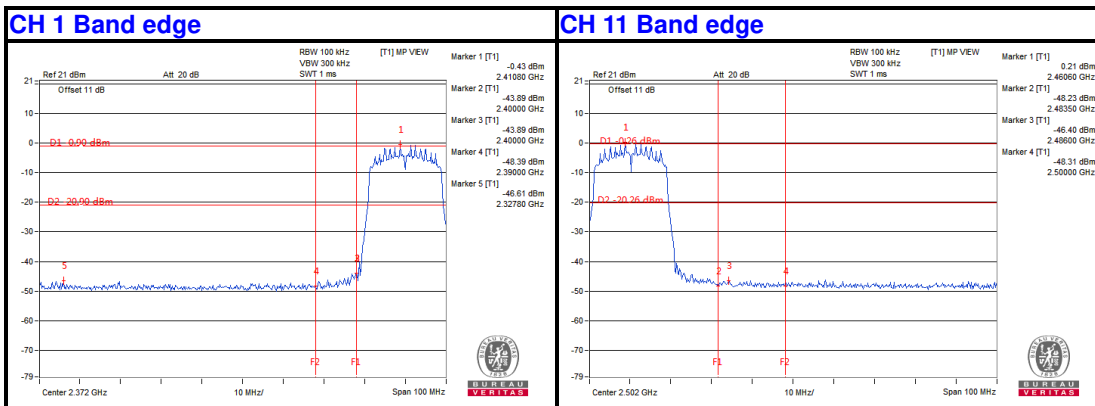


802.11n HT40

Chain 0

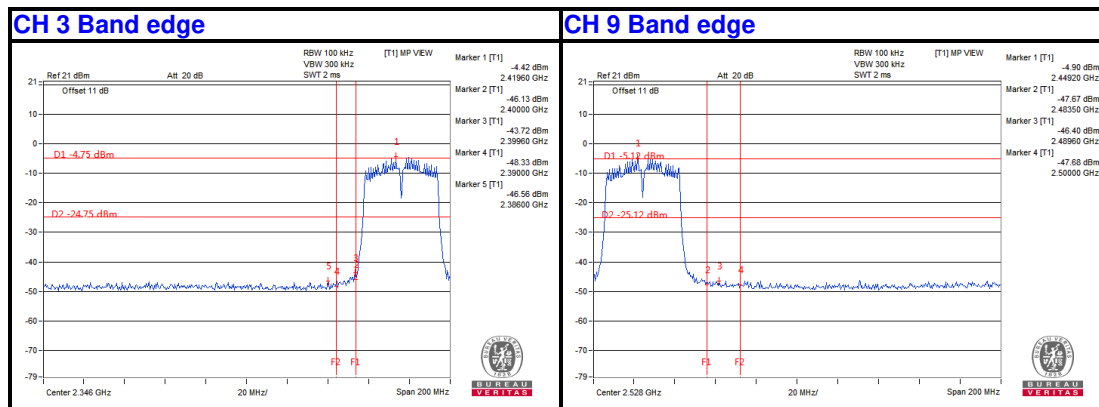

Chain 1

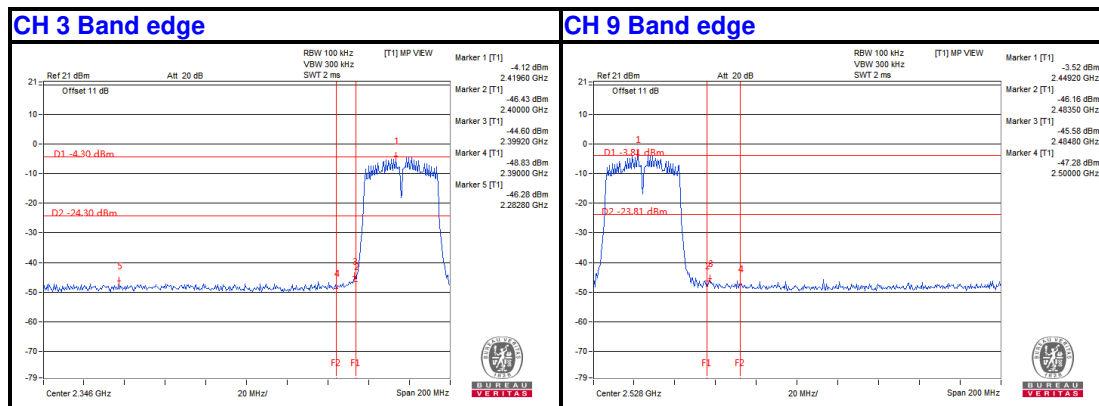



Test Report No.: RF2203WDG0011-3

## 5 PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).



Test Report No.: RF2203WDG0011-3

## 6 APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.

---END---