



Test Report No.: RF2203WDG0011-6



TEST REPORT



Applicant	DEI Sales Inc., dba Polk Audio
Address	5541 Fermi Court Carlsbad CA 92008 United States Of America

Manufacturer or Supplier	Sound United, LLC
Address	5541 Fermi Court Carlsbad, CA 92008, USA
Product	MAGNIFI MAX AX SR SOUND BAR SYSTEM
Additional Product	MAGNIFI MAX AX SOUND BAR SYSTEM
Brand Name	POLK
Model	MAGNIFI MAX AX SOUND BAR
Additional Model & Model Difference	N/A
Date of tests	Apr. 19, 2022 ~ Jun. 07, 2022

The tests have been carried out according to the requirements of the following standard:

FCC Part 15, Subpart E, Section 15.407

CONCLUSION: The submitted sample was found to COMPLY with the test requirement

Tested by Lucas Chen Project Engineer / EMC Department	Approved by Glyn He Assistant Manager / EMC Department
	 Date: Jun. 30, 2022

This report is governed by, and incorporates by reference, CPS Conditions of Service as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch

No. 96, Guantai Road (Houjie Section), Houjie
Town, Dongguan City, Guangdong Province.
523942. People's Republic of China.

Tel: +86 769 8998 2098
Fax: +86 769 8593 1080
Email: customerservice_dg@bureauveritas.com



TABLE OF CONTENTS

RELEASE CONTROL RECORD	4
1. SUMMARY OF TEST RESULTS.....	5
1.1 MEASUREMENT UNCERTAINTY	5
2. GENERAL INFORMATION	6
2.1 GENERAL DESCRIPTION OF EUT	6
2.2 DESCRIPTION OF TEST MODES.....	6
2.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL	8
2.3 DUTY CYCLE OF TEST SIGNAL	10
2.4 DESCRIPTION OF SUPPORT UNITS	11
2.5 GENERAL DESCRIPTION OF APPLIED STANDARDS	11
3. TEST TYPES AND RESULTS.....	12
3.1 RADIATED EMISSION AND BANDEDGE MEASUREMENT	12
3.1.1 LIMITS OF RADIATED EMISSION AND BANDEDGE MEASUREMENT	12
3.1.2 LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS	13
3.1.3 TEST INSTRUMENTS.....	14
3.1.4 TEST PROCEDURES	15
3.1.5 DEVIATION FROM TEST STANDARD	15
3.1.6 TEST SETUP	16
3.1.7 EUT OPERATING CONDITION	17
3.1.8 TEST RESULTS	18
3.2 CONDUCTED EMISSION MEASUREMENT	31
3.2.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT	31
3.2.2 TEST INSTRUMENTS.....	31
3.2.3 TEST PROCEDURES	32
3.2.4 DEVIATION FROM TEST STANDARD	32
3.2.5 TEST SETUP	32
3.2.6 EUT OPERATING CONDITIONS	32
3.2.7 TEST RESULTS	33
3.3 TRANSMIT POWER MEASUREMENT	35



**BUREAU
VERITAS**

Test Report No.: RF2203WDG0011-6

3.3.1	LIMITS OF TRANSMIT POWER MEASUREMENT	35
3.3.2	TEST SETUP	35
3.3.3	TEST INSTRUMENTS.....	36
3.3.4	TEST PROCEDURE.....	36
3.3.5	DEVIATION FROM TEST STANDARD	37
3.3.6	EUT OPERATING CONDITIONS.....	37
3.3.7	TEST RESULTS	38
3.4	PEAK POWER SPECTRAL DENSITY MEASUREMENT	42
3.4.1	LIMITS OF PEAK POWER SPECTRAL DENSITY MEASUREMENT	42
3.4.2	TEST SETUP.....	42
3.4.3	TEST INSTRUMENTS.....	42
3.4.4	TEST PROCEDURES	42
3.4.5	DEVIATION FROM TEST STANDARD	43
3.4.6	EUT OPERATING CONDITIONS.....	43
3.4.7	TEST RESULTS	44
3.5	FREQUENCY STABILITY	46
3.5.1	LIMITS OF FREQUENCY STABILITY MEASUREMENT.....	46
3.5.2	TEST SETUP.....	46
3.5.3	TEST INSTRUMENTS.....	46
3.5.4	TEST PROCEDURE.....	47
3.5.5	DEVIATION FROM TEST STANDARD	47
3.5.6	EUT OPERATING CONDITION	47
3.5.7	TEST RESULTS	48
4.	PHOTOGRAPHS OF THE TEST CONFIGURATION.....	49
5.	APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB	50



Test Report No.: RF2203WDG0011-6

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF2203WDG0011-6	Original release.	Jun. 30, 2022



1. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC PART 15, SUBPART E (SECTION 15.407 UNDER NEW RULE)			
STANDARD SECTION	TEST TYPE	RESULT	REMARK
15.407(b)(6)	AC Power Conducted Emissions	PASS	Meet the requirement of limit.
15.407(b) (1/2/3/4/6)	Radiated Emissions & Band Edge Measurement	PASS	Meet the requirement of limit.
15.407(a)(1/2/3)	Max Average Transmit Power	PASS	Meet the requirement of limit.
15.407(a)(1/2/3)	Peak Power Spectral Density	PASS	Meet the requirement of limit.
15.407(g)	Frequency Stability	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	Antenna connector is i-pex not a standard connector.

1.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Radiated emissions	9KHz ~ 30MHz	2.16dB
	30MHz ~ 1GMHz	3.63dB
	1GHz ~ 18GHz	4.96dB
	18GHz ~ 40GHz	4.37dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.



2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

PRODUCT	MAGNIFI MAX AX SR SOUND BAR SYSTEM
ADDITIONAL PRODUCT	MAGNIFI MAX AX SOUND BAR SYSTEM
MODEL NO.	MAGNIFI MAX AX SOUND BAR
FCC ID	WLQMAXASB
POWER SUPPLY	AC 100-240V 50/60Hz
MODULATION TYPE	GFSK
OPERATING FREQUENCY	5160~5240MHz 5735~5840MHz
NUMBER OF CHANNEL	Refer to section 2.2
CONDUCTED OUTPUT POWER	9.977mW (Measured Max.)
ANTENNA TYPE	Chain 0: FPCB Antenna, 4.83dBi Gain Chain 1: PCB Antenna, 2.5dBi Gain
I/O PORTS	Refer to user's manual
CABLE SUPPLIED	Refer to user's manual

NOTES:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
2. For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report.
3. Please refer to the EUT photo document (Reference No.: 2203WDG0011-1) for detailed product photo.
4. The working status of the two antennas is as follows.

MODULATION MODE	FUNCTION
GFSK	2 Chains(SISO)

* It is provided a SISO function, all test items are carried out on the maximum power "chain 1" antenna except Max Average Transmit Power test.



Test Report No.: RF2203WDG0011-6

2.2 DESCRIPTION OF TEST MODES

FOR 5160 ~ 5240MHz

17 channels are provided for GFSK:

Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
1	5160	7	5190	13	5220
2	5165	8	5195	14	5225
3	5170	9	5200	15	5230
4	5175	10	5205	16	5235
5	5180	11	5210	17	5240
6	5185	12	5215		

FOR 5725 ~ 5850MHz

22 channels are provided for GFSK:

Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
1	5735	9	5775	17	5815
2	5740	10	5780	18	5820
3	5745	11	5785	19	5825
4	5750	12	5790	20	5830
5	5755	13	5795	21	5835
6	5760	14	5800	22	5840
7	5765	15	5805		
8	5770	16	5810		



Test Report No.: RF2203WDG0011-6

2.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE≥1G	RE<1G	PLC	APCM	
-	√	√	√	√	AC 120V 60Hz

Where **RE≥1G**: Radiated Emission above 1GHz **RE<1G**: Radiated Emission below 1GHz
PLC: Power Line Conducted Emission **APCM**: Antenna Port Conducted Measurement

NOTE: "-" means no effect.

RADIATED EMISSION TEST (ABOVE 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, power supply voltage range and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	FREQ. BAND (MHz)	TESTED CHANNEL	MODULATION TYPE
-	5160-5240	1, 9, 17	GFSK
-	5735-5840	1, 10, 22	GFSK

RADIATED EMISSION TEST (BELOW 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	FREQ. BAND (MHz)	TESTED CHANNEL	MODULATION TYPE
-	5735-5840	1	GFSK

POWER LINE CONDUCTED EMISSION TEST:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, power supply voltage range, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	FREQ. BAND (MHz)	TESTED CHANNEL	MODULATION TYPE
-	5735-5840	1	GFSK



Test Report No.: RF2203WDG0011-6

ANTENNA PORT CONDUCTED MEASUREMENT:

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	FREQ. BAND (MHz)	TESTED CHANNEL	MODULATION TYPE
-	5160-5240	1, 9, 17	GFSK
-	5735-5840	1, 10, 22	GFSK

TEST CONDITION:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
RE<1G	25deg. C, 54%RH	AC 120V 60Hz	Jelly
RE≥1G	25deg. C, 54%RH	AC 120V 60Hz	Jelly
PLC	23deg. C, 56%RH	AC 120V 60Hz	Summer
APCM	25deg. C, 58%RH	AC 120V 60Hz	Vincent




BUREAU VERITAS

Test Report No.: RF2203WDG0011-6

2.3 DUTY CYCLE OF TEST SIGNAL

GFSK: 100%

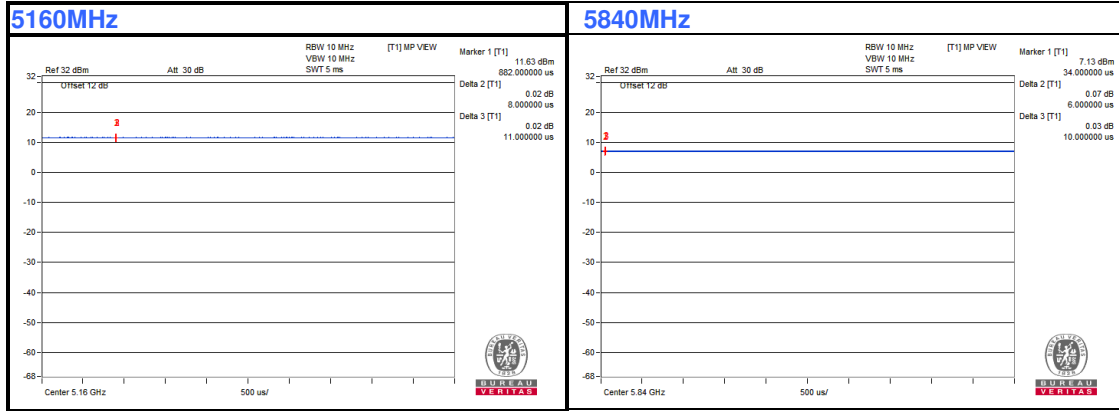

Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch

No. 96, Guantai Road (Houjie Section), Houjie
Town, Dongguan City, Guangdong Province.
523942. People's Republic of China.

Tel: +86 769 8998 2098
Fax: +86 769 8593 1080
Email: customerservice.dg@bureauveritas.com



Test Report No.: RF2203WDG0011-6

2.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as a dependent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	Dummy Load	N/A	N/A	N/A	N/A
2	USB Driver	Kingston	DataTraveler	3RJD8-68DC4U-3VFUW	N/A
3	iPhone X	Apple	MQA52CH/A	N/A	N/A

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	Optical Cable: Unshielded, detachable, 1.5m. HDMI Cable: Shielded, detachable, 200cm with two cores; 2*HDMI Cable: Shielded, detachable, 150cm
2	N/A
3	N/A

2.5 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF Product. According to the specification of the EUT declared by the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart E (15.407)

789033 D02 General UNII Test Procedures New Rules v02r01

ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.



Test Report No.: RF2203WDG0011-6

3. TEST TYPES AND RESULTS

3.1 RADIATED EMISSION AND BANDEDGE MEASUREMENT

3.1.1 LIMITS OF RADIATED EMISSION AND BANDEDGE MEASUREMENT

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table:

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTES:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 30dB under any condition of modulation.



Test Report No.: RF2203WDG0011-6

3.1.2 LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS

APPLICABLE TO	LIMIT	
789033 D02 General UNII Test Procedures New Rules v01r03	FIELD STRENGTH AT 3m	
	PK: 74 (dBμV/m)	AV: 54 (dBμV/m)
APPLICABLE TO	EIRP LIMIT	EQUIVALENT FIELD STRENGTH AT 3m
15.407(b)(1)	PK: -27 (dBm/MHz)	PK: 68.2 (dBμV/m)
15.407(b)(2)		
15.407(b)(3)		
15.407(b)(4)	Note	Note

NOTE: For transmitters operating in the 5.725-5.85 GHz band:

Section 15.407(b)(4) specifies the unwanted emissions limit for the U-NII-3 band. A band emissions mask is specified in Section 15.407(b)(4)(i). An alternative to the band emissions mask is specified in Section 15.407(b)(4)(ii). The alternative limits are based on the highest antenna gain specified in the filing. There are also marketing and importation restrictions for the alternative limit.

15.407(b)(4)(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where } P \text{ is the eirp (Watts).}$$



Test Report No.: RF2203WDG0011-6

3.1.3 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESU40	100449	Feb. 22, 23
Signal and Spectrum Analyzer	Rohde&Schwarz	FSV7	102331	May 09, 23
Active Loop Antenna (9KHz -30MHz)	SCHWARZBECK	FMZB 1519B	1519B-045	May 20, 23
Amplifier (9KHz -1GHz)	Burgeon	BPA-530	100210	Mar. 08, 23
Trilog-Broadband Antenna(20M-2G)	SCHWARZBECK	VULB 9168	01263	Sep. 30, 22
Horn Antenna (1GHz -18GHz)	ETS -Lindgren	3117	00062558	May 21, 23
Horn Antenna (18GHz -40GHz)	SCHWARZBECK	BBHA 9170	BBHA9170147	May 14, 23
3m Semi-anechoic Chamber	ETS-LINDGREN	9m*6m*6m	NSEMC003	May 22, 23
Test Software	ADT	ADT_Radiated_V7.6.15.9.2	N/A	N/A
Broadband Preamplifier (1GHz~18GHz)	SCHWARZBECK	BBV9718	305	May 12, 23
Pre-Amplifier (18GHz-40GHz)	EMCI	EMC 184045	980102	Jan. 10, 23
Test Software	ADT	ADT_Radiated_V7.6.15.9.2	N/A	N/A
BLUETOOTH TESTER	Rohde&Schwarz	CBT32	100811	N/A

NOTES:

1. The test was performed in 966 Chamber. (Chenwu)
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.
3. The horn antenna is used only for the measurement of emission frequency above 1GHz if tested.
4. The FCC Site Registration No. is 749762.



Test Report No.: RF2203WDG0011-6

3.1.4 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 1.5 meters (above 1GHz) and 0.8 meters (below 1GHz) above the ground at a 3 meters semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

NOTES:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle < 98%) or 10Hz (Duty cycle > 98%) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

3.1.5 DEVIATION FROM TEST STANDARD


No deviation.

3.1.6 TEST SETUP

Below 30MHz test setup

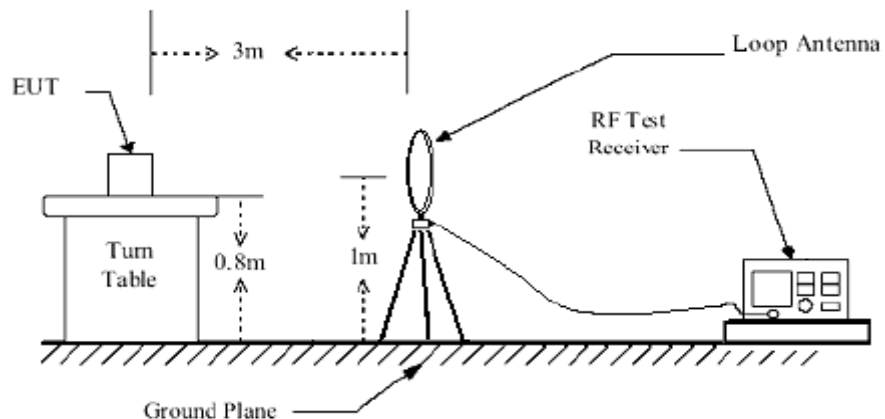


Below 1GHz test setup

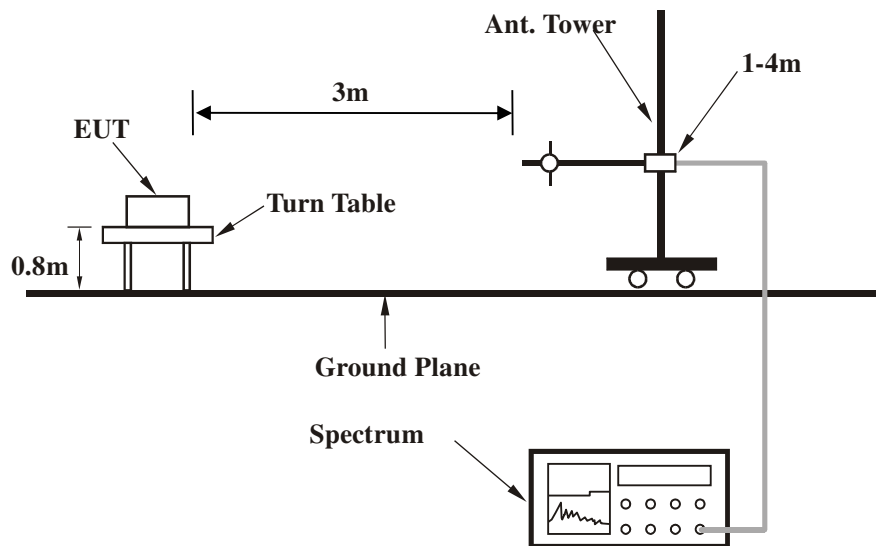

Note: For the actual test configuration, please refer to the attached file (Test Setup Photo).

Above 1GHz test setup

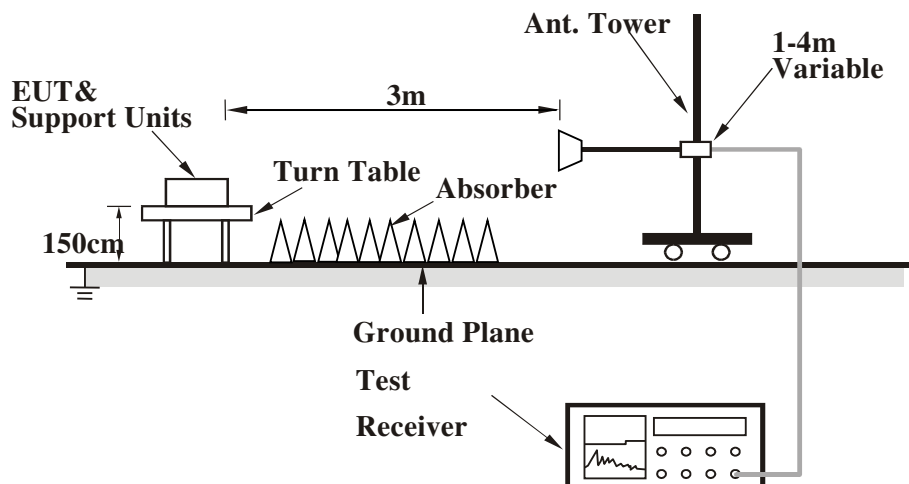

Note: For the actual test configuration, please refer to the attached file (Test Setup Photo).

3.1.7 EUT OPERATING CONDITION

- Set the EUT under full load condition and placed them on a testing table.
- Set the transmitter part of EUT under transmission condition continuously at specific channel frequency.
- The necessary accessories enable the EUT in full functions.



Test Report No.: RF2203WDG0011-6

3.1.8 TEST RESULTS

BELOW 1GHz WORST-CASE DATA


GFSK 5735-5840MHz

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9KHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	71.97	32.00 QP	40.00	-8.00	2.00 H	102	51.64	-19.64
2	129.49	33.63 QP	43.50	-9.87	1.98 H	77	51.47	-17.84
3	177.68	32.29 QP	43.50	-11.21	1.87 H	60	50.29	-18.00
4	328.46	36.16 QP	46.00	-9.84	1.58 H	32	50.90	-14.74
5	340.90	34.89 QP	46.00	-11.11	2.00 H	155	49.32	-14.43
6	591.17	32.06 QP	46.00	-13.94	2.00 H	177	40.00	-7.94

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were greater than 20dB margin.
4. 9KHz~30MHz have been test and test data more than 20dB margin.
5. Margin value = Emission level – Limit value

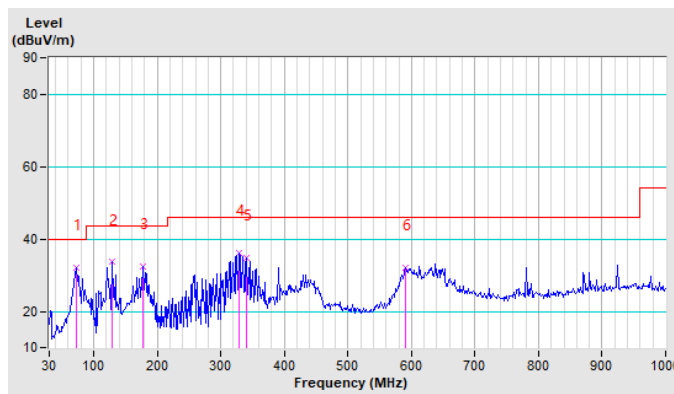

Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch

No. 96, Guantai Road (Houjie Section), Houjie
Town, Dongguan City, Guangdong Province.
523942. People's Republic of China.

Tel: +86 769 8998 2098
Fax: +86 769 8593 1080
Email: customerservice.dg@bureauveritas.com




Test Report No.: RF2203WDG0011-6

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9KHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	31.55	33.63 QP	40.00	-6.37	1.00 V	220	51.85	-18.22
2	42.44	29.67 QP	40.00	-10.33	1.00 V	356	46.50	-16.83
3	71.97	30.08 QP	40.00	-9.92	1.00 V	330	49.72	-19.64
4	584.95	40.23 QP	46.00	-5.77	1.00 V	344	48.33	-8.10
5	787.04	34.69 QP	46.00	-11.31	1.00 V	333	39.96	-5.27
6	880.30	37.05 QP	46.00	-8.95	1.00 V	322	40.52	-3.47

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were greater than 20dB margin.
4. 9KHz~30MHz have been test and test data more than 20dB margin.
5. Margin value = Emission level – Limit value

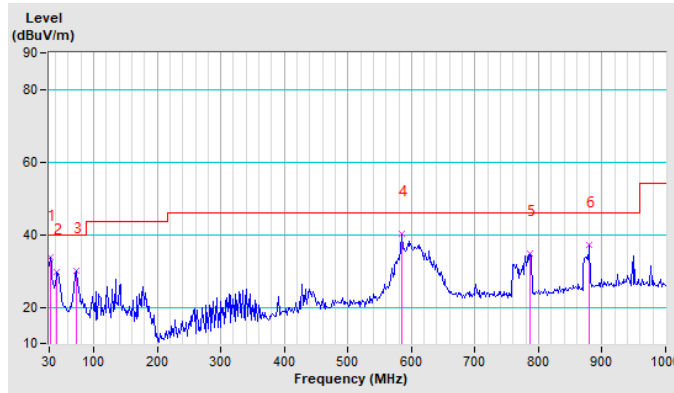

Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch

No. 96, Guantai Road (Houjie Section), Houjie
Town, Dongguan City, Guangdong Province.
523942. People's Republic of China.

Tel: +86 769 8998 2098
Fax: +86 769 8593 1080
Email: customerservice.dg@bureauveritas.com



Test Report No.: RF2203WDG0011-6

ABOVE 1GHz DATA

GFSK: 5160~5240MHz

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5145.00	46.10 PK	74.00	-27.90	1.00 H	145	40.76	5.34
2	5145.00	37.15 AV	54.00	-16.85	1.00 H	145	31.81	5.34
3	5150.00	47.30 PK	74.00	-26.70	1.00 H	145	41.96	5.34
4	5150.00	36.11 AV	54.00	-17.89	1.00 H	145	30.77	5.34
5	*5160.00	97.67 PK			1.00 H	145	92.31	5.36
6	*5160.00	94.32 AV			1.00 H	145	88.96	5.36
7	#10320.00	51.48 PK	68.20	-16.72	1.00 H	185	42.26	9.22
8	15480.00	54.38 PK	74.00	-19.62	1.00 H	191	36.08	18.30
9	15480.00	42.39 AV	54.00	-11.61	1.00 H	191	24.09	18.30
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5145.00	46.94 PK	74.00	-27.06	1.00 V	125	41.60	5.34
2	5145.00	34.98 AV	54.00	-19.02	1.00 V	125	29.64	5.34
3	5150.00	46.80 PK	74.00	-27.20	1.00 V	125	41.46	5.34
4	5150.00	35.25 AV	54.00	-18.75	1.00 V	125	29.91	5.34
5	*5160.00	98.20 PK			1.00 V	125	92.84	5.36
6	*5160.00	94.48 AV			1.00 V	125	89.12	5.36
7	#10320.00	51.76 PK	68.20	-16.44	1.00 V	120	42.54	9.22
8	15480.00	55.36 PK	74.00	-18.64	1.00 V	155	37.06	18.30
9	15480.00	42.00 AV	54.00	-12.00	1.00 V	155	23.70	18.30

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were less than 20dB margin against the limit.
4. Margin value = Emission level – Limit value.
5. " * " : Fundamental frequency.
6. " # " : The radiated frequency is out of the restricted band.


Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch

No. 96, Guantai Road (Houjie Section), Houjie
Town, Dongguan City, Guangdong Province.
523942. People's Republic of China.

Tel: +86 769 8998 2098
Fax: +86 769 8593 1080
Email: customerservice.dg@bureauveritas.com



Band edge Plot

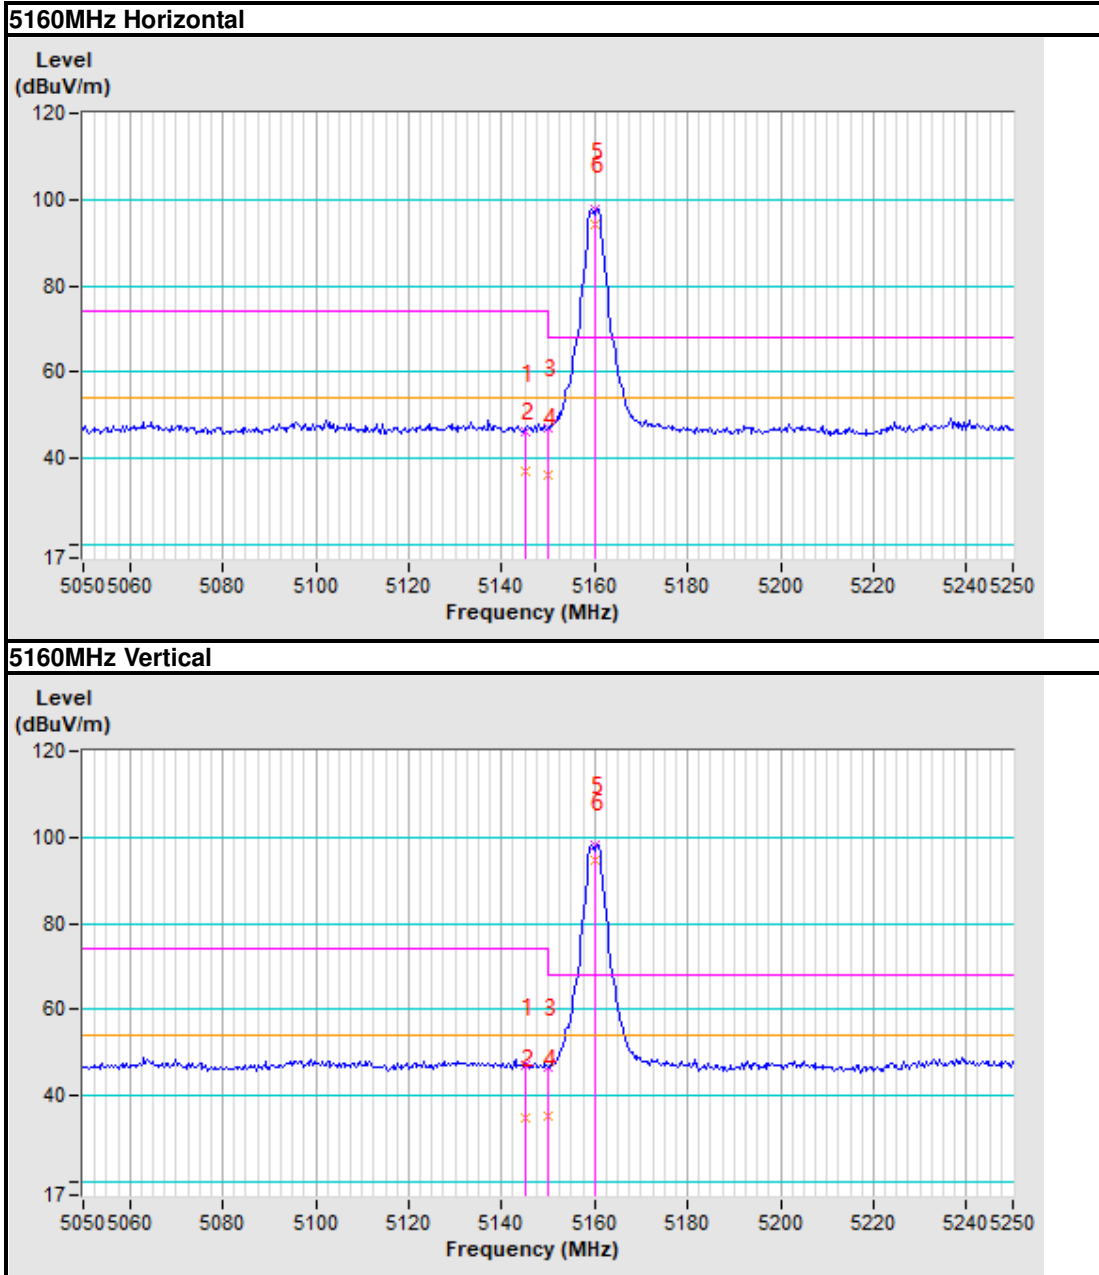



Test Report No.: RF2203WDG0011-6

CHANNEL	TX Channel 9	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTIO N FACTOR (dB/m)
1	5145.00	43.62 PK	74.00	-30.38	1.00 H	100	38.28	5.34
2	5145.00	36.74 AV	54.00	-17.26	1.00 H	100	31.40	5.34
3	5150.00	47.55 PK	74.00	-26.45	1.00 H	100	42.21	5.34
4	5150.00	35.95 AV	54.00	-18.05	1.00 H	100	30.61	5.34
5	*5200.00	97.35 PK			1.00 H	100	91.94	5.41
6	*5200.00	94.22 AV			1.00 H	100	88.81	5.41
7	#10400.00	52.75 PK	68.20	-15.45	1.25 H	144	43.42	9.33
8	#10400.00	43.11 AV	54.00	-10.89	1.25 H	144	33.78	9.33
9	15600.00	55.69 PK	74.00	-18.31	1.69 H	133	37.01	18.68
10	15600.00	45.72 AV	54.00	-8.28	1.69 H	133	27.04	18.68
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTIO N FACTOR (dB/m)
1	5145.00	47.32 PK	74.00	-26.68	1.00 V	150	41.98	5.34
2	5145.00	36.58 AV	54.00	-17.42	1.00 V	150	31.24	5.34
3	5150.00	47.25 PK	74.00	-26.75	1.00 V	150	41.91	5.34
4	5150.00	37.45 AV	54.00	-16.55	1.00 V	150	32.11	5.34
5	*5200.00	100.48 PK			1.00 V	150	95.07	5.41
6	*5200.00	96.78 AV			1.00 V	150	91.37	5.41
7	#10400.00	51.48 PK	68.20	-16.72	1.25 V	147	42.15	9.33
8	15600.00	54.89 PK	74.00	-19.11	1.00 V	135	36.21	18.68
9	15600.00	45.62 AV	54.00	-8.38	1.00 V	135	26.94	18.68

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were less than 20dB margin against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch

No. 96, Guantai Road (Houjie Section), Houjie
Town, Dongguan City, Guangdong Province.
523942. People's Republic of China.

Tel: +86 769 8998 2098
Fax: +86 769 8593 1080
Email: customerservice.dg@bureauveritas.com



Test Report No.: RF2203WDG0011-6

CHANNEL	TX Channel 17	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5145.00	46.49 PK	74.00	-27.51	1.00 H	157	41.15	5.34
2	5145.00	38.11 AV	54.00	-15.89	1.00 H	157	32.77	5.34
3	5150.00	46.37 PK	74.00	-27.63	1.00 H	157	41.03	5.34
4	5150.00	38.69 AV	54.00	-15.31	1.00 H	157	33.35	5.34
5	*5240.00	98.48 PK			1.00 H	157	93.02	5.46
6	*5240.00	94.39 AV			1.00 H	157	88.93	5.46
7	5350.00	47.48 PK	74.00	-26.52	1.00 H	157	41.87	5.61
8	5350.00	37.54 AV	54.00	-16.46	1.00 H	157	31.93	5.61
9	5355.00	47.28 PK	74.00	-26.72	1.00 H	157	41.67	5.61
10	5355.00	37.15 AV	54.00	-16.85	1.00 H	157	31.54	5.61
11	#10480.00	54.59 PK	68.20	-13.61	1.00 H	147	45.13	9.46
12	15720.00	57.33 PK	74.00	-16.67	1.00 H	169	38.40	18.93
13	15720.00	45.52 AV	54.00	-8.48	1.00 H	169	26.59	18.93

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5145.00	46.45 PK	74.00	-27.55	1.00 V	170	41.11	5.34
2	5145.00	35.11 AV	54.00	-18.89	1.00 V	170	29.77	5.34
3	5150.00	46.39 PK	74.00	-27.61	1.00 V	170	41.05	5.34
4	5150.00	35.54 AV	54.00	-18.46	1.00 V	170	30.20	5.34
5	*5240.00	101.82 PK			1.00 V	170	96.36	5.46
6	*5240.00	98.35 AV			1.00 V	170	92.89	5.46
7	5350.00	48.49 PK	74.00	-25.51	1.00 V	170	42.88	5.61
8	5350.00	37.98 AV	54.00	-16.02	1.00 V	170	32.37	5.61
9	5355.00	48.48 PK	74.00	-25.52	1.00 V	170	42.87	5.61
10	5355.00	39.00 AV	54.00	-15.00	1.00 V	170	33.39	5.61
11	#10480.00	52.49 PK	68.20	-15.71	1.00 V	125	43.03	9.46
12	15720.00	57.35 PK	74.00	-16.65	1.00 V	125	38.42	18.93
13	15720.00	45.98 AV	54.00	-8.02	1.00 V	125	27.05	18.93

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were less than 20dB margin against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.


Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch

No. 96, Guantai Road (Houjie Section), Houjie
Town, Dongguan City, Guangdong Province.
523942. People's Republic of China.

Tel: +86 769 8998 2098
Fax: +86 769 8593 1080
Email: customerservice.dg@bureauveritas.com



Band edge Plot

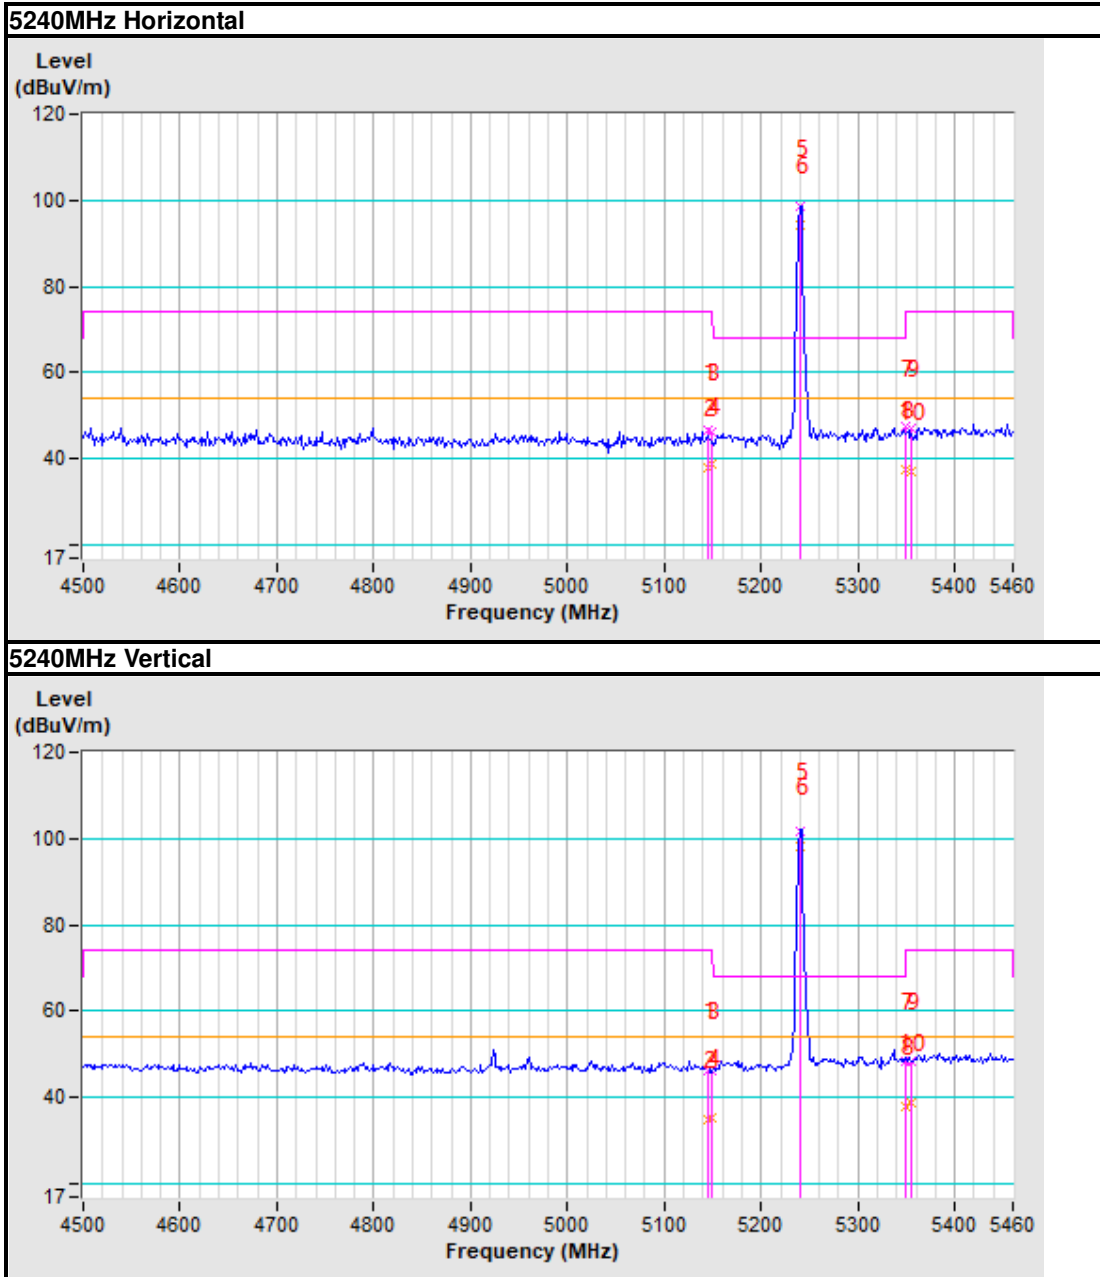



Test Report No.: RF2203WDG0011-6

ABOVE 1GHz DATA

GFSK: 5735~5840MHz

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5702.76	52.79 PK	105.98	-53.19	2.00 H	0	46.68	6.11
2	#5725.00	51.80 PK	122.20	-70.40	1.00 H	144	45.66	6.14
3	*5735.00	99.20 PK			1.00 H	144	93.05	6.15
4	*5735.00	98.15 AV			1.00 H	144	92.00	6.15
5	#5791.11	52.22 PK	152.20	-99.98	2.00 H	0	45.98	6.24
6	11470.00	52.46 PK	74.00	-21.54	1.00 H	125	38.77	13.69
7	11470.00	42.51 AV	54.00	-11.49	1.00 H	125	28.82	13.69
8	#17205.00	57.11 PK	68.20	-11.09	1.00 H	158	36.22	20.89
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5693.00	51.80 PK	100.04	-48.24	1.00 V	125	45.71	6.09
2	#5725.00	52.09 PK	122.20	-70.11	1.00 V	125	45.95	6.14
3	*5735.00	102.33 PK			1.00 V	156	96.18	6.15
4	*5735.00	98.56 AV			1.00 V	156	92.41	6.15
5	#5855.00	52.48 PK	110.80	-58.32	1.00 V	125	46.14	6.34
6	11470.00	52.00 PK	74.00	-22.00	1.00 V	133	38.31	13.69
7	11470.00	42.86 AV	54.00	-11.14	1.00 V	133	29.17	13.69
8	#17205.00	56.37 PK	68.20	-11.83	1.00 V	225	35.48	20.89

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were greater than 20dB margin.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.


Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch

No. 96, Guantai Road (Houjie Section), Houjie
Town, Dongguan City, Guangdong Province.
523942. People's Republic of China.

Tel: +86 769 8998 2098
Fax: +86 769 8593 1080
Email: customerservice.dg@bureauveritas.com



Band edge Plot

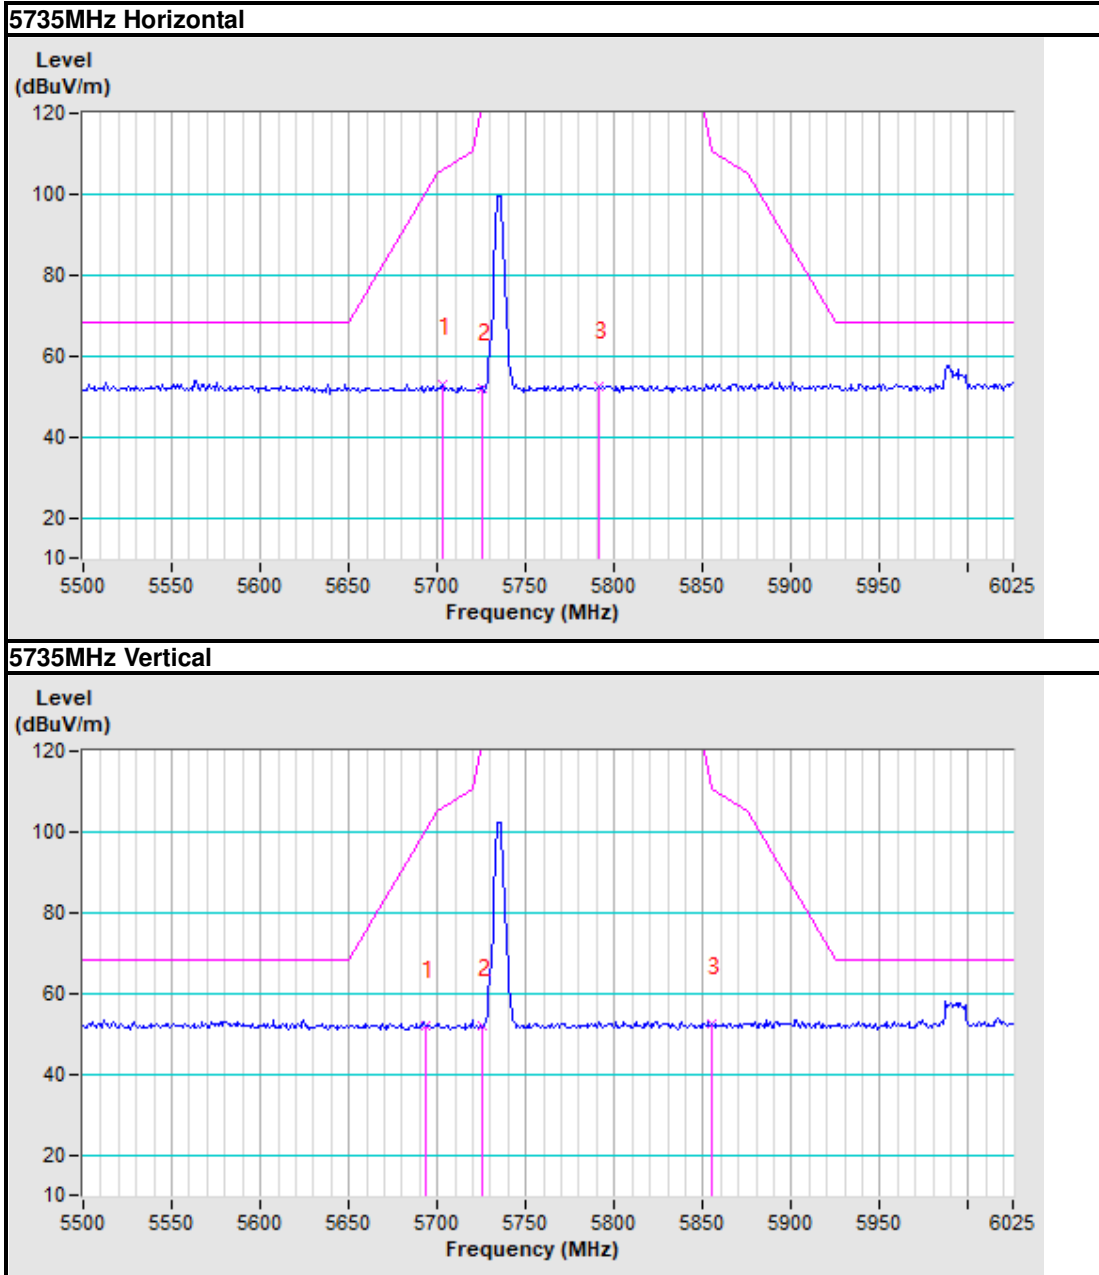



Test Report No.: RF2203WDG0011-6

CHANNEL	TX Channel 10	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5695.19	51.57 PK	101.66	-50.09	2.00 H	102	45.48	6.09
2	*5780.00	99.00 PK			1.28 H	165	92.78	6.22
3	*5780.00	96.38 AV			1.28 H	165	90.16	6.22
4	#5859.25	51.52 PK	109.61	-58.09	2.00 H	130	45.18	6.34
5	#5885.34	51.64 PK	97.53	-45.89	2.00 H	149	45.26	6.38
6	11560.00	51.79 PK	74.00	-22.21	1.00 H	154	37.87	13.92
7	11560.00	42.97 AV	54.00	-11.03	1.00 H	154	29.05	13.92
8	#17340.00	56.38 PK	68.20	-11.82	1.21 H	155	35.05	21.33
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5671.63	51.28 PK	84.25	-32.97	2.00 V	0	45.22	6.06
2	#5701.92	52.11 PK	105.74	-53.63	2.00 V	0	46.00	6.11
3	*5780.00	102.54 PK			1.00 V	135	96.32	6.22
4	*5780.00	99.21 AV			1.00 V	135	92.99	6.22
5	#5858.41	52.57 PK	109.84	-57.27	2.00 V	0	46.23	6.34
6	11560.00	51.95 PK	74.00	-22.05	1.25 V	178	38.03	13.92
7	11560.00	42.97 AV	54.00	-11.03	1.25 V	178	29.05	13.92
8	#17340.00	56.45 PK	68.20	-11.75	1.21 V	155	35.12	21.33

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were greater than 20dB margin.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.


Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch

No. 96, Guantai Road (Houjie Section), Houjie
Town, Dongguan City, Guangdong Province.
523942. People's Republic of China.

Tel: +86 769 8998 2098
Fax: +86 769 8593 1080
Email: customerservice.dg@bureauveritas.com



Band edge Plot

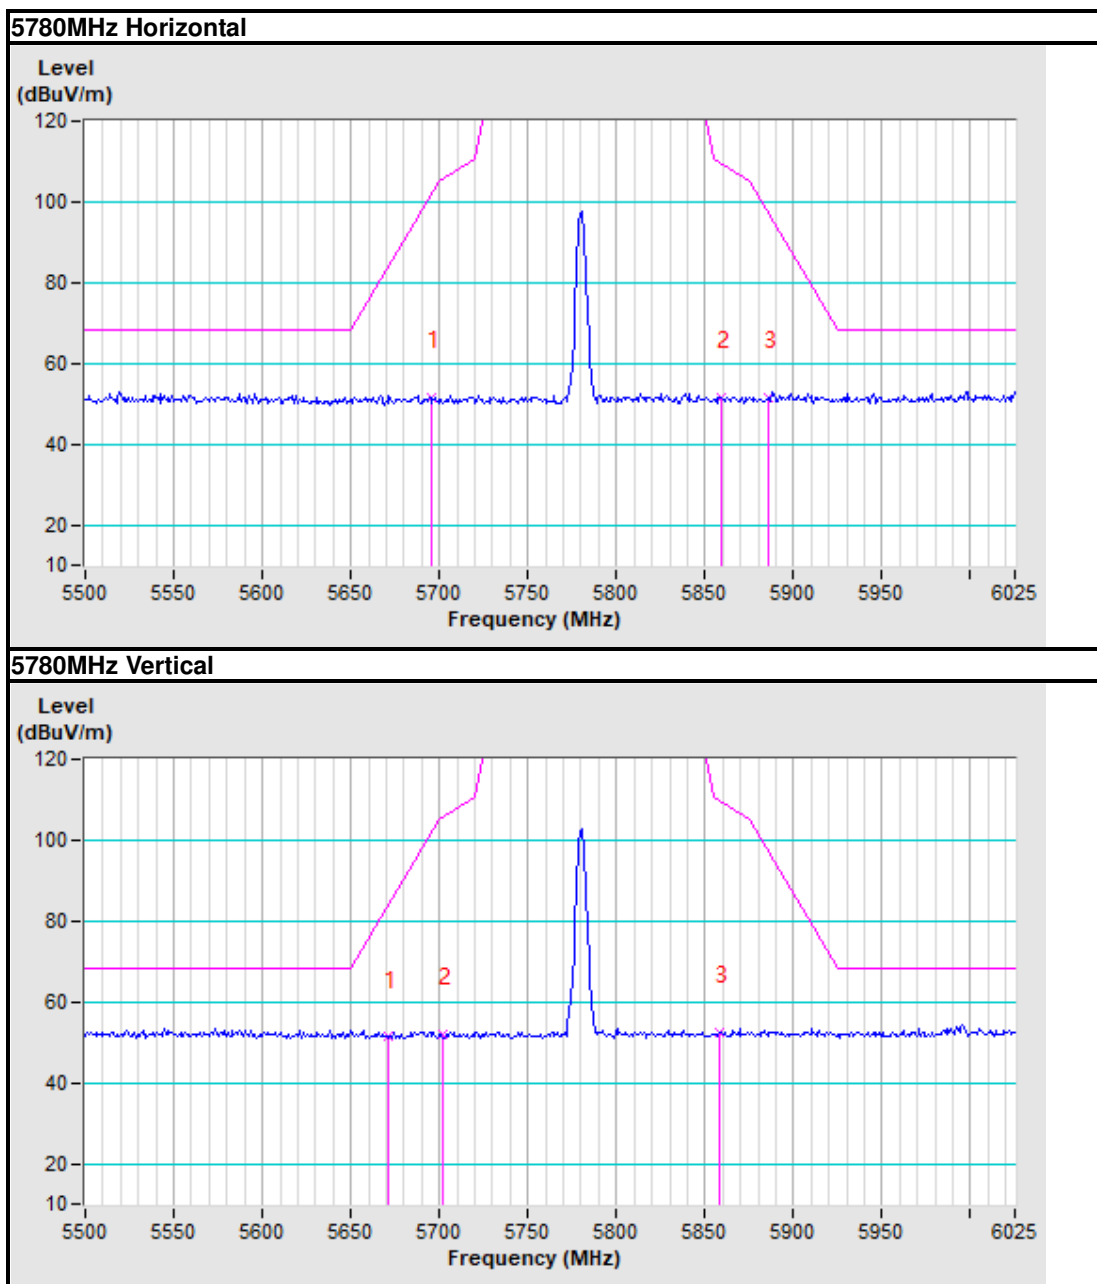



Test Report No.: RF2203WDG0011-6

CHANNEL	TX Channel 22	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5700.24	51.54 PK	105.27	-53.73	2.00 H	0	45.43	6.11
2	*5840.00	99.11 PK			1.00 H	136	92.80	6.31
3	*5840.00	96.45 AV			1.00 H	136	90.14	6.31
4	#5850.00	51.77 PK	122.20	-70.43	1.00 H	136	45.44	6.33
5	#5872.72	51.65 PK	105.84	-54.19	2.00 H	0	45.28	6.37
6	11680.00	54.11 PK	74.00	-19.89	1.00 H	173	40.09	14.02
7	11680.00	42.56 AV	54.00	-11.44	1.00 H	173	28.54	14.02
8	#17520.00	56.07 PK	68.20	-12.13	1.00 H	125	34.21	21.86
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5700.24	50.82 PK	105.27	-54.45	2.00 V	302	44.71	6.11
2	*5840.00	102.56 PK			1.00 V	145	96.25	6.31
3	*5840.00	100.00 AV			1.00 V	145	93.69	6.31
4	#5850.00	51.07 PK	122.20	-71.13	2.00 V	211	44.74	6.33
5	#5855.00	51.90 PK	110.80	-58.90	2.00 V	265	45.56	6.34
6	11680.00	54.62 PK	74.00	-19.38	1.00 V	173	40.60	14.02
7	11680.00	42.52 AV	54.00	-11.48	1.00 V	199	28.50	14.02
8	#17520.00	56.72 PK	68.20	-11.48	1.00 V	199	34.86	21.86

REMARKS:


1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were greater than 20dB margin.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch

No. 96, Guantai Road (Houjie Section), Houjie
Town, Dongguan City, Guangdong Province.
523942. People's Republic of China.

Tel: +86 769 8998 2098
Fax: +86 769 8593 1080
Email: customerservice.dg@bureauveritas.com

Band edge Plot

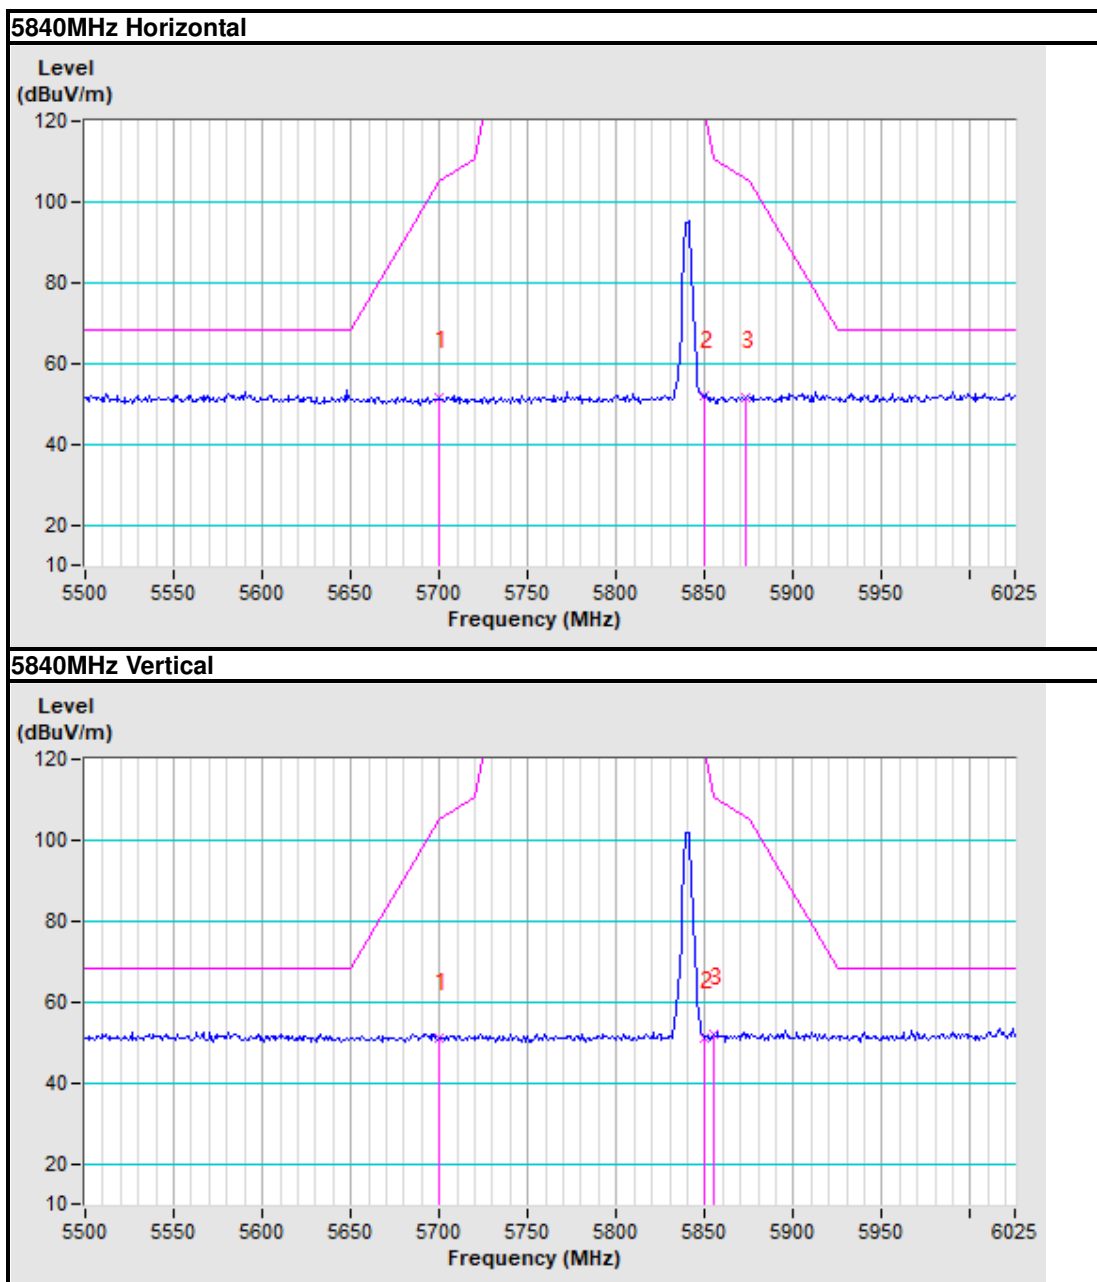

3.2 CONDUCTED EMISSION MEASUREMENT

3.2.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15 ~ 0.5	66 to 56	56 to 46
0.5 ~ 5	56	46
5 ~ 30	60	50

- NOTES:**
1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.
 3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

3.2.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESR7	101494	Mar. 07,23
Artificial Mains Network	Rohde&Schwarz	ENV216	101173	Mar. 07,23
Artificial Mains Network	Rohde&Schwarz	ESH3-Z5	100317	Mar. 07,23
Voltage probe	SCHWARZBECK	TK 9421	TK 9421-176	Aug. 05,22
Coaxial RF Cable	/	CE CABLE	C2310066D G	Jul. 27,22
Test software	ADT	ADT_Cond_V7.3.7	N/A	N/A

- NOTES:**
1. The test was performed in shielded room 553. (Chenwu)
 2. The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.

3.2.3 TEST PROCEDURES


- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) were not recorded.

NOTE: All modes of operation were investigated and the worst-case emissions are reported.

3.2.4 DEVIATION FROM TEST STANDARD

No deviation.

3.2.5 TEST SETUP

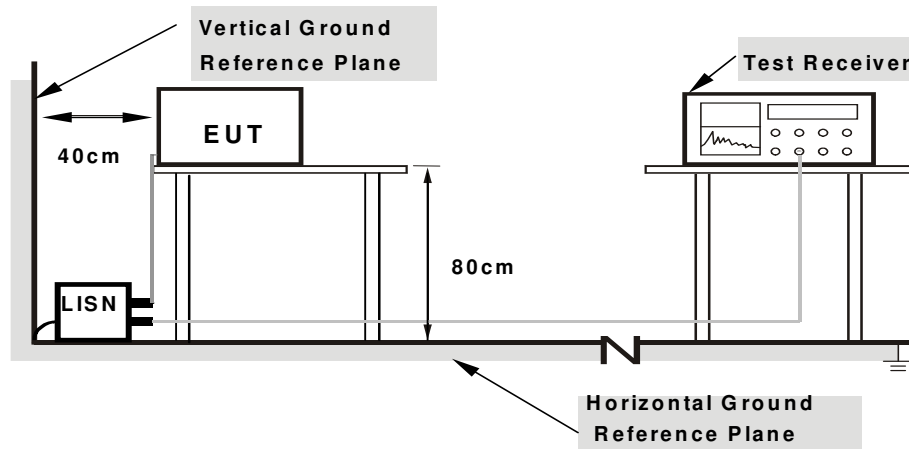

- Note:**
- Support units were connected to second LISN.
 - Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

For the actual test configuration, please refer to the attached file (Test Setup Photo).

3.2.6 EUT OPERATING CONDITIONS

Same as 3.1.7



Test Report No.: RF2203WDG0011-6


3.2.7 TEST RESULTS

CONDUCTED WORST-CASE DATA: GFSK: 5735-5840MHz CH 1

PHASE	Line	6dB BANDWIDTH	9kHz
-------	------	---------------	------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	9.90	44.47	35.86	54.37	45.76	66.00	56.00	-11.63	-10.24
2	0.17605	9.91	41.56	33.23	51.47	43.14	64.67	54.67	-13.20	-11.53
3	0.54357	9.97	36.80	28.68	46.77	38.65	56.00	46.00	-9.23	-7.35
4	1.92075	10.10	26.65	19.94	36.75	30.04	56.00	46.00	-19.25	-15.96
5	6.91125	10.25	30.31	24.24	40.56	34.49	60.00	50.00	-19.44	-15.51
6	16.41300	10.42	30.49	23.53	40.91	33.95	60.00	50.00	-19.09	-16.05

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. The emission levels of other frequencies were very low against the limit.
 3. Margin value = Emission level - Limit value
 4. Correction factor = Insertion loss + Cable loss
 5. Emission Level = Correction Factor + Reading Value.

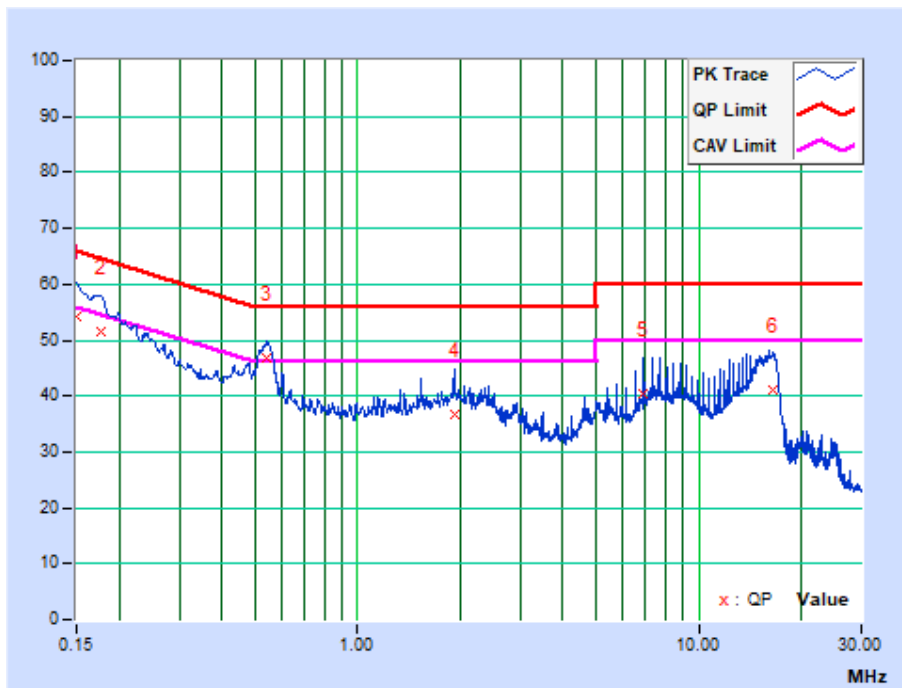




Test Report No.: RF2203WDG0011-6

PHASE	Neutral	6dB BANDWIDTH	9kHz
-------	---------	---------------	------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	9.84	47.51	36.67	57.35	46.51	66.00	56.00	-8.65	-9.49
2	0.16966	9.84	44.37	33.46	54.21	43.30	64.98	54.98	-10.76	-11.67
3	0.19721	9.85	39.21	28.14	49.06	37.99	63.73	53.73	-14.67	-15.74
4	0.53786	9.86	38.30	31.16	48.16	41.02	56.00	46.00	-7.84	-4.98
5	7.29600	10.07	32.24	26.37	42.31	36.44	60.00	50.00	-17.69	-13.56
6	16.30275	10.27	30.25	22.73	40.52	33.00	60.00	50.00	-19.48	-17.00

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. The emission levels of other frequencies were very low against the limit.
 3. Margin value = Emission level - Limit value
 4. Correction factor = Insertion loss + Cable loss
 5. Emission Level = Correction Factor + Reading Value.

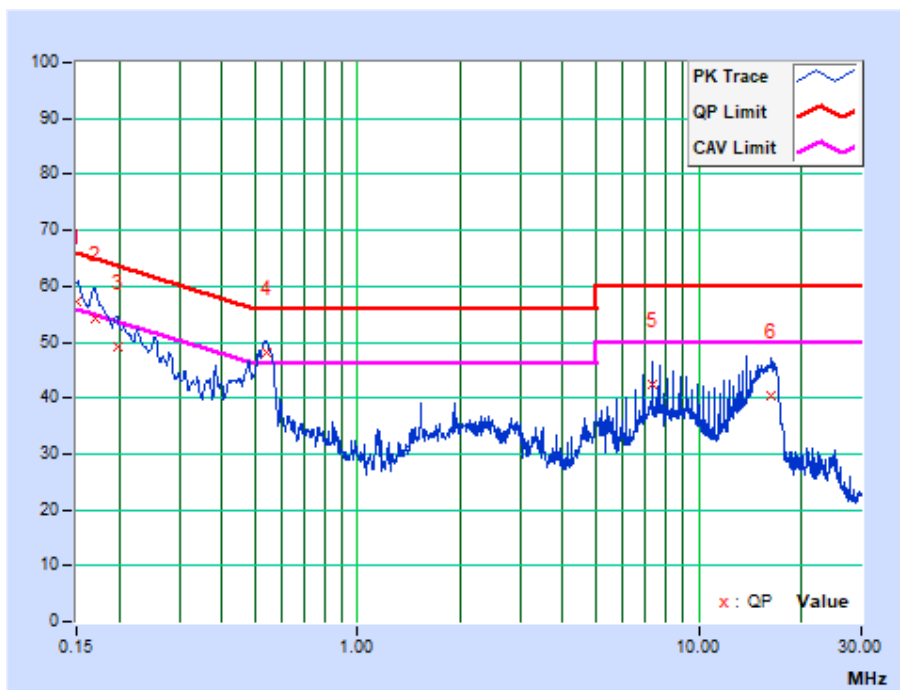


3.3 TRANSMIT POWER MEASUREMENT

3.3.1 LIMITS OF TRANSMIT POWER MEASUREMENT


Operation Band	EUT Category		LIMIT
U-NII-1	-	Outdoor Access Point	1 Watt (30 dBm) (Max. e.i.r.p \leq 125mW(21 dBm) at any elevation angle above 30 degrees as measured from the horizon)
	-	Fixed point-to-point Access Point	1 Watt (30 dBm)
	-	Indoor Access Point	1 Watt (30 dBm)
	√	Mobile and Portable client device	250mW (24 dBm)
U-NII-2A	-		250mW(24dBm) or 11 dBm+10LogB*
U-NII-2C	-		250mW(24dBm) or 11 dBm+10LogB*
U-NII-3	√		1 Watt (30 dBm)

NOTE: 1. Where B is the 26dB emission bandwidth in MHz.

3.3.2 TEST SETUP

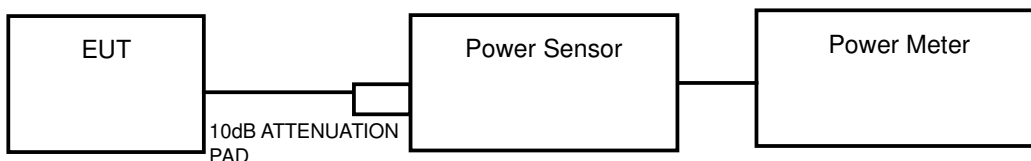

FOR 6/26dB BANDWIDTH

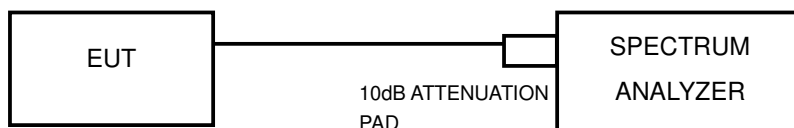



Test Report No.: RF2203WDG0011-6

3.3.3 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Next Cal.
Power Sensor	Keysight	U2021XA	MY57320002	Feb. 23, 23
Power Sensor	Keysight	U2021XA	MY55060018	May 09, 23
Digital Multimeter	FLUKE	15B	A1220010DG	N/A
Humid & Temp Programmable Tester	Haida	HD-225T	110807201	Nov. 03, 22
Oscilloscope	Agilent	DSO9254A	MY51260160	Aug. 11, 22
Signal and Spectrum Analyzer	Rohde&Schwarz	FSV40	101094	Jan. 16, 23
Signal Generator	Agilent	N5183A	MY50140980	Sep. 18, 22
MXG-B RF Vector Signal Generator	Keysight	N5182B	MY56200288	Sep. 14, 22
BLUETOOTH TESTER	Rohde&Schwarz	CBT32	100811	N/A
Attenuator	MINI	BW-S10W2+	S130129FGE2	N/A
DC Source	Keysight	E3642A	MY56146098	N/A
Test software	ADT	ADT_RF Test Software V6.6.5.3	N/A	N/A

NOTES:

1. The test was performed in RF Oven room. (Chenwu)
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.

3.3.4 TEST PROCEDURE

FOR AVERAGE POWER MEASUREMENT

Method PM is used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is not added to measured value.

FOR 26dB BANDWIDTH

- 1) Set RBW = approximately 1% of the emission bandwidth.
- 2) Set the VBW > RBW.
- 3) Detector = RMS.
- 4) Trace mode = max hold.
- 5) Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.



Test Report No.: RF2203WDG0011-6

FOR 6dB BANDWIDTH

- 1) Set RBW = 100 kHz.
- 2) Set the video bandwidth (VBW) ≥ 3 RBW.
- 3) Detector = Peak.
- 4) Trace mode = max hold.
- 5) Sweep = auto couple.
- 6) Allow the trace to stabilize.
- 7) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

3.3.5 DEVIATION FROM TEST STANDARD

No deviation.

3.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually.



Test Report No.: RF2203WDG0011-6

3.3.7 TEST RESULTS

OUTPUT POWER:

GFSK: 5160~5240MHz

CHAIN 0

Channel Number	FREQ. (MHz)	AVG. CONDUCTED POWER (dBm)	LIMIT (dBm)	PASS /FAIL
1	5160	7.73	24.00	PASS
9	5200	8.65	24.00	PASS
17	5240	9.38	24.00	PASS

CHAIN 1

Channel Number	FREQ. (MHz)	AVG. CONDUCTED POWER (dBm)	LIMIT (dBm)	PASS /FAIL
1	5160	8.94	24.00	PASS
9	5200	9.39	24.00	PASS
17	5240	9.99	24.00	PASS

GFSK: 5735~5840MHz

CHAIN 0

Channel Number	FREQ. (MHz)	AVG. CONDUCTED POWER (dBm)	LIMIT (dBm)	PASS /FAIL
1	5735	7.55	30.00	PASS
10	5780	6.95	30.00	PASS
22	5840	7.48	30.00	PASS

CHAIN 1

Channel Number	FREQ. (MHz)	AVG. CONDUCTED POWER (dBm)	LIMIT (dBm)	PASS /FAIL
1	5735	9.55	30.00	PASS
10	5780	9.46	30.00	PASS
22	5840	9.43	30.00	PASS



Test Report No.: RF2203WDG0011-6

26dB BANDWIDTH:

GFSK : 5160~5240MHz

Channel Number	Freq. (MHz)	26dB DOWN BANDWIDTH (MHz)	PASS /FAIL
1	5160	4.66	PASS
9	5200	4.65	PASS
17	5240	4.64	PASS

6dB BANDWIDTH

GFSK : 5735~5840MHz

Channel Number	Freq. (MHz)	6dB DOWN BANDWIDTH (MHz)	PASS /FAIL
1	5735	1.92	PASS
10	5780	1.99	PASS
22	5840	1.97	PASS




BUREAU VERITAS

Test Report No.: RF2203WDG0011-6

26dB bandwidth Test Plot

GFSK : 5160~5240MHz

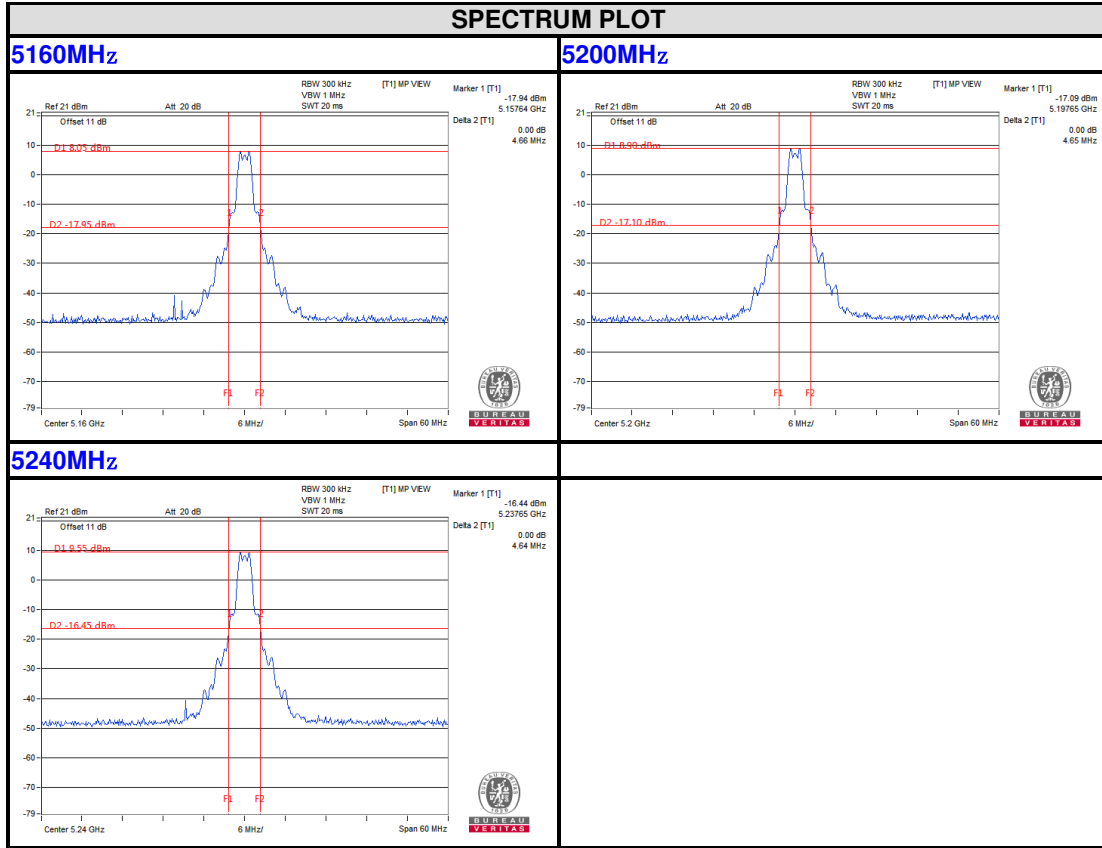

Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch

No. 96, Guantai Road (Houjie Section), Houjie
Town, Dongguan City, Guangdong Province.
523942. People's Republic of China.


Tel: +86 769 8998 2098
Fax: +86 769 8593 1080
Email: customerservice.dg@bureauveritas.com



BUREAU VERITAS

Test Report No.: RF2203WDG0011-6

6dB BANDWIDTH

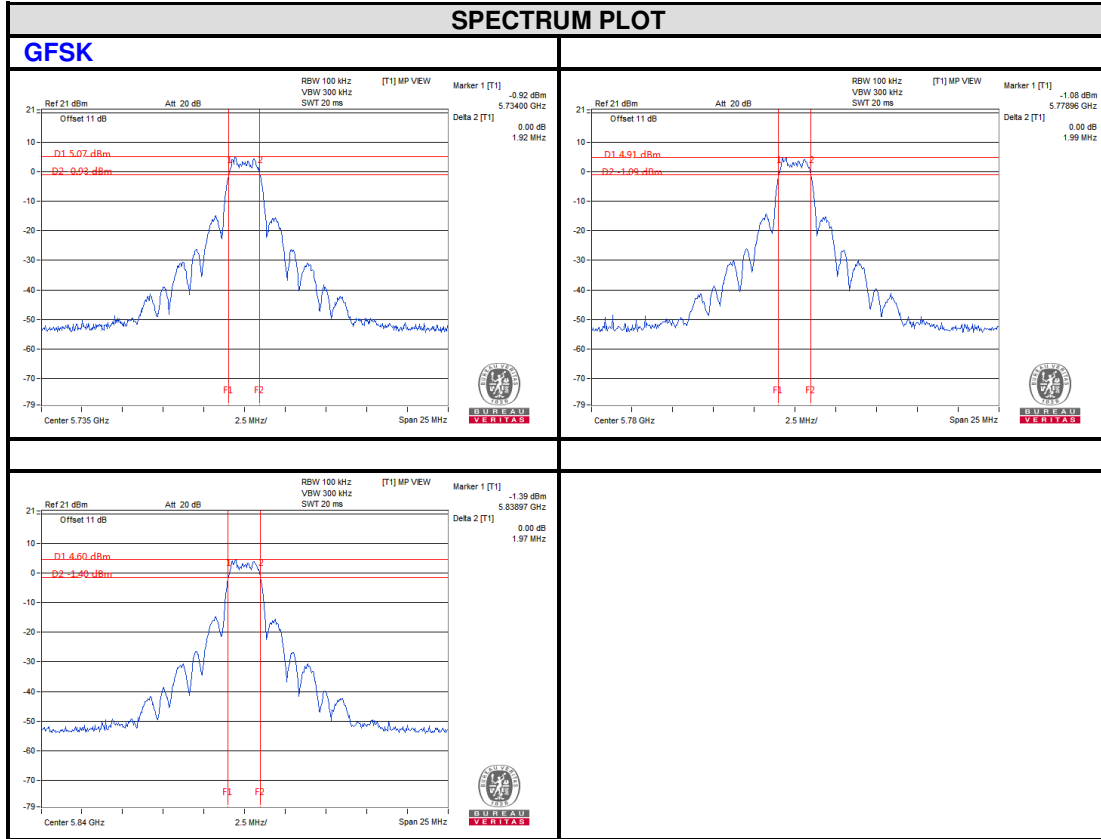

Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch

No. 96, Guantai Road (Houjie Section), Houjie
Town, Dongguan City, Guangdong Province.
523942. People's Republic of China.


Tel: +86 769 8998 2098
Fax: +86 769 8593 1080
Email: customerservice_dg@bureauveritas.com

3.4 PEAK POWER SPECTRAL DENSITY MEASUREMENT

3.4.1 LIMITS OF PEAK POWER SPECTRAL DENSITY MEASUREMENT

Operation Band	EUT Category		LIMIT
U-NII-1	-	Outdoor Access Point	17dBm/ MHz
	-	Fixed point-to-point Access Point	
	-	Indoor Access Point	
	√	Mobile and Portable client device	11dBm/ MHz
U-NII-2A	-		11dBm/ MHz
U-NII-2C	-		11dBm/ MHz
U-NII-3	√		30dBm/ 500kHz

3.4.2 TEST SETUP

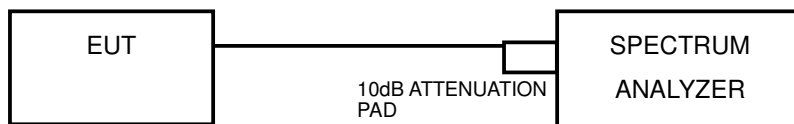

3.4.3 TEST INSTRUMENTS

Refer to section 3.3.3 to get information of above instrument.

3.4.4 TEST PROCEDURES

For U-NII-1, U-NII-2A, U-NII-2C band:

Using method SA-2

- 1) Set span to encompass the entire emission bandwidth (EBW) of the signal.
- 2) Set RBW = 1MHz, Set VBW =3 MHz, Detector = RMS
- 3) Set Channel power measure = 1MHz
- 4) Sweep time = auto, trigger set to “free run”.
- 5) Trace average at least 100 traces in power averaging mode.
- 6) Record the max value and add 10 log (1/duty cycle)



Test Report No.: RF2203WDG0011-6

For U-NII-3 band:

Using method SA-2

- 1) Set span to encompass the entire emission bandwidth (EBW) of the signal.
- 2) Set RBW = 300 kHz, Set VBW = 1 MHz, Detector = RMS
- 3) Set Channel power measure = 1MHz
- 4) Sweep time = auto, trigger set to "free run".
- 5) Trace average at least 100 traces in power averaging mode.
- 6) Record the max value and add 10 log (1/duty cycle)

3.4.5 DEVIATION FROM TEST STANDARD

No deviation.

3.4.6 EUT OPERATING CONDITIONS

Same as 3.3.6




Test Report No.: RF2203WDG0011-6

3.4.7 TEST RESULTS

GFSK: 5160~5240MHz

Channel	Frequency (MHz)	PSD (dBm/MHz)	MAX. Limit (dBm)	PASS / FAIL
1	5160	3.98	11.00	PASS
9	5200	4.84	11.00	PASS
17	5240	4.98	11.00	PASS

PSD Test Worst Plot

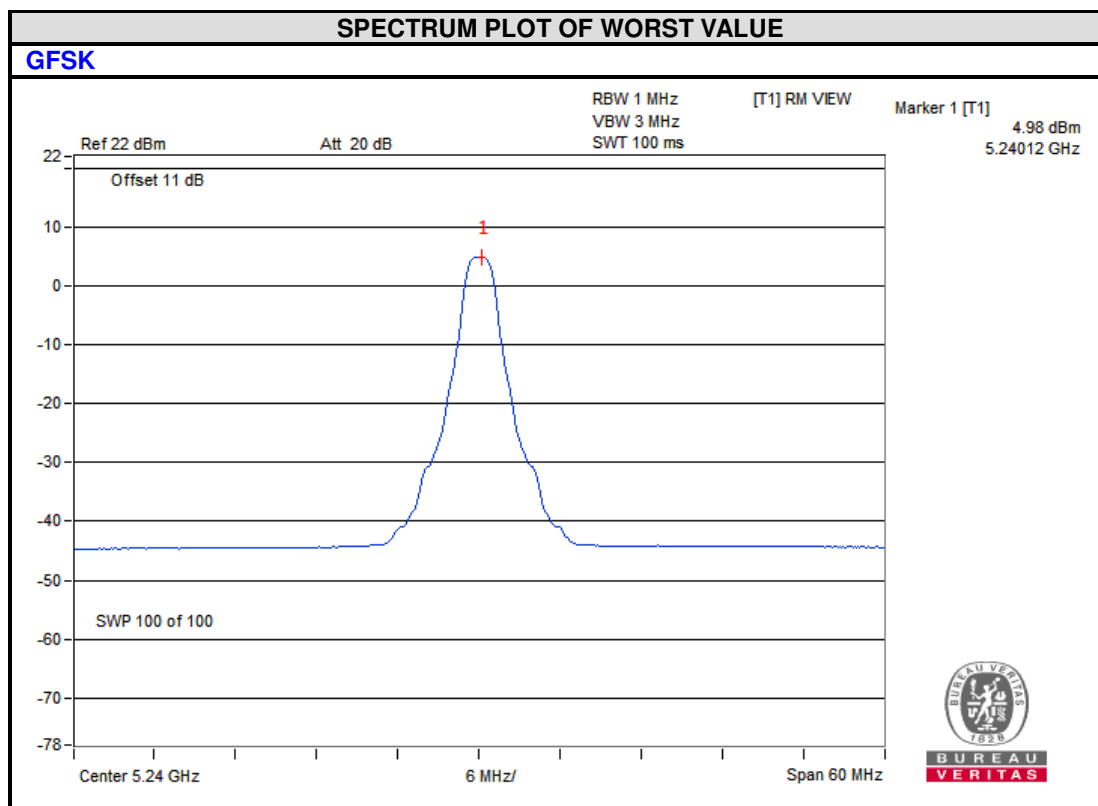

Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch

No. 96, Guantai Road (Houjie Section), Houjie
Town, Dongguan City, Guangdong Province.
523942. People's Republic of China.

Tel: +86 769 8998 2098
Fax: +86 769 8593 1080
Email: customerservice.dg@bureauveritas.com




Test Report No.: RF2203WDG0011-6

GFSK: 5730~5840MHz

Channel Number	Frequency (MHz)	RF Power Level in 500kHz BW (dBm)	MAX. Limit (dBm/500k)	PASS / FAIL
1	5735	2.90	30.00	PASS
10	5780	2.72	30.00	PASS
22	5840	2.47	30.00	PASS

PSD Test Worst Plot

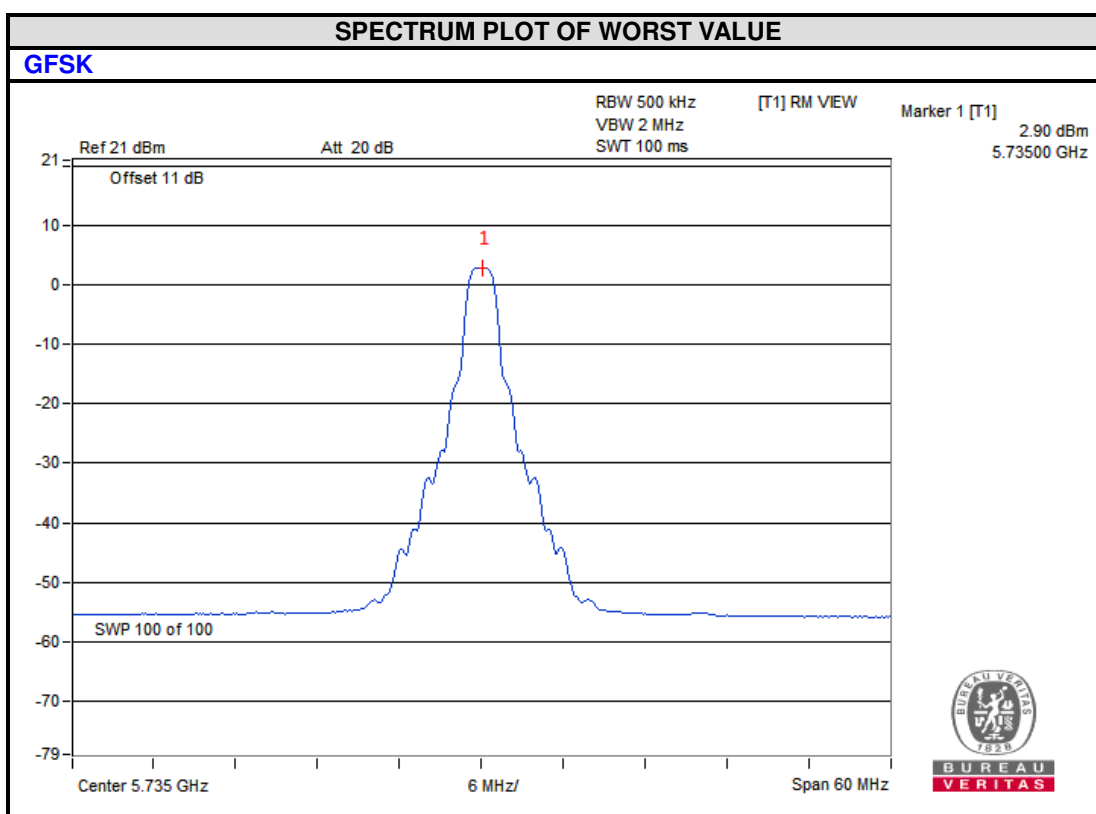

Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch

No. 96, Guantai Road (Houjie Section), Houjie
Town, Dongguan City, Guangdong Province.
523942. People's Republic of China.


Tel: +86 769 8998 2098
Fax: +86 769 8593 1080
Email: customerservice.dg@bureauveritas.com

3.5 FREQUENCY STABILITY

3.5.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT

The frequency of the carrier signal shall be maintained within band of operation.

3.5.2 TEST SETUP

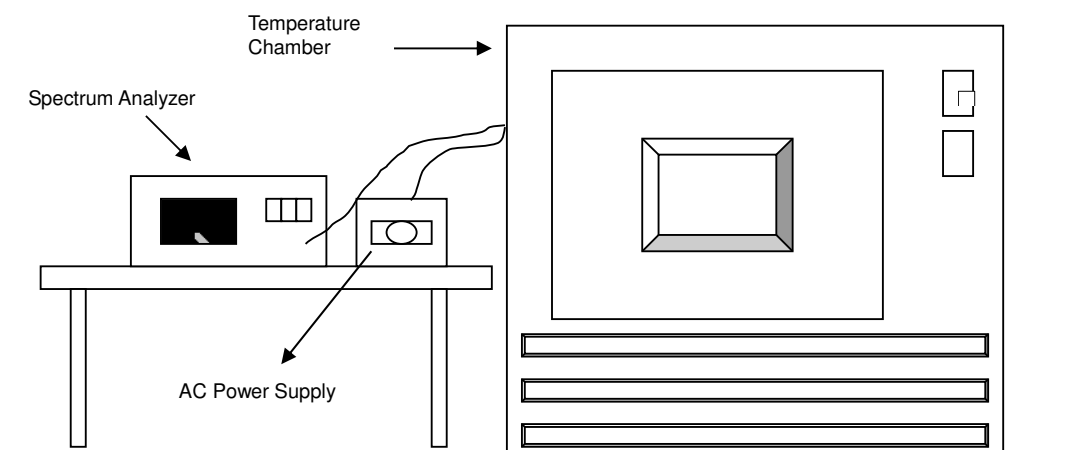

3.5.3 TEST INSTRUMENTS

Refer to section 3.3.3 to get information of above instrument.



Test Report No.: RF2203WDG0011-6

3.5.4 TEST PROCEDURE

- a. The EUT was placed inside the environmental test chamber and powered by nominal AC voltage.
- b. Turn the EUT on and couple its output to a spectrum analyzer.
- c. Turn the EUT off and set the chamber to the highest temperature specified.
- d. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn the EUT on and measure the operating frequency after 2, 5, and 10 minutes.
- e. Repeat step 2 and 3 with the temperature chamber set to the lowest temperature.
- f. The test chamber was allowed to stabilize at +20 degree C for a minimum of 30 minutes. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency record.

3.5.5 DEVIATION FROM TEST STANDARD

No deviation.

3.5.6 EUT OPERATING CONDITION

Set the EUT transmit at un-modulation mode to test frequency stability.



Test Report No.: RF2203WDG0011-6

3.5.7 TEST RESULTS

FREQUENCY STABILITY VERSUS TEMP.									
OPERATING FREQUENCY: 5160MHz									
TEMP. (°C)	POWER SUPPLY (Vac)	0 MINUTE		2 MINUTE		5 MINUTE		10 MINUTE	
		Measured Frequency (MHz)	Frequency Drift	Measured Frequency (MHz)	Frequency Drift	Measured Frequency (MHz)	Frequency Drift	Measured Frequency (MHz)	Frequency Drift
50	120	5159.9886	-0.00022	5159.9876	-0.00024	5159.9915	-0.00016	5159.9911	-0.00017
40	120	5159.9999	0.00000	5159.9973	-0.00005	5159.9964	-0.00007	5159.9985	-0.00003
30	120	5159.9749	-0.00049	5159.9758	-0.00047	5159.9735	-0.00051	5159.9747	-0.00049
20	120	5159.9944	-0.00011	5159.9943	-0.00011	5159.9947	-0.00010	5159.9955	-0.00009
10	120	5160.0007	0.00001	5160.0018	0.00003	5160.0021	0.00004	5160.0043	0.00008
0	120	5160.0075	0.00015	5160.0072	0.00014	5160.0069	0.00013	5160.0113	0.00022
-10	120	5159.9988	-0.00002	5159.9997	-0.00001	5159.9995	-0.00001	5159.9985	-0.00003
-20	120	5160.0029	0.00006	5160.0072	0.00014	5160.003	0.00006	5160.0071	0.00014
-30	120	5159.9783	-0.00042	5159.979	-0.00041	5159.9805	-0.00038	5159.9791	-0.00041

FREQUENCY STABILITY VERSUS TEMP.									
OPERATING FREQUENCY: 5160MHz									
TEMP. (°C)	POWER SUPPLY (Vac)	0 MINUTE		2 MINUTE		5 MINUTE		10 MINUTE	
		Measured Frequency (MHz)	Frequency Drift	Measured Frequency (MHz)	Frequency Drift	Measured Frequency (MHz)	Frequency Drift	Measured Frequency (MHz)	Frequency Drift
20	138	5159.9935	-0.00013	5159.9948	-0.00010	5159.995	-0.00010	5159.9958	-0.00008
	120	5159.9944	-0.00011	5159.9943	-0.00011	5159.9947	-0.00010	5159.9955	-0.00009
	102	5159.9948	-0.00010	5159.9939	-0.00012	5159.9951	-0.00009	5159.9947	-0.00010



Test Report No.: RF2203WDG0011-6

4. PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).



Test Report No.: RF2203WDG0011-6

5. APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No modifications were made to the EUT by the lab during the test.

---END---