

No. 1 Workshop, M-10, Middle section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057

Telephone:	+86 (0) 755 2601 2053
Fax:	+86 (0) 755 2671 0594
Email:	ee.shenzhen@sgs.com

Report No.: SZEM151100738301 Page: 1 of 92

FCC REPORT

Test Result:	PASS *
Date of Issue:	2015-12-30
Date of Test:	2015-12-21 to 2015-12-28
Date of Receipt:	2015-12-11
Standards:	47 CFR Part 15, Subpart C (2014)
FCC ID:	WLQOMNIS2RBT
Trade Mark:	Polk
Model No.(EUT):	OMNI S2R BLUETOOTH ADAPTER
Product Name:	BLUETOOTH ADAPTER
Factory:	Concord Electronics (HuiZhou) Ltd
Manufacturer:	Polk Audio
Applicant:	Polk Audio
Application No:	SZEM1511007383CR

^{*} In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Jack Zhang EMC Laboratory Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. All test results in this report can be traceable to National or International Standards.



Report No.: SZEM151100738301 Page: 2 of 92

2 Version

Revision Record				
Version	Chapter	Date	Modifier	Remark
00		2015-12-30		Original

Authorized for issue by:		
Tested By	Robin Yu	2015-12-28
	(Robin Yu) /Project Engineer	Date
Prepared By	Iris Zhou	2015-12-30
	(Iris Zhou) /Clerk	Date
Checked By	Eric Fu	2015-12-30
	(Eric Fu) /Reviewer	Date

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM151100738301 Page: 3 of 92

3 Test Summary

Test Item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15, Subpart C Section 15.203/15.247 (c)	ANSI C63.10 (2013)	PASS
AC Power Line Conducted Emission	47 CFR Part 15, Subpart C Section 15.207	ANSI C63.10 (2013)	PASS
Conducted Peak Output Power	47 CFR Part 15, Subpart C Section 15.247 (b)(1)	ANSI C63.10 (2013)	PASS
20dB Occupied Bandwidth	47 CFR Part 15, Subpart C Section 15.247 (a)(1)	ANSI C63.10 (2013)	PASS
Carrier Frequencies Separation	47 CFR Part 15, Subpart C Section 15.247 (a)(1)	ANSI C63.10 (2013)	PASS
Hopping Channel Number	47 CFR Part 15, Subpart C Section 15.247 (a)(1)	ANSI C63.10 (2013)	PASS
Dwell Time	47 CFR Part 15, Subpart C Section 15.247 (a)(1)	ANSI C63.10 (2013)	PASS
Pseudorandom Frequency Hopping Sequence	47 CFR Part 15, Subpart C Section 15.247(b)(4)&TCB Exclusion List (7 July 2002)	ANSI C63.10 (2013)	PASS
Band-edge for RF Conducted Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	ANSI C63.10 (2013)	PASS
RF Conducted Spurious Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	ANSI C63.10 (2013)	PASS
Radiated Spurious emissions	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10 (2013)	PASS
Restricted bands around fundamental frequency (Radiated Emission)	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10 (2013)	PASS

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM151100738301 Page: 4 of 92

4 Contents

1	CC	OVER PAGE	
2		ERSION	
3	TE	EST SUMMARY	
4	CC	ONTENTS	
5	GE	ENERAL INFORMATION	
	5.1	CLIENT INFORMATION	5
	5.2	GENERAL DESCRIPTION OF EUT	
	5.3	Test Environment	
	5.4	DESCRIPTION OF SUPPORT UNITS	
	5.5	TEST LOCATION	
	5.6	MEASUREMENT UNCERTAINTY (95% CONFIDENCE LEVELS, K=2)	7
	5.7	TEST FACILITY	
	5.8	DEVIATION FROM STANDARDS	
	5.9	ABNORMALITIES FROM STANDARD CONDITIONS	
	5.10	OTHER INFORMATION REQUESTED BY THE CUSTOMER	
	5.11	Equipment List	9
6	TE	EST RESULTS AND MEASUREMENT DATA	
	6.1	ANTENNA REQUIREMENT	
	6.2	Conducted Emissions	
	6.3	CONDUCTED PEAK OUTPUT POWER	
	6.4	20dB Occupy Bandwidth	
	6.5	CARRIER FREQUENCIES SEPARATION	
	6.6	HOPPING CHANNEL NUMBER	
	6.7	DWELL TIME	
	6.8	BAND-EDGE FOR RF CONDUCTED EMISSIONS	
	6.9	Spurious RF Conducted Emissions	
	6.10	OTHER REQUIREMENTS FREQUENCY HOPPING SPREAD SPECTRUM SYSTEM	
	6.11	RADIATED SPURIOUS EMISSION	
		11.1 Radiated Emission below 1GHz	
		11.2 Transmitter Emission above 1GHz	
	6.12	RESTRICTED BANDS AROUND FUNDAMENTAL FREQUENCY	
7	PH	IOTOGRAPHS - EUT TEST SETUP	89
	7.1	Conducted Emission	
	7.2	RADIATED EMISSION	
	7.3	RADIATED SPURIOUS EMISSION	
8	PH	HOTOGRAPHS - EUT CONSTRUCTIONAL DETAILS	



Report No.: SZEM151100738301 Page: 5 of 92

5 General Information

5.1 Client Information

Applicant:	Polk Audio
Address of Applicant:	5601 Metro Dr. Baltimore MD 21215 USA
Manufacturer:	Polk Audio
Address of Manufacturer:	5601 Metro Dr. Baltimore MD 21215 USA
Factory:	Concord Electronics (HuiZhou) Ltd
Address of Factory:	21, PingAn Road, ShuiKou, HuiCheng District, HuiZhou, GuangDong, China.

5.2 General Description of EUT

Draduat Namai			
Product Name:	BLUETOOTH ADAPTER		
Model No.:	OMNI S2R BLUETOOTH ADAPTER		
Trade Mark:	Polk		
Operation Frequency:	ВТ	2402MHz-2480MHz	
Bluetooth Version:	V4.1 Classic Mode		
Modulation Technique:	Frequency Hopping Spread Spectr	um(FHSS)	
Modulation Type:	GFSK, π/4DQPSK, 8DPSK		
Number of Channel:	79		
Hopping Channel Type:	Adaptive Frequency Hopping systems		
Sample Type:	Portable production		
Antenna Type and Gain:	Type : Monopole		
	Gain : BT: -0.8dBi		
Power Supply:	DC 5V=500mA		
The Limit Temperature:	-10°C to +45°C		

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM151100738301 Page: 6 of 92

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
0	2402MHz	20	2422MHz	40	2442MHz	60	2462MHz
1	2403MHz	21	2423MHz	41	2443MHz	61	2463MHz
2	2404MHz	22	2424MHz	42	2444MHz	62	2464MHz
3	2405MHz	23	2425MHz	43	2445MHz	63	2465MHz
4	2406MHz	24	2426MHz	44	2446MHz	64	2466MHz
5	2407MHz	25	2427MHz	45	2447MHz	65	2467MHz
6	2408MHz	26	2428MHz	46	2448MHz	66	2468MHz
7	2409MHz	27	2429MHz	47	2449MHz	67	2469MHz
8	2410MHz	28	2430MHz	48	2450MHz	68	2470MHz
9	2411MHz	29	2431MHz	49	2451MHz	69	2471MHz
10	2412MHz	30	2432MHz	50	2452MHz	70	2472MHz
11	2413MHz	31	2433MHz	51	2453MHz	71	2473MHz
12	2414MHz	32	2434MHz	52	2454MHz	72	2474MHz
13	2415MHz	33	2435MHz	53	2455MHz	73	2475MHz
14	2416MHz	34	2436MHz	54	2456MHz	74	2476MHz
15	2417MHz	35	2437MHz	55	2457MHz	75	2477MHz
16	2418MHz	36	2438MHz	56	2458MHz	76	2478MHz
17	2419MHz	37	2439MHz	57	2459MHz	77	2479MHz
18	2420MHz	38	2440MHz	58	2460MHz	78	2480MHz
19	2421MHz	39	2441MHz	59	2461MHz		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The Lowest channel	2402MHz
The Middle channel	2441MHz
The Highest channel	2480MHz

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM151100738301 Page: 7 of 92

5.3 Test Environment

Operating Environment:	
Temperature:	25.0 °C
Humidity:	55 % RH
Atmospheric Pressure:	1025mbar

5.4 Description of Support Units

The EUT has been tested associated with following support units.

Description	Manufacturer	Model No.
Adapter	Polk	S024WM2400100
Laptop	Lenovo	T430u
Speaker	Polk	Omni S2 Rechargeable
CSR Blue test 3 (control software, which is not used during the test)	CSR	N/A

5.5 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch E&E Lab,

No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, Guangdong, China. 518057.

Tel: +86 755 2601 2053 Fax: +86 755 2671 0594 No tests were sub-contracted.

5.6 Measurement Uncertainty (95% confidence levels, k=2)

No.	Item	Measurement Uncertainty
1	Duty cycle	0.37%
2	Total RF power, conducted	0.75dB
3	RF power density, conducted	2.84dB
4	Spurious emissions, conducted	0.75dB
5	Padiated Spurious omission test	4.5dB (30MHz-1GHz)
5	Radiated Spurious emission test	4.8dB (1GHz-25GHz)
6	Temperature test	1 °C
7	Humidity test	3%
8	DC and low frequency voltages	0.5%



Report No.: SZEM151100738301 Page: 8 of 92

5.7 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS (No. CNAS L2929)

CNAS has accredited SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

A2LA (Certificate No. 3816.01)

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 3816.01.

• VCCI

The 10m Semi-anechoic chamber and Shielded Room of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-823, R-4188, T-1153 and C-2383 respectively.

FCC – Registration No.: 556682

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 556682.

Industry Canada (IC)

The 3m Semi-anechoic chambers and the 10m Semi-anechoic chambers of SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab have been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 4620C-2, 4620C-3.

5.8 Deviation from Standards

None.

5.9 Abnormalities from Standard Conditions

None.

5.10Other Information Requested by the Customer

None.



Report No.: SZEM151100738301 Page: 9 of 92

5.11 Equipment List

	Conducted Emission						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. date (yyyy-mm-dd)	Cal.Due date (yyyy-mm-dd)	
1	Shielding Room	ZhongYu Electron	GB-88	SEL0042	2015-05-13	2016-05-13	
2	LISN	Rohde & Schwarz	ENV216	SEL0152	2015-10-09	2016-10-09	
3	LISN	ETS-LINDGREN	3816/2	SEL0021	2015-05-13	2016-05-13	
4	8 Line ISN	Fischer Custom Communications Inc.	FCC-TLIS N-T8-02	SEL0162	2015-08-30	2016-08-30	
5	4 Line ISN	Fischer Custom Communications Inc.	FCC-TLIS N-T4-02	SEL0163	2015-08-30	2016-08-30	
6	2 Line ISN	Fischer Custom Communications Inc.	FCC-TLIS N-T2-02	SEL0164	2015-08-30	2016-08-30	
7	EMI Test Receiver	Rohde & Schwarz	ESCI	SEL0022	2015-05-13	2016-05-13	
8	Coaxial Cable	SGS	N/A	SEL0025	2015-05-13	2016-05-13	
9	DC Power Supply	Zhao Xin	RXN-305D	SEL0117	2015-10-09	2016-10-09	
10	Humidity/ Temperature Indicator	Shanhai Qixiang	ZJ1-2B	SEL0103	2015-10-24	2016-10-24	
11	Barometer	Chang Chun	DYM3	SEL0088	2015-05-13	2016-05-13	



Report No.: SZEM151100738301 Page: 10 of 92

	RE in Chamber					
ltem	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. date (yyyy-mm-dd)	Cal.Due date (yyyy-mm-dd)
1	3m Semi-Anechoic Chamber	ETS-LINDGREN	N/A	SEL0017	2015-05-13	2016-05-13
2	EMI Test Receiver	Agilent Technologies	N9038A	SEL0312	2015-09-16	2016-09-16
3	EMI Test software	AUDIX	E3	SEL0050	N/A	N/A
4	BiConiLog Antenna (26-3000MHz)	ETS-LINDGREN	3142C	SEL0015	2014-11-15	2017-11-15
5	Double-ridged horn (1-18GHz)	ETS-LINDGREN	3117	SEL0006	2015-10-17	2016-10-17
6	Horn Antenna (18-26GHz)	ETS-LINDGREN	3160	SEL0076	2014-11-24	2017-11-24
7	Pre-amplifier (0.1-1300MHz)	Agilent Technologies	8447D	SEL0053	2015-05-13	2016-05-13
8	Pre-Amplifier (0.1-26.5GHz)	Compliance Directions Systems Inc.	PAP-0126	SEL0168	2015-10-17	2016-10-17
9	Coaxial cable	SGS	N/A	SEL0027	2015-05-13	2016-05-13
10	Coaxial cable	SGS	N/A	SEL0189	2015-05-13	2016-05-13
11	Coaxial cable	SGS	N/A	SEL0121	2015-05-13	2016-05-13
12	Coaxial cable	SGS	N/A	SEL0178	2015-05-13	2016-05-13
13	Band filter	Amindeon	82346	SEL0094	2015-05-13	2016-05-13
14	Barometer	Chang Chun	DYM3	SEL0088	2015-05-13	2016-05-13
15	DC Power Supply	Zhao Xin	RXN-305D	SEL0117	2015-10-09	2016-10-09
16	Humidity/ Temperature Indicator	Shanhai Qixiang	ZJ1-2B	SEL0103	2015-10-24	2016-10-24
17	Signal Generator (10M-27GHz)	Rohde & Schwarz	SMR27	SEL0067	2015-05-13	2016-05-13
18	Loop Antenna	Beijing Daze	ZN30401	SEL0203	2015-05-13	2016-05-13

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM151100738301 Page: 11 of 92

	RF connected test							
ltem	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. date (yyyy-mm-dd)	Cal.Due date (yyyy-mm-dd)		
1	DC Power Supply	Zhao Xin	RXN-305D	SEL0117	2015-10-09	2016-10-09		
2	Humidity/ Temperature Indicator	HYGRO	ZJ1-2B	SEL0033	2015-10-24	2016-10-24		
3	Spectrum Analyzer	Rohde & Schwarz	FSP	SEL0154	2015-10-17	2016-10-17		
4	Coaxial cable	SGS	N/A	SEL0178	2015-05-13	2016-05-13		
5	Coaxial cable	SGS	N/A	SEL0179	2015-05-13	2016-05-13		
6	Barometer	ChangChun	DYM3	SEL0088	2015-05-13	2016-05-13		
7	Signal Generator	Rohde & Schwarz	SML03	SEL0068	2015-04-25	2016-04-25		
8	POWER METER	R & S	NRVS	SEL0144	2015-10-09	2016-10-09		
9	Attenuator	Beijin feihang taida	TST-2-6dB	SEL0205	2015-04-25	2016-04-25		

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM151100738301 Page: 12 of 92

6 Test results and Measurement Data

6.1 Antenna Requirement

Standard requirement: 47 CFR Part 15C Section 15.203 /247(c)


15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

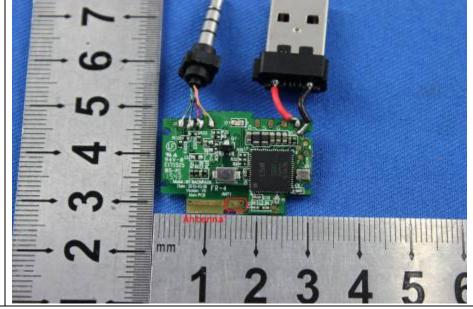

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is -0.8 dBi.



Report No.: SZEM151100738301 Page: 13 of 92

		15					
Test Requirer	ment: 4	47 CFR Part 15C Section 15.207					
Test Method:	A	ANSI C63.10: 2013					
Test Frequen	cy Range: 1	150kHz to 30MHz					
Limit:			Limit (d	BuV)			
		Frequency range (MHz)	Quasi-peak	Average			
		0.15-0.5	66 to 56*	56 to 46*			
		0.5-5	56	46			
		5-30	60	50			
	*	Decreases with the logarithm	n of the frequency.		1		
Test Procedu	3	 room. The EUT was connected to Impedance Stabilization Na impedance. The power call connected to a second LIS reference plane in the sam measured. A multiple sock power cables to a single LI exceeded. The tabletop EUT was place ground reference plane. An placed on the horizontal gr The test was performed with of the EUT shall be 0.4 m f vertical ground reference p reference plane. The LISN unit under test and bonded mounted on top of the group between the closest points the EUT and associated ed 	garithm of the frequency. disturbance voltage test was conducted in a shield octed to AC power source through a LISN 1 (Line tion Network) which provides a $50\Omega/50\mu$ H + 5Ω lines wer cables of all other units of the EUT were nd LISN 2, which was bonded to the ground he same way as the LISN 1 for the unit being e socket outlet strip was used to connect multiple ngle LISN provided the rating of the LISN was not as placed upon a non-metallic table 0.8m above the ane. And for floor-standing arrangement, the EUT was notal ground reference plane, ned with a vertical ground reference plane. The rear 0.4 m from the vertical ground reference plane. The rear 0.4 m from the vertical ground reference plane. The ence plane was bonded to the horizontal ground e LISN 1 was placed 0.8 m from the boundary of the bonded to a ground reference plane for LISNs he ground reference plane. This distance was points of the LISN 1 and the EUT. All other units of ated equipment was at least 0.8 m from the LISN 2. haximum emission, the relative positions of				

6.2 Conducted Emissions



Report No.: SZEM151100738301 Page: 14 of 92

Test Setup:	Shielding Room Image: Comparison of the second se			
Exploratory Test Mode:	Non-hopping transmitting mode with all kind of modulation and all kind of data type at the lowest, middle, high channel. Charge + Transmitting mode.			
Final Test Mode:	Through Pre-scan, find the DH1 of data type and GFSK modulation at the lowest channel is the worst case. Charge + Transmitting mode Only the worst case is recorded in the report.			
Instruments Used:	Refer to section 5.10 for details			
Test Results:	Pass			




Report No.: SZEM151100738301 Page: 15 of 92

Measurement Data

An initial pre-scan was performed on the live and neutral lines with peak detector.

Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.

Live line:

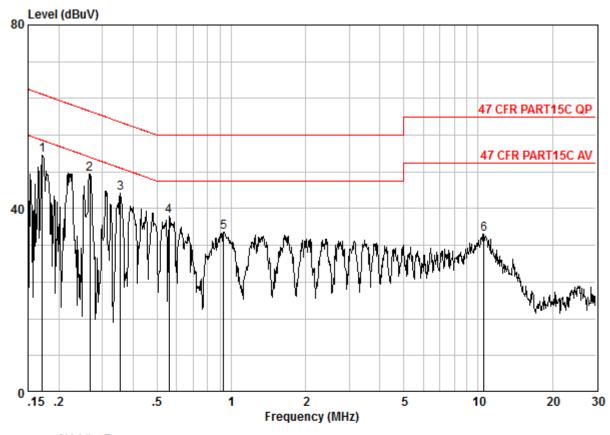


Site : Shielding Room Condition : 47 CFR PART15C AV CE LINE Job No. : 7383CR

	Freq	Cable Loss	LISN Factor	Read Level	Level	Limit Line		Remark
	MHz	dB	dB	dBuV	dBuV	dBuV	dB	
10	0.17124	0.02	9.60	42.14	51.76	54.90	-3.14	Peak
20	0.26724	0.01	9.60	37.98	47.59	51.20	-3.62	Peak
30	0.35576	0.01	9.59	33.77	43.37	48.83	-5.46	Peak
40	0.55814	0.01	9.60	28.66	38.27	46.00	-7.73	Peak
50	0.92821	0.02	9.62	25.32	34.96	46.00	-11.04	Peak
60	10.564	0.01	9.72	24.67	34.40	50.00	-15.60	Peak



Report No.: SZEM151100738301 Page: 16 of 92

Neutral line:

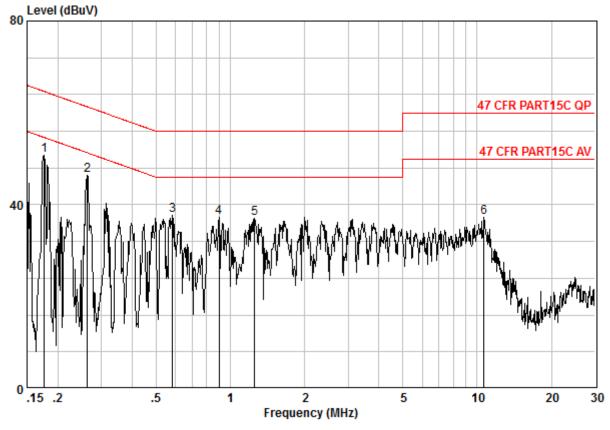

Site	: Shielding Room
Condition	: 47 CFR PART15C AV CE NEUTRAL
Job No.	: 7383CR

		Freq	Cable Loss	LISN Factor			Limit Line	Over Limit	Remark
		MHz	dB	dB	dBuV	dBuV	dBuV	dB	
1 2 3 4 5	0 0 0	0.17584 0.26303 0.58231 0.89917 1.255	0.02 0.02 0.01 0.02 0.02	9.61 9.63 9.63	41.06 36.90 27.96 27.54 27.34	46.53 37.61 37.19	51.34 46.00 46.00	-4.81 -8.39 -8.81	Peak Peak Peak
6	0	10.676	0.01	9.81	27.47	37.29	50.00	-12.71	Peak

Notes:

1. The following Quasi-Peak and Average measurements were performed on the EUT:

2. Final Test Level =Receiver Reading + LISN Factor + Cable Loss.



Report No.: SZEM151100738301 Page: 17 of 92

6.3 Conducted Peak Output Power

Test Requirement:	47 CFR Part 15C Section 15.247 (b)(1)			
Test Method:	ANSI C63.10:2013			
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane Remark: Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.			
Limit:	30dBm			
Exploratory Test Mode:	Non-hopping transmitting with all kind of modulation and all kind of data type			
Final Test Mode:	Through Pre-scan, find the DH1 of data type is the worst case of GFSK modulation type, 2-DH1 of data type is the worst case of π /4DQPSK modulation type, 3-DH1 of data type is the worst case of 8DPSK modulation type.			
Instruments Used:	Refer to section 5.10 for details			
Test Results:	Pass			

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."




Report No.: SZEM151100738301 Page: 18 of 92

Measurement Data

GFSK mode						
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result			
Lowest	-2.10	30.00	Pass			
Middle	2.35	30.00	Pass			
Highest	2.61	30.00	Pass			
	π/4DQPSK m	node				
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result			
Lowest	-4.58	30.00	Pass			
Middle	-0.02	30.00	Pass			
Highest	0.16	30.00	Pass			
	8DPSK mo	de				
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result			
Lowest	-4.09	30.00	Pass			
Middle	0.50	30.00	Pass			
Highest	0.77 30.00 Pass					




Report No.: SZEM151100738301 Page: 19 of 92

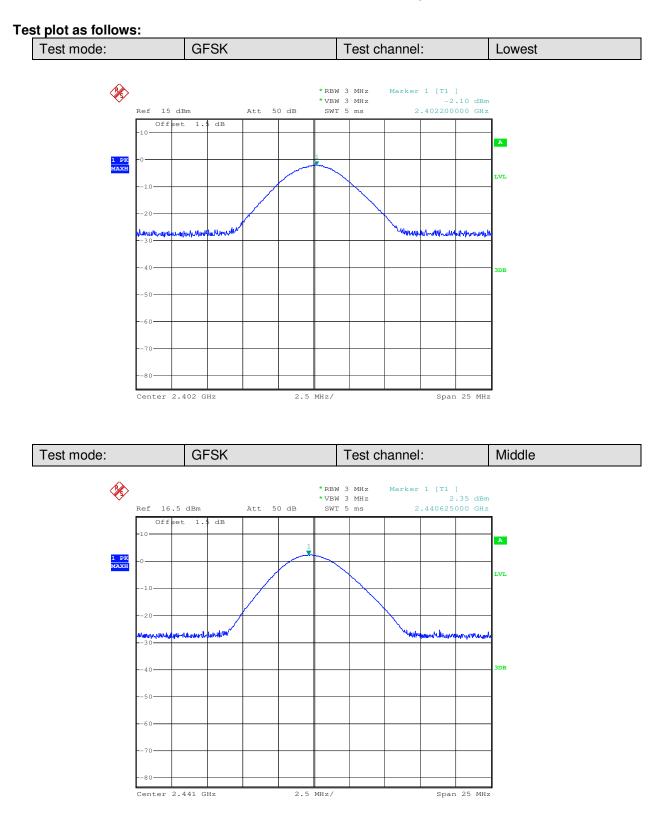




Report No.: SZEM151100738301 Page: 20 of 92

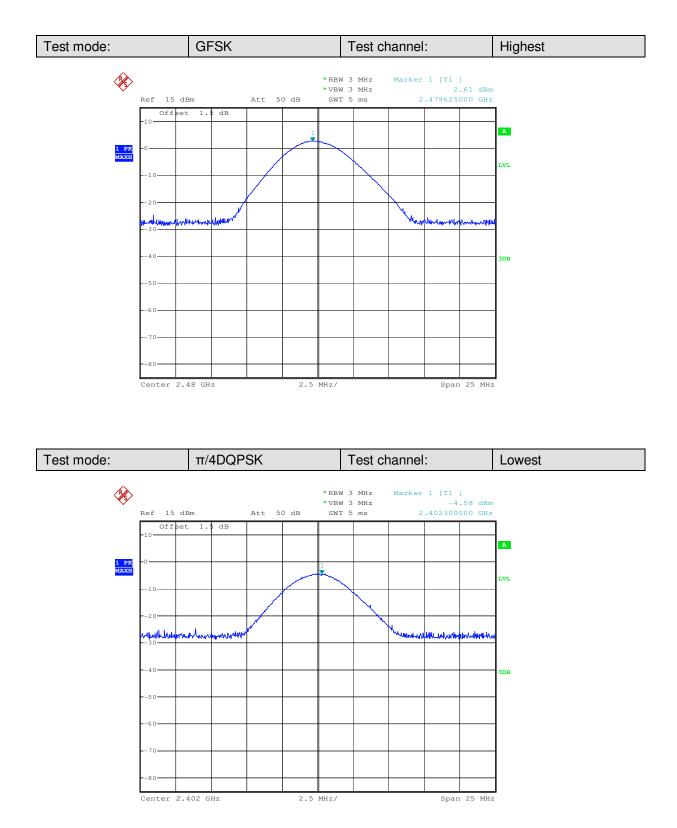




Report No.: SZEM151100738301 Page: 21 of 92

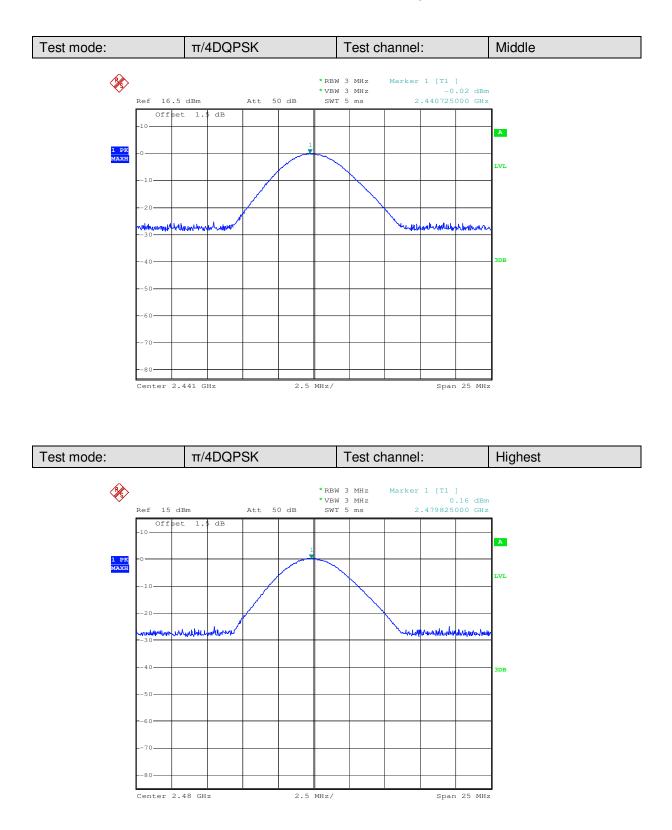




Report No.: SZEM151100738301 Page: 22 of 92

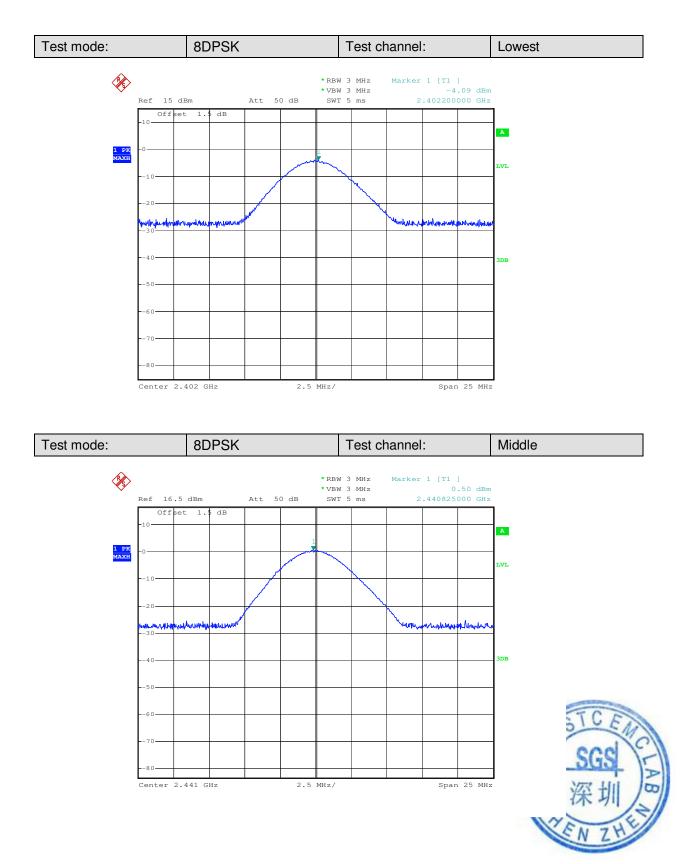



Report No.: SZEM151100738301 Page: 23 of 92

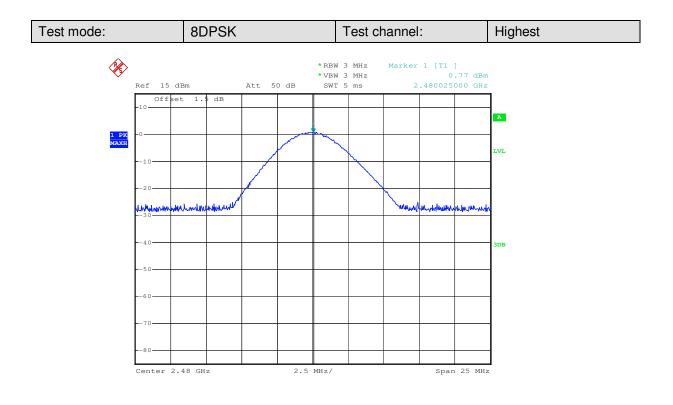



Report No.: SZEM151100738301 Page: 24 of 92

6.4 20dB Occupy Bandwidth


Test Requirement:	47 CFR Part 15C Section 15.247 (a)(1)			
Test Method:	ANSI C63.10:2013			
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane			
Limit:	NA			
Exploratory Test Mode:	Non-hopping transmitting with all kind of modulation and all kind of data type			
Final Test Mode:	Through Pre-scan, find the DH1 of data type is the worst case of GFSK modulation type, 2-DH1 of data type is the worst case of $\pi/4DQPSK$ modulation type, 3-DH1 of data type is the worst case of 8DPSK modulation type.			
Instruments Used:	Refer to section 5.10 for details			
Test Results:	Pass			

Measurement Data

Test channel	20dB Occupy Bandwidth (kHz)		
	GFSK	π/4DQPSK	8DPSK
Lowest	915	1221	1215
Middle	855	1224	1215
Highest	894	1224	1215




Report No.: SZEM151100738301 Page: 25 of 92

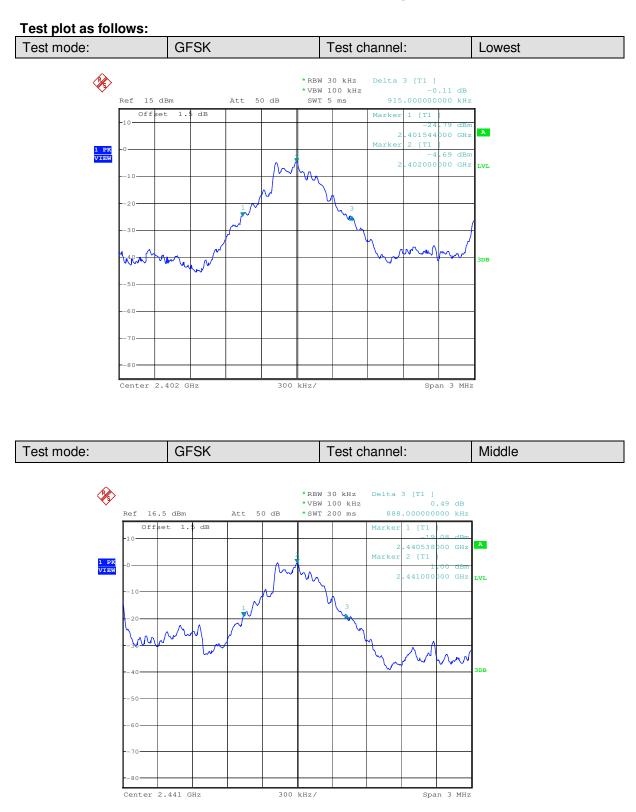




Report No.: SZEM151100738301 Page: 26 of 92

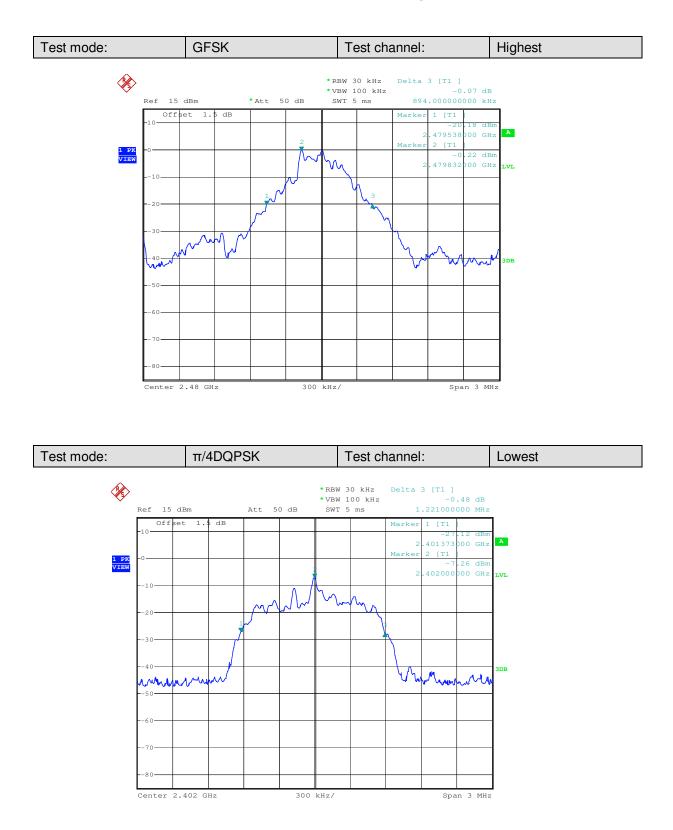



Report No.: SZEM151100738301 Page: 27 of 92

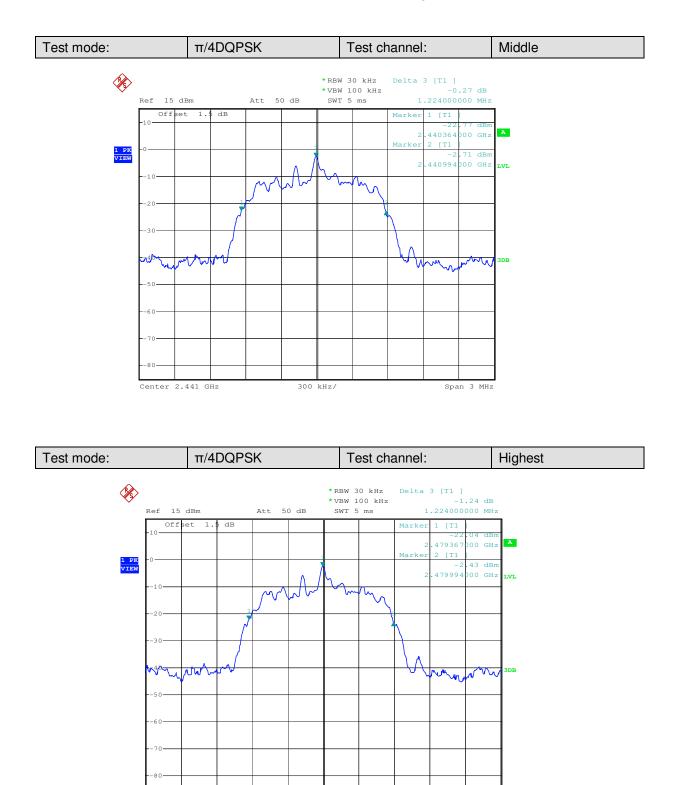

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."


300 kHz/


Span 3 MHz

Center 2.48 GHz




Report No.: SZEM151100738301 Page: 28 of 92

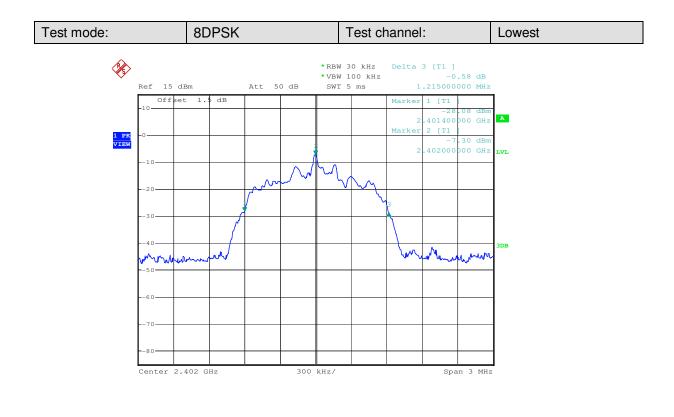

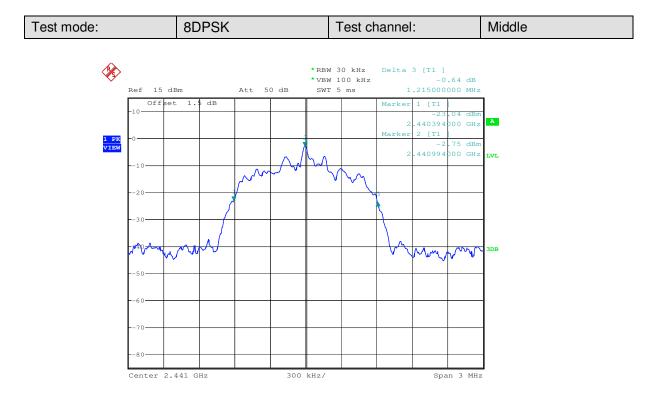



Report No.: SZEM151100738301 Page: 29 of 92

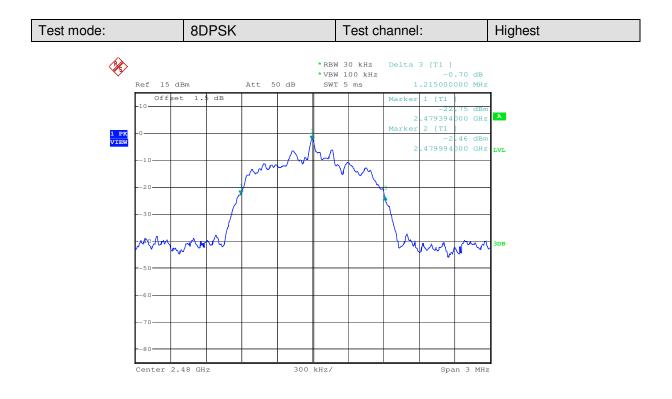



Report No.: SZEM151100738301 Page: 30 of 92

Test Requirement:	47 CFR Part 15C Section 15.247 (a)(1)		
Test Method:	ANSI C63.10:2013		
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane		
Limit:	2/3 of the 20dB bandwidth		
	Remark: the transmission power is less than 0.125W.		
Exploratory Test Mode:	Hopping transmitting with all kind of modulation and all kind of data type		
Final Test Mode:	Through Pre-scan, find the DH1 of data type is the worst case of GFSK modulation type, 2-DH1 of data type is the worst case of π /4DQPSK modulation type, 3-DH1 of data type is the worst case of 8DPSK modulation type.		
Instruments Used:	Refer to section 5.10 for details		
Test Results:	Pass		

6.5 Carrier Frequencies Separation

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM151100738301 Page: 31 of 92


Measurement Data				
GFSK mode				
Test channel	Carrier Frequencies Separation (kHz)	Limit (kHz)	Result	
Lowest	987	≥610	Pass	
π/4DQPSK mode				
Test channel	Carrier Frequencies Separation (kHz)	Limit (kHz)	Result	
Lowest	1002	≥816	Pass	
8DPSK mode				
Test channel	Carrier Frequencies Separation (kHz)	Limit (kHz)	Result	
Lowest	1032	≥810	Pass	

Note: According to section 6.4,

Mode	20dB bandwidth (kHz) (worse case)	Limit (kHz) (Carrier Frequencies Separation)
GFSK	915	610
π/4DQPSK	1224	816
8DPSK	1215	810




Report No.: SZEM151100738301 Page: 32 of 92

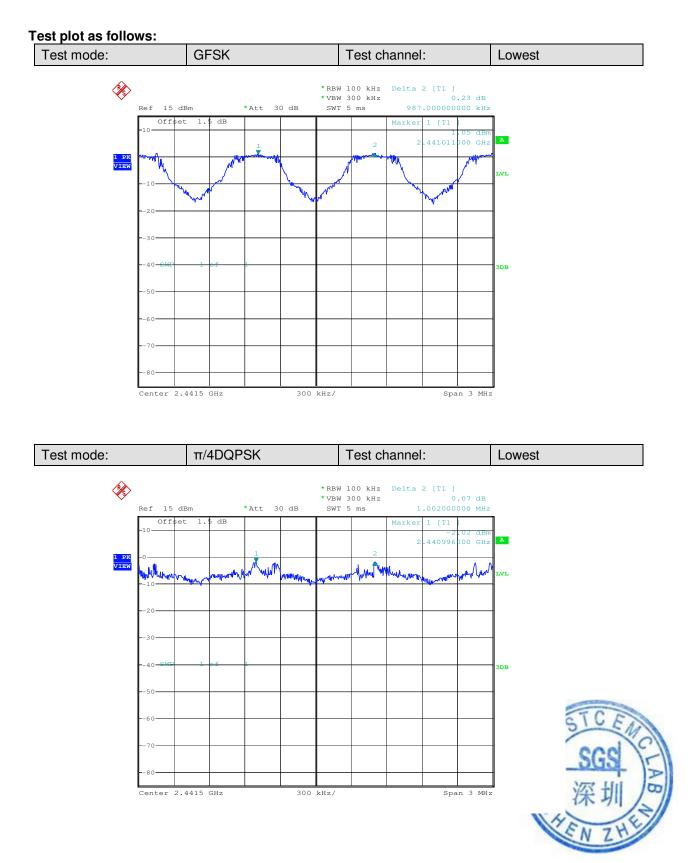



Report No.: SZEM151100738301 Page: 33 of 92

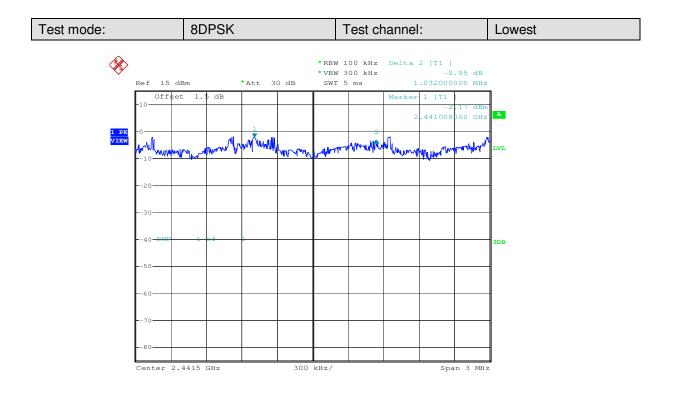



Report No.: SZEM151100738301 Page: 34 of 92

47 CFR Part 15C Section 15.247 (a)(1) **Test Requirement:** ANSI C63.10:2013 Test Method: Test Setup: Spectrum Analyzer E.U.T ----Non-Conducted Table Ground Reference Plane At least 15 channels Limit: Test Mode: Hopping transmitting with all kind of modulation Instruments Used: Refer to section 5.10 for details **Test Results:** Pass

6.6 Hopping Channel Number


Measurement Data

Mode	Hopping channel numbers	Limit
GFSK	79	≥15
π/4DQPSK	79	≥15
8DPSK	79	≥15

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."




Report No.: SZEM151100738301 Page: 35 of 92

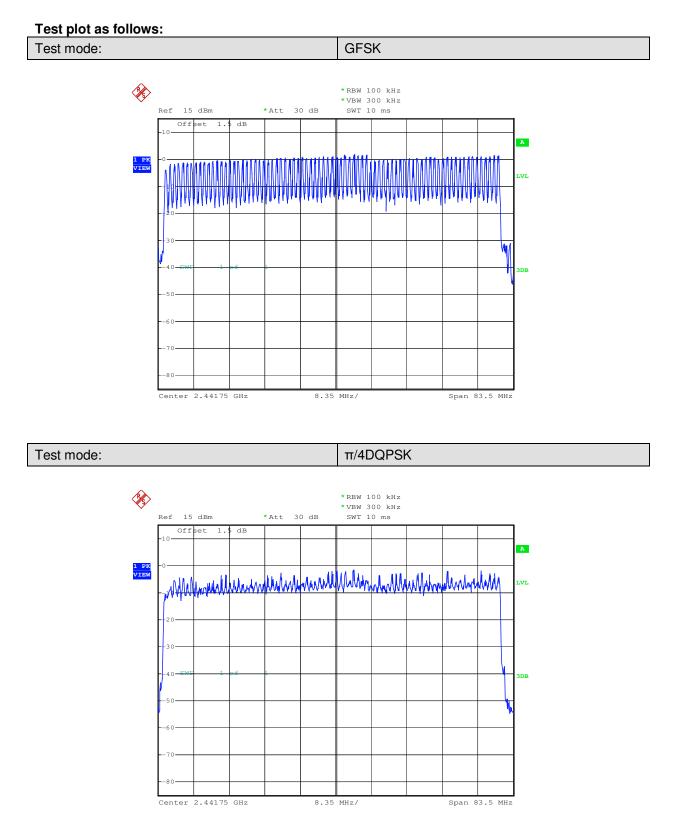



Report No.: SZEM151100738301 Page: 36 of 92

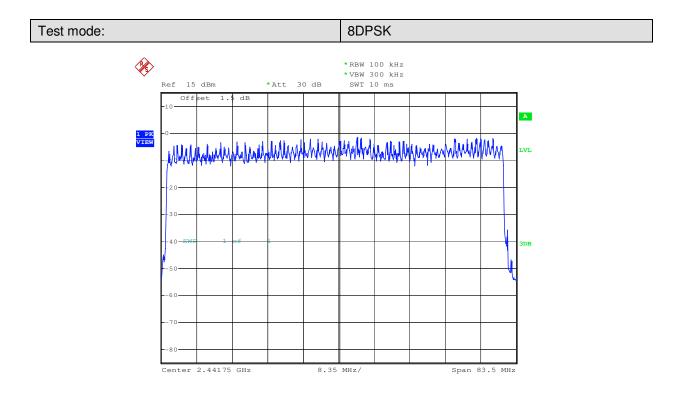



Report No.: SZEM151100738301 Page: 37 of 92

6.7 Dwell Time

Test Requirement:	47 CFR Part 15C Section 15.247 (a)(1)			
Test Method:	ANSI C63.10:2013			
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table			
	Ground Reference Plane			
Instruments Used:	Refer to section 5.10 for details			
Test Mode:	Hopping transmitting with all kind of modulation and all kind of data type.			
Limit:	0.4 Second			
Test Results:	Pass			

Measurement Data

Mode	Packet	Dwell time (second)	Limit (second)
	DH1	0.13	0.4
GFSK	DH3	0.27	0.4
	DH5	0.32	0.4
	2-DH1	0.13	0.4
π/4DQPSK	2-DH3	0.27	0.4
	2-DH5	0.32	0.4
	3-DH1	0.14	0.4
8DPSK	3-DH3	0.27	0.4
	3-DH5	0.32	0.4




Report No.: SZEM151100738301 Page: 38 of 92

Remark:

The test period: T= 0.4 Second/Channel x 79 Channel = 31.6 s On (ms)*total number=dwell time (ms) The lowest channel (2402MHz), as below: DH1 time slot=0.410 (ms)*total number=131.20 (ms) DH3 time slot=1.671 (ms)* total number = 267.36 (ms) DH5 time slot=2.928 (ms)* total number = 322.08 (ms) 2-DH1 time slot=0.421 (ms)*total number=134.72 (ms) 2-DH3 time slot=1.680 (ms)* total number = 268.80 (ms) 2-DH5 time slot=2.932 (ms)* total number = 322.52 (ms) 3-DH1 time slot=0.439 (ms)* total number = 270.24 (ms) 3-DH5 time slot=2.932 (ms)* total number = 322.52 (ms)




Report No.: SZEM151100738301 Page: 39 of 92

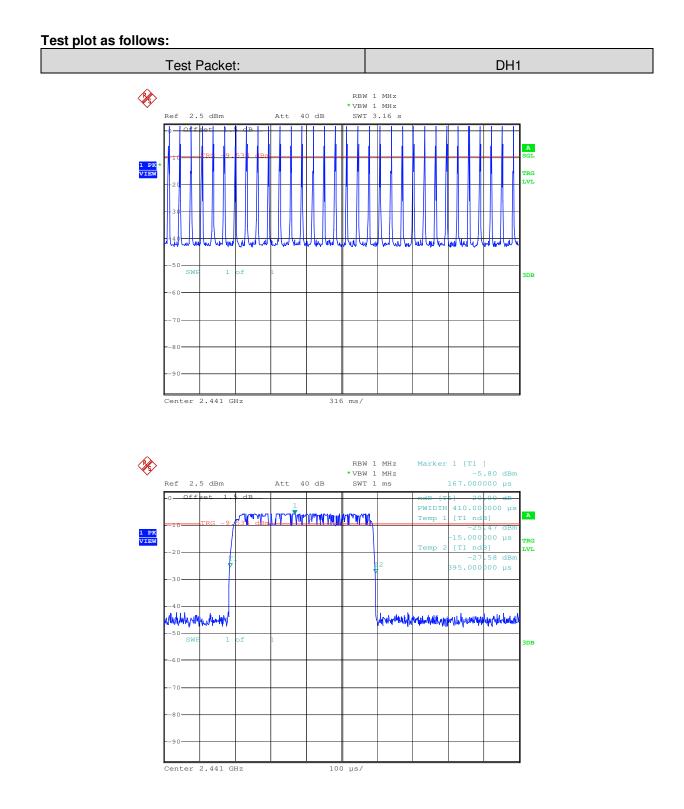




Report No.: SZEM151100738301 Page: 40 of 92

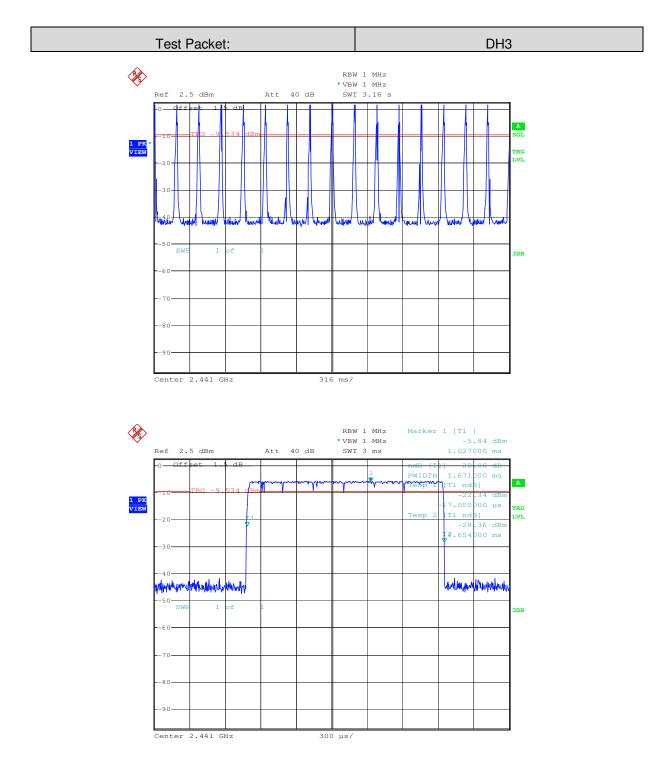




Report No.: SZEM151100738301 Page: 41 of 92

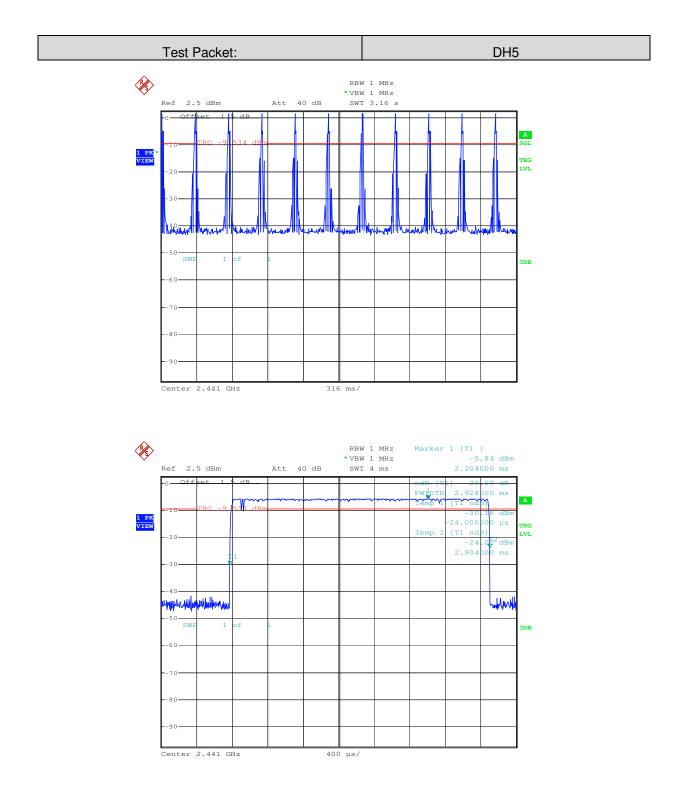




Report No.: SZEM151100738301 Page: 42 of 92

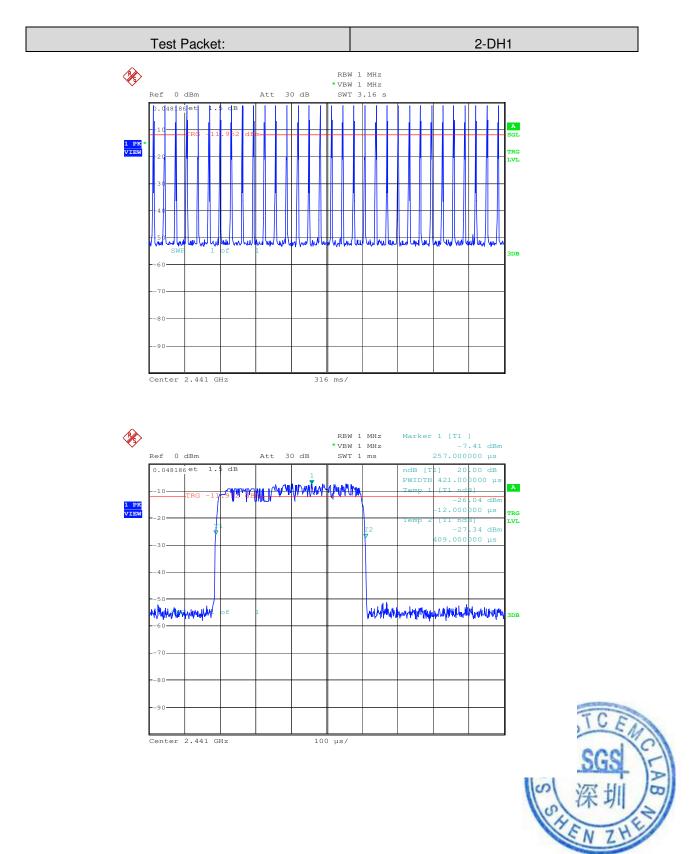




Report No.: SZEM151100738301 Page: 43 of 92

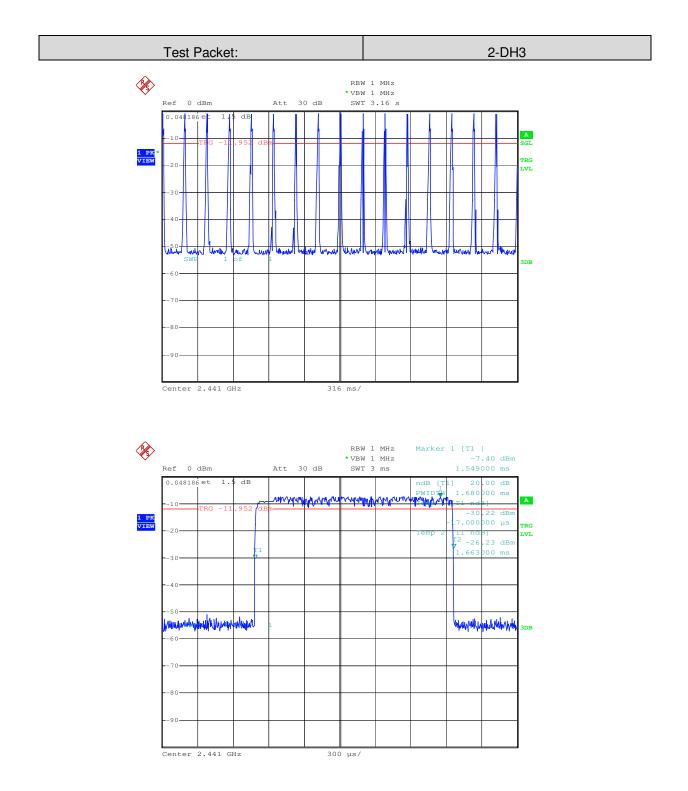




Report No.: SZEM151100738301 Page: 44 of 92

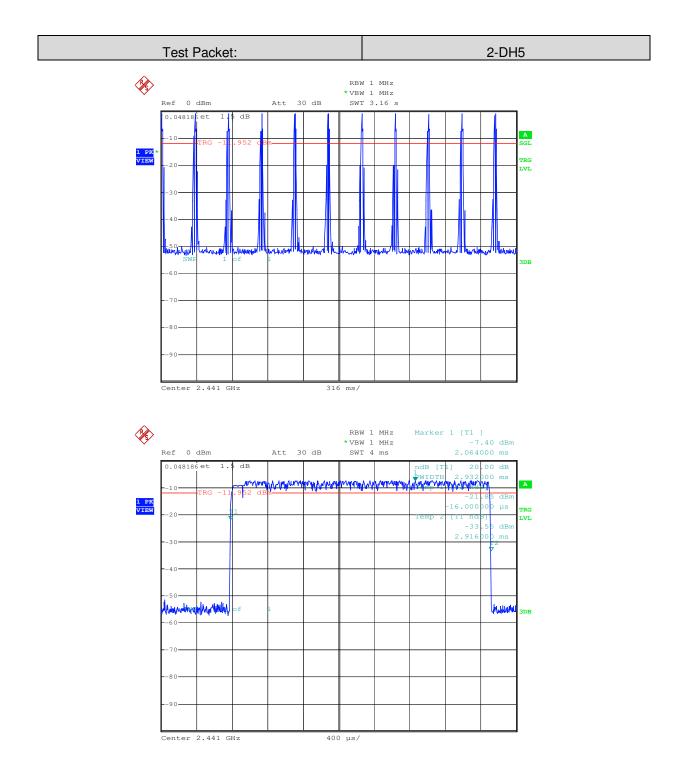




Report No.: SZEM151100738301 Page: 45 of 92

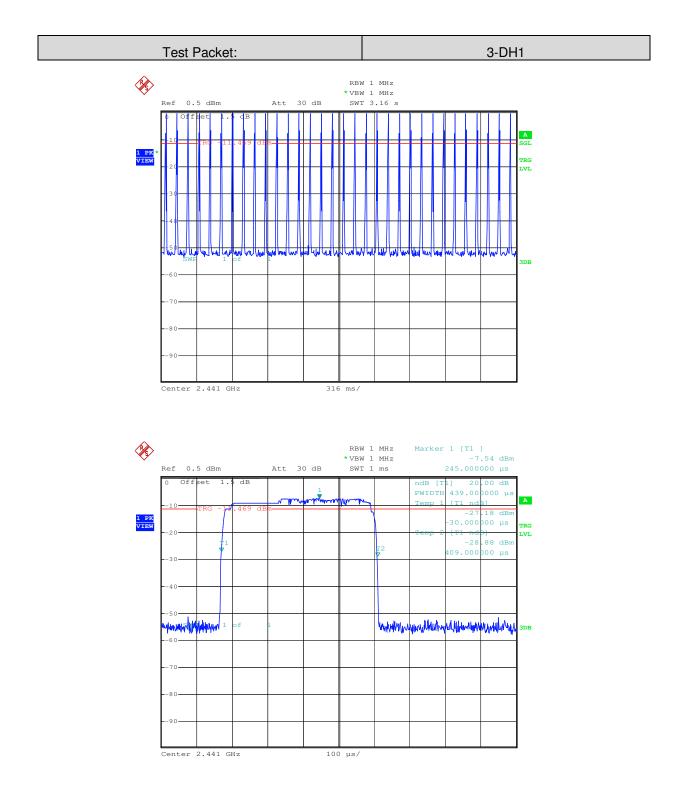




Report No.: SZEM151100738301 Page: 46 of 92

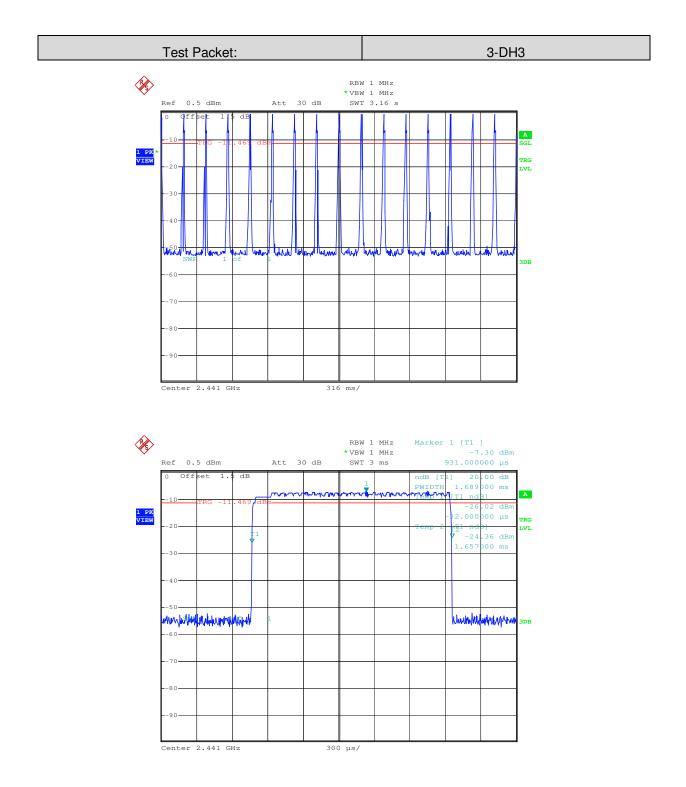



Report No.: SZEM151100738301 Page: 47 of 92

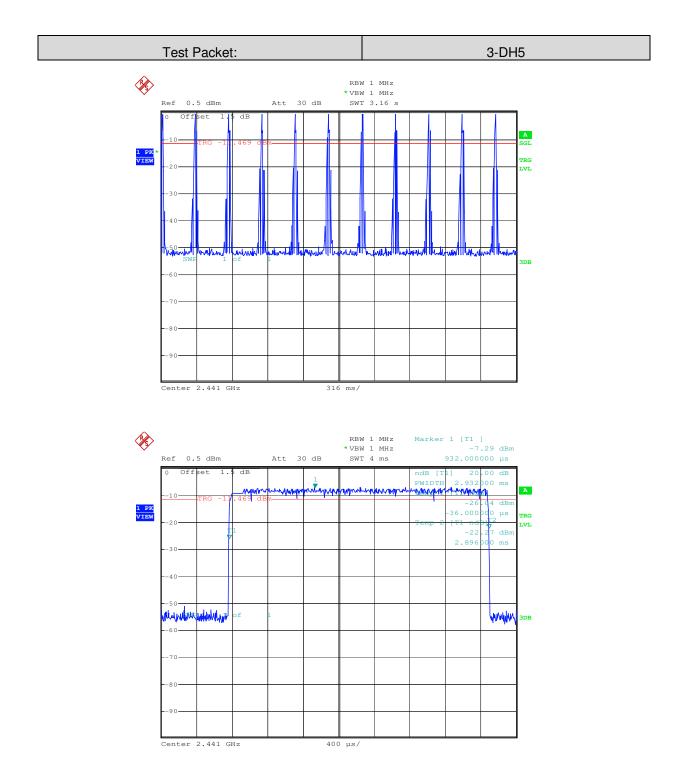



Report No.: SZEM151100738301 Page: 48 of 92


Test Requirement:	47 CFR Part 15C Section 15.247 (d)
Test Method:	ANSI C63.10:2013
Test Setup:	Spectrum Analyzer E-U-T Non-Conducted Table Ground Reference Plane
	Remark: Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Exploratory Test Mode:	Hopping and Non-hopping transmitting with all kind of modulation and all kind of data type
Final Test Mode:	Through Pre-scan, find the DH1 of data type is the worst case of GFSK modulation type, 2-DH1 of data type is the worst case of π /4DQPSK modulation type, 3-DH1 of data type is the worst case of 8DPSK modulation type.
Instruments Used:	Refer to section 5.10 for details
Test Results:	Pass

6.8 Band-edge for RF Conducted Emissions

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."




Report No.: SZEM151100738301 Page: 49 of 92

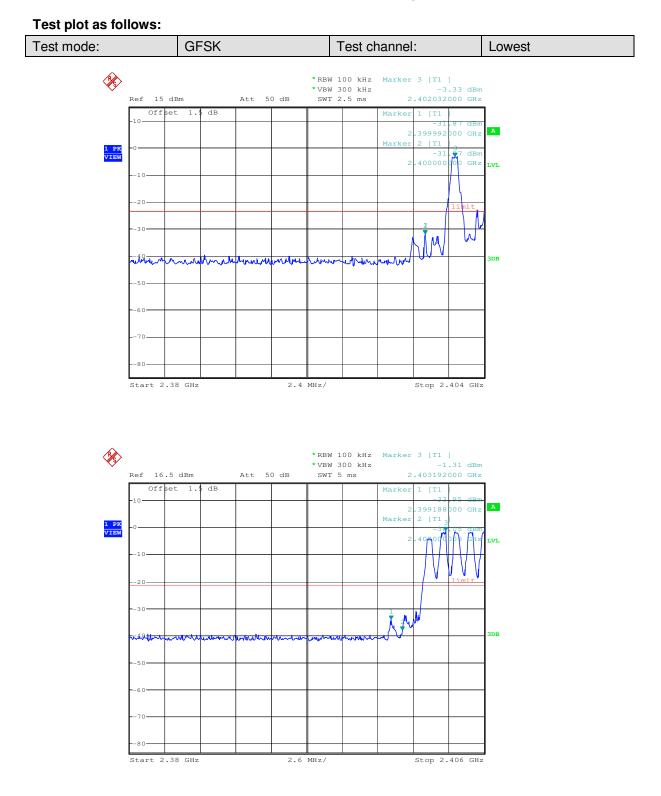




Report No.: SZEM151100738301 Page: 50 of 92

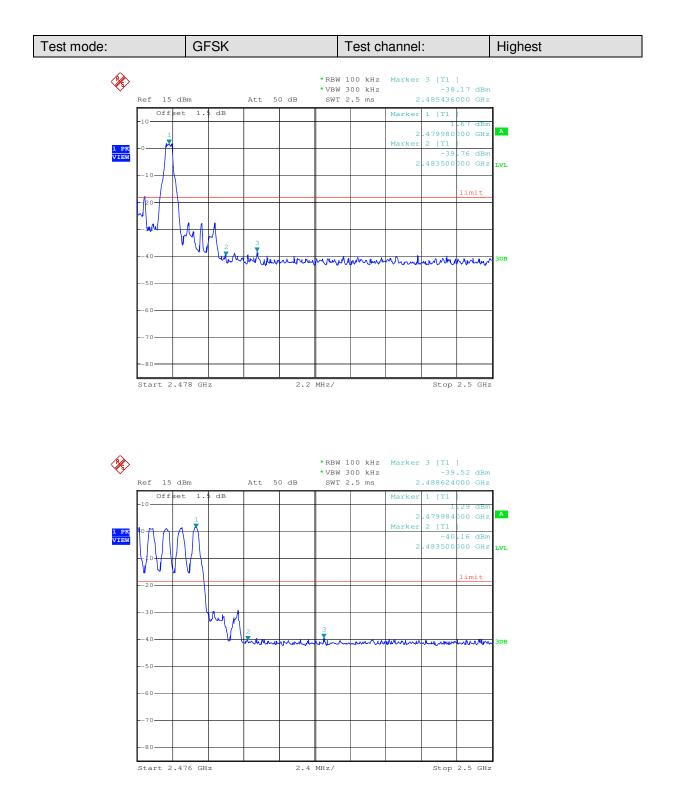




Report No.: SZEM151100738301 Page: 51 of 92

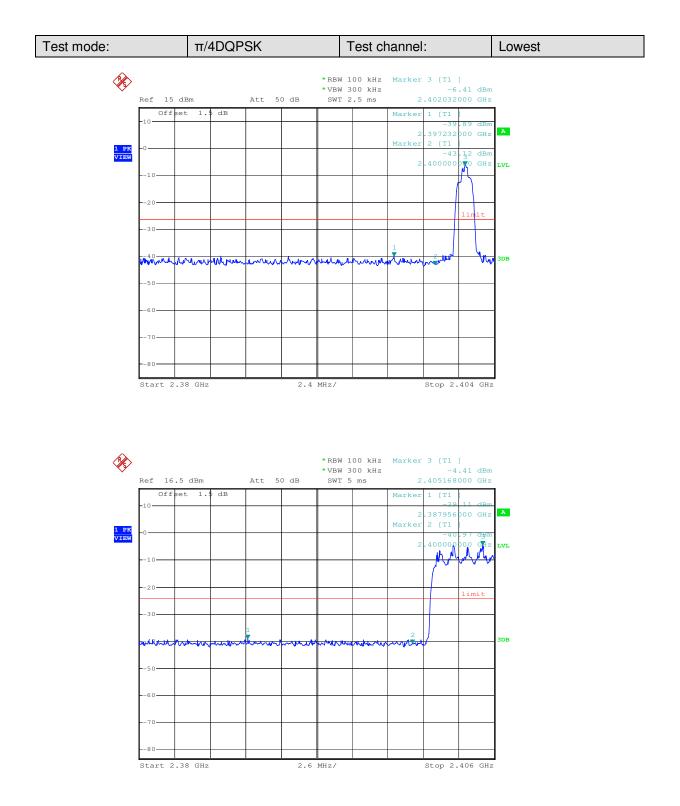

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."




Report No.: SZEM151100738301 Page: 52 of 92

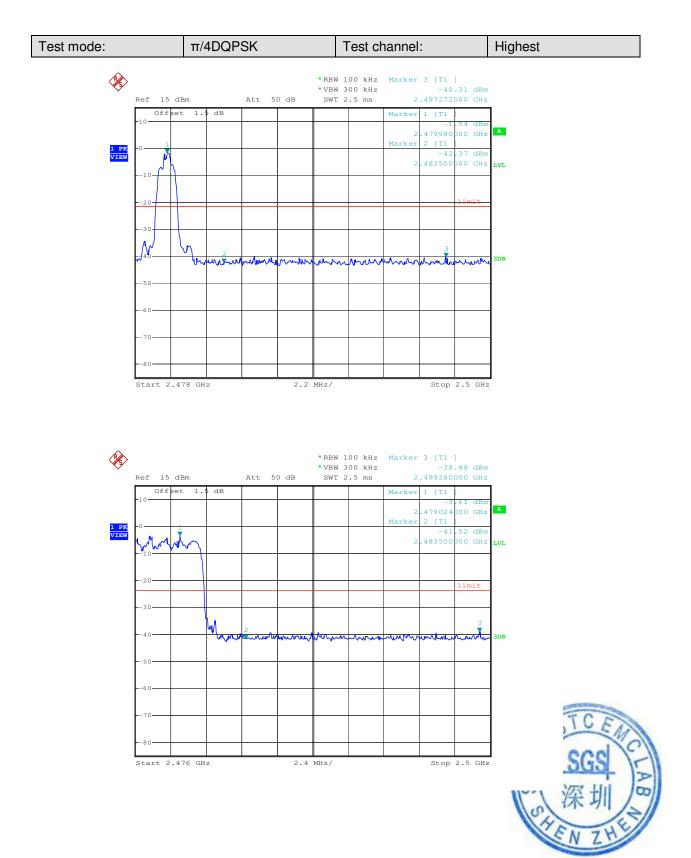




Report No.: SZEM151100738301 Page: 53 of 92

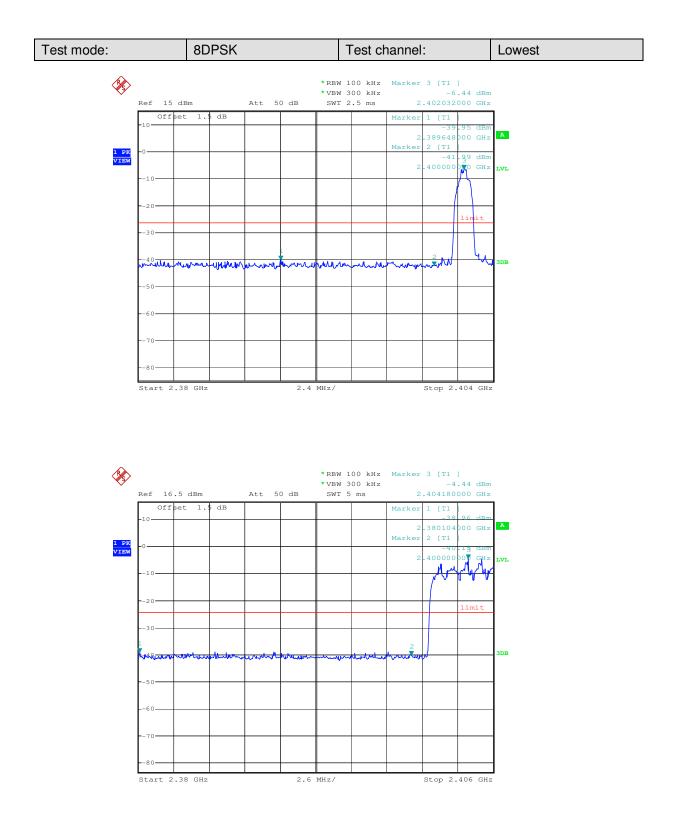



Report No.: SZEM151100738301 Page: 54 of 92

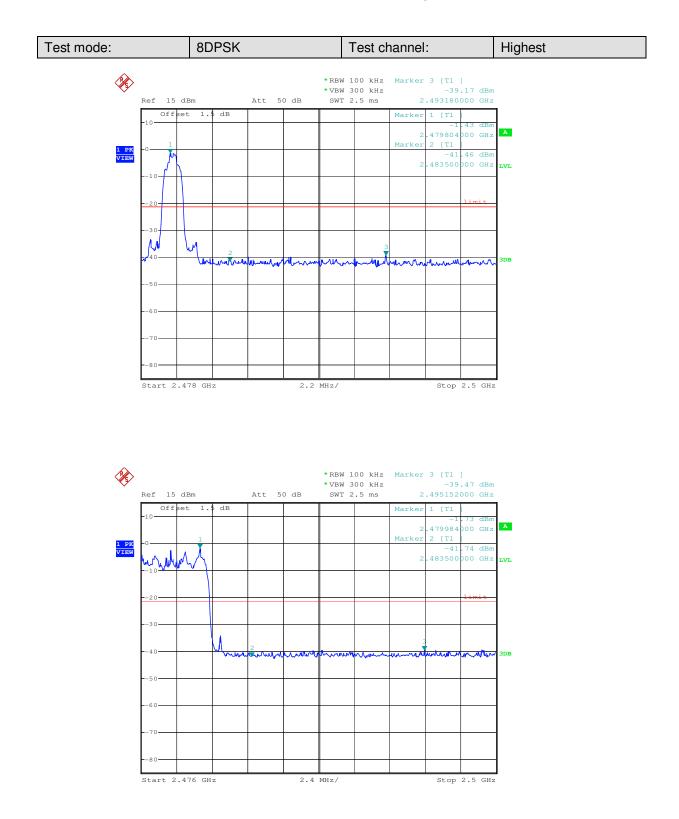



Report No.: SZEM151100738301 Page: 55 of 92

6.9 Spurious RF Conducted Emissions


Test Requirement:	47 CFR Part 15C Section 15.247 (d)		
Test Method:	ANSI C63.10:2013		
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane		
	Remark: Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.		
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.		
Exploratory Test Mode:	Non-hopping transmitting with all kind of modulation and all kind of data type		
Final Test Mode:	Through Pre-scan, find the DH1 of data type is the worst case of GFSK modulation type, 2-DH1 of data type is the worst case of $\pi/4DQPSK$ modulation type, 3-DH1 of data type is the worst case of 8DPSK modulation type.		
Instruments Used:	Refer to section 5.10 for details		
Test Results:	Pass		

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."




Report No.: SZEM151100738301 Page: 56 of 92

Test plot as follows:

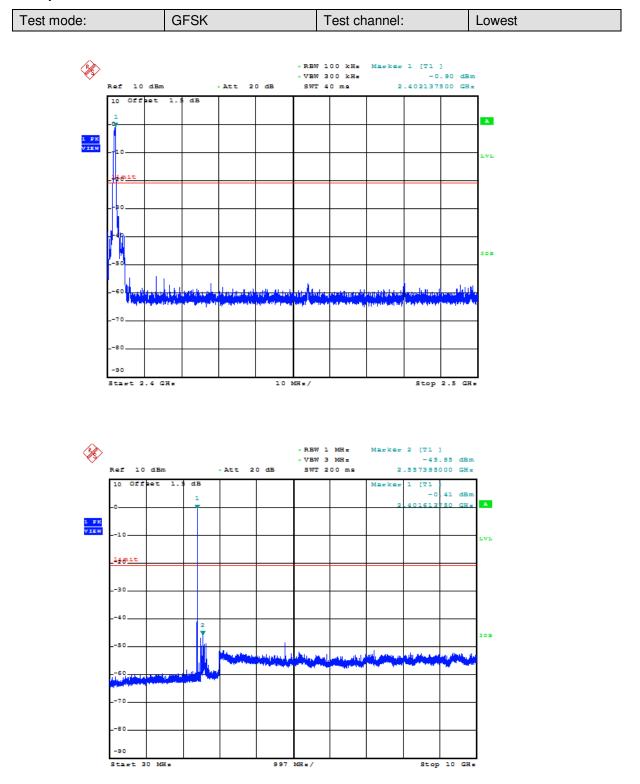




Report No.: SZEM151100738301 Page: 57 of 92

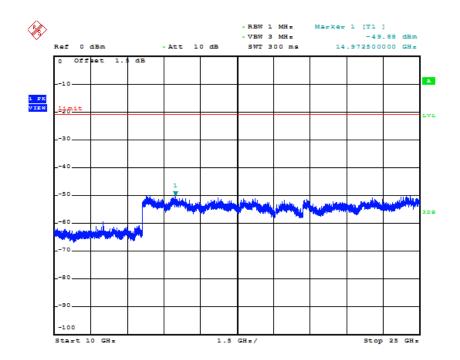




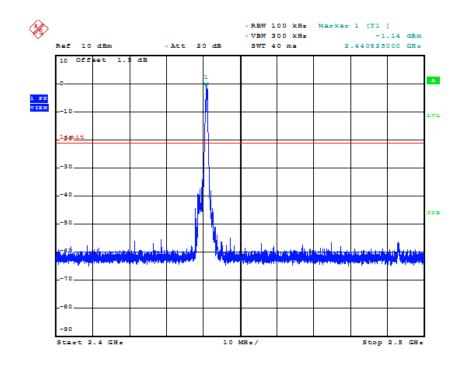




Report No.: SZEM151100738301 Page: 58 of 92

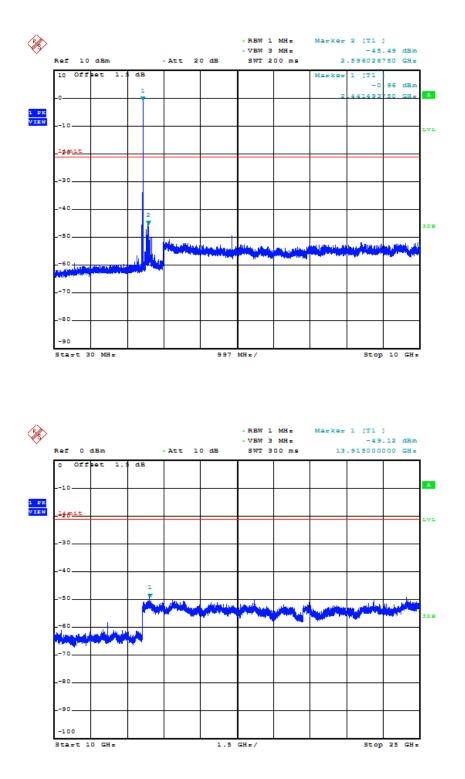




Report No.: SZEM151100738301 Page: 59 of 92

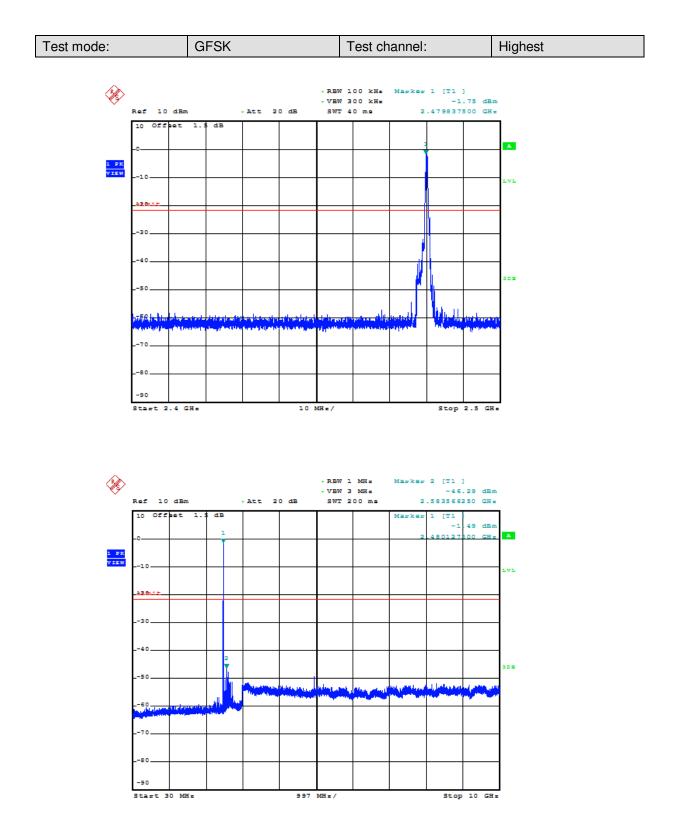




Report No.: SZEM151100738301 Page: 60 of 92

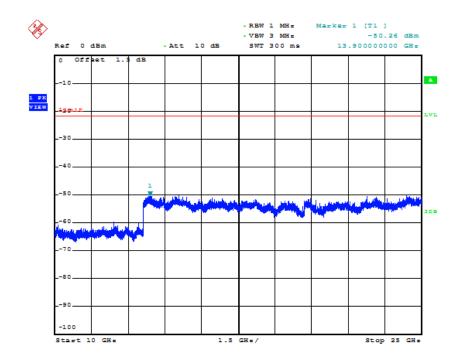


Test mode:	π/4DQPSK	Test channel:	Lowest

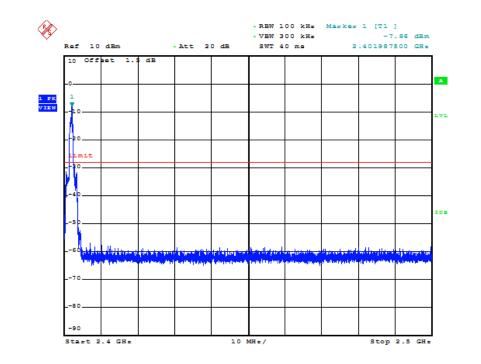




Report No.: SZEM151100738301 Page: 61 of 92

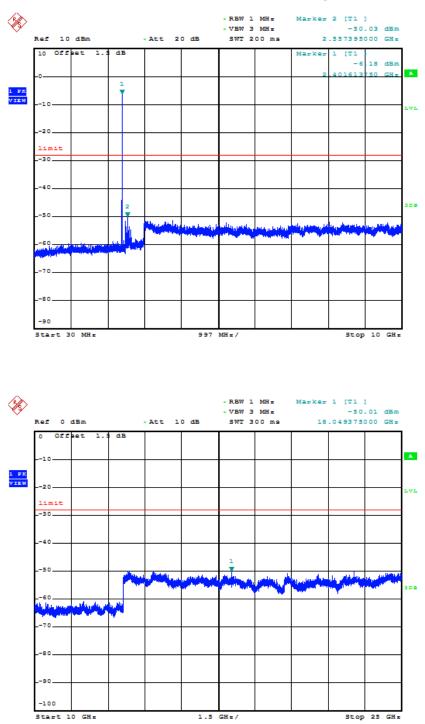




Report No.: SZEM151100738301 Page: 62 of 92

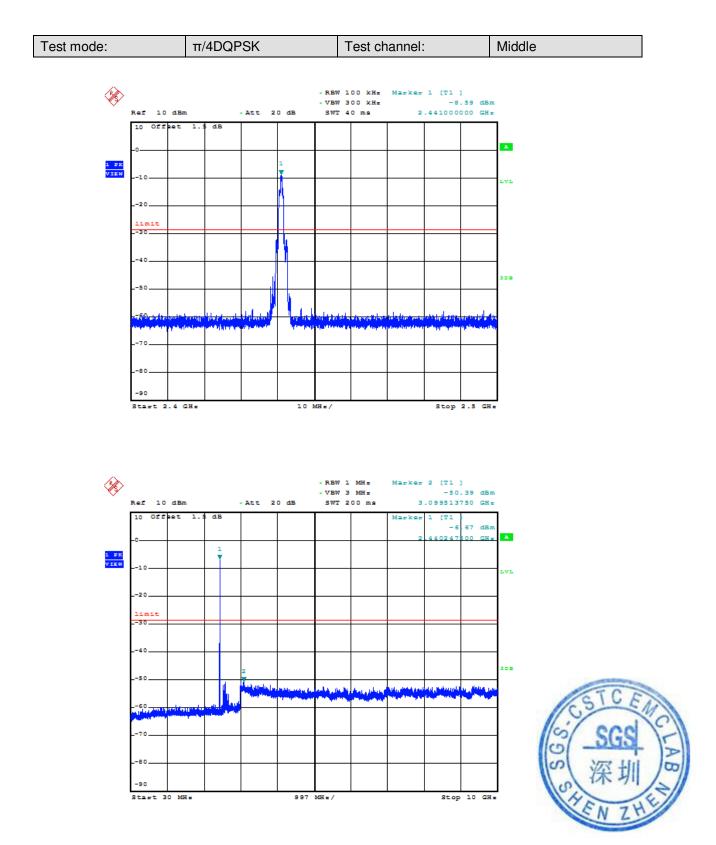




Report No.: SZEM151100738301 Page: 63 of 92

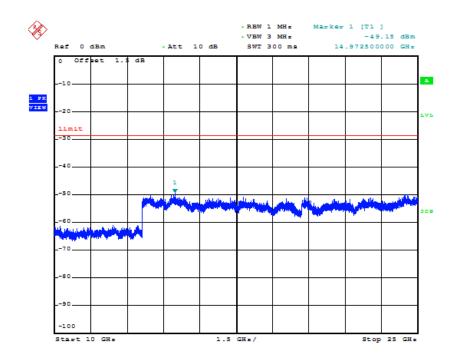


Test mode:	π/4DQPSK	Test channel:	Highest

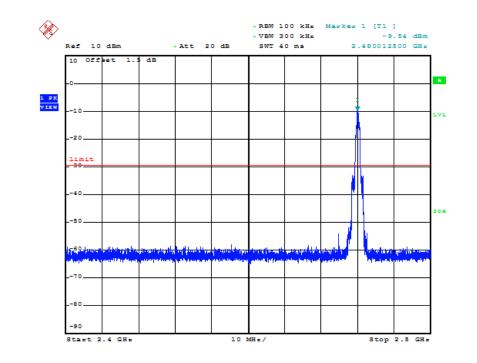




Report No.: SZEM151100738301 Page: 64 of 92

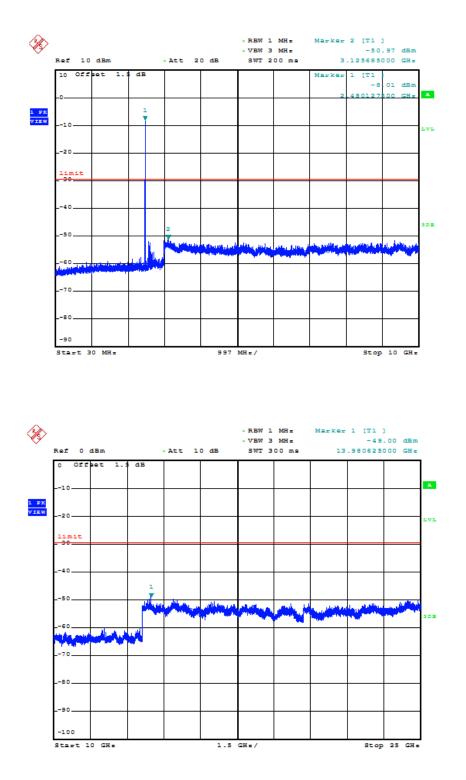




Report No.: SZEM151100738301 Page: 65 of 92

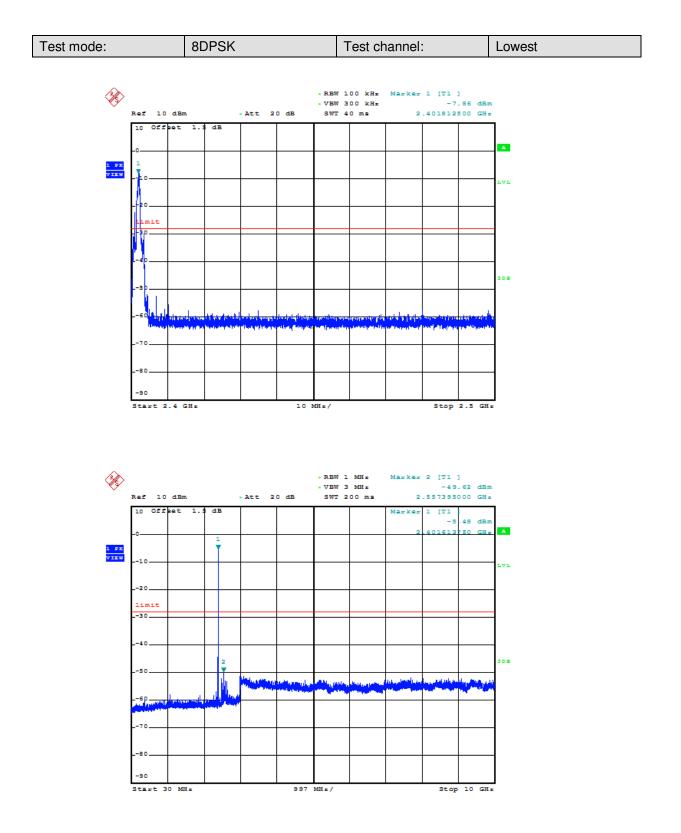




Report No.: SZEM151100738301 Page: 66 of 92

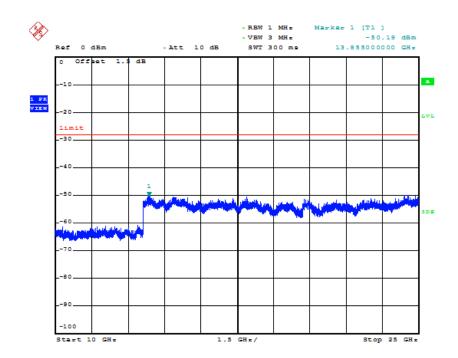




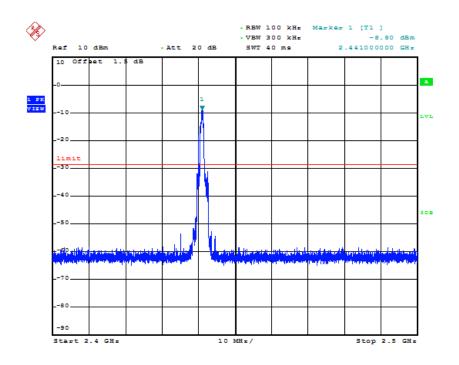




Report No.: SZEM151100738301 Page: 67 of 92

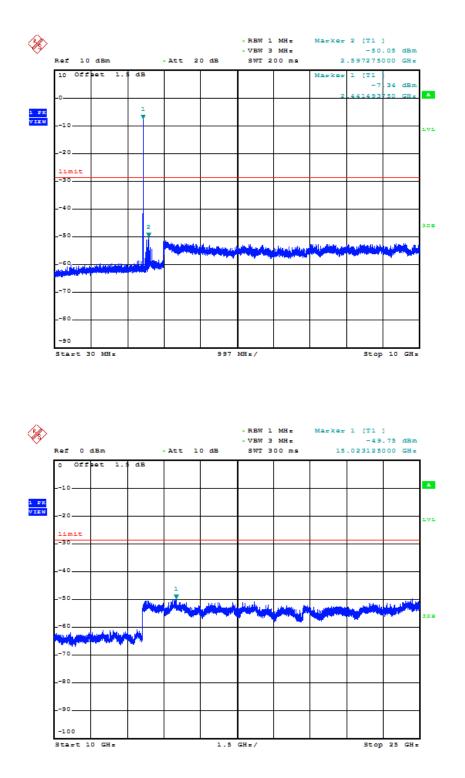




Report No.: SZEM151100738301 Page: 68 of 92

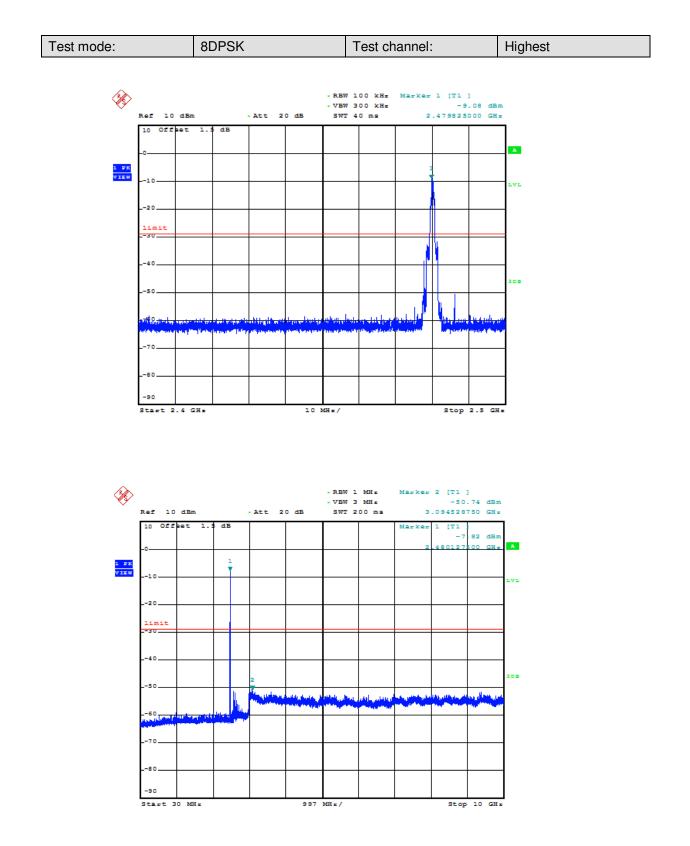



Report No.: SZEM151100738301 Page: 69 of 92

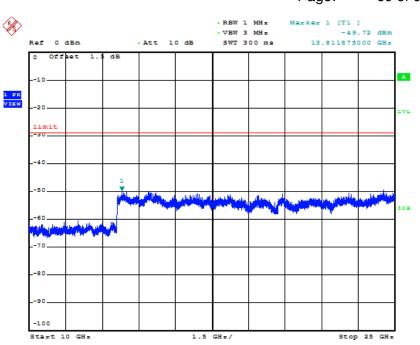

Remark:

Use 100kHz RBW to determine the relative limit in the band 2.4GHz to 2.5GHz, and Use 1MHz RBW to measure spurious emissions in the band 30MHz to 10GHz and 10GHz to 25GHz. The sweep points set to 30001

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM151100738301 Page: 70 of 92

6.10 Other requirements Frequency Hopping Spread Spectrum System

The system shall hop to ch			
on the average by each tra	annel frequencies that are selected at the system hopping ordered list of hopping frequencies. Each frequency must be used equally insmitter. The system receivers shall have input bandwidths that match the ns of their corresponding transmitters and shall shift frequencies in ansmitted signals.		
Frequency hopping spread spectrum systems are not required to employ all available hopping channels during each transmission. However, the system, consisting of both the transmitter and the receiver, must be designed to comply with all of the regulations in this section should the transmitter be presented with a continuous data (or information) stream. In addition, a system employing short transmission bursts must comply with the definition of a frequency hopping system and must distribute its transmissions over the minimum number of hopping channels specified in this section.			
the system to recognize of independently chooses and The coordination of frequen	gence within a frequency hopping spread spectrum system that permits her users within the spectrum band so that it individually and d adapts its hopsets to avoid hopping on occupied channels is permitted. ncy hopping systems in any other manner for the express purpose of occupancy of individual hopping frequencies by multiple transmitters is		
Compliance for section 1	5.247(a)(1)		
stage. The sequence begin with nine ones.Number of shift register statements.	dulo-two addition stage. And the result is fed back to the input of the first as with the first ONE of 9 consecutive ONEs; i.e. the shift register is initialized tages: 9 a sequence: $2^9 - 1 = 511$ bits		
	Shift Register for Generation of the PRBS sequence for Frequency Hopping Sequence as follow: 7 64 8 73 16 75 1		
Each frequency used equa	lly on the average by each transmitter.		



Report No.: SZEM151100738301 Page: 71 of 92

Compliance for section 15.247(g)

According to Bluetooth Core Specification, the Bluetooth system transmits the packet with the pseudorandom hopping frequency with a continuous data and the short burst transmission from the Bluetooth system is also transmitted under the frequency hopping system with the pseudorandom hopping frequency system.

Compliance for section 15.247(h)

According to Bluetooth Core specification, the Bluetooth system incorporates with an adaptive system to detect other user within the spectrum band so that it individually and independently to avoid hopping on the occupied channels.

According to the Bluetooth Core specification, the Bluetooth system is designed not have the ability to coordinated with other FHSS System in an effort to avoid the simultaneous occupancy of individual hopping frequencies by multiple transmitter.



Report No.: SZEM151100738301 Page: 72 of 92


Test Requirement:	47 CFR Part 15C Secti	on 1	5.209 and 15.	205			
Test Method:	ANSI C63.10: 2013						
Test Site:	Measurement Distance: 10m (Semi-Anechoic Chamber) and 3m (Fully-Anechoic Chamber)						
Receiver Setup:	Frequency		Detector	RBW	VBW	Remark	
	0.009MHz-0.090MH	z	Peak	10kHz	z 30kHz	Peak	
	0.009MHz-0.090MH	z	Average	10kHz	z 30kHz	Average	
	0.090MHz-0.110MH	z	Quasi-peak	10kHz	z 30kHz	Quasi-peak	
	0.110MHz-0.490MH	z	Peak	10kHz	z 30kHz	Peak	
	0.110MHz-0.490MH	z	Average	10kHz	z 30kHz	Average	
	0.490MHz -30MHz		Quasi-peak	10kHz	z 30kHz	Quasi-peak	
	30MHz-1GHz		Quasi-peak	100 kH	lz 300kHz	Quasi-peak	
	Above 1GHz		Peak	1MHz	3MHz	Peak	
	Above IGH2		Peak	1MHz	z 10Hz	Average	
Limit:	Frequency		eld strength crovolt/meter)	Limit (dBuV/m)	Remark	Measureme distance (n	
	0.009MHz-0.490MHz	2	400/F(kHz)	-	-	300	
	0.490MHz-1.705MHz	0MHz-1.705MHz 24000/F(kHz)		-	-	30	
	1.705MHz-30MHz		30	-	-	30	
	30MHz-88MHz	100		29.5	Quasi-peak	10	
	88MHz-216MHz		150	33.0	Quasi-peak	10	
	216MHz-960MHz		200	35.6	Quasi-peak	10	
	960MHz-1GHz		500	44.4	Quasi-peak	10	
	Above 1GHz		500	54.0	Average	3	
	Note: 15.35(b), Unless emissions is 20dE applicable to the peak emission lev	3 ab equi	ove the maxim pment under t	num perm est. This p	itted average	emission limit	

6.11 Radiated Spurious Emission





Report No.: SZEM151100738301 Page: 73 of 92

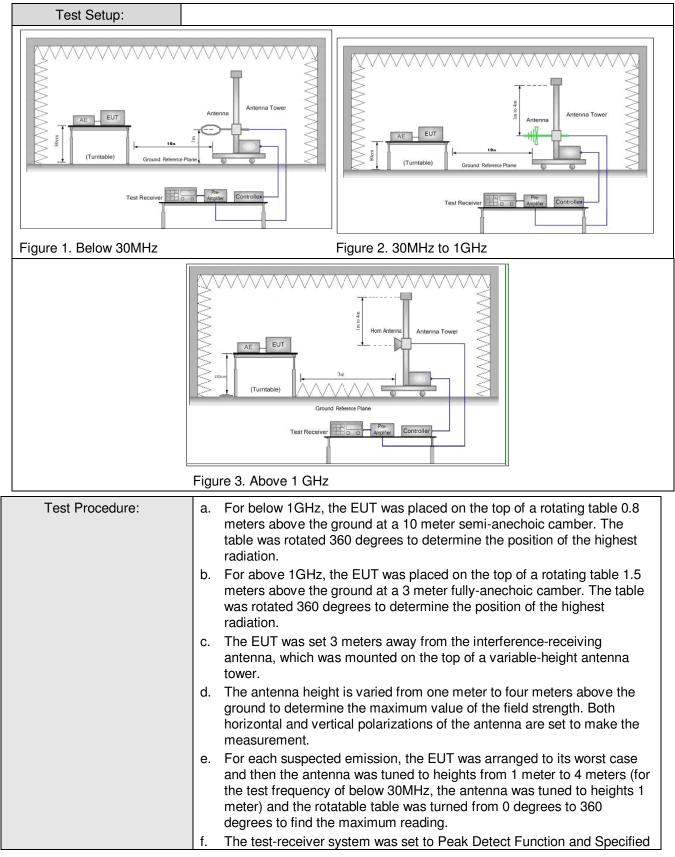



Report No.: SZEM151100738301 Page: 74 of 92

	Bandwidth with Maximum Hold Mode.
	g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
	 h. Test the EUT in the lowest channel (2402MHz), the middle channel (2441MHz), the Highest channel (2480MHz)
	i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
	j. Repeat above procedures until all frequencies measured was complete.
Exploratory Test Mode:	Non-hopping transmitting mode with all kind of modulation and all kind of
	data type
	Transmitting mode, Charge + Transmitting mode.
Final Test Mode:	Through Pre-scan, find the DH1 of data type and GFSK modulation is the worst case.
	Pretest the EUT at Transmitting mode and Charge + Transmitting mode, found the Charge + Transmitting mode which it is worse case
	For below 1GHz part, through pre-scan, the worst case is the lowest channel.
	Only the worst case is recorded in the report.
Instruments Used:	Refer to section 5.10 for details
Test Results:	Pass


[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM151100738301 Page: 75 of 92

6.11.1 Radiated Emission below 1GHz

30MHz~1GHz (QP)		
Test mode:	Transmitting	Vertical

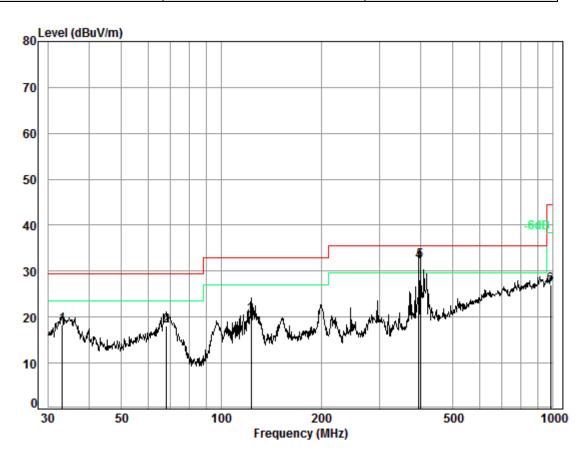


Condition: 10m Vertical Job No. : 7383CR

	Freq			Preamp Factor				Over Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 2 3 4 ! 5 pp 6	33.09 68.39 122.83 394.85 399.03 986.07	6.93 7.32 8.30	10.77 11.43 15.20	32.97 32.91 32.77 32.60 32.60 32.50	33.25 34.29 41.12 41.30	18.04 20.27 32.02 32.28	29.50 33.00 35.60	-11.46 -12.73 -3.58 -3.32



Report No.: SZEM151100738301 Page: 76 of 92

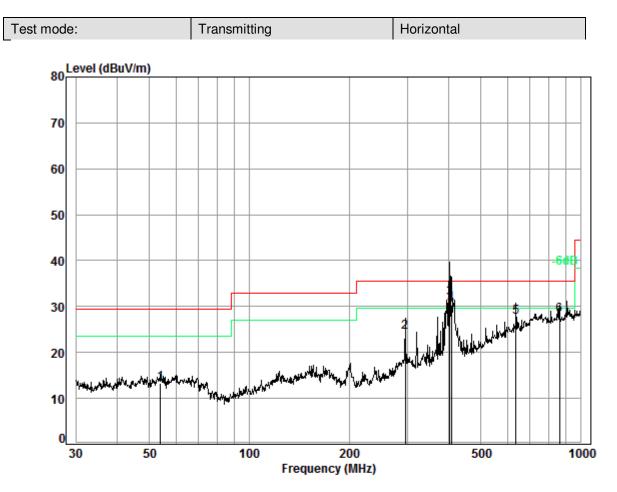

Condition: 10m Horizontal Job No. : 7383CR

	Freq			Preamp Factor				Over Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
3 pp 4 4 ! 4 5 6	53.88 295.15 403.25 407.51 638.37 863.06	8.31 8.32 9.00	12.71 15.33 15.38 20.43	32.98 32.60 32.60 32.60 32.60 32.54	36.35 40.73 39.27 30.95	24.50 31.77 30.37 27.78	35.60 35.60 35.60 35.60	-11.10 -3.83 -5.23 -7.82



Report No.: SZEM151100738301 Page: 77 of 92

Worse case r	mode: C	GFSK(DH1)	Test	channel:	Lowest	Rema	ırk:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
3641.878	32.27	7.68	38.42	44.76	46.29	74	-27.71	Vertical
4804.000	34.10	8.87	38.75	44.96	49.18	74	-24.82	Vertical
6034.386	34.72	10.52	38.91	45.23	51.56	74	-22.44	Vertical
7206.000	35.60	10.68	37.64	41.67	50.31	74	-23.69	Vertical
9608.000	37.10	12.50	36.35	36.31	49.56	74	-24.44	Vertical
12603.270	37.90	14.44	37.75	37.90	52.49	74	-21.51	Vertical
3652.432	32.31	7.69	38.43	45.04	46.61	74	-27.39	Horizontal
4804.000	34.10	8.87	38.75	49.24	53.46	74	-20.54	Horizontal
6016.949	34.71	10.54	38.94	44.67	50.98	74	-23.02	Horizontal
7206.000	35.60	10.68	37.64	42.27	50.91	74	-23.09	Horizontal
9608.000	37.10	12.50	36.35	35.27	48.52	74	-25.48	Horizontal
12566.850	37.87	14.34	37.72	38.32	52.81	74	-21.19	Horizontal

6.11.2 Transmitter Emission above 1GHz

Worse case	mode:	GFSK(DH1) Tes	t channel:	Middle	Rem	nark:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
3663.017	32.36	7.69	38.43	44.65	46.27	74	-27.73	Vertical
4882.000	34.18	8.98	38.77	44.83	49.22	74	-24.78	Vertical
6034.386	34.72	10.52	38.91	46.14	52.47	74	-21.53	Vertical
7323.000	35.54	10.72	37.59	44.73	53.40	74	-20.60	Vertical
9764.000	37.10	12.58	36.14	40.18	53.72	74	-20.28	Vertical
12566.850	37.87	14.34	37.72	37.45	51.94	74	-22.06	Vertical
3694.956	32.49	7.70	38.44	45.29	47.04	74	-26.96	Horizontal
4882.000	34.18	8.98	38.77	48.82	53.21	74	-20.79	Horizontal
6069.413	34.74	10.47	38.87	46.06	52.40	74	-21.60	Horizontal
7323.000	35.54	10.72	37.59	43.27	51.94	74	-22.06	Horizontal
9764.000	37.10	12.58	36.14	40.21	53.75	74	-20.25	Horizontal
12639.790	37.92	14.55	37.79	38.31	52.99	74	-21.01	Horizontal



Report No.: SZEM151100738301 Page: 78 of 92

Worse case	mode:	GFSK(DH1)	Tes	t channel:	Highest	Rem	ark:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
3652.432	32.31	7.69	38.43	45.30	46.87	74	-27.13	Vertical
4960.000	34.26	9.09	38.78	45.71	50.28	74	-23.72	Vertical
6104.642	34.75	10.42	38.82	44.85	51.20	74	-22.80	Vertical
7440.000	35.60	10.77	37.54	40.15	48.98	74	-25.02	Vertical
9920.000	37.22	12.67	35.93	39.36	53.32	74	-20.68	Vertical
12566.850	37.87	14.34	37.72	36.41	50.90	74	-23.10	Vertical
3641.878	32.27	7.68	38.42	45.48	47.01	74	-26.99	Horizontal
4960.000	34.26	9.09	38.78	48.66	53.23	74	-20.77	Horizontal
6122.333	34.76	10.40	38.80	45.90	52.26	74	-21.74	Horizontal
7440.000	35.60	10.77	37.54	39.53	48.36	74	-25.64	Horizontal
9920.000	37.22	12.67	35.93	38.78	52.74	74	-21.26	Horizontal
12530.530	37.83	14.24	37.68	36.77	51.16	74	-22.84	Horizontal

Remark:

1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor

- 2) Scan from 9kHz to 25GHz, the disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
- 3) As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the peak measurements were shown in the report.

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM151100738301 Page: 79 of 92

6.12 Restricted bands around fundamental frequency

Test	47 CFR Part 15C Section 15	47 CFR Part 15C Section 15.209 and 15.205						
Requirement: Test Method:	ANSI C63.10: 2013							
Test Site:	Measurement Distance: 3m	(Semi-Anechoic Chambe	er)					
Limit:	Frequency	Limit (dBuV/m @3m)	Remark					
	30MHz-88MHz	40.0	Quasi-peak Value					
	88MHz-216MHz	43.5	Quasi-peak Value					
	216MHz-960MHz	46.0	Quasi-peak Value					
	960MHz-1GHz	54.0	Quasi-peak Value					
	Above 1GHz	54.0	Average Value					
		74.0	Peak Value					
Test Setup:								
AE EUT (Turntable)	Antenna Tower		Ground Reference Plane	nna Tower				
Figure 1. 30MHz to	1GHz	Figure 2. Above 1	GHz					




Report No.: SZEM151100738301 Page: 80 of 92

Test Procedure:	 a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation. b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation. c. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. g. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel h. Test the EUT in the lowest channel , the Highest channel i. The radiation measurements are performed in X, Y, Z axis positioning which it is the worst case. j. Repeat above procedures until all frequencies measured was complete.
Exploratory Test Mode:	Non-hopping transmitting mode with all kind of modulation and all kind of
	data type
	Transmitting mode, Charge + Transmitting mode.
Final Test Mode:	Through Pre-scan, find the DH5 of data type and GFSK modulation is
	the worst case.
	Pretest the EUT at Transmitting mode and Charge + Transmitting mode,
	found the Charge + Transmitting mode which it is worse case
	Only the worst case is recorded in the report.
Instruments Used:	Refer to section 5.10 for details
Test Results:	Pass




Report No.: SZEM151100738301 Page: 81 of 92

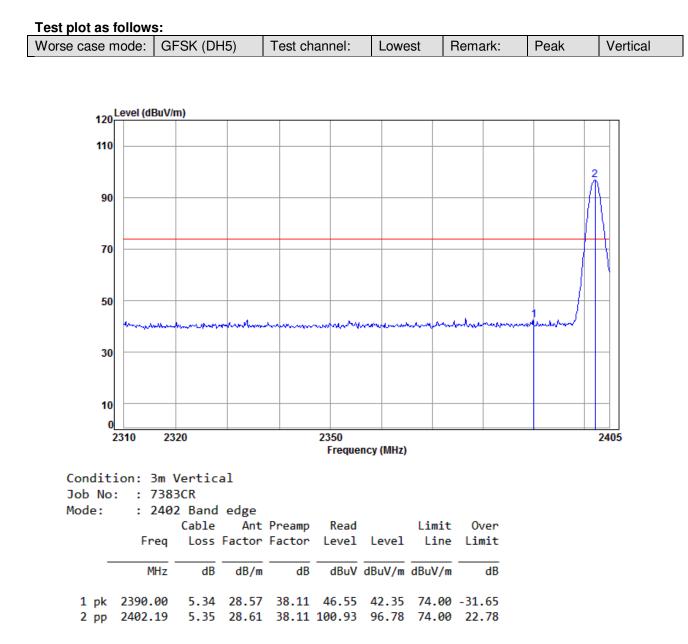



Report No.: SZEM151100738301 Page: 82 of 92

Worse case mode: GFSK	(DH5) Test channel:	Lowest F	Remark:	Peak	Horizontal
-----------------------	---------------------	----------	---------	------	------------

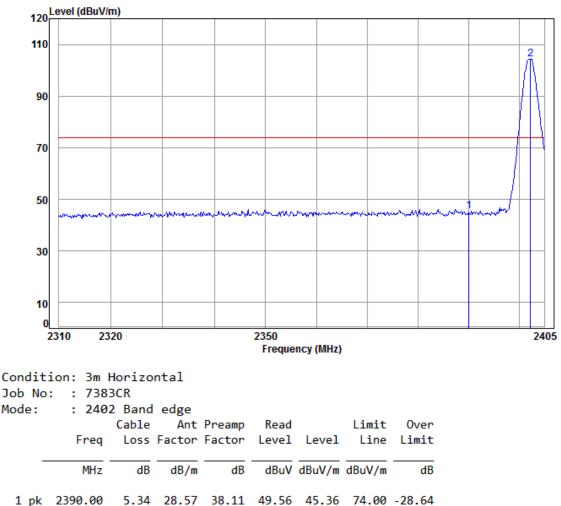


2 pp 2402.29 5.35 28.61 38.11 108.60 104.45 74.00 30.45





Report No.: SZEM151100738301 Page: 83 of 92


Worse case mode:	GFSK (DH5)	Test channel:	Lowest	Remark:	Average	Vertical	l
------------------	------------	---------------	--------	---------	---------	----------	---

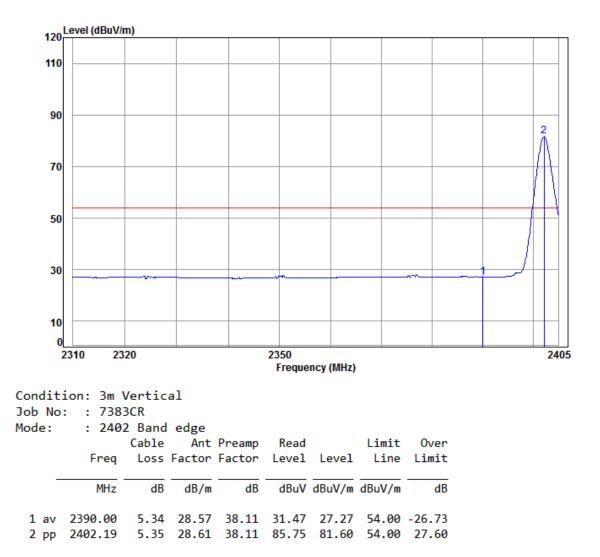



Report No.: SZEM151100738301 Page: 84 of 92


Worse case mode: GFSK (DH5) Test channel:	Lowest	Remark:	Average	Horizontal	l
-------------------------	--------------------	--------	---------	---------	------------	---

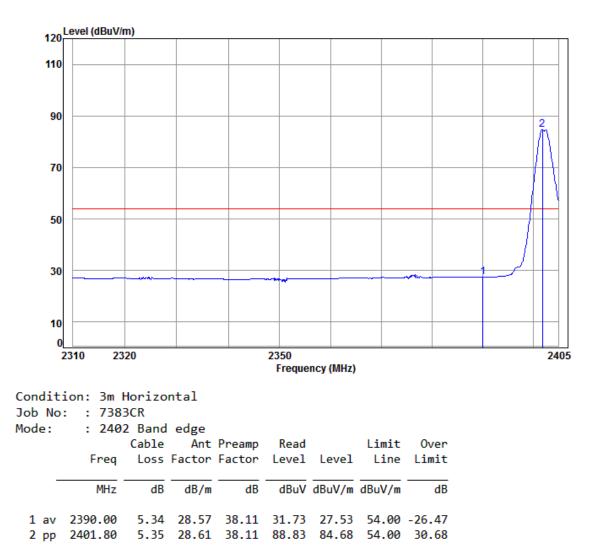



Report No.: SZEM151100738301 Page: 85 of 92

Worse case mode:	GFSK (DH5)	Test channel:	Highest	Remark:	Peak	Vertical	
------------------	------------	---------------	---------	---------	------	----------	--

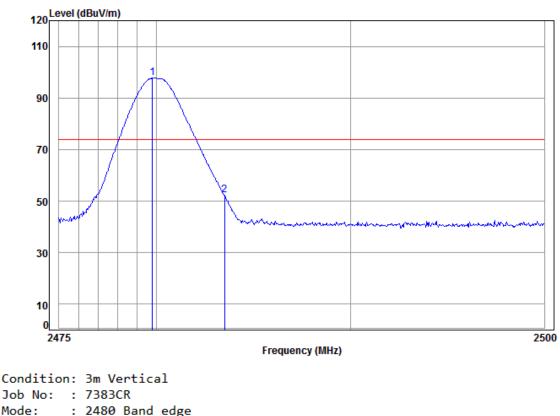


Mode:	: 248		<u> </u>	Preamp	Read		Limit	0ver
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit
-	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
	2479.81 2483.50							

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM151100738301 Page: 86 of 92

Worse case mode:	GFSK (DH5)	Test channel:	Highest	Remark:	Peak	Horizontal	
------------------	------------	---------------	---------	---------	------	------------	--

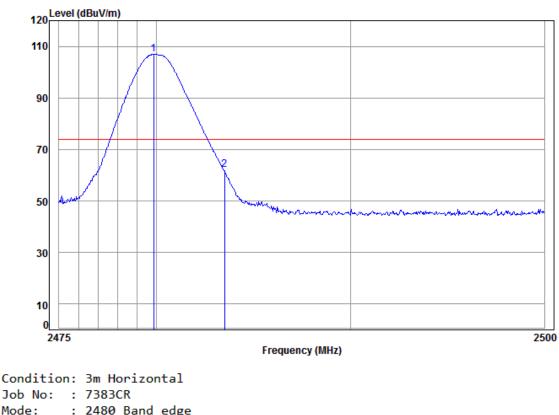


Mode:	: 248 Freq	Cable	Ant				Limit Line	
-	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
	2479.86 2483.50							



Report No.: SZEM151100738301 Page: 87 of 92

Worse case mode: GFSK	(DH5) Test channel:	Highest	Remark:	Average	Vertical	
-----------------------	---------------------	---------	---------	---------	----------	--

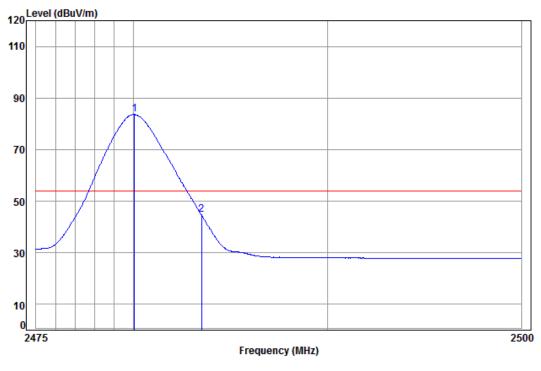


Conditi	ion: 3m	Vertic	al					
Job No:	: 738	3CR						
Mode:	: 248	0 Band	edge					
		Cable	Ant	Preamp	Read		Limit	0ver
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit
_								
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 pp	2480.06	5.41	28.97	38.12	87.32	83.58	54.00	29.58
2 av	2483.50	5.41	28.98	38.12	48.67	44.94	54.00	-9.06



Report No.: SZEM151100738301 Page: 88 of 92

Worse case mode: G	GFSK (DH5)	Test channel:	Highest	Remark:	Average	Horizontal
--------------------	------------	---------------	---------	---------	---------	------------

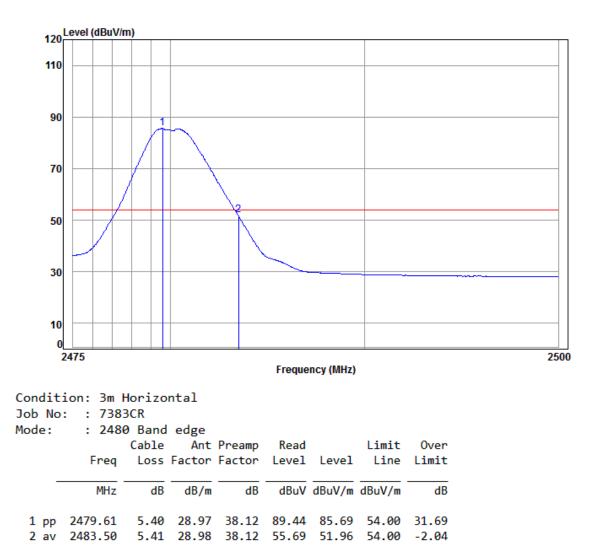

Note:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor



Report No.: SZEM151100738301 Page: 89 of 92


7 Photographs - EUT Test Setup

Test model No.: OMNI S2R BLUETOOTH ADAPTER

7.1 Conducted Emission



7.2 Radiated Emission

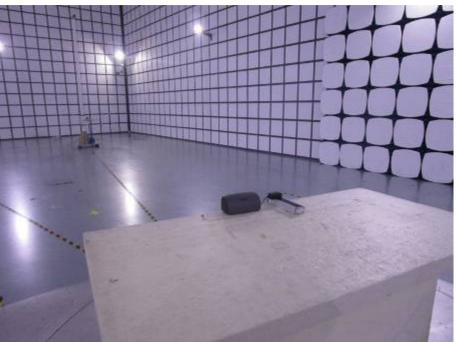



Report No.: SZEM151100738301 Page: 90 of 92

7.3 Radiated Spurious Emission



Report No.: SZEM151100738301 Page: 91 of 92





Report No.: SZEM151100738301 Page: 92 of 92

8 Photographs - EUT Constructional Details

Refer to Appendix A - Photographs of EUT Constructional Details for SZEM1511007383CR.

