

RR051-15-104199-11-A Ed. 0

## Permissive change test report

According to the standard:  
CFR 47 FCC PART 15

Equipment under test:  
GLOBAL POCKET READER GPR+

FCC ID: WMQ-30005

Company:  
ALLFLEX EUROPE SAS

DISTRIBUTION: Mr LANGOUET

(Company: ALLFLEX EUROPE SAS)

Number of pages: 24 with 4 appendixes

Ed.	Date	Modified pages	Written by		Technical Verification and Quality Approval	
			Name	Visa	Name	Visa
0	15-MAR-2016	Creation	S. LOUIS	SL	T. LEDRESSEUR	

Duplication of this test report is only permitted for an integral photographic facsimile. It includes the number of pages referenced here above.  
This document is the result of testing a specimen or a sample of the product submitted. It does not imply an assessment of the conformity of the whole manufactured products of the tested sample.



**DESIGNATION OF PRODUCT:** GLOBAL POCKET READER GPR+

**Serial number (S/N):** C11000012

**Reference / model (P/N):** GPR+, USWR+

**Software version:** —

**MANUFACTURER:** ALLFLEX EUROPE SAS

**COMPANY SUBMITTING THE PRODUCT:**

**Company:** ALLFLEX EUROPE SAS

**Address:** Route des Eaux  
BP 90219  
35502 VITRE Cedex  
FRANCE

**Responsible:** Mr LANGOUET

**DATES OF TEST:** 8-MAR-2016

**TESTING LOCATION:** EMITECH ANGERS laboratory at JUIGNE SUR LOIRE (49) FRANCE  
21 rue de la Fuye  
49610 Juigne sur Loire  
France  
FCC Accredited under US-EU MRA Designation Number: FR0009  
Test Firm Registration Number: 873677

**TESTED BY:** S. LOUIS

## CONTENTS

	<i>TITLE</i>	<i>PAGE</i>
1.	<b>INTRODUCTION</b> _____	<b>4</b>
2.	<b>PRODUCT DESCRIPTION</b> _____	<b>4</b>
3.	<b>NORMATIVE REFERENCE</b> _____	<b>5</b>
4.	<b>TEST METHODOLOGY</b> _____	<b>5</b>
5.	<b>TEST EQUIPMENT CALIBRATION DATES</b> _____	<b>6</b>
6.	<b>TESTS RESULTS SUMMARY</b> _____	<b>7</b>
7.	<b>CONDUCTED LIMITS</b> _____	<b>10</b>
8.	<b>RADIATED EMISSION LIMITS</b> _____	<b>13</b>
9.	<b>RADIATED EMISSION LIMITS; general requirements</b> _____	<b>15</b>

APPENDIX 1: Photos of the equipment under test

APPENDIX 2: Test set up

APPENDIX 3: Test equipment list

APPENDIX 4: 99% occupied bandwidth

## 1. INTRODUCTION

This report presents the results of radio test carried out on the following equipment: **Global Pocket Reader GPR+**, in accordance with normative reference.

The device under test integrates a 125 kHz RFID module.

## 2. PRODUCT DESCRIPTION

Class:	B
Utilization:	RFID Handheld control terminals
Antenna type and gain:	Integral antenna, gain unknown
Operating frequency range:	125 kHz
Number of channels:	1
Channel spacing:	Not concerned
Frequency generation:	A microcontroller with its 24 MHz crystal and an oscillator circuitry with a 17.1776 MHz crystal
Power source:	7.2 Vdc Ni-MH batteries

The applicant declares that the equipment can't emit during the recharge of batteries.  
The applicant declares that the highest local oscillator used is 24MHz.

Power level, frequency range and channels characteristics are not user adjustable.  
The details pictures of the product and the circuit boards are joined with this file.

### **3. NORMATIVE REFERENCE**

The standards and testing methods related throughout this report are those listed below. They are applied on the whole test report even though the extensions (version, date and amendment) are not repeated.

CFR 47 FCC Part 15 (2015)      Radio Frequency Devices

ANSI C63.4                              2009  
Methods of measurement of Radio-Noise  
Emissions from low-voltage Electrical and Electronic Equipment in the Range  
of 9 kHz to 40 GHz.

ANSI C63.10                             2009  
Testing Unlicensed Wireless Devices.

KDB 178919 D01                        Permissive Change Policy v06

### **4. TEST METHODOLOGY**

Radio performance tests procedures given in CFR 47 part 15:

Subpart A –General

Paragraph 19:    labelling requirements  
Paragraph 21:    information to user

Subpart B –Unintentional Radiators

Paragraph 105:   information to the user  
Paragraph 107:   conducted limits  
Paragraph 109:   radiated emission limits

Subpart C – Intentional Radiators

Paragraph 203:   Antenna requirement  
Paragraph 209:   Radiated emission limits; general requirements  
Paragraph 215:   Additional provisions to the general radiated emission limitations

**5. TEST EQUIPMENT CALIBRATION DATES**

Equipment	Model	Type	Last verification	Next verification	Validity
0000	BAT-EMC V3.6.0.32	Software	/	/	/
1406	EMCO 6502	Loop antenna	27/01/2015	27/01/2017	27/03/2017
8508	California instruments 1251RP	Power source	12/10/2015	12/10/2016	12/12/2016
8524	Hewlett Packard HP 8591EM	Test receiver	10/09/2015	10/09/2017	10/11/2017
8526	Schwarzbeck VHBB 9124	Biconical antenna	12/06/2015	12/06/2018	12/08/2018
8543	Schwarzbeck UHALP 9108A	Log periodic antenna	12/06/2015	12/06/2018	12/08/2018
8635	R&S EZ-25	High-pass filter	05/08/2014	05/08/2016	05/10/2016
8671	HUGER	Meteo station	04/09/2014	04/09/2016	04/11/2016
8676	ISOTECH IDM106N	Multimeter	21/05/2015	21/05/2017	21/07/2017
8707	R&S ESI7	Test receiver	11/12/2014	11/12/2016	11/02/2017
8719	Thurbly Thandar Instruments 1600	LISN	23/06/2014	23/06/2016	23/08/2016
8732	Emitech	OATS	23/08/2013	23/08/2016	23/10/2016
8749	La Crosse Technology WS-9232	Meteo station	03/09/2014	03/09/2016	03/11/2016
8864	Champ libre Juigné. V3.4	Software	/	/	/
8893	Emitech	Outside room Hors cage	/	/	/
8896	ACQUISYS GPS8	Satellite synchronized frequency standard	/	/	/
10651	Absorber sheath current	Emitech	16/12/2015	16/12/2017	16/02/2018

**6. TESTS RESULTS SUMMARY**

**6.1 general (subpart A)**

Test procedure	Description of test	Respected criteria?				Comment
		Yes	No	NAp	NAs	
FCC Part 15.19	LABELLING REQUIREMENTS				X	See certification documents
FCC Part 15.21	INFORMATION TO USER				X	See certification documents

NAp: Not Applicable

NAs: Not Asked

**LABEL SHALL CONTAIN**

The label shall be located in a conspicuous location on the device

The label shall not be a stick-on, paper label. The label on these products shall be permanently affixed to the product and shall be readily visible to the purchaser at the time of purchase

**§15.19: (can be placed in the user manual if the product is too small)**

*This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.*

**USER NOTICE SHALL CONTAIN**

The user notice, not provided during tests, shall include the following informations:

**§15.21:**

*Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.*

**6.2 unintentional radiator (subpart B)**

Test procedure	Description of test	Respected criteria?				Comment
		Yes	No	NAp	NAs	
FCC Part 15.105	INFORMATION TO THE USER				X	See certification documents
FCC Part 15.107	CONDUCTED LIMITS	X				Class B
FCC Part 15.109	RADIATED EMISSION LIMITS	X				Class B
FCC Part 15.111	ANTENNA POWER CONDUCTED LIMITS FOR RECEIVER			X		

NAp: Not Applicable

NAs: Not Asked

**USER NOTICE SHALL CONTAIN**

The user notice, not provided during tests, shall include the following informations:

**§ 15.105:**

*NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference's by one or more of the following measures:*

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and the receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.



**6.3 intentional radiator (subpart C)**

Test procedure	Description of test	Criteria respected ?				Comment
		Yes	No	NAP	NAs	
FCC Part 15.203	ANTENNA REQUIREMENTS	X				Note 1
FCC Part 15.207	CONDUCTED LIMITS			X		Note 2
FCC Part 15.209	RADIATED EMISSION LIMITS; GENERAL REQUIREMENTS	X				

NAP: Not Applicable

NAs: Not Asked

Note 1: Integral antenna.

Note 2: The applicant declares that the equipment does not emit during recharge of batteries.

**RF EXPOSURE:**

Maximum measured power = 0.105 mW at 125kHz

In accordance with KDB 447498 D01 General RF Exposure Guidance v06, Paragraph 4.3.1.

The product must respect the exclusion limit for 10-g extremity SAR and a separation distances less than 50mm:

$$P(mW) < \frac{7.5 * 50(mm)}{\sqrt{0.1(GHz)}} * (1 + \log\left(\frac{100}{F(MHz)}\right))$$

$$P(mW) < 2314.24mW$$

**SOFTWARE CHANGE**

Per KDB178919 KDB 178919 D01 Permissive Change Policy v06 :

This permissive change test report is for adding a second frequency on the product (125 kHz). The modification is realized by software and no hardware changes have been made.

This modification will made by the manufacturer before the sale of the product, and it's impossible at a third parties to replace the software with an older version so it's impossible to remove the frequency 125 kHz.

The product will emit in alternation on the two frequencies (125 kHz and 134.2 kHz)

## **7. CONDUCTED LIMITS**

**Standard:** FCC Part 15

**Test procedure:** Paragraph 15.107

**Limits:** Class B

**Software used:** BAT-EMC V3.6.0.32

### **Test set up:**

The EUT is isolated and placed on a wooden table, 0.8 m over an horizontal reference plane and 0.4 m from a vertical reference plane. It is powered by an artificial main network placed on the ground reference plane. The equipment is powered via an AC / DC adapter which is supplied by an external power source (120 V / 60 Hz).

See photos in appendix 2

**Frequency range:** 150 kHz - 30 MHz

**Detection mode:** Peak / Quasi-peak / Average

**Bandwidth:** 10 kHz / 9 kHz

### **Equipment under test operating condition:**

The equipment is blocked in charging mode.


### **Results:**

Ambient temperature (°C):	22.2
Relative humidity (%):	43


**Sample N° 1: Measurement on the mains power supply:**

The measurement is first realized with Peak detector.

Curve N° 1: measurement on the Neutral with peak detector

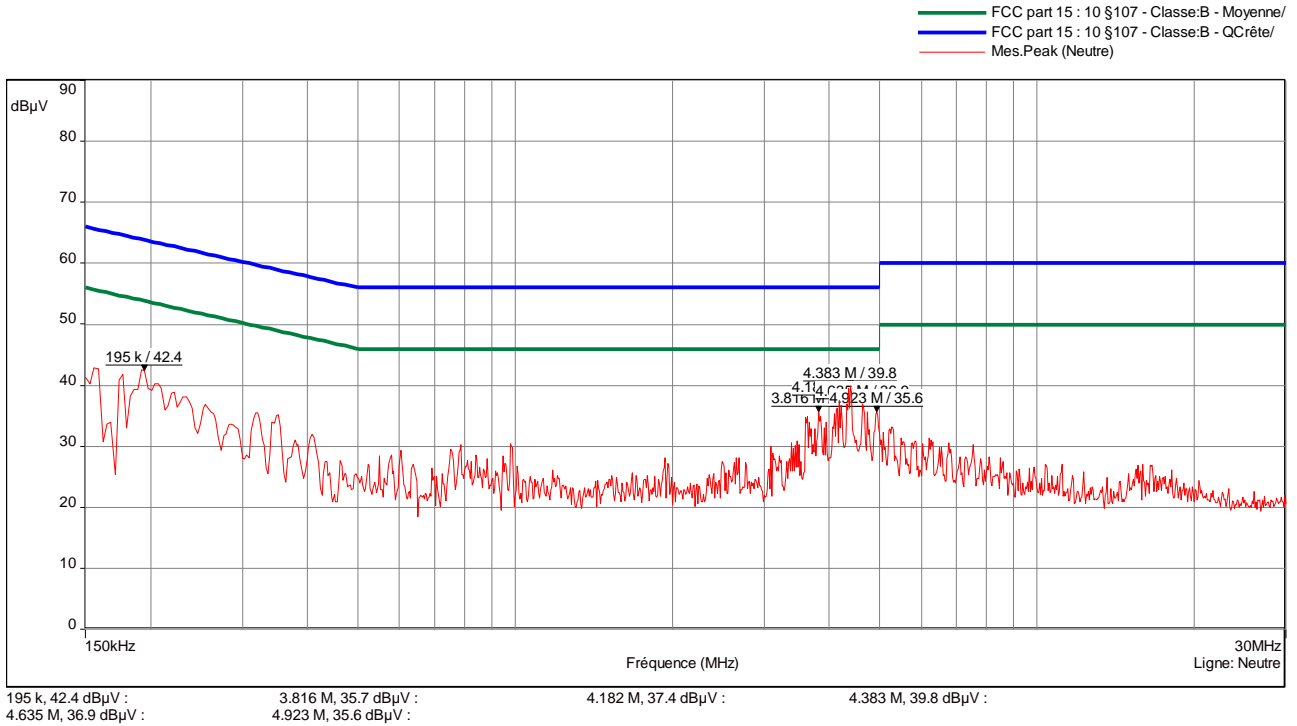


Curve N° 2: measurement on the Line with peak detector

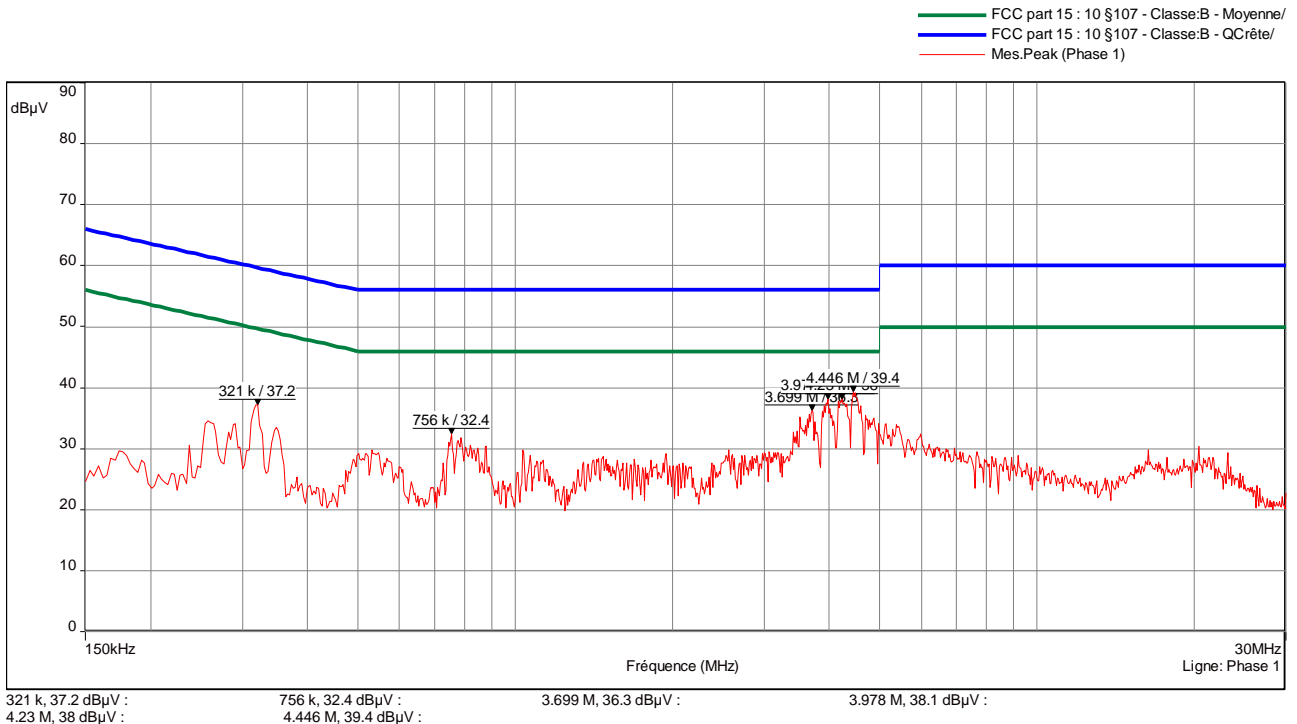


The frequencies which are not 6 dB under the Average limit are then analyzed with Average detector.

Curve N° 3: average measurement on the Neutral, for the frequency range: 4MHz to 5MHz

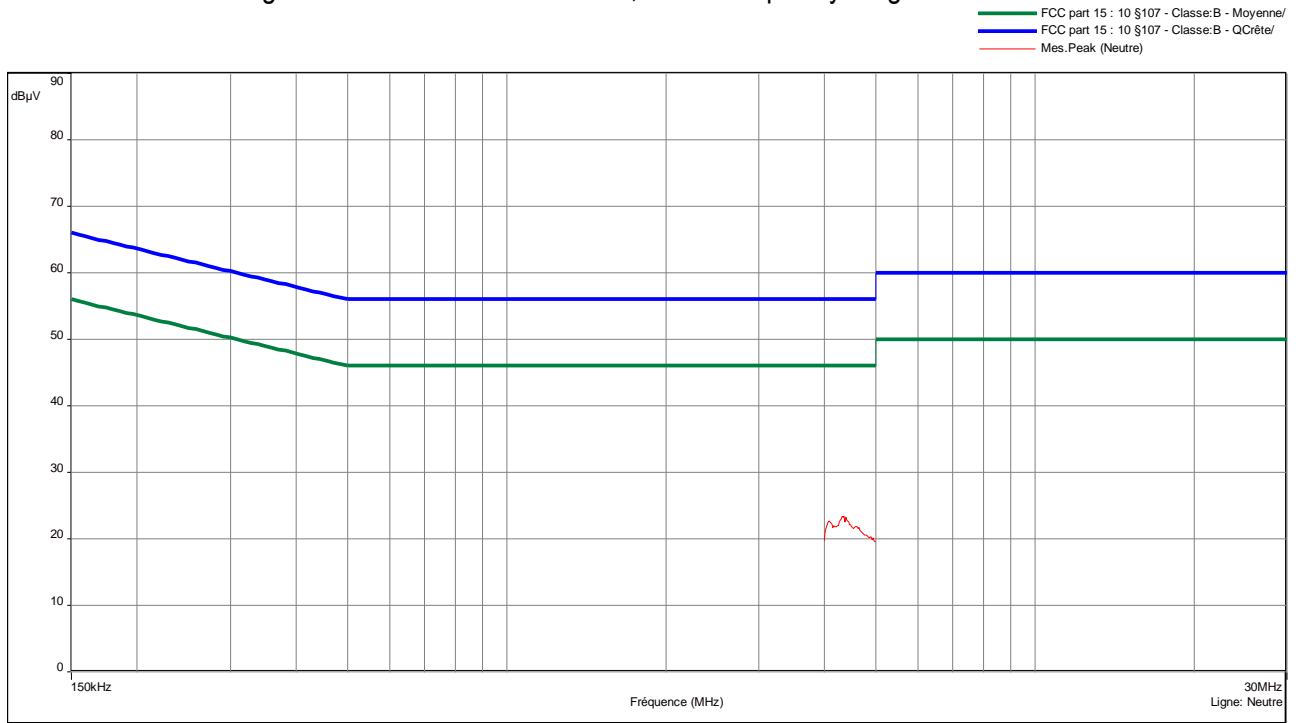

Curve N° 4: average measurement on the Line, for the frequency range: 4MHz to 5MHz

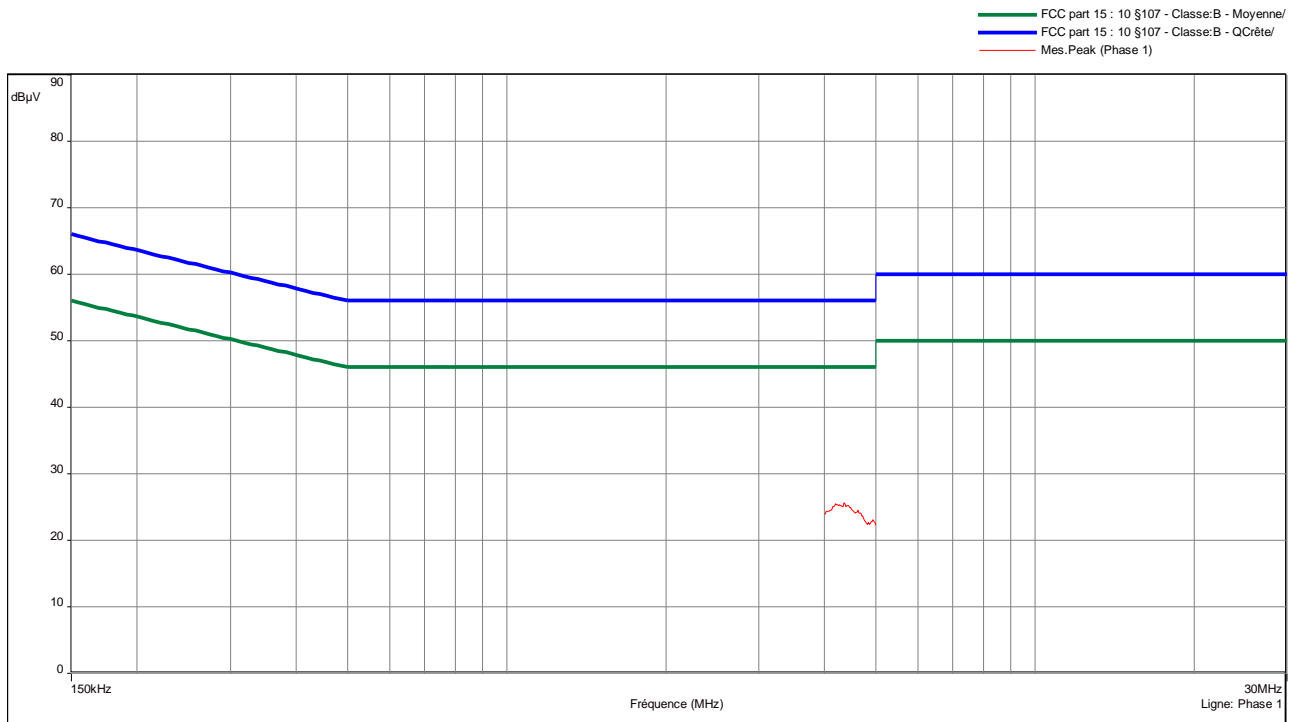

**Test conclusion:**

RESPECTED STANDARD

**8. RADIATED EMISSION LIMITS**

**Standard:** FCC Part 15

**Test procedure:** paragraph 109

**Limit class:** Class B

**Test set up:**

First an exploratory radiated measurement was performed. During this phase the product is oriented in three orthogonal planes.

Then the final measurement is realized with the product on the most critical orientation.

The measure is realized on open area test site, the EUT is placed on a rotating table, 0.8m from a ground plane.

Zero degree azimuths correspond to the front of the device under test.

See photos in appendix 2.

**Frequency range:** From 30MHz to 1 GHz (the highest local oscillator frequency used is 24MHz)

**Detection mode:** Quasi-peak ( $F < 1$  GHz)

**Bandwidth:** 120 kHz ( $F < 1$  GHz)

**Distance of antenna:** 10 meters (in open area test site)

**Antenna height:** 1 to 4 meters (in open area test site)

**Antenna polarization:** vertical and horizontal (only the highest level is recorded)

**Equipment under test operating condition:**

The equipment is blocked in charging mode.

**Results:**

Ambient temperature (°C): 22.5  
 Relative humidity (%): 47

Power source: The equipment is powered via an AC / DC adapter which is supplied by an external power source (120 V / 60 Hz).

Sample N° 1

FREQUENCIES (MHz)	Detector P: Peak QP: Quasi-Peak	Antenna height (cm)	Azimuth (degree)	Polarization H: Horizontal V: Vertical	Field strength measured at 10 m (dB $\mu$ V/m)	Field strength correlated at 3m (dB $\mu$ V/m)	Limits at 3m (dB $\mu$ V/m)	Margin (dB)
30	QP	100	12	V	22.8	33.2	40	6.8
43.1	QP	100	334	V	21.6	32	40	8
71.7	QP	175	0	V	23.7	34.1	40	5.9
73	QP	167	363	V	10.2	20.6	40	19.4
79.6	QP	400	136	H	9.5	19.9	40	20.1
128	QP	100	352	V	14.7	25.1	43.5	18.4
174.8	QP	400	172	V	14.6	25	43.5	18.5
204.2	QP	159	34	V	19.1	29.5	43.5	14
245.9	QP	300	131	H	16.8	27.2	46	18.8

Applicable limits: for 30 MHz  $\leq$  F  $\leq$  88 MHz : 40 dB $\mu$ V/m at 3 meters  
 for 88 MHz < F  $\leq$  216 MHz : 43.5 dB $\mu$ V/m at 3 meters  
 for 216 MHz < F  $\leq$  960 MHz : 46 dB $\mu$ V/m at 3 meters  
 Above 960 MHz : 54 dB $\mu$ V/m at 3 meters

**Test conclusion:**

RESPECTED STANDARD

## **9. RADIATED EMISSION LIMITS; general requirements**

**Standard:** FCC Part 15

**Test procedure:** paragraph 209

### **Test set up:**

First an exploratory radiated measurement was performed. During this phase the product is oriented in three orthogonal planes.

Then the final measurement is realized with the product on the most critical orientation.

The measure is realized on open area test site, the EUT is placed on a rotating table, 0.8m from a ground plane.

Zero degree azimuths correspond to the front of the device under test.

See photos in appendix 2.

**Frequency range:** From 9 kHz to 1GHz (the highest local oscillator frequency used is 24MHz)

**Detection mode:** Quasi-peak ( $F < 1$  GHz)

Except for the frequency bands 9-90kHz, 110-490kHz. Radiated emission limits in these three bands are based on measurements employing an average detector

**Bandwidth:** 200Hz ( $9 \text{ kHz} < F < 150\text{kHz}$ )  
9 kHz ( $150 \text{ kHz} < F < 30\text{MHz}$ )  
120 kHz ( $30 \text{ MHz} < F < 1 \text{ GHz}$ )  
1 MHz ( $F > 1 \text{ GHz}$ )

**Distance of antenna:** 10 meters (in open area test site)

**Antenna height:** 1 to 4 meters (in open area test site)

**Antenna polarization:** vertical and horizontal (only the highest level is recorded)

### **Equipment under test operating condition:**

The equipment under test is blocked in continuous modulated transmission mode, at the highest output power level at which the transmitter is intended to operate.

**Results:**

Ambient temperature (°C): 22.7  
 Relative humidity (%): 41

Power source: We used for power source the internal batteries of the equipment fully charged

**Sample N° 1: Carrier**

Frequencies (kHz)	Detector P: Peak Av: Average	Field strength at 10 meters dB $\mu$ V/m <sup>(1)</sup>	Field strength at 300 meters dB $\mu$ V/m <sup>(2)</sup>	Limits 300m dB $\mu$ V/m	Margin (dB)
125	P	75	15.9	45	29.1
125	Av	74.6	15.5	25	9.5

With antenna height: 100 cm; Azimuth: 193°; Polarization antenna: 45°

(1) Field strength measured at 10 meters

(2) Field strength extrapolated at 300 meters using 40dB/decade fall off

**Sample 1: Harmonics:**

Frequencies (kHz)	Detector P: Peak Av: Average	Field strength at 10 meters dB $\mu$ V/m <sup>(3)</sup>	Field strength at 300 meters dB $\mu$ V/m <sup>(4)</sup>	Limits 300m dB $\mu$ V/m	Margin (dB)
250.0	P	43.8	-15.3	39	54.3
250.0	Av	43.4	-15.7	19	34.7

(3) Field strength measured at 10 meters

(4) Field strength extrapolated at 300 meters using 40dB/decade fall off

Applicable limits:

for 9 kHz $\leq$ F $\leq$ 490 kHz :	2400/F(kHz) at 300 meters
for 490 kHz < F $\leq$ 1.705 MHz :	24000/F(kHz) at 30 meters
for 1.705 MHz < F $\leq$ 30 MHz :	29.5 dB $\mu$ V/m at 30 meters
for 30 MHz < F $\leq$ 88 MHz :	40 dB $\mu$ V/m at 3 meters
for 88 MHz < F $\leq$ 216 MHz :	43.5 dB $\mu$ V/m at 3 meters
for 216 MHz < F $\leq$ 960 MHz :	46 dB $\mu$ V/m at 3 meters
Above 960 MHz :	54 dB $\mu$ V/m at 3 meters


**Test conclusion:**


RESPECTED STANDARD

**□□□ End of report, 4 annexes to be forwarded □□□**



## APPENDIX 1: Photos of the equipment under test

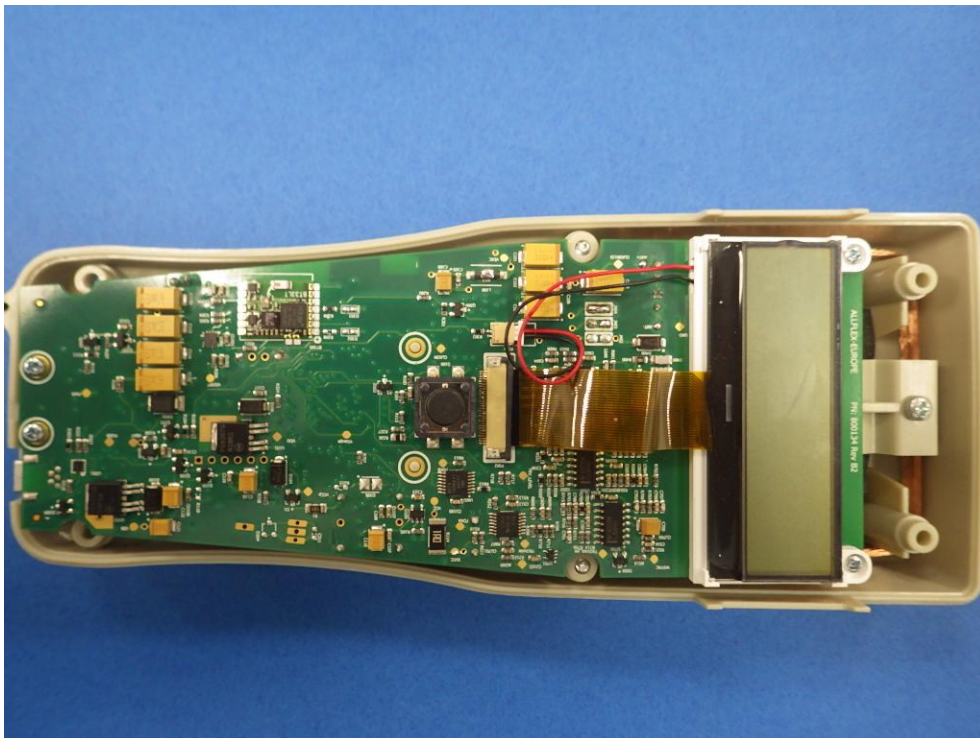

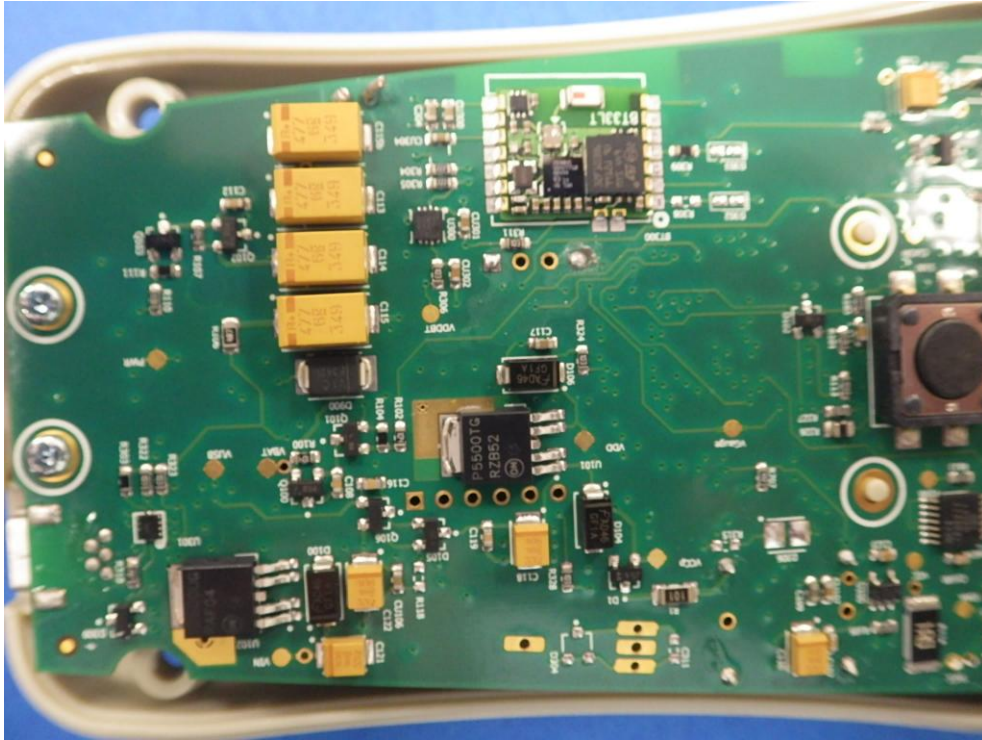

## APPENDIX 2: Test set up

Open Area Test Site – TX mode





Open Area Test Site – Charging mode



Conducted tests – Charging mode



## APPENDIX 3: Test equipment list

### Conducted limits

TYPE	MANUFACTURER	EMITECH NUMBER
Outside room Hors cage	Emitech	8893
Satellite synchronized frequency standard GPS8	ACQUISYS	8896
Test receiver HP 8591EM	Hewlett Packard	8524
LISN 1600	Thurbly Thandar Instruments	8719
High-pass filter EZ25	R&S	8635
Absorber sheath current	Emitech	10651
Power source 1251RP	California instruments	8508
Multimeter IDM106N	ISOTECH	8676
Meteo station	HUGER	8671
Software	BAT-EMC V3.6.0.32	0000


### Radiated emission limits

TYPE	MANUFACTURER	EMITECH NUMBER
Open test site	EMITECH	8732
Satellite synchronized frequency standard GPS8	ACQUISYS	8896
Test receiver ESI7	Rohde & Schwarz	8707
Biconical antenna VHBB 9124	Schwarzbeck	8526
Log periodic antenna UHALP 9108A	Schwarzbeck	8543
Power source 1251RP	California instruments	8508
Multimeter IDM106N	ISOTECH	8676
Meteo station WS-9232	La Crosse Technology	8749
Software	Champ libre Juigné. V3.4	8864

### Radiated emission limits; general requirements

TYPE	MANUFACTURER	EMITECH NUMBER
Open test site	EMITECH	8732
Satellite synchronized frequency standard GPS8	ACQUISYS	8896
Test receiver ESI7	Rohde & Schwarz	8707
Loop antenna 6502	EMCO	1406
Biconical antenna VHBB 9124	Schwarzbeck	8526
Log periodic antenna UHALP 9108A	Schwarzbeck	8543
Multimeter IDM106N	ISOTECH	8676
Meteo station WS-9232	La Crosse Technology	8749
Software	Champ libre Juigné. V3.4	8864

## APPENDIX 4: 99% OCCUPIED BANDWIDTH

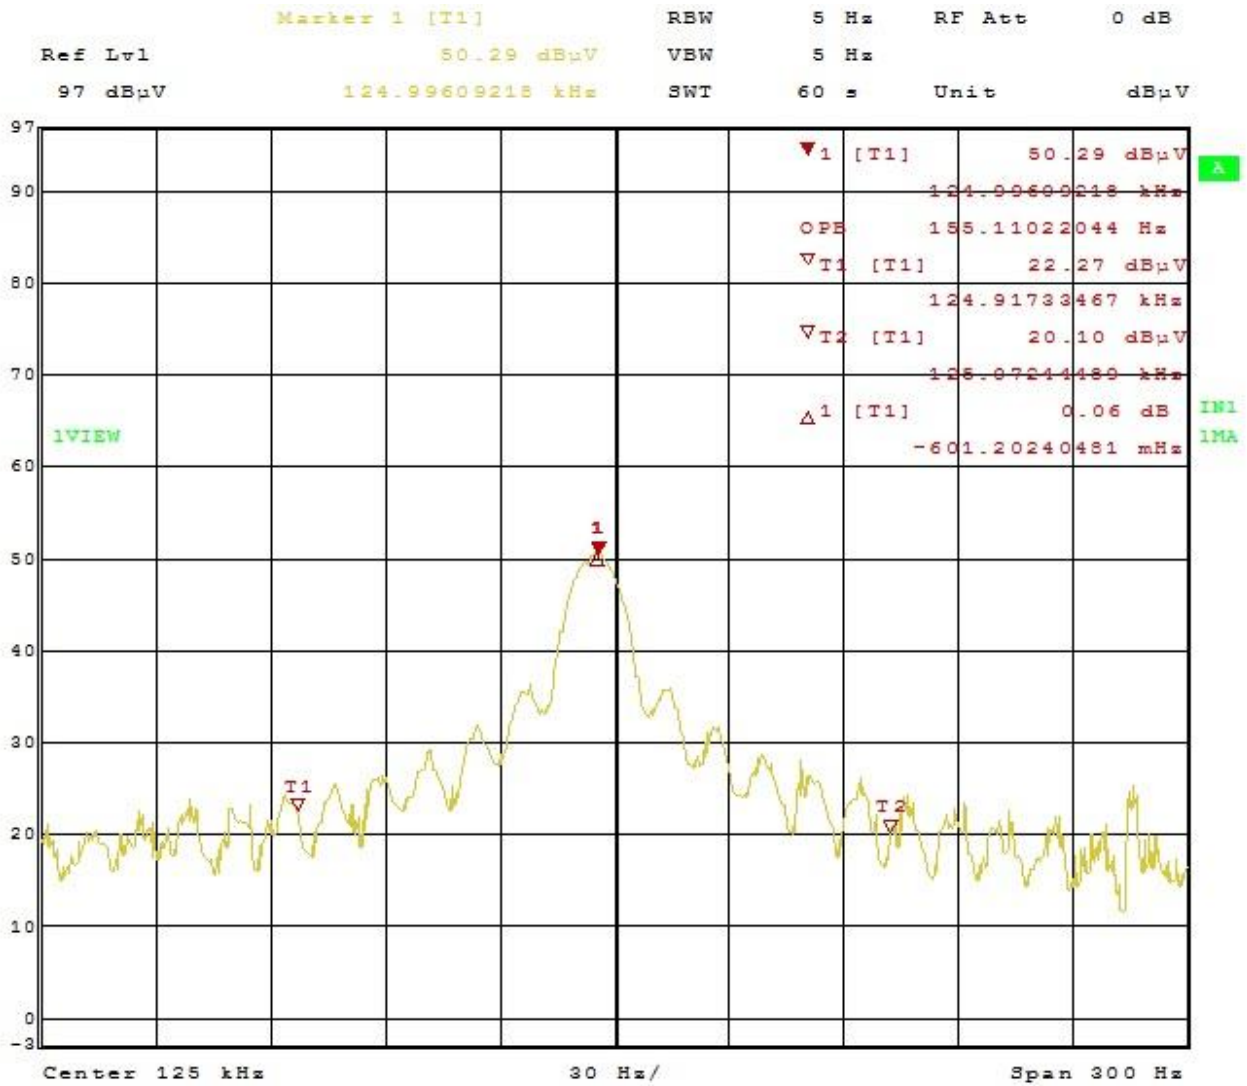

Date: 2.MAR.2016 14:47:22