

TEST REPORT

Report No.: HK09071587-1


BELLMAN AND SYMFON EUROPE AB

Application
For
Certification
(Original Grant)
(FCC ID: WMSBERXAUD)
(IC: 6693A-BERXAUD)

Transceiver

Prepared and Checked by:

Approved by:



Benny Lau
Engineer



Chan Chi Hung, Terry
Lead Engineer
Date: October 09, 2009

- The test report only allows to be revised within the retention period unless further standard or the requirement was noticed.
- This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

INTERTEK TESTING SERVICES

GENERAL INFORMATION

BELLMAN AND SYMFON EUROPE AB
BRAND NAME: Bellman Audio Domino, MODEL: BE2210

FCC ID: WMSBERXAUD
IC: 6693A-BERXAUD

Grantee:	BELLMAN AND SYMFON EUROPE AB
Grantee Address:	Södra Långebergsgatan 30, S-421 32 Västra Frölunda, Sweden.
Contact Person:	Anders Lenning
Tel:	+46-31-682820
Fax:	+46-31-682890
e-mail:	N/A
Manufacturer:	BELLMAN AND SYMFON EUROPE AB
Manufacturer Address:	Södra Långebergsgatan 30, S-421 32 Västra Frölunda, Sweden.
Brand Name:	Bellman Audio Domino
Model:	BE2210
Type of EUT:	Transceiver
Description of EUT:	Personal Hearing System
Serial Number:	N/A
FCC ID / IC:	WMSBERXAUD / 6693A-BERXAUD
Date of Sample Submitted:	July 31, 2009
Date of Test:	August 26, 2009
Report No.:	HK09071587-1
Report Date:	October 09, 2009
Environmental Conidtions:	Temperature: +10 to 40°C Humidity: 10 to 90%

INTERTEK TESTING SERVICES

SUMMARY OF TEST RESULT

BELLMAN AND SYMFON EUROPE AB
BRAND NAME: Bellman Audio Domino, MODEL: BE2210

FCC ID: WMSBERXAUD
IC: 6693A-BERXAUD

TEST SPECIFICATION	REFERENCE	RESULTS
Maximum Peak Output Power	15.247(b), (c) / RSS-210 A8.4	Pass
6 dB Bandwidth	15.247(a)(2) / RSS-210 A8.2	Pass
Maximum Power Density	15.247(e) / RSS-210 A8.2	Pass
Out of Band Antenna Conducted Emission	15.247(d) / RSS-210 A8.5	Pass
Radiated Emission in Restricted Bands	15.247(d)	Pass
Transmitter Power Line Conducted Emissions	15.207 / RSS- Gen 7.2.2	Pass
Antenna Requirement	15.203	Pass (See Note 1)
Radiated Spurious Emissions	15.247(d) / RSS- 210 A8.5	Pass
Digital Device Radiated Emissions	15.109 / ICES-003	Pass
Digital Device Conducted Emissions	15.107 / ICES- 003	Pass
Receiver Radiated Emissions	RSS-210 2.3	Pass
Receiver Conducted Emissions	RSS-Gen 7.2.2	Pass

Note: 1. The EUT uses a permanently attached antenna which, in accordance to section 15.203, is considered sufficient to comply with the provisions of this section.

INTERTEK TESTING SERVICES

Table of Contents

1.0	<u>General Description</u>	1
1.1	Product Description	1
1.2	Related Submittal(s) Grants.....	1
1.3	Test Methodology.....	1
1.4	Test Facility	1
2.0	<u>System Test Configuration</u>	2
2.1	Justification	2
2.2	EUT Exercising Software.....	2
2.3	Special Accessories	2
2.4	Equipment Modification	2
2.5	Measurement Uncertainty.....	2
2.6	Support Equipment List and Description	3
3.0	<u>Emission Results</u>	4
3.1	Field Strength Calculation.....	4
3.2	Radiated Emission Configuration Photograph.....	5
3.3	Radiated Emission Data	5
3.4	Conducted Emission Configuration Photograph.....	5
3.5	Conducted Emission Data	5
4.0	<u>Measurement Results</u>	6
4.1	Maximum Conducted Output Power at Antenna Terminals	6
4.2	Minimum 6 dB RF Bandwidth	6
4.3	Maximum Power Density Reading.....	7
4.4	Out of Band Conducted Emissions	7
4.5	Out of Band Radiated Emissions	8
4.6	Transmitter Radiated Emissions in Restricted Bands	8
4.7	Radiated Spurious Emissions.....	9
4.8	Transmitter Duty Cycle Calculation and Measurements	12
4.9	AC Line Conducted Emission	13
4.10	Radiated Emissions	16
4.11	AC Line Conducted Emission	18
5.0	<u>Equipment Photographs</u>	24
6.0	<u>Product Labelling</u>	24
7.0	<u>Technical Specifications</u>	24
8.0	<u>Instruction Manual</u>	24

INTERTEK TESTING SERVICES

Table of Contents

9.0	<u>Miscellaneous Information</u>	25
9.1	Calculation of Average Factor.....	25
9.2	Emissions Test Procedures	25
10.0	<u>Confidentiality Request</u>	26
11.0	<u>Equipment List</u>	27

INTERTEK TESTING SERVICES

1.0 General Description

1.1 Product Description

The Equipment Under Test (EUT) Model: Bellman Audio Domino BE2210 is a transceiver operating at 2412-2464 MHz. The EUT is powered by a rechargeable 3.7 V Li-Ion batteries with 600 mAh capacity. The charger can be an AC type (100-240 VAC) or DC type (12-24 VDC). BE2210 is so-called a receiver unit. It receives the digital audio data from the related transmitter Model: Bellman Audio Domino BE2230 and outputs to the listener. The communication link between the BE2210 and BE2230 is a point-to-point or point-to-multipoint connection where digital audio data is transmitted using packet data (frames) at a predefined frame-rate. The communication link is half-duplex. A non-acknowledge (NACK) based protocol is used to ensure that faulty frames are retransmitted. At a given time-slot the BE2230 switches to reception and the BE2210 may transmit an un-modulated carrier, within this time-slot, to signal a NACK to the BE2230.

Antenna Type : Internal, Integral

For electronic filing, the brief circuit description is saved with filename: descri.pdf.

1.2 Related Submittal(s) Grants

The Certification procedure of the corresponding transceiver for this transceiver (with FCC ID: WMSBETXAUD) is being processed at the same time of this application. The receiver portion of this transceiver is exempted from the Part 15 technical rules per 15.101(b).

1.3 Test Methodology

Both AC mains line-conducted and radiated emission measurements were performed according to the procedures in ANSI C63.4 (2003). All radiated measurements were performed in an Open Area Test Site. Preliminary scans were performed in the Open Area Test Site only to determine worst case modes. All radiated tests were performed at an antenna to EUT distance of 3 meters, unless stated otherwise in the “**Justification Section**” of this Application.

1.4 Test Facility

The open area test site and conducted measurement facility used to collect the radiated data is located at Garment Centre, 576 Castle Peak Road, Kowloon, Hong Kong. This test facility and site measurement data have been placed on file with the FCC and IC.

INTERTEK TESTING SERVICES

2.0 System Test Configuration

2.1 Justification

The system was configured for testing in a typical fashion (as a customer would normally use it), and in the confines as outlined in ANSI C63.4 (2003).

The device was powered from 3.7VDC Li-ion battery (Part No.: NTA2617) and AC/DC adaptor (Model: MH-0601, Input: 100-240VAC 50/60Hz, Output: 5VDC 1A)

For maximizing emissions, the EUT was rotated through 360°, the antenna height was varied from 1 meter to 4 meters above the ground plane, and the antenna polarization was changed. This step by step procedure for maximizing emissions led to the data reported in Exhibit 3.0.

The rear of unit shall be flushed with the rear of the turntable.

The equipment under test (EUT) was configured for testing in a typical fashion (as a customer would normally use it). The EUT was placed on turntable, which enabled the engineer to maximize emissions through its placement in the three orthogonal axes.

2.2 EUT Exercising Software

There was no special software to exercise the device. Once the unit enters test mode, it transmits the RF signal continuously.

2.3 Special Accessories

AC/DC adaptor (Model: MH-0601, Input: 100-240VAC 50/60Hz, Output: 5VDC 1A)

2.4 Equipment Modification

Any modifications installed previous to testing by BELLMAN AND SYMFON EUROPE AB will be incorporated in each production model sold/leased in the United States and Canada.

No modifications were installed by Intertek Testing Services Hong Kong Ltd.

2.5 Measurement Uncertainty

When determining of the test conclusion, the Measurement Uncertainty of test has been considered.

INTERTEK TESTING SERVICES

2.6 Support Equipment List and Description

1. Transceiver
Model: BE2230

INTERTEK TESTING SERVICES

3.0 Emission Results

Data is included of the worst case configuration (the configuration which resulted in the highest emission levels). A sample calculation, configuration photographs and data tables of the emissions are included.

3.1 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any), Average Factor (optional) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CF - AG - AV$$

where

- FS = Field Strength in dB μ V/m
- RA = Receiver Amplitude (including preamplifier) in dB μ V
- CF = Cable Attenuation Factor in dB
- AF = Antenna Factor in dB
- AG = Amplifier Gain in dB
- AV = Average Factor in dB

In the following table(s), the reading shown on the data table reflects the preamplifier gain. An example for the calculations in the following table is as follows:

$$FS = RR + LF$$

where

- FS = Field Strength in dB μ V/m
- RR = RA - AG - AV in dB μ V
- LF = CF + AF in dB

Assume a receiver reading of 52.0 dB μ V is obtained. The antenna factor of 7.4 dB and cable factor of 1.6 dB are added. The amplifier gain of 29 dB and average factor of 5 dB are subtracted, giving a field strength of 27 dB μ V/m. This value in dB μ V/m was converted to its corresponding level in μ V/m.

RA = 52.0 dB μ V/m	
AF = 7.4 dB	RR = 18.0 dB μ V
CF = 1.6 dB	LF = 9.0 dB
AG = 29.0 dB	
AV = 5.0 dB	
FS = RR + LF	
FS = 18 + 9 = 27 dB μ V/m	

$$\text{Level in } \mu\text{V/m} = \text{Common Antilogarithm } [(27 \text{ dB}\mu\text{V/m})/20] = 22.4 \mu\text{V/m}$$

INTERTEK TESTING SERVICES

3.2 Radiated Emission Configuration Photograph

The worst case in radiated emission was found at 34.850 MHz

For electronic filing, the worst case radiated emission configuration photographs are saved with filename: radiated photos.pdf.

3.3 Radiated Emission Data

The data on the following page lists the significant emission frequencies, the limit and the margin of compliance. Numbers with a minus sign are below the limit.

Judgment: Passed by -6.7 dB

3.4 Conducted Emission Configuration Photograph

The worst case in line-conducted emission was found at 0.4695 MHz

For electronic filing, the worst case line-conducted configuration photographs are saved with filename: conducted photos.pdf.

3.5 Conducted Emission Data

For electronic filing, the graph and data table of conducted emission is saved with filename: conducted.pdf.

Judgment: Passed by -2.78 dB

INTERTEK TESTING SERVICES

4.0 Measurement Results

4.1 Maximum Conducted Output Power at Antenna Terminals, FCC Rules 15.247(b)(3):

The antenna power of the EUT was connected to the input of a power meter. Power was read directly and cable loss correction was added to the reading to obtain power at the EUT antenna terminals.

For antennas with gains of 6 dBi or less, maximum allowed transmitter output is 1 watt (+30 dBm).

Frequency (MHz)	Antenna Gain= 2.1 dBi	
	Output in dBm	Output in mWatt
Low Channel: 2412	19.77	94.842
Middle Channel: 2438	18.64	73.114
High Channel: 2464	17.65	58.210

EUT dBm max. output level = 19.77 dBm

Limit: ≤ 30 dBm

For RF Safety, the information is saved with filename: RF exposure.pdf.

4.2 Minimum 6 dB RF Bandwidth, FCC Rule 15.247(a)(2):

The antenna port of the EUT was connected to the input of a spectrum analyzer. Analyzer RES BW was set to 100kHz. For each RF output channel investigated, the spectrum analyzer center frequency was set to the channel carrier. A PEAK output reading was taken, a DISPLAY line was drawn 6 dB lower than PEAK level. The 6dB bandwidth was determined from where the channel output spectrum intersected the display line.

Frequency (MHz)	6 dB Bandwidth (KHz)
2412	9680
2438	9720
2464	9560

Limit: at least 500kHz

For electronic filing, the above plots are saved with filename: 6db.pdf.

INTERTEK TESTING SERVICES

4.3 Maximum Power Density Reading, FCC Rule 15.247(e):

The spectrum analyzer RES BW was set to 3kHz. In order to look for a peak, the START and STOP frequencies were set to the band edges of the maximum output passband. If there is no clear maximum amplitude in any given portion of the band, it may be necessary to make measurements at a number of bands defined by several START and STOP frequency pairs.

Frequency Span = 3MHz

Sweep Time = 1000 seconds

Antenna output of the EUT was coupled directly to spectrum analyzer; if an external attenuator and/or cable was used, these losses are added to the analyzer raw readings.

Frequency (MHz)	Power Density (dBm/3kHz)
2411.292	-0.78
2437.292	-1.56
2463.292	-2.06

Peak Power Density (at 2405.054MHz) = -12.80 dBm/3kHz

Limit: 8 dBm/3kHz

For electronic filing, the above plots are saved with filename: maxpd.pdf

4.4 Out of Band Conducted Emissions, FCC Rule 15.247(d)

In any 100 kHz bandwidth outside the EUT passband, the RF power produced by the modulation products of the spreading sequence, the information sequence, and the carrier frequency shall be at least 20dB below that of the maximum in-band 100 kHz emission, or else shall meet the general limits for radiated emissions at frequencies outside the passband, whichever results in lower attenuation.

All other types of emissions from the EUT shall meet the general limits for radiated frequencies outside the passband.

The plots showed all spurious emission up to the tenth harmonic. They were found to be at least 20 dB below the highest level of the desired power in the passband.

For the electronic filing, the above plots are saved with filename: oob.pdf

INTERTEK TESTING SERVICES

4.5 Out of Band Radiated Emissions, FCC Rule 15.247(d):

For out of band emissions that are close to or that exceed the 20dB attenuation requirement described in the specification, radiated measurements were performed at a 3m separation distance to determine whether these emissions complied with the general radiated emission requirement.

See section 4.7.

4.6 Transmitter Radiated Emissions in Restricted Bands, FCC Rule 15.35(b), (c):

Data is included of the worst case configuration (the configuration which resulted in the highest emission levels). A sample calculation, configuration photographs and data tables of the emissions are included. All measurements were performed with peak detection unless otherwise specified.

The following data list the significant emission frequencies, the limit and the margin of compliance.

Frequency (MHz)	OATS radiated field strength at carrier frequency measured at 3m (dB μ V/m)		Attenuation (dBc)	Calculated radiated field strength at the bandedge (dB μ V/m)	
	Peak	Average		Peak	Average
2483.5	109.8	90.75	-39.94	69.86	50.81

Limit:

The average radiated field strength at bandedge should be smaller than 54 dB μ V/m and the peak radiated field strength at bandedge should be smaller than 74 dB μ V/m.

INTERTEK TESTING SERVICES

4.7 Radiated Spurious Emissions

Applicant: BELLMAN AND SYMFON EUROPE AB Date of Test: August 26, 2009
 Model: BE2210
 Worst-Case Operating Mode: Transmitter with Adaptor (Lowest Channel)

Table 1-2

Radiated Emissions

Polari- zation	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB μ V/m)	Average Factor (dB)	Calculated at 3m (dB μ V/m)	Average Limit at 3m (dB μ V/m)	Margin (dB)
H	4825.100	29.9	33	34.9	50.8	19.05	31.8	54.0	-22.3
H	12062.750	25.5	33	40.5	52.0	19.05	33.0	54.0	-21.1

Polari- zation	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB μ V/m)	Average Factor (dB)	Calculated at 3m (dB μ V/m)	Peak Limit at 3m (dB μ V/m)	Margin (dB)
H	4825.100	48.9	33	34.9	50.8	0	50.8	74.0	-23.2
H	12062.750	44.5	33	40.5	52.0	0	52.0	74.0	-22.0

NOTES: 1. Peak Detector Data unless otherwise stated.

2. All measurements were made at 3 meters. Harmonic emissions not detected at the 3-meter distances were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other harmonic emissions than those reported were detected at a test distance of 0.3-meter.
3. Negative sign in the column shows value below limit.
4. Horn antenna is used for the emission over 1000MHz.

INTERTEK TESTING SERVICES

Applicant: BELLMAN AND SYMFON EUROPE AB Date of Test: August 26, 2009
 Model: BE2210
 Worst-Case Operating Mode: Transmitter with Adaptor (Middle Channel)

Table 3-4

Radiated Emissions

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB μ V/m)	Average Factor (dB)	Calculated at 3m (dB μ V/m)	Average Limit at 3m (dB μ V/m)	Margin (dB)
H	4876.600	29.5	33	34.9	50.4	19.05	31.4	54.0	-22.7
H	7314.900	27.7	33	37.9	51.6	19.05	32.6	54.0	-21.5
H	12191.500	26.1	33	40.5	52.6	19.05	33.6	54.0	-20.5

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB μ V/m)	Average Factor (dB)	Calculated at 3m (dB μ V/m)	Peak Limit at 3m (dB μ V/m)	Margin (dB)
H	4876.600	48.5	33	34.9	50.4	0	50.4	74.0	-23.6
H	7314.900	46.7	33	37.9	51.6	0	51.6	74.0	-22.4
H	12191.500	45.1	33	40.5	52.6	0	52.6	74.0	-21.4

- NOTES: 1. Peak Detector Data unless otherwise stated.
2. All measurements were made at 3 meters. Harmonic emissions not detected at the 3-meter distances were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other harmonic emissions than those reported were detected at a test distance of 0.3-meter.
3. Negative sign in the column shows value below limit.
4. Horn antenna is used for the emission over 1000MHz.

INTERTEK TESTING SERVICES

Applicant: BELLMAN AND SYMFON EUROPE AB
 Model: BE2210

Date of Test: August 26, 2009

Worst-Case Operating Mode: Transmitter with Adaptor (Highest Channel)

Table 5-6

Radiated Emissions

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB μ V/m)	Average Factor (dB)	Calculated at 3m (dB μ V/m)	Average Limit at 3m (dB μ V/m)	Margin (dB)
H	4927.520	29.4	33	34.9	50.3	19.05	31.3	54.0	-22.8
H	7391.280	27.5	33	37.9	51.4	19.05	32.4	54.0	-21.7
H	12318.800	25.7	33	40.5	52.2	19.05	33.2	54.0	-20.9

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB μ V/m)	Average Factor (dB)	Calculated at 3m (dB μ V/m)	Peak Limit at 3m (dB μ V/m)	Margin (dB)
H	4927.520	48.5	33	34.9	50.4	0	50.4	74.0	-23.6
H	7391.280	46.3	33	37.9	51.2	0	51.2	74.0	-22.8
H	12318.800	44.4	33	40.5	51.9	0	51.9	74.0	-22.1

NOTES: 1. Peak Detector Data unless otherwise stated.

2. All measurements were made at 3 meters. Harmonic emissions not detected at the 3-meter distances were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other harmonic emissions than those reported were detected at a test distance of 0.3-meter.
3. Negative sign in the column shows value below limit.
4. Horn antenna is used for the emission over 1000MHz.

INTERTEK TESTING SERVICES

4.8 Transmitter Duty Cycle Calculation and Measurements, FCC Rule 15.35(b), (c)


The EUT antenna output port was connected to the input of the spectrum analyzer. The analyzer center frequency was set to EUT RF channel carrier. The SWEPT function on the analyzer was set to ZERO SPAN. The transmitter ON time was determined from the resultant time-amplitude display:

For the electronic filing, the above plots are saved with filename: timing.pdf

INTERTEK TESTING SERVICES

4.9 AC Line Conducted Emission, FCC Rule 15.207:

Phase: Live / Neutral
Model No.: BE2210
Worst Case: Tx Mode

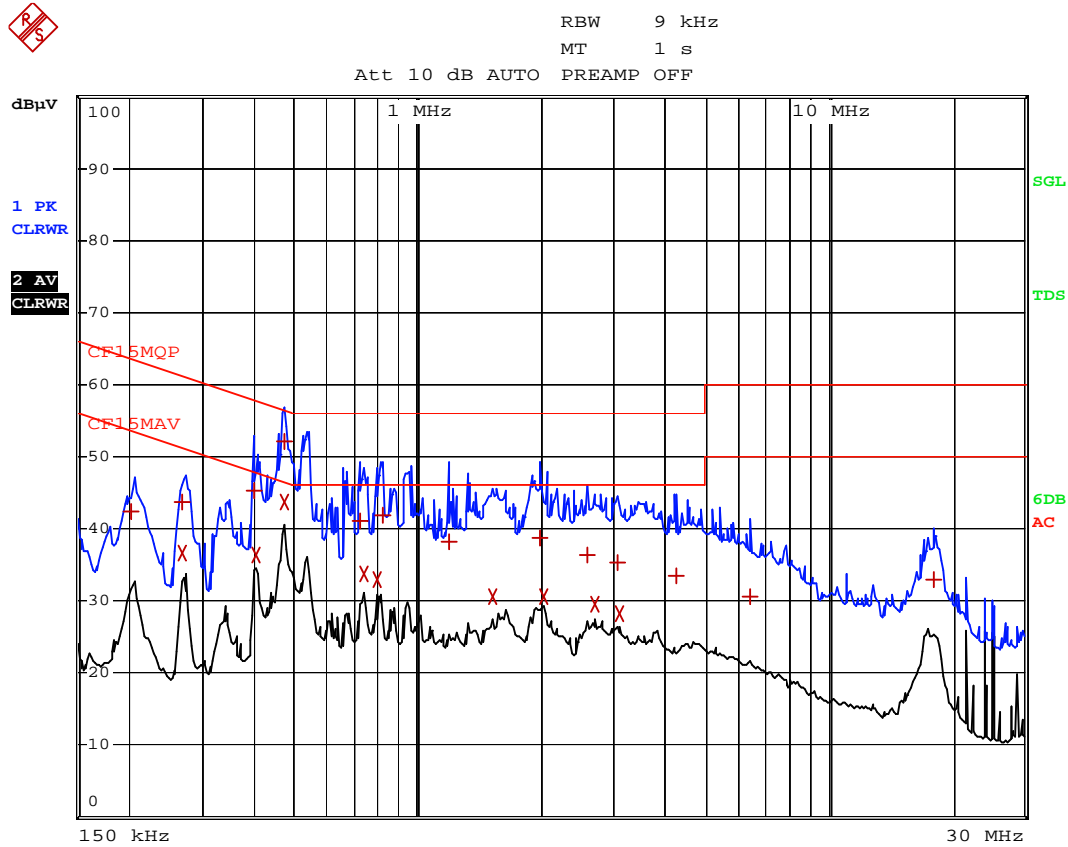

G15871B1

Date: 18.SEP.2009 14:16:45

Report No.: HK09071587-1
FCC ID: WMSBERXAUD
IC: 6693A-BERXAUD

INTERTEK TESTING SERVICES

EDIT PEAK LIST (Final Measurement Results)

Trace1: CF15MQP

Trace2: CF15MAV

Trace3: ---

	TRACE	FREQUENCY	LEVEL		DELTA	LIMIT
1	Quasi Peak	204 kHz	42.45	L1 gnd	-20.98	
1	Quasi Peak	271.5 kHz	43.71	N gnd	-17.36	
2	CISPR Average	271.5 kHz	36.72	N gnd	-14.35	
1	Quasi Peak	397.5 kHz	45.35	L1 gnd	-12.55	
2	CISPR Average	402 kHz	36.43	N gnd	-11.38	
1	Quasi Peak	469.5 kHz	52.15	L1 gnd	-4.37	
2	CISPR Average	469.5 kHz	43.74	N gnd	-2.78	
1	Quasi Peak	721.5 kHz	40.99	N gnd	-15.00	
2	CISPR Average	735 kHz	33.61	N gnd	-12.38	
2	CISPR Average	793.5 kHz	33.01	N gnd	-12.98	
1	Quasi Peak	820.5 kHz	41.78	N gnd	-14.21	
1	Quasi Peak	1.1985 MHz	38.06	N gnd	-17.93	
2	CISPR Average	1.5225 MHz	30.64	N gnd	-15.35	
1	Quasi Peak	1.9995 MHz	38.80	N gnd	-17.19	
2	CISPR Average	2.022 MHz	30.67	N gnd	-15.32	
1	Quasi Peak	2.6025 MHz	36.40	L1 gnd	-19.59	
2	CISPR Average	2.715 MHz	29.64	N gnd	-16.35	
1	Quasi Peak	3.066 MHz	35.32	N gnd	-20.67	
2	CISPR Average	3.1155 MHz	28.09	N gnd	-17.90	
1	Quasi Peak	4.2675 MHz	33.55	N gnd	-22.45	

G15871B1

Date: 18.SEP.2009 14:16:08

INTERTEK TESTING SERVICES

EDIT PEAK LIST (Final Measurement Results)

Trace1: CF15MQP

Trace2: CF15MAV

Trace3: ---

	TRACE	FREQUENCY	LEVEL dB μ V		DELTA LIMIT dB
1	Quasi Peak	6.4365 MHz	30.50	L1 gnd	-29.50
1	Quasi Peak	18.0375 MHz	32.81	N gnd	-27.18

G15871B1

Date: 18.SEP.2009 14:16:30

Report No.: HK09071587-1
FCC ID: WMSBERXAUD
IC: 6693A-BERXAUD

INTERTEK TESTING SERVICES

4.10 Radiated Emissions, FCC Ref: 15.109/ RSS-210.2.3

Applicant: BELLMAN AND SYMFON EUROPE AB

Date of Test: August 26, 2009

Model: BE2210

Worst-Case Operating Mode: Charging

**Data Table
Radiated Scan
Pursuant to FCC 15.109: Emissions Requirement**

Polarization	Frequency (MHz)	Net at 3m (dB μ V/m)	Limit at 3m (dB μ V/m)	Margin (dB)
V	34.850	33.3	40.0	-6.7
V	38.950	32.5	40.0	-7.5
V	41.050	32.0	40.0	-8.0
V	45.705	31.7	40.0	-8.3
V	53.080	31.6	40.0	-8.4
H	58.405	31.0	40.0	-9.0
H	76.046	29.0	40.0	-11.0

Notes: 1. Peak Detector Data.

2. Negative sign (-) in the margin column signify levels below the limit.

3. Only emissions significantly above equipment noise floor are reported.

INTERTEK TESTING SERVICES

Applicant: BELLMAN AND SYMFON EUROPE AB
Model: BE2210
Worst-Case Operating Mode: RX mode

Date of Test: August 26, 2009

Data Table Radiated Scan Pursuant to RSS-210: Emissions Requirement

Lowest Channel

Polar-ization	Frequency (MHz)	Reading (dB μ V)	Pre-amp (dB)	Antenna Factor (dB)	Net at 3m (dB μ V/m)	Limit at 3m (dB μ V/m)	Margin (dB)
V	2412.550	48.6	33	29.4	45.0	54.0	-9.0
H	4825.100	38.6	33	34.9	40.5	54.0	-13.5
H	7237.650	36.2	33	37.9	41.1	54.0	-12.9
H	9650.200	35.4	33	40.4	42.8	54.0	-11.2
H	12062.750	36.1	33	40.5	43.6	54.0	-10.4

Middle Channel

Polar-ization	Frequency (MHz)	Reading (dB μ V)	Pre-amp (dB)	Antenna Factor (dB)	Net at 3m (dB μ V/m)	Limit at 3m (dB μ V/m)	Margin (dB)
V	2438.300	49.0	33	29.4	45.4	54.0	-8.6
H	4876.600	38.9	33	34.9	40.8	54.0	-13.2
H	7314.900	36.6	33	37.9	41.5	54.0	-12.5
H	9753.200	35.5	33	40.4	42.9	54.0	-11.1
H	12191.500	36.5	33	40.5	44.0	54.0	-10.0

Highest Channel

Polar-ization	Frequency (MHz)	Reading (dB μ V)	Pre-amp (dB)	Antenna Factor (dB)	Net at 3m (dB μ V/m)	Limit at 3m (dB μ V/m)	Margin (dB)
V	2463.760	49.2	33	29.4	45.6	54.0	-8.4
H	4927.520	38.7	33	34.9	40.6	54.0	-13.4
H	7391.280	36.8	33	37.9	41.7	54.0	-12.3
H	9855.040	35.0	33	40.4	42.4	54.0	-11.6
H	12318.800	36.3	33	40.5	43.8	54.0	-10.2

Notes: 1. Peak Detector Data.

2. Negative sign (-) in the margin column signify levels below the limit.

3. Only emissions significantly above equipment noise floor are reported.

INTERTEK TESTING SERVICES

4.11 AC Line Conducted Emission, FCC Rule 15.107/ RSS-Gen 7.2.2:


Phase: Live / Neutral
Model No.: BE2210
Worst Case: Charging Mode



RBW 9 kHz

MT 1 s

Att 10 dB AUTO PREAMP OFF

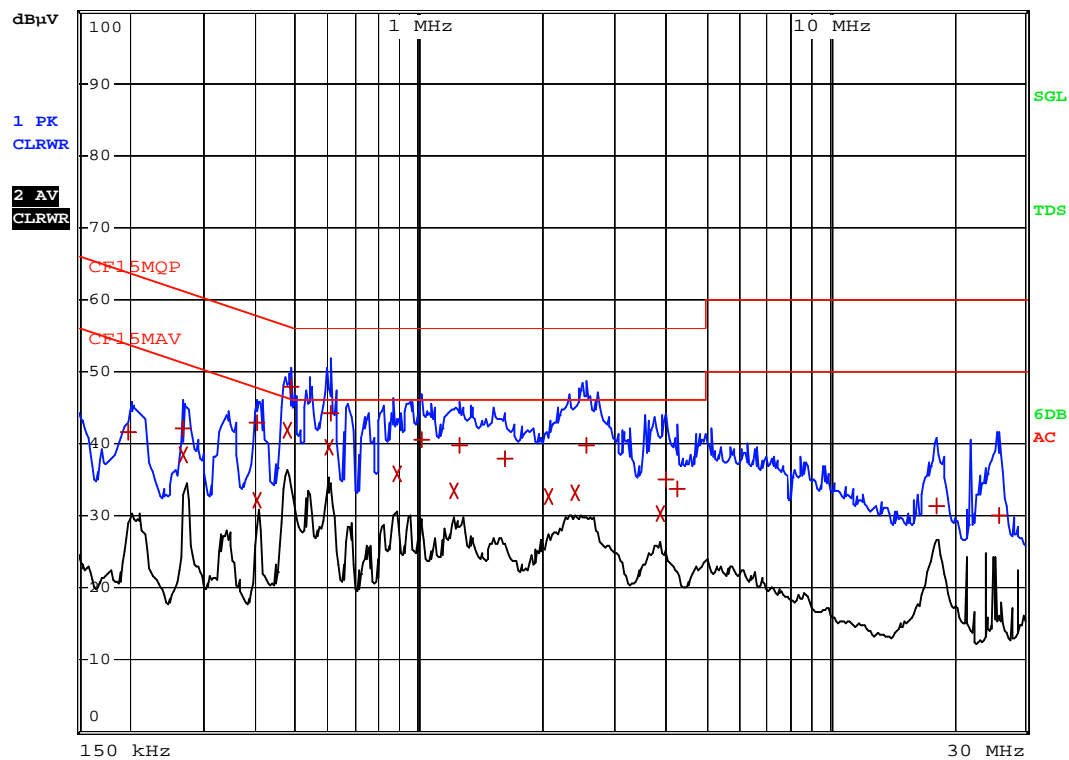

G15892B1

Date: 23.SEP.2009 11:48:48

Report No.: HK09071587-1
FCC ID: WMSBERXAUD
IC: 6693A-BERXAUD

INTERTEK TESTING SERVICES

EDIT PEAK LIST (Final Measurement Results)

Trace1: CF15MQP

Trace2: CF15MAV

Trace3: ---

	TRACE	FREQUENCY	LEVEL		DELTA	LIMIT
1	Quasi Peak	199.5 kHz	41.54	L1 gnd	-22.08	
1	Quasi Peak	267 kHz	42.13	L1 gnd	-19.07	
2	CISPR Average	271.5 kHz	38.57	N gnd	-12.49	
1	Quasi Peak	402 kHz	42.95	L1 gnd	-14.85	
2	CISPR Average	402 kHz	32.12	N gnd	-15.68	
2	CISPR Average	478.5 kHz	41.95	N gnd	-4.40	
1	Quasi Peak	487.5 kHz	47.78	N gnd	-8.42	
2	CISPR Average	604.5 kHz	39.37	N gnd	-6.62	
1	Quasi Peak	609 kHz	44.28	N gnd	-11.71	
2	CISPR Average	883.5 kHz	35.71	N gnd	-10.28	
1	Quasi Peak	1.0185 MHz	40.51	L1 gnd	-15.48	
2	CISPR Average	1.2165 MHz	33.53	N gnd	-12.46	
1	Quasi Peak	1.2615 MHz	39.87	N gnd	-16.12	
1	Quasi Peak	1.6305 MHz	37.90	N gnd	-18.09	
2	CISPR Average	2.0715 MHz	32.59	N gnd	-13.41	
2	CISPR Average	2.409 MHz	33.26	N gnd	-12.73	
1	Quasi Peak	2.5665 MHz	39.70	N gnd	-16.29	
2	CISPR Average	3.858 MHz	30.43	N gnd	-15.56	
1	Quasi Peak	4.002 MHz	34.90	N gnd	-21.09	
1	Quasi Peak	4.2765 MHz	33.78	N gnd	-22.21	

G15892B1

Date: 23.SEP.2009 11:48:03

INTERTEK TESTING SERVICES

EDIT PEAK LIST (Final Measurement Results)

Trace1: CF15MQP

Trace2: CF15MAV

Trace3: ---

	TRACE	FREQUENCY	LEVEL dB μ V		DELTA LIMIT dB
1	Quasi Peak	18.2985 MHz	31.39	L1 gnd	-28.60
1	Quasi Peak	25.782 MHz	30.14	N gnd	-29.86

G15892B1

Date: 23.SEP.2009 11:48:24

Report No.: HK09071587-1
FCC ID: WMSBERXAUD
IC: 6693A-BERXAUD


INTERTEK TESTING SERVICES

Phase: Live / Neutral
Model No.: BE2210
Worst Case: RX Mode



RBW 9 kHz
MT 1 s

Att 10 dB AUTO PREAMP OFF

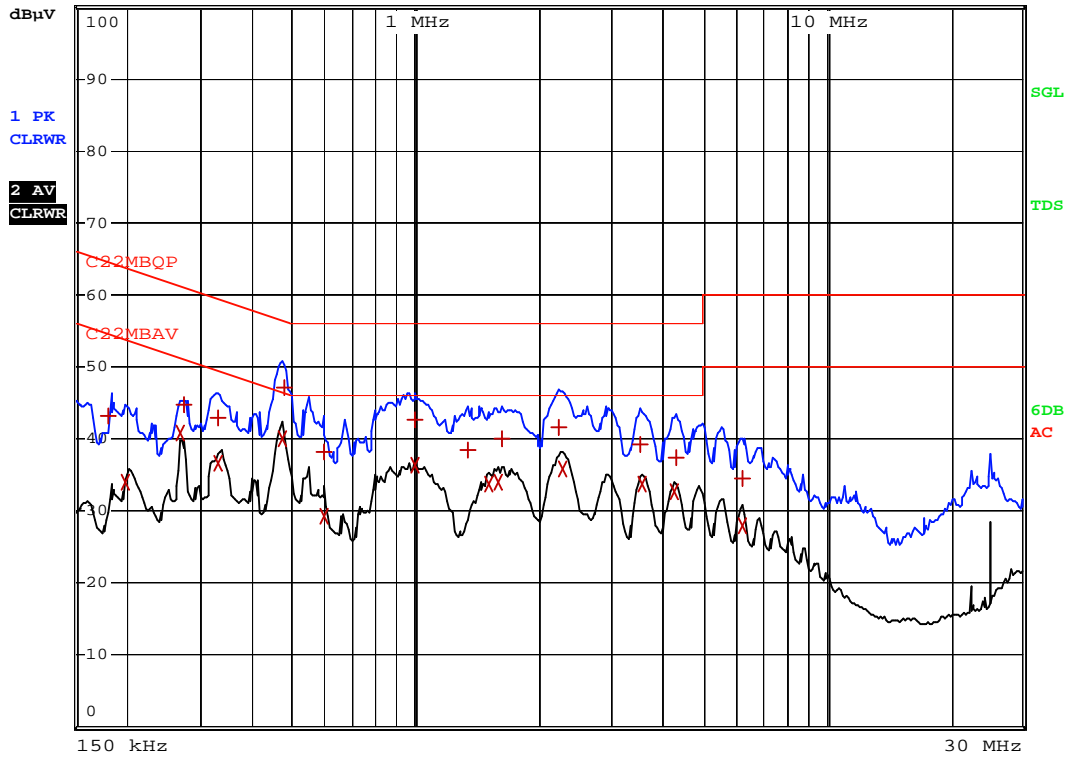

HK09071580-2 (G15802B2)

Date: 25.AUG.2009 22:08:23

Report No.: HK09071587-1
FCC ID: WMSBERXAUD
IC: 6693A-BERXAUD

INTERTEK TESTING SERVICES

EDIT PEAK LIST (Final Measurement Results)

Trace1: C22MBQP

Trace2: C22MBAV

Trace3: ---

	TRACE	FREQUENCY	LEVEL dB μ V		DELTA LIMIT dB
1	Quasi Peak	181.5 kHz	43.30	N gnd	-21.11
2	CISPR Average	199.5 kHz	34.03	L1 gnd	-19.59
2	CISPR Average	271.5 kHz	40.72	L1 gnd	-10.35
1	Quasi Peak	276 kHz	44.87	L1 gnd	-16.06
1	Quasi Peak	330 kHz	42.81	L1 gnd	-16.63
2	CISPR Average	334.5 kHz	36.62	L1 gnd	-12.71
2	CISPR Average	469.5 kHz	40.13	L1 gnd	-6.39
1	Quasi Peak	478.5 kHz	47.09	L1 gnd	-9.26
1	Quasi Peak	595.5 kHz	38.19	N gnd	-17.80
2	CISPR Average	595.5 kHz	29.39	L1 gnd	-16.60
1	Quasi Peak	991.5 kHz	42.63	L1 gnd	-13.36
2	CISPR Average	991.5 kHz	36.44	L1 gnd	-9.55
1	Quasi Peak	1.338 MHz	38.55	L1 gnd	-17.44
2	CISPR Average	1.509 MHz	33.61	L1 gnd	-12.38
2	CISPR Average	1.581 MHz	34.01	L1 gnd	-11.99
1	Quasi Peak	1.617 MHz	40.12	L1 gnd	-15.87
1	Quasi Peak	2.2425 MHz	41.71	L1 gnd	-14.29
2	CISPR Average	2.283 MHz	35.82	L1 gnd	-10.18
1	Quasi Peak	3.5295 MHz	39.23	L1 gnd	-16.76
2	CISPR Average	3.5745 MHz	33.70	L1 gnd	-12.29

HK09071580-2 (G15802B2)

Date: 25.AUG.2009 22:07:55

INTERTEK TESTING SERVICES

EDIT PEAK LIST (Final Measurement Results)

Trace1: C22MBQP

Trace2: C22MBAV

Trace3: ---

	TRACE	FREQUENCY	LEVEL	dB μ V	DELTA	LIMIT	dB
2	CISPR Average	4.2765 MHz	32.57	L1 gnd	-13.42		
1	Quasi Peak	4.326 MHz	37.44	L1 gnd	-18.55		
1	Quasi Peak	6.2295 MHz	34.50	L1 gnd	-25.49		
2	CISPR Average	6.243 MHz	28.08	L1 gnd	-21.91		

HK09071580-2 (G15802B2)

Date: 25.AUG.2009 22:08:11

Report No.: HK09071587-1
FCC ID: WMSBERXAUD
IC: 6693A-BERXAUD

INTERTEK TESTING SERVICES

5.0 **Equipment Photographs**

For electronic filing, the photographs are saved with filename: external photos.pdf and internal photos.pdf.

6.0 **Product Labelling**

For electronics filing, the FCC ID and IC label artwork and the label location are saved with filename: label.pdf.

7.0 **Technical Specifications**

For electronic filing, the block diagram and schematic of the tested EUT are saved with filename: block.pdf and circuit.pdf respectively.

8.0 **Instruction Manual**

For electronic filing, a preliminary copy of the Instruction Manual is saved with filename: manual.pdf.

This manual will be provided to the end-user with each unit sold/leased in the United States and Canada.

INTERTEK TESTING SERVICES

9.0 **Miscellaneous Information**

The miscellaneous information includes details of the test procedure and calculation of factor such as averaging factor (calculation and timing diagram).

9.1 **Calculation of Average Factor**

The duty cycle is simply the on-time divided by the period:

The duration of one cycle = $(0.021404 \times 14 \times 12)$ ms

Effective period of the cycle = 32.224ms

DC = $3.596 / 32.224 = 0.1116$

Therefore, the averaging factor is found by $20\log(0.1116) = -19.05\text{dB}$.

9.2 **Emissions Test Procedures**

The following is a description of the test procedure used by Intertek Testing Services Hong Kong Ltd. in the measurements of transmitter operating under the Part 15, Subpart C rules.

The test set-up and procedures described below are designed to meet the requirements of ANSI C63.4 - 2003. A typical or an unmodulated CW signal at the operating frequency of the EUT has been supplied to the EUT for all measurements. Such a signal is supplied by a signal generator and an antenna in close proximity to the EUT. The signal level is sufficient to stabilize the local oscillator of the EUT.

The transmitting equipment under test (EUT) is placed on a wooden turntable which is four feet in diameter and approximately one meter in height above the ground plane. During the radiated emissions test, the turntable is rotated and any cables leaving the EUT are manipulated to find the configuration resulting in maximum emissions. The EUT is adjusted through all three orthogonal axis to obtain maximum emission levels. The antenna height and polarization are also varied during the testing to search for maximum signal levels. The height of the antenna is varied from one to four meters.

Detector function for radiated emissions is in peak mode. Average readings, when required, are taken by measuring the duty cycle of the equipment under test and subtracting the corresponding amount in dB from the measured peak readings. A detailed description for the calculation of the average factor can be found in Exhibit 8.3.

The frequency range scanned is from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or 40 GHz, whichever is lower. For line conducted emissions, the range scanned is 150 kHz to 30 MHz.

INTERTEK TESTING SERVICES

9.2 Emissions Test Procedures (cont'd)

The EUT is warmed up for 15 minutes prior to the test.

AC power to the unit is varied from 85% to 115% nominal and variation in the fundamental emission field strength is recorded. If battery powered, a new, fully charged battery is used.

Conducted measurements were made as described in ANSI C63.4 - 2003.

The IF bandwidth used for measurement of radiated signal strength was 100 kHz or greater when frequency is below 1000 MHz. Where pulsed transmissions of short enough pulse duration warrant, a greater bandwidth is selected according to the recommendations of Hewlett Packard Application Note 150-2. A discussion of whether pulse desensitivity is applicable to this unit is included in this report (See Exhibit 8.1). Above 1000 MHz, a resolution bandwidth of 1 MHz is used.

Transmitter measurements are normally conducted at a measurement distance of three meters. However, to assure low enough noise floor in the forbidden bands and above 1 GHz, signals are acquired at a distance of one meter or less. All measurements are extrapolated to three meters using inverse scaling, unless otherwise reported. Measurements taken at a closer distance are so marked.

10.0 Confidentiality Request

For electronic filing, a preliminary copy of the confidentiality request is saved with filename: request.pdf.

INTERTEK TESTING SERVICES

11.0 Equipment List

1) Radiated Emissions Test

Equipment	EMI Test Receiver	Biconical Antenna	Spectrum Analyzer
Registration No.	EW-0014	EW-0954	EW-2188
Manufacturer	R&S	EMCO	AGILENTTECH
Model No.	ESVS30	3104C	E4407B
Calibration Date	Jun. 01, 2009	Sep. 30, 2008	Dec. 18, 2008
Calibration Due Date	Jun. 01, 2010	Mar. 30, 2010	Dec. 18, 2009

Equipment	Double Ridged Guide Antenna	Log Periodic Antenna
Registration No.	EW-1015	EW-0446
Manufacturer	EMCO	EMCO
Model No.	3115	3146
Calibration Date	Jul. 28, 2008	Oct. 02, 2008
Calibration Due Date	Jan. 28, 2010	Apr. 02, 2010

2) Conducted Emissions Test

Equipment	EMI Test Receiver	Pulse Limiter	LISN
Registration No.	EW-2251	EW-0698	EW-0192
Manufacturer	R&S	R&S	R&S
Model No.	ESCI	ESH3-Z2	ESH3-Z5
Calibration Date	Oct. 28, 2008	Feb. 03, 2009	Nov. 12, 2008
Calibration Due Date	Oct. 28, 2009	Feb. 03, 2010	Nov. 12, 2009

3) 15.247 Test

Equipment	Spectrum Analyzer
Registration No.	EW-2249
Manufacturer	ROHDESCHWARZ
Model No.	FSP30
Calibration Date	Jun. 25, 2009
Calibration Due Date	Jun. 25, 2010