

Prüfbericht-Nr.: <i>Test report no.:</i>	CN23WJ7J 001	Auftrags-Nr.: <i>Order no.:</i>	168424086	Seite 1 von 25 Page 1 of 25
Kunden-Referenz-Nr.: <i>Client reference no.:</i>	N/A	Auftragsdatum: <i>Order date:</i>	2023-04-25	
Auftraggeber: <i>Client:</i>	Shenzhen HAC Telecom Technology Co., LTD Floor 9, Block A, Building 1, Shenzhen International Innovation Valley, Xingke 1st Street, Nanshan District, Shenzhen, China			
Prüfgegenstand: <i>Test item:</i>	LoRaWAN Gateway			
Bezeichnung / Typ-Nr.: <i>Identification / Type no.:</i>	HAC-GWW1-M (Trademark: HAC)			
Auftrags-Inhalt: <i>Order content:</i>	Type Test			
Prüfgrundlage: <i>Test specification:</i>	CFR47 FCC Part 15: Subpart B Section 15.107 CFR47 FCC Part 15: Subpart B Section 15.109 ICES-003 Issue 7 October 2020			
Wareneingangsdatum: <i>Date of sample receipt:</i>	2021-10-25	Refer to photos documents		
Prüfmuster-Nr.: <i>Test sample no.:</i>	A003147238			
Prüfzeitraum: <i>Testing period:</i>	2021-11-04 – 2021-11-08			
Ort der Prüfung: <i>Place of testing:</i>	TÜV Rheinland (Shenzhen) Co., Ltd.			
Prüflaboratorium: <i>Testing laboratory:</i>	TÜV Rheinland (Shenzhen) Co., Ltd.			
Prüfergebnis*: <i>Test result*:</i>	Pass			
geprüft von: <i>tested by:</i>	genehmigt von: <i>authorized by:</i>			
Datum: <i>Date:</i> 2023-05-09				
	Signed by: Alex Lan		Signed by: Hardy Suo	
Stellung / Position	Project Manager	Stellung / Position	Reviewer	
Sonstiges / Other:	FCC ID: WMUHAC-GWW1-M This report is based on original report CN21RU4P 001 for RAKwireless with FCC ID: 2AF6B-RAK5146, the FCC ID: 2AF6B-RAK5146 for RAK has take a FC ID change procedure to FCC ID: WMUHAC-MLWR for HAC, all the test data are derived from the original report CN21RU4P 001.			
Zustand des Prüfgegenstandes bei Anlieferung: <i>Condition of the test item at delivery:</i>	Prüfmuster vollständig und unbeschädigt <i>Test item complete and undamaged</i>			
* Legende:	1 = sehr gut P(ass) = entspricht o.g. Prüfgrundlage(n)	2 = gut F(ail) = entspricht nicht o.g. Prüfgrundlage(n)	3 = befriedigend N/A = nicht anwendbar	4 = ausreichend N/T = nicht
* Legend:	1 = very good P(ass) = passed a.m. test specification(s)	2 = good F(ail) = failed a.m. test specification(s)	3 = satisfactory N/A = not applicable	4 = sufficient N/T = not tested
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. <i>This test report only relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.</i>				

V05

Prüfbericht - Nr.: CN23WJ7J 001
Test report no.

Seite 2 von 25
Page 2 of 25

Test Summary

5.1 Conducted emissions

RESULT: Pass

5.2 Radiated emissions

RESULT: Pass

Contents

1	GENERAL REMARKS	4
1.1	COMPLEMENTARY MATERIALS.....	4
2	TEST SITES.....	4
2.1	TEST FACILITIES	4
2.2	LIST OF TEST AND MEASUREMENT INSTRUMENTS	5
2.3	TRACEABILITY	6
2.4	CALIBRATION.....	6
2.5	MEASUREMENT UNCERTAINTY	6
2.6	LOCATION OF ORIGINAL DATA.....	6
2.7	STATUS OF FACILITY USED FOR TESTING	6
3	GENERAL PRODUCT INFORMATION	7
3.1	PRODUCT FUNCTION AND INTENDED USE	7
3.2	RATINGS AND SYSTEM DETAILS.....	7
3.3	INDEPENDENT OPERATION MODES.....	8
3.4	NOISE GENERATING AND NOISE SUPPRESSING PARTS	8
3.5	SUBMITTED DOCUMENTS.....	8
4	TEST SET-UP AND OPERATION MODES.....	9
4.1	PRINCIPLE OF CONFIGURATION SELECTION	9
4.2	TEST OPERATION AND TEST SOFTWARE	9
4.3	SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT	9
4.4	COUNTERMEASURES TO ACHIEVE EMC COMPLIANCE	9
4.5	TEST SETUP DIAGRAM	10
5	TEST RESULTS	11
5.1	CONDUCTED EMISSIONS	11
5.2	RADIATED EMISSION	14
6	PHOTOGRAPHS OF THE TEST SET-UP	23
7	LIST OF TABLES.....	25
8	LIST OF PHOTOGRAPHS.....	25

Prüfbericht - Nr.: CN23WJ7J 001
Test report no.

Seite 4 von 25
Page 4 of 25

1 General Remarks

1.1 Complementary Materials

All attachments are integral parts of this test report. This applies especially to the following appendix:
None.

2 Test Sites

2.1 Test Facilities

TÜV Rheinland (Shenzhen) Co., Ltd.

No.362, Huanguan Middle Road, Songyuansha Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China/518110

FCC Registration No.: 694916

IC Registration No.: 25069, CAB identifier: CN0078

Prüfbericht - Nr.: CN23WJ7J 001
Test report no.

Seite 5 von 25
Page 5 of 25

2.2 List of Test and Measurement Instruments

Table 1: List of Test and Measurement Equipment

Radiated Emission Testing				
Equipment	Manufacturer	Model No.	Serial No.	Cal. Until
3m SAC	ETS-Lindgren	SAC3	CT001632-Q1362	2024-04-26
EMI Test Receiver	R&S	ESR7	102111	2023-12-01
Horn Antenna	R&S	HF907	102706	2023-08-07
Preamplifier (1-18GHz)	FIT	SCU-18F	180077	2023-08-13
Active magnetic loop antenna	SCHWARZBECK	FMZB1519B	00080	2023-09-08
Trilog-Broadband antenna	SCHWARZBECK	VULB9168	0945	2023-12-12
EMC32 test software	R&S	EMC32(Ver.10.50.00)	N/A	N/A
Conducted Emissions testing				
Equipment	Manufacturer	Model No.	Serial No.	Cal. Until
EMI Test Receiver	R&S	ESR3	102428	2023-07-31
Artificial Mains Network	R&S	ENV216	102333	2023-08-01
Impedance Stabilisation Network	R&S	ENY81	100323	2023-08-01
EMC32 test software	R&S	EMC32(Ver.10.50.00)	N/A	N/A

2.3 Traceability

All measurement equipment calibrations are traceable to NIM (National Institute of Metrology) or where calibration is performed in other countries, to equivalent nationally recognized standards organizations.

2.4 Calibration

Equipment requiring calibration is calibrated periodically by the manufacturer or according to manufacturer's specifications. Additionally all equipment is verified for proper performance on a regular basis using in house standards or comparisons.

2.5 Measurement Uncertainty

The estimated combined standard uncertainty for radiated emissions and conducted emissions measurements as below table

Test	Parameters	uncertainty
Conducted Emission	Conducted emission 150kHz-30MHz (AMN)	± 3.70 dB ± 3.30 dB
Radiated Emission (3m SAC)	Radiated emission 30MHz-1GHz	± 4.52 dB
	Radiated emission 1GHz-18GHz	± 4.37 dB

2.6 Location of Original Data

The original copies of all test data taken during actual testing were at this report and delivered to the applicant. A copy has been retained in the TÜV Rheinland (Shenzhen) file for certification follow-up purposes.

2.7 Status of Facility Used for Testing

The TÜV Rheinland (Shenzhen) Co., Ltd. Test facility located at No.362, Huanguan Middle Road, Songyuansha Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China/518110 is listed on the US Federal Communications Commission list of facilities approved to perform measurements.

3 General Product Information

3.1 Product Function and Intended Use

The EUT is a WisGate Edge Pro, which supports 2.4GHz Wi-Fi, Lora, GNSS and LTE functions.

Note: This product contains transmitter modules.

LTE module Model: EG95NA	Contains FCC ID: XMR201807EG95NA
2.4GHz Wi-Fi module Model: RAK634	Contains FCC ID: WMUHAC-WF
Lora module Model: RAK5146	Contains FCC ID: WMUHAC-MLWR

For details refer to the User Manual, Technical Description and Circuit Diagram.

3.2 Ratings and System Details

Table 2: Technical Specification of EUT

General Information of EUT	Value
Kind of Equipment	LoRaWAN Gateway
Type Designation	HAC-GWW1-M
Trade Mark	HAC
Input Voltage	DC 12V via DC source or DC 37 ~57V via POE adapter
Testing Voltage	AC 120V, 60Hz or DC 12V
POE Adapter information	Model:R012-4800500 Input: AC 100-240V, 50/60Hz, 0.6A Max Output: DC 48.0V, 0.5A 24.0W

3.3 Independent Operation Modes

The basic operation modes are:

A, On, WIFI link + LTE link + Lora link + GNSS link, powered by DC source

B, On, WIFI link + LTE link + Lora link + GNSS link, powered by POE adapter

3.4 Noise Generating and Noise Suppressing Parts

Refer to Circuit Diagram for further details.

3.5 Submitted Documents

- | | |
|-----------------|------------------|
| - Block Diagram | - Photo Document |
| - Schematics | - User Manual |

4 Test Set-up and Operation Modes

4.1 Principle of Configuration Selection

Emission: The equipment under test (EUT) was configured to measure its highest possible radiation level. The test modes were adapted accordingly in reference to the instructions for use.

4.2 Test Operation and Test Software

Test operation refers to test setup in chapter 5. All testing were performed according to the procedures in ANSI C63.4: 2014.

4.3 Special Accessories and Auxiliary Equipment

Table 3: List of Accessories and Auxiliary Equipment

Description	Manufacturer	Model No.	Serial Number
Wideband Radio Communication Tester	Rohde & Schwarz	CMW500	166305
Portable Laptop	Lenovo	ThinkPad T480	10Q67059

4.4 Countermeasures to Achieve EMC Compliance

The test sample which has been tested contained the noise suppression parts as described in the Technical Construction File (TCF).

No additional measures were employed to achieve compliance.

4.5 Test Setup Diagram

Diagram of Measurement Configuration for Radiation Test (Below 1GHz)

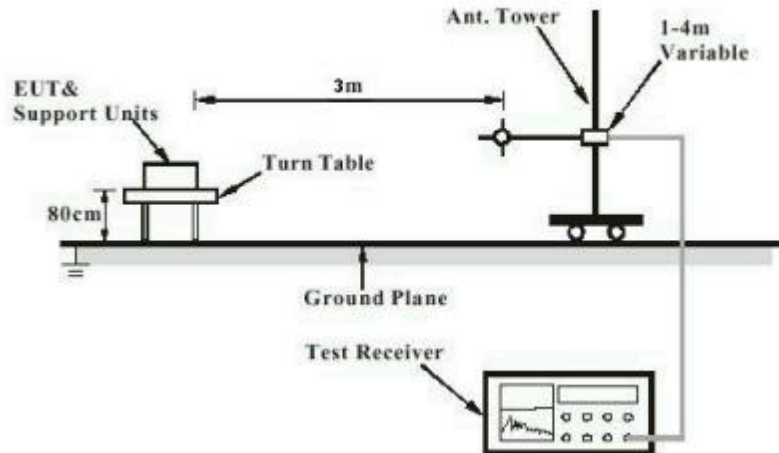


Diagram of Measurement Configuration for Radiation Test (Above 1GHz)


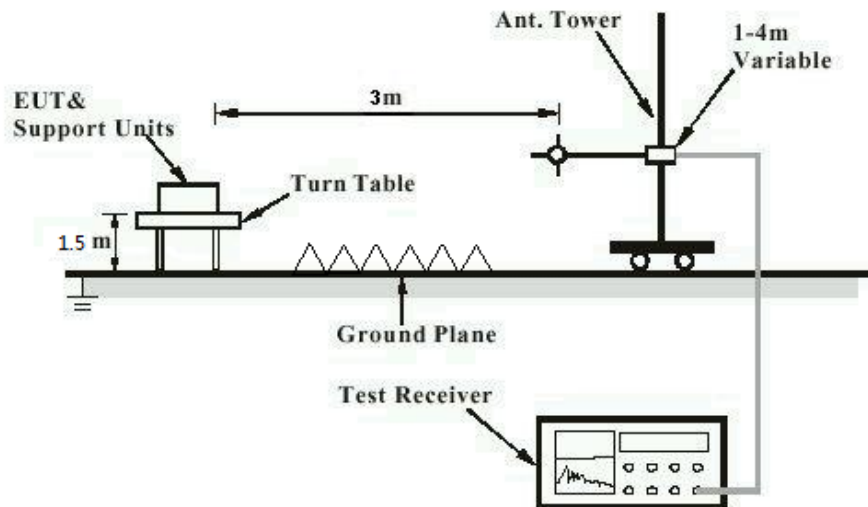


Diagram of Measurement Configuration for Mains Conduction Measurement

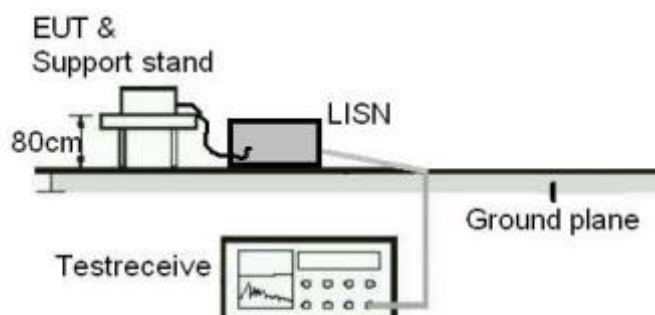

5 Test Results

5.1 Conducted emissions

RESULT:

Pass

Test Specification

Test standard	: FCC Part 15.107(a) ICES-003 Issue 7, Clause 3.2.1
Basic standard	: ANSI C63.4: 2014
Frequency range	: 150KHz - 30MHz
Classification	: Class B
Limit	: FCC Part 15.107(a) & ICES-003 Table 1
Kind of test site	: Shielded Room

Test Setup


Date of testing	: 2021-11-04
Input voltage	: AC 120V, 60Hz
Operation mode	: B
Earthing	: Connected
Ambient temperature	: 24.5 °C
Relative humidity	: 57 %
Atmospheric pressure	: 101 kPa

Prüfbericht - Nr.: CN23WJ7J 001
Test report no.

Seite 12 von 25
Page 12 of 25

EUT Information

EUT Name: LoRaWAN Gateway
Model: WMUHAC-GWW1-M
Test Mode: operating, POE
Test Voltage: AC 120V/60Hz
Test By: Kevin Zhou
Review By: Gary Chen
Remark: SR1

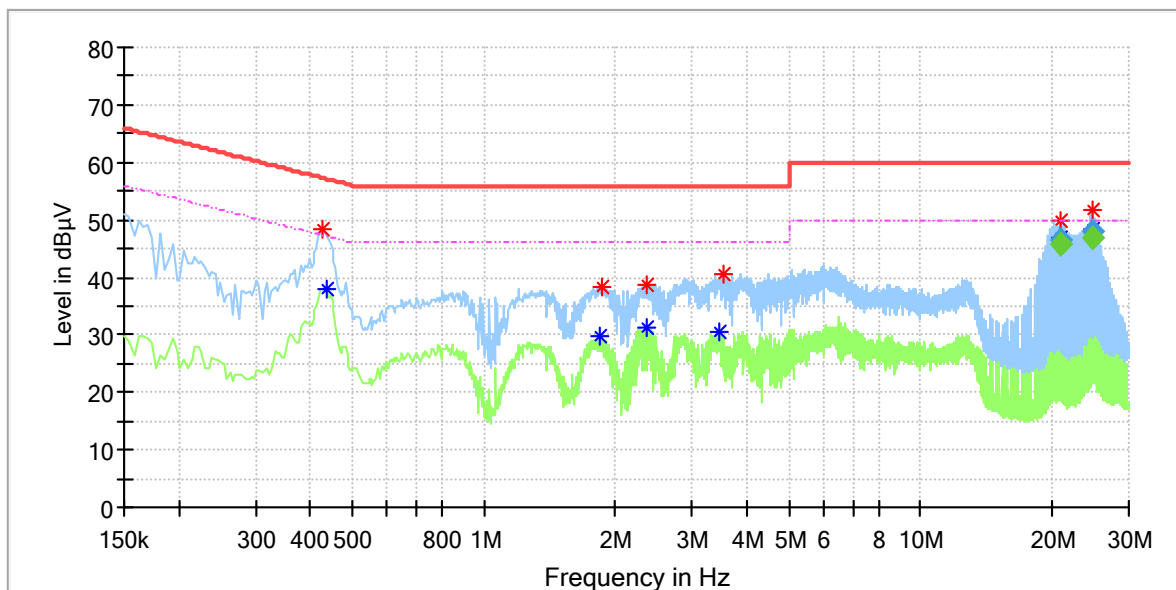

Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Line	Corr. (dB)
0.426000	48.33	---	57.33	9.00	L1	9.7
0.438000	---	37.92	47.10	9.18	L1	9.7
1.844000	---	29.62	46.00	16.38	L1	9.8
1.872000	38.48	---	56.00	17.52	L1	9.8
2.360000	---	31.18	46.00	14.82	L1	9.8
2.368000	38.87	---	56.00	17.13	L1	9.8
3.464000	---	30.66	46.00	15.34	L1	9.9
3.532000	40.50	---	56.00	15.50	L1	9.9
21.042500	49.90	---	60.00	10.10	L1	10.3
21.042500	---	47.01	50.00	2.99	L1	10.3
24.822500	51.64	---	60.00	8.36	L1	10.4
24.822500	---	48.20	50.00	1.80	L1	10.4

Final_Result


Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
21.042500	46.35	---	60.00	13.65	1000.0	9.000	L1	10.3
21.042500	---	45.92	50.00	4.08	1000.0	9.000	L1	10.3
24.822500	---	46.82	50.00	3.18	1000.0	9.000	L1	10.4
24.822500	48.05	---	60.00	11.95	1000.0	9.000	L1	10.4

Prüfbericht - Nr.: CN23WJ7J 001
Test report no.

Seite 13 von 25
Page 13 of 25

EUT Information

EUT Name: LoRaWAN Gateway
Model: WMUHAC-GWW1-M
Test Mode: operating, POE
Test Voltage: AC 120V/60Hz
Test By: Kevin Zhou
Review By: Gary Chen
Remark: SR1

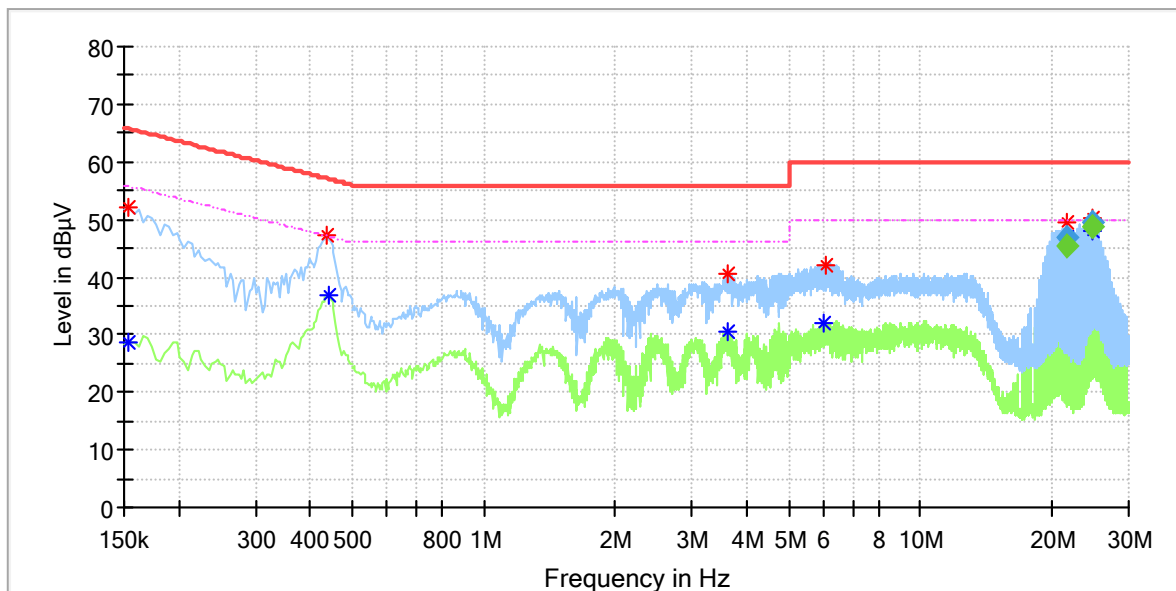

Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Line	Corr. (dB)
0.154000	---	28.73	55.78	27.06	L1	9.6
0.154000	51.94	---	65.78	13.84	L1	9.6
0.438000	47.09	---	57.10	10.01	L1	9.7
0.442000	---	36.66	47.02	10.36	L1	9.7
3.624000	---	30.35	46.00	15.65	L1	9.9
3.636000	40.43	---	56.00	15.57	L1	9.9
6.032000	---	32.00	50.00	18.00	L1	10.0
6.100000	42.09	---	60.00	17.91	L1	10.0
21.742500	---	46.74	50.00	3.26	L1	10.3
21.746500	49.37	---	60.00	10.63	L1	10.3
24.818500	---	48.14	50.00	1.86	L1	10.4
24.818500	50.25	---	60.00	9.75	L1	10.4

Final_Result

Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
21.742500	---	45.56	50.00	4.44	1000.0	9.000	L1	10.3
21.746500	46.81	---	60.00	13.19	1000.0	9.000	L1	10.3
24.818500	---	47.62	50.00	2.38	1000.0	9.000	L1	10.4
24.818500	49.31	---	60.00	10.69	1000.0	9.000	L1	10.4

Prüfbericht - Nr.: CN23WJ7J 001
Test report no.

Seite 14 von 25
Page 14 of 25

5.2 Radiated Emission

RESULT:

Pass

Test Specification

Test standard	: FCC Part 15.109(a) ICES-003 Issue 7, Clause 3.2.2
Basic standard	: ANSI C63.4: 2014
Frequency range	: 30MHz to 5 th highest fundamental frequency
Classification	: Class B
Limit	: FCC Part 15.109(a) ICES-003 Table 2 & Table 4
Kind of test site	: 3m Semi-anechoic Chamber & 3m Full-anechoic Chamber

Test Setup

Date of testing	: 2021-11-08
Input voltage	: AC 120V, 60Hz or DC 12V
Operation mode	: A, B
Earthing	: Connected
Ambient temperature	: 26 °C
Relative humidity	: 54 %
Atmospheric pressure	: 101 kPa

Remark 1: The limit of below radiated emission test data is from FCC part 15.109, it also meet the limit of ICES-003 issue 7.


Remark 2: The host has been evaluated according to modular: WisLink LPWAN Concentrator with C2PC (FCC ID: WMUHAC-MLWR) procedure in test report CN23WJ7J 002 and the Radiated Spurious Emissions was carried out within frequency range 9 kHz to the fifth harmonics, refer to CN23WJ7J 002 for details of measurement results.

Prüfbericht - Nr.: CN23WJ7J 001
Test report no.

Seite 15 von 25
Page 15 of 25

EUT Information

EUT Name: LoRaWAN Gateway
Model: WMUHAC-GWW1-M
Test Mode: operating,DC
Test Voltage: DC 12V
Test By: Kevin Zhou
Review By: Gary Chen
Remark: 3m Chamber

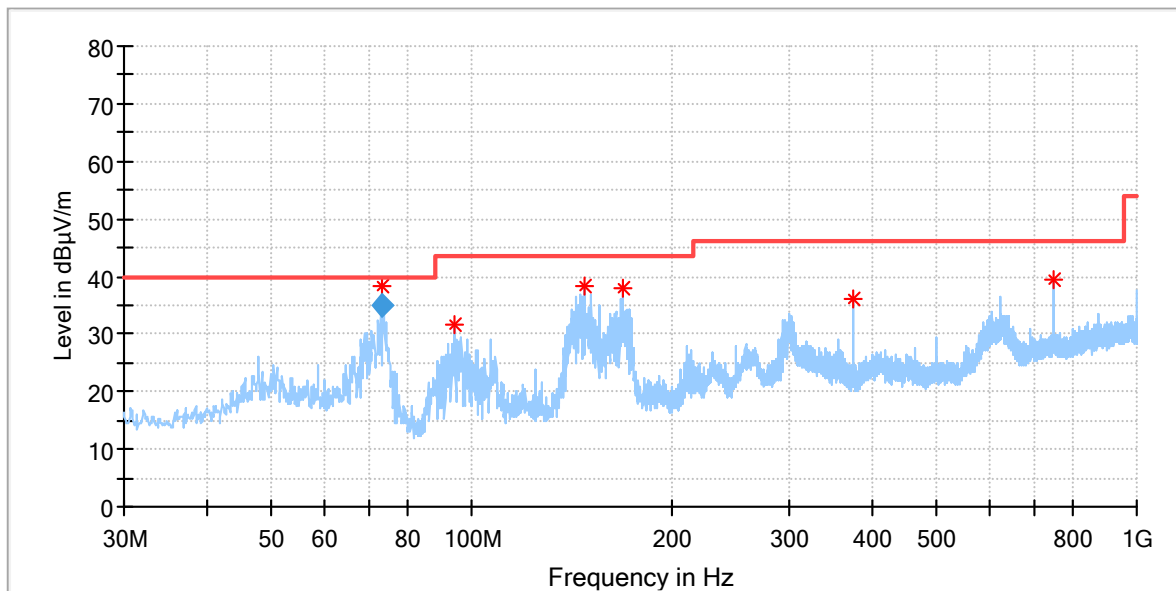

Critical_Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
73.185000	38.33	40.00	1.67	200.0	H	103.0	17.4
94.311000	31.68	43.50	11.82	200.0	H	344.0	16.2
148.049000	38.48	43.50	5.02	200.0	H	257.0	20.4
168.710000	37.81	43.50	5.69	200.0	H	130.0	21.6
375.029000	35.91	46.00	10.09	100.0	H	358.0	22.8
750.031000	39.42	46.00	6.58	200.0	H	114.0	30.6

Final_Result


Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
73.185000	35.06	40.00	4.94	1000.0	120.000	200.0	H	103.0	17.4

Prüfbericht - Nr.: CN23WJ7J 001
Test report no.

Seite 16 von 25
Page 16 of 25

EUT Information

EUT Name: LoRaWAN Gateway
Model: WMUHAC-GWW1-M
Test Mode: operating,DC
Test Voltage: DC 12V
Test By: Kevin Zhou
Review By: Gary Chen
Remark: 3m Chamber

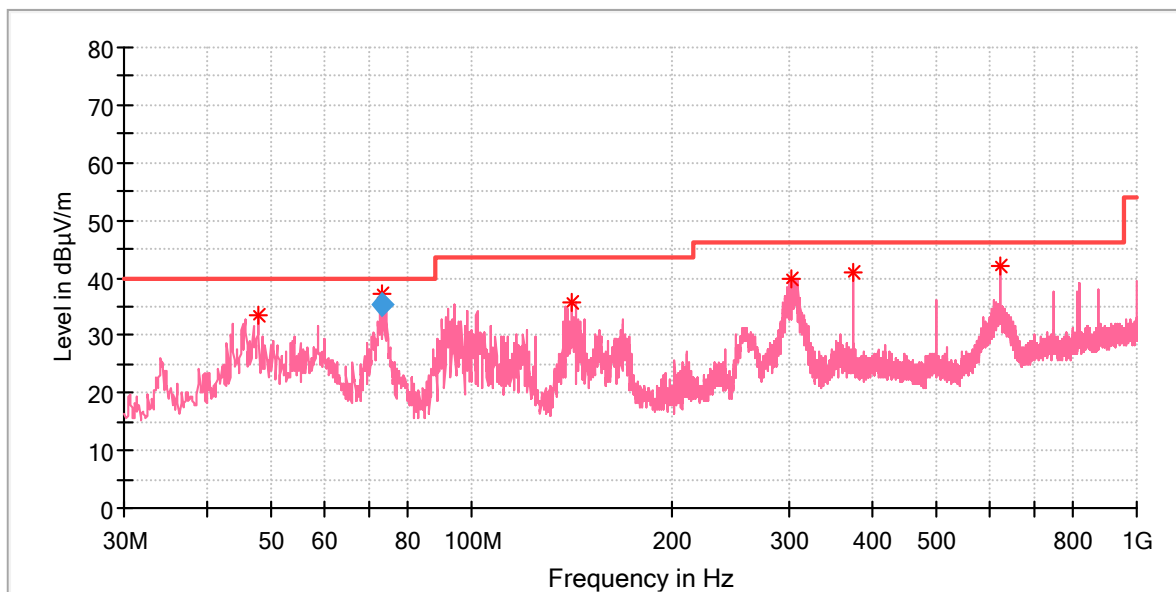

Critical_Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
47.751000	33.53	40.00	6.47	100.0	V	78.0	21.3
73.225000	37.32	40.00	2.68	200.0	V	29.0	17.4
141.162000	35.62	43.50	7.88	100.0	V	203.0	20.2
303.346000	39.87	46.00	6.13	100.0	V	0.0	21.0
375.029000	41.05	46.00	4.95	100.0	V	274.0	22.8
624.998000	41.95	46.00	4.05	100.0	V	305.0	27.5

Final_Result


Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
73.225000	35.33	40.00	4.67	1000.0	120.000	200.0	V	29.0	17.3

Prüfbericht - Nr.: CN23WJ7J 001
Test report no.

Seite 17 von 25
Page 17 of 25

EUT Information

EUT Name: LoRaWAN Gateway
Model: WMUHAC-GWW1-M
Test Mode: operating, POE
Test Voltage: AC 120V/60Hz
Test By: Kevin Zhou
Review By: Gary Chen
Remark: 3m Chamber

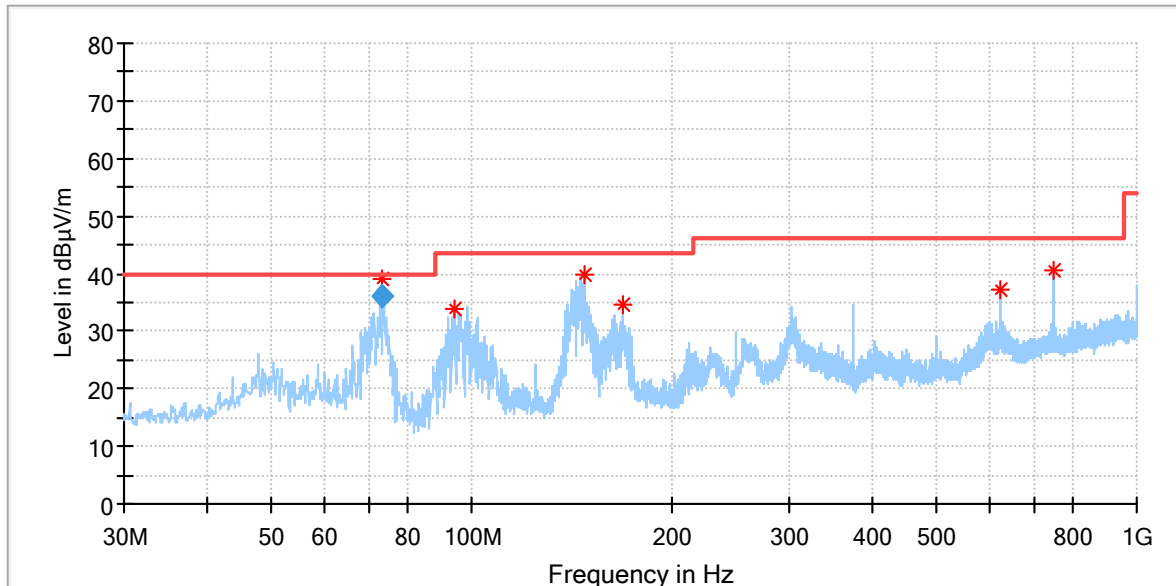

Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
73.185000	39.08	40.00	0.92	200.0	H	100.0	17.4
94.311000	33.92	43.50	9.58	200.0	H	164.0	16.2
148.049000	39.85	43.50	3.65	200.0	H	109.0	20.4
168.710000	34.63	43.50	8.87	200.0	H	137.0	21.6
624.998000	37.26	46.00	8.74	200.0	H	346.0	27.5
750.031000	40.41	46.00	5.59	200.0	H	114.0	30.6

Final_Result


Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
73.185000	36.08	40.00	3.92	1000.0	120.000	200.0	H	100.0	17.4

Prüfbericht - Nr.: CN23WJ7J 001
Test report no.

Seite 18 von 25
Page 18 of 25

EUT Information

EUT Name: LoRaWAN Gateway
Model: WMUHAC-GWW1-M
Test Mode: operating,POE
Test Voltage: AC 120V/60Hz
Test By: Kevin Zhou
Review By: Gary Chen
Remark: 3m Chamber

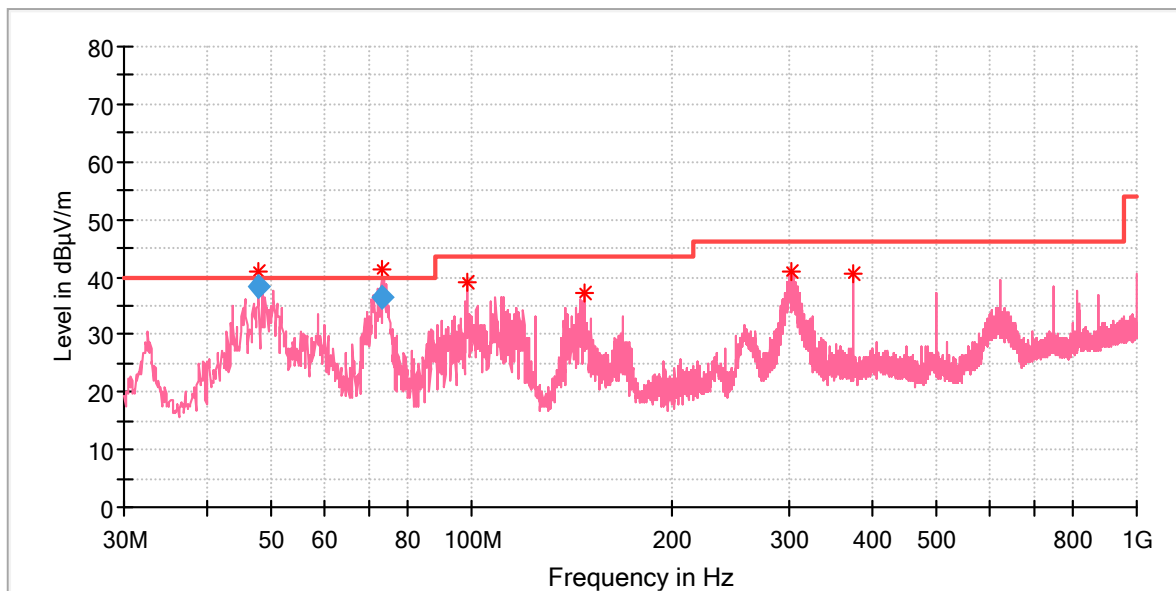

Critical_Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
47.811000	41.00	40.00	-1.00	100.0	V	89.0	21.3
73.185000	41.23	40.00	-1.23	100.0	V	195.0	17.4
98.385000	39.20	43.50	4.30	200.0	V	258.0	16.9
148.049000	37.38	43.50	6.12	100.0	V	289.0	20.4
302.085000	40.94	46.00	5.06	100.0	V	345.0	20.9
375.029000	40.73	46.00	5.27	100.0	V	292.0	22.8

Final_Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
47.811000	38.20	40.00	1.80	1000.0	120.000	100.0	V	89.0	21.4
73.185000	36.35	40.00	3.65	1000.0	120.000	100.0	V	195.0	17.4


Prüfbericht - Nr.: CN23WJ7J 001
Test report no.

Seite 19 von 25
Page 19 of 25

EUT Information

EUT Name: LoRaWAN Gateway
Model: WMUHAC-GWW1-M
Test Mode: operating,DC
Test Voltage: DC 12V
Test By: Kevin Zhou
Review By: Gary Chen
Remark: 3m Chamber

Level in dB μ V/m

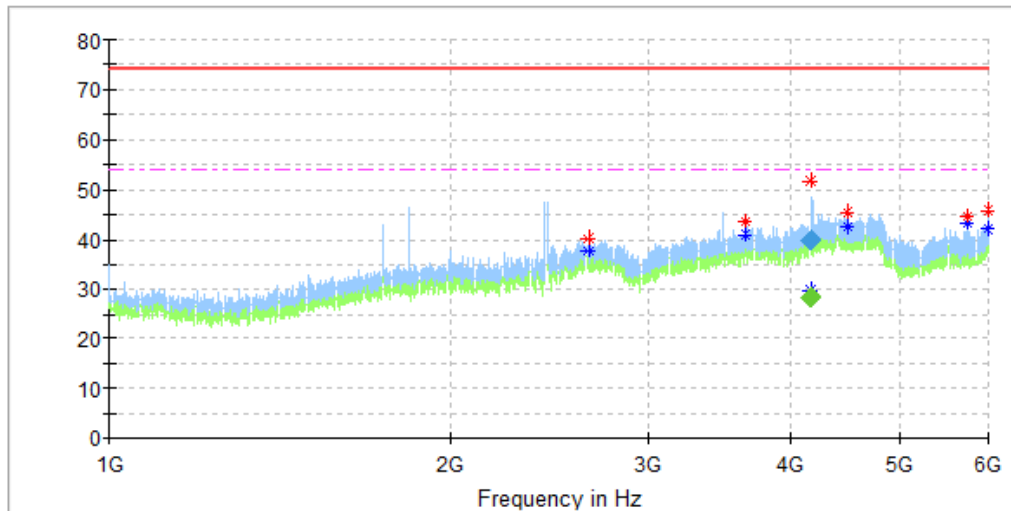

Critical_Freqs

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2658.500000	40.21	---	74.00	33.79	100.0	H	252.0	-3.2
2658.500000	---	37.48	54.00	16.52	100.0	H	252.0	-3.2
3656.000000	43.42	---	74.00	30.58	100.0	H	4.0	-0.1
3656.000000	---	41.05	54.00	12.95	100.0	H	4.0	-0.1
4183.000000	51.64	---	74.00	22.36	100.0	H	8.0	1.2
4183.600000	---	29.66	54.00	24.34	100.0	H	6.0	1.2
4507.500000	45.56	---	74.00	28.44	100.0	H	336.0	2.1
4507.500000	---	42.24	54.00	11.76	100.0	H	336.0	2.1
5750.500000	44.69	---	74.00	29.31	100.0	H	350.0	0.7
5750.500000	---	43.34	54.00	10.66	100.0	H	350.0	0.7
6000.000000	45.95	---	74.00	28.05	100.0	H	247.0	2.5
6000.000000	---	42.06	54.00	11.94	100.0	H	247.0	2.5

Final_Result

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4183.000000	39.92	---	74.00	34.08	100.0	H	8.0	1.2
4183.600000	---	28.41	54.00	25.59	100.0	H	6.0	1.2


Prüfbericht - Nr.: CN23WJ7J 001
Test report no.

Seite 20 von 25
Page 20 of 25

EUT Information

EUT Name: LoRaWAN Gateway
Model: WMUHAC-GWW1-M
Test Mode: operating,DC
Test Voltage: DC 12V
Test By: Kevin Zhou
Review By: Gary Chen
Remark: 3m Chamber

Level in dB μ V/m

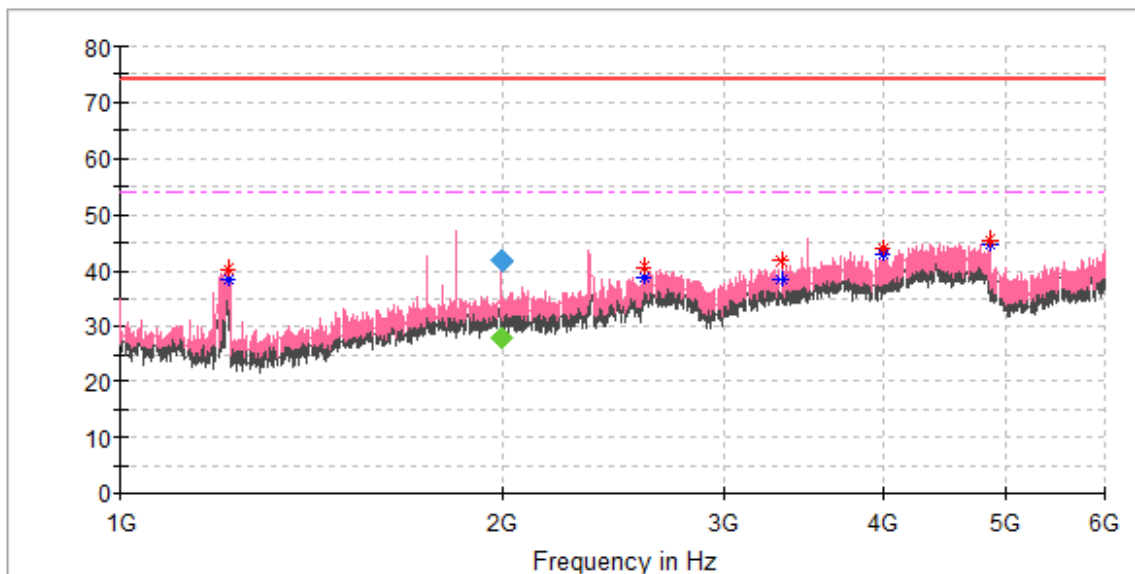

Critical_Freqs

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1218.500000	40.22	---	74.00	33.78	100.0	V	145.0	-14.1
1218.500000	---	38.18	54.00	15.82	100.0	V	145.0	-14.1
1999.600000	41.95	---	74.00	32.05	100.0	V	169.0	-7.4
2000.100000	---	27.59	54.00	26.41	100.0	V	161.0	-7.4
2598.000000	40.57	---	74.00	33.43	100.0	V	316.0	-3.8
2598.000000	---	38.53	54.00	15.47	100.0	V	316.0	-3.8
3327.500000	41.59	---	74.00	32.41	100.0	V	121.0	-1.8
3327.500000	---	38.30	54.00	15.70	100.0	V	121.0	-1.8
4000.000000	43.90	---	74.00	30.10	100.0	V	211.0	-0.1
4000.500000	---	42.87	54.00	11.13	100.0	V	211.0	-0.1
4874.500000	45.50	---	74.00	28.50	100.0	V	200.0	1.3
4874.500000	---	44.61	54.00	9.39	100.0	V	200.0	1.3

Final_Result

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1999.600000	41.68	---	74.00	32.32	100.0	V	169.0	-7.4
2000.100000	---	27.73	54.00	26.27	100.0	V	161.0	-7.4


Prüfbericht - Nr.: CN23WJ7J 001
Test report no.

Seite 21 von 25
Page 21 of 25

EUT Information

EUT Name: LoRaWAN Gateway
Model: WMUHAC-GWW1-M
Test Mode: operating, POE
Test Voltage: AC 120V/60Hz
Test By: Kevin Zhou
Review By: Gary Chen
Remark: 3m Chamber

Level in dB μ V/m

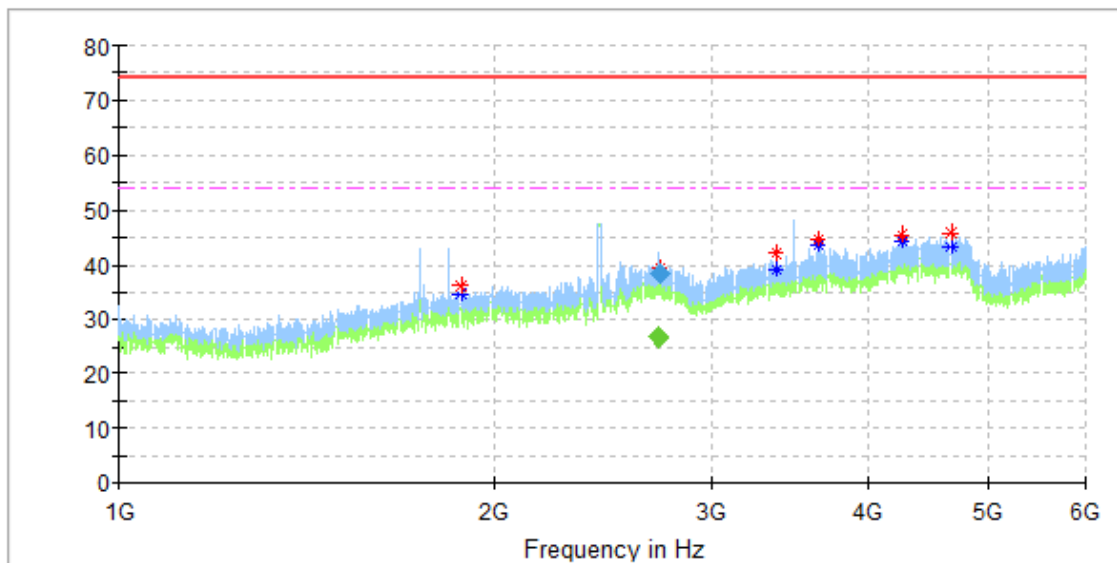

Critical_Freqs

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1884.000000	36.24	---	74.00	37.76	100.0	H	126.0	-7.9
1884.000000	---	34.67	54.00	19.33	100.0	H	126.0	-7.9
2720.900000	---	26.85	54.00	27.15	100.0	H	248.0	-3.3
2726.500000	39.44	---	74.00	34.56	100.0	H	139.0	-3.3
3380.500000	41.89	---	74.00	32.11	100.0	H	336.0	-1.6
3380.500000	---	39.19	54.00	14.81	100.0	H	336.0	-1.6
3656.500000	44.54	---	74.00	29.46	100.0	H	63.0	-0.1
3656.500000	---	43.37	54.00	10.63	100.0	H	63.0	-0.1
4268.000000	45.22	---	74.00	28.78	100.0	H	248.0	2.0
4268.000000	---	44.42	54.00	9.58	100.0	H	248.0	2.0
4680.000000	45.79	---	74.00	28.21	100.0	H	154.0	2.5
4680.000000	---	43.23	54.00	10.77	100.0	H	154.0	2.5

Final_Result

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2720.900000	---	26.85	54.00	27.16	100.0	H	248.0	-3.2
2726.500000	38.46	---	74.00	35.54	100.0	H	139.0	-3.2


Prüfbericht - Nr.: CN23WJ7J 001
Test report no.

Seite 22 von 25
Page 22 of 25

EUT Information

EUT Name: LoRaWAN Gateway
Model: WMUHAC-GWW1-M
Test Mode: operating, POE
Test Voltage: AC 120V/60Hz
Test By: Kevin Zhou
Review By: Gary Chen
Remark: 3m Chamber

Level in dB μ V/m

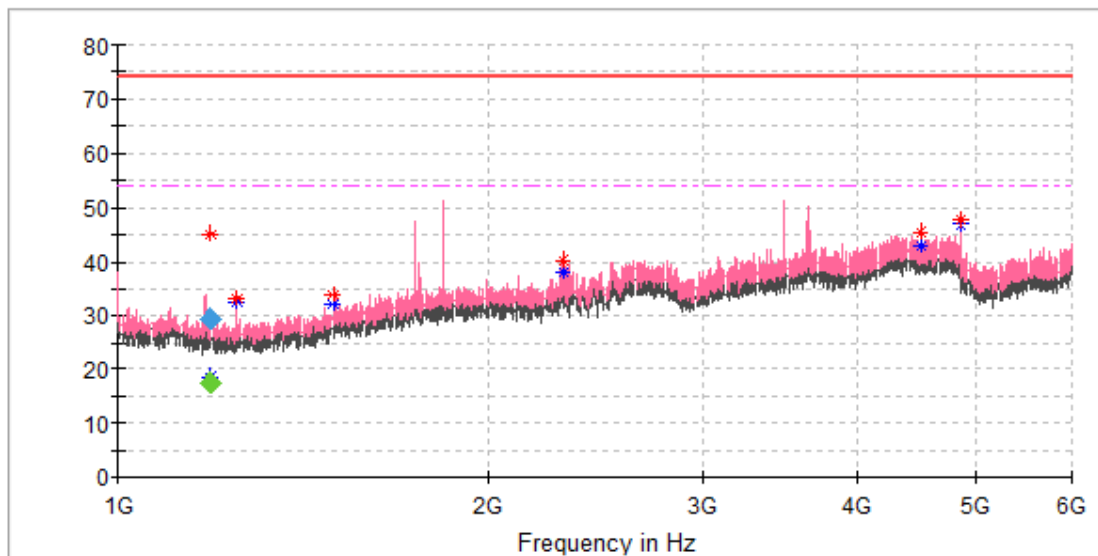

Critical_Freqs

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1190.700000	---	18.50	54.00	35.50	100.0	V	225.0	-13.8
1191.500000	45.18	---	74.00	28.82	100.0	V	222.0	-13.8
1250.000000	33.13	---	74.00	40.87	100.0	V	32.0	-14.2
1250.000000	---	32.22	54.00	21.78	100.0	V	32.0	-14.2
1500.000000	33.79	---	74.00	40.21	100.0	V	151.0	-11.2
1500.000000	---	32.16	54.00	21.84	100.0	V	151.0	-11.2
2313.000000	40.04	---	74.00	33.96	100.0	V	196.0	-6.5
2313.500000	---	38.13	54.00	15.87	100.0	V	196.0	-6.5
4528.000000	45.39	---	74.00	28.61	100.0	V	70.0	2.0
4528.000000	---	42.89	54.00	11.11	100.0	V	70.0	2.0
4874.500000	47.50	---	74.00	26.50	100.0	V	32.0	1.3
4874.500000	---	46.81	54.00	7.19	100.0	V	32.0	1.3

Final_Result

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1190.700000	---	17.33	54.00	36.67	100.0	V	225.0	-13.9
1191.500000	29.38	---	74.00	44.62	100.0	V	222.0	-13.9

7 List of Tables

Table 1: List of Test and Measurement Equipment.....5
 Table 2: Technical Specification of EUT.....7
 Table 3: List of Accessories and Auxiliary Equipment.....9

8 List of Photographs

Photograph 1: Set-up for Conducted Emissions, AC Mains.....23
 Photograph 2: Set-up for Radiated Emissions, below 1GHz.....23
 Photograph 3: Set-up for Radiated Emissions, above 1GHz24