



Date: 10.JUL.2023 16:11:30

11N20MIMO\_Ant2\_2412

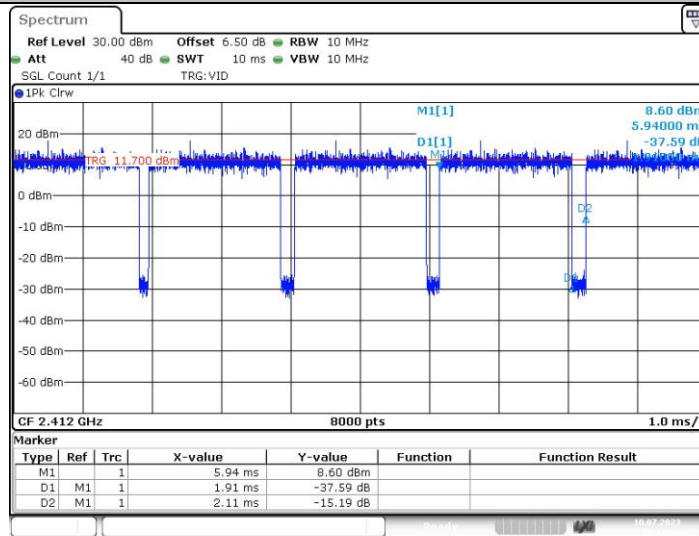

Date: 10.JUL.2023 16:13:27


11N20MIMO\_Ant1\_2437

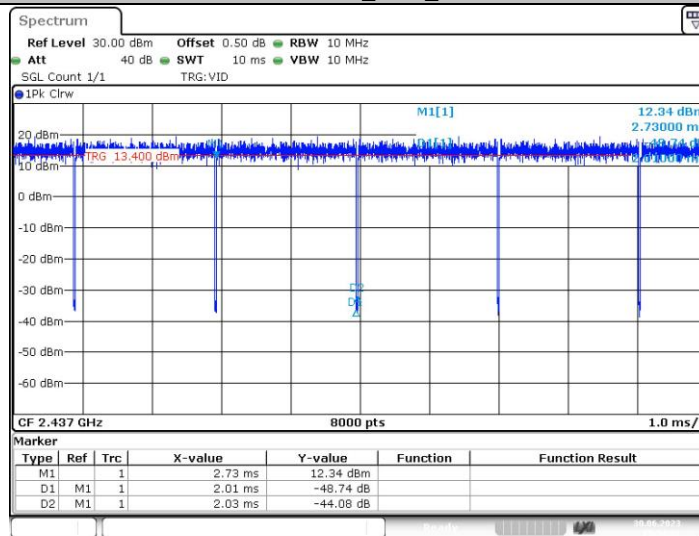

Date: 30.JUN.2023 15:54:02


11N20MIMO\_Ant2\_2437



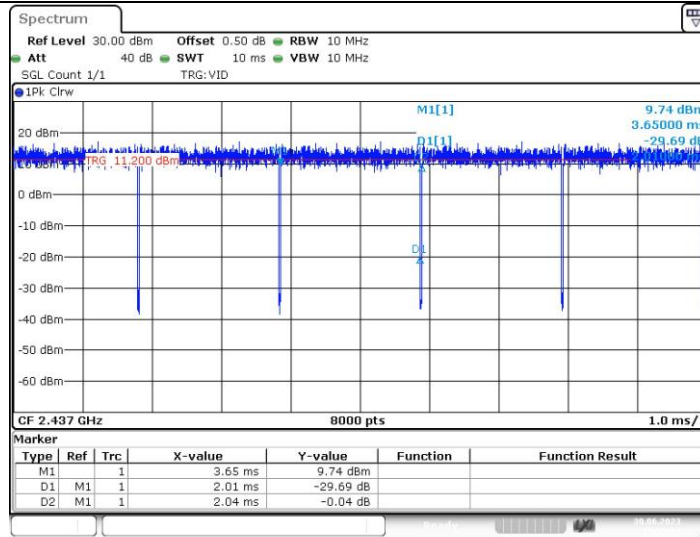


Date: 30.JUN.2023 15:55:57

11N20MIMO\_Ant1\_2462

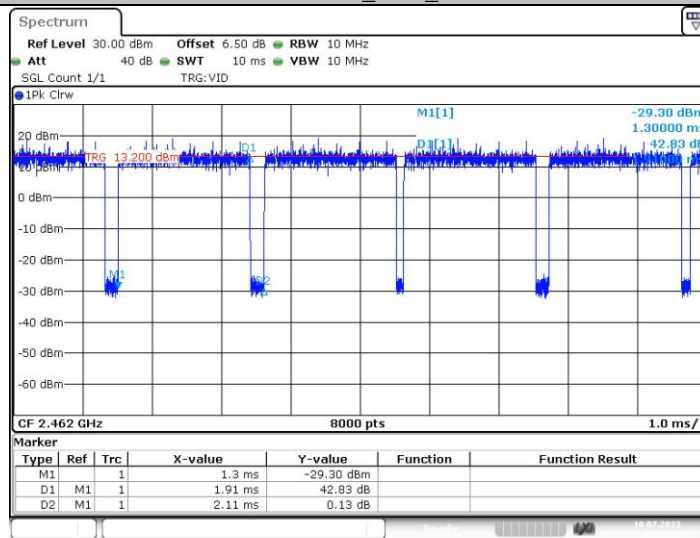

Date: 10.JUL.2023 16:16:15


11N20MIMO\_Ant2\_2462

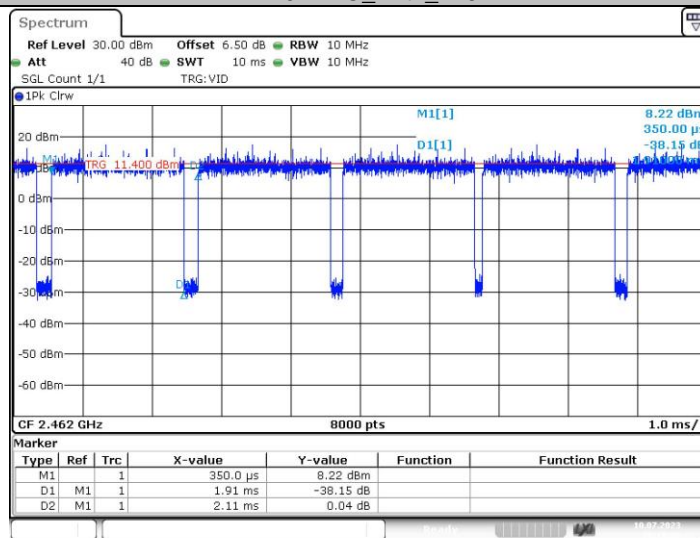

Date: 10.JUL.2023 16:18:19


11N40MIMO\_Ant1\_2422



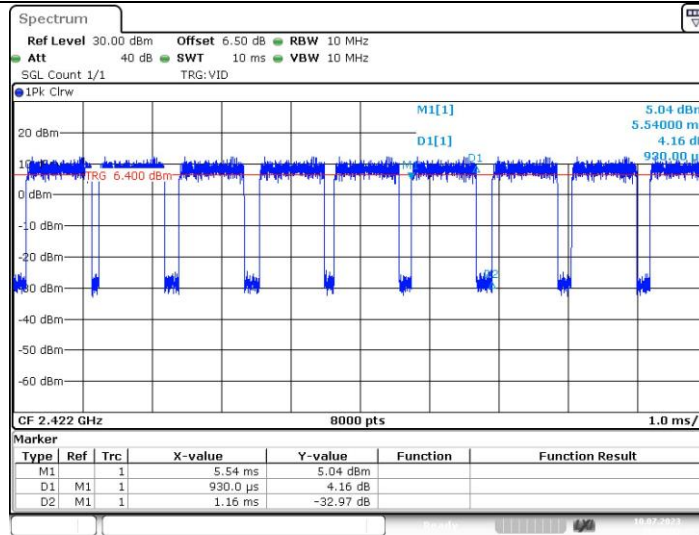


Date: 10.JUL.2023 16:20:52

11N40MIMO\_Ant2\_2422

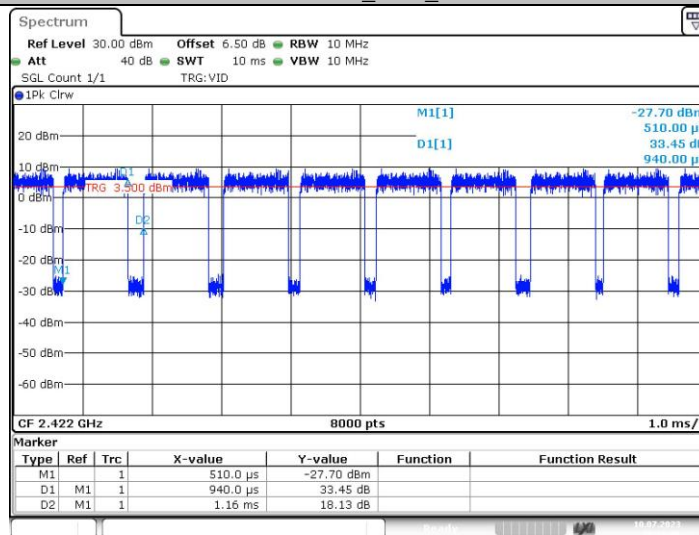

Date: 10.JUL.2023 16:26:45


11N40MIMO\_Ant1\_2437

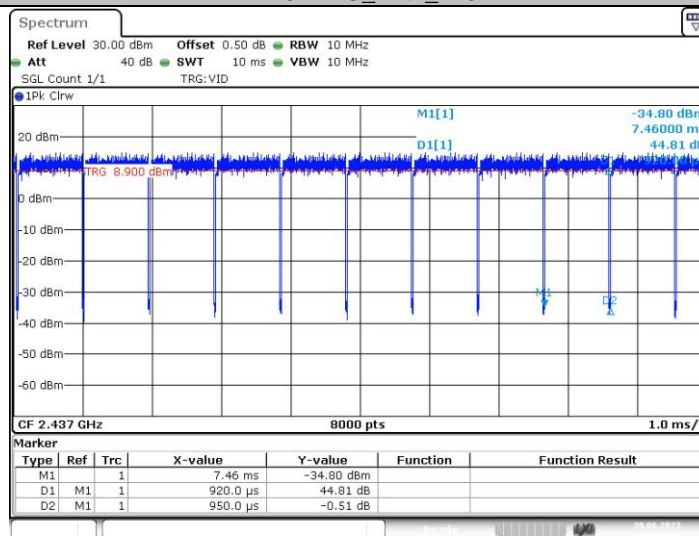

Date: 30.JUN.2023 16:19:37


11N40MIMO\_Ant2\_2437



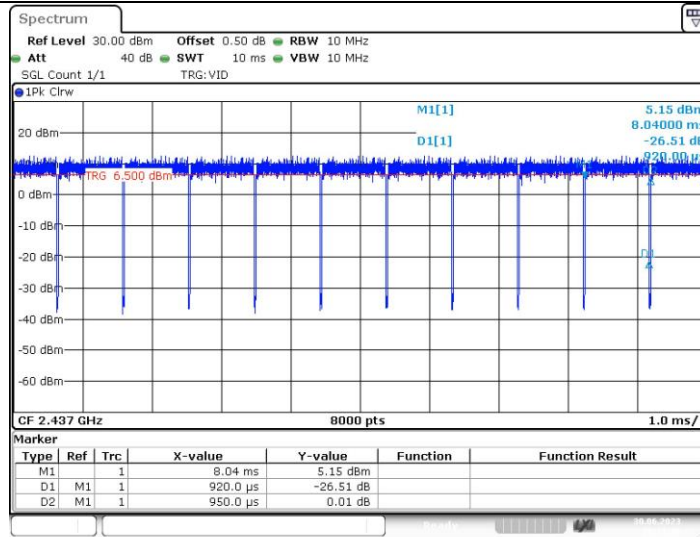


Date: 30.JUN.2023 16:21:30

11N40MIMO\_Ant1\_2452

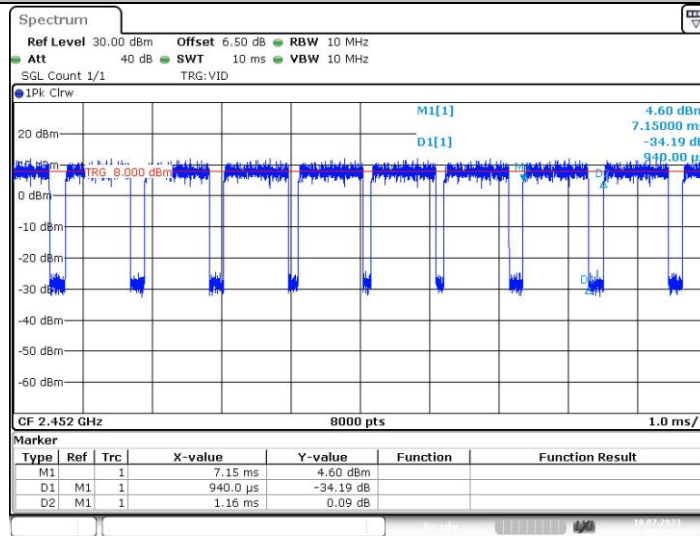

Date: 10.JUL.2023 16:29:23

11N40MIMO\_Ant2\_2452

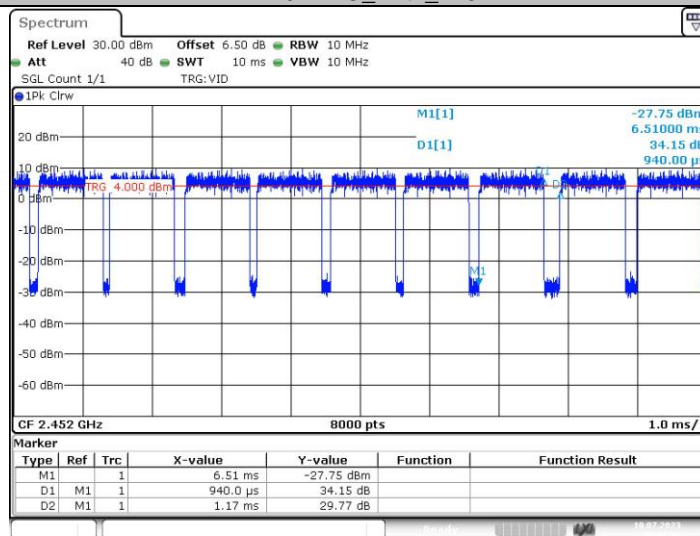

Date: 10.JUL.2023 16:31:22



### 3.9. Antenna Requirement

#### Requirement

##### **FCC CFR Title 47 Part 15 Subpart C Section 15.203**

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

##### **FCC CFR Title 47 Part 15 Subpart C Section 15.247(c) (1)(i)**

(i) Systems operating in the 2400~2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

#### Test Result

The directional gain of the antenna is less than 6dBi, please refer to the EUT internal photographs antenna photo.

\*\*\*\*\*THE END\*\*\*\*\*