



CTC Laboratories, Inc.





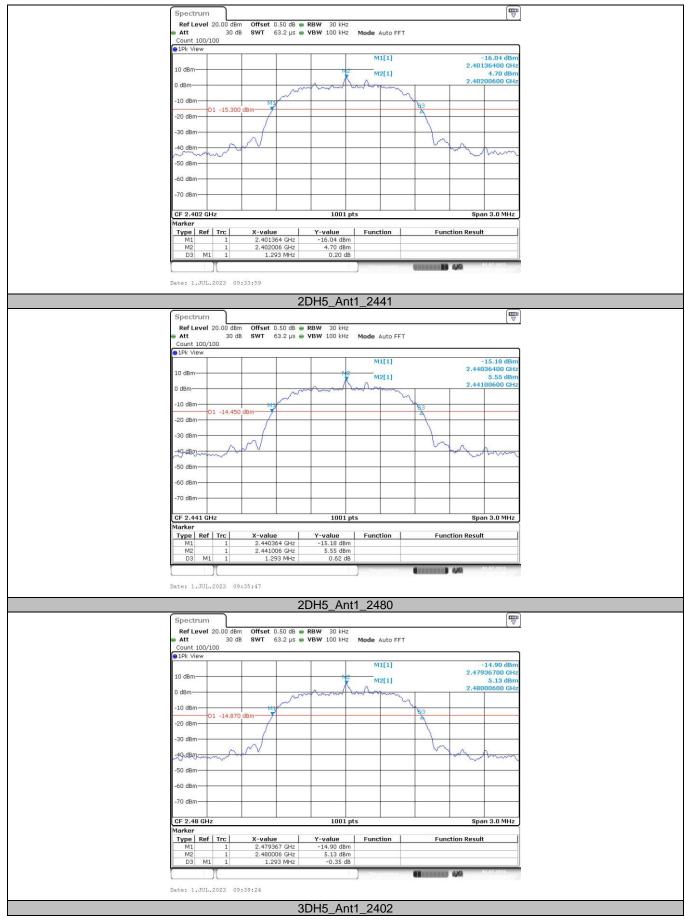

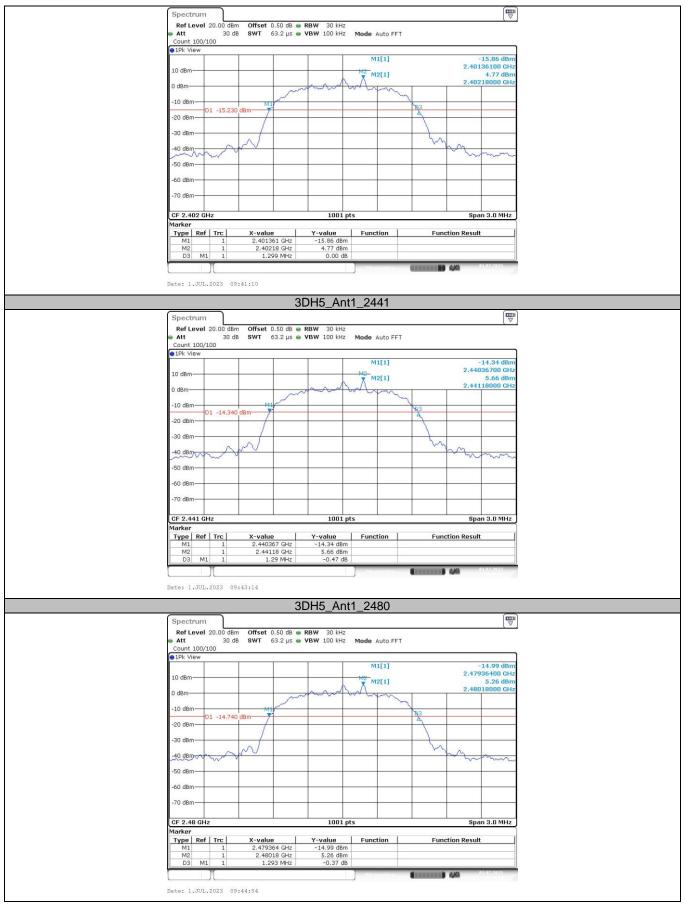

Page 63 of 83

Report No.: CTC20231341E02



# 3.6. Channel Separation

#### **Limit**

#### FCC CFR Title 47 Part 15 Subpart C Section 15.247 (a)(1)

Test Item	Limit	Frequency Range (MHz)	
Channel Separation	>25kHz or >two-thirds of the 20 dB bandwidth Which is greater	2400~2483.5	

### **Test Configuration**



#### **Test Procedure**

- 1. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
- 2. Spectrum Setting:
  - (1) Set RBW = 100 kHz.
  - (2) Set the video bandwidth (VBW) ≥ 3 RBW.
  - (3) Detector = Peak.
  - (4) Trace mode = Max hold.
  - (5) Sweep = Auto couple.

### **Test Mode**


Please refer to the clause 2.4.

#### **Test Result**

Test Mode	Frequency (MHz)	Carrier Frequencies Separation (MHz)	Limit (MHz)	Verdict
GFSK	Hop_2441	1.006	>0.66	Pass
π/4-DQPSK	Hop_2441	1.055	>0.86	Pass
8-DPSK	Hop_2441	1.101	>0.87	Pass

CTC Laboratories, Inc.



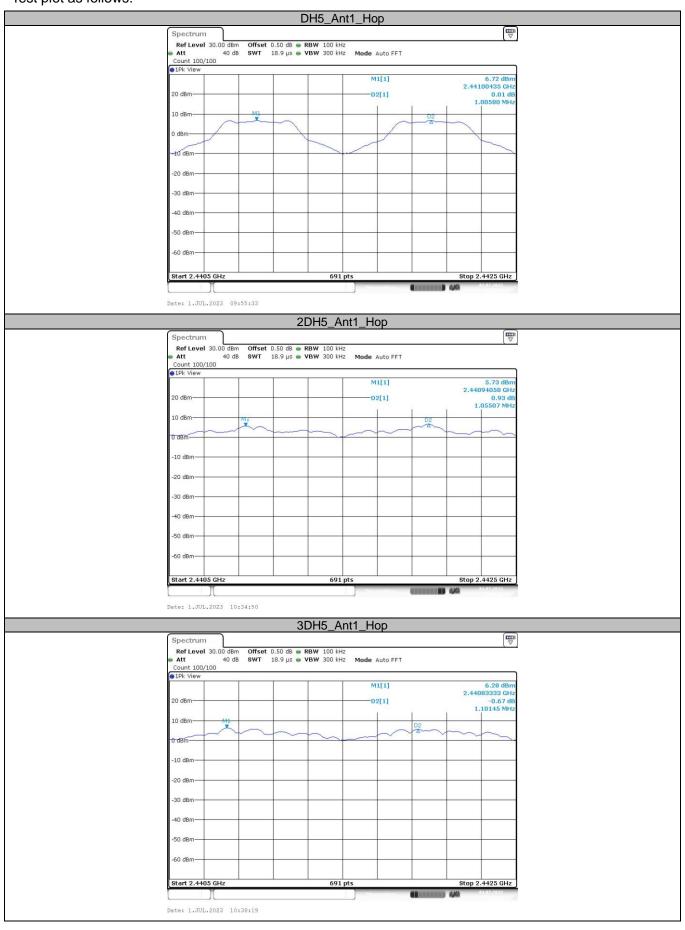

Page 65 of 83

Report No.: CTC20231341E02




# 3.7. Number of Hopping Channel

#### **Limit**

#### FCC CFR Title 47 Part 15 Subpart C Section 15.247 (a)(iii)

Section	Test Item	Limit
15.247 (a)(iii) RSS-247 5.1 d	Number of Hopping Channel	≥15

#### **Test Configuration**



#### **Test Procedure**


- 1. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
- 2. Spectrum Setting:
  - (1) Peak Detector: RBW=100 kHz, VBW≥RBW, Sweep time= Auto.

### **Test Mode**

Please refer to the clause 2.4.

#### **Test Result**

Test Mode	Channel Number	Limit	Verdict
GFSK	79	≥15	Pass
π/4-DQPSK	79	≥15	Pass
8-DPSK	79	≥15	Pass

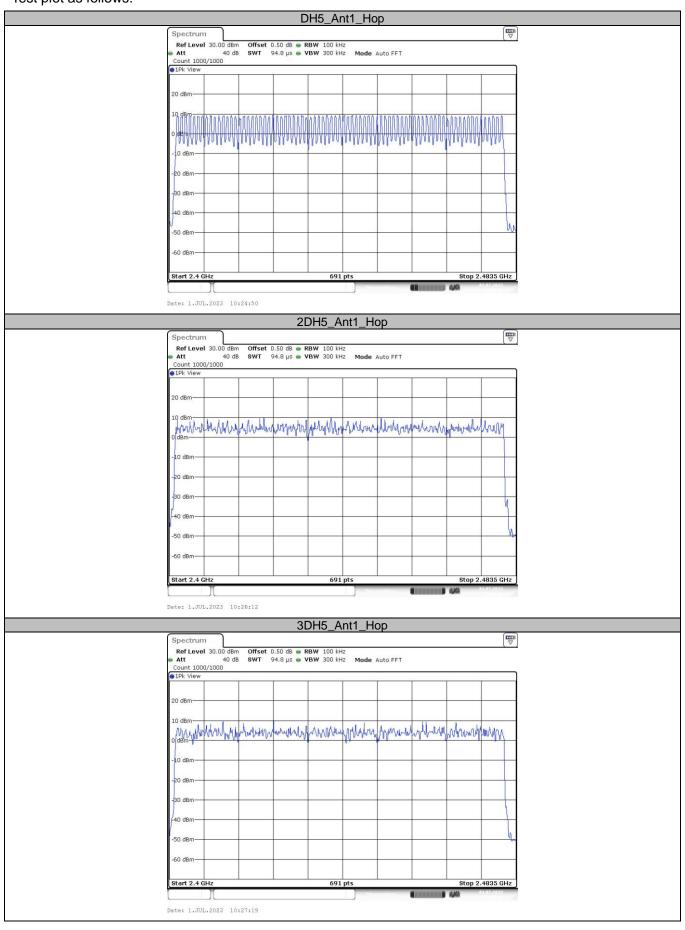

Page 67 of 83

Report No.: CTC20231341E02



#### 3.8. Dwell Time

#### **Limit**

#### FCC CFR Title 47 Part 15 Subpart C Section 15.247 (a)(iii)

Section	Test Item	Limit
15.247 (a)(iii) RSS-247 5.1 d	Average Time of Occupancy	0.4 sec

#### **Test Configuration**



#### **Test Procedure**

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
- 2. Spectrum Setting:
  - (1) Spectrum Setting: RBW=1MHz, VBW≥RBW.
  - (2) Use video trigger with the trigger level set to enable triggering only on full pulses.
  - (3) Sweep Time is more than once pulse time.
- (4) Set the center frequency on any frequency would be measure and set the frequency span to zero.
  - (5) Measure the maximum time duration of one single pulse.
  - (6) Set the EUT for packet transmitting.

#### **Test Mode**

Please refer to the clause 2.4.

Accreditation Administration of the People's Republic of China: http://yz.cnca.cn




Report No.: CTC20231341E02




#### **Test Result**


Test Mode	Channel	Frequency (MHz)	Pulse Time (ms)	Total of Dwell (ms)	Period Time (ms)	Limit (second)	Verdict
	DH1	2441	0.38	121.6	31.60		
GFSK	DH3	2441	1.63	260.8	31.60	≤0.40	Pass
	DH5	2441	2.87	306.1	31.60		
	2DH1	2441	0.39	124.8	31.60		
π/4-DQPSK	2DH3	2441	1.63	260.8	31.60	≤0.40	Pass
	2DH5	2441	2.87	306.1	31.60		
	3DH1	2441	0.39	124.8	31.60		
8-DPSK	3DH3	2441	1.63	260.8	31.60	≤0.40	Pass
	3DH5	2441	2.87	306.1	31.60		

Note: 1DH1/2DH1/3DH1 Total of Dwell = Pulse Time\*(1600/2)\*31.6/79 1DH3/2DH3/3DH3 Total of Dwell = Pulse Time\*(1600/4)\*31.6/79 1DH5/2DH5/3DH5 Total of Dwell = Pulse Time\*(1600/6)\*31.6/79




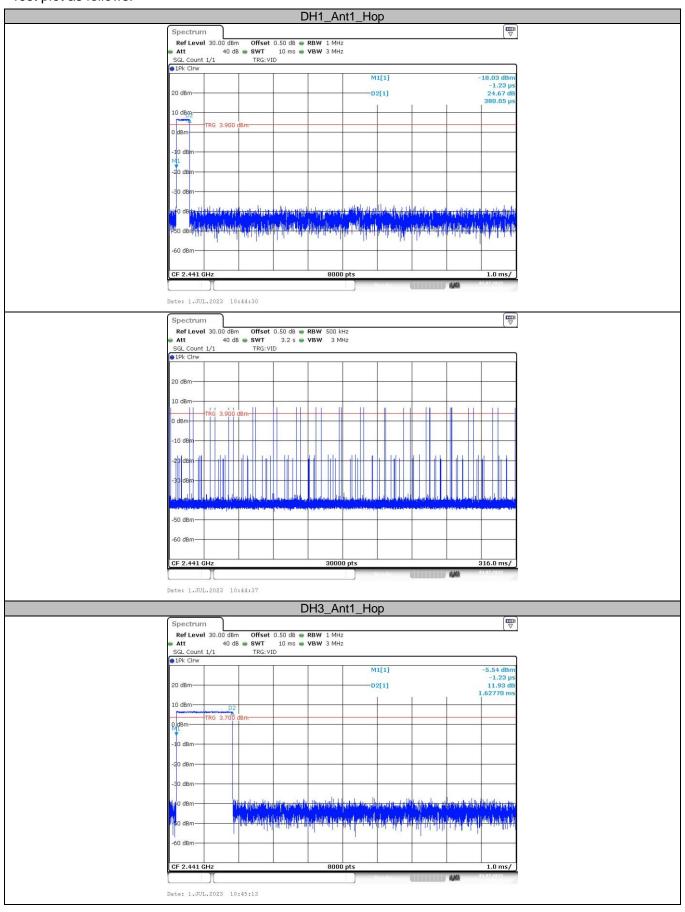




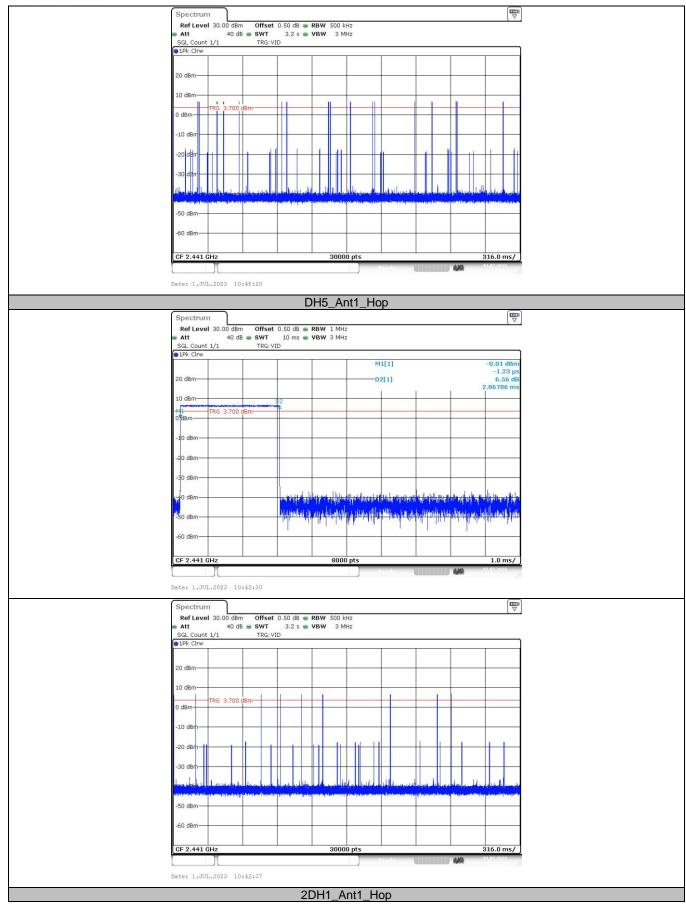




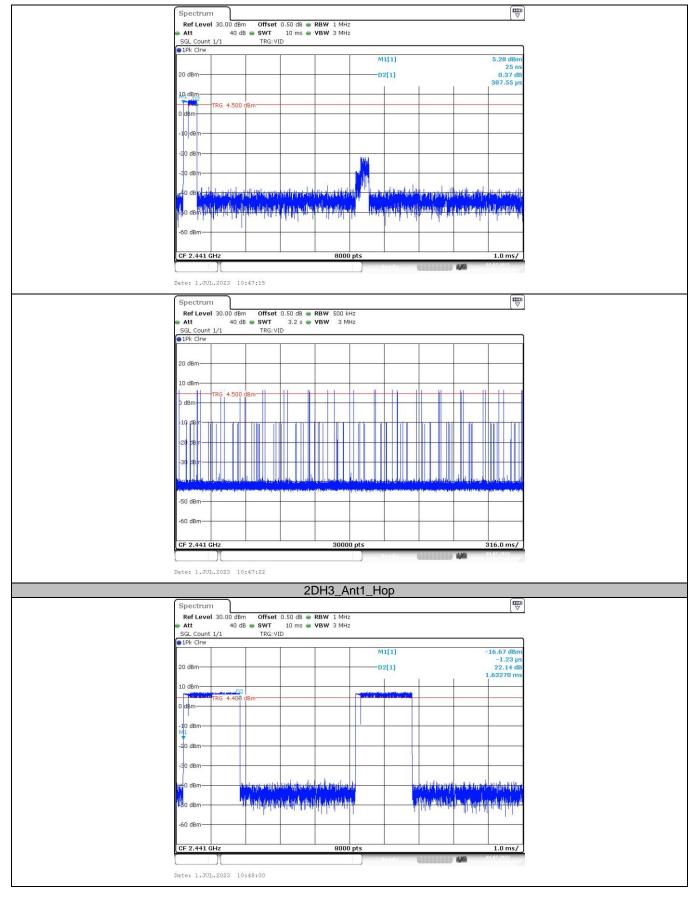




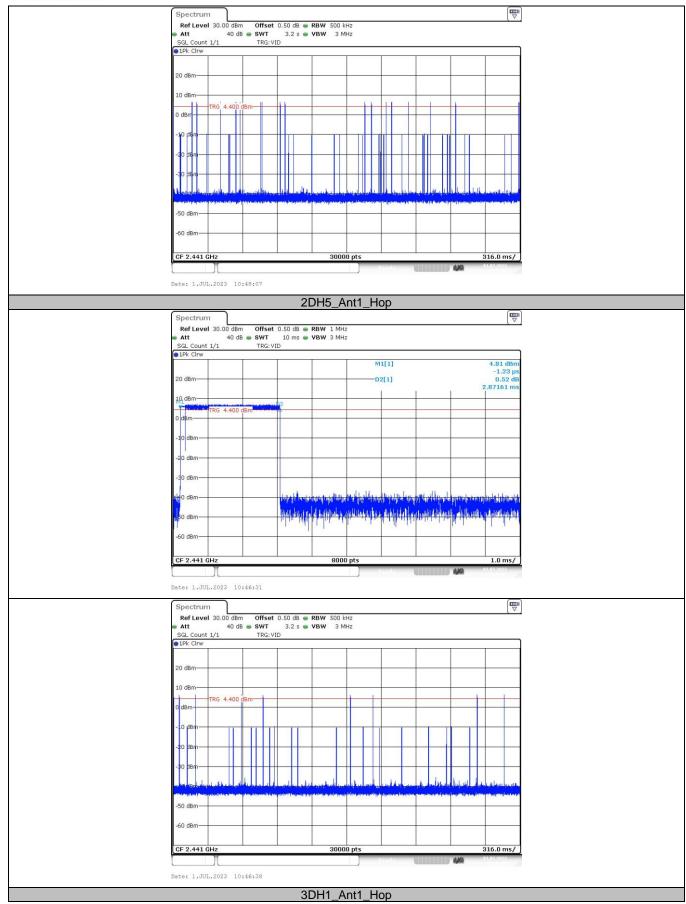



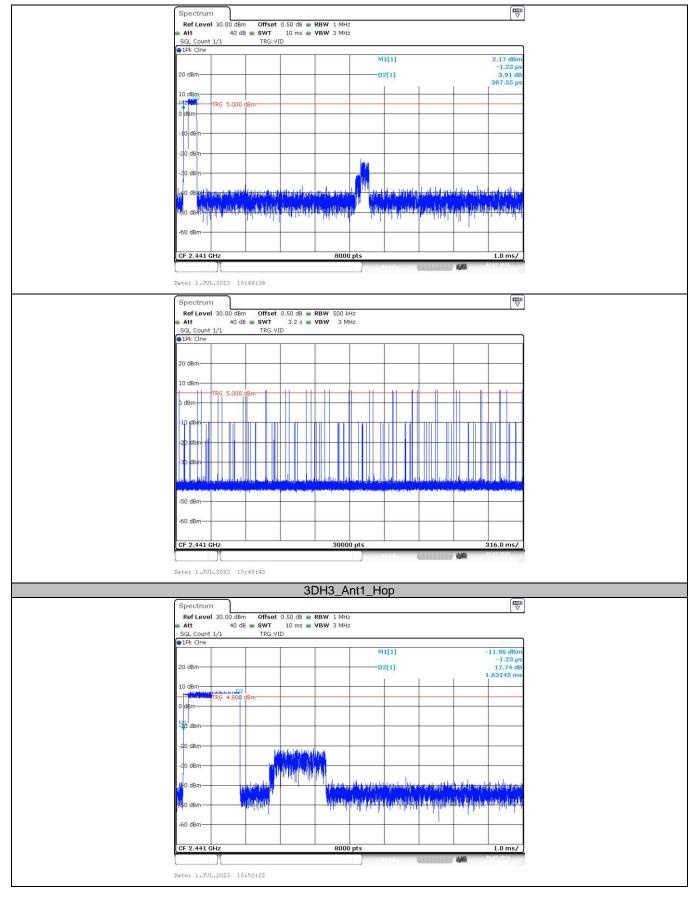



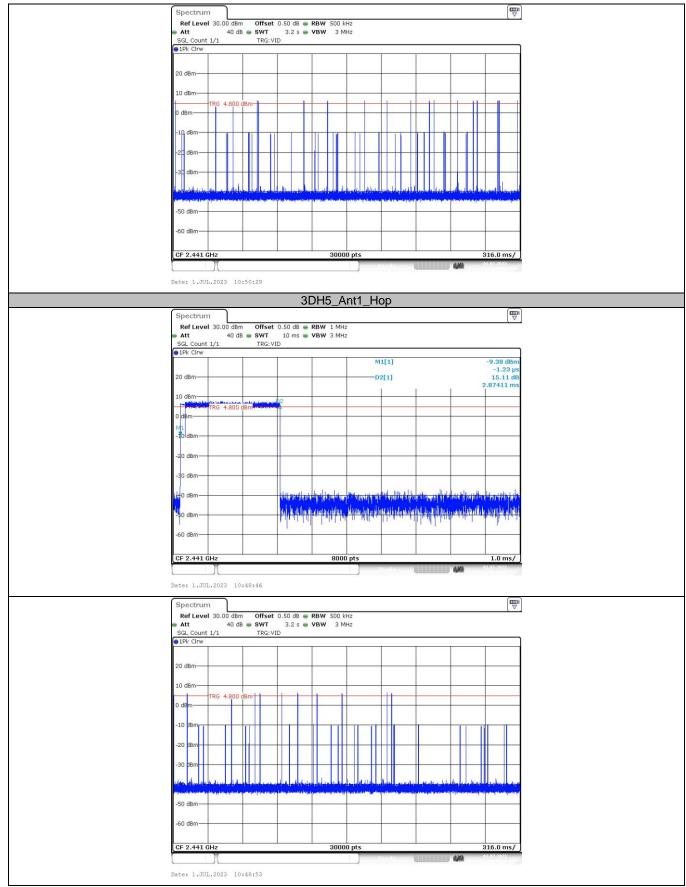

Page 75 of 83

Report No.: CTC20231341E02




# 3.9. Peak Output Power

#### **Limit**

#### FCC CFR Title 47 Part 15 Subpart C Section 15.247 (b)(1)

Section	Test Item	Limit	Frequency Range (MHz)
FCC CFR 47 Part15.247 (b)(1)	Maximum Conducted Output Power	Hopping Channels≥75, Power <1W(30dBm); Others <125mW(21dBm)	2400~2483.5

#### **Test Configuration**



### **Test Procedure**

- 1. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
- 2. Spectrum Setting:
  - (1) Set RBW > 20dB Bandwidth.
  - (2) Set VBW ≥ RBW.
  - (3) Detector = Peak.
  - (4) Trace mode = Max hold.
  - (5) Sweep = Auto couple.
  - (6) Span = Approximately five times the 20dB bandwidth, centered on a hopping channel.


#### **Test Mode**

Please refer to the clause 2.4.


#### **Test Result**

Test Mode	Frequency (MHz)	Conducted Output Power (dBm)	FCC Limit (dBm)	Verdict
	2402	7.12	≤30	Pass
GFSK	2441	7.57	≤30	Pass
	2480	7.12	≤30	Pass
	2402	5.01	≤30	Pass
π/4-DQPSK	2441	5.52	≤30	Pass
	2480	4.78	≤30	Pass
	2402	5.89	≤30	Pass
8-DPSK	2441	5.81	≤30	Pass
	2480	5.46	≤30	Pass



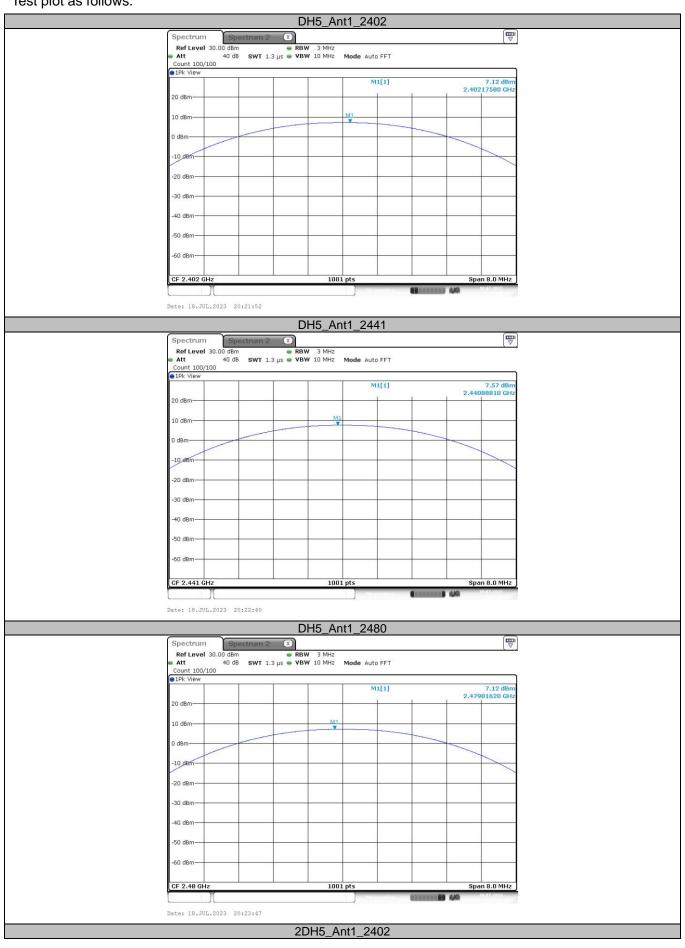




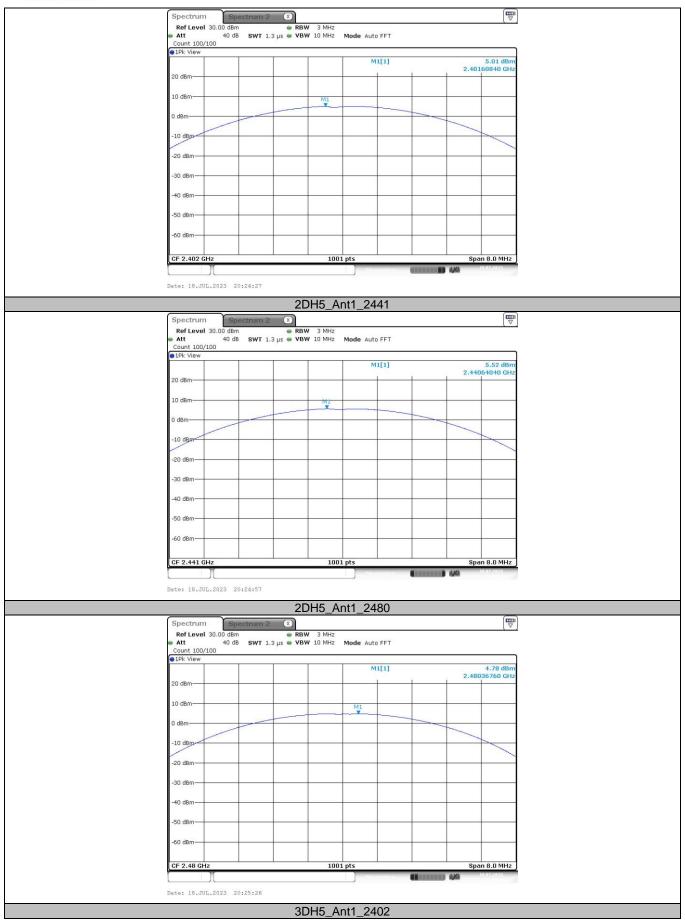





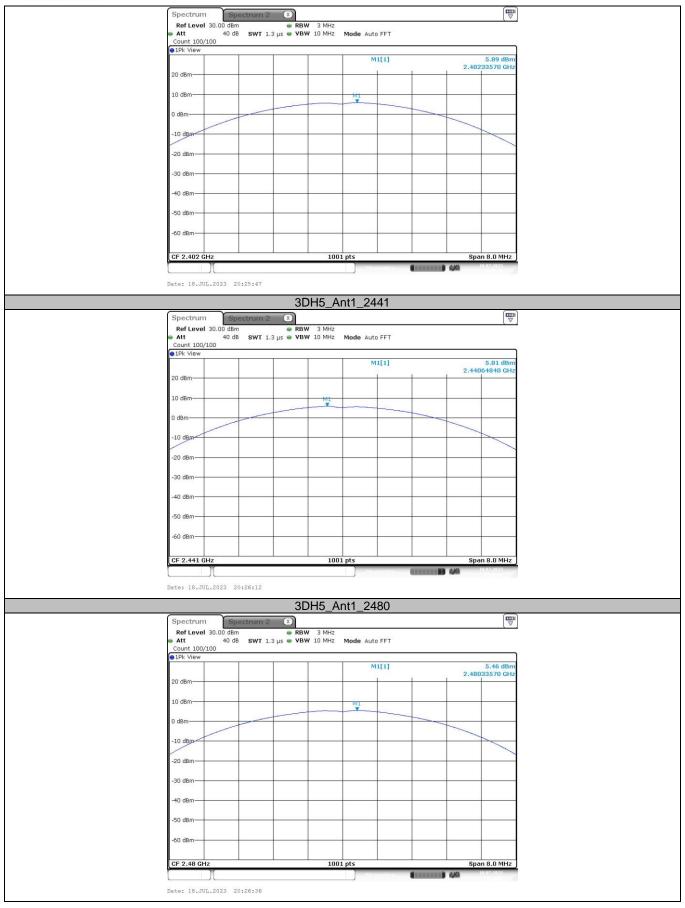

Page 79 of 83

Report No.: CTC20231341E02




## 3.10. Duty Cycle

#### Limit

None, for report purposes only.

#### **Test Configuration**



### **Test Procedure**

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
- 2. The EUT was directly connected to the Spectrum Analyzer and antenna output port as show in the block diagram above. The measurement according to section 10.2 of KDB 558074 D01 DTS Meas Guidance v05r02.
- 3. Spectrum Setting:

Set analyzer center frequency to test channel center frequency.

Set the span to 0Hz. Set the RBW to 10MHz. Set the VBW to 10MHz.

Detector: Peak. Sweep time: Auto.


Allow trace to fully stabilize. Then use the peak marker function to determine the maximum amplitude level.

#### **Test Mode**

Please refer to the clause 2.4.


#### **Test Result**

Test Mode	Frequency (MHz)	Transmission Duration (ms)	Transmission Period (ms)	Duty Cycle (%)	1/T Minimum VBW (kHz)	Final Setting for VBW (kHz)
	2402	2.87	3.71	77.36	0.35	1
GFSK	2441	2.87	3.71	77.36	0.35	1
	2480	2.87	3.71	77.36	0.35	1
	2402	2.87	3.71	77.36	0.35	1
π/4-DQPSK	2441	2.87	3.71	77.36	0.35	1
	2480	2.87	3.71	77.36	0.35	1
	2402	2.88	3.72	77.42	0.35	1
8-DPSK	2441	2.87	3.71	77.36	0.35	1
	2480	2.87	3.71	77.36	0.35	1

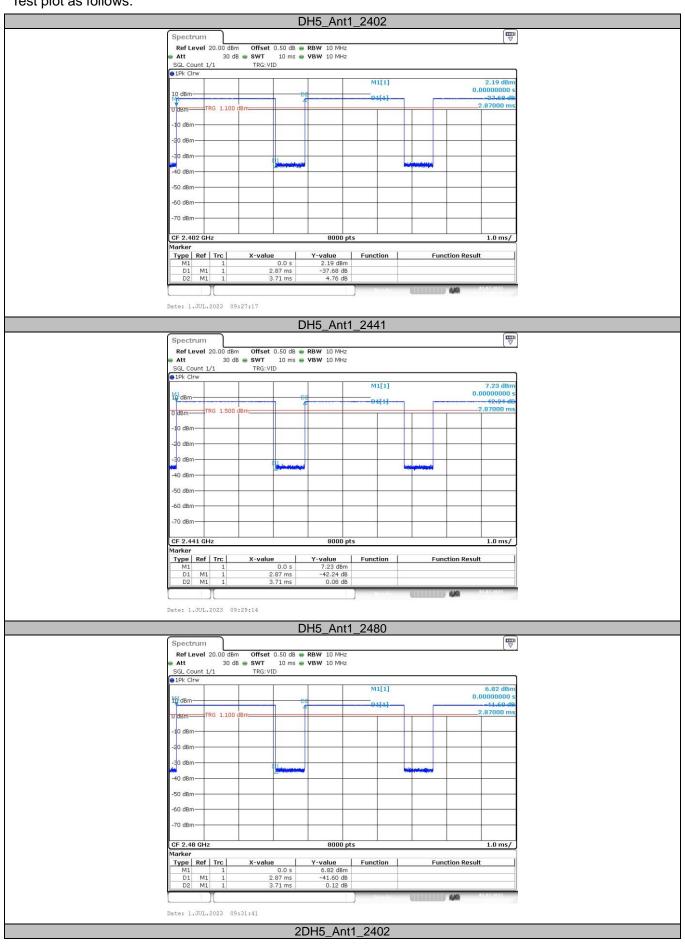






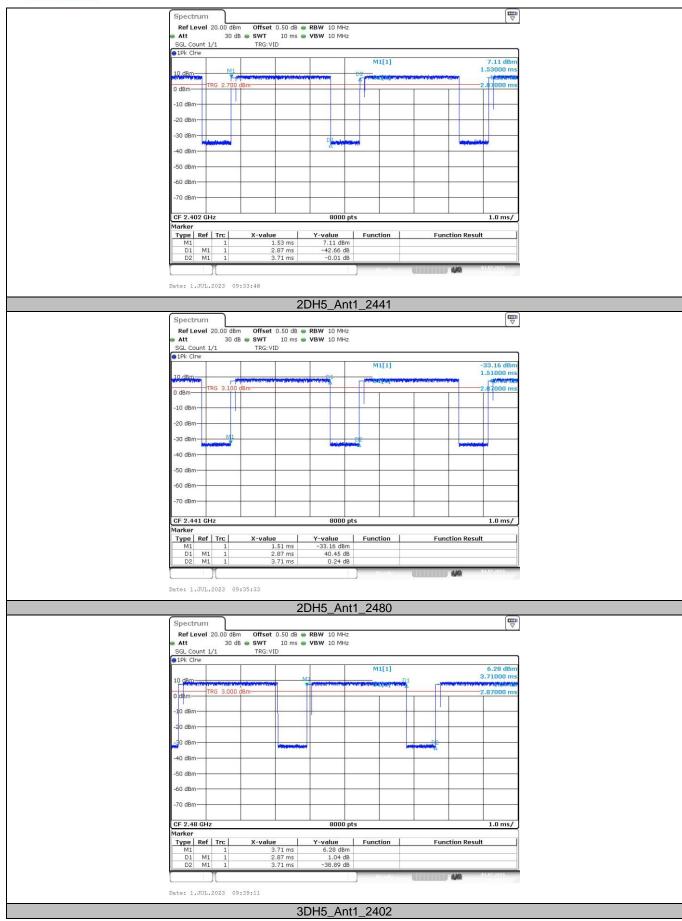



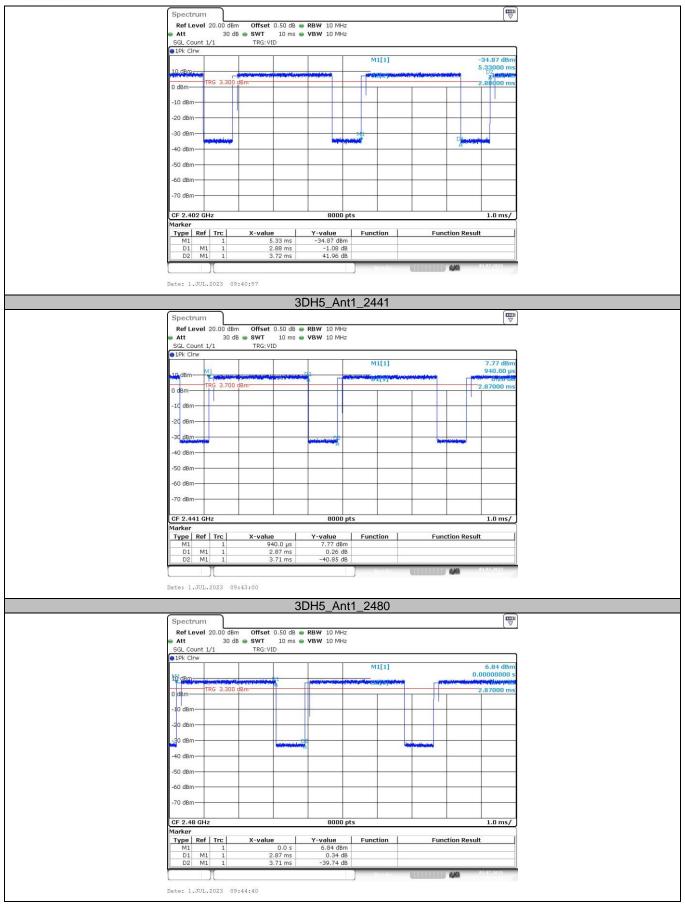

Page 83 of 83

Report No.: CTC20231341E02



## 3.11. Antenna Requirement

#### Requirement

#### FCC CFR Title 47 Part 15 Subpart C Section 15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

#### FCC CFR Title 47 Part 15 Subpart C Section 15.247(c) (1)(i)

(i) Systems operating in the 2400~2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

#### **Test Result**

The directional gain of the antenna is less than 6dBi, please refer to the EUT internal photographs antenna photo.



