

# FCC TEST REPORT

**Product Name:** Smart Camera  
**Trade Mark:** SKYWORTH  
**Model No.:** LC2203  
**Report Number:** 2307216148RFC-1  
**Test Standards:** FCC 47 CFR Part 15 Subpart C  
**FCC ID:** WNA-LSG00  
**Test Result:** PASS  
**Date of Issue:** September 21, 2023


Prepared for:

**Shenzhen Skyworth Digital Technology Co., LTD.**  
**14/F, Unit A, Skyworth Building, Gaoxin Ave.1.S., Nanshan District,**  
**Shenzhen, China**

Prepared by:

**Shenzhen UnionTrust Quality and Technology Co., Ltd.**  
**Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and**  
**technology park, Longhua district, Shenzhen, China**  
**TEL: +86-755-2823 0888**  
**FAX: +86-755-2823 0886**

Prepared by:



Kieron Luo  
Project Engineer

Reviewed by:



Henry Lu  
Team Leader

Approved by:



Kevin Liang  
Assistant Manager

Date: September 21, 2023

## **Shenzhen UnionTrust Quality and Technology Co., Ltd.**

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: [info@uttlab.com](mailto:info@uttlab.com)

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.1

**Version**

Version No.	Date	Description
V1.0	September 21, 2023	Original

**Shenzhen UnionTrust Quality and Technology Co., Ltd.**

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.1

## CONTENTS

<b>1. GENERAL INFORMATION</b> .....	<b>4</b>
<b>1.1 CLIENT INFORMATION</b> .....	<b>4</b>
<b>1.2 EUT INFORMATION</b> .....	<b>4</b>
1.2.1 GENERAL DESCRIPTION OF EUT .....	4
1.2.2 DESCRIPTION OF ACCESSORIES.....	4
<b>1.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD</b> .....	<b>5</b>
<b>1.4 OTHER INFORMATION</b> .....	<b>5</b>
<b>1.5 DESCRIPTION OF SUPPORT UNITS</b> .....	<b>5</b>
<b>1.6 TEST LOCATION</b> .....	<b>6</b>
<b>1.7 TEST FACILITY</b> .....	<b>6</b>
<b>1.8 DEVIATION FROM STANDARDS</b> .....	<b>6</b>
<b>1.9 ABNORMALITIES FROM STANDARD CONDITIONS</b> .....	<b>6</b>
<b>1.10 OTHER INFORMATION REQUESTED BY THE CUSTOMER</b> .....	<b>6</b>
<b>1.11 MEASUREMENT UNCERTAINTY</b> .....	<b>7</b>
<b>2. TEST SUMMARY</b> .....	<b>8</b>
<b>3. EQUIPMENT LIST</b> .....	<b>9</b>
<b>4. TEST CONFIGURATION</b> .....	<b>10</b>
<b>4.1 ENVIRONMENTAL CONDITIONS FOR TESTING</b> .....	<b>10</b>
4.1.1 NORMAL OR EXTREME TEST CONDITIONS .....	10
4.1.2 RECORD OF NORMAL ENVIRONMENT AND TEST SAMPLE .....	10
<b>4.2 TEST CHANNELS</b> .....	<b>10</b>
<b>4.3 EUT TEST STATUS</b> .....	<b>10</b>
<b>4.4 PRE-SCAN</b> .....	<b>11</b>
<b>4.5 TEST SETUP</b> .....	<b>11</b>
4.5.1 FOR RADIATED EMISSIONS TEST SETUP .....	11
4.5.2 FOR CONDUCTED EMISSIONS TEST SETUP .....	13
4.5.3 FOR CONDUCTED RF TEST SETUP .....	13
<b>4.6 SYSTEM TEST CONFIGURATION</b> .....	<b>14</b>
<b>4.7 DUTY CYCLE</b> .....	<b>15</b>
<b>5. RADIO TECHNICAL REQUIREMENTS SPECIFICATION</b> .....	<b>18</b>
<b>5.1 REFERENCE DOCUMENTS FOR TESTING</b> .....	<b>18</b>
<b>5.2 ANTENNA REQUIREMENT</b> .....	<b>18</b>
<b>5.3 CONDUCTED PEAK OUTPUT POWER</b> .....	<b>19</b>
<b>5.4 6 dB BANDWIDTH</b> .....	<b>20</b>
<b>5.5 POWER SPECTRAL DENSITY</b> .....	<b>21</b>
<b>5.6 CONDUCTED OUT OF BAND EMISSION</b> .....	<b>22</b>
<b>5.7 RADIATED SPURIOUS EMISSIONS</b> .....	<b>23</b>
<b>5.8 BAND EDGE MEASUREMENTS (RADIATED)</b> .....	<b>30</b>
<b>5.9 CONDUCTED EMISSION</b> .....	<b>39</b>
<b>APPENDIX A RF TEST DATA</b> .....	<b>42</b>
<b>A.1 99% BANDWIDTH</b> .....	<b>42</b>
<b>A.2 6dB BANDWIDTH</b> .....	<b>45</b>
<b>A.3 CONDUCTED OUT OF BAND EMISSION</b> .....	<b>48</b>
<b>A.4 POWER SPECTRAL DENSITY</b> .....	<b>54</b>
<b>APPENDIX 1 PHOTOS OF TEST SETUP</b> .....	<b>57</b>
<b>APPENDIX 2 PHOTOS OF EUT CONSTRUCTIONAL DETAILS</b> .....	<b>57</b>

## 1. GENERAL INFORMATION

### 1.1 CLIENT INFORMATION

<b>Applicant:</b>	Shenzhen Skyworth Digital Technology Co., LTD.
<b>Address of Applicant:</b>	14/F, Unit A, Skyworth Building, Gaoxin Ave.1.S., Nanshan District, Shenzhen, China
<b>Manufacturer:</b>	Shenzhen Skyworth Digital Technology Co., LTD.
<b>Address of Manufacturer:</b>	14/F, Unit A, Skyworth Building, Gaoxin Ave.1.S., Nanshan District, Shenzhen, China

### 1.2 EUT INFORMATION

#### 1.2.1 General Description of EUT

<b>Product Name:</b>	Smart Camera		
<b>Model No.:</b>	LC2203		
<b>Trade Mark:</b>	SKYWORTH		
<b>DUT Stage:</b>	Identical Prototype		
<b>EUT Supports Function:</b> (Provided by the customer)	2.4 GHz ISM Band:	IEEE 802.11b/g/n	
	5 GHz U-NII Bands:	5 150 MHz to 5 250 MHz	IEEE 802.11a/n
		5 250 MHz to 5 350 MHz	IEEE 802.11a/n
		5 470 MHz to 5 725 MHz	IEEE 802.11a/n
		5 725 MHz to 5 850 MHz	IEEE 802.11a/n
<b>Software Version:</b>	1.00.32 (Provided by the customer)		
<b>Hardware Version:</b>	5800-2ALSG00-3101 (Provided by the customer)		
<b>Sample Received Date:</b>	July 20, 2023		
<b>Sample Tested Date:</b>	July 20, 2023 to August 19, 2023		
<b>Remark:</b>	The above EUT's information was provided by customer. Please refer to the specifications or user's manual for more detailed description.		

#### 1.2.2 Description of Accessories

Adapter	
<b>Model No.:</b>	UT-681A-5200ZCY
<b>Input:</b>	100-240 V~50/60 Hz 0.35 A
<b>Output:</b>	5.0 V $\equiv$ 2.0 A 10.0 W

Cable	
<b>Connector:</b>	USB Cable
<b>Cable Type:</b>	Unshielded without ferrite
<b>Length:</b>	3.0 Meter

### 1.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD

<b>Frequency Band:</b>	2400 MHz to 2483.5 MHz
<b>Frequency Range:</b>	2412 MHz to 2462 MHz
<b>Support Standards:</b>	IEEE 802.11b, IEEE 802.11g, IEEE 802.11n-HT20, IEEE 802.11n-HT40
<b>Type of Modulation:</b>	IEEE 802.11b: DSSS (CCK, DQPSK, DBPSK) IEEE 802.11g: OFDM (64-QAM, 16-QAM, QPSK, BPSK) IEEE 802.11n-HT20: OFDM (64-QAM, 16-QAM, QPSK, BPSK) IEEE 802.11n-HT40: OFDM (64-QAM, 16-QAM, QPSK, BPSK)
<b>Data Rate:</b>	IEEE 802.11b: Up to 11 Mbps IEEE 802.11g: Up to 54 Mbps IEEE 802.11n-HT20: Up to MCS 7 IEEE 802.11n-HT40: Up to MCS 7
<b>Number of Channels:</b>	IEEE 802.11b:11 IEEE 802.11g:11 IEEE 802.11n-HT20:11 IEEE 802.11n-HT40:7
<b>Channel Separation:</b>	5 MHz
<b>Antenna Type:</b> (Provided by the customer)	PIFA Antenna
<b>Antenna Gain:</b> (Provided by the customer)	1.5 dBi
<b>Maximum Peak Power:</b>	IEEE 802.11b: 19.99 dBm IEEE 802.11g: 21.78 dBm IEEE 802.11n-HT20: 23.25 dBm IEEE 802.11n-HT40: 23.57 dBm
<b>Normal Test Voltage:</b>	5.0 Vdc

### 1.4 OTHER INFORMATION

Operation Frequency Each of Channel	
IEEE 802.11b, IEEE 802.11g, IEEE 802.11n-HT20	$f = 2407 + 5k \text{ MHz}, k = 1, \dots, 11$
IEEE 802.11n-HT40	$f = 2407 + 5k \text{ MHz}, k = 3, \dots, 9$
Note: f is the operating frequency (MHz); k is the operating channel.	

### 1.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested with associated equipment below.

1) Support Equipment

Description	Manufacturer	Model No.	Serial Number	Supplied by
--	--	--	--	--

2) Support Cable

Cable No.	Description	Connector	Length	Supplied by
1	Antenna Cable	SMA	0.1 Meter	Applicant

---

## 1.6 TEST LOCATION

---

### Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China 518109

Telephone: +86 (0) 755 2823 0888

Fax: +86 (0) 755 2823 0886

---

## 1.7 TEST FACILITY

---

The test facility is recognized, certified, or accredited by the following organizations:

### CNAS-Lab Code: L9069

The measuring equipment utilized to perform the tests documented in this report has been calibrated once a year or in accordance with the manufacturer's recommendations, and is traceable under the ISO/IEC 17025 to international or national standards. Equipment has been calibrated by accredited calibration laboratories.

### A2LA-Lab Certificate No.: 4312.01

Shenzhen UnionTrust Quality and Technology Co., Ltd. has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

### ISED Wireless Device Testing Laboratories

CAB identifier: CN0032

### FCC Accredited Lab.

Designation Number: CN1194

Test Firm Registration Number: 259480

---

## 1.8 DEVIATION FROM STANDARDS

None.

## 1.9 ABNORMALITIES FROM STANDARD CONDITIONS

None.

## 1.10 OTHER INFORMATION REQUESTED BY THE CUSTOMER

None.

### 1.11 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

No.	Item	Measurement Uncertainty
1	Conducted emission 9kHz-150kHz	±3.2 dB
2	Conducted emission 150kHz-30MHz	±2.7 dB
3	Radiated emission 9kHz-30MHz	± 4.7 dB
4	Radiated emission 30MHz-1GHz	± 4.9 dB
5	Radiated emission 1GHz-18GHz	± 4.8 dB
6	Radiated emission 18GHz-26GHz	± 5.1 dB
7	Radiated emission 26GHz-40GHz	± 5.1 dB
8	Conducted spurious emissions	± 2.7 dB
9	RF Power, Conducted	± 0.68 dB
10	Occupied Bandwidth	± 1.86 %
11	Radio Frequency	2.4 GHz: ± 6.5 x 10 <sup>-8</sup>
12	Transmission Time	± 0.19 %

## 2. TEST SUMMARY

FCC 47 CFR Part 15 Subpart C Test Cases			
Test Item	Test Requirement	Test Method	Result
Antenna Requirement	FCC 47 CFR Part 15 Subpart C Section 15.203/15.247 (b)	N/A	PASS
AC Power Line Conducted Emission	FCC 47 CFR Part 15 Subpart C Section 15.207	ANSI C63.10-2013 Clause 6.2	PASS
Conducted Peak Output Power	FCC 47 CFR Part 15 Subpart C Section 15.247 (b)(3)	ANSI C63.10-2013 Clause 11.9.1.3	PASS
6dB Bandwidth	FCC 47 CFR Part 15 Subpart C Section 15.247 (a)(2)	ANSI C63.10-2013 Clause 11.8.1	PASS
Power Spectral Density	FCC 47 CFR Part 15 Subpart C Section 15.247 (e)	ANSI C63.10-2013 Clause 11.10.2	PASS
Conducted Out of Band Emission	FCC 47 CFR Part 15 Subpart C Section 15.247(d)	ANSI C63.10-2013 Clause 11.11	PASS
Radiated Spurious Emissions	FCC 47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2013 Clause 11.11 & Clause 11.12	PASS
Band Edge Measurements (Radiated)	FCC 47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2013 Clause 11.13	PASS
<b>Disclaimer and Explanations:</b> The declared of product specification and data (e.g., antenna gain, RF specification, etc) for EUT presented in the report are provided by the customer, and the customer takes all the responsibilities for the accuracy of product specification.			



### 3. EQUIPMENT LIST

Radiated Emission Test Equipment List						
Used	Equipment	Manufacturer	Model No.	Serial Number	Cal. date	Cal. Due date
<input checked="" type="checkbox"/>	3m SAC	ETS-LINDGREN	3M	Euroshiedpn-CT001270-1317	22-Jan-2021	21-Jan-2024
<input checked="" type="checkbox"/>	Receiver	R&S	ESIB26	100114	3-Nov-2022	2-Nov-2023
<input checked="" type="checkbox"/>	EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY51440197	14-Apr-2023	13-Apr-2024
<input checked="" type="checkbox"/>	Loop Antenna	ETS-LINDGREN	6502	00202525	21-Nov-2022	20-Nov-2023
<input checked="" type="checkbox"/>	Broadband Antenna	ETS-LINDGREN	3142E	00201566	13-Dec-2022	12-Dec-2023
<input checked="" type="checkbox"/>	6dB Attenuator	Talent	RA6A5-N-18	18103001	13-Dec-2022	12-Dec-2023
<input checked="" type="checkbox"/>	Preamplifier	HP	8447F	2805A02960	1-Nov-2022	31-Oct-2023
<input checked="" type="checkbox"/>	Horn Antenna (Pre-amplifier)	ETS-LINDGREN	3117-PA	00201541	16-Apr-2023	15-Apr-2025
<input checked="" type="checkbox"/>	Pre-amplifier	ETS-LINDGREN	00118385	00201874	1-Nov-2022	31-Oct-2023
<input checked="" type="checkbox"/>	Horn Antenna (Pre-amplifier)	ETS-LINDGREN	3116C-PA	00202652	21-Nov-2022	20-Nov-2023
<input checked="" type="checkbox"/>	Pre-amplifier	ETS-LINDGREN	00118384	00202652	21-Nov-2022	20-Nov-2023
<input checked="" type="checkbox"/>	Band Reject Filter (2400MHz~2500MHz)	Micro-Tronics	BRM50702	G248	2-Nov-2022	1-Nov-2023
<input checked="" type="checkbox"/>	Multi device Controller	ETS-LINDGREN	7006-001	00160105	N/A	N/A
<input checked="" type="checkbox"/>	Test Software	Audix	e3	Software Version: 9.160323		

Conducted Emission Test Equipment List						
Used	Equipment	Manufacturer	Model No.	Serial Number	Cal. date	Cal. Due date
<input checked="" type="checkbox"/>	Receiver	R&S	ESR7	101181	1-Nov-2022	31-Oct-2023
<input checked="" type="checkbox"/>	Pulse Limiter	R&S	ESH3-Z2	0357.8810.54	1-Nov-2022	31-Oct-2023
<input checked="" type="checkbox"/>	LISN	R&S	ESH2-Z5	860014/024	1-Nov-2022	31-Oct-2023
<input type="checkbox"/>	LISN	ETS-Lindgren	3816/2SH	00201088	1-Nov-2022	31-Oct-2023
<input checked="" type="checkbox"/>	Test Software	Audix	e3	Software Version: 9 20151119i		

RF Conducted Test Equipment List						
Used	Equipment	Manufacturer	Model No.	Serial Number	Cal. date	Cal. Due date
<input checked="" type="checkbox"/>	EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY51440197	14-Apr-2023	13-Apr-2024
<input type="checkbox"/>	EXA Spectrum Analyzer	KEYSIGHT	N9020A	MY51286807	1-Nov-2022	31-Oct-2023
<input checked="" type="checkbox"/>	USB Wideband Power Sensor	KEYSIGHT	U2021XA	MY55430035	3-Nov-2022	2-Nov-2023

**Shenzhen UnionTrust Quality and Technology Co., Ltd.**

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.1

## 4. TEST CONFIGURATION

### 4.1 ENVIRONMENTAL CONDITIONS FOR TESTING

#### 4.1.1 Normal or Extreme Test Conditions

Environment Parameter	Selected Values During Tests		
Test Condition	Ambient		
	Temperature (°C)	Voltage	Relative Humidity (%)
NT/NV	+15 to +35	5.0 Vdc	20 to 75
<b>Remark:</b>			
1) NV: Normal Voltage; NT: Normal Temperature			

#### 4.1.2 Record of Normal Environment and Test Sample

Test Item	Temp. (°C)	Relative Humidity (%)	Pressure (kPa)	Sample No.	Tested by
AC Power Line Conducted Emission	25.2	57.0	98.9	S202305191506-ZJD07/7	Lucas Ouyang
Conducted Peak Output Power	24.3	52.3	98.9	S202305191506-ZJD08/8	Allen Zhou
6dB Bandwidth					
Power Spectral Density					
Conducted Out of Band Emission					
Radiated Spurious Emissions	24.1	66.8	99.0	S202305191506-ZJD06/6	Lucas Ouyang
Band Edge Measurements (Radiated)	22.1	69	98.4		Fire Huo

## 4.2 TEST CHANNELS

Mode	Tx/Rx Frequency	Test RF Channel Lists		
		Lowest(L)	Middle(M)	Highest(H11)
IEEE 802.11b	2412 MHz to 2472 MHz	Channel 1	Channel 7	Channel 11
		2412 MHz	2437 MHz	2462 MHz
IEEE 802.11g	2412 MHz to 2472 MHz	Channel 1	Channel 7	Channel 11
		2412 MHz	2437 MHz	2462 MHz
IEEE 802.11n-HT20	2412 MHz to 2472 MHz	Channel 1	Channel 7	Channel 11
		2412 MHz	2437 MHz	2462 MHz
Mode	Tx/Rx Frequency	Test RF Channel Lists		
		Lowest(L)	Middle(M)	Highest(H9)
IEEE 802.11n-HT40	2422 MHz to 2462 MHz	Channel 3	Channel 7	Channel 9
		2422 MHz	2437 MHz	2452 MHz

## 4.3 EUT TEST STATUS

Mode	Tx/Rx Function	Description
IEEE 802.11b IEEE 802.11g IEEE 802.11n-HT20 IEEE 802.11n-HT40	1Tx/1Rx	1. Keep the EUT in continuously transmitting or receiving with modulation test single.

Power Setting (Provided by the customer)
Power Setting: not applicable, test used software default power level.

Test Software (Provided by the customer)
Engineering mode: Secure CRT Commands;


### 4.4 PRE-SCAN



Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and data rate. Following data rate was (were) selected for the final test as listed below

Mode	Worst-case data rates
IEEE 802.11b	1 Mbps
IEEE 802.11g	6 Mbps
IEEE 802.11n-HT20	MCS0
IEEE 802.11n-HT40	MCS0


### 4.5 TEST SETUP

#### 4.5.1 For Radiated Emissions test setup

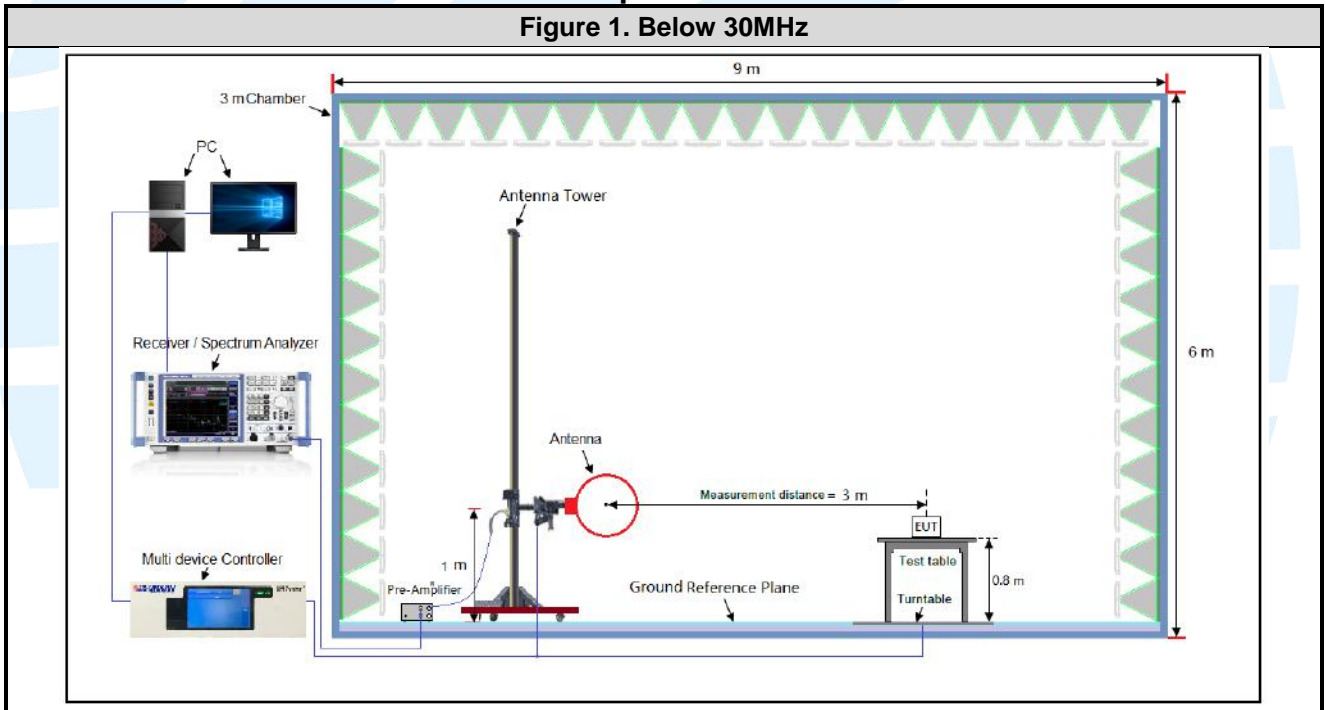


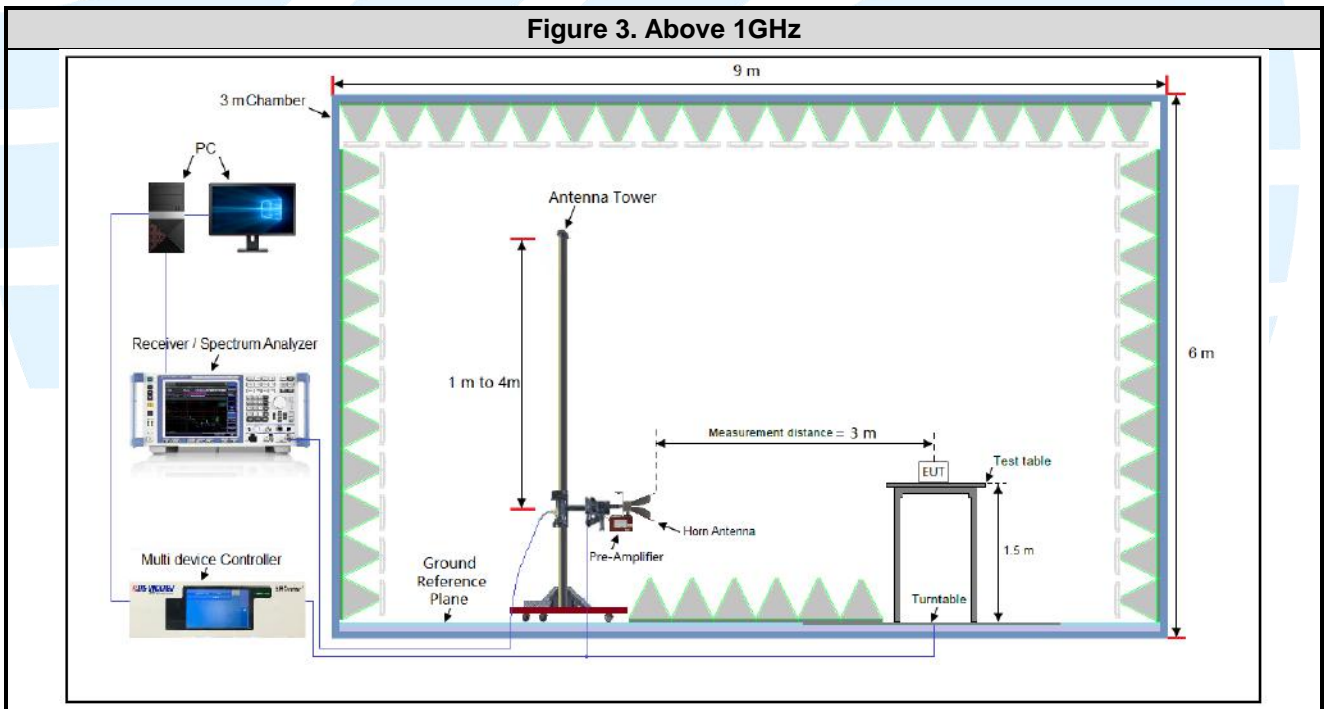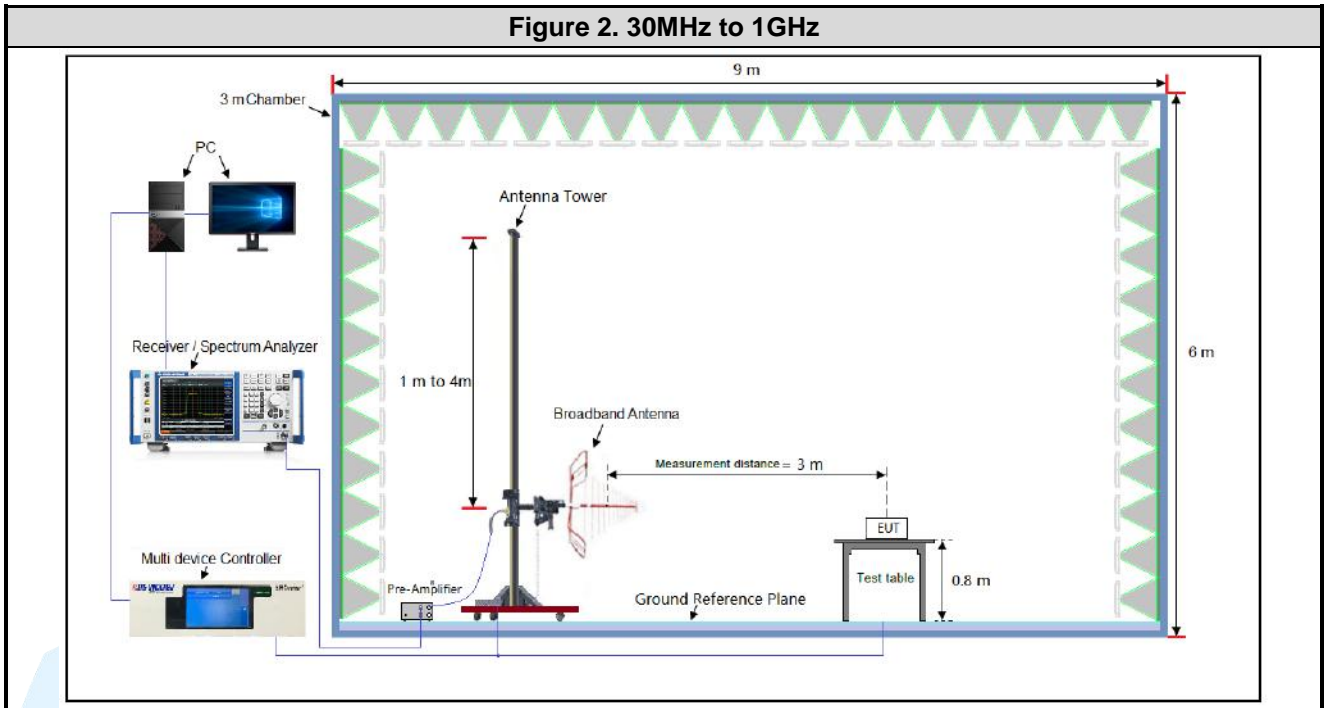

4.5.2 For Conducted Emissions test setup

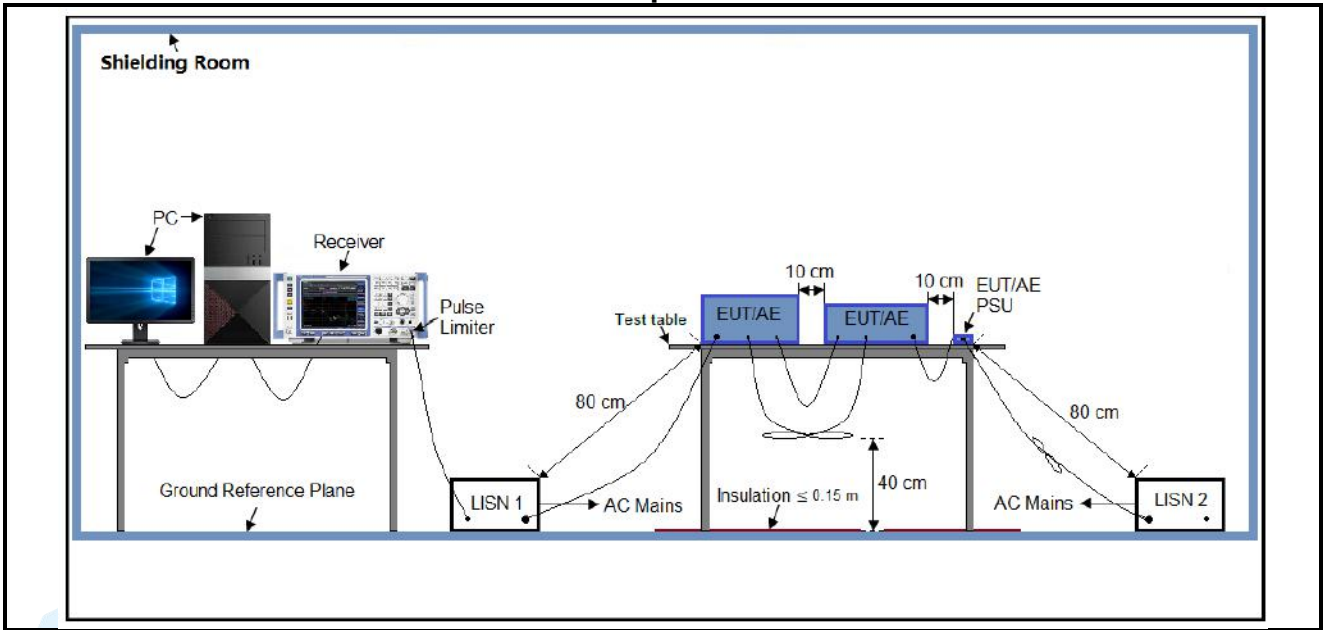

4.5.3 For Conducted RF test setup

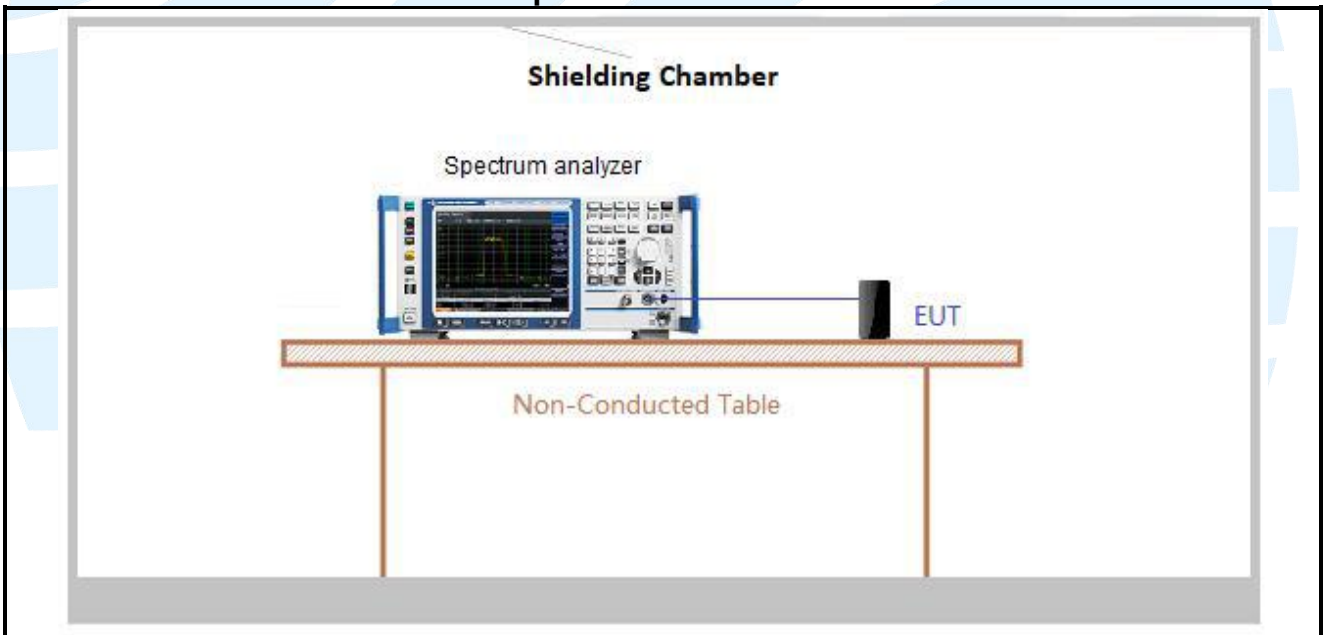

## 4.6 SYSTEM TEST CONFIGURATION

For emissions testing, the equipment under test (EUT) setup to transmit continuously to simplify the measurement methodology. Care was taken to ensure proper power supply voltages during testing. During testing, radiated emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario. It was powered by a 5.0V battery. Only the worst case data were recorded in this test report.

The signal is maximized through rotation and placement in the three orthogonal axes. The antenna height and polarization are varied during the search for maximum signal level. The antenna height is varied from 1 to 4 meters. Radiated emissions are taken at three meters unless the signal level is too low for measurement at that distance. If necessary, a pre-amplifier is used and/or the test is conducted at a closer distance. Therefore, all final radiated testing was performed with the EUT in orientation.

All readings are extrapolated back to the equivalent three meter reading using inverse scaling with distance. Analyzer resolution is 100 kHz or greater for frequencies below 1000 MHz. The resolution is 1 MHz or greater for frequencies above 1000 MHz. The spurious emissions more than 20 dB below the permissible value are not reported.

Radiated emission measurement were performed from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.

### 4.7 DUTY CYCLE

Test Procedure: ANSI C63.10-2013 Clause 11.6.


**Test Results**



Mode	Data Rates	On Time (msec)	Period (msec)	Duty Cycle (linear)	Duty Cycle (%)	Duty Cycle Factor (dB)	1/T Minimum VBW (kHz)
IEEE 802.11b	1 Mbps	12.40	12.50	0.99	99.20	0.00	0.01
IEEE 802.11g	6 Mbps	2.062	2.164	0.95	95.29	0.21	0.48
IEEE 802.11n-HT20	MCS 0	1.916	2.048	0.94	93.55	0.29	0.52
IEEE 802.11n-HT40	MCS 0	0.941	1.046	0.90	89.96	0.46	1.06

**Remark:**


- 1) Duty cycle= On Time/ Period;
- 2) Duty Cycle factor = 10 \* log(1/ Duty cycle);

The test plots as follows

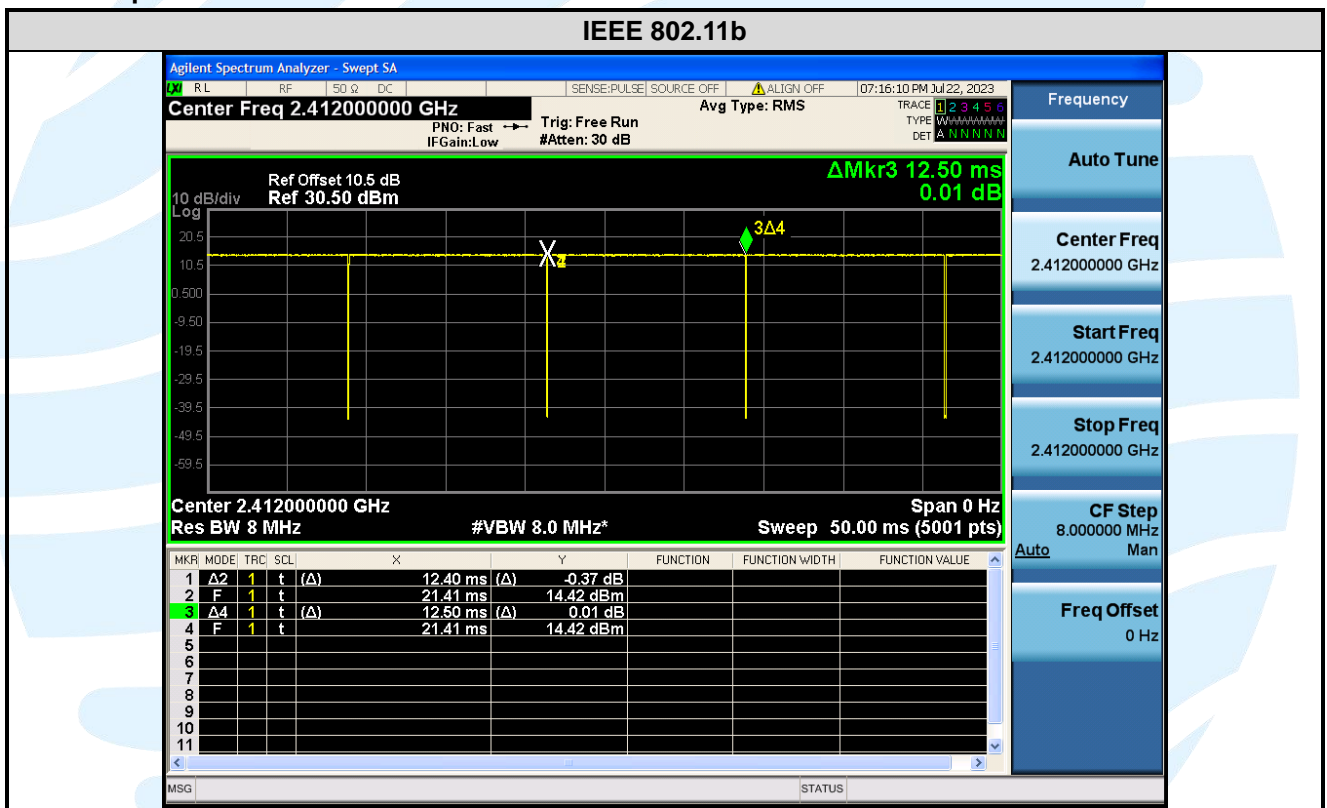

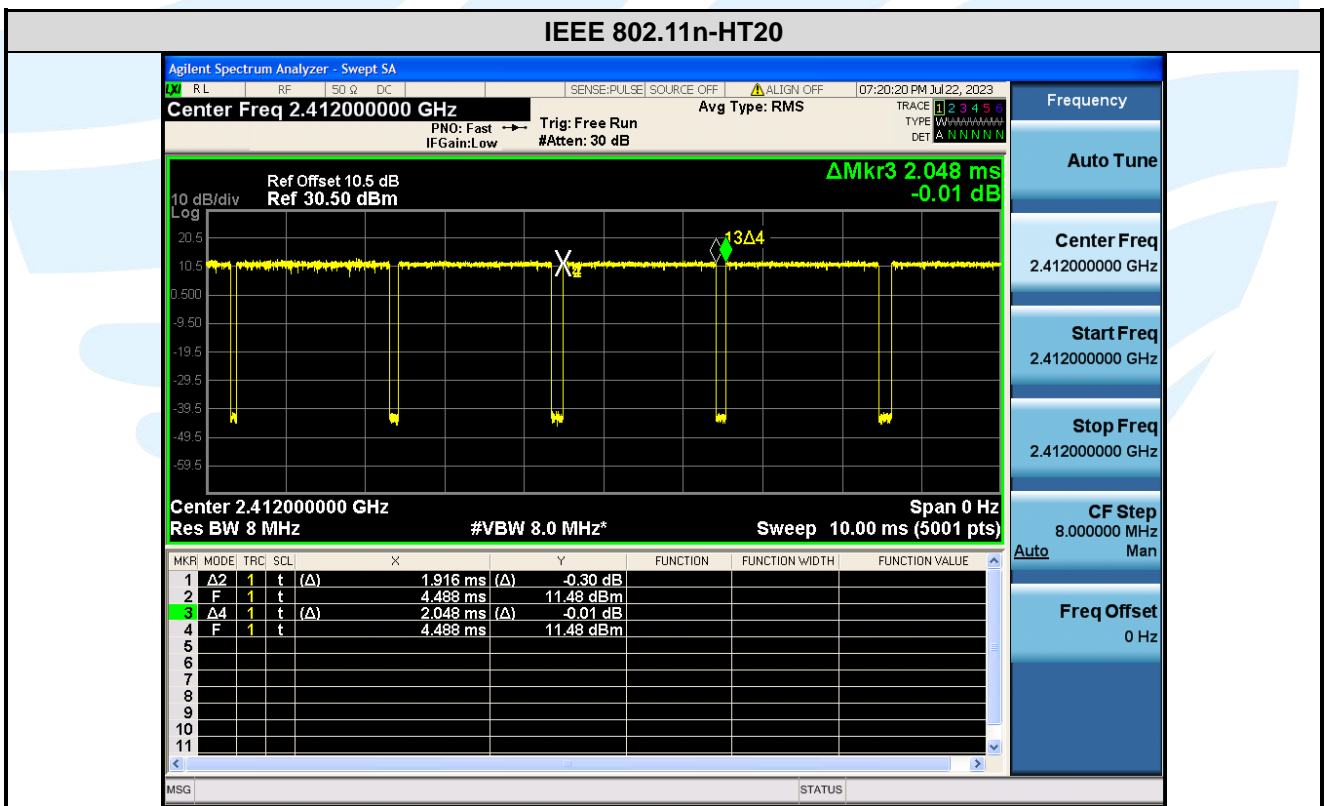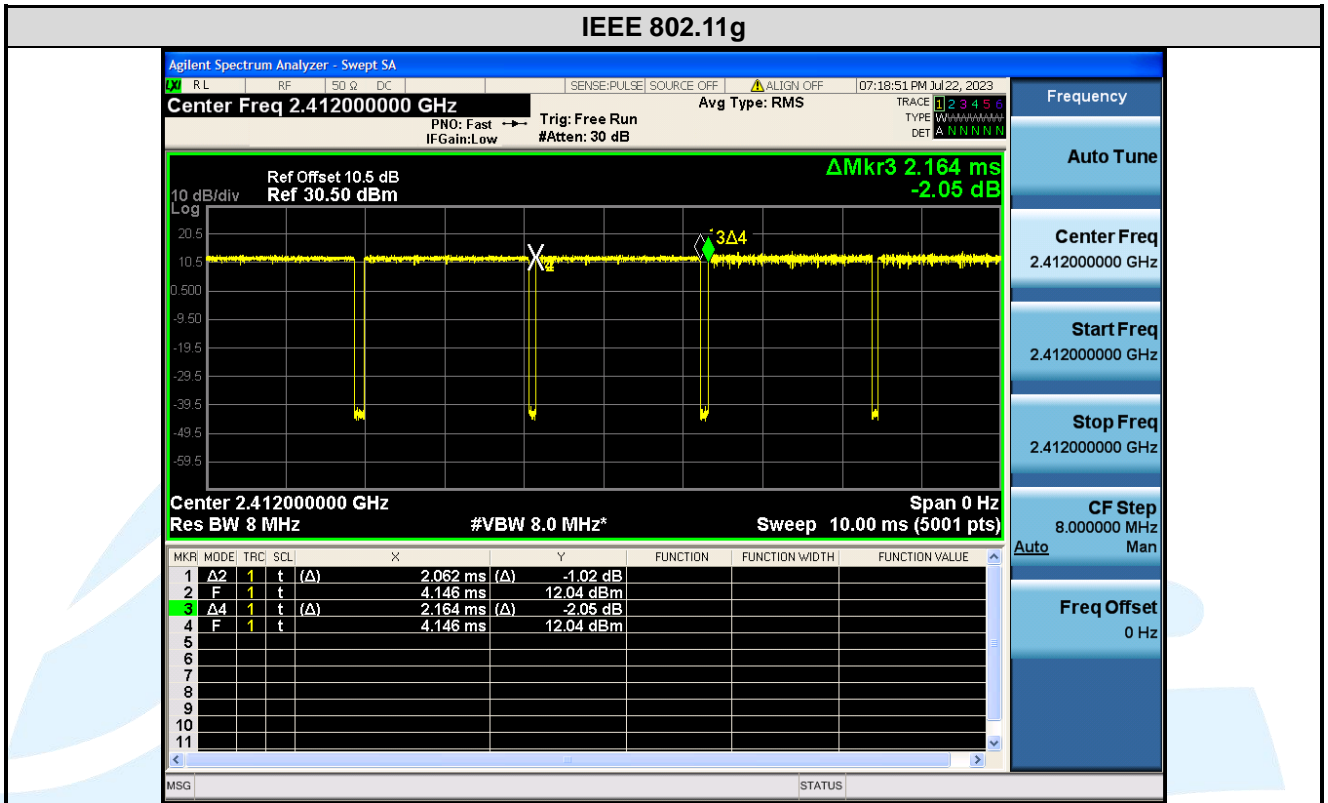



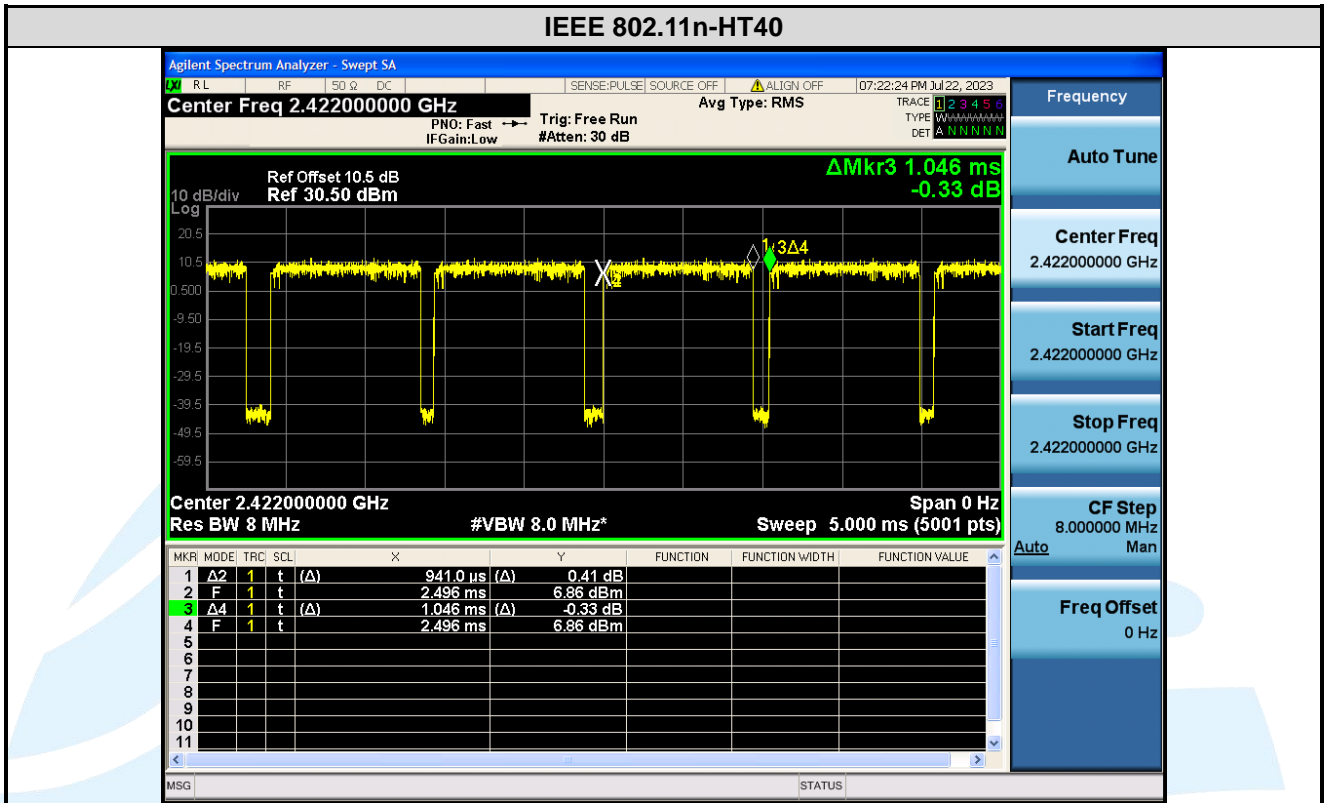

**Shenzhen UnionTrust Quality and Technology Co., Ltd.**

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.1

## 5. RADIO TECHNICAL REQUIREMENTS SPECIFICATION

### 5.1 REFERENCE DOCUMENTS FOR TESTING

No.	Identity	Document Title
1	FCC 47 CFR Part 2	Frequency allocations and radio treaty matters; general rules and regulations
2	FCC 47 CFR Part 15	Radio Frequency Devices
3	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices
4	KDB 558074 D01 15.247 Meas Guidance v05r02	Guidance for compliance measurements on Digital Transmission Systems, Frequency Hopping Spread Spectrum system, and Hybrid system devices operating under Section 15.247 of the FCC rules

### 5.2 ANTENNA REQUIREMENT

Standard Requirement
<p><b>15.203 requirement:</b> An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</p>
<p><b>15.247(b) (4) requirement:</b> The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.</p>
<p><b>EUT Antenna:</b> Antenna in the interior of the equipment and no consideration of replacement. The gain of the antenna is 1.5 dBi.</p>

### 5.3 CONDUCTED PEAK OUTPUT POWER

**Test Requirement:** FCC 47 CFR Part 15 Subpart C Section15.247 (b)(3)

**Test Method:** ANSI C63.10-2013 Clause 11.9.1.3

**Limit:** For systems using digital modulation in the 2400-2483.5 MHz bands: 1 Watt.

**Test Procedure:**

1. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the power meter.
2. Measure out each test modes' peak or average output power, record the power level.

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.

**Test Setup:** Refer to section 4.5.3 for details.

**Instruments Used:** Refer to section 3 for details

**Test Results:**

Mode	Channel/ Frequency (MHz)	Maximum Conducted Peak Power		Maximum Conducted Average Power (dBm)		Limit (dBm)	Result
		(dBm)	(W)	Measured Value	Corrected Value		
IEEE 802.11b	1(2412)	19.99	0.0998	16.89	16.89	30	Pass
	6(2437)	19.58	0.0908	16.81	16.81	30	Pass
	11(2462)	19.36	0.0863	16.66	16.66	30	Pass
IEEE 802.11g	1(2412)	21.47	0.1403	11.09	11.30	30	Pass
	6(2437)	21.27	0.1340	11.03	11.24	30	Pass
	11(2462)	21.78	0.1507	10.95	11.16	30	Pass
IEEE 802.11n-HT20	1(2412)	23.25	0.2113	12.75	13.04	30	Pass
	6(2437)	22.45	0.1758	12.73	13.02	30	Pass
	11(2462)	22.92	0.1959	12.65	12.94	30	Pass
IEEE 802.11n-HT40	3(2422)	22.99	0.1991	11.83	12.29	30	Pass
	6(2437)	23.57	0.2275	11.80	12.26	30	Pass
	9(2452)	23.40	0.2188	11.74	12.20	30	Pass

Note: The antenna gain of 1.5 dBi less than 6dBi maximum permission antenna gain value based on 1 watt (30dBm) peak output power limit.

## 5.46 DB BANDWIDTH

<b>Test Requirement:</b>	FCC 47 CFR Part 15 Subpart C Section 15.247 (a)(2)
<b>Test Method:</b>	ANSI C63.10-2013 Clause 11.8.1
<b>Limit:</b>	For direct sequence systems, the minimum 6dB bandwidth shall be at least 500kHz
<b>Test Procedure:</b>	<p>Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.</p> <p>Use the following spectrum analyzer settings:</p> <ul style="list-style-type: none"><li>a) Set RBW = 100 kHz.</li><li>b) Set the video bandwidth (VBW) <math>\geq 3 \times</math> RBW.</li><li>c) Detector = Peak.</li><li>d) Trace mode = max hold.</li><li>e) Sweep = auto couple.</li><li>f) Allow the trace to stabilize.</li><li>g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.</li></ul> <p>Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.</p>
<b>Test Setup:</b>	Refer to section 4.5.3 for details.
<b>Instruments Used:</b>	Refer to section 3 for details
<b>Test Mode:</b>	Link mode
<b>Test Results:</b>	<b>Please refer to Appendix A</b>

## 5.5 POWER SPECTRAL DENSITY

**Test Requirement:** FCC 47 CFR Part 15 Subpart C Section 15.247 (e)

**Test Method:** ANSI C63.10-2013 Clause 11.10.2

**Limit:** For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band during any time interval of continuous transmission.

**Test Procedure:** Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

Use the following spectrum analyzer settings:

- a) Set analyzer center frequency to DTS channel center frequency.
- b) Set the span to 1.5 times the DTS bandwidth.
- c) Set the RBW to:  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .
- d) Set the VBW  $\geq 3 \times \text{RBW}$ .
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum amplitude level within the RBW.
- j) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.

**Test Setup:** Refer to section 4.5.3 for details.

**Instruments Used:** Refer to section 3 for details

**Test Mode:** Link mode

**Test Results:** Please refer to Appendix A

## 5.6 CONDUCTED OUT OF BAND EMISSION

**Test Requirement:** FCC 47 CFR Part 15 Subpart C Section 15.247(d)

**Test Method:** ANSI C63.10-2013 Clause 11.11

**Limit:** In any 100kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power.

**Test Procedure:** Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

Use the following spectrum analyzer settings:

**Step 1: Measurement Procedure REF**

- a) Set instrument center frequency to DTS channel center frequency.
- b) Set the span to  $\geq 1.5$  times the DTS bandwidth.
- c) Set the RBW = 100 kHz.
- d) Set the VBW  $\geq 3 \times$  RBW.
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum PSD level.
- j) Note that the channel found to contain the maximum PSD level can be used to establish the reference level.

**Step 2: Measurement Procedure OOB**

- a) Set RBW = 100 kHz.
- b) Set VBW  $\geq 300$  kHz.
- c) Detector = peak.
- d) Sweep = auto couple.
- e) Trace Mode = max hold.
- f) Allow trace to fully stabilize.
- g) Use the peak marker function to determine the maximum amplitude level.

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.

**Test Setup:** Refer to section 4.5.3 for details.

**Instruments Used:** Refer to section 3 for details

**Test Mode:** Link mode

**Test Results:** Please refer to Appendix A

## 5.7 RADIATED SPURIOUS EMISSIONS

**Test Requirement:** FCC 47 CFR Part 15 Subpart C Section 15.205/15.209

**Test Method:** ANSI C63.10-2013 Clause 11.11 & Clause 11.12

**Receiver Setup:**

Frequency	RBW
0.009 MHz-0.150 MHz	200/300 kHz
0.150 MHz -30 MHz	9/10 kHz
30 MHz-1 GHz	100/120 kHz
Above 1 GHz	1 MHz

**Limits:**

**Spurious Emissions**

Frequency	Field strength (microvolt/meter)	Limit (dB $\mu$ V/m)	Remark	Measurement distance (m)
0.009 MHz-0.490 MHz	2400/F(kHz)	--	--	300
0.490 MHz-1.705 MHz	24000/F(kHz)	--	--	30
1.705 MHz-30 MHz	30	--	--	30
30 MHz-88 MHz	100	40.0	Quasi-peak	3
88 MHz-216 MHz	150	43.5	Quasi-peak	3
216 MHz-960 MHz	200	46.0	Quasi-peak	3
960MHz-1GHz	500	54.0	Quasi-peak	3
Above 1 GHz	500	54.0	Average	3

**Remark:**

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000 MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20 dB under any condition of modulation.

**Test Setup:** Refer to section 4.4.1 for details.

**Test Procedures:**

1. From 30 MHz to 1GHz test procedure as below:
  - 1) The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
  - 2) The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
  - 3) The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
  - 4) For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rota table table was turned from 0 degrees to 360 degrees to find the maximum reading.
  - 5) The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
  - 6) If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
2. Above 1GHz test procedure as below:
  - 1) Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter (Above 18GHz the distance is 1 meter and table is 1.5 meter).

### Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.1

- 2) Test the EUT in the lowest channel, middle channel, the Highest channel
- 3) The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the Y positioning which it is worse case.
- 4) Repeat above procedures until all frequencies measured was complete.

**Equipment Used:** Refer to section 3 for details.

**Test Result:** Pass

**The worst measurement data as follows:**


**Radiated Emission Test Data (9 kHz ~ 30 MHz):**

The amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required to be report.

**Radiated Emission Test Data (30 MHz ~ 1 GHz):**


**Worst-Case Configuration**

**Horizontal**

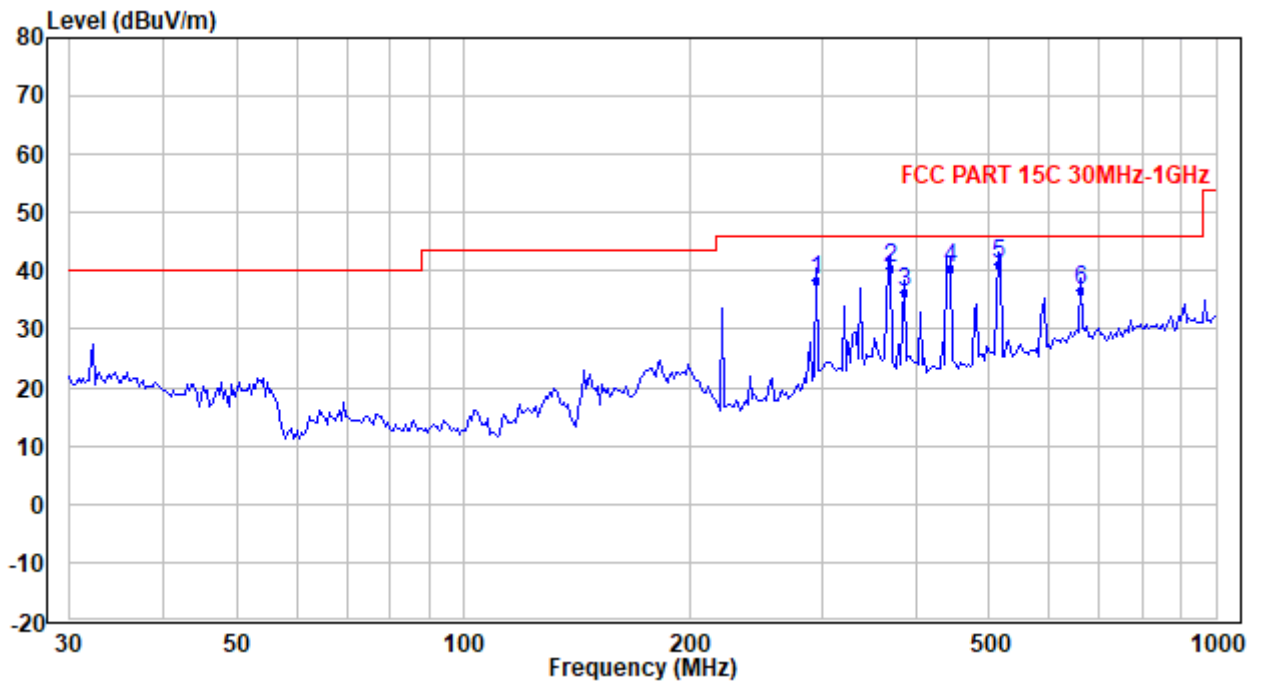

No.	Frequency (MHz)	Reading (dBuV)	Correction factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	294.426	45.4	-6.8	38.5	46.0	-7.5	QP
2	368.668	45.2	-4.8	40.4	46.0	-5.6	QP
3	384.545	40.5	-4.2	36.3	46.0	-9.7	QP
4	442.572	44.0	-3.4	40.5	46.0	-5.5	QP
5	512.948	42.8	-1.7	41.1	46.0	-4.9	QP
6	660.602	35.5	1.2	36.7	46.0	-9.3	QP



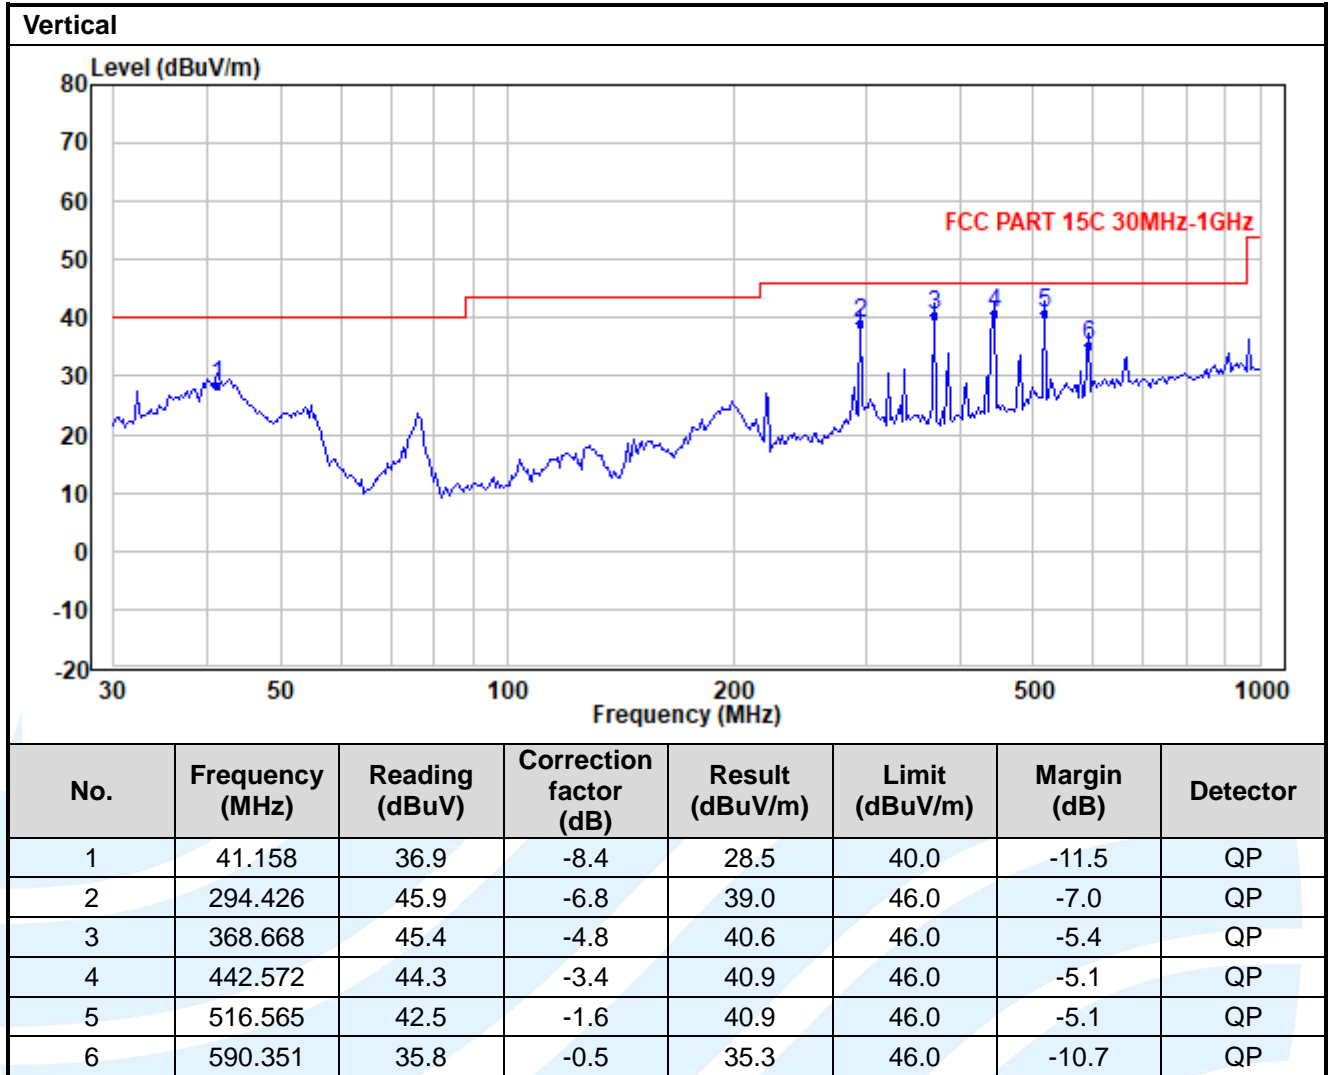

**Shenzhen UnionTrust Quality and Technology Co., Ltd.**

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.1

Radiated Emission Test Data (Above 1GHz):								
IEEE 802.11b Channel 1:								
No.	Frequency (MHz)	Reading (dBµV)	Correction factor (dB/m)	Result (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Detector	Antenna Polaxis
1	4824	40.5	-1.5	39.0	74	-35.0	Peak	Horizontal
2	4824	29.8	-1.5	28.3	54	-25.8	Average	Horizontal
3	7236	40.1	2.3	42.4	74	-31.6	Peak	Horizontal
4	7236	28.3	2.3	30.6	54	-23.4	Average	Horizontal
5	4824	41.7	-1.5	40.2	74	-33.8	Peak	Vertical
6	4824	28.8	-1.5	27.3	54	-26.7	Average	Vertical
7	7236	38.6	2.3	40.9	74	-33.1	Peak	Vertical
8	7236	27.2	2.3	29.5	54	-24.5	Average	Vertical
IEEE 802.11b Channel 6:								
1	4874	41.7	-1.5	40.2	74	-33.8	Peak	Horizontal
2	4874	29.2	-1.5	27.7	54	-26.3	Average	Horizontal
3	7311	41.6	2.3	43.9	74	-30.1	Peak	Horizontal
4	7311	27.4	2.3	29.7	54	-24.3	Average	Horizontal
5	4874	41.1	-1.5	39.7	74	-34.3	Peak	Vertical
6	4874	28.9	-1.5	27.4	54	-26.7	Average	Vertical
7	7311	39.2	2.3	41.5	74	-32.5	Peak	Vertical
8	7311	27.3	2.3	29.6	54	-24.4	Average	Vertical
IEEE 802.11b Channel 11:								
1	4924	41.0	-1.4	39.6	74	-34.4	Peak	Horizontal
2	4924	29.5	-1.4	28.1	54	-25.9	Average	Horizontal
3	7386	39.2	2.4	41.6	74	-32.4	Peak	Horizontal
4	7386	26.3	2.4	28.7	54	-25.3	Average	Horizontal
5	4924	41.4	-1.4	40.0	74	-34.0	Peak	Vertical
6	4924	29.3	-1.4	27.9	54	-26.1	Average	Vertical
7	7386	39.2	2.4	41.6	74	-32.4	Peak	Vertical
8	7386	26.4	2.4	28.8	54	-25.2	Average	Vertical

**Shenzhen UnionTrust Quality and Technology Co., Ltd.**

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.1

Radiated Emission Test Data (Above 1GHz):								
IEEE 802.11g Channel 1:								
No.	Frequency (MHz)	Reading (dBµV)	Correction factor (dB/m)	Result (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Detector	Antenna Polaxis
1	4824	41.3	-1.5	39.8	74	-34.2	Peak	Horizontal
2	4824	28.9	-1.5	27.4	54	-26.6	Average	Horizontal
3	7236	39.6	2.3	41.9	74	-32.1	Peak	Horizontal
4	7236	27.3	2.3	29.6	54	-24.4	Average	Horizontal
5	4824	40.7	-1.5	39.2	74	-34.8	Peak	Vertical
6	4824	29.8	-1.5	28.3	54	-25.8	Average	Vertical
7	7236	39.1	2.3	41.4	74	-32.6	Peak	Vertical
8	7236	27.2	2.3	29.5	54	-24.5	Average	Vertical
IEEE 802.11g Channel 6:								
1	4874	40.7	-1.5	39.3	74	-34.7	Peak	Horizontal
2	4874	29.0	-1.5	27.5	54	-26.6	Average	Horizontal
3	7311	38.7	2.3	41.0	74	-33.0	Peak	Horizontal
4	7311	27.7	2.3	30.0	54	-24.0	Average	Horizontal
5	4874	40.5	-1.5	39.1	74	-34.9	Peak	Vertical
6	4874	29.2	-1.5	27.7	54	-26.3	Average	Vertical
7	7311	39.1	2.3	41.4	74	-32.6	Peak	Vertical
8	7311	27.4	2.3	29.7	54	-24.3	Average	Vertical
IEEE 802.11g Channel 11:								
1	4924	40.1	-1.4	38.7	74	-35.3	Peak	Horizontal
2	4924	28.3	-1.4	26.9	54	-27.1	Average	Horizontal
3	7386	38.0	2.4	40.4	74	-33.6	Peak	Horizontal
4	7386	26.3	2.4	28.7	54	-25.3	Average	Horizontal
5	4924	40.8	-1.4	39.4	74	-34.6	Peak	Vertical
6	4924	29.4	-1.4	28.0	54	-26.0	Average	Vertical
7	7386	38.6	2.4	40.9	74	-33.1	Peak	Vertical
8	7386	26.2	2.4	28.6	54	-25.4	Average	Vertical

Radiated Emission Test Data (Above 1GHz):								
IEEE 802.11n-HT20_Channel 1:								
No.	Frequency (MHz)	Reading (dBµV)	Correction factor (dB/m)	Result (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Detector	Antenna Polaxis
1	4824	40.6	-1.5	39.1	74	-34.9	Peak	Horizontal
2	4824	28.7	-1.5	27.2	54	-26.8	Average	Horizontal
3	7236	38.9	2.3	41.2	74	-32.8	Peak	Horizontal
4	7236	27.3	2.3	29.6	54	-24.4	Average	Horizontal
5	4824	40.0	-1.5	38.5	74	-35.5	Peak	Vertical
6	4824	28.6	-1.5	27.1	54	-26.9	Average	Vertical
7	7236	38.3	2.3	40.6	74	-33.4	Peak	Vertical
8	7236	27.0	2.3	29.3	54	-24.7	Average	Vertical
IEEE 802.11n-HT20_Channel 6:								
1	4874	41.0	-1.5	39.5	74	-34.5	Peak	Horizontal
2	4874	29.1	-1.5	27.6	54	-26.4	Average	Horizontal
3	7311	39.0	2.3	41.3	74	-32.7	Peak	Horizontal
4	7311	27.7	2.3	30.0	54	-24.0	Average	Horizontal
5	4874	41.4	-1.5	40.0	74	-34.0	Peak	Vertical
6	4874	28.9	-1.5	27.4	54	-26.7	Average	Vertical
7	7311	39.9	2.3	42.2	74	-31.8	Peak	Vertical
8	7311	27.3	2.3	29.6	54	-24.4	Average	Vertical
IEEE 802.11n-HT20_Channel 11:								
1	4924	41.3	-1.4	39.8	74	-34.2	Peak	Horizontal
2	4924	28.4	-1.4	27.0	54	-27.0	Average	Horizontal
3	7386	39.2	2.4	41.6	74	-32.4	Peak	Horizontal
4	7386	26.2	2.4	28.6	54	-25.4	Average	Horizontal
5	4924	41.6	-1.4	40.1	74	-33.9	Peak	Vertical
6	4924	28.6	-1.4	27.2	54	-26.8	Average	Vertical
7	7386	37.4	2.4	39.8	74	-34.2	Peak	Vertical
8	7386	25.4	2.4	27.8	54	-26.2	Average	Vertical

**Shenzhen UnionTrust Quality and Technology Co., Ltd.**

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.1

Radiated Emission Test Data (Above 1GHz):								
IEEE 802.11n-HT40_ Channel 3:								
No.	Frequency (MHz)	Reading (dBμV)	Correction factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Antenna Polaxis
1	4844	41.4	-1.5	39.9	74	-34.1	Peak	Horizontal
2	4844	29.0	-1.5	27.5	54	-26.5	Average	Horizontal
3	7266	39.7	2.3	42.0	74	-32.0	Peak	Horizontal
4	7266	27.2	2.3	29.5	54	-24.5	Average	Horizontal
5	4844	40.2	-1.5	38.7	74	-35.3	Peak	Vertical
6	4844	28.8	-1.5	27.3	54	-26.8	Average	Vertical
7	7266	39.0	2.3	41.3	74	-32.7	Peak	Vertical
8	7266	27.3	2.3	29.6	54	-24.4	Average	Vertical
IEEE 802.11n-HT40_ Channel 6:								
1	4874	40.9	-1.5	39.4	74	-34.6	Peak	Horizontal
2	4874	29.0	-1.5	27.5	54	-26.6	Average	Horizontal
3	7311	38.6	2.3	40.9	74	-33.1	Peak	Horizontal
4	7311	27.3	2.3	29.6	54	-24.4	Average	Horizontal
5	4874	40.1	-1.5	38.7	74	-35.3	Peak	Vertical
6	4874	28.9	-1.5	27.4	54	-26.6	Average	Vertical
7	7311	39.1	2.3	41.4	74	-32.6	Peak	Vertical
8	7311	27.2	2.3	29.5	54	-24.5	Average	Vertical
IEEE 802.11n-HT40_ Channel 9:								
1	4904	41.3	-1.4	39.9	74	-34.1	Peak	Horizontal
2	4904	28.7	-1.4	27.3	54	-26.7	Average	Horizontal
3	7356	38.0	2.3	40.4	74	-33.6	Peak	Horizontal
4	7356	25.7	2.3	28.0	54	-26.0	Average	Horizontal
5	4904	41.0	-1.4	39.6	74	-34.4	Peak	Vertical
6	4904	28.3	-1.4	26.9	54	-27.1	Average	Vertical
7	7356	38.8	2.3	41.2	74	-32.8	Peak	Vertical
8	7356	26.5	2.3	28.8	54	-25.2	Average	Vertical

Remark:

1. Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain, the value was added to Original Receiver Reading by the software automatically.
2. Result = Reading + Correct Factor.
3. Margin = Result – Limit.

### 5.8 BAND EDGE MEASUREMENTS (RADIATED)

**Test Requirement:** FCC 47 CFR Part 15 Subpart C Section 15.205/15.209

**Test Method:** ANSI C63.10-2013 Clause 11.13

**Limits:**

Radiated emissions which fall in the restricted bands, as defined in section 15.205(a), must also comply with the radiated emission limits specified in section 15.209(a).

Frequency	Limit (dBµV/m @3m)	Remark
30 MHz-88 MHz	40.0	Quasi-peak Value
88 MHz-216 MHz	43.5	Quasi-peak Value
216 MHz-960 MHz	46.0	Quasi-peak Value
960 MHz-1 GHz	54.0	Quasi-peak Value
Above 1 GHz	54.0	Average Value
	74.0	Peak Value

**Test Setup:** Refer to section 4.4.1 for details.

**Test Procedures:**

Radiated band edge measurements at 2390 MHz and 2483.5 MHz were made with the unit transmitting in the low end of the channel range and the high end closest to the restricted bands respectively. The emissions were made on the 966 Semi-Chamber. Use (resolution bandwidth (RBW) = 1 MHz, video bandwidth (VBW) = 3 MHz for peak levels and RBW = 1 MHz and VBW = 10 Hz or 1/T for average levels).



1. Use radiated spurious emission test procedure described in clause 5.10. The transmitter output (antenna port) was connected to the test receiver.
2. Set the PK and AV limit line.
3. Record the fundamental emission and emissions out of the band-edge.
4. Determine band-edge compliance as required.

**Equipment Used:** Refer to section 3 for details.

**Test Result:** Pass

**The measurement data as follows:**

IEEE 802.11b

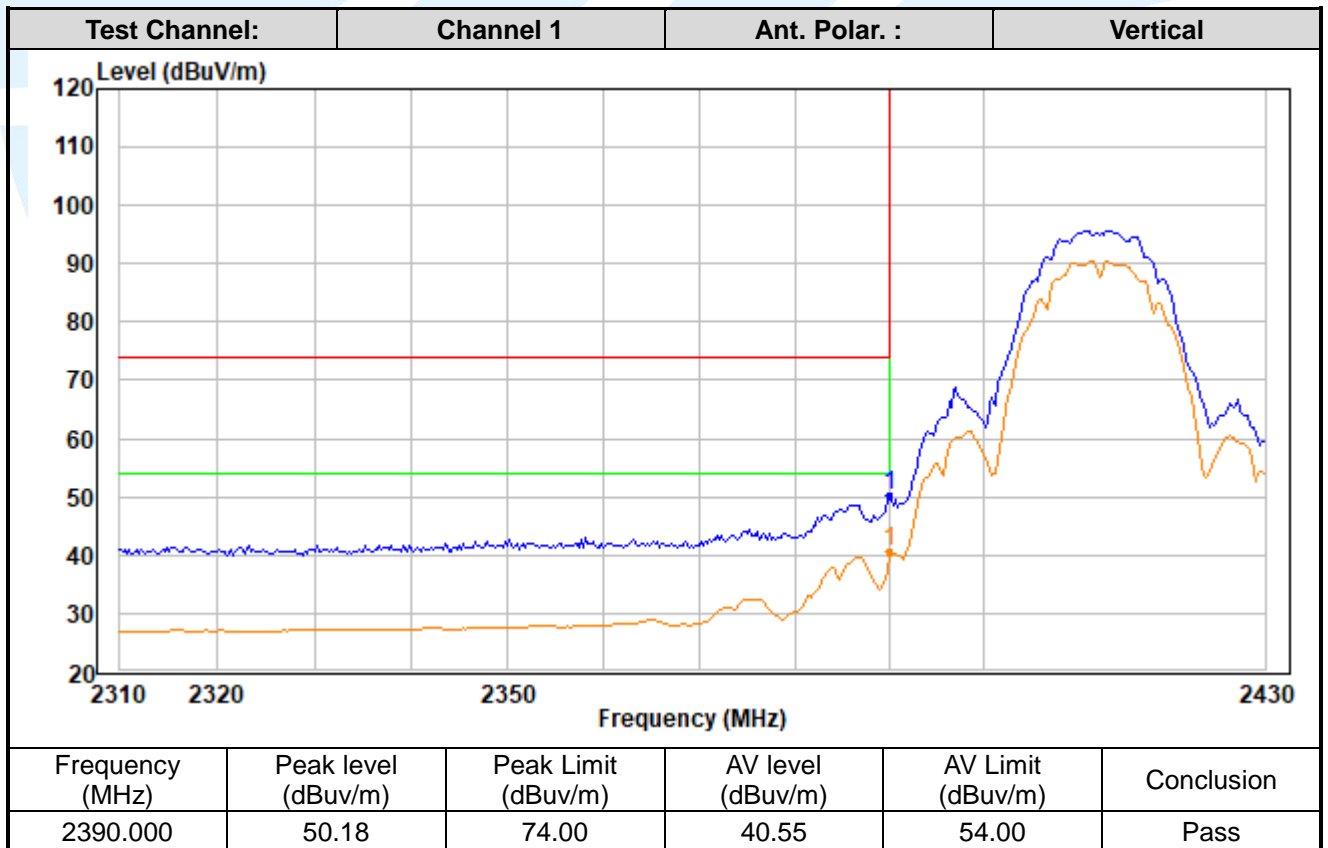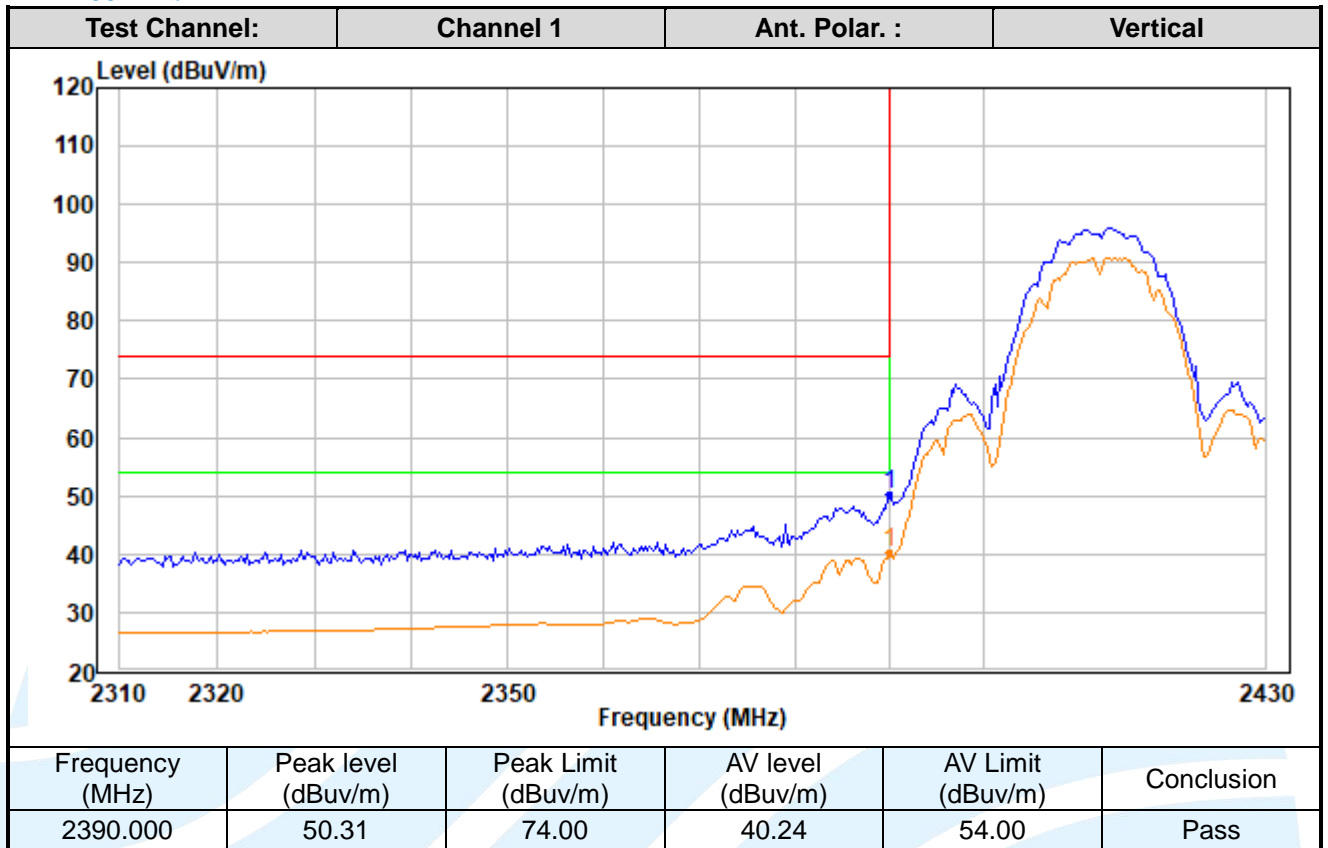

**Shenzhen UnionTrust Quality and Technology Co., Ltd.**

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China



Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.1

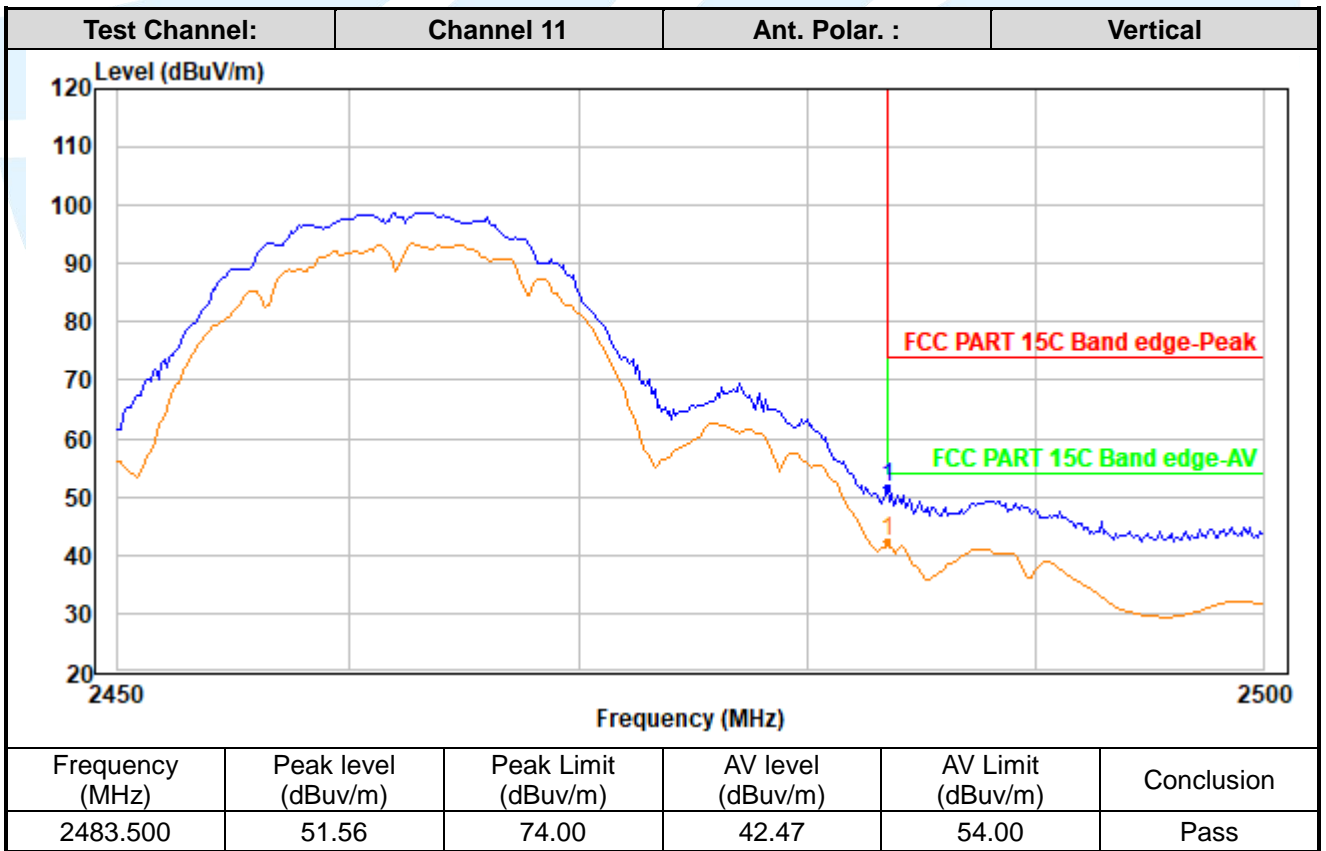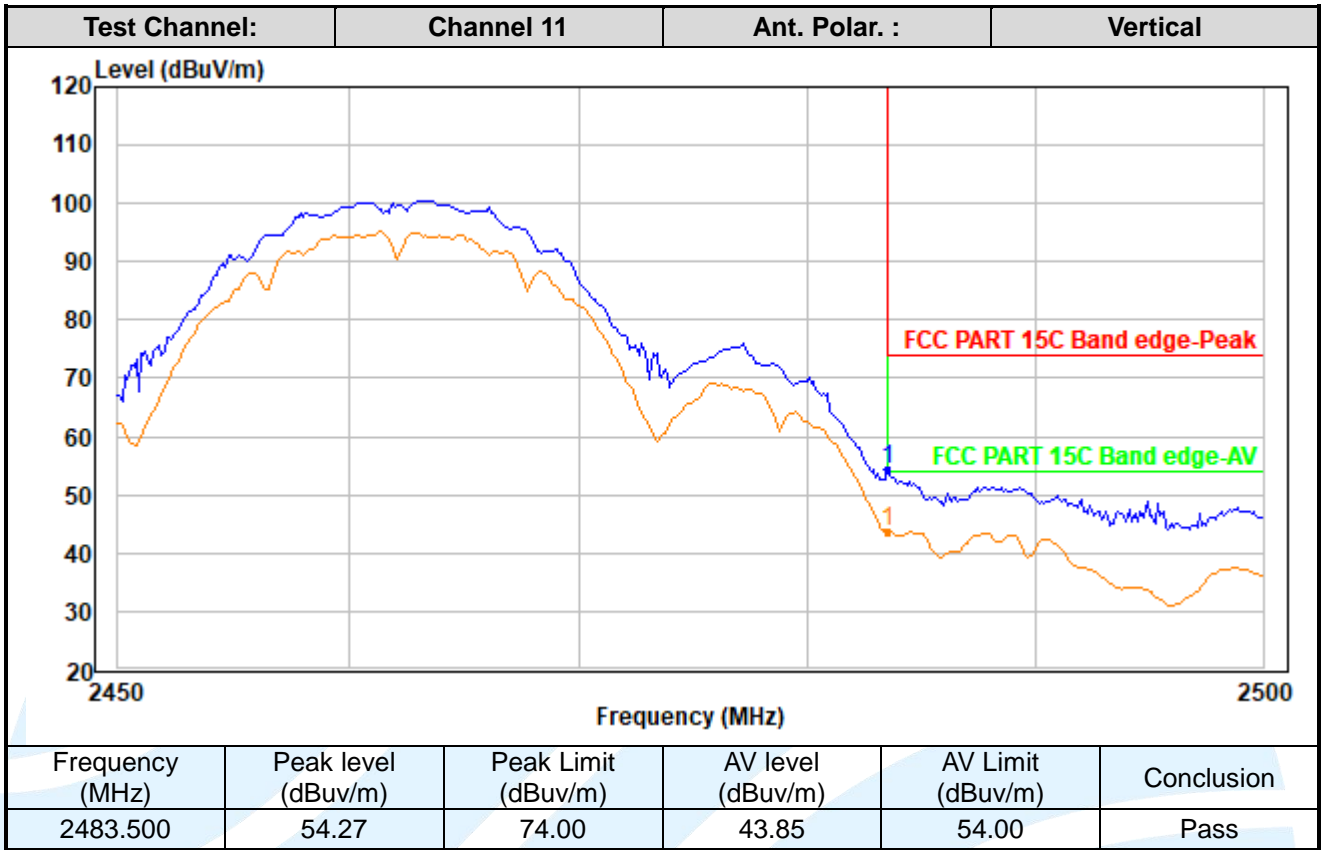

**Shenzhen UnionTrust Quality and Technology Co., Ltd.**

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886



E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.1



IEEE 802.11g

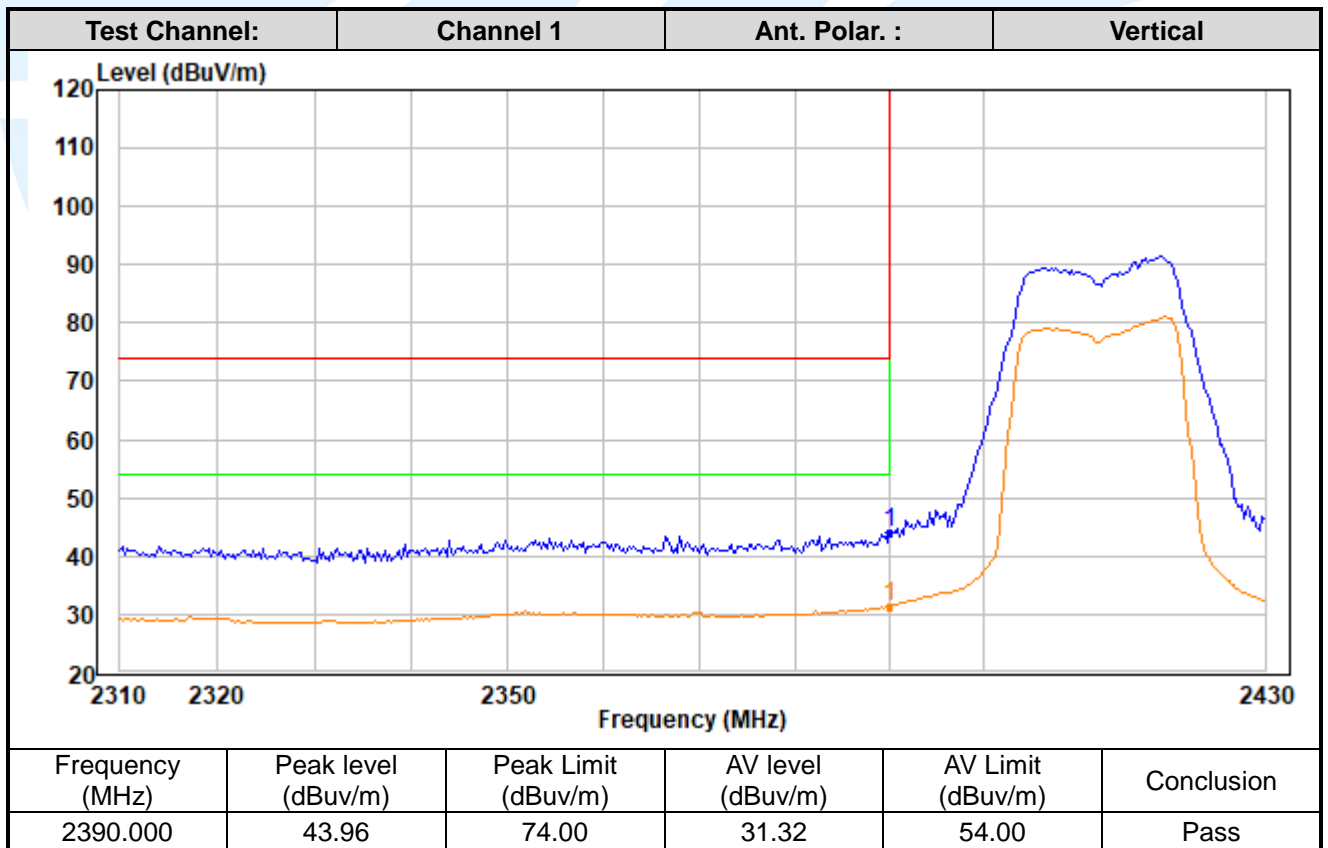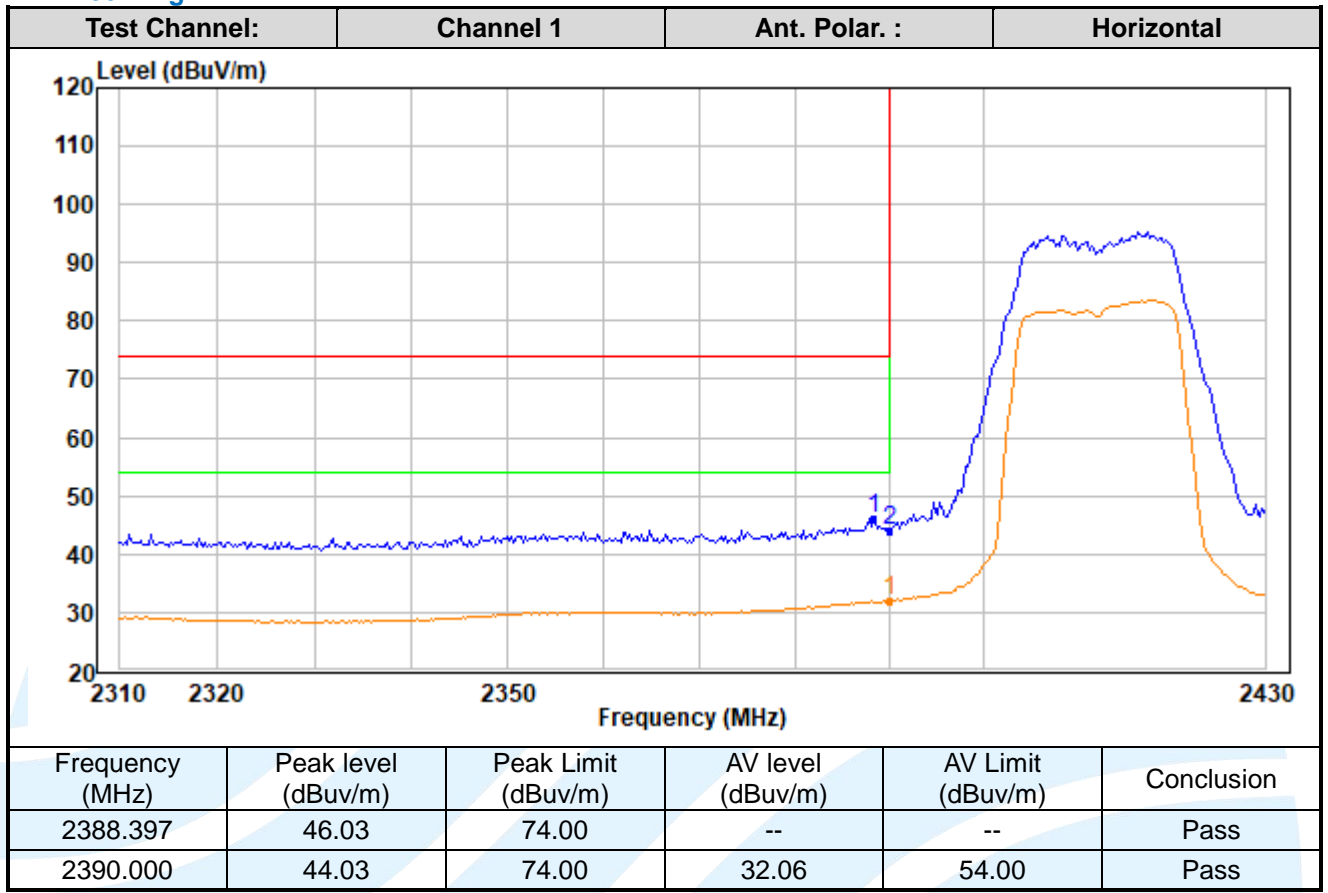

**Shenzhen UnionTrust Quality and Technology Co., Ltd.**

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China



Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.1

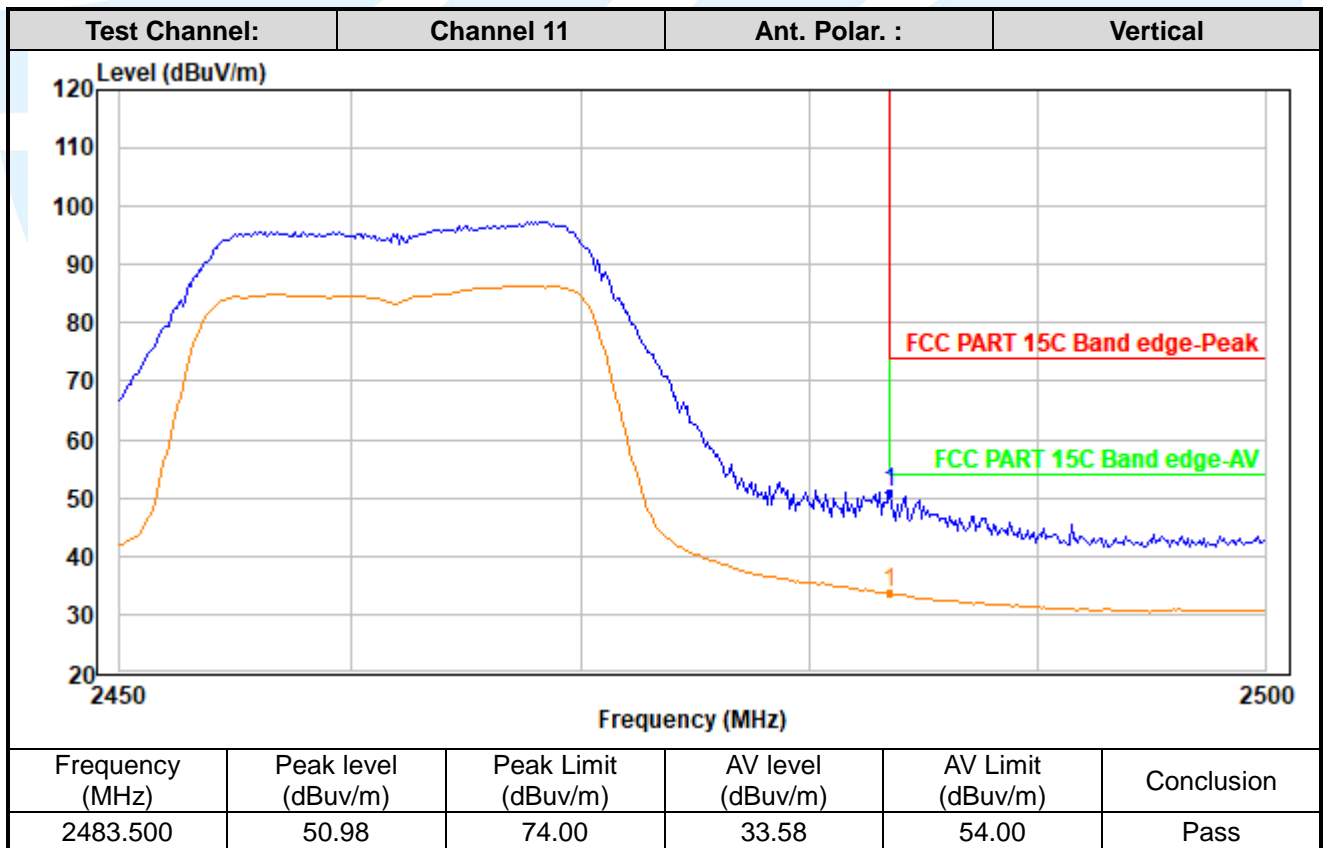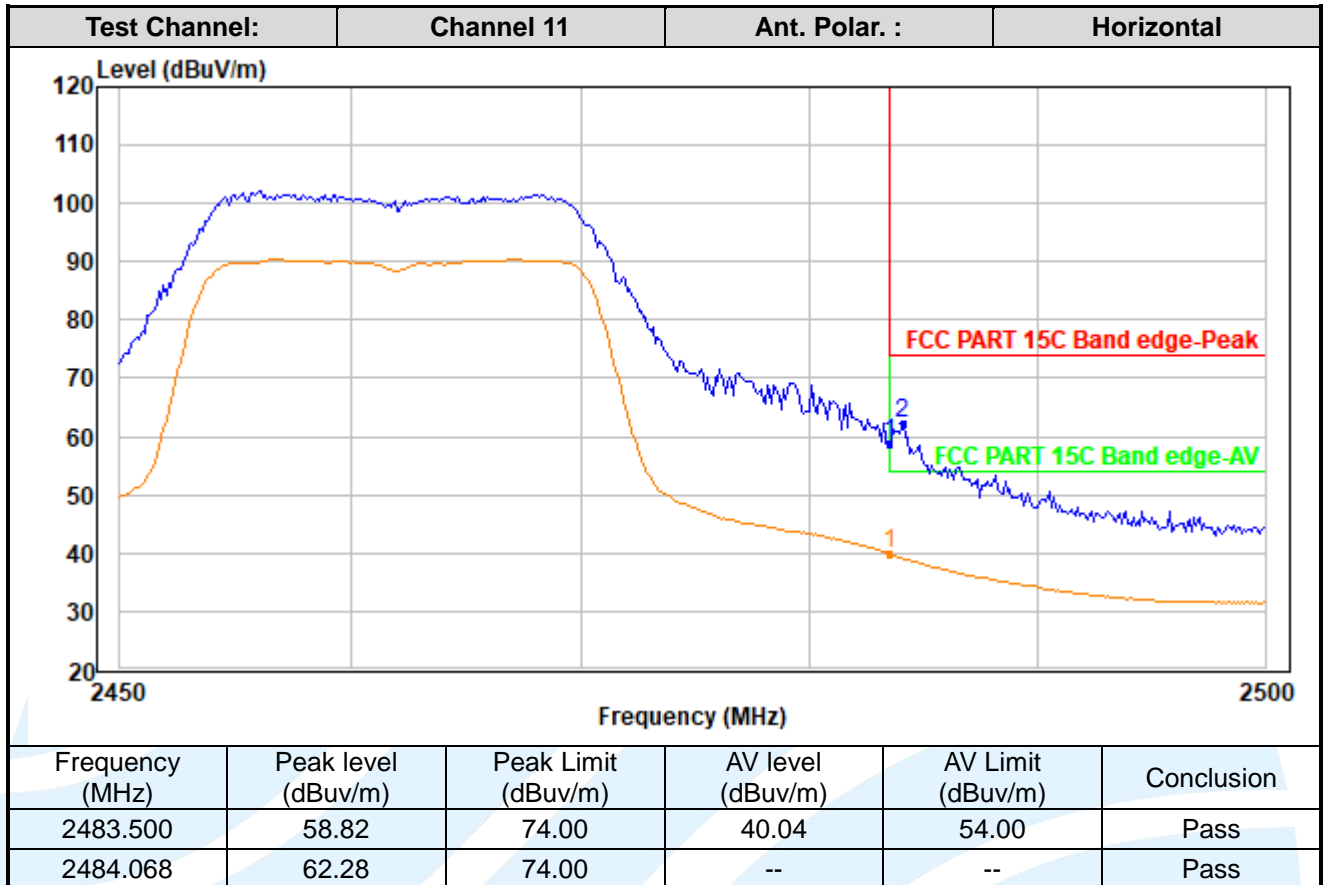

**Shenzhen UnionTrust Quality and Technology Co., Ltd.**

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888



Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.1

IEEE 802.11n-HT20

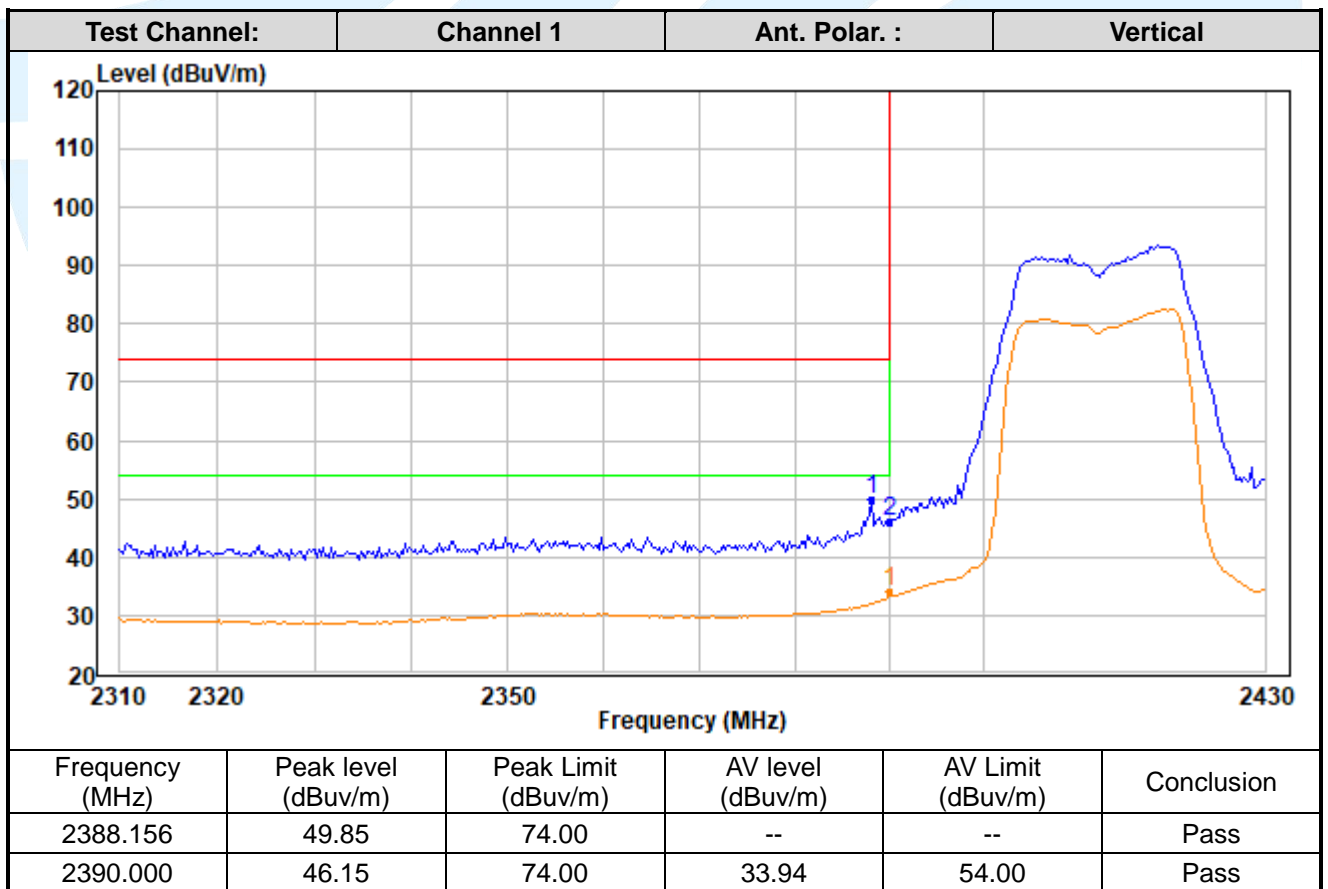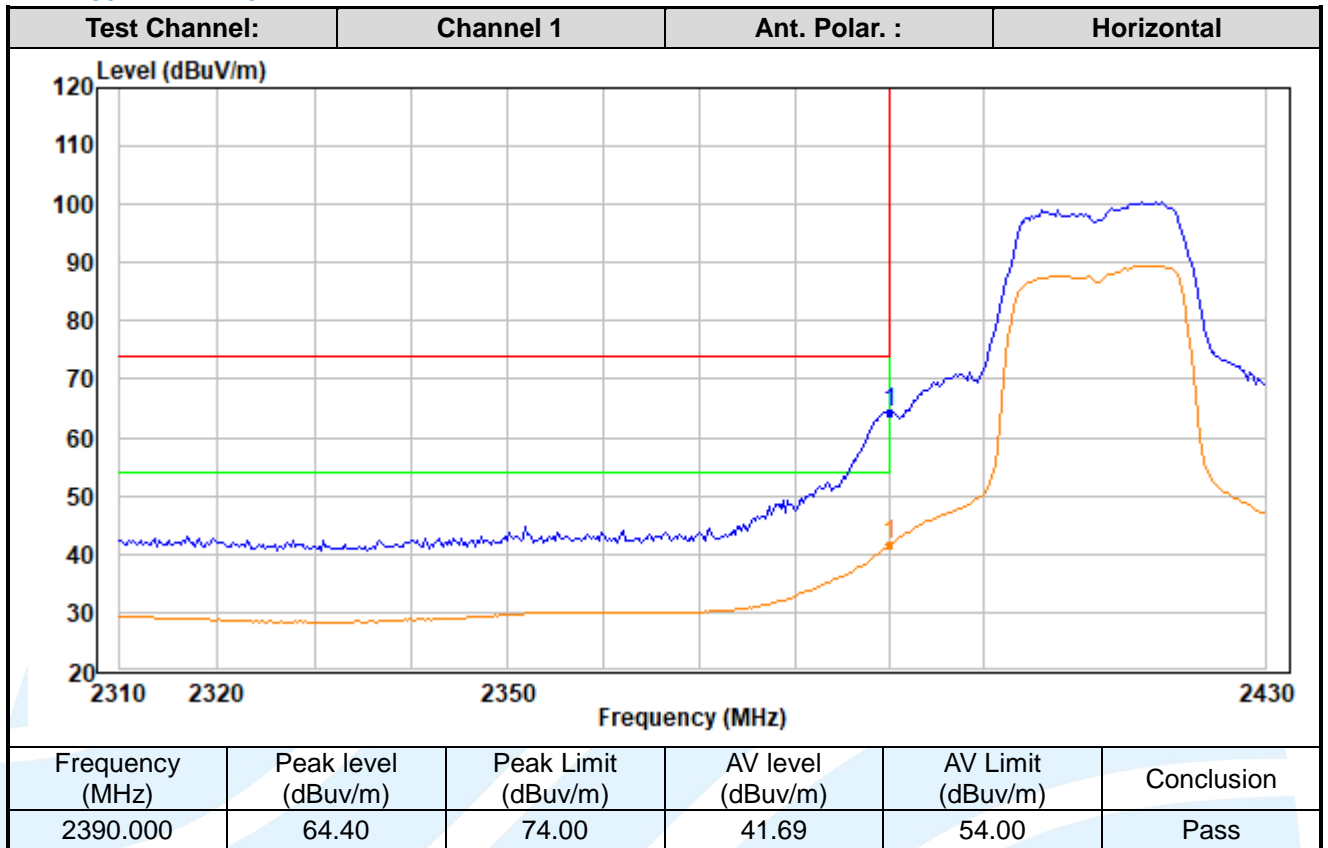

**Shenzhen UnionTrust Quality and Technology Co., Ltd.**

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China



Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.1

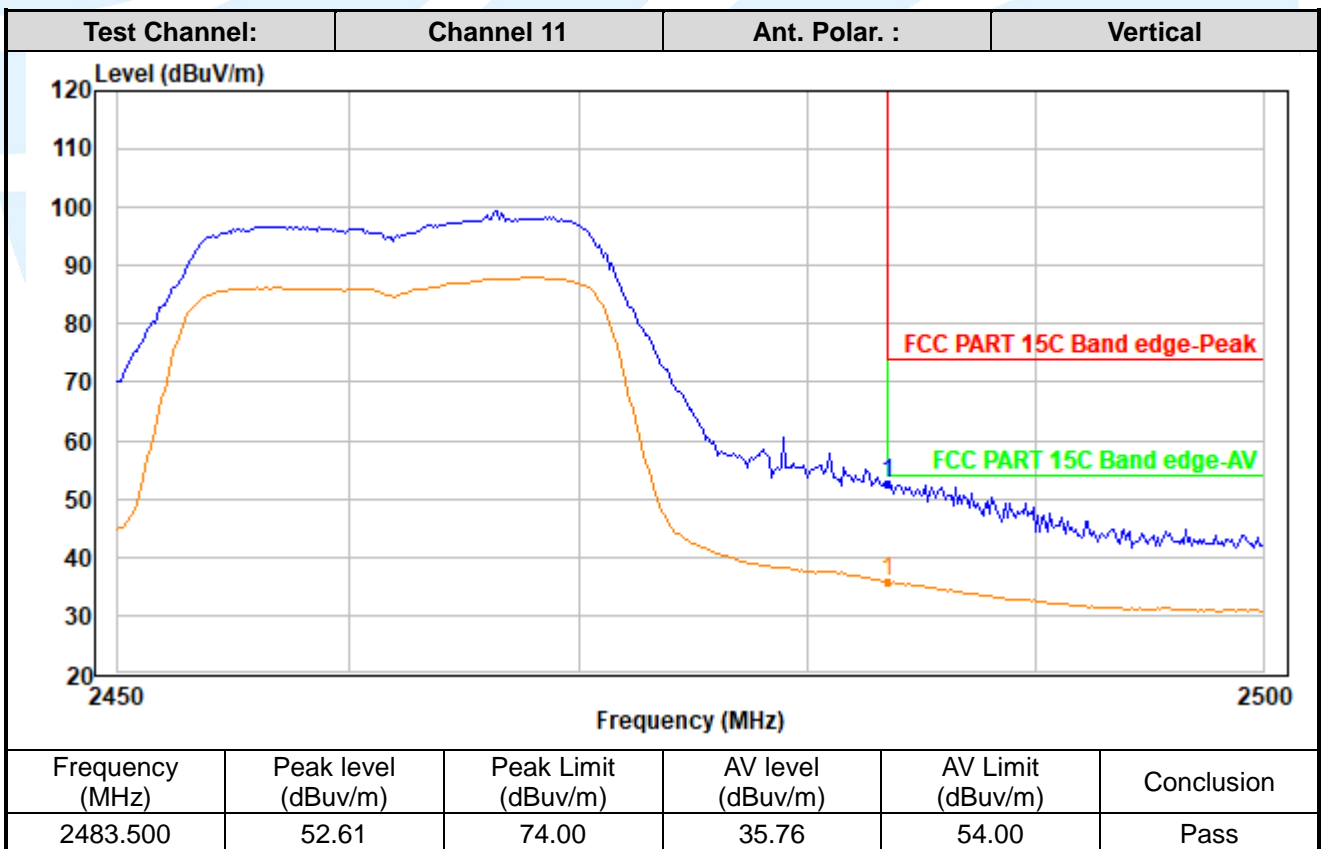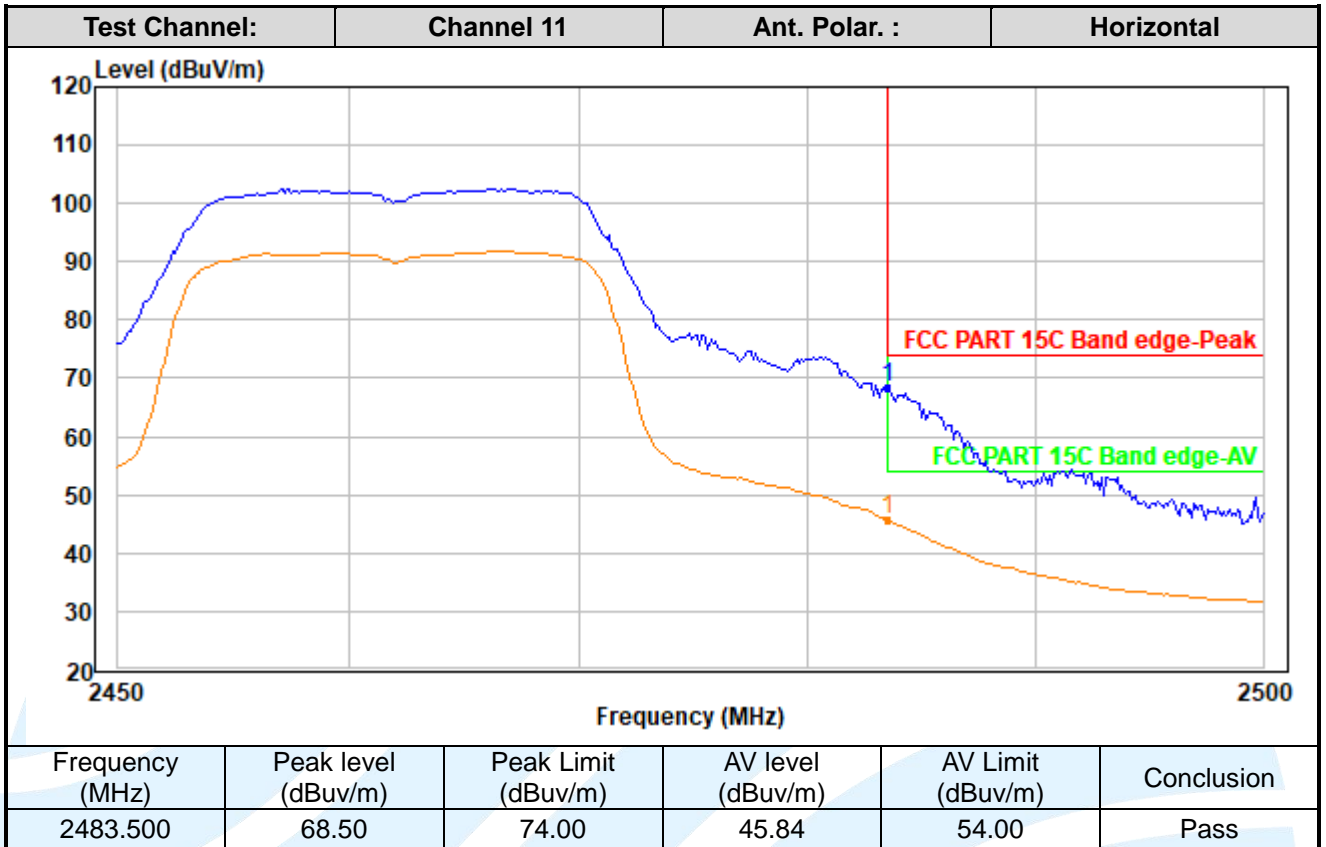

**Shenzhen UnionTrust Quality and Technology Co., Ltd.**

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888



Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.1

IEEE 802.11n-HT40

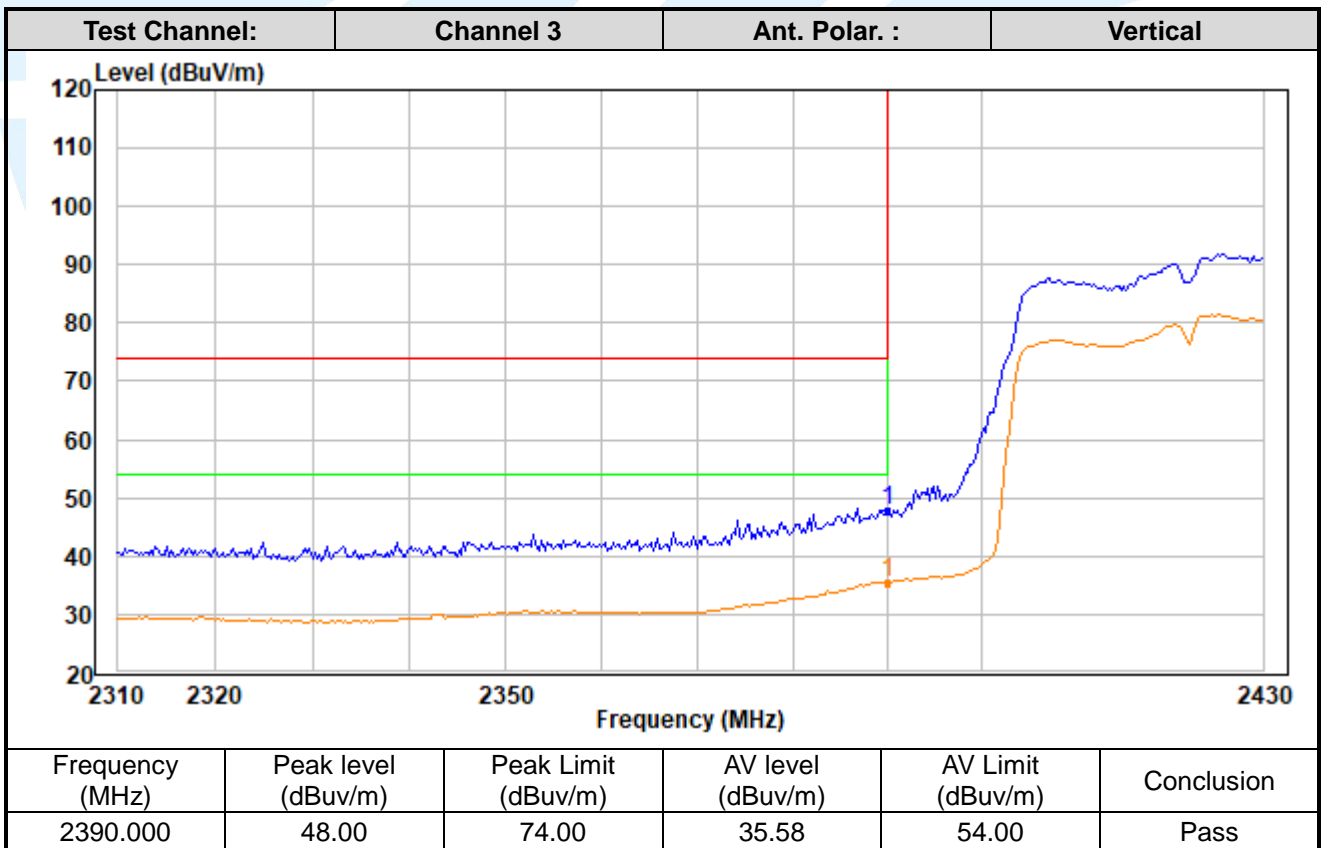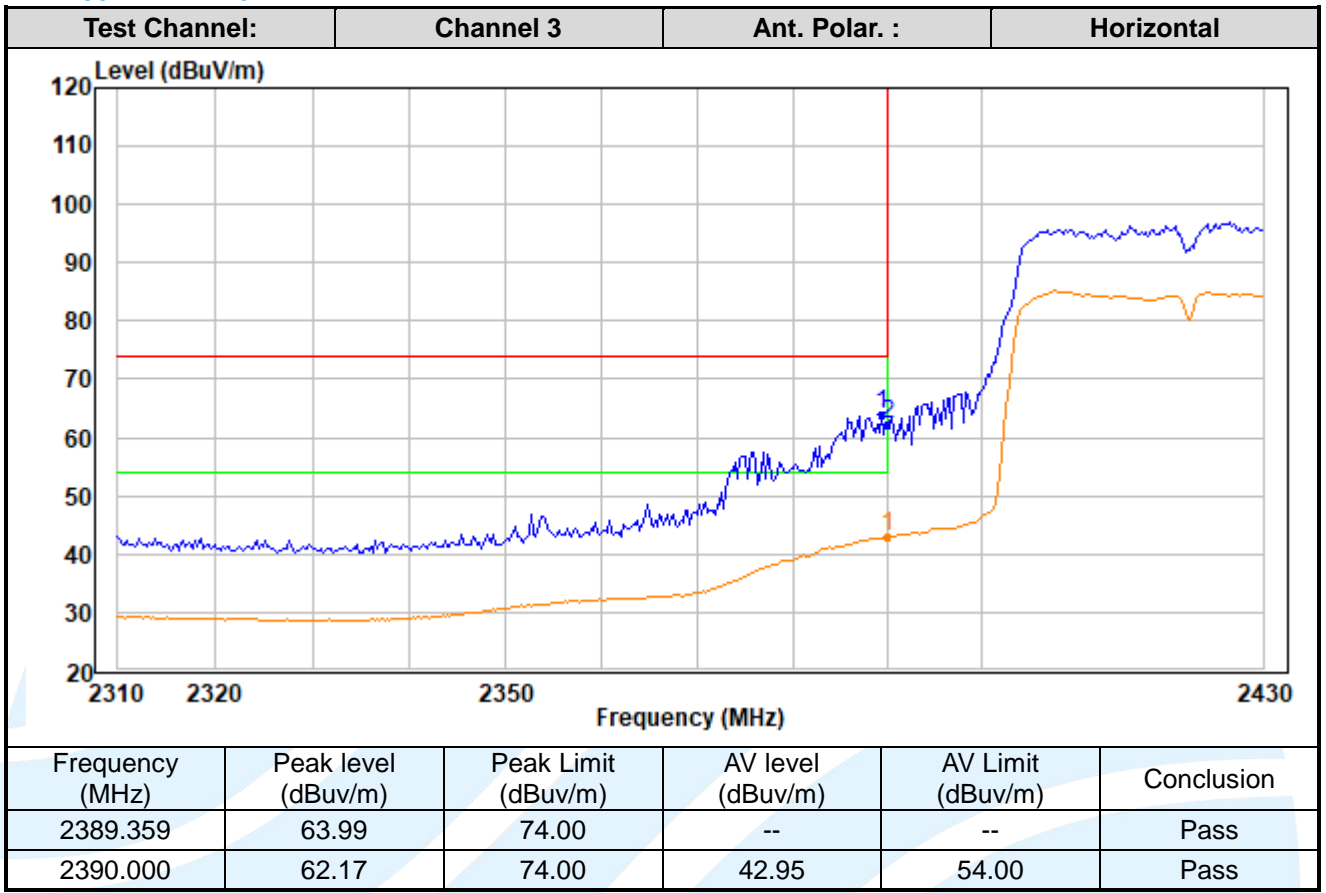

**Shenzhen UnionTrust Quality and Technology Co., Ltd.**

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China



Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.1

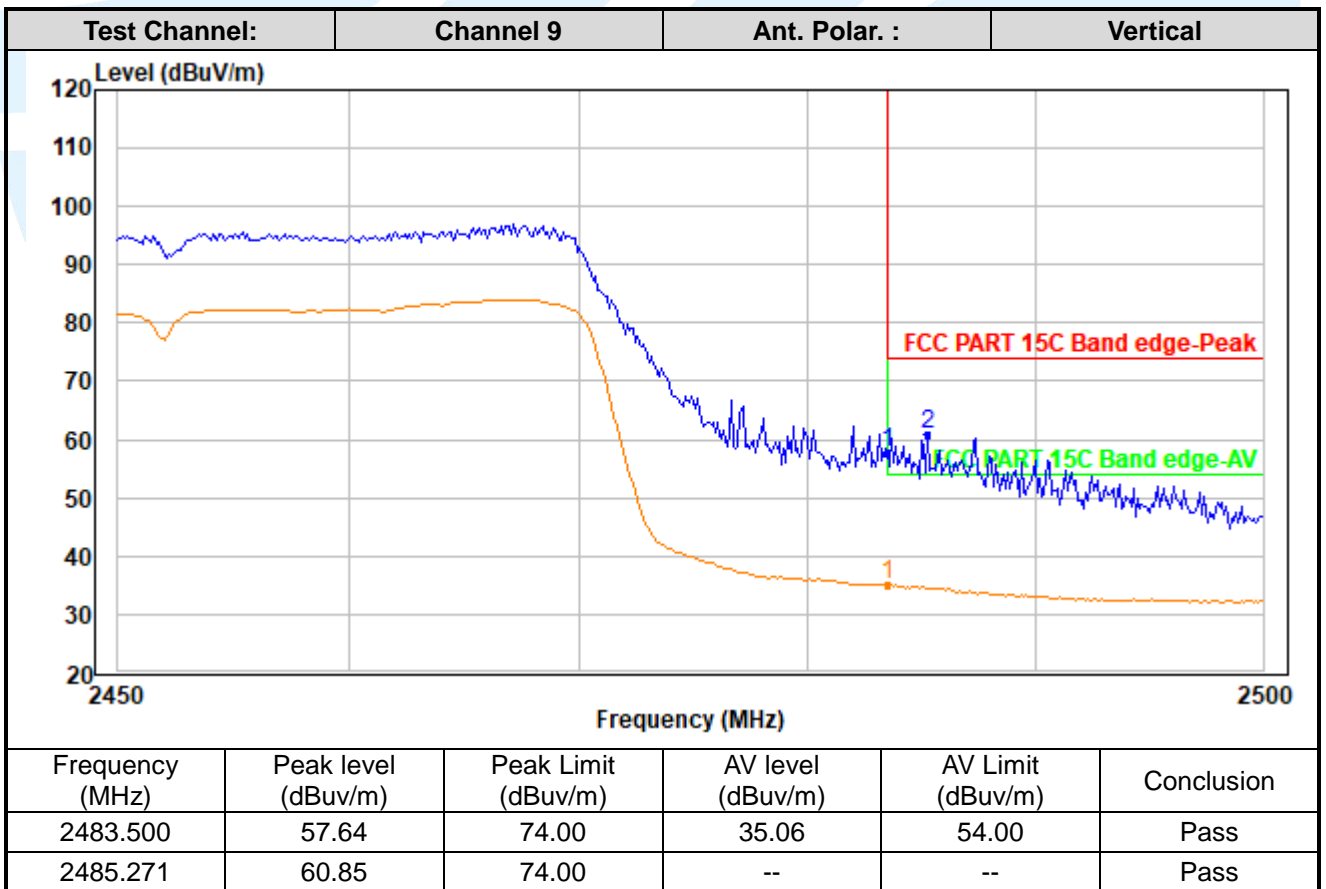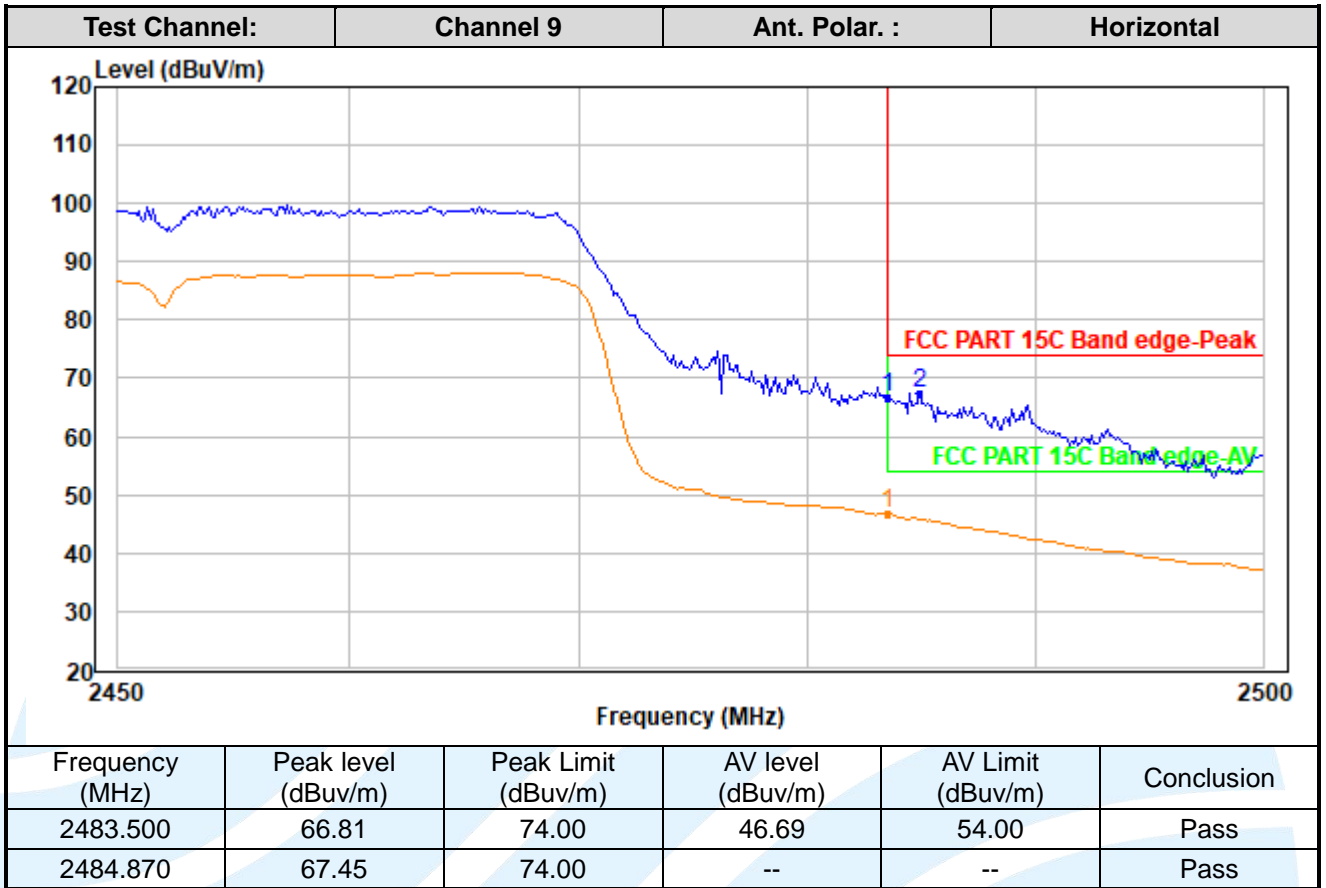

**Shenzhen UnionTrust Quality and Technology Co., Ltd.**

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.1

### 5.9 CONDUCTED EMISSION

**Test Requirement:** 47 CFR Part 15C Section 15.207

**Test Method:** ANSI C63.10-2013 Section 6.2

**Limits:**

Frequency range (MHz)	Limits (dB(μV))	
	Quasi-peak	Average
0,15 to 0,50	66 to 56	56 to 46
0,50 to 5	56	46
5 to 30	60	50

**Remark:**

1. The lower limit shall apply at the transition frequencies.
2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 to 0.50 MHz.

**Test Setup:** Refer to section 4.4.2 for details.

**Test Procedures:**

Test frequency range :150KHz-30MHz

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50Ω/50μH + 5Ω linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.
- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

**Equipment Used:** Refer to section 3 for details.


**Test Result:** Pass

The worst measurement data as follows:

Quasi Peak and Average:

Mode: WIFI Link

Live Line

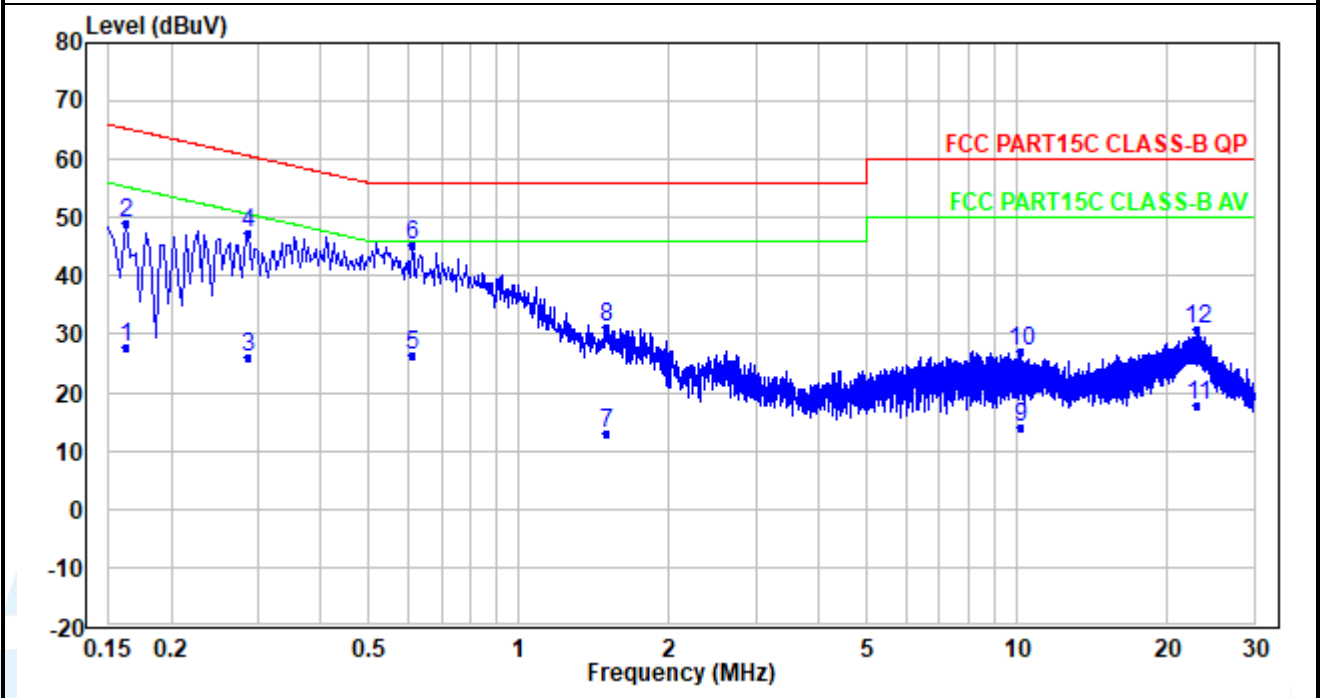

No.	Frequency (MHz)	Reading (dBuV)	Correction factor (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.162	17.88	10.04	27.92	55.36	-27.44	Average
2	0.162	38.88	10.04	48.92	65.36	-16.44	QP
3	0.286	16.18	10.04	26.22	50.64	-24.42	Average
4	0.286	37.18	10.04	47.22	60.64	-13.42	QP
5	0.610	16.41	10.05	26.46	46.00	-19.54	Average
6	0.610	35.41	10.05	45.46	56.00	-10.54	QP
7	1.498	3.06	10.08	13.14	46.00	-32.86	Average
8	1.498	21.06	10.08	31.14	56.00	-24.86	QP
9	10.177	3.71	10.44	14.15	50.00	-35.85	Average
10	10.177	16.71	10.44	27.15	60.00	-32.85	QP
11	23.080	6.65	11.26	17.91	50.00	-32.09	Average
12	23.080	19.65	11.26	30.91	60.00	-29.09	QP

**Shenzhen UnionTrust Quality and Technology Co., Ltd.**

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888


Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.1



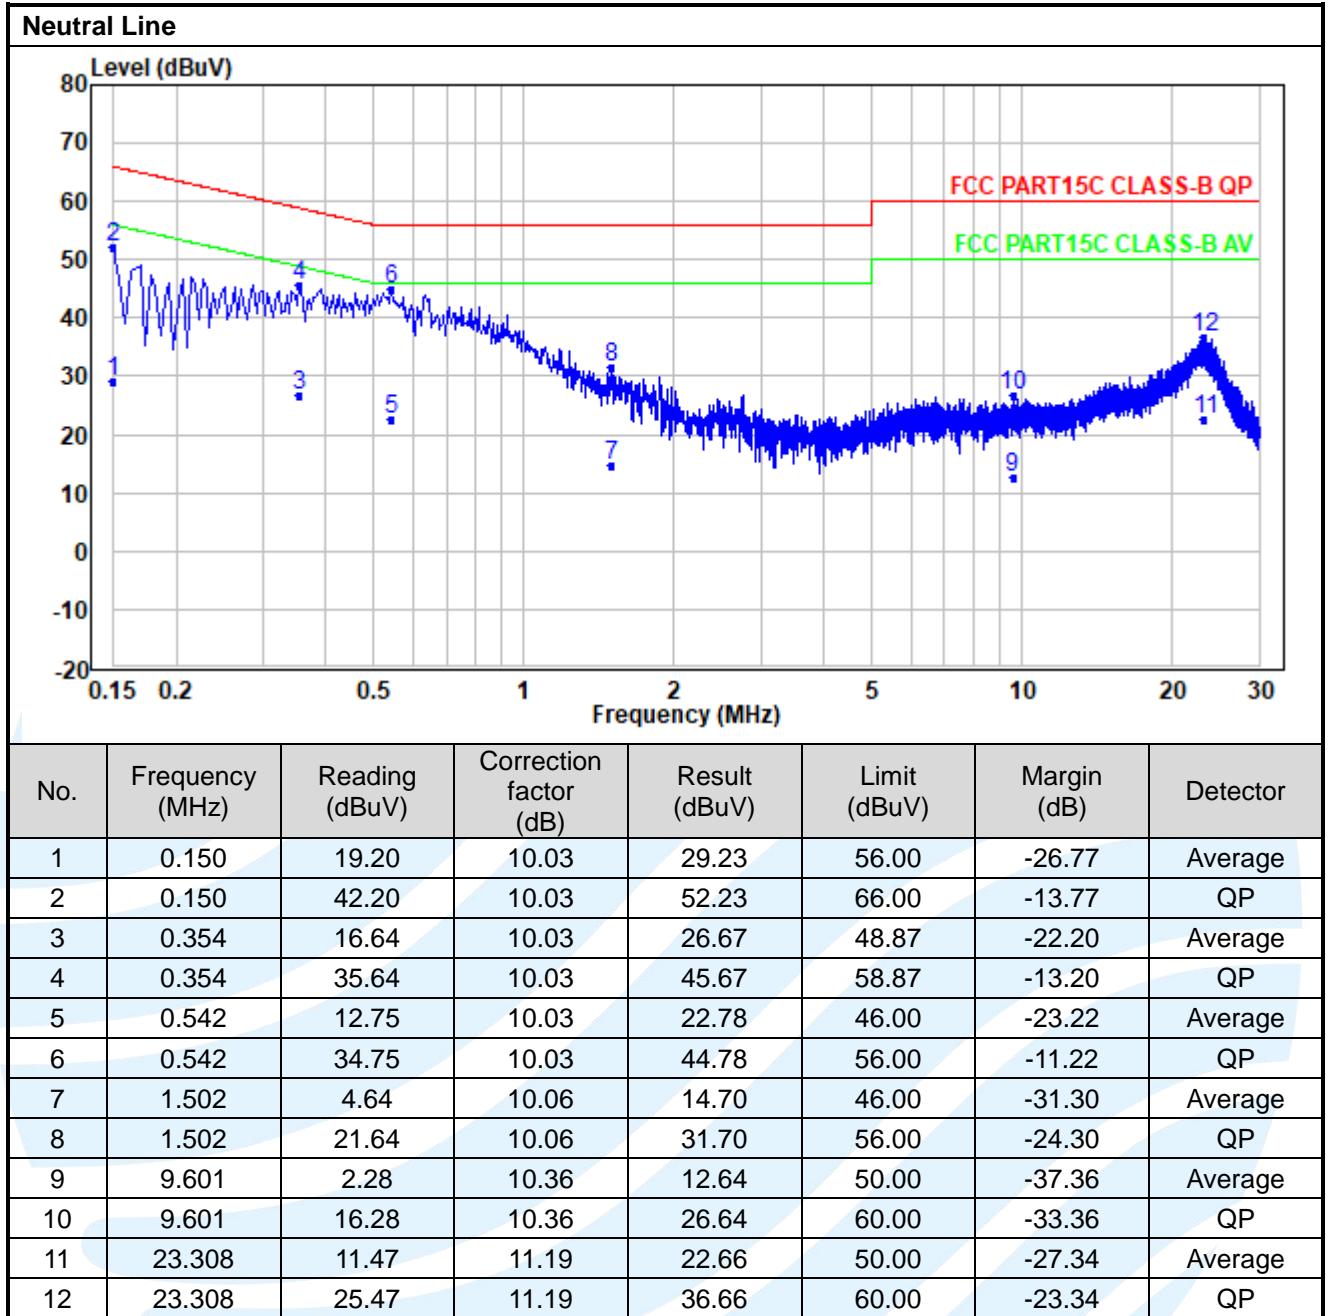

**Remark:**

1. Correct Factor = LISN Factor + Cable Loss + Pulse Limiter Factor, the value was added to Original Receiver Reading by the software automatically.
2. Result = Reading + Correct Factor.
3. Margin = Result - Limit
4. An initial pre-scan was performed on the Phase and neutral lines with peak detector. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.
5. All possible modes of operation were investigated, and testing at two nominal voltages of 240V~50Hz and 120V~60Hz, only the worst case emissions reported.

**Shenzhen UnionTrust Quality and Technology Co., Ltd.**

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>


UTTR-RF-FCCPART15.247-V1.1


## APPENDIX A RF TEST DATA

### A.1 99% BANDWIDTH


Mode	Channel	Ant.	99% BW (MHz)
IEEE 802.11b	1	0	15.047
	6		15.033
	11		15.033
IEEE 802.11g	1		16.758
	6		16.676
	11		16.759
IEEE 802.11n_20	1		17.778
	6		17.757
	11		17.785
IEEE 802.11n_40	3		36.255
	6		36.244
	9		36.147

### Test Graphs

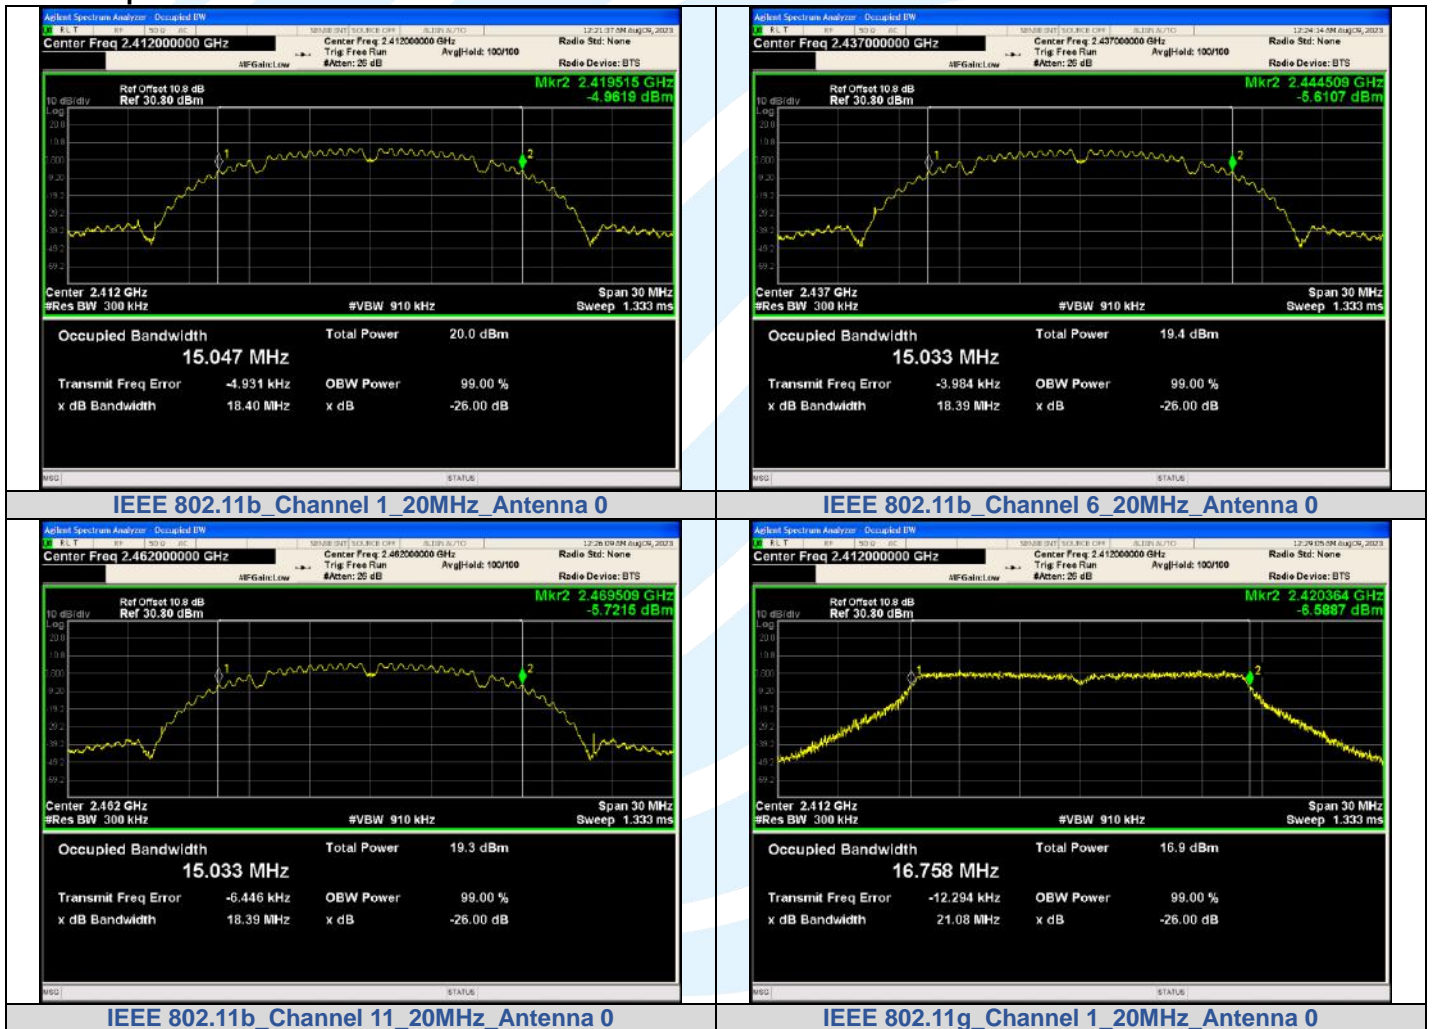


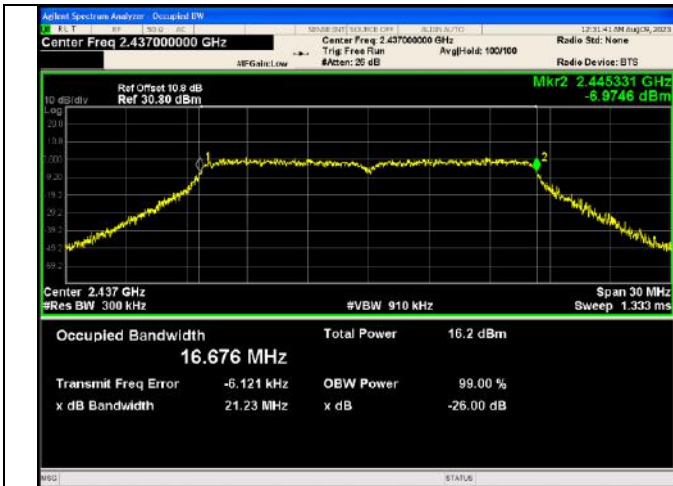


IEEE 802.11g\_Channel 6\_20MHz\_Antenna 0

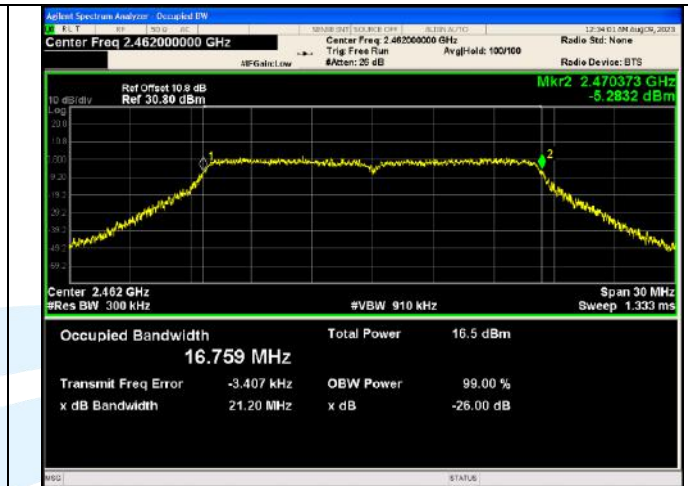

IEEE 802.11g\_Channel 11\_20MHz\_Antenna 0

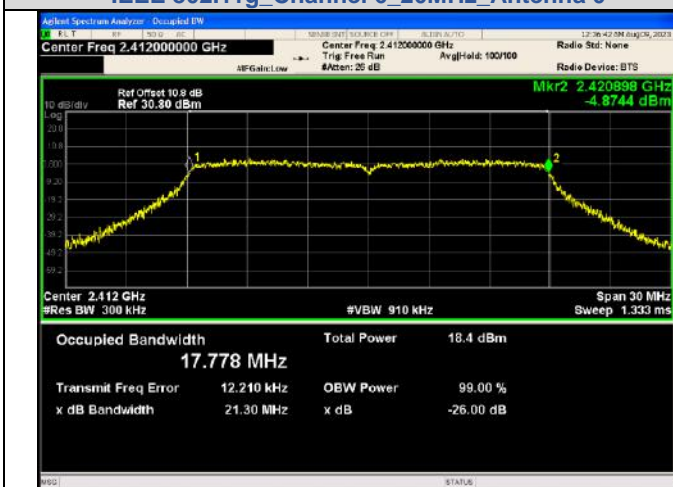


IEEE 802.11n\_Channel 1\_20MHz\_Antenna 0

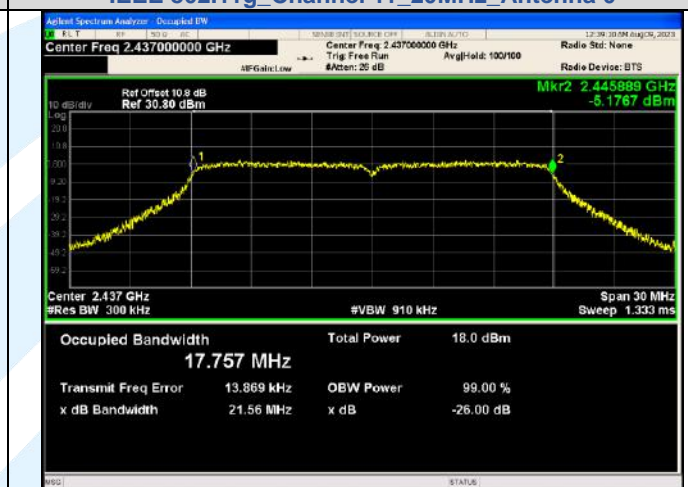


IEEE 802.11n\_Channel 6\_20MHz\_Antenna 0




IEEE 802.11n\_Channel 11\_20MHz\_Antenna 0

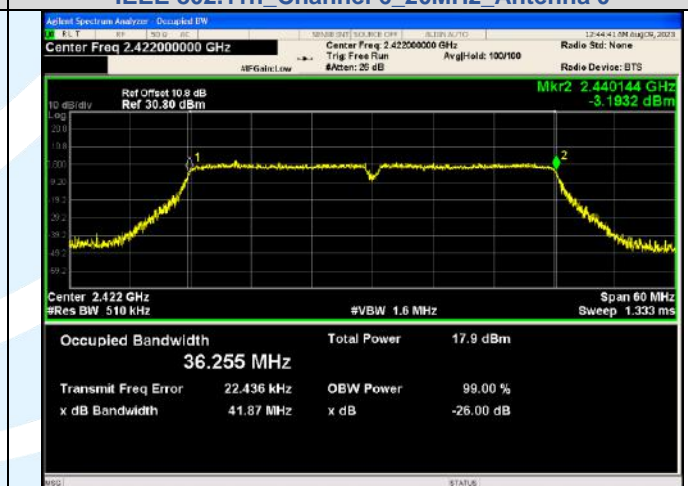

IEEE 802.11n\_Channel 3\_40MHz\_Antenna 0

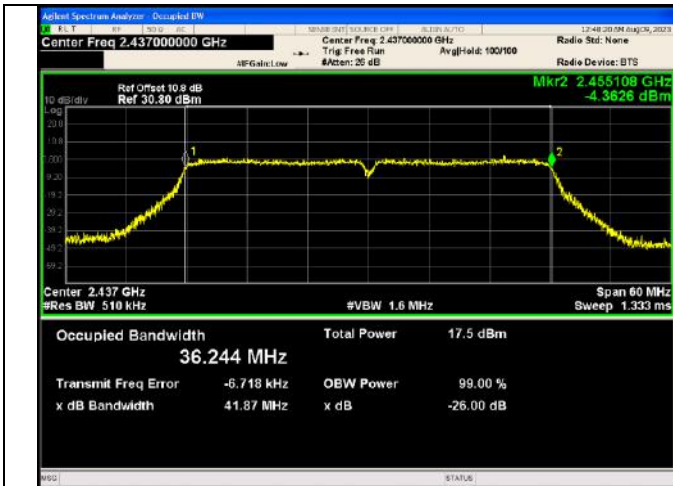

IEEE 802.11n\_Channel 6\_40MHz\_Antenna 0

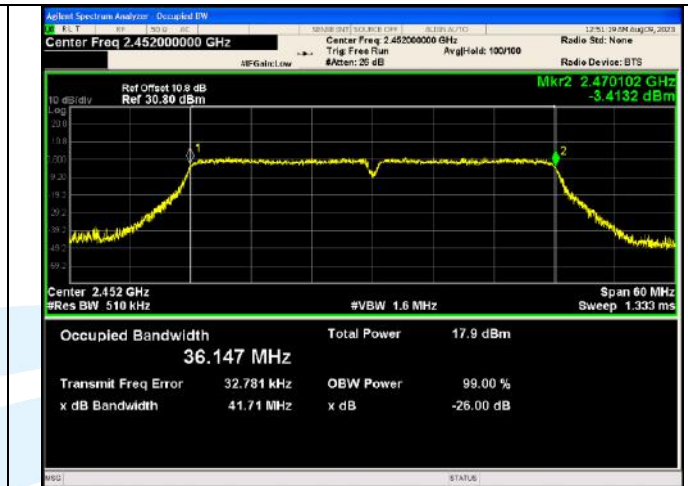

IEEE 802.11n\_Channel 9\_40MHz\_Antenna 0

## Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>


UTTR-RF-FCCPART15.247-V1.1

### A.2 6DB BANDWIDTH


Mode	Channel	Ant.	Center Frequency (MHz)	6 dB Bandwidth (MHz)	Limit (MHz)	Result
IEEE 802.11b	1	0	2412	10.08	0.5	PASS
	6		2437	10.08		PASS
	11		2462	10.09		PASS
IEEE 802.11g	1		2412	16.34		PASS
	6		2437	16.32		PASS
	11		2462	16.33		PASS
IEEE 802.11n_20	1		2412	17.36		PASS
	6		2437	17.16		PASS
	11		2462	17.54		PASS
IEEE 802.11n_40	3		2422	35.80		PASS
	6		2437	35.60		PASS
	9	2452	35.65	PASS		

### Test Graphs




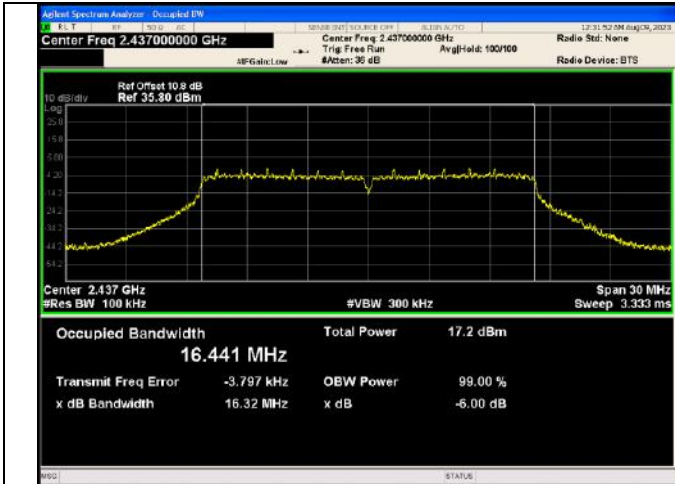


IEEE 802.11g\_Channel 6\_20MHz\_Antenna 0

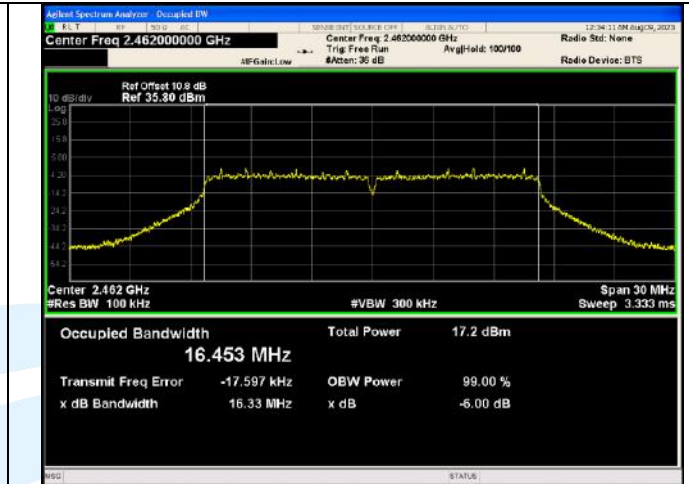


IEEE 802.11g\_Channel 11\_20MHz\_Antenna 0

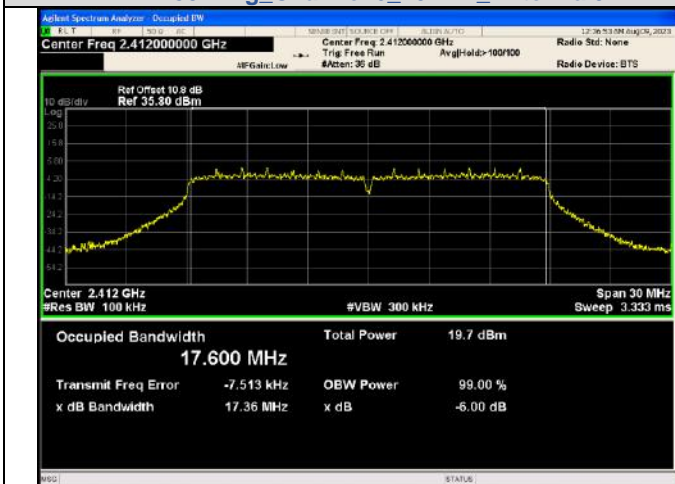


IEEE 802.11n\_Channel 1\_20MHz\_Antenna 0

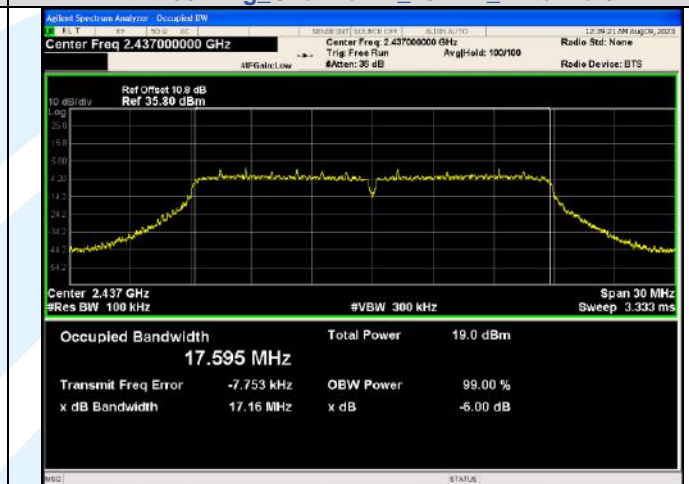


IEEE 802.11n\_Channel 6\_20MHz\_Antenna 0

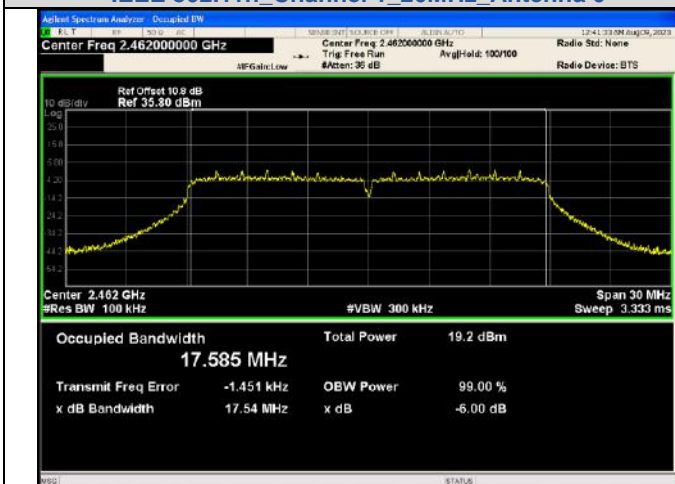


IEEE 802.11n\_Channel 11\_20MHz\_Antenna 0

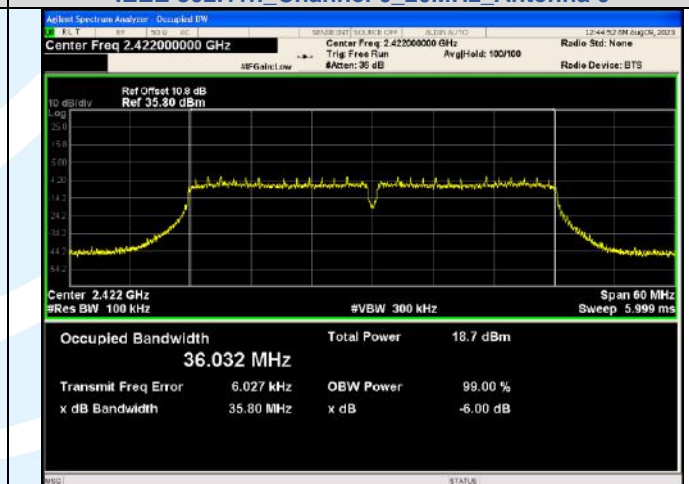

IEEE 802.11n\_Channel 3\_40MHz\_Antenna 0

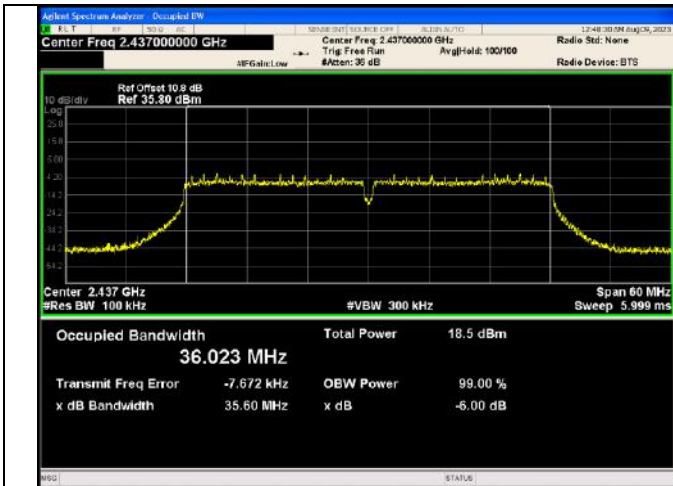

IEEE 802.11n\_Channel 6\_40MHz\_Antenna 0

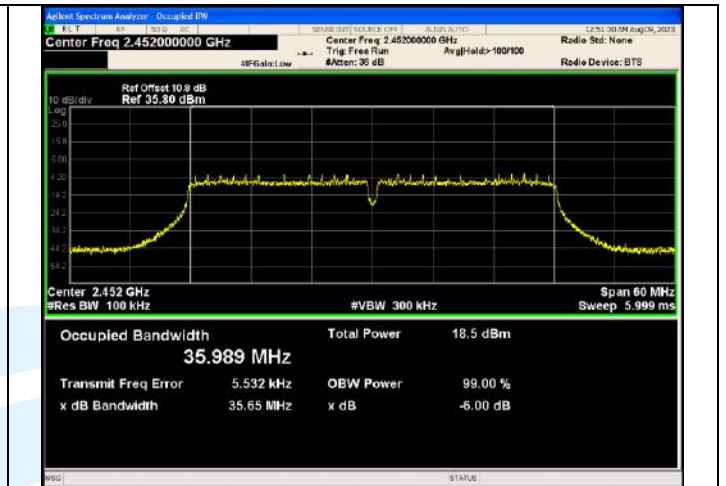

IEEE 802.11n\_Channel 9\_40MHz\_Antenna 0

**Shenzhen UnionTrust Quality and Technology Co., Ltd.**

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com


<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.1


### A.3 CONDUCTED OUT OF BAND EMISSION

Mode	Channel	Ant.	OOB Emission Frequency (MHz)	OOB Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result
IEEE 802.11b	1	0	2400.00	-35.189	-12.8	-22	PASS
			24999.4	-42.319	-12.8	-29.519	PASS
	6		24451.9	-41.970	-12.68	-29.290	PASS
			2483.50	-44.040	-12.77	-31	PASS
			24257.1	-43.038	-12.77	-30.268	PASS
IEEE 802.11g	1		2400.00	-37.833	-19.54	-18	PASS
	6		24902.6	-42.400	-19.54	-22.860	PASS
			24946.9	-42.896	-19.62	-23.276	PASS
	11		2483.50	-42.267	-19.56	-23	PASS
			24998.1	-41.912	-19.56	-22.352	PASS
IEEE 802.11n_20	1	2400.00	-34.780	-17.58	-17	PASS	
	6	24294.0	-42.439	-17.58	-24.859	PASS	
		24450.6	-42.687	-17.63	-25.057	PASS	
	11	2483.50	-44.429	-17.57	-27	PASS	
		24275.9	-42.481	-17.57	-24.911	PASS	
IEEE 802.11n_40	3	2400.00	-37.571	-21.21	-16	PASS	
	6	24280.8	-41.358	-21.21	-20.148	PASS	
		24264.6	-41.823	-21.16	-20.663	PASS	
	9	2483.50	-44.002	-21.23	-23	PASS	
		24270.2	-42.229	-21.23	-20.999	PASS	

#### Test Graphs

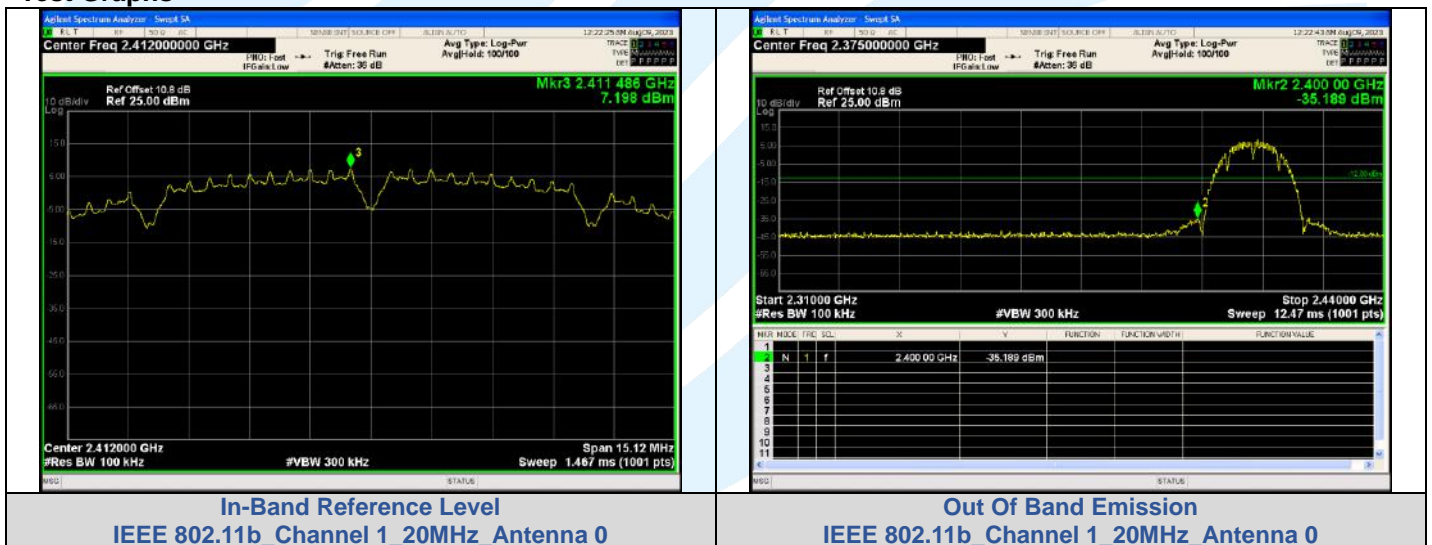



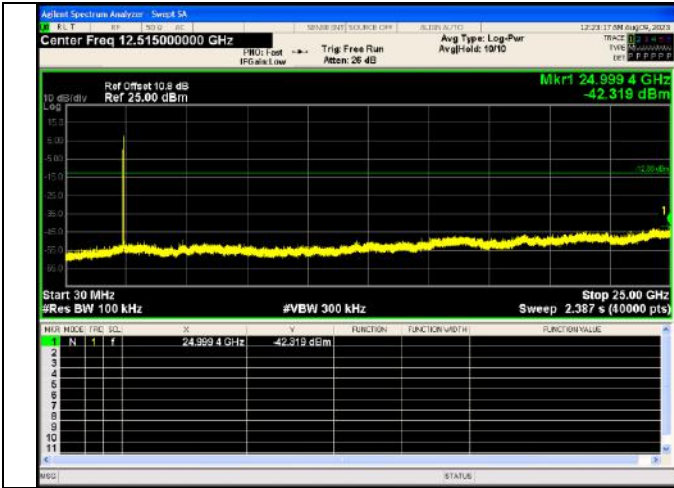

**Spurious Emission**  
**IEEE 802.11b Channel 1 20MHz Antenna 0**




**In-Band Reference Level**  
**IEEE 802.11b Channel 6 20MHz Antenna 0**




**Spurious Emissions**  
**IEEE 802.11b Channel 6 20MHz Antenna 0**



**In-Band Reference Level**  
**IEEE 802.11b Channel 11 20MHz Antenna 0**

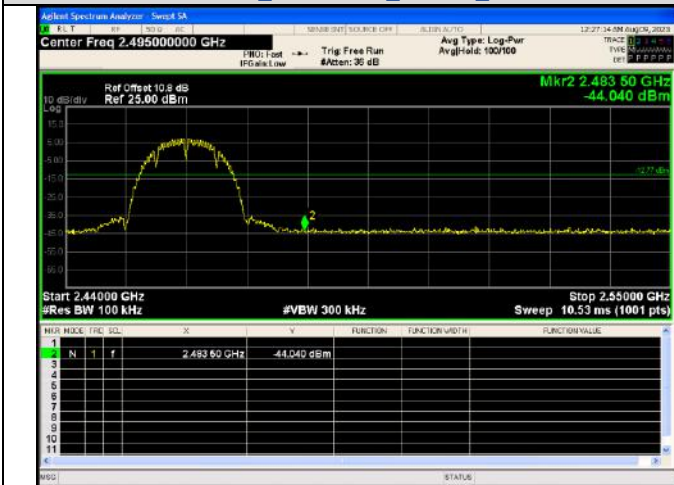


**Out Of Band Emission**  
**IEEE 802.11b Channel 11 20MHz Antenna 0**

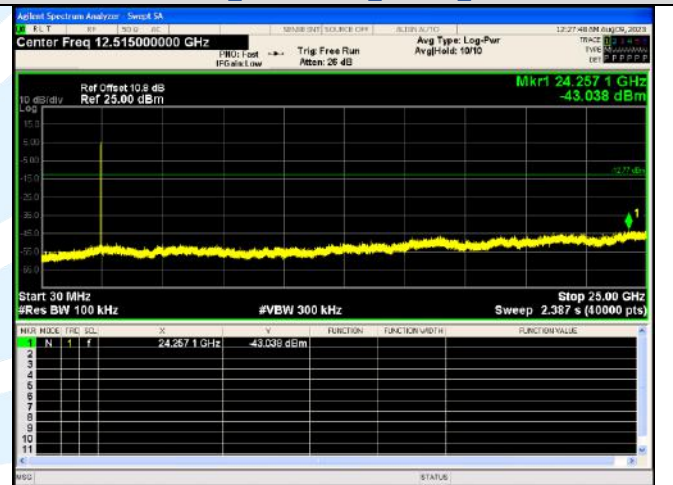


**Spurious Emission**  
**IEEE 802.11b Channel 11 20MHz Antenna 0**



**In-Band Reference Level  
IEEE 802.11g\_Channel 1\_20MHz\_Antenna 0**

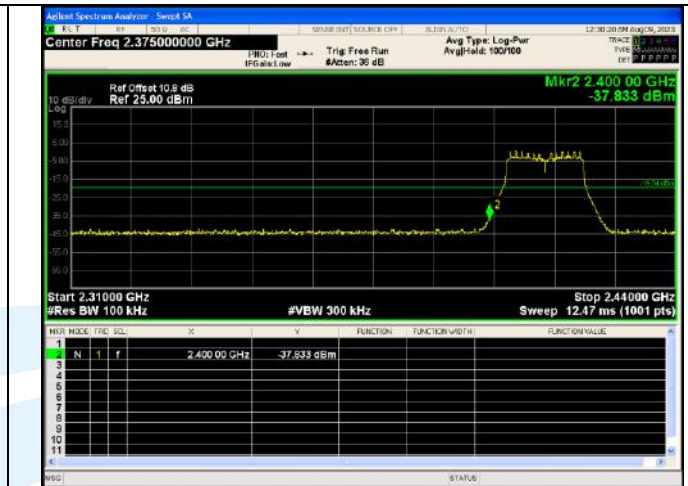


**Out Of Band Emission  
IEEE 802.11g\_Channel 1\_20MHz\_Antenna 0**

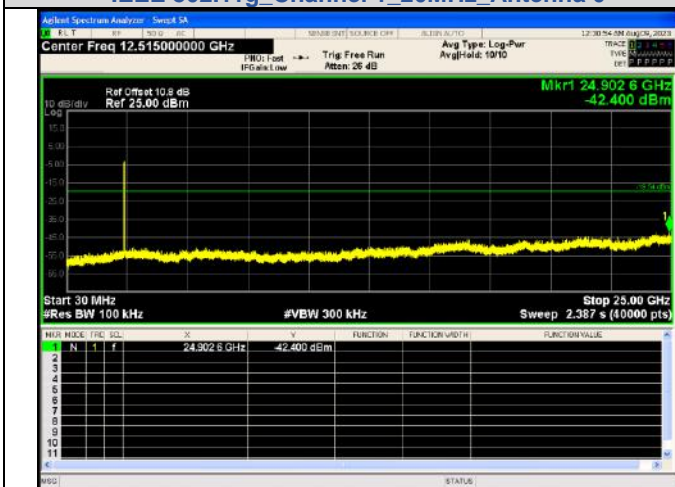

**Spurious Emission  
IEEE 802.11g\_Channel 1\_20MHz\_Antenna 0**




**In-Band Reference Level  
IEEE 802.11g\_Channel 6\_20MHz\_Antenna 0**

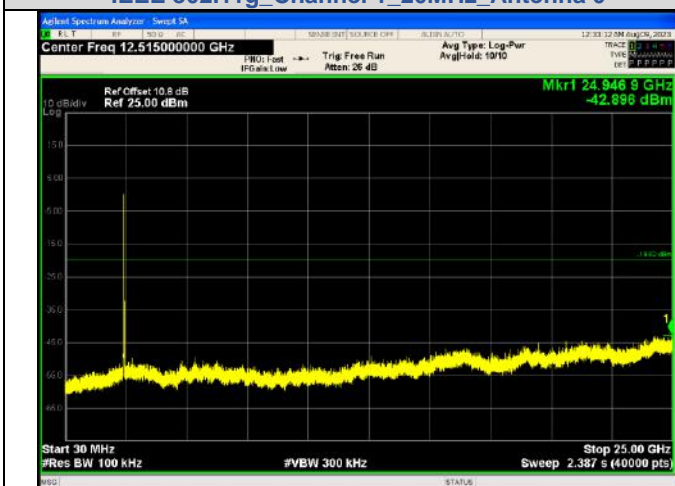


**Spurious Emissions  
IEEE 802.11g\_Channel 6\_20MHz\_Antenna 0**



**In-Band Reference Level  
IEEE 802.11g\_Channel 11\_20MHz\_Antenna 0**

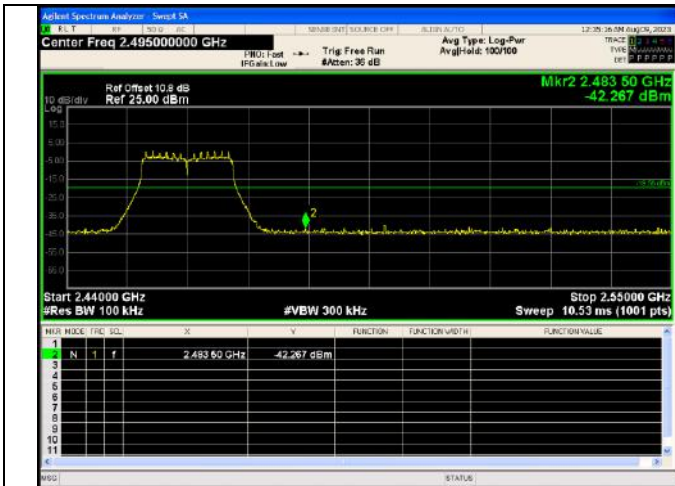


**Out Of Band Emission**  
**IEEE 802.11g\_Channel 11\_20MHz\_Antenna 0**

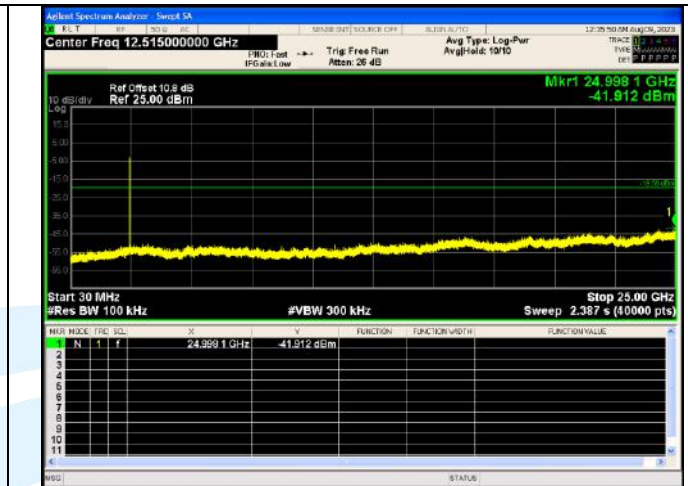


**Spurious Emission**  
**IEEE 802.11g\_Channel 11\_20MHz\_Antenna 0**



**In-Band Reference Level**  
**IEEE 802.11n\_Channel 1\_20MHz\_Antenna 0**

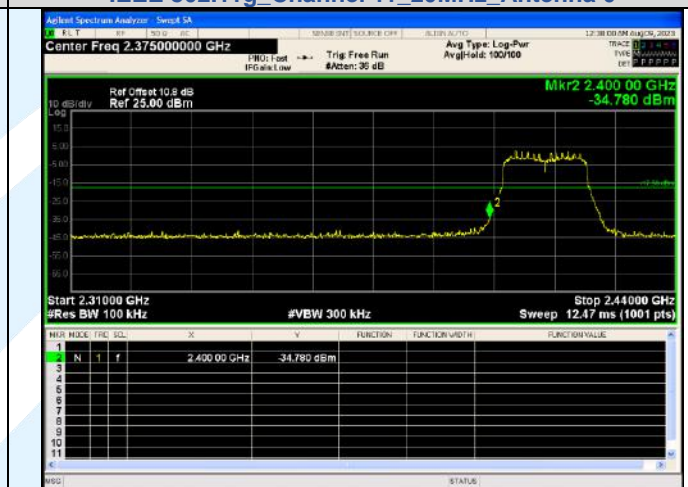


**Out Of Band Emission**  
**IEEE 802.11n\_Channel 1\_20MHz\_Antenna 0**

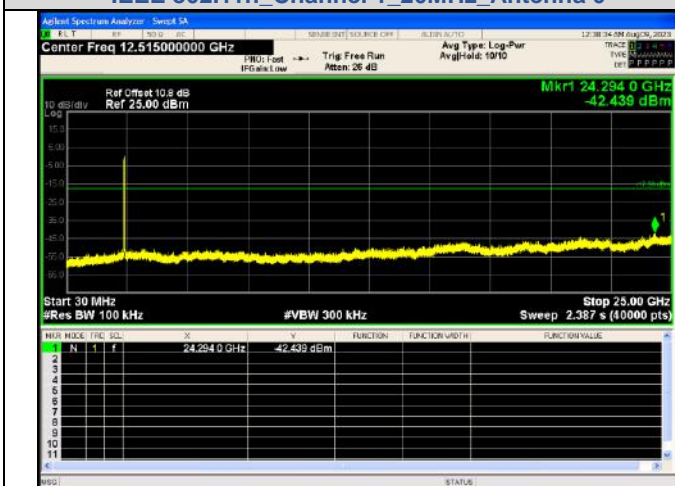

**Spurious Emission**  
**IEEE 802.11n\_Channel 1\_20MHz\_Antenna 0**




**In-Band Reference Level**  
**IEEE 802.11n\_Channel 6\_20MHz\_Antenna 0**

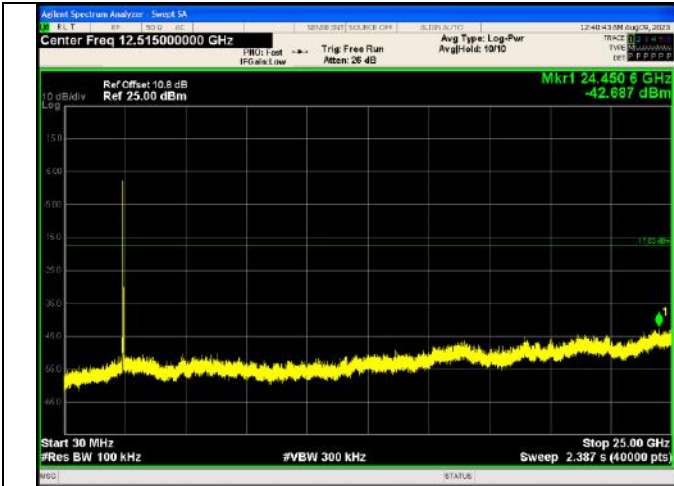


**Spurious Emissions**  
**IEEE 802.11n\_Channel 6\_20MHz\_Antenna 0**



**In-Band Reference Level**  
**IEEE 802.11n\_Channel 11\_20MHz\_Antenna 0**

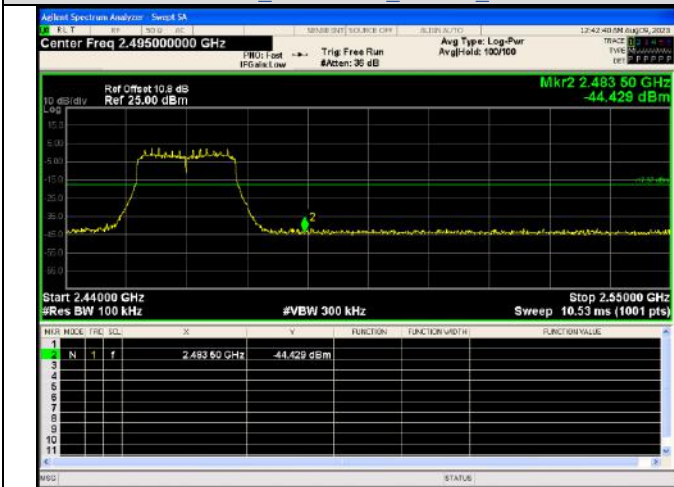


**Out Of Band Emission**  
**IEEE 802.11n\_Channel 11\_20MHz\_Antenna 0**

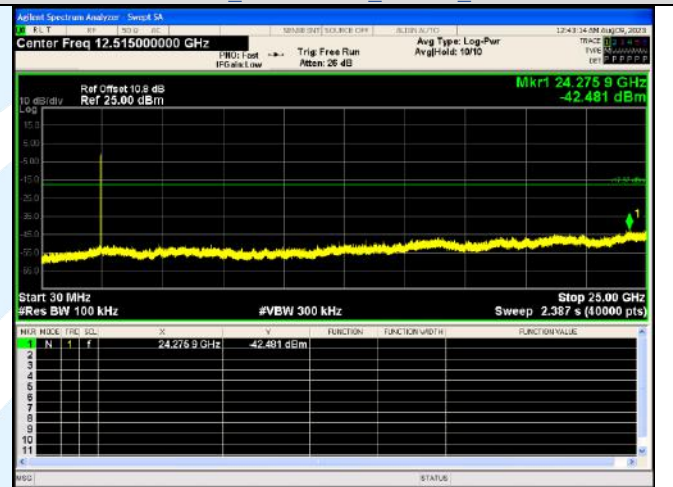


**Spurious Emission**  
**IEEE 802.11n\_Channel 11\_20MHz\_Antenna 0**




**In-Band Reference Level**  
**IEEE 802.11n\_Channel 3\_40MHz\_Antenna 0**

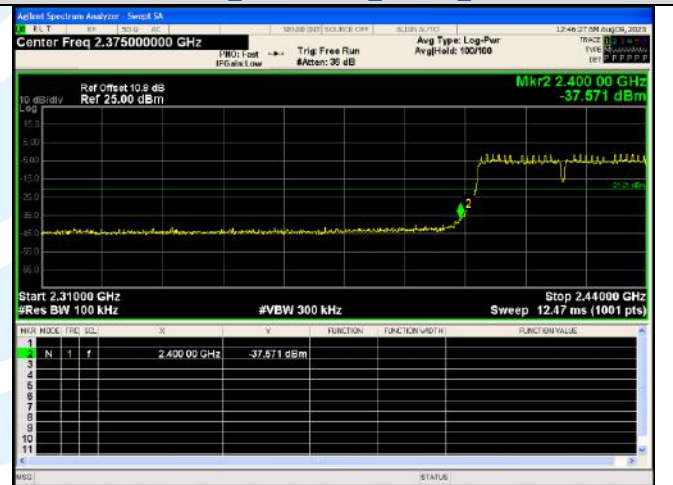


**Out Of Band Emission**  
**IEEE 802.11n\_Channel 3\_40MHz\_Antenna 0**

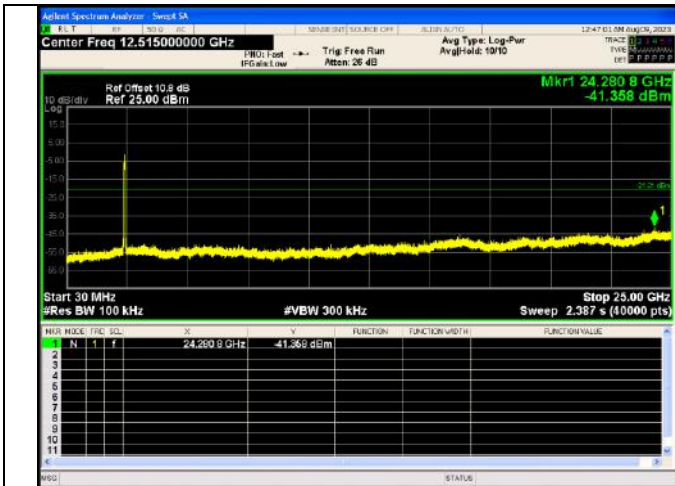

**Spurious Emission**  
**IEEE 802.11n Channel 3 40MHz Antenna 0**

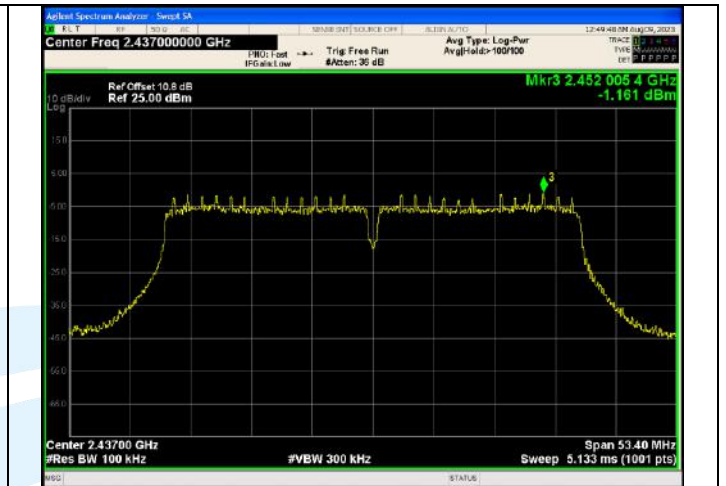


**In-Band Reference Level**  
**IEEE 802.11n Channel 6 40MHz Antenna 0**

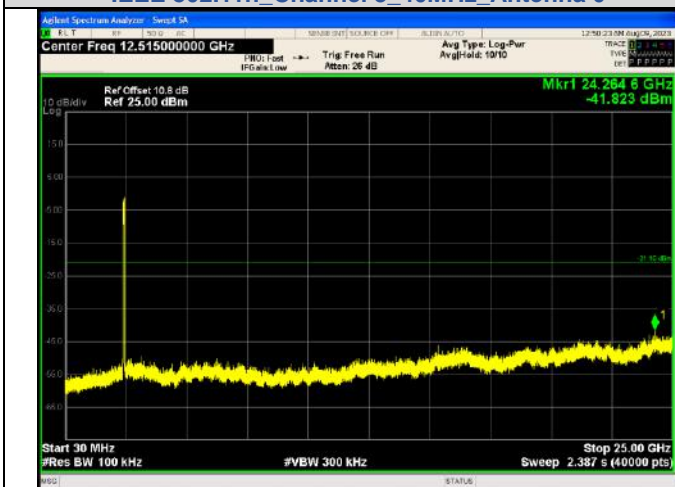


**Spurious Emissions**  
**IEEE 802.11n Channel 6 40MHz Antenna 0**



**In-Band Reference Level**  
**IEEE 802.11n Channel 9 40MHz Antenna 0**

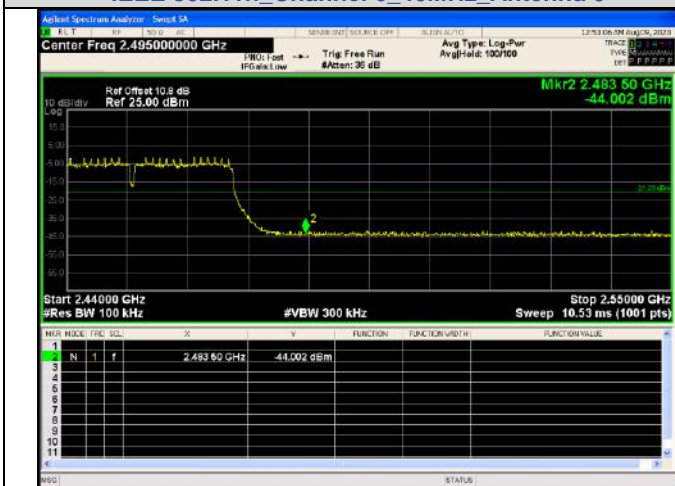

**Out Of Band Emission**  
**IEEE 802.11n Channel 9 40MHz Antenna 0**

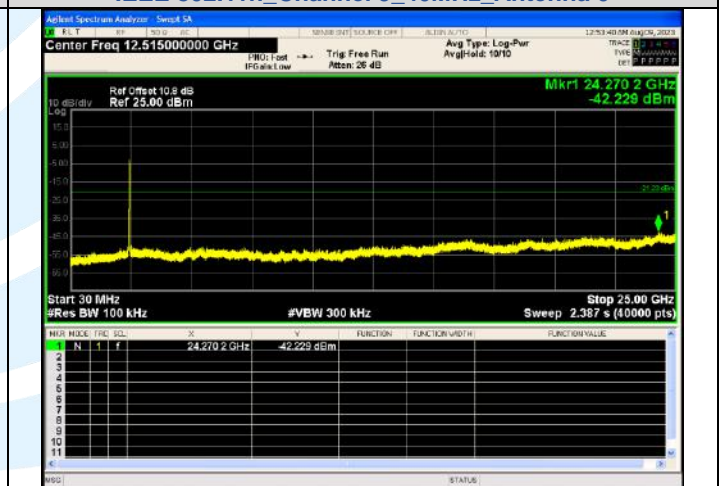


**Spurious Emission**  
**IEEE 802.11n Channel 9 40MHz Antenna 0**

A.4 POWER SPECTRAL DENSITY


Mode	Channel	PSD (dBm/3kHz) Ant. 0	Limit (dBm/3kHz)	Result
IEEE 802.11b	1	-6.794	8	PASS
	6	-6.573		PASS
	11	-7.170		PASS
IEEE 802.11g	1	-14.087		PASS
	6	-14.157		PASS
	11	-14.319		PASS
IEEE 802.11n_20	1	-11.721		PASS
	6	-11.797		PASS
	11	-11.599		PASS
IEEE 802.11n_40	3	-15.595		PASS
	6	-15.642		PASS
	9	-13.084		PASS

Test Graphs

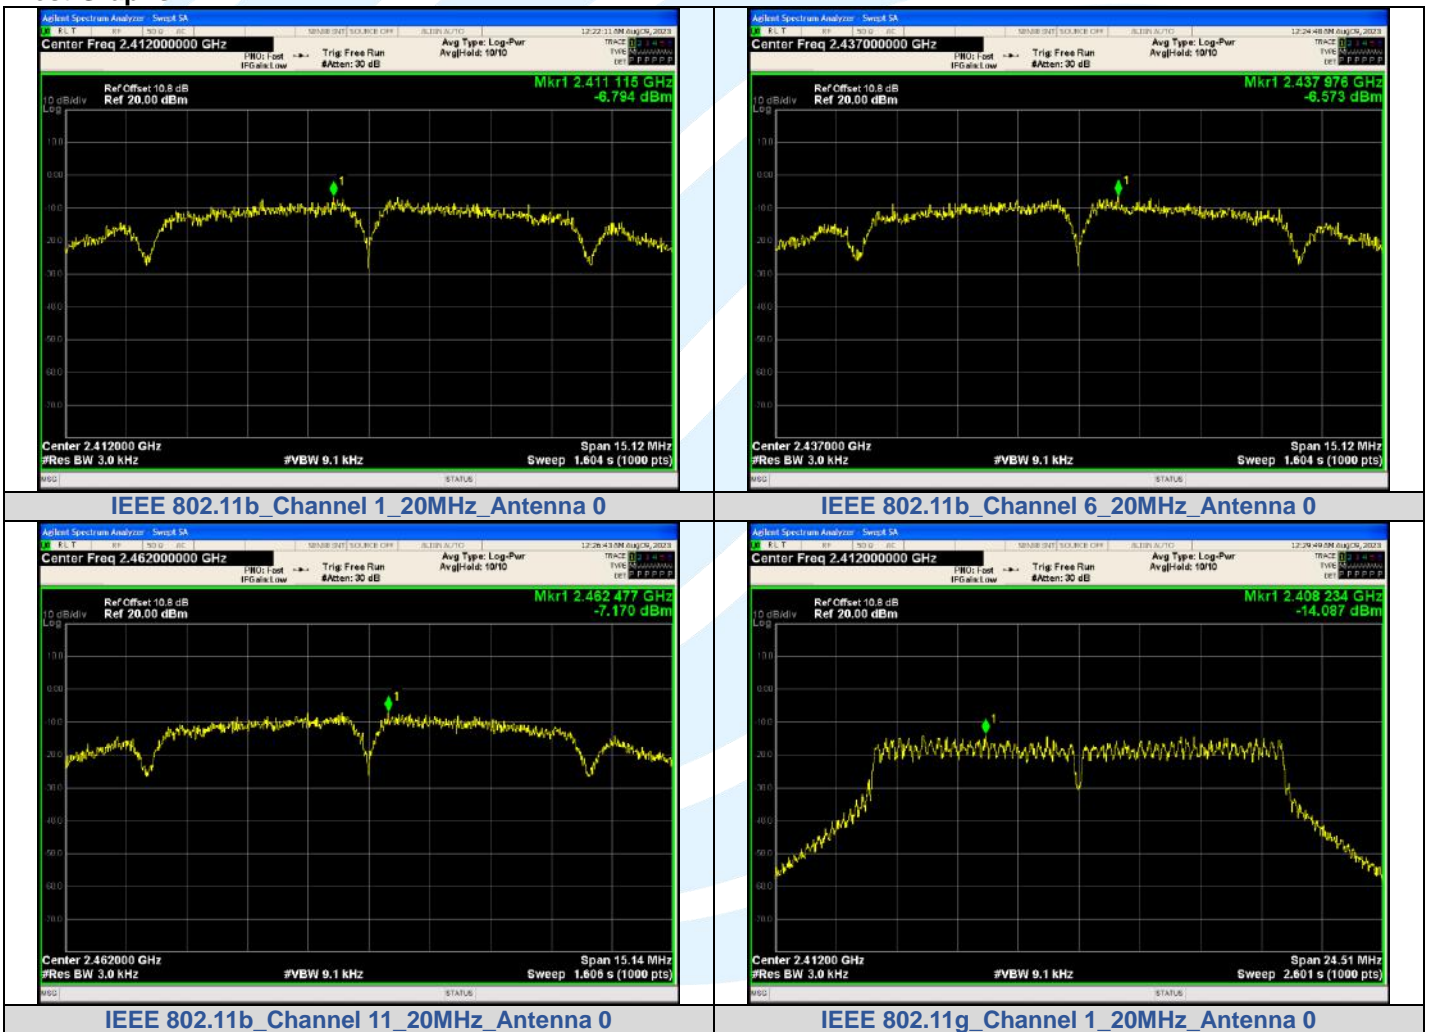



IEEE 802.11g\_Channel 6\_20MHz\_Antenna 0

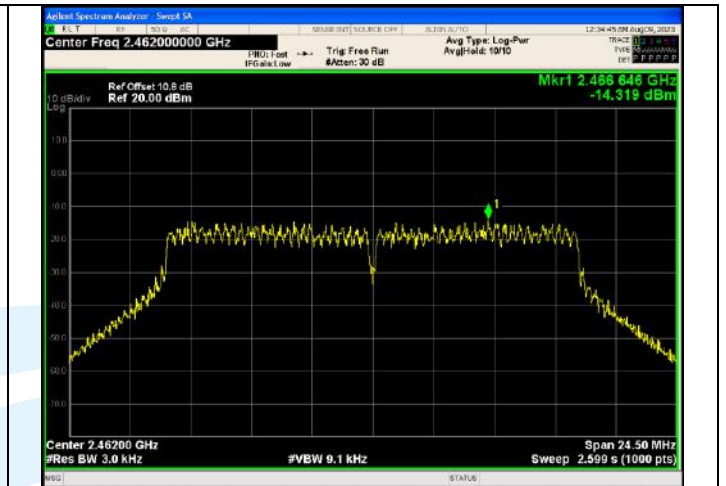


IEEE 802.11g\_Channel 11\_20MHz\_Antenna 0




IEEE 802.11n\_Channel 1\_20MHz\_Antenna 0



IEEE 802.11n\_Channel 6\_20MHz\_Antenna 0

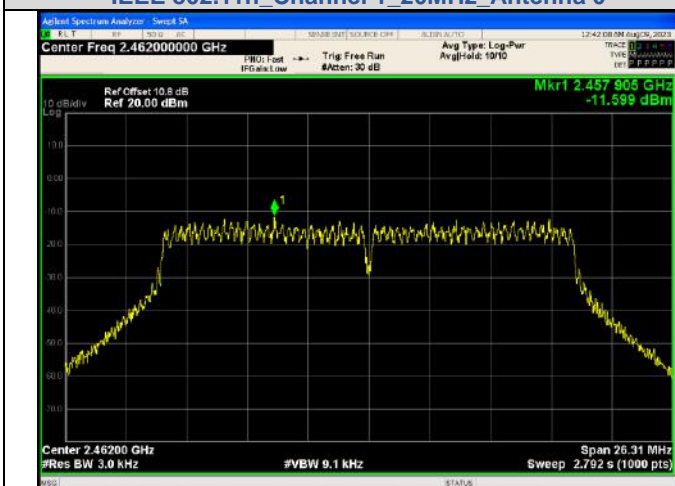

IEEE 802.11n\_Channel 11\_20MHz\_Antenna 0

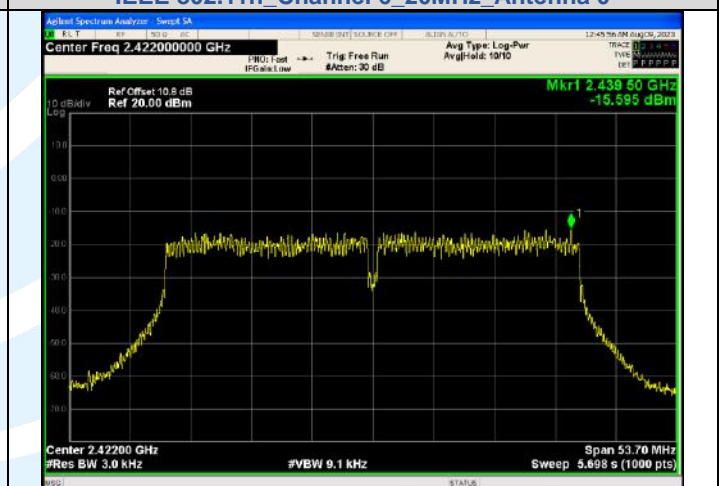

IEEE 802.11n\_Channel 3\_40MHz\_Antenna 0

## Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China


Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.1

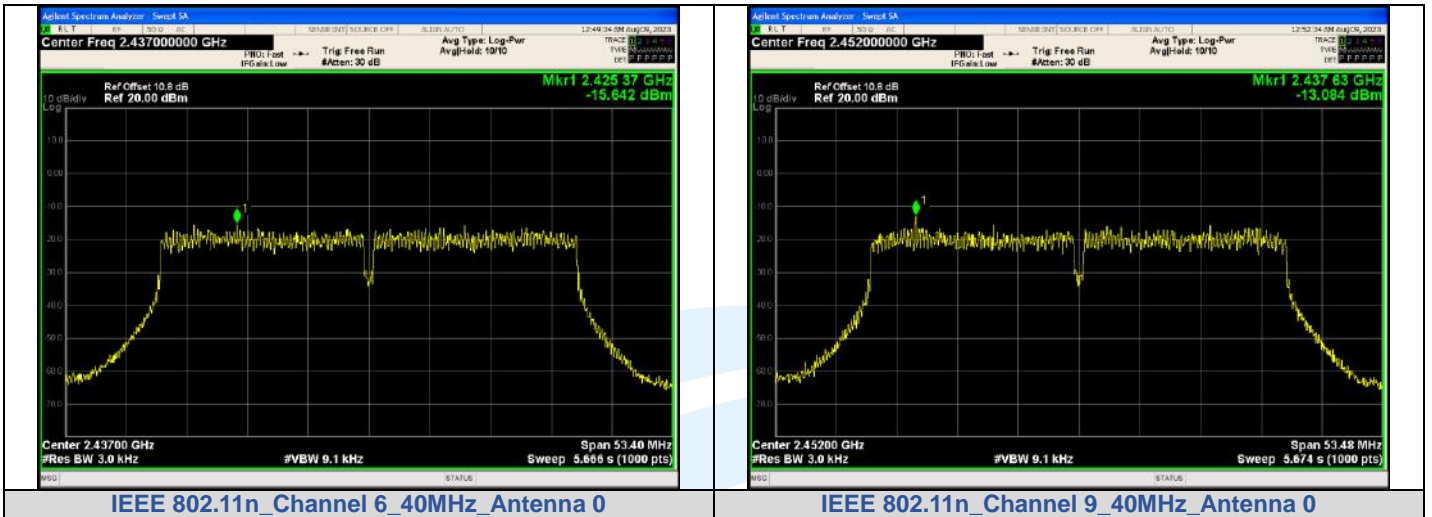

**Shenzhen UnionTrust Quality and Technology Co., Ltd.**

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.1



## APPENDIX 1 PHOTOS OF TEST SETUP

See test photos attached in Appendix 1 for the actual connections between Product and support equipment.

## APPENDIX 2 PHOTOS OF EUT CONSTRUCTIONAL DETAILS

Refer to Appendix 2 for EUT external and internal photos.

\*\*\* End of Report \*\*\*

---

The test report is effective only with both signature and specialized stamp. The result(s) shown in this report refer only to the sample(s) tested. Without written approval of UnionTrust, this report can't be reproduced except in full.

---