

FCC PART 15C TEST REPORT FOR CERTIFICATION

On Behalf of

Rondish Company Limited

Wireless Call Point Transmitter

WCP-21

FCC ID: WNG-WCP-21

Prepared for : Rondish Company Limited
Unit G&H, 4/F, Block 1, Kwai Tak Ind. Ctr. 15-33 Kwai
Tak St., Kwai Chung, N.T., Hong Kong

Prepared By : Audix Technology (Shenzhen) Co., Ltd.
No. 6, Kefeng Road, Science & Technology Park,
Nanshan District , Shenzhen, Guangdong, China

Tel: (0755) 26639496

Report Number : ACS-F19044
Date of Test : Feb.12~Apr.15,2019
Date of Report : May.05,2019

TABLE OF CONTENTS

<u>Description</u>	<u>Page</u>
1. SUMMARY OF STANDARDS AND RESULTS.....	4
1.1. Description of Standards and Results.....	4
2. GENERAL INFORMATION	5
2.1. Description of Device (EUT)	5
2.1. EUT Configuration and operation conditions for test.....	6
2.2. Test Facility.....	6
2.3. Measurement Uncertainty (95% confidence levels, k=2)	6
3. POWER LINE CONDUCTED EMISSION TEST	7
4. RADIATED EMISSION TEST	8
4.1. Test Equipment.....	8
4.2. Block Diagram of Test Setup	9
4.3. Radiated Emission Limit	10
4.4. EUT Configuration on Test.....	10
4.5. Operating Condition of EUT	10
4.6. Test Procedure.....	10
4.7. Radiated Emission Test Results	10
5. STOP TRANSMITTING TIME TEST.....	15
5.1. Test Equipment.....	15
5.2. Limit	15
5.3. Test Results	15
6. CEASE TIME AFTER ACTIVATION TEST	16
6.1. Test Equipment.....	16
6.2. Limit	16
6.3. Test Result	16
7. 20 DB BANDWIDTH TEST	17
7.1. Test Equipment.....	17
7.2. Limit	17
7.3. Test Results	17
8. ANTENNA REQUIREMENT	18
9. RADIO FREQUENCY EXPOSURE COMPLIANCE.....	19
10. DEVIATION TO TEST SPECIFICATIONS.....	20
11. PHOTOGRAPH OF TEST	21
11.1. Photos of Radiated Emission Test.....	21
12. PHOTOGRAPH OF EUT	22

TEST REPORT CERTIFICATION

Applicant : Rondish Company Limited
 Manufacturer : Rondish Company Limited
 Product : Wireless Call Point Transmitter
 FCC ID : WNG-WCP-21
 (A)Model No. : WCP-21
 (B)Power Supply : DC 3V
 (C)Test Voltage : DC 3V

Tested for comply with:
 FCC CFR47 Part 15 Subpart C

Test procedure used:
 ANSI C63.10: 2013

The device described above is tested by AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. to confirm comply with all the FCC Part 15 Subpart C requirements.

The test results are contained in this test report and AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. is assumed full responsibility for the accuracy and completeness of these tests. This report contains data that are not covered by the NVLAP accreditation. Also, this report shows that the Equipment Under Test (EUT) is to be technically compliant with the FCC requirements.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government.

Date of Test : Feb.12~Apr.15,2019 Report of date: May.05,2019

Prepared by : Monica Liu for Reviewed by : Sunny Lu
 Brave Zhang / Assistant Sunny Lu / Deputy Manager



Approved & Authorized Signer : David Jin
 David Jin / Manager

1. SUMMARY OF STANDARDS AND RESULTS

1.1. Description of Standards and Results

The EUT has been tested according to the applicable standards as referenced below.

EMISSION		
Description of Test Item	Standard	Results
Conducted Emission Test	FCC Part 15C: 15.207 ANSI C63.10: 2013	N/A
Radiated Emission Test	FCC Part 15C: 15.231(b) ANSI C63.10: 2013	PASS
Stop Transmitting Time Test	FCC Part 15C: 15.231(a)(1)	PASS
Cease Time After Activation	FCC Part 15C: 15.231(a)(2)	PASS
20 dB Bandwidth Test	FCC Part 15C: 15.207 ANSI C63.10: 2013	PASS

N/A is an abbreviation for Not Applicable.

2. GENERAL INFORMATION

2.1. Description of Device (EUT)

Product : Wireless Call Point Transmitter

Model No. : WCP-21

FCC ID : WNG-WCP-21

Operation frequency : 922.5MHz

Applicant : Rondish Company Limited
Unit G&H, 4/F, Block 1, Kwai Tak Ind. Ctr. 15-33 Kwai Tak
St., Kwai Chung, N.T., Hong Kong

Manufacturer : Rondish Company Limited
Unit G&H, 4/F, Block 1, Kwai Tak Ind. Ctr. 15-33 Kwai Tak
St., Kwai Chung, N.T., Hong Kong


Antenna Type & Gain : Antenna Type: Wire Antenna, -3dBi gain;

Date of Test : Feb.12~Apr.15,2019

Date of Receipt : Feb.01,2019

Sample Type : Prototype production

2.1. EUT Configuration and operation conditions for test



(EUT: Wireless Call Point Transmitter)

2.2. Test Facility

Site Description

Name of Firm : Audix Technology (Shenzhen) Co., Ltd.
: No. 6, Kefeng Road, Science & Technology Park,
Nanshan District , Shenzhen, Guangdong, China

EMC Lab. : Certificated by Industry Canada
: Registration Number: IC 5183A-1
Valid Date: May.07, 2020

: Certificated by DAkkS, Germany
: Registration No: D-PL-12151-01-00
Valid Date: Dec.07, 2021

: Accredited by NVLAP, USA
: NVLAP Code: 200372-0
Valid Date: Mar.31, 2020

: Certificated by FCC USA.
: Designation No.: CN5022
Valid Date: Mar.31, 2020

2.3. Measurement Uncertainty (95% confidence levels, k=2)

Test Item	Uncertainty
Uncertainty for Radiation Emission test in 3m chamber	4.0dB(30~200MHz, Polarization: H)
	4.0dB(30~200MHz, Polarization: V)
	4.4dB(200M~1GHz, Polarization: H)
	4.4dB(200M~1GHz, Polarization: V)
Uncertainty for Radiation Emission test in 3m chamber	5.0dB (1~6GHz, Distance: 3m)
	5.4dB (6~18GHz, Distance: 3m)
	5.4dB (Above 18GHz, Distance: 3m)
Uncertainty for Radiated Spurious Emission test in RF chamber	3.6dB
Uncertainty for Conduction Spurious emission test	2.0dB
Uncertainty for Output power test	0.8dB
Uncertainty for Bandwidth test	83kHz
Uncertainty for DC power test	0.1 %
Uncertainty for test site temperature and humidity	0.6°C
	3%

3. POWER LINE CONDUCTED EMISSION TEST

According to Paragraph (c) of FCC Part 15 section 15.231, Tests to demonstrate compliance with the conducted limits are not required for devices which only employ battery power for operation and which do not operate from the AC power lines or contain provisions for operation while connected to the AC power lines.

4. RADIATED EMISSION TEST

4.1. Test Equipment

Frequency range: 30~1000MHz

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	3#Chamber	AUDIX	N/A	N/A	Jun.19,18	1 Year
2.	Signal Analyzer	Rohde & Schwarz	FSV30	104050	Apr.23,18	1 Year
3.	EMI Test Receiver	Rohde & Schwarz	ESR7	101547	Apr.23,18	1 Year
4.	Amplifier	HP	8447D	2648A04738	Apr.23,18	1 Year
5.	Tri-log-Broadband Antenna	Schwarzbeck	VULB 9168	710	Aug.22,18	1 Year
6.	NSA Cable	HUBER+SUHNER	CFD400NL-LW	No.3	Dec.01,18	1 Year
7.	Coaxial Switch	Anritsu	MP59B	6201397222	Apr.23,18	1 Year
8.	Test Software	AUDIX	e3	6.2009-5-21a(n)	N/A	N/A

Note: N/A means Not applicable.


Frequency range: above 1000MHz

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	3#Chamber	AUDIX	N/A	N/A	May.17,18	1 Year
2.	Signal Analyzer	Rohde & Schwarz	FSV30	104050	Apr.23,18	1 Year
3.	Horn Antenna	ETC	MCTD 1209	DRH15F03007	May.30,18	1 Year
4.	Amplifier	Agilent	83017A	MY53270084	Oct.14,18	1 Year
5.	RF Cable	Hubersuhner	SUCOFLEX106	505239/6	Apr.23,18	1 Year
6.	Test Software	AUDIX	e3	6.2009-5-21a(n)	N/A	N/A


Note: N/A means Not applicable.

4.2. Block Diagram of Test Setup

For frequency range 30MHz-1000MHz

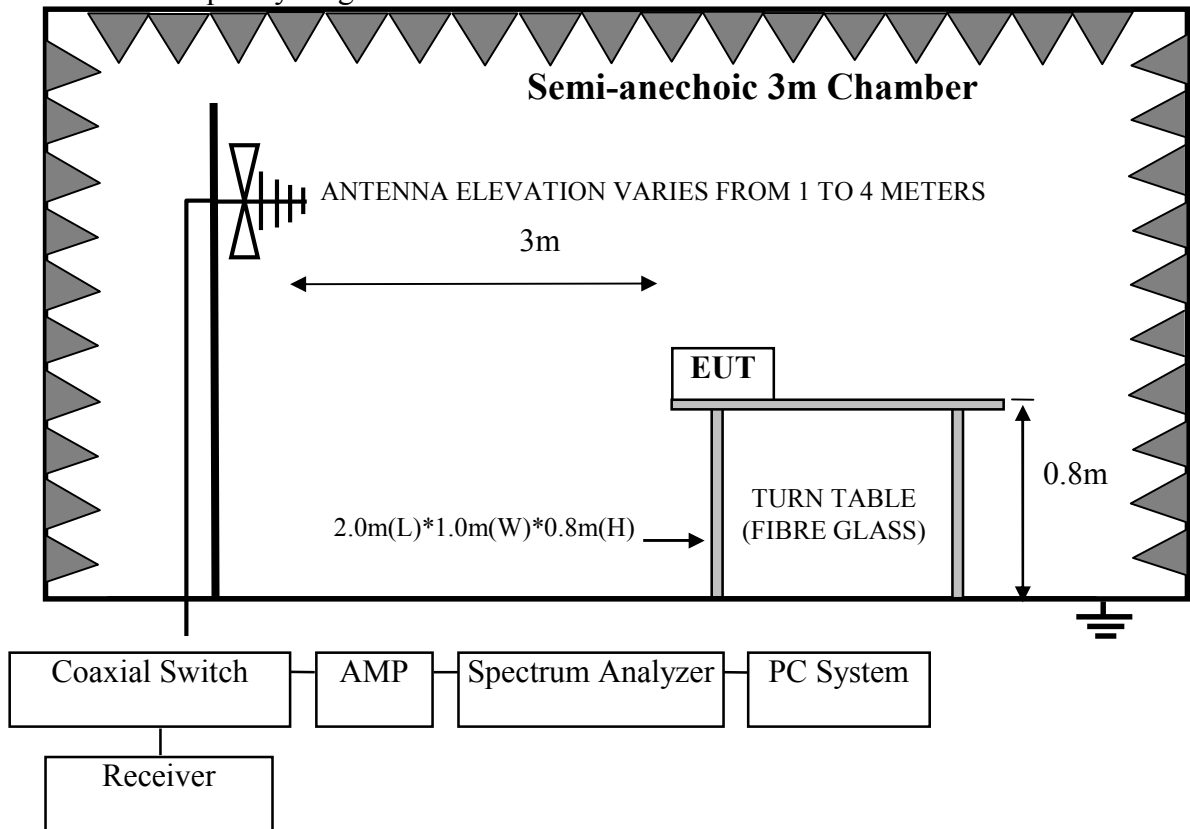

For frequency range above 1GHz

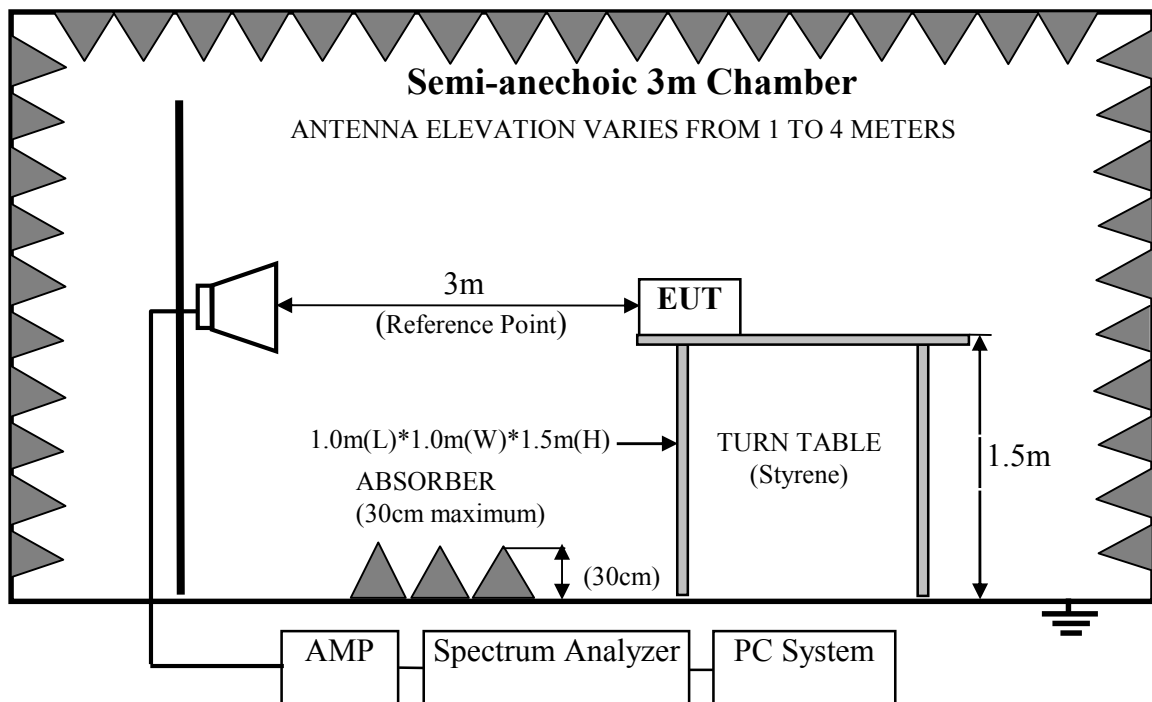

4.3.Radiated Emission Limit

All emanations from a Class B computing devices or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified below:

Fundamental Frequency(MHz)	Field Strength of Fundamental	Field Strength of Spurious emissions
922.5	QP:81.94dBuV/m at 3m distance	AV:61.94dBuV/m at 3m distance (Above 1GHz) PK:81.94dBuV/m at 3m distance (Above 1GHz) QP:61.94dBuV/m at 3m distance (Below 1GHz)

Note: The spurious emissions appearing within the frequency band listed in 15.205 Shall also comply with limits shown in section 15.209

4.4.EUT Configuration on Test

The following equipment are installed on Radiated Emission Test to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

4.5.Operating Condition of EUT

- 4.5.1.Setup the EUT and simulator as shown as Section 4.2.
- 4.5.2.Turn on the power of all equipments.
- 4.5.3.Let EUT work in Tx mode.

4.6.Test Procedure

The EUT and its simulators are placed on a turn table, which is 0.8 meter high above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna, which is mounted on a antenna tower. The antenna can be moved up and down between 1 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bilog antenna) is used as receiving antenna. Both horizontal and vertical polarization of the antenna is set on Test. In order to find the maximum emission levels, all of the interface cables must be manipulated according to ANSI C63.10-2013 on radiated emission Test.

During the pretest the EUT was rotated through three orthogonal axes to determine the attitude that maximizes the emissions.

After that the EUT was manually handled to find the orientation that has the maximum emission, which is the orientation show in the test setup photos.

The bandwidth of the EMI test receiver (R&S ESR7) is set at 120kHz for frequency range from 30MHz to 1000MHz.

The bandwidth of the Spectrum's RBW is set at 1MHz and VBW is set at 3MHz for peak emissions measurement above 1GHz

4.7.Radiated Emission Test Results


PASS.

Frequency: 30MHz~1GHz

Data: 13

File: E:\2019 Report Data\R\Rondish\ACS18QH010-RF.EM6 (13)

Date: 2019-03-07

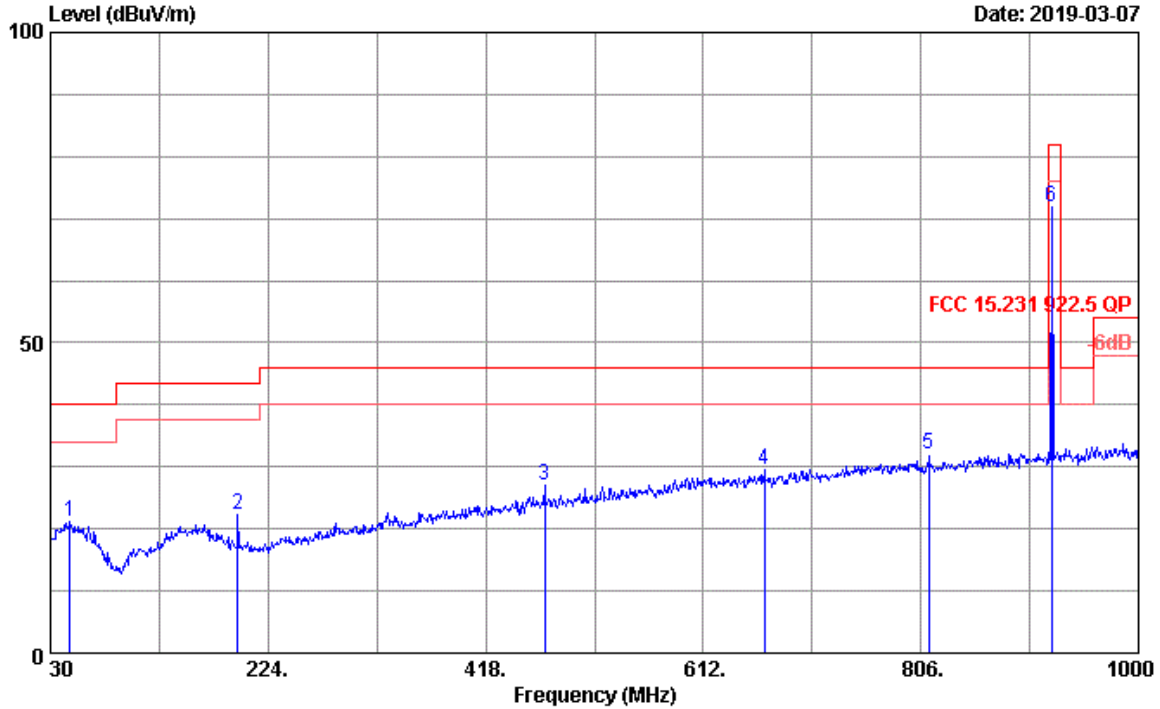


Site no. : 3m Chamber Data no. : 13
 Dis. / Ant. : 3m 2018 VULB9168-710 Ant. pol. : HORIZONTAL
 Limit : FCC 15.231 922.5 QP
 Env. / Ins. : 25.3°C/55% Engineer : Andy
 EUT : Wireless Call Point transmitters
 Power rating : DC 3V
 Test Mode : Tx Mode
 M/N:WCP-21

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	47.460	20.50	0.65	0.04	21.19	40.00	18.81	QP
2	196.840	17.10	1.38	3.81	22.29	43.50	21.21	QP
3	470.380	23.50	2.23	1.20	26.93	46.00	19.07	QP
4	666.320	26.48	2.78	0.21	29.47	46.00	16.53	QP
5	812.790	28.26	3.15	0.59	32.00	46.00	14.00	QP
6	922.500	29.28	3.39	39.23	71.90	81.94	10.04	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Data: 12 File: E:\2019 Report Data\R\Rondish\ACS18QH010-RF.EM6 (13) Date: 2019-03-07

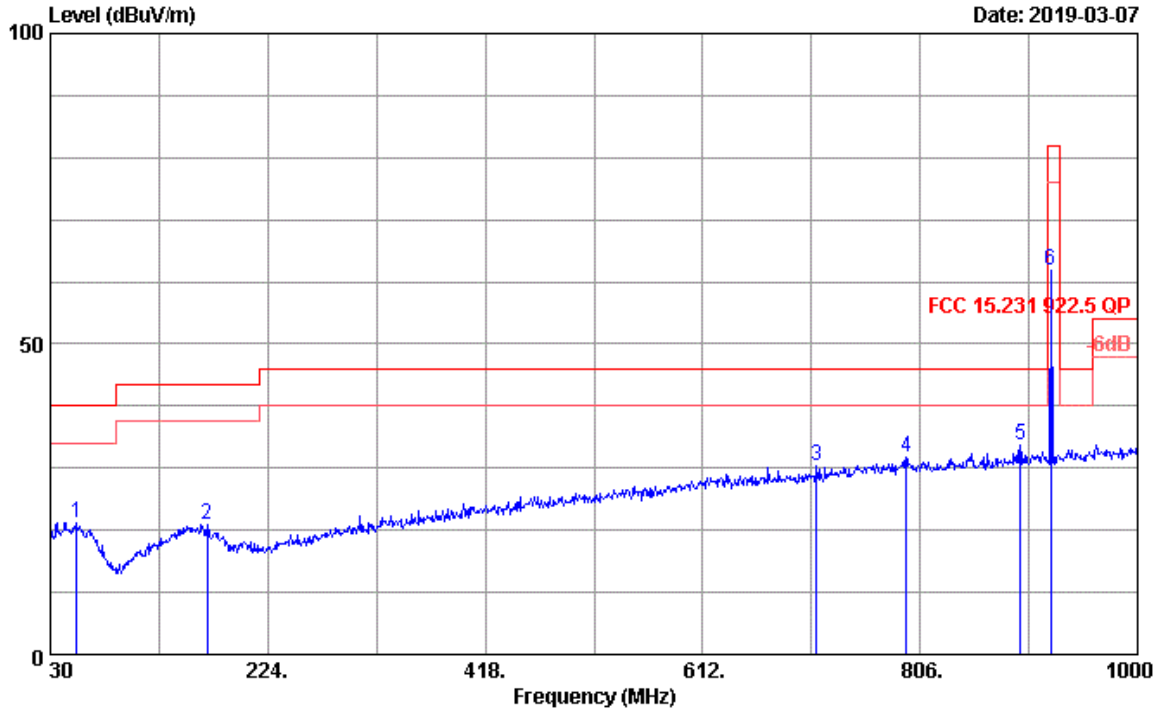

Site no. : 3m Chamber Data no. : 12
 Dis. / Ant. : 3m 2018 VULB9168-710 Ant. pol. : VERTICAL
 Limit : FCC 15.231 922.5 QP
 Env. / Ins. : 25.3°C/55% Engineer : Andy
 EUT : Wireless Call Point transmitters
 Power rating : DC 3V
 Test Mode : Tx Mode
 M/N:WCP-21

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	53.280	20.20	0.69	0.31	21.20	40.00	18.80	QP
2	169.680	19.40	1.27	0.27	20.94	43.50	22.56	QP
3	713.850	27.10	2.90	0.49	30.49	46.00	15.51	QP
4	793.390	28.46	3.10	0.07	31.63	46.00	14.37	QP
5	895.240	29.00	3.31	1.30	33.61	46.00	12.39	QP
6	922.500	29.28	3.39	29.11	61.78	81.94	20.16	QP


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Frequency: 1GHz~6GHz

Data: 4

File: E:\2019 Report Data\R\Randish\ACS18QH010-RF.EM6 (6)


Date: 2019-02-12

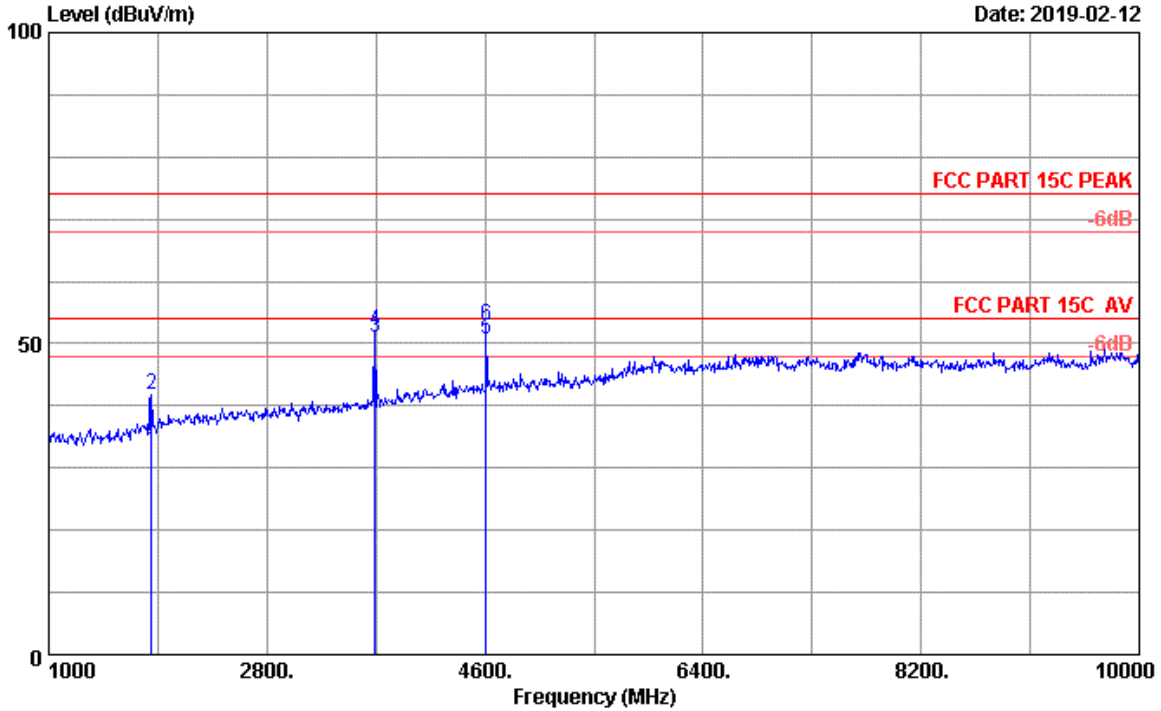

Site no. : 3m Chamber Data no. : 4
 Dis. / Ant. : 3m 2018 MCTD1209-3007 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 25.3*C/55% Engineer : Andy
 EUT : Wireless Call Point transmitters
 Power rating : DC 3V
 Test Mode : Tx Mode
 M/N:WCP-21

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1846.000	26.60	2.54	36.26	32.70	54.00	21.30	Average
2	1846.000	26.60	2.54	45.33	41.77	74.00	32.23	Peak
3	3691.000	30.07	3.61	48.36	50.93	54.00	3.07	Average
4	3691.000	30.07	3.61	49.65	52.22	74.00	21.78	Peak
5	4609.000	32.61	3.99	44.86	50.61	54.00	3.39	Average
6	4609.000	32.61	3.99	47.17	52.92	74.00	21.08	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

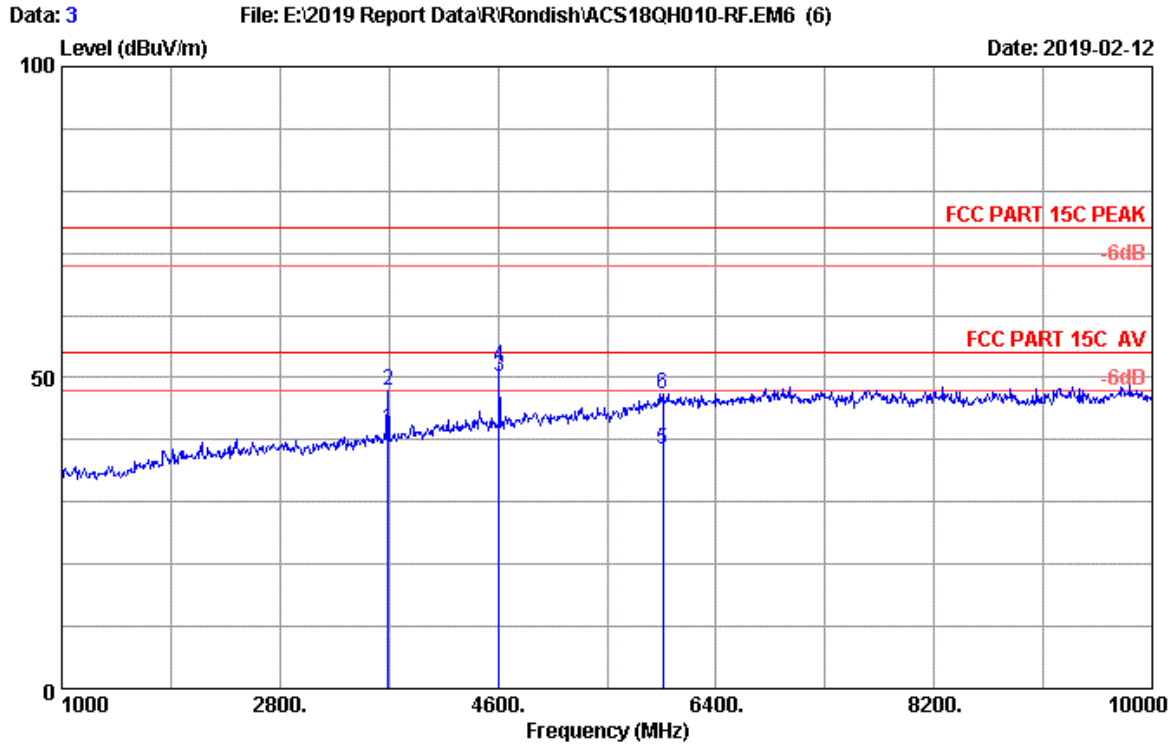

Site no. : 3m Chamber Data no. : 3
 Dis. / Ant. : 3m 2018 MCTD1209-3007 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 25.3*C/55% Engineer : Andy
 EUT : Wireless Call Point transmitters
 Power rating : DC 3V
 Test Mode : Tx Mode
 M/N:WCP-21

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Remark
1	3691.000	30.07	3.61	39.31	41.88	54.00	12.12	Average
2	3691.000	30.07	3.61	45.31	47.88	74.00	26.12	Peak
3	4609.000	32.61	3.99	44.38	50.13	54.00	3.87	Average
4	4609.000	32.61	3.99	45.99	51.74	74.00	22.26	Peak
5	5959.000	34.61	4.88	29.59	38.32	54.00	15.68	Average
6	5959.000	34.61	4.88	38.59	47.32	74.00	26.68	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

5. STOP TRANSMITTING TIME TEST

5.1. Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	EMC Analyzer	Agilent	N9030A	MY51380221	Sep.08,18	1 Year

5.2. Limit


Per Part 15.231(a)(1): A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.

5.3. Test Results

EUT: Wireless Call Point Transmitter		
M/N: WCP-21		
Test Date: 2019-04-15	Pressure: 101.2±1.0 kpa	Humidity: 52.1±3.0%
Tested By: Lynn	Test Site: RF site	Temperature:22.9±0.6°C

Frequency (MHz)	Test Mode	Stop Transmitting Time (s)	Limit (s)
922.5	Tx	3.96	<5

Conclusion : PASS

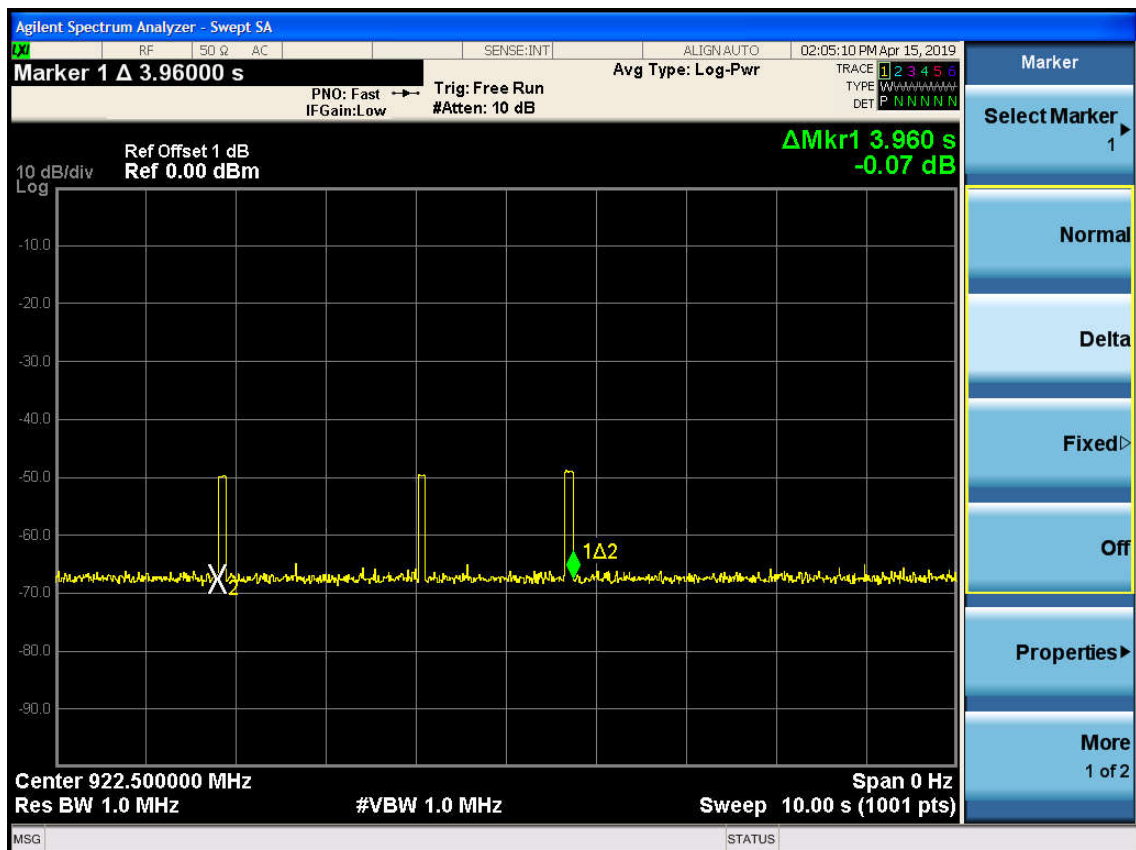

6. CEASE TIME AFTER ACTIVATION TEST

6.1. Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	EMC Analyzer	Agilent	N9030A	MY51380221	Sep.08,18	1 Year

6.2. Limit


Per Part 15.231(a)(2): A transmitter activated automatically shall cease transmission within 5 seconds after activation.

6.3. Test Result

EUT: Wireless Call Point Transmitter		
M/N: WCP-21		
Test Date: 2019-04-15	Pressure: 101.2±1.0 kpa	Humidity: 52.1±3.0%
Tested By: Lynn	Test Site: RF site	Temperature: 22.9±0.6°C

Frequency (MHz)	Test Mode	Cease Time After Activation (s)	Limit (s)
922.5	Tx	4.43	<5

Conclusion : PASS

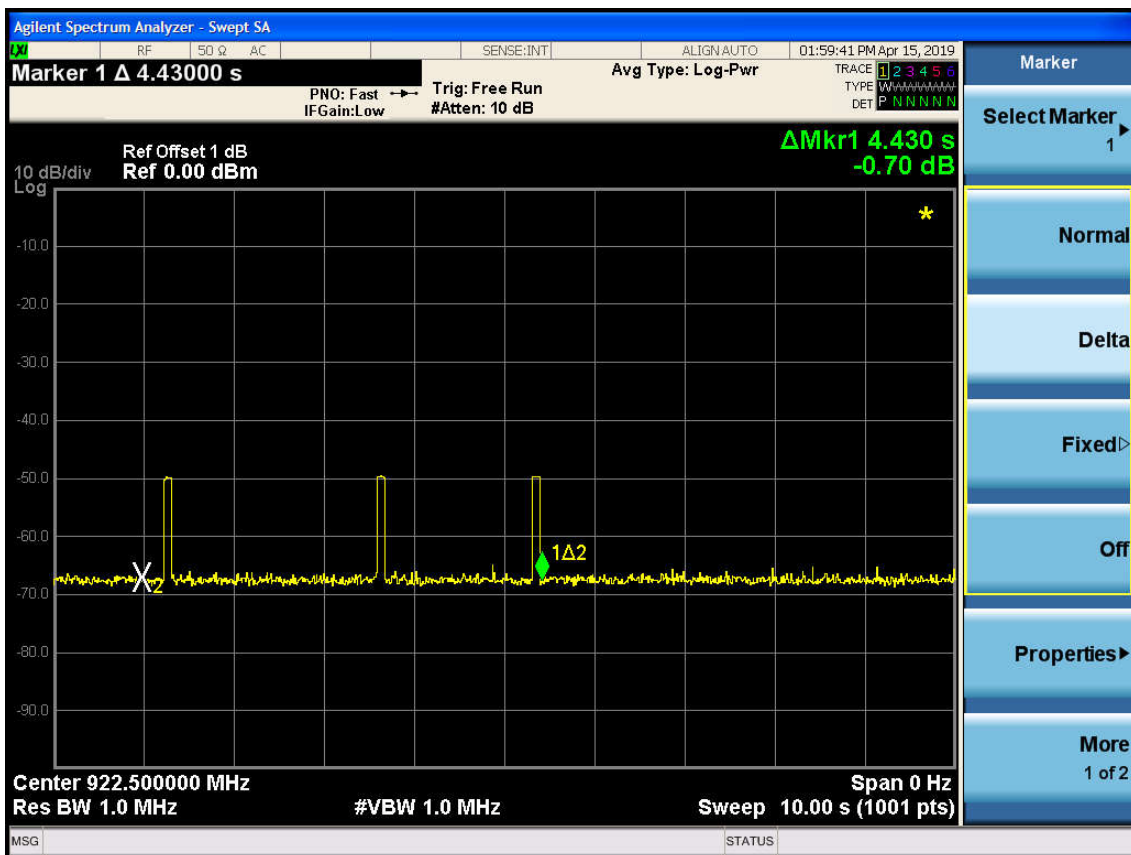

7. 20 DB BANDWIDTH TEST

7.1. Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	PXA Signal Analyzer	Agilent	N9030A	MY51380221	Sep.08,18	1 Year
2.	Attenuator	Agilent	8491B	MY39269170	Oct.14,18	1 Year
3.	RF Cable	Hubersuhner	SUCOFLEX106	505239/6	Apr.23,18	1 Year

7.2. Limit


The bandwidth of the emission shall be no wider than 0.5% of the center frequency.

7.3. Test Results

EUT: Wireless Call Point Transmitter		
M/N: WCP-21		
Test Date: 2019-03-11	Pressure: 101.2±1.0 kpa	Humidity: 52.1±3.0%
Tested By: Lynn	Test Site: RF site	Temperature:22.9±0.6 °C

Frequency (MHz)	Test Mode	-20dB Bandwidth (kHz)	Limit (MHz)
922.5	Tx	49.55	<4.6125

Conclusion : PASS

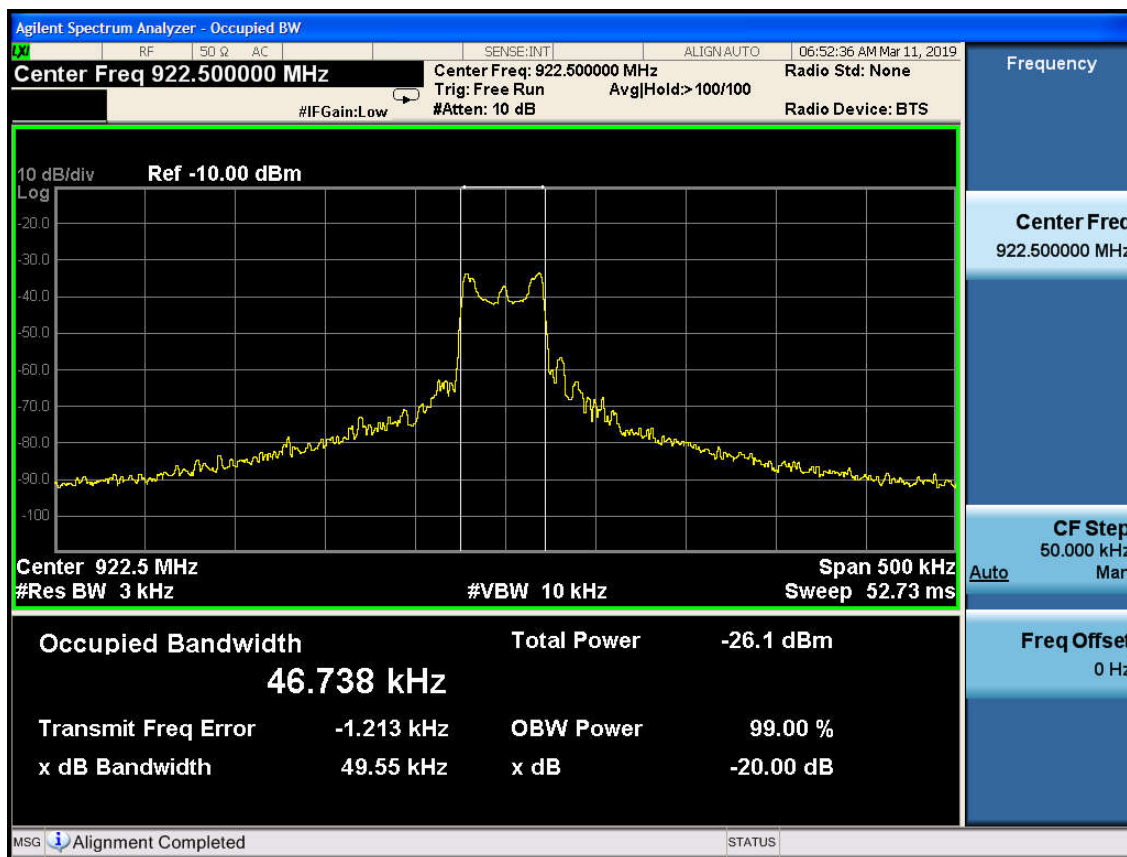

8. ANTENNA REQUIREMENT

RESULT : **PASS**

Test Date : Feb.12~Apr.15,2019

Test standard : FCC Part 15.231

Limit : the use of antennas with directional gains that do not exceed 6 dBi

According to the manufacturer declared, the EUT has an Wire antenna, the directional gain of antenna is -3dBi, and the antenna connector is designed with permanent attachment and no consideration of replacement. Therefore the EUT is considered sufficient to comply the provision.

9. RADIO FRREQUENCY EXPOSURE COMPLIANCE

RESULT : PASS

Test standard : FCC KDB Publication 447498 D01 V06

Since maximum peak output power of the transmitter is 16mW, i.e. $0.000007432780\text{mW} < 16\text{mW}</math>, hence the EUT is excluded from SAR evaluation according to FCC KDB Publication 447498 D01: General RF Exposure Guidance V06.$

10.DEVIATION TO TEST SPECIFICATIONS

[NONE]