


## WUMP-40

### Test the pad using PAG-31 receiver

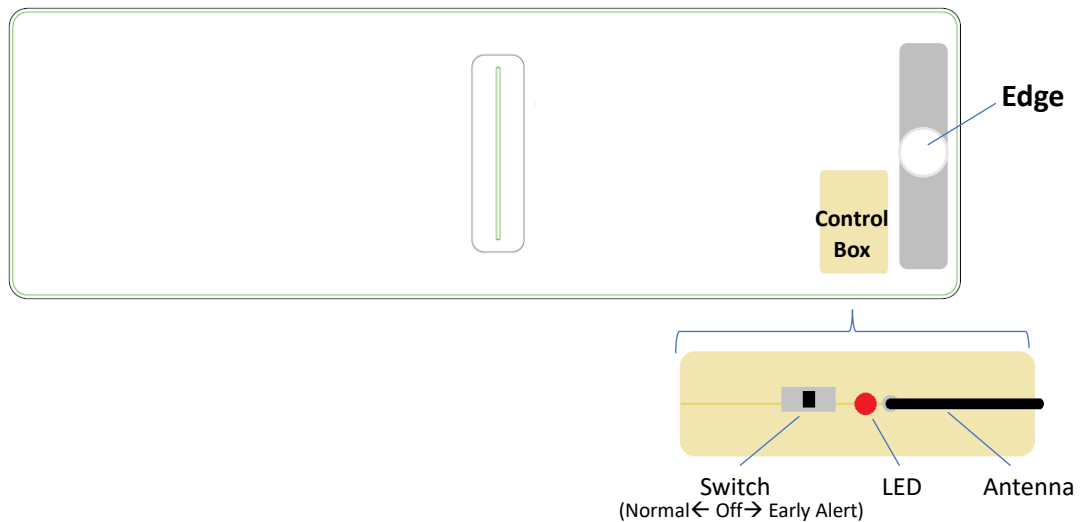

#### **A. Pair the pad to PAG-31 receiver.**

1. Power on the pad and switch to Normal mode.
2. Put the receiver in pairing mode by press and hold PROGRAM button in 2 seconds until LED light up.
3. Press and release the edge on the pad within 3 seconds. There will have a beep tone and then send the pairing code to receiver.
4. Once the receiver pairing successful, it will beep and leave the pairing mode automatically.

#### **B. Test the pad and receiver.**

1. Switch the pad off and on again to Normal mode.
2. Press and release the edge on the pad within 3 seconds. There will have a beep tone and then send the alarm code to receiver.
3. Receiver will alarm.

#### Remarks:

- If holding the edge of the pad over 3 seconds, the pad will exit pairing mode. Then, please switch the pad off and on again.

## **FCC Compliance**

This device complies with part 15 of the FCC Rules.

Operation is subject to the following two conditions:

- This device may not cause harmful interference, and
- This device must accept any interference received, including interference that may cause undesired operation.

### **Notice:**

Any changes or modifications not expressly approved by the party responsible for compliance could void your authority to operate the equipment.

### **NOTE:**

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/ TV technician for help.

## **Operating Temperature**

10°C to 40°C

## **History**

V0.1 (2023-08-29)	- First release.
V0.2 (2023-08-29)	- Added FCC Compliance.
V0.3 (2023-10-12)	- Added Operating Temperature.