

TO: 翰禹科技股份有限公司

**SPECIFICATION FOR APPROVAL**

DESCRIPTION : 2.4G Antenna SMA BLACK  
CUSTOMER DWG. NO. /PART NO : 8603582000010  
KINSUN PROD. NO : 6602803081-000  
DATE : 2007.12.07



PLEASE RETURN TO US ONE COPY OF “ SPECIFICATION FOR APPROVAL ” WITH YOUR APPROVED SIGNATURES

**APPROVED SIGNATURES**



	<b>APPROVED</b>	<b>CHECKED</b>	<b>PREPARED</b>
<b>NAME</b>	<b>Yang Alan</b>	<b>Roy Wu</b>	<b>Stella Wang</b>

慶陞工業股份有限公司



**KINSUN INDUSTRIES INC.**

桃園縣中壢市普忠路 211 巷 20 號

TEL : 886-3-4353551

FAX : 886-3-4353951

<http://www.kinsun.com>

e-mail: roy@kinsun.com

Certificate TW97/10964QA

The management system of

## KINSUN INDUSTRIES INC.

NO. 20, LANE 211, PU-CHUNG ROAD, CHUNG-LI CITY,  
TAOYUAN HSIEN, TAIWAN



has been assessed and certified as meeting the requirements of

## ISO 9001:2000

For the following activities

**Design and manufacture of connector for telecomm & ICT,  
RF- Antenna, Stamping- parts.**

Further clarifications regarding the scope of this certificate and the applicability of ISO 9001:2000 requirements may be obtained by consulting the organisation

This certificate is valid from 13 October 2006 until 12 October 2009  
Issue 4. Certified since October 1997

Authorised by

*P. Earl*



005

SGS United Kingdom Ltd Systems & Services Certification  
Rossmore Business Park Ellesmere Port Cheshire CH65 3EN UK  
t +44 (0)151 350-6666 f +44 (0)151 350-6600 www.sgs.com





Certificate No.

*TW-HSPM-1056*

Issued:  
Revision:  
Expiration:

March 16, 2007  
N/A  
March 15, 2010

**IECQ Certificate of Hazardous Substance Process Management (HSPM)  
applicable to the European Directive 2002/95/EC ("RoHS") requirements.**

The United States National Authorized Institution (ECCB)  
and the Supervising Inspectorate (SGS Taiwan Ltd.) certify that

**Kinsun Industries Inc.**

No. 20, Lane 211,  
Pu-Chung Road,  
Chung-Li City, Taoyuan Hsien, Taiwan

Has developed and implemented Hazardous Substances Process Management, procedures, and related processes in compliance with the applicable requirements for HSPM organization approval which is in accordance with the Basic Rules IECQ-01 and Rules of Procedure QC 001002-5 "IECQ Hazardous Substance Process Management" of the IEC Quality Assessment System for Electronic Components (IECQ), and with respect to the Specification QC 080000 IECQ HSPM.

**This certification is applicable to all electronic components and related materials and processes for the**

design and manufacture of connector for telecomm & ICT, RF-Antenna, Stamping-parts.

**Issued by Certification Authorities:**



Electronic Component Certification Board

Signed:

Stanley H. Salot Jr. - President, ECCB


ECCB  
PO Box 9041, Midland, Texas 79708  
Tel: (432) 697-9970 Fax: (866) 260-6181  
Web Site: [www.eccb.org](http://www.eccb.org)




SGS Taiwan Ltd.  
136-1, Wu Kung Road,  
Wuku Industrial Zone,  
Taipei County, Taiwan  
Web Site: [www.sgs.com](http://www.sgs.com)

The validity of this certificate is maintained through on-going surveillance inspections.

Note: This certificate is valid only in conjunction with the approval document(s). This approval and this certificate may be suspended or withdrawn in accordance with the Rules of Procedure of the IECQ. This certificate remains the property of the body which granted it.

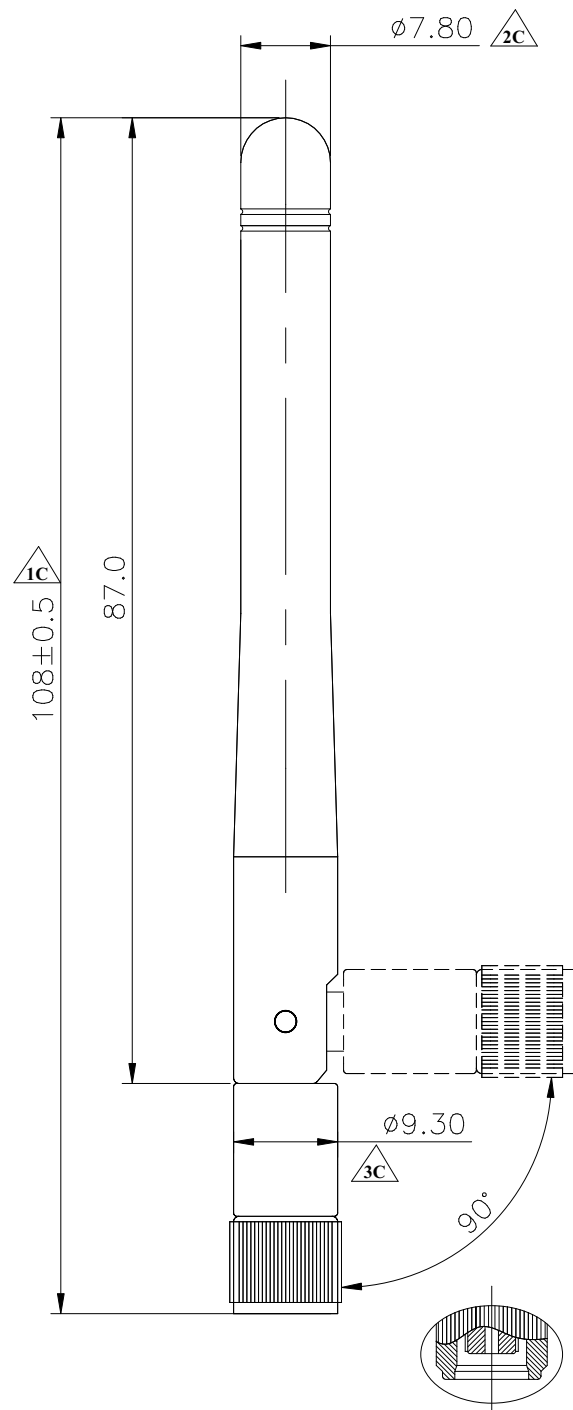

**ELECTRICAL**  
 Frequency : 2.4GHz  
 Connector : SMA-Male-RP

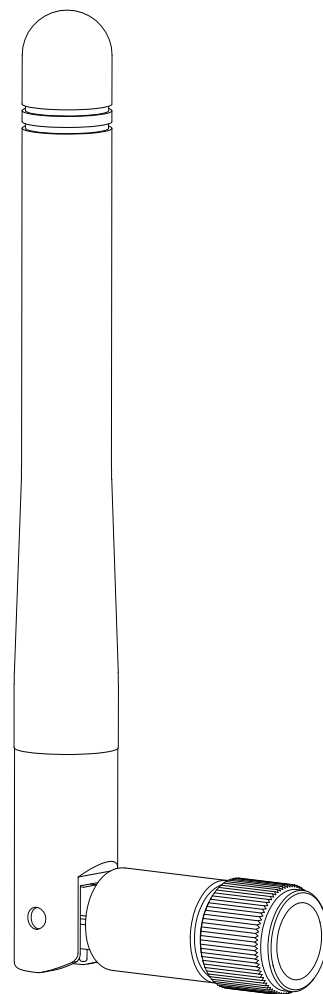

※ 凡標註記號者, 為品管檢驗之尺寸

設計 DR. M arco 94/01/03	核准 APPD. Jerry 94/01/03	容許公差 .XXX ±0.10 .XX ±0.25 .X ±0.38 X ±0.50 ANG ±3°	TOLERANCE	品名 ARTICLE 6602-2.4G -SM A
版本說明 REVISION NOTE		圖號 DWG NO. 6602803081		單位 UNIT mm
使用BALUN		比例 SCALE 15/1		張數 SHEET 1/1
KINSUN 慶陞		版本 REV. A		

## TECHNICAL DATA

### Electrical Properties

---

---

Frequency Range: 2.4~2.5GHz

Impedance: 50 Ohm nominal

VSWR : 1.92Max.

Radiation: Omni

Return loss : -10dB Max.

Electrical Wave : 1/2 wavelength dipole

Gain : 2.0dBi (PEAK)

Admitted power : 1W

Polarization: Vertical

### Mechanical Properties

---

---

Antenna Cover: PU

Antenna Base : PC

Color : BLACK

Operation Temperature:-20°C~+60°C

Storage Temperature:-30°C~+75°C

Connector: SMA MALE RP


Brand / Model : 6602803081-000

Remark : 2450MHz

Tested by : Nick Dai

Date : 2005/04/29

Time : 下午 02 : 30

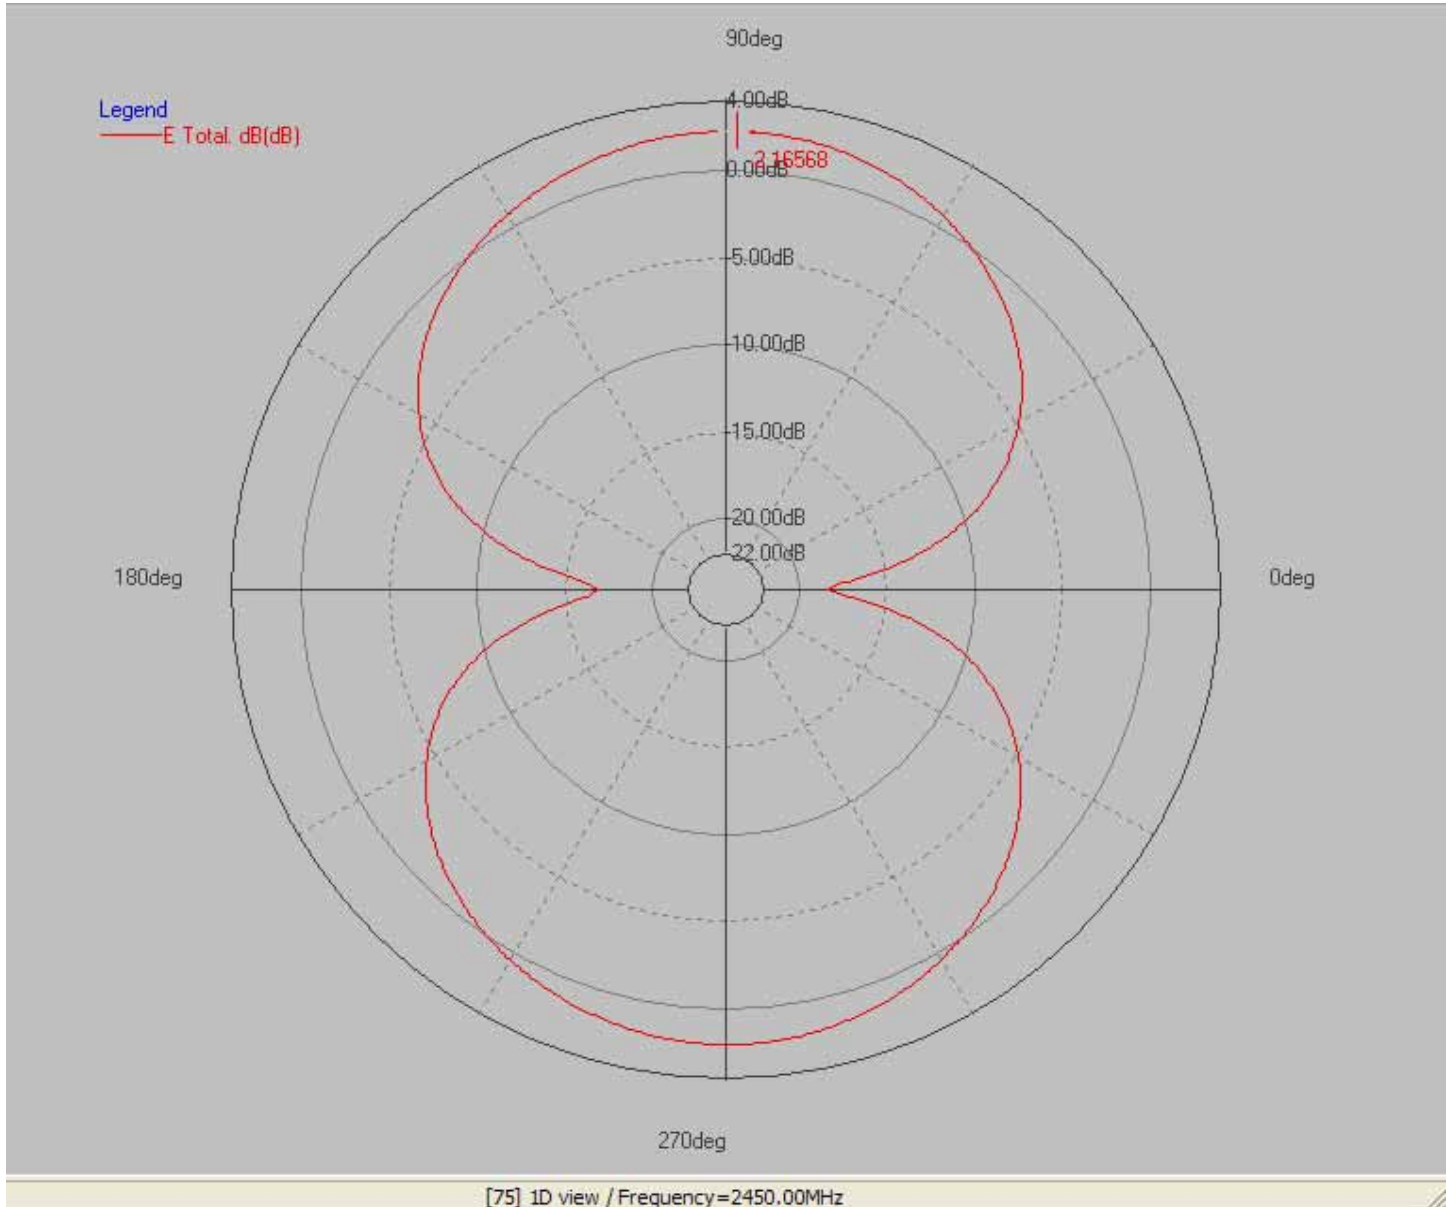

-- : Max. deg

\*Unit : dBi

Frequency(MHz) : 2450.00

Pattern Field : E plane

Average Gain(dB) : -2.06dB

Maximum Gain(dB) : 2.17dB

Maximum Gain(degree) : 88.57

Minimum Gain(dB) : -18.37dB

Minimum Gain(degree) : 0.00




Brand / Model : 6602803081-000

Remark : 2450MHz

Tested by : Nick Dai

Date : 2005/04/29

Time : 下午 02 : 30

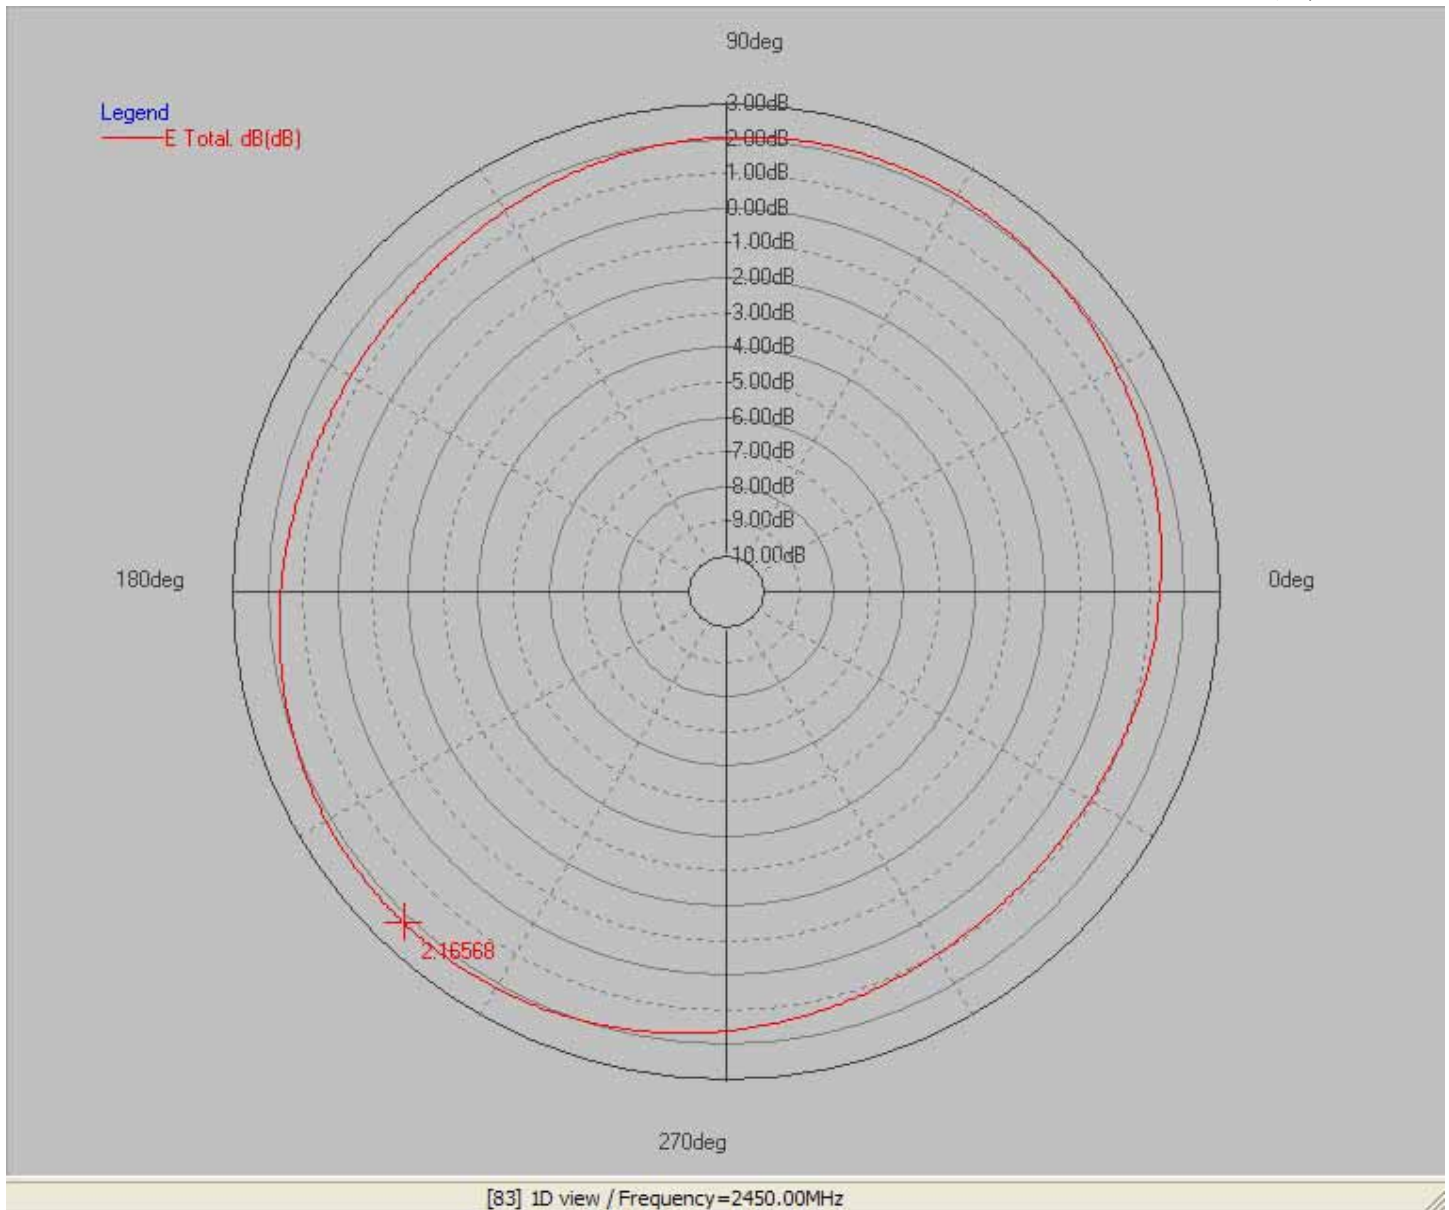

-- : Max. deg

\*Unit : dBi

Frequency(MHz) : **2450.00**

Pattern Field : **H plane**

Average Gain(dB) : **1.62dB**

Maximum Gain(dB) : **2.17dB**

Maximum Gain(degree) : **226.02**

Minimum Gain(dB) : **0.85dB**


Minimum Gain(degree) : **318.10**

Brand / Model : 6602803081-000  
Remark : 2400 MHz – 2500 MHz  
Tested by : Allen Yu

Date : 2007/10/25

PM 13:52

## S11

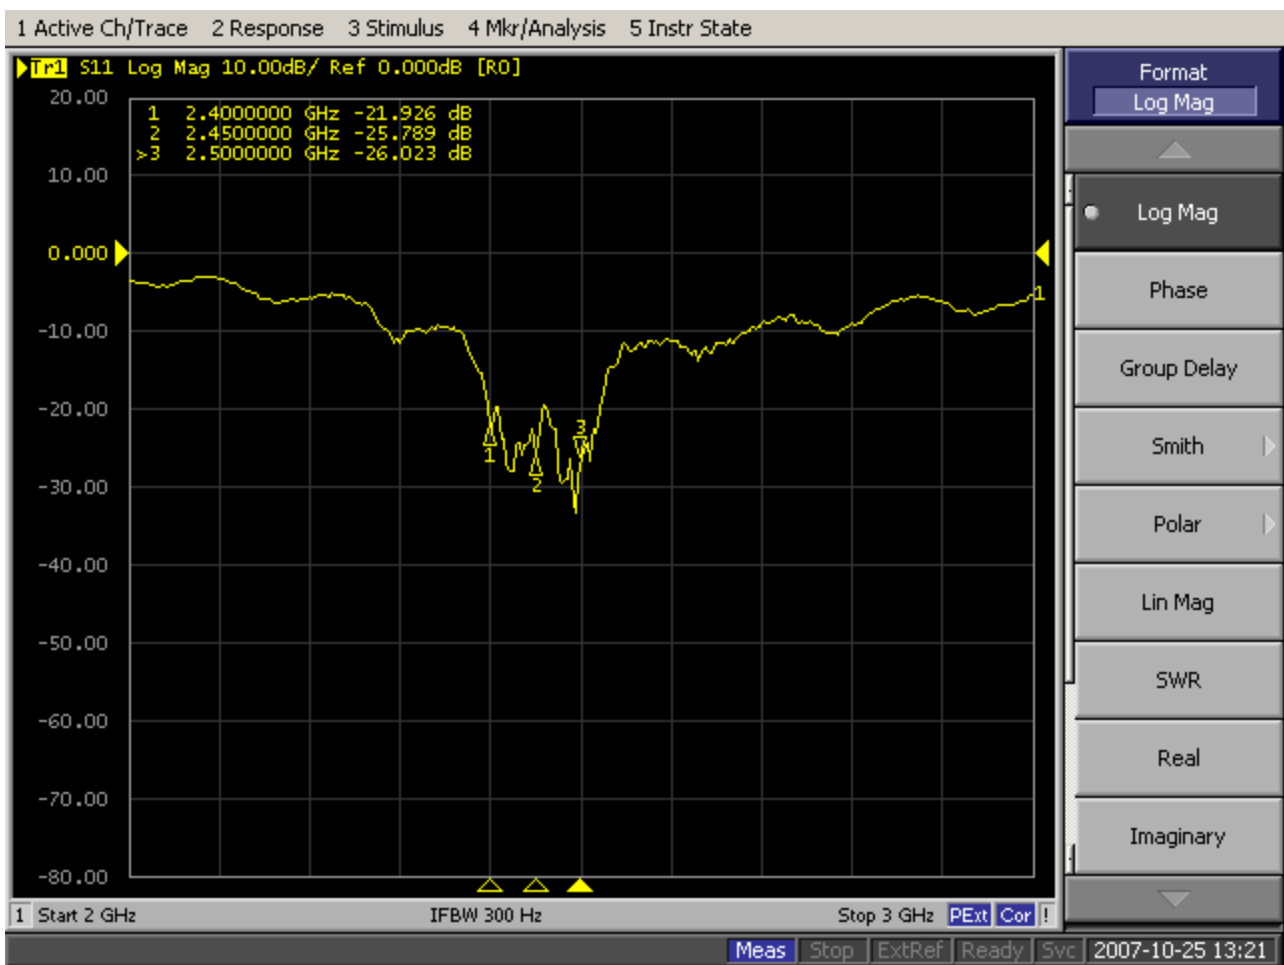




Brand / Model : 6602803081-000  
Remark : 2400 MHz – 2500 MHz  
Tested by : Allen Yu

Date : 2007/10/25

PM 13:52

## VSWR

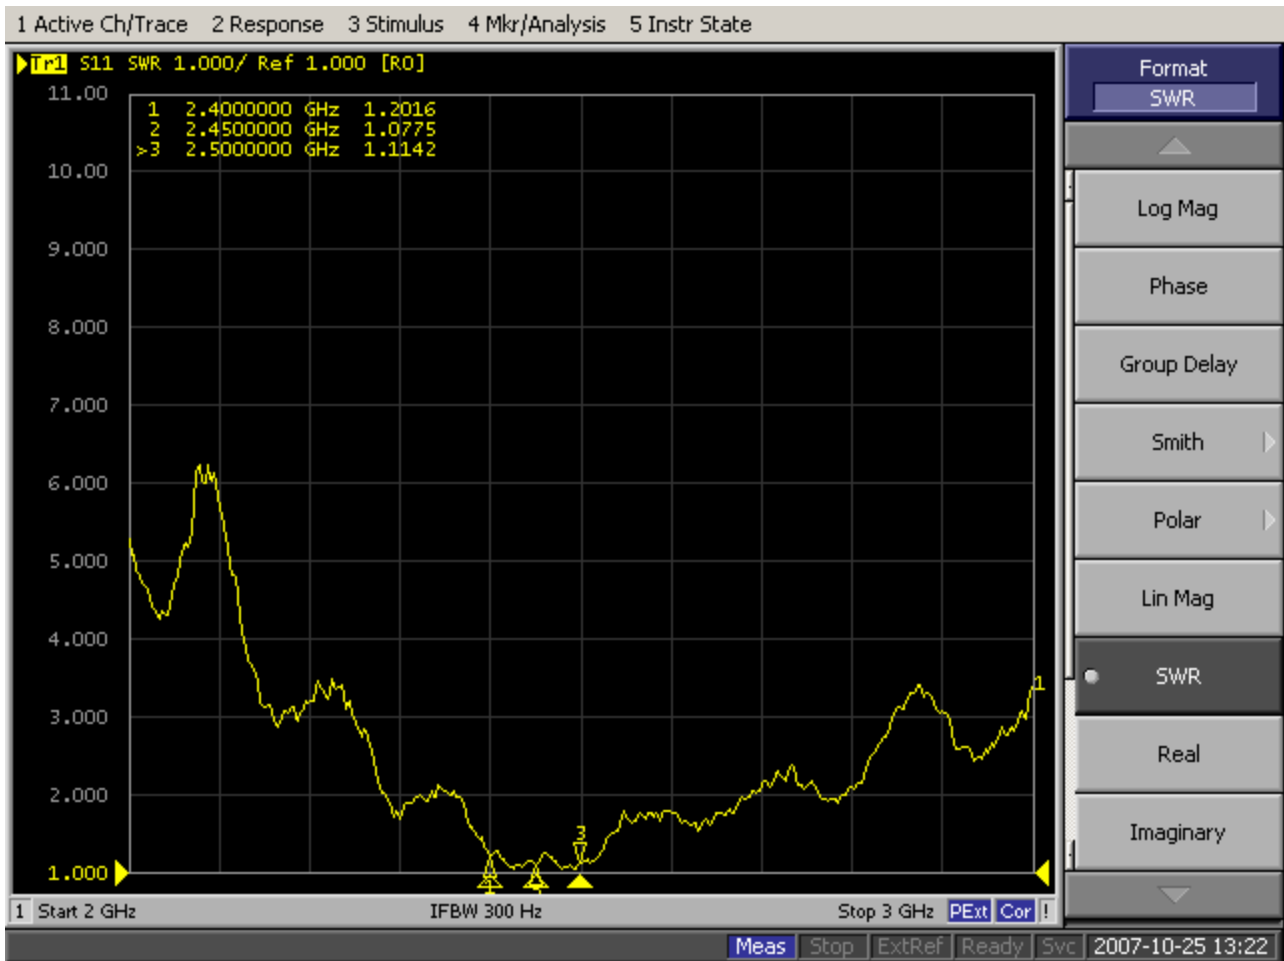


Brand / Model : 6602803081-000  
Remark : 2400 MHz – 2500 MHz  
Tested by : Allen Yu

Date : 2007/10/25

PM 13:52

## PHASE

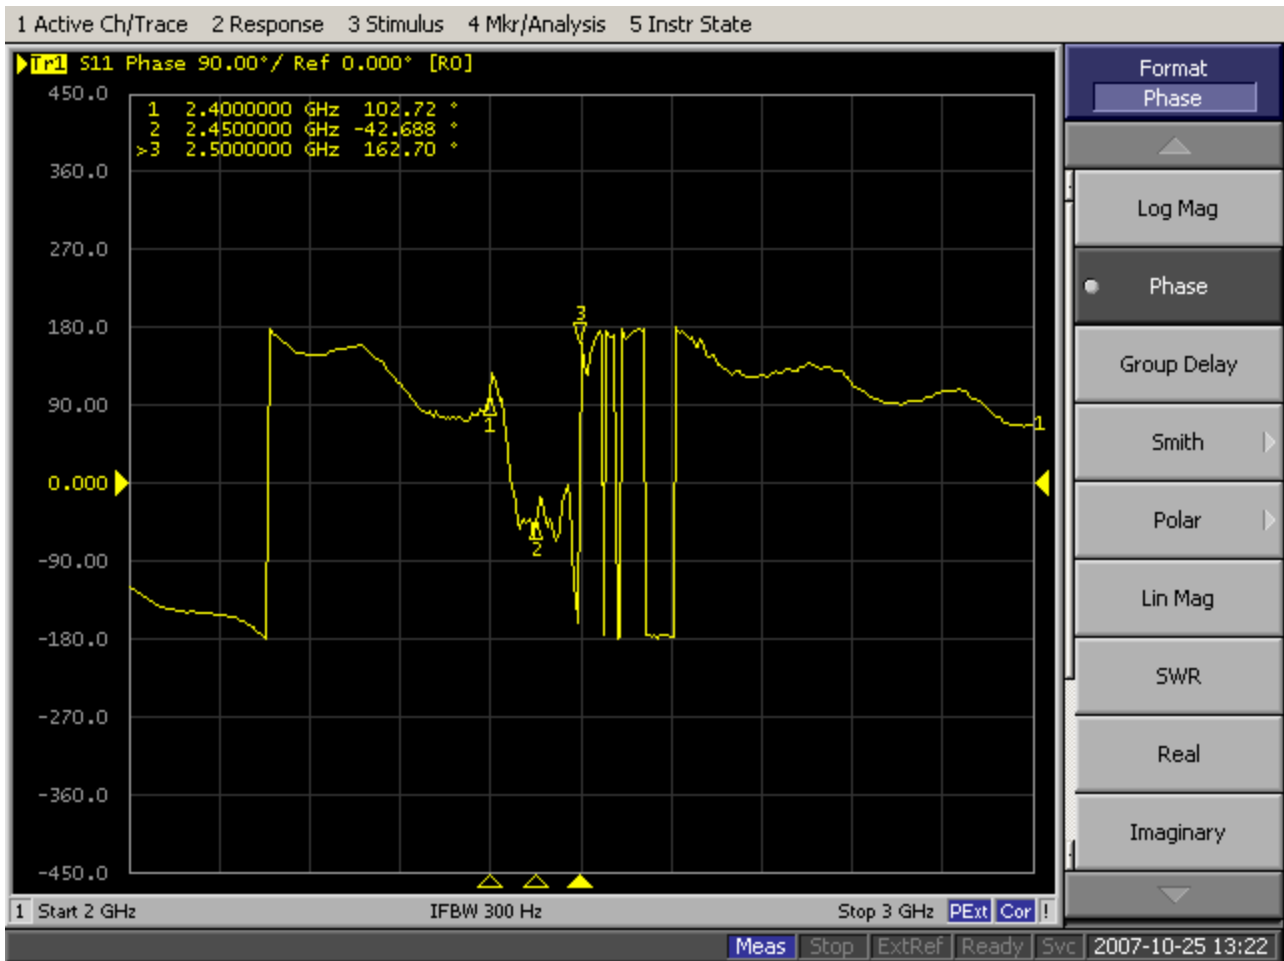


Brand / Model : 6602803081-000  
Remark : 2400 MHz – 2500 MHz  
Tested by : Allen Yu

Date : 2007/10/25

PM 13:52

### SMITH

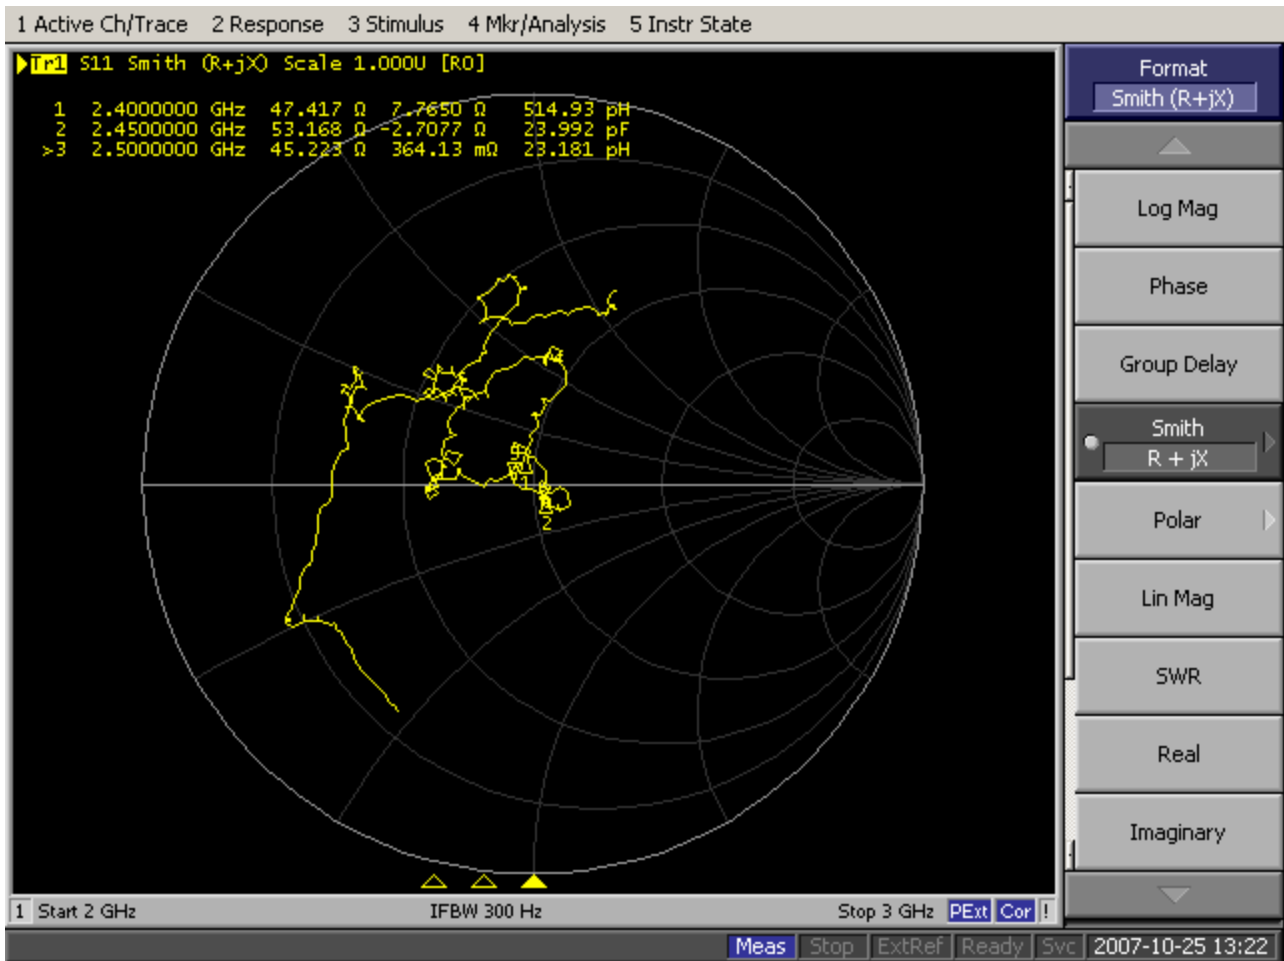

# Elastollan<sup>®</sup> S Series

## Polyester Type

### Technical Bulletin

Elastollan<sup>®</sup> S series of products are polyester-based thermoplastic polyurethanes that exhibit good hydrolytic stability. They also exhibit good oil, fuel and solvent resistance. These products can be injection molded, blow molded and extruded. All grades should be dried before processing. Elastollan<sup>®</sup> products can be stored for up to 1 year in their original container. Containers should be stored in a cool, dry area.

**Extrusion grades: S90A**

**Injection molding grades: S80A to S60D**

Physical Properties	Units	ASTM Method	S80A <sup>3</sup>	S85A <sup>3</sup>	S90A <sup>3</sup>	S95A <sup>3</sup>	S98A <sup>3</sup>	S60D <sup>3</sup>
Specific gravity	gr./cm <sup>3</sup>	D-792	1.21	1.22	1.23	1.23	1.24	1.25
Hardness	Shore A D	D-2240	80 ± 2	85 ± 2	92 ± 2	96 ± 2	98 ± 2	-
				-	41 ± 2	48 ± 2	54 ± 2	60 ± 2
Tensile strength	MPa psi	D-412	27.5	34	39	42	42	43
			4000	4900	5600	6100	6100	6200
Tensile stress @100 % elongation	MPa psi	D-412	5.5	6.9	11	14	19	22
			800	1000	1550	2000	2700	3200
@300 % elongation	MPa psi		9.6	14	20	26	32	37
			1400	1980	2900	3800	4700	5300
Elongation @brk.	%	D-412	650	690	540	510	425	450
Tensile set @brk.	%	D-412	45	35	55	70	80	110
Tear strength	N/mm lb./in.	D-624 DIE C		104	128	154	185	195
				590	730	875	1050	1150
Abrasion resistance	mg (Loss)	D-1044 <sup>2</sup> (Taber)	25	25	25	30	50	50

*Test samples were cured 20 hours @ 100 °C before testing.*

**NOTE:** <sup>1</sup> These products can only be ordered in minimum quantities. Please contact your sales representative for details.

<sup>2</sup> H-18 wheel, 1000 gm weight and 1000 cycles.

<sup>3</sup> Products with an N designation do not contain hydrolytic stabilizers. Contact Elastollan Technical Service Rep for further information

**Caution:** Contact with product dusts from regrinding operations may cause temporary irritation of the eyes and the respiratory tract. Use with local exhaust. Under hot melt processing conditions (170-230 °C), wear personal protective equipment to prevent thermal burns.

**First aid:** *Eyes*-Flush eyes with flowing water at least 15 minutes. If irritation develops, consult a physician. *Skin*-Skin contact with hot melt may cause thermal burns. Call a physician immediately. *Inhalation*-If vapors generated from the hot melt process are inhaled, move to fresh air. Aid in breathing. If breathing difficulties develop, see a physician immediately.

**In case of fire:** Use water fog, foam, CO<sub>2</sub>, or dry chemical extinguishing media. Firefighters should be equipped with self-contained breathing apparatus and turnout gear.

**Disposal:** Waste material, unused contents and empty containers must be disposed of in accordance with applicable local, state or federal regulations. Refer to our Material Safety Data Sheet for specific disposal instructions.

**In case of chemical emergency:** Call CHEMTREC day or night for assistance and information concerning spilled material, fire, exposure and other chemical accidents. 800-424-9300

**Attention:** This product is sold solely for use by industrial institutions. Refer to our Material Safety Data Sheet regarding safety, usage, applications, hazards, procedures and disposal of this product. Consult your supervisor for additional information.

No warranties of any kind, either express or implied, including warranties of merchantability or fitness for a particular purpose, are made regarding products described or designs, data or information set forth or that the products designs, data or information may be used without infringing the intellectual property rights of others in no case shall the descriptions information, data or designs provided be considered a part of our terms and conditions of sale. Further, you expressly understand and agree that the descriptions, designs, data and information furnished by BASF hereunder are provided gratis and BASF assumes no obligation or liability for the description, designs data and information given or results obtained, all such being given and accepted at your risk.

BASF Corporation, 1609 Biddle Avenue, Wyandotte, Michigan 48192 (800) 892-3111 x21, [www.basf.com/elastollan](http://www.basf.com/elastollan)

©BASF Corporation 2000

# BASF



4/6

2005年10月13日

台灣帝人化成(股)有限公司

パンライト試験成績表

拝啓 貴社ますますご清祥の事と、お慶び申し上げます。  
 平素は、パンライトをお引き立て賜り厚く御礼申し上げます。  
 さて、標記の件につきまして、下記の通りご報告いたします。

記

G R A D E : LN - 1250GCOLOR NO. : NAT項目：分子量測定

LOT NO.	Q'TY(KGS)	規格値	測定値	合否判定
H4605928	9,750	21,600±1000	21,630	OK

MFR測定


LOT NO.	Q'TY(KGS)	規格値	測定値	合否判定
H4605928	9,750	10.0±3.0%	11.5	OK



⊗ ⊗

## 鐵氟龍高頻同軸電纜線

FEP TEFLON Coaxial Cable

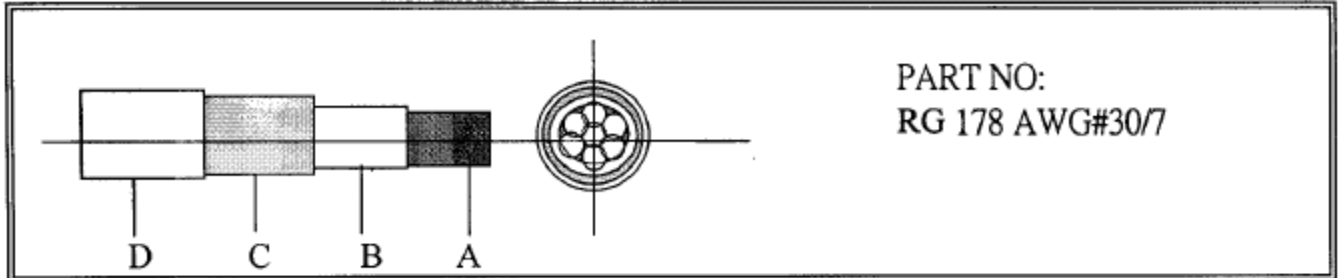

### SPECIFICATION

#### **A: CONDUCTOR**

Material	Silver Plated Copper
Stranding	7x0.102mm
Diameter	0.3mm

#### **B: INSULATION**

Material	FEP
Thickness	0.28mm
Diameter	0.86mm

#### **C: SHIELD**

Shield Type	Braid
Material	Silver Plated Copper
Coverage	95%
Diameter	1.3mm

#### **D: JACKET**

Material	FEP
Thickness	0.25mm
Overall Diameter	1.8mm

### MECHANICAL CHARACTERISTICS

Operating Temperature Range	-70°C ~ 200°C
Voltage	30V
Flame Test	UL-94

---

Tensile Strength	Insulation 2479PSI
	Jacket: 2867PSI
Elongation	Insulation 310%
	Jacket: 310%

### **ELECTRONICAL CHARACTERISTICS**

Nom. Impedance	50Ohms
Nom. Capacitance	29.0pF/ft
Nom. Velocity of Propagation	69%
Dielectric Strength	6KV 0.5mA/Minute
Spark Test	6KV
VSWR (0~6GHz)	Less 1.3
Attenuation (dB/M)	

Frequency(GHz)	Attenuation(dB/M)
1GHz	1.84
2GHz	2.82
3GHz	3.42
4GHz	4.10
5GHz	4.75
6GHz	5.35

銅管材質證明

東莞信泰隆五金制品有限公司  
SHIN TAY LONG FIVEMETAL PRODUCT CO.,LTD.

產品質量證明書



客戶:	豐茂材料公司		日期:	2007.8.12	
品名	規格	狀態	製造方法	數量	
H65		H			
化學成份	銅(Cu)	鐵(Fe)	鉛(pb)	鋅(Zn)	雜質
	64.878%	0.012%	0.014%	35.093%	0.003%
機械性能	抗拉強度 (不少於)	延伸率 (不少於)	直徑公差		



主管: 胡偉才

化驗員: 李國強



# SMA Specifications

---

## 1. Description:

The Connector is Reverse SMA join on the Antenna

## 2. Electrical Properties

2-1 Impedance.....	50 Ohms
2-2 Frequency Range.....	0~8 Ghz
2-3 SWR.....	1.1 (Max.)
2-4 Working Voltage.....	≤250 Vrms
2-5 Dielectric Withstanding Voltage.....	≤750 Vrms
2-6 Insulation Resistance.....	≥2000 Megohms
2-7 Contact Resistance.....	Center contact: 3.0 Milliohms (Max.) Outer contact: 2.5 Milliohms (Max.)
2-8 Insertion Loss.....	0.2 dB

## 3. Mechanical Properties :

3-1 Recommended coupling nut torque..	4.0 in.lbs.~8.8 in.lbs.
3-2 Coupling nut retention force.....	≥50 lbs.
3-3 Contact captivation axial.....	≥5 lbs.

## 4. Environmental Ratings

4-1 Operating Temperature.....	-65°C ~ +165°C
4-2 Thermal Shock.....	MIL-STD-202, Method 107, Condition B
4-3 Corrosion.....	MIL-STD-202, Method 101, Condition B
4-4 Shock.....	MIL-STD-202, Method 213, Condition I
4-5 Vibration.....	MIL-STD-202, Method 204, Condition D
4-6 Moisture Resistance.....	MIL-STD-202, Method 106

## 5. Material Specifications

5-1 Body.....	Brass Per JIS H3250 C3604 BD, Gold Plated Per MIL-G-45204
5-2 Contact.....	Beryllium Copper Per QQ-C-530, Gold Plated Per MIL-G-45204
5-3 Insulator.....	PTFE Fluorocarbon Per ASTM D 1710



慶陞工業股份有限公司

KINSUN INDUSTRIES INC.



桃園縣中壢市普忠路 211 巷 20 號

TEL : 886-3-4353551

FAX : 886-3-4353951

<http://www.kinsun.com>

e-mail: [info@kinsun.com](mailto:info@kinsun.com)

# SMA Test Report

Name: Ping

Date: 2004/5/3

N= 1	Au= 7.09 $\mu$ "	Ni= 186.2 $\mu$ "
N= 2	Au= 6.95 $\mu$ "	Ni= 131.5 $\mu$ "
N= 3	Au= 7.01 $\mu$ "	Ni= 117.6 $\mu$ "
N= 4	Au= 6.92 $\mu$ "	Ni= 177.8 $\mu$ "
N= 5	Au= 7.50 $\mu$ "	Ni= 209.6 $\mu$ "

## BLOCK RESULT

Product : Au / Ni / Cu

	Au	Ni
Mean Value.....X :	7.10 $\mu$ "	164.4 $\mu$ "
Meas. Time..... :	10 s	
Standard Dev. ....S :	0.241 $\mu$ "	38.7 $\mu$ "
C. O. V. [G].....V :	3.39 %	23.51 %
No of Readings.....n :	5	5
Range.....R :	0.60 $\mu$ "	92.1 $\mu$ "
Min. Readings..... :	6.90 $\mu$ "	117.4 $\mu$ "
Max. Readings..... :	7.51 $\mu$ "	209.6 $\mu$ "

Check : BEN

Test: jaff



慶陞工業股份有限公司

KINSUN INDUSTRIES INC.



桃園縣中壢市普忠路 211 巷 20 號

TEL : 886-3-4353551

FAX : 886-3-4353951

<http://www.kinsun.com>

e-mail: [info@kinsun.com](mailto:info@kinsun.com)

Name: Body

Date: 2001/12/13

N= 1	Au= 7.03 $\mu$ "	Ni= 164.5 $\mu$ "
N= 2	Au= 7.70 $\mu$ "	Ni= 208.8 $\mu$ "
N= 3	Au= 8.04 $\mu$ "	Ni= 210.8 $\mu$ "
N= 4	Au= 7.75 $\mu$ "	Ni= 204.6 $\mu$ "
N= 5	Au= 7.36 $\mu$ "	Ni= 210.4 $\mu$ "

BLOCK RESULT

Product : Au / Ni / Cu

	<u>Au</u>	<u>Ni</u>
Mean Value.....X :	7.61 $\mu$ "	199.7 $\mu$ "
Meas. Time..... : 10	s	
Standard Dev. ....S :	0.332 $\mu$ "	19.9 $\mu$ "
C. O. V. [G].....V :	4.36 %	9.96 %
No of Readings.....n :	5	5
Range.....R :	0.82 $\mu$ "	46.4 $\mu$ "
Min. Readings..... :	7.20 $\mu$ "	164.5 $\mu$ "
Max. Readings..... :	8.02 $\mu$ "	210.9 $\mu$ "

Check :

Test :



慶陞工業股份有限公司

KINSUN INDUSTRIES INC.



桃園縣中壢市普忠路 211 巷 20 號

TEL : 886-3-4353551

FAX : 886-3-4353951

<http://www.kinsun.com>

e-mail: [info@kinsun.com](mailto:info@kinsun.com)

# SMA Test Report

## 鹽水噴霧試驗記錄表

試驗日期：  
試驗號碼：  
試驗時間：08:00 ~ 18:00 共計10小時

### 試驗項目及內容

- 1 氯化鈉品質..... 工業用一般用鹽
- 2 蒸餾水品質..... 純水
- 3 外觀要求程度..... 10 (小時)
- 4 噴霧採取器：  
4.1 噴霧量..... 15.6 (ml/80cm/h)  
4.2 收集溶液在室的比重或濃度..... 1.0321  
4.3 酸鹼濃度..... 6.7
- 5 試樣：  
5.1 種類..... 銅材  
5.2 形狀..... N/A  
5.3 尺度..... N/A  
5.4 數目..... 5 pcs
- 6 壓縮空氣壓力..... 1.00 kg f/cm
- 7 試驗室相對濕度..... 90 %
- 8 試驗室溫度..... 35±1 °C
- 9 壓力桶溫度..... 47±1 °C
- 10 鹽水桶溫度..... 35±1 °C
- 11 其它..... 2~3 μ(Ni) ; 1.2 μ" (Au)

### 判定

1. 依據標準判定..... 符合 RN 8 級↑
2. 依其它方法判定..... N/A



慶陞工業股份有限公司

KINSUN INDUSTRIES INC.



桃園縣中壢市普忠路 211 巷 20 號

TEL : 886-3-4353551

FAX : 886-3-4353951

<http://www.kinsun.com>

e-mail: [infoa@kinsun.com](mailto:infoa@kinsun.com)



# SMA Brass

## 檢驗報告表

編號:

客 戶	工業股份有限公司		
品 名	FREE CUTTING BRASS ROD	丸 5.0 m/m	
規 格	JIS H3250 C3604 BD		
數 據 項 目	標 準 值	實 測 值	備 註
化 學 成 份 %	Cu	57.0 - 61.0	
	Pb	1.8 - 3.7	
	Fe	< 0.5	
	Sn+Fe	< 1.2	
	Zn	REMAINDER	
其 它			



慶陞工業股份有限公司

KINSUN INDUSTRIES INC.



桃園縣中壢市普忠路 211 巷 20 號

TEL : 886-3-4353551

FAX : 886-3-4353951

<http://www.kinsun.com>

e-mail: [infoa@kinsun.com](mailto:infoa@kinsun.com)

# SMA Beryllium Copper

## 线

线是种类最多的铍铜产品，没有任何产品在应用上有线这样广泛。

圆线之使用包括：

- 长行程螺旋弹簧
- 小型机电插座
- 冷锻钉头紧固件
- 弹簧负载测试探针
- 轻量耐疲劳线缆
- BANDOLIERED 连接器接点
- 编织屏蔽布
- 防腐及防生物恶臭海上线及筛网结构
- 眼镜框

线拉直切成一定长度称为杆 (ROD)。

线之断面也可以不是圆形，“异形”线在特殊的应用中担任了重要的角色，如扁线用于可收缩天线及电报电缆，扁线也可用于代替窄带，虽然有宽度对厚度的比，如果超过此比就不可行，但在许多情形下可达到节约。扁线可减少剪裁毛边。

方线用于电子接点，特别是线的包封需要尖锐的角时，可以达到可靠的接触。偶尔，方形及长方形的线，需要斜角以定向。这些需求及其他较不普遍的形状的铍铜线均可以达到。

本公司所供应之线直径自12.7mm至1.3mm，其公差如表所示。较细的线可以向本公司定单或从本公司之许多再制造商获得。

线可以退火态 (A) 或四分之一硬 (1/4H)、半硬 (1/2H) 或全硬 (H) 供应。但在特别情况下也供应预硬化 (亦称“预处理”) 线，本产品适用于各种强度与耐久性的产品，可达到柔软而严格的成型要求。

技术规格		
BRUSH 合金	UNS 编号	线材
25	C17200	ASTM B 197 QQ-C-530 AMS 4725 SAE J 461, SAE J 463 JIS H3270
M25	C17300	ASTM B 197 QQ-C-530
3	C17510	*
10	C17500	*

ASTM 美国材料试验学会  
 QQ 联邦规格  
 SAE 机动车辆工程师学会  
 AMS 太空材料规格 (SAE 刊载)  
 JIS 日本工业规格  
 DIN 德国工业规格

注：除另有规定外，材料均依 ASTM 标准制造。  
 \* 可获得此产品，技术规格在制定中。

公差 (毫米)			
线直径		BRUSH WELLMAN 标准公差 (+或-)	
以上	以下	冷拉	退火
1.27	— 2	0.008	0.025
2	— 3	0.01	0.05
3	— 6	0.015	0.05
6	— 8	0.02	0.05
8	— 10	0.025	0.05
10	— 12	0.025	0.05

注：非圆形之公差为直径公差的一半。



慶陞工業股份有限公司  
 KINSUN INDUSTRIES INC.



桃園縣中壢市普忠路 211 巷 20 號

TEL: 886-3-4353551

http://www.kinsun.com

FAX: 886-3-4353951

e-mail: infoa@kinsun.com

# SMA Beryllium Copper

鍍銅線之機械及電學性質

合金 Alloy	狀態 (* )	熱處理	線直徑 mm	抗拉強度 kg/mm <sup>2</sup>	屈服強度 kg/mm <sup>2</sup>	伸長百分比	導電百分比 IACS
25 C17200 和 M25 C17300	A (TB00)	-	1.3-12.7	42-55	14-22	30-60	15-19
	1/4H (TD01)	-	1.3-12.7	63-81	52-74	3-25	15-19
	1/2H (TD02)	-	1.3-12.7	77-95	63-88	2-15	15-19
	3/4H (TD03)	-	1.3-2.0	91-109	80-106	2-8	15-19
	H (TD04)	-	1.3-2.0	98-117	91-113	1-6	15-19
	AT (TF00)	3hr 315-330°C	1.3-12.7	112-141	101-127	3 以上	22-28
	1/4HT (TH01)	2hr 315-330°C	1.3-12.7	123-148	116-141	2 以上	22-28
	1/2HT (TH02)	1.5hr 315-330°C	1.3-12.7	130-152	119-148	2 以上	22-28
	3/4HT (TH03)	1hr 315-330°C	1.3-2.0	133-162	123-155	2 以上	22-28
	HT (TH04)	1hr 315-330°C	1.3-2.0	137-162	126-155	1 以上	22-28
3 C17510 和 10 C17500	A (TB00)	-	1.3-12.7	24-39	7-22	20-60	20-30
	H (TD04)	-	1.3-12.7	45-57	38-53	2-20	20-30
	AT (TF00)	3hr 480-495°C	1.3-12.7	70-92	56-78	10 以上	45-60
	HT (TH04)	3hr 480-495°C	1.3-12.7	77-99	66-88	10 以上	48-60

\* ASTM之字母及數碼表示的產品狀態



慶陞工業股份有限公司

KINSUN INDUSTRIES INC.



桃園縣中壢市普忠路211巷20號

TEL: 886-3-4353551

FAX: 886-3-4353951

<http://www.kinsun.com>

e-mail: [info@kinsun.com](mailto:info@kinsun.com)

# SMA PTFE

## APPENDIX

LEO ME PTFE rod is manufactured with virgin PTFE powder by ram extrusion or compression molding and is conformed to meet the requirement of ASTM 1710 (Standard Specification for TFE FLUOROCARBON ROD) described in following table and JIS K 6889 ( JAPANESE INDUSTRIAL STANDARD POLYTETRAFLUOROETHYLENE RODS).

TABLE 1 Detail Specification for PTFE Rod

ITEM	PROPERTY	ASTM TEST METHOD	VALUE
1	Specific gravity	D792	2.15-2.2
2	Tensile strength	D638	280-350 kg/cm <sup>2</sup>
3	Elongation	D638	200-400%
4	Dielectric strength	D149	30kV/mm
5	Deformation under load. 6.9Mpa, 50C, %	D621	3.5 - 6
6	Dissipation factor 1 KHz	D150	Less than 0.0005
7	Dielectric constant 1 KHz	D150	2.0 - 2.1
8	Volume resistivity	D257	> 10 <sup>16</sup>
9	Surface resistivity	D257	10 <sup>17</sup>
10	Flexural modulus	D790	430-500Mpa
11	Compressibility	D1147	16-20%
12	Hardness, durometer	D2240	D53 - D60
13	Impact strength	D256	16kg-cm/cm
14	Coefficient of linear thermal expansion, per C. 30C to 80C, 10 <sup>-5</sup> C	D696	12.3 to 11.6



慶陞工業股份有限公司

KINSUN INDUSTRIES INC.



桃園縣中壢市普忠路211巷20號

TEL: 886-3-4353551

<http://www.kinsun.com>

FAX: 886-3-4353951

e-mail: [info@kinsun.com](mailto:info@kinsun.com)

# SMA PTFE

## PROPERTY

Item	UNIT wt%	TEST METHOD (ASTM)	PTFE (NATURE)
Apparent density	g/lit	D-1457	260
Specific Gravity	g/cm <sup>3</sup>	D-792	2.18
Tensile Strength	kg/cm <sup>2</sup>	D-638	315
Elongation	%	D-638	400
Deformation (Total) MD	%     	D-621  (23°C 140 kg/m <sup>2</sup> )	—
60min. CD			—
24Hrs. CD			14.3
			16.7
Permanent Deformation MD CD			7.9
Deformation MD 60min. CD		150°C 200 kg/cm <sup>2</sup>	51.8
Flexural Strength (0.2% offset) CD	kg/cm <sup>2</sup>	D-790	57
Flexural Modulus CD			3,500 ~ 6,300
Compressive Strength (0.2% offset) MD CD	kg/cm <sup>2</sup>	D-695	77
Compressive Modulus MD CD			4,200
Hardness	Durometer "D"	D-2240	55
Impact Strength	kg-cm/cm	D-256	15.8
Coefficient of Thermal Conductivity	Kcal/m.hr.°C	Cenco Fitch	0.21
Coefficient of Linear Thermal Expansio 25~90°C MD	0.01m/°C	D-696	—
25~150°C CD			12.2
25~150°C MD			—
25~150°C CD			12.6
25~200°C MD			—
25~200°C CD			13.7
25~260°C MD	—		
25~260°C CD	16.4		
Water Adsorpuon	%	D-570	0
Coefficient of Friction(Dynamic)		P=7 kg/cm <sup>2</sup> V=0.5 m/sec	—
Coefficient of Friction(Static)		P=35 kg/cm <sup>2</sup>	0.05~0.08



慶陞工業股份有限公司

KINSUN INDUSTRIES INC.



桃園縣中壢市普忠路 211 巷 20 號

TEL : 886-3-4353551

FAX : 886-3-4353951

<http://www.kinsun.com>

e-mail: [info@kinsun.com](mailto:info@kinsun.com)

# SMA PTFE

## QUALITY CONTROL REPORT

We hereby state that the following material is in accordance with our specifications.

Date : November 6, 2001  
Product : ICI PTFE G201  
Lot No : FPIHRI 9001  
Contents : 25kg \* 35  
Ref No : HGKE - 01 - 1554

Inspection Item	Unit	Data	Test Method
Bulk density	g/L	465	ASTM D 4895
Standard specific gravity		2.174	ASTM D 4895
Particle size(Avg.)	µm	500	ASTM D 4895
Melting point	°C	329	ASTM D 4895
Extrusion pressure	MPa	69.7	Asahi method
Water content	mas %	0.001	ASTM D 4895

ASAHI GLASS FLUOROPOLYMERS CO., LTD.

*Tatsuya Higuchi*

Production Engineering Group  
Polymer Production Department  
Chemical Division



慶陞工業股份有限公司

KINSUN INDUSTRIES INC.



桃園縣中壢市普忠路 211 巷 20 號

TEL : 886-3-4353551

FAX : 886-3-4353951

<http://www.kinsun.com>

e-mail: [infoa@kinsun.com](mailto:infoa@kinsun.com)