

ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT

INTENTIONAL RADIATOR CERTIFICATION TO FCC PART 15 SUBPART C REQUIREMENT OF

Product Name:	2.4G wireless microphone
Brand Name:	N/A
Model No.:	NT201
Model Difference:	N/A
FCC ID:	WOUNT201
Report No.:	E2/2016/80043
Issue Date:	Oct. 11, 2016
FCC Rule Part:	§15.249
Prepared for:	NEATRON CORPORATION 5F., No.515, Sec. 3, Ming Chih

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Report No.: E2/2016/80043 Page: 2 of 43

VERIFICATION OF COMPLIANCE

NEATRON CORPORATION 5F., No.515, Sec. 3, Ming Chih

Applicant:



Revision History

Report Number	Revision	Description	Issue Date
E2/2016/80041	Rev.00	Initial creation of document	Oct. 11, 2016



Contents

1	GENI	ERAL INFORMATION	6
	1.1	Product Description	6
	1.2	Test Methodology of Applied Standards	7
	1.3	Test Facility	7
	1.4	Special Accessories	7
	1.5	Equipment Modifications	7
2	SYST	EM TEST CONFIGURATION	8
	2.1	EUT Configuration	8
	2.2	EUT Exercise	8
	2.3	Test Procedure	8
	2.4	Measurement Results Explanation Example	8
	2.5	Limitation	9
	2.6	Configuration of Tested System	11
3	SUM	MARY OF TEST RESULTS	12
4	DESC	CRIPTION OF TEST MODES	
	4.1	Operated in 2400 ~ 2483.5MHz Band	
	4.2	The Worst Test Modes and Channel Details	13
5	MEAS	SUREMENT UNCERTAINTY	14
6	CON	DUCTED EMISSION TEST	15
	6.1	Standard Applicable:	15
	6.2	Measurement Equipment Used:	15
	6.3	EUT Setup:	15
	6.4	Test SET-UP (Block Diagram of Configuration)	16
	6.5	Measurement Procedure:	16
	6.6	Measurement Result:	16
7	Radia	ated Emission Test	19
	7.1.	Measurement Procedure	19
	7.2.	Test SET-UP (Block Diagram of Configuration)	19
	7.3.	Measurement Equipment Used:	21
	7.4.	Field Strength Calculation	22
	7.5.	Measurement Result	23



20 dE	3 Bandwidth Measurement	40
8.1	Measurement Procedure	40
8.2	Test SET-UP (Block Diagram of Configuration)	40
8.3	Measurement Equipment Used:	40
8.4	Measurement Results:	40
Ante	nna Requirement	43
9.1	Standard Applicable:	43
9.2	Antenna Connected Construction:	43
	8.1 8.2 8.3 8.4 Antei 9.1	8.2 Test SET-UP (Block Diagram of Configuration)



GENERAL INFORMATION 1

1.1 Product Description

General:

Product Name:	2.4G wireless microphone		
Brand Name:	N/A		
Model No.:	NT201		
Model Difference:	N/A		
Hardware Version:	N/A		
Software Version:	N/A		
Operation Frequency:	2403MHz ~ 2478MHz		
Channel number:	32 channels		
Modulation Type:	FSK		
Power Supply:	3.7Vdc from Rechargeable Li-polymer Battery or 5V from USB cable		
Battery: Model No.: N/A , Supplier: N/A			
Antenna Designation:	Internal Antenna, Peak Gain: 0dBi		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Test Methodology of Applied Standards 1.2

FCC Part 15, Subpart C §15.249 ANSI C63.10:2013

Note:

All test items have been performed and record as per the above standards. 1.

1.3 **Test Facility**

SGS Taiwan Ltd. Electronics & Communication Laboratory No.2, Keji 1st Rd., Guishan District, Taoyuan City, Taiwan 333 (TAF code 0513)

FCC Registration Numbers are: 735305

1.4 Special Accessories

There are no special accessories used while test was conducted.

Equipment Modifications 1.5

There was no modification incorporated into the EUT.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only



SYSTEM TEST CONFIGURATION 2

EUT Configuration 2.1

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT Exercise

An engineering test mode (software/firmware) that applicant provided was utilized to manipulate the EUT into transmit, selection of the test channel, and modulation scheme.

Test Procedure 2.3

2.3.1 Conducted Emissions

The EUT is a placed on as turn table which is 0.8 m above ground plane. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz,. The CISPR Quasi-Peak and Average detector mode is employed according to §15.207. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.

2.3.2 Radiated Emissions

The EUT is a placed on as turn table. For emissions testing at or below 1 GHz, the table height shall be 80 cm above the reference ground plane. For emission measurements above 1 GHz, the table height shall be 1.5 m. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes and measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna.

Measurement Results Explanation Example 2.4

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuation factor between EUT conducted port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly EUT RF output level.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only



2.5 Limitation

(1) Conducted Emission

Conducted Emission Limits is as following.

Frequency	Conducted Limit (dBuV)		
(MHz)	Quasi-Peak	Average	
0.15 – 0.5	66 - 56	56 - 46	
0.5 – 5	56	46	
5 - 30	60	50	

(2) Radiated Emission

The field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following.

Frequency	Field strength of	Field strength of	Distance (m)
(MHz)	Fundamental	Fundamental Harmonics	
902 – 928	50 mV/m	500 uV/m	3
	(94dBuV/m)	(54dBuV/m)	
2400 - 2483.5	50 mV/m	500 uV/m	3
	(94dBuV/m)	(54dBuV/m)	
5725 – 5875	50 mV/m	500 uV/m	3
	(94dBuV/m)	(54dBuV/m)	
24.0 – 24.25 GHz	250 mV/m	2500 uV/m	3
	(107.95dBuV/m)	(67.95dBuV/m)	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



(3) Radiated Emission

Emission Radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50dB below the level of the fundamental or to the general radiated emission limits as below, whichever is the lesser attenuation.

Frequency (MHz)	Field strength µV/m	Distance (m)	Field strength at 3m dBµV/m
1.705-30	30	30	69.54
30-88	100	3	40
88-216	150	3	43.5
216-960	200	3	46
Above 960	500	3	54

(4) Radiated Emission

For frequencies above 1000MHz, the above field strength limits are based on average limits. The peak filed strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20dB under any condition of modulation.

1. Emission level in dBuV/m=20 log (uV/m) Re-

- 2. Measurement was performed at an antenna to the closed point of EUT mark: distance of meters.
 - 3. Only spurious frequency is permitted to locate within the Restricted Bands specified in provision of ξ 15.205 and RSS-Gen § 8.10
 - 4. Emission spurious frequency which appearing within the Restricted Bands specified in provision of *E*15.205 and RSS-Gen *S*8.10, then the general radiated emission limits in ξ 15.209 and RSS-Gen § 8.9 apply.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only




2.6 Configuration of Tested System

Fig. 2-1 Radiated Emission Configuration



Fig. 2-2 Conducted (Antenna Port) Configuration



Item	Equipment	Mfr/Brand	Mod- el/Type No.	Series No.	Data Cable	Power Cord
1.	2.4GHz Wireless Test Software	N/A	N/A	N/A	N/A	N/A
2.	DC Power Supply	Agilent	E3640A	MY52410006	N/A	Un-Shielded

Table 2-1 Equipment Used in Tested System

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



SUMMARY OF TEST RESULTS 3

FCC Rules	FCC Rules Description Of Test	
§15.207(a)	AC Power Line Conducted Emission	N/A
§15.249(a)(d)(e)	Radiated Emission	Compliant
§15.215(c)	20dB Bandwidth Measurement	Compliant

DESCRIPTION OF TEST MODES 4

4.1 Operated in 2400 ~ 2483.5MHz Band

32 channels are provided.

Channel	Frequency
0	2403, 2446
1	2405, 2450
2	2407, 2452
3	2409, 2454
4	2411, 2456
5	2413, 2458
6	2418, 2460
7	2420, 2462
8	2422, 2466
9	2424, 2468
10	2426, 2470
11	2428, 2474
12	2436, 2476
13	2438, 2478
14	2442, 2478
15	2432, 2472

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



4.2 The Worst Test Modes and Channel Details

- 1. The EUT has been tested under operating condition.
- 2. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

RADIATED EMISSION TEST:

RADIATED EMISSION TEST (BELOW 1 GHz)						
MODE	AVAILABLE CHANNEL	TESTED FREQUENCY	MODULATION	DATA RATE (Mbps)	ANTENNA PORT	
2.4G	0~15	2403, 2442, 2478	FHSS	N/A	MAIN	
	RADIATED	EMISSION TES	ST (ABOVE 1 GH	z)		
MODE	AVAILABLE CHANNEL	TESTED FREQUENCY	MODULATION	DATA RATE (Mbps)	ANTENNA PORT	
2.4G	0~15	2403, 2442, 2478	FHSS	N/A	MAIN	

Note:

The field strength of radiation emission was measured as EUT stand-up position (H mode) and lie down position (E1, E2 mode) for 2.4GHz Wireless Transmitter for channel Low, Mid and High, the worst case H position was reported.

ANTENNA PORT CONDUCTED MEASUREMENT:

	CONDUCTED TEST							
MODE	AVAILABLE CHANNEL	TESTED FREQUENCY	MODULATION	DATA RATE (Mbps)	ANTENNA PORT			
2.4G	0~15	2403, 2442, 2478	FHSS	N/A	MAIN			

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



MEASUREMENT UNCERTAINTY 5

Test Items	Uncertainty
AC Power Line Conducted Emission	+/- 2.586 dB
20dB & 99% Bandwidth	+/- 51.33 Hz
100 kHz Bandwidth Of Frequency Band Edges	+/- 0.84 dB
Temperature	+/- 0.65 °C
Humidity	+/- 4.6 %
DC / AC Power Source	DC= +/- 0.13%, AC= +/- 0.2%

Radiated Spurious Emission:

Measurement uncertainty (Polarization : Vertical)	9kHz – 30MHz: +/- 2.87 dB		
	30MHz - 180MHz: +/- 3.37dB		
	180MHz -417MHz: +/- 3.19dB		
	0.417GHz-1GHz: +/- 3.19dB		
	1GHz - 18GHz: +/- 4.04dB		
	18GHz - 40GHz: +/- 4.04dB		

	9kHz – 30MHz: +/- 2.87 dB
Magguramantungartaintu	30MHz - 167MHz: +/- 4.22dB
Measurement uncertainty (Polarization : Horizontal)	167MHz -500MHz: +/- 3.44dB
	0.5GHz-1GHz: +/- 3.39dB
	1GHz - 18GHz: +/- 4.08dB
	18GHz - 40GHz: +/- 4.08dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



CONDUCTED EMISSION TEST 6

6.1 **Standard Applicable:**

Frequency range within 150kHz to 30MHz shall not exceed the Limit table as below.

Frequency range	Limits Frequency range dB(uV)			
MHz	Quasi-peak	Average		
0.15 to 0.50	66 to 56	56 to 46		
0.50 to 5	56	46		
5 to 30	60	50		
Note				

1. The lower limit shall apply at the transition frequencies

2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

6.2 Measurement Equipment Used:

Conducted Emission Test Site								
EQUIPMENT MFR MODEL SERIAL LAST CAI								
TYPE		NUMBER	NUMBER	CAL.				
EMI Test Receiver	R&S	ESCI 7	100950	12/12/2015	12/11/2016			
Coaxial Cables	N/A	N30N30-1042-1 50cm	N/A	02/07/2016	02/06/2017			
LISN	Schwarzbeck	NSLK 8127	8127-648	03/11/2016	03/10/2017			
Test Software	Farad	EZ-EMC	Ver. SGS-03A2	N.C.R.	N.C.R.			


6.3 EUT Setup:

- 1. The conducted emission tests were performed in the test site, using the setup in accordance with the ANSI C63.10:2013.
- The AC/DC Power adaptor of EUT was plug-in LISN. The EUT was placed flushed with the rear of the table.
- 3. The LISN was connected with 120Vac/60Hz power source.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only



6.4 Test SET-UP (Block Diagram of Configuration)

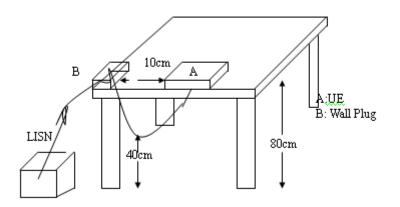

6.5 Measurement Procedure:

- 1. The EUT was placed on a table which is 0.8m above ground plane.
- 2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 3. Repeat above procedures until all phases of power being supplied by given UE are completed

6.6 Measurement Result:

Note: Refer to next page for measurement data and plots. Note2: The * reveals the worst-case results that closet to the limit

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



AC POWER LINE CONDUCTED EMISSION TEST DATA


Operation Mode: Operation mode Temperature: 20

Test Date: Sep. 05, 2016

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測试之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



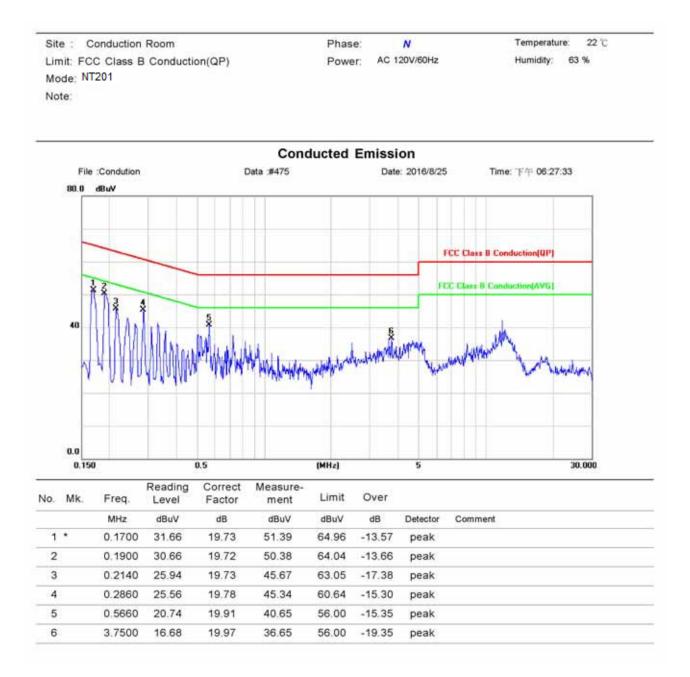

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is enproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-presence of this document is unlawful and offenders may be prosecuted to the fullest extent of the law pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號




Radiated Emission Test 7

7.1. Measurement Procedure

- The EUT was placed on a turn table with 0.8m for frequency< 1GHz and 1.5m for frequency> 1GHz above ground plane.
- Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- 4. Repeat above procedures until all frequency measured were complete.

7.2. Test SET-UP (Block Diagram of Configuration)

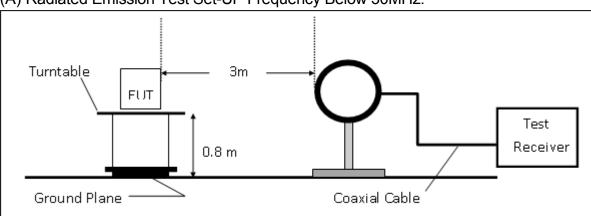


(A) Radiated Emission Test Set-UP Frequency Below 30MHz.


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only



(B) Radiated Emission Test Set-Up, Frequency form 30MHz to 1000MHz

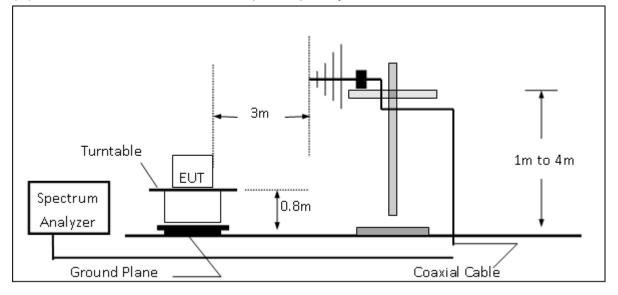

(C) Radiated Emission Test Set-UP Frequency Over 1 GHz

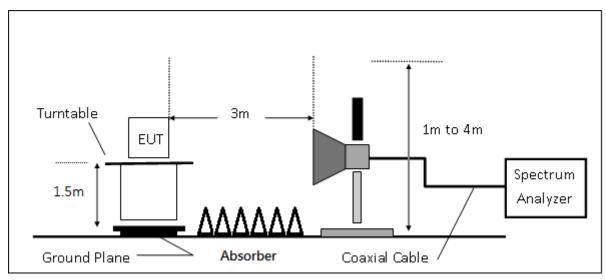

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有说明,此根告结果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-paragrace of this document is unavity and offenders may be prosecuted to the fullest extent of the law. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號



7.3. Measurement Equipment Used:

966 Chamber								
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.			
TYPE		NUMBER	NUMBER	CAL.				
EMI Test Receiver	R&S	ESU 40	100363	04/12/2016	04/11/2017			
Loop Antenna	ETS-Lindgren	6502	00143303	12/23/2015	12/22/2016			
Broadband Antenna	TESEQ	CBL 6112D	35240	10/28/2015	10/27/2016			
Horn Antenna	ETS-Lindgren	3117	00143272	12/16/2015	12/15/2016			
Horn Antenna	Schwarzbeck	BBHA9170	185	07/18/2016	07/17/2017			
Pre Amplifier	EMC Instruments	EMC330	980096	12/12/2015	12/11/2016			
Pre Amplifier	EMC Instruments	EMC0011830	980199	12/12/2015	12/11/2016			
Pre Amplifier	R&S	SCU-18	10204	12/12/2015	12/11/2016			
Pre Amplifier	R&S	SCU-26	100780	12/12/2015	12/11/2016			
Coaxial Cable	Huber+Suhner	RG 214/U	966Rx 9K-30M	12/12/2015	12/11/2016			
Coaxial Cable	Huber+Suhner	RG 214/U SUCOFLEX 104	966Rx 30M-3G	12/12/2015	12/11/2016			
Coaxial Cable	Huber+Suhner	SUCOFLEX 104	966Rx 1G-18G	12/12/2015	12/11/2016			
Coaxial Cable	Huber+Suhner	mini 141-12 SUCOFLEX 104	966Rx 18G-40G	12/12/2015	12/11/2016			
Coaxial Cable	Huber+Suhner	SUCOFLEX 104	966Tx 30M-18G	12/12/2015	12/11/2016			
Coaxial Cable	Huber+Suhner	SUCOFLEX 102	966Tx 18G-40G	12/12/2015	12/11/2016			
Attenuator	WOKEN	218FS-10	RF27	12/12/2015	12/11/2016			
Site NSA	SGS	966 Chamber C	SAC-C	03/04/2016	03/03/2017			
Site VSWR	SGS	966 Chamber C	SAC-C	03/04/2016	03/03/2017			
DC Power Supply	HOLA	DP-3003	D7070035	05/04/2016	05/03/2017			
Controller	MF	MF-7802	N/A	N.C.R.	N.C.R.			
Antenna Master	MF	N/A	N/A	N.C.R.	N.C.R.			
Turn Table	MF	N/A	N/A	N.C.R.	N.C.R.			
Test Software	World-Pallas	Dr. E	V 3.0 Lite	N.C.R.	N.C.R.			

Note: N.C.R refers to Not Calibrated Required

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測试之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



7.4. Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

FS = RA + AF + CL - AG

Where FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
RA = Reading Amplitude	AG = Amplifier Gain
AF = Antenna Factor	

Actual FS(dB μ V/m) = SPA. Reading level(dB μ V) + Factor(dB)

Factor(dB) = Antenna Factor(dBµV/m) + Cable Loss(dB) – Pre Amplifier Gain(dB)

"F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency. Note :

"E" : denotes Band Edge Frequency. ; "S" : denotes Spurious Frequency.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



7.5. Measurement Result

Radiated Spurious Emission Measurement Result

Operation Mode :	2.4G	Test Date :	2016/8/24
Fundamental Frequency :	2403 MHz	Temp. / Humi. :	22.7deg_C/57RH
Operation Band :	Main CH LOW	Test Engineer :	Tank
EUT Pol. :	E1	Measurement Antenna Pol. :	Vertical

Freq.	Note	Detector	Spectum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2403.51	F	Peak	105.08	-6.79	98.28	114	-15.72
2403.51	F	Average	52.85	-6.79	46.06	94	-47.94

Operation Mode :	2.4G	Test Date :	2016/8/24
Fundamental Frequency :	2403 MHz	Temp. / Humi. :	22.7deg_C/57RH
Operation Band :	Main CH LOW	Test Engineer :	Tank
EUT Pol. :	E1	Measurement Antenna Pol. :	Horizontal

Freq.	Note	Detector	Spectum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2403.56	F	Peak	114.02	-6.79	107.23	114	-6.77
2403.56	F	Average	54.56	-6.79	47.77	94	-46.23

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Operation Mode :	2.4G	Test Date :	2016/8/24
Fundamental Frequency :	2442 MHz	Temp. / Humi. :	22.7deg_C/57RH
Operation Band :	Main CH MID	Test Engineer :	Tank
EUT Pol. :	E1	Measurement Antenna Pol. :	Vertical

	Freq.	Note	Detector	Spectum	Factor	Actual	Limit	Margin
			Mode	Reading Level		FS	@3m	
_	MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
	2442.54	F	Peak	103.37	-6.59	96.78	114	-17.22
	2442.54	F	Average	52.51	-6.59	45.92	94	-48.08

Operation Mode :	2.4G	Test Date :	2016/8/24
Fundamental Frequency :	2442 MHz	Temp. / Humi. :	22.7deg_C/57RH
Operation Band :	Main CH MID	Test Engineer :	Tank
EUT Pol. :	E1	Measurement Antenna Pol. :	Horizontal

	Freq.	Note	Detector	Spectum	Factor	Actual	Limit	Margin
			Mode	Reading Level		FS	@3m	
-	MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
	2442.53	F	Peak	113.00	-6.59	106.41	114	-7.59
	2442.53	F	Average	54.47	-6.59	47.88	94	-46.12



Operation Mode :	2.4G	Test Date :	2016/9/2
Fundamental Frequency :	2478 MHz	Temp. / Humi. :	22.7deg_C/57RH
Operation Band :	Main CH HIGH	Test Engineer :	Tank
EUT Pol. :	E1	Measurement Antenna Pol. :	Vertical

	Freq.	Note	Detector	Spectum	Factor	Actual	Limit	Margin
			Mode	Reading Level		FS	@3m	
-	MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
	2477.95	F	Peak	104.55	-6.41	98.14	114	-15.86
	2477.95	F	Average	57.35	-6.41	50.94	94	-43.06

Operation Mode :	2.4G	Test Date :	2016/9/2
Fundamental Frequency :	2478 MHz	Temp. / Humi. :	22.7deg_C/57RH
Operation Band :	Main CH HIGH	Test Engineer :	Tank
EUT Pol. :	E1	Measurement Antenna Pol. :	Horizontal

Freq.	Note	Detector	Spectum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2477.47	F	Peak	112.25	-6.41	105.84	114	-8.16
2477.47	F	Average	58.61	-6.41	52.20	94	-41.80



Radiated Spurious Emission Measurement Result

Operation Mode :	2.4G	Test Date :	2016/9/2
Fundamental Frequency :	2403 MHz	Temp. / Humi. :	22.7deg_C/57RH
Operation Band :	BE CH LOW	Test Engineer :	Tank
EUT Pol. :	E1	Measurement Antenna Pol. :	Vertical

	Freq.	Note	Detector	Spectum	Factor	Actual	Limit	Margin
			Mode	Reading Level		FS	@3m	
_	MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
	2390.00	Е	Peak	53.84	-6.84	46.99	74	-27.01
	2390.00	Е	Average	40.52	-6.84	33.68	54	-20.32

Operation Mode :	2.4G	Test Date :	2016/9/2
Fundamental Frequency :	2403 MHz	Temp. / Humi. :	22.7deg_C/57RH
Operation Band :	BE CH LOW	Test Engineer :	Tank
EUT Pol. :	E1	Measurement Antenna Pol. :	Horizontal

Freq.	Note	Detector	Spectum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2390.00	Е	Peak	55.76	-6.84	48.92	74	-25.08
2390.00	Е	Average	40.97	-6.84	34.13	54	-19.87



Operation Mode :	2.4G	Test Date :	2016/9/2
Fundamental Frequency :	2478 MHz	Temp. / Humi. :	22.7deg_C/57RH
Operation Band :	BE CH HIGH	Test Engineer :	Tank
EUT Pol. :	E1	Measurement Antenna Pol. :	Vertical

	Freq.	Note	Detector	Spectum	Factor	Actual	Limit	Margin
			Mode	Reading Level		FS	@3m	
_	MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
	2483.50	Е	Peak	63.65	-6.38	57.27	74	-16.73
	2483.50	Е	Average	43.26	-6.38	36.88	54	-17.12


Operation Mode :	2.4G	Test Date :	2016/9/2
Fundamental Frequency :	2478 MHz	Temp. / Humi. :	22.7deg_C/57RH
Operation Band :	BE CH HIGH	Test Engineer :	Tank
EUT Pol. :	E1	Measurement Antenna Pol. :	Horizontal

Freq.	Note	Detector	Spectum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2483.50	Е	Peak	73.85	-6.38	67.47	74	-6.53
2483.50	Е	Average	45.20	-6.38	38.82	54	-15.18



Radiated Spurious Emission Measurement Result (Below 1GHz)

Operation Mode :	2.4G	Test Date :	2016/8/25
Fundamental Frequency :	2403 MHz	Temp. / Humi. :	22.7deg_C/57RH
Operation Band :	Tx CH Low	Test Engineer :	Tank
EUT Pol. :	E1	Measurement Antenna Pol. :	Vertical

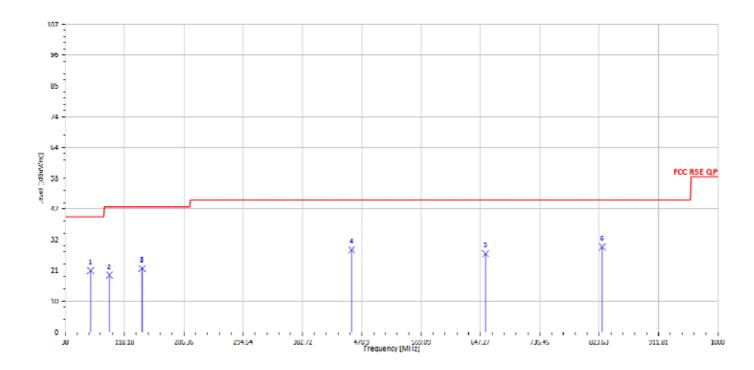


Freq.	Note	Detector	Spectum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
67.83	S	Peak	40.31	-19.03	21.28	40	-18.72
95.96	S	Peak	41.79	-22.03	19.76	43.5	-23.74
144.46	S	Peak	38.20	-16.17	22.02	43.5	-21.48
455.83	S	Peak	40.09	-11.53	28.56	46	-17.44
654.68	S	Peak	35.14	-8.00	27.14	46	-18.86
828.31	S	Peak	35.43	-5.92	29.51	46	-16.49

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有说明,此根告结果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-paragrace of this document is unavity and offenders may be prosecuted to the fullest extent of the law. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



2.4G	Test Date :	2016/8/25
2403 MHz	Temp. / Humi. :	22.7deg_C/57RH
Tx CH Low	Test Engineer :	Tank
E1	Measurement Antenna Pol. :	Horizontal
	2403 MHz Tx CH Low	2403 MHzTemp. / Humi. :Tx CH LowTest Engineer :

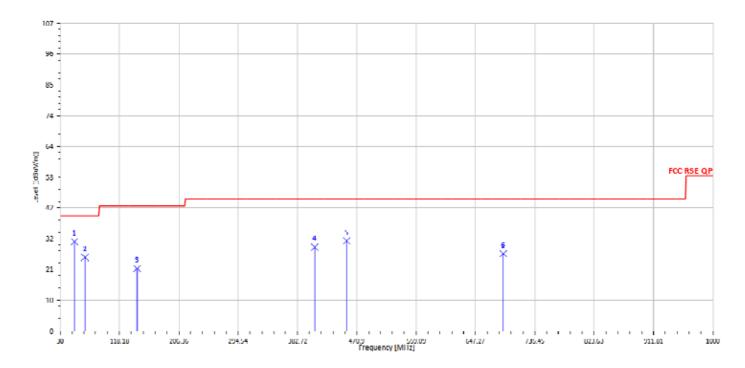


	Freq.	Note	Detector	Spectum	Factor	Actual	Limit	Margin
			Mode	Reading Level		FS	@3m	
_	MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
	51.34	S	Peak	48.33	-17.31	31.01	40	-8.99
	66.86	S	Peak	44.47	-18.90	25.57	40	-14.43
	144.46	S	Peak	37.84	-16.17	21.67	43.5	-21.83
	408.30	S	Peak	41.14	-12.05	29.09	46	-16.91
	455.83	S	Peak	42.82	-11.53	31.29	46	-14.71
	688.63	S	Peak	34.85	-8.01	26.84	46	-19.16

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測试之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Operation Mode :	2.4G	Test Date :	2016/8/25
Fundamental Frequency :	2442 MHz	Temp. / Humi. :	22.7deg_C/57RH
Operation Band :	Tx CH Mid	Test Engineer :	Tank
EUT Pol. :	E1	Measurement Antenna Pol. :	Vertical

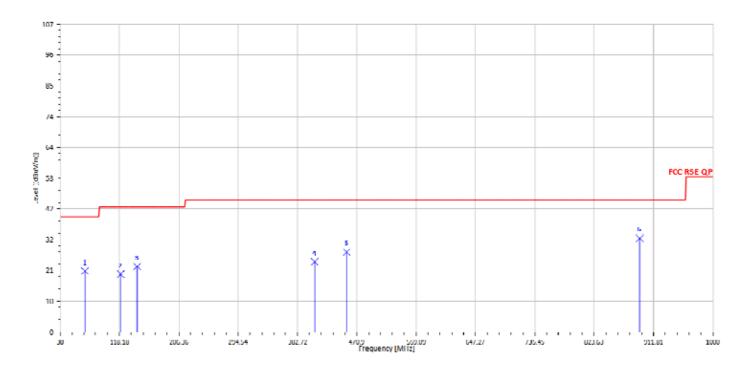


Freq.	Note	Detector	Spectum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
66.86	S	Peak	40.02	-18.90	21.11	40	-18.89
120.21	S	Peak	38.79	-18.70	20.09	43.5	-23.41
144.46	S	Peak	38.94	-16.17	22.77	43.5	-20.73
408.30	S	Peak	36.41	-12.05	24.36	46	-21.64
455.83	S	Peak	39.31	-11.53	27.78	46	-18.22
891.36	S	Peak	38.12	-5.57	32.56	46	-13.44

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測试之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Operation Mode :	2.4G	Test Date :	2016/8/25
Fundamental Frequency :	2442 MHz	Temp. / Humi. :	22.7deg_C/57RH
Operation Band :	Tx CH Mid	Test Engineer :	Tank
EUT Pol. :	E1	Measurement Antenna Pol. :	Horizontal

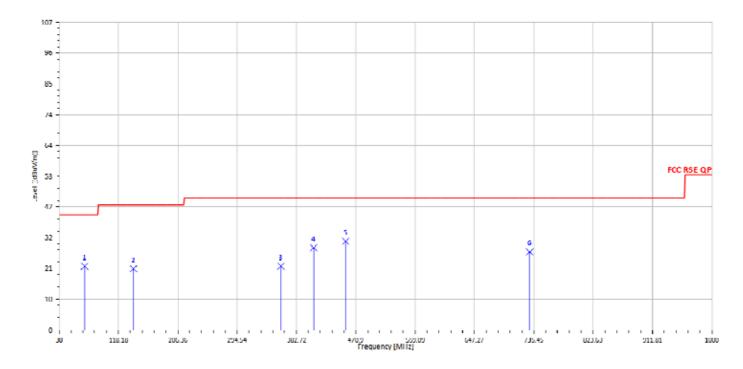


Freq.	Note	Detector	Spectum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
67.83	S	Peak	41.18	-19.03	22.15	40	-17.85
140.58	S	Peak	37.65	-16.42	21.23	43.5	-22.27
359.80	S	Peak	36.20	-14.03	22.18	46	-23.82
408.30	S	Peak	40.62	-12.05	28.57	46	-17.43
455.83	S	Peak	42.30	-11.53	30.77	46	-15.23
729.37	S	Peak	34.83	-7.72	27.11	46	-18.89

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測试之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Operation Mode :	2.4G	Test Date :	2016/8/25
Fundamental Frequency :	2478 MHz	Temp. / Humi. :	22.7deg_C/57RH
Operation Band :	Tx CH High	Test Engineer :	Tank
EUT Pol. :	E1	Measurement Antenna Pol.	: Vertical
107			

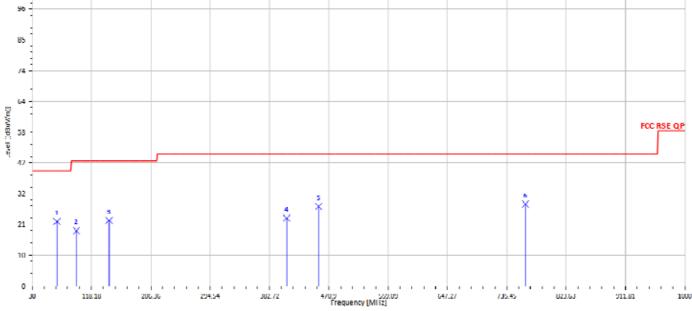


Freq.	Note	Detector	Spectum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
66.86	S	Peak	41.30	-18.90	22.39	40	-17.61
95.96	S	Peak	41.22	-22.03	19.19	43.5	-24.31
144.46	S	Peak	38.97	-16.17	22.79	43.5	-20.71
408.30	S	Peak	35.62	-12.05	23.57	46	-22.43
455.83	S	Peak	39.16	-11.53	27.63	46	-18.37
763.32	S	Peak	34.68	-6.24	28.44	46	-17.56

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測试之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Operation Mode :	2.4G	Test Date :	2016/8/25
Fundamental Frequency :	2478 MHz	Temp. / Humi. :	22.7deg_C/57RH
Operation Band :	Tx CH High	Test Engineer :	Tank
EUT Pol. :	E1	Measurement Antenna Pol. :	Horizontal

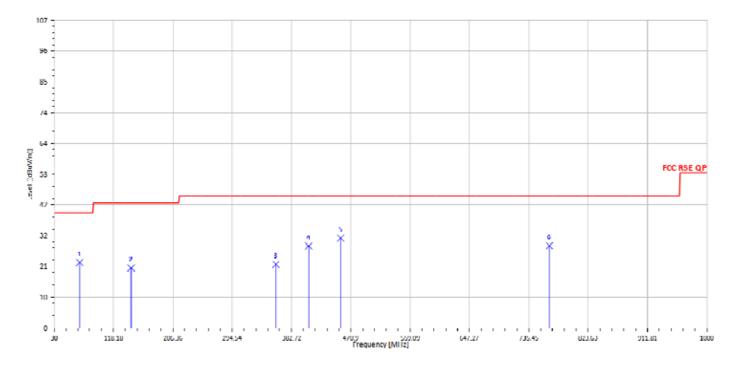


Freq.	Note	Detector	Spectum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
67.83	S	Peak	41.80	-19.03	22.76	40	-17.24
144.46	S	Peak	36.99	-16.17	20.81	43.5	-22.69
359.80	S	Peak	36.13	-14.03	22.10	46	-23.90
408.30	S	Peak	40.52	-12.05	28.47	46	-17.53
455.83	S	Peak	42.72	-11.53	31.19	46	-14.81
766.23	S	Peak	34.80	-6.26	28.54	46	-17.46

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測试之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Radiated Spurious Emission Measurement Result (Above 1GHz)

Operation Mode :	2.4G	Test Date :	2016/9/2
Fundamental Frequency :	2403 MHz	Temp. / Humi. :	22.7deg_C/57RH
Operation Band :	Tx CH LOW	Test Engineer :	Tank
EUT Pol. :	E1	Measurement Antenna Pol. :	Vertical

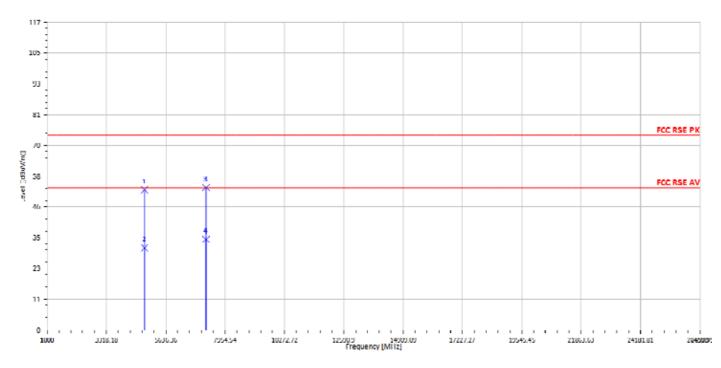


	Freq.	Note	Detector	Spectum	Factor	Actual	Limit	Margin
			Mode	Reading Level		FS	@3m	
_	MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
	4806.00	Н	Peak	54.39	-1.14	53.24	74	-20.76
	4806.00	Н	Average	32.31	-1.14	31.17	54	-22.83
	7209.00	Н	Peak	48.63	5.43	54.07	74	-19.93
	7209.00	Н	Average	28.94	5.43	34.37	54	-19.63

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




Operation Mode :	2.4G	Test Date :	2016/9/2
Fundamental Frequency :	2403 MHz	Temp. / Humi. :	22.7deg_C/57RH
Operation Band :	Tx CH LOW	Test Engineer :	Tank
EUT Pol. :	E1	Measurement Antenna Pol. :	Horizontal

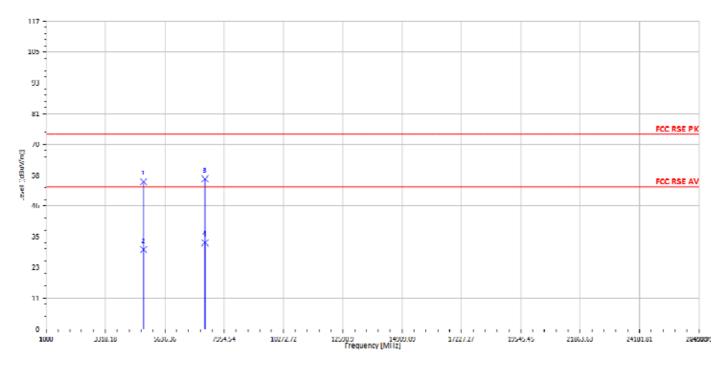

Freq.	Note	Detector	Spectum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
4806.00	Н	Peak	57.17	-1.14	56.03	74	-17.97
4806.00	Н	Average	31.31	-1.14	30.17	54	-23.83
7209.00	Н	Peak	51.62	5.43	57.06	74	-16.94
7209.00	Н	Average	27.28	5.43	32.71	54	-21.29




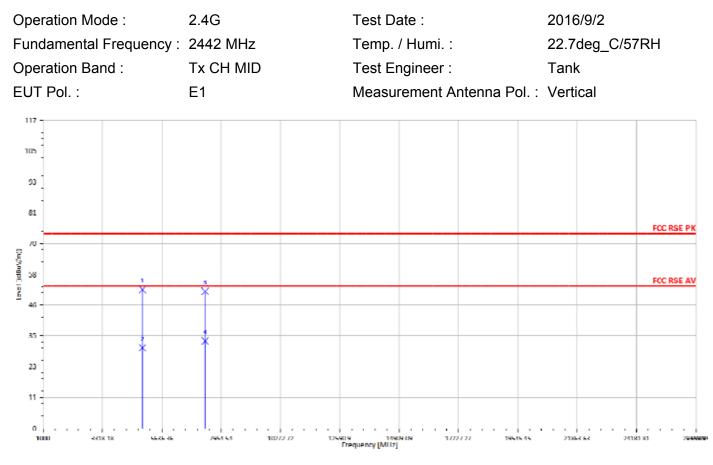

	Freq.	Note	Detector	Spectum	Factor	Actual	Limit	Margin
			Mode	Reading Level		FS	@3m	
-	MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
	4884.00	Н	Peak	53.36	-0.69	52.68	74	-21.32
	4884.00	Н	Average	31.31	-0.69	30.62	54	-23.38
	7326.00	Н	Peak	45.91	6.12	52.02	74	-21.98
	7326.00	Н	Average	27.04	6.12	33.16	54	-20.84




Operation Mode :	2.4G	Test Date :	2016/9/2
Fundamental Frequency :	2442 MHz	Temp. / Humi. :	22.7deg_C/57RH
Operation Band :	Tx CH MID	Test Engineer :	Tank
EUT Pol. :	E1	Measurement Antenna Pol. :	Horizontal

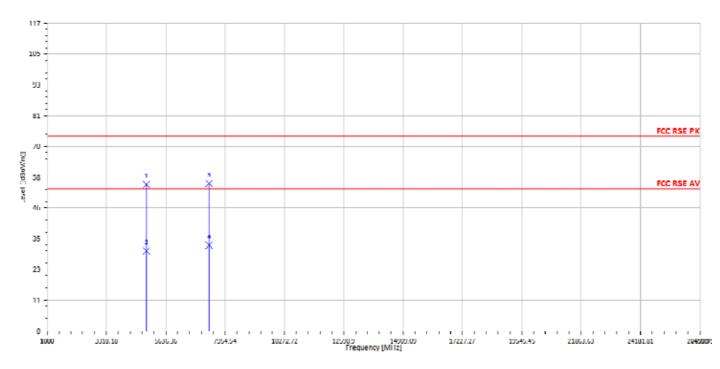

	Freq.	Note	Detector	Spectum	Factor	Actual	Limit	Margin
			Mode	Reading Level		FS	@3m	
_	MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
	4884.00	Н	Peak	56.39	-0.69	55.70	74	-18.30
	4884.00	Н	Average	31.12	-0.69	30.43	54	-23.57
	7326.00	Н	Peak	49.95	6.12	56.07	74	-17.93
	7326.00	Н	Average	26.41	6.12	32.53	54	-21.47




Operation Mode :	2.4G	Test Date :	2016/9/2
Fundamental Frequency :	2478 MHz	Temp. / Humi. :	22.7deg_C/57RH
Operation Band :	Tx CH HIGH	Test Engineer :	Tank
EUT Pol. :	E1	Measurement Antenna Pol. :	Vertical

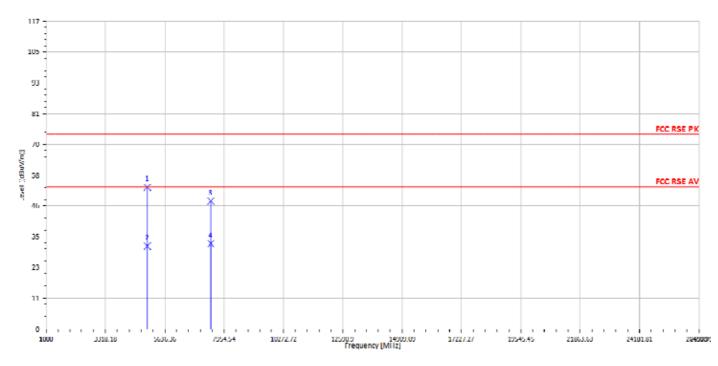

Freq.	Note	Detector	Spectum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
4956.00	Н	Peak	54.47	-0.65	53.82	74	-20.18
4956.00	Н	Average	32.08	-0.65	31.43	54	-22.57
7434.00	Н	Peak	42.42	6.19	48.61	74	-25.39
7434.00	Н	Average	26.22	6.19	32.41	54	-21.59



Operation Mode :	2.4G	Test Date :	2016/9/2
Fundamental Frequency :	2478 MHz	Temp. / Humi. :	22.7deg_C/57RH
Operation Band :	Tx CH HIGH	Test Engineer :	Tank
EUT Pol. :	E1	Measurement Antenna Pol. :	Horizontal

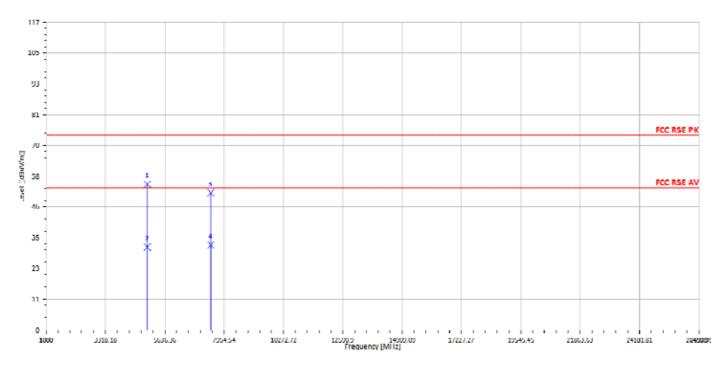

Freq.	Note	Detector	Spectum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
4956.00	Н	Peak	56.04	-0.65	55.39	74	-18.61
4956.00	Н	Average	32.11	-0.65	31.46	54	-22.54
7434.00	Н	Peak	45.92	6.19	52.11	74	-21.89
7434.00	Н	Average	26.09	6.19	32.28	54	-21.72



20 dB Bandwidth Measurement 8

8.1 Measurement Procedure

- The EUT was placed on a turn table which is 0.8m above ground plane. 1.
- Set ETU normal operating mode. 2.
- 3. Set SPA Center Frequency = fundamental frequency, RBW = 100kHz, VBW = 300kHz, Span = 5MHz.
- 4. Set SPA Max hold. Mark peak, -20dB.

8.2 Test SET-UP (Block Diagram of Configuration)

Refer to section 7.2 for the plot.

8.3 Measurement Equipment Used:

Conducted Emission Test Site							
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.		
ТҮРЕ		NUMBER	NUMBER	CAL.			
Spectrum Analyzer	KEYSIGHT	N9010A	MY54510568	04/14/2016	04/13/2017		
Power Meter	Anritsu	ML2496A	1326001	06/23/2016	06/22/2017		
Power Sensor	Anritsu	MA2411B	1315048	06/23/2016	06/22/2017		
Power Sensor	Anritsu	MA2411B	1315049	06/23/2016	06/22/2017		
Coaxial Cable 30cm	WOKEN	00100A1F1A195 C	RF01	12/12/2015	12/11/2016		
DC Block	PASTERNACK	PE8210	RF29	12/12/2015	12/11/2016		
Splitter	RF-LAMBAD	RFLT2W1G18G	RF35	12/12/2015	12/11/2016		
Attenuator	WOKEN	218FS-10	RF23	12/12/2015	12/11/2016		
DC Power Supply	Agilent	E3640A	MY53140006	05/04/2016	05/03/2017		

8.4 Measurement Results:

2.403GHz = 2.452MHz

2.442GHz = 2.347MHz


2.478GHz = 2.345MHz

Refer to attached data chart.


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only



20dB Bandwidth Test Plot (2.403GHz)

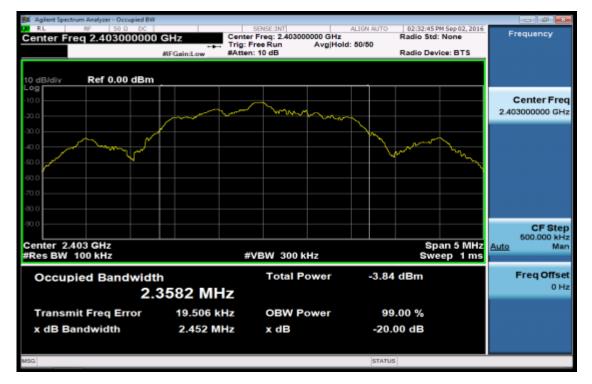


20dB Bandwidth Test Plot (2.442GHz)

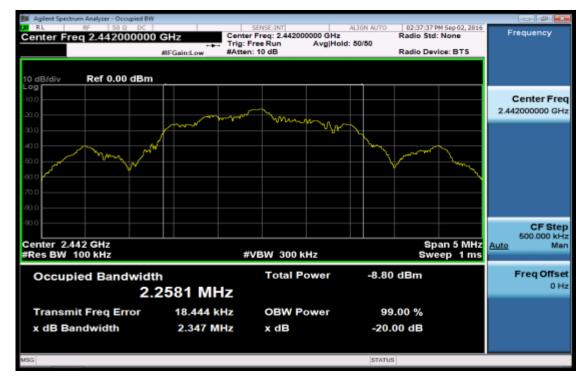

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



20dB Bandwidth Test Plot (2.478GHz)

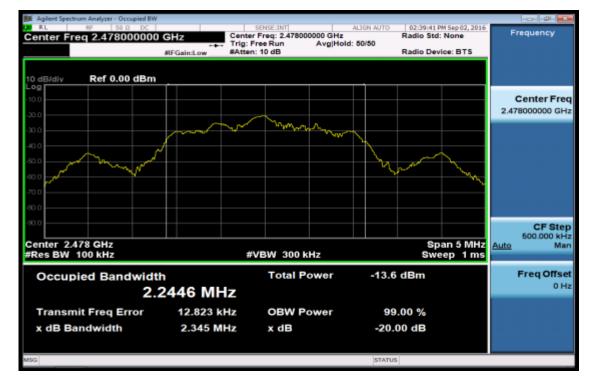

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Contentiones stated the results shown in this test report refer only to the sample(s) tested and static sample(s) are relative for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號



Antenna Requirement 9

9.1 **Standard Applicable:**

For intentional device, according to §15.203, an intentional radiator shall be designed to ensure that no antenna other than furnished by the responsible party shall be used with the device.

If the transmitting antenna is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi.

In case of point-to-point operation, the power shall be reduced by the one dB for every 3 dB that the directional gain of antenna exceeds 6dBi.

9.2 Antenna Connected Construction:

An embedded-in antenna design is used.

The antenna is designed as permanently attached and no consideration of replacement. Please see EUT photo and antenna spec. for details.

The antenna gain is less than 6dBi. Therefore, it is not necessary to reduce maximum output power limit.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.