

Applicant: Shenzhen SQT Electronics Co.,Ltd

Product: BT+wireless dual-mode Keyboard

Model No.: Candy Pro, SMK-646M3DM, SMK-646M2DM,

SMK-646M4DM, SMK-646386DM, SMK-646385DM,

SK-646DM

Trademark: GEEZER, MOFII

Test Standards: FCC Part 15.249

Test result:

It is herewith confirmed and found to comply with the

requirements set up by ANSI C63.10 & FCC Part 15 Subpart C,

Paragraph 15.249 regulations for the evaluation of

electromagnetic compatibility

Approved By

Terry Tang Manager

Dated: August 25, 2023


Results appearing herein relate only to the sample tested

The technical reports is issued errors and omissions exempt and is subject to withdrawal at

SHENZHEN TIMEWAY TESTING LABORATORIES

Zone C, 1st Floor, Block B, Jun Xiang Da Building, Zhongshan Park Road West, Tong Le Village, Nanshan District, Shenzhen, China

Tel (755) 83448688, Fax (755) 83442996, E-Mail:info@timeway-lab.com



Report No.: TW2308077-02E Page 2 of 32

Date: 2023-08-25



Special Statement:

FCC-Registration No.: 744189

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 744189.

Industry Canada (IC) — Registration No.:5205A

The EMC Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 5205A.

A2LA (Certification Number:5013.01)

The EMC Laboratory has been accredited by the American Association for Laboratory Accreditation (A2LA). Certification Number:5013.01

Date: 2023-08-25



Test Report Conclusion

Content

| 1.0 | General Details | 4 |
|------|------------------------------------|----|
| 1.1 | Test Lab Details | 4 |
| 1.2 | Applicant Details | 4 |
| 1.3 | Description of EUT | 4 |
| 1.4 | Submitted Sample | 4 |
| 1.5 | Test Duration. | 5 |
| 1.6 | Test Uncertainty | 5 |
| 1.7 | Test By | 5 |
| 2.0 | List of Measurement Equipment | 6 |
| 3.0 | Technical Details | 7 |
| 3.1 | Summary of Test Results | 7 |
| 3.2 | Test Standards | 7 |
| 4.0 | EUT Modification | 7 |
| 5.0 | Power Line Conducted Emission Test | 8 |
| 5.1 | Schematics of the Test. | 8 |
| 5.2 | Test Method and Test Procedure | 8 |
| 5.3 | Configuration of the EUT | 8 |
| 5.4 | EUT Operating Condition | 9 |
| 5.5 | Conducted Emission Limit. | 9 |
| 5.6 | Test Result | 9 |
| 6.0 | Radiated Emission test | 12 |
| 6.1 | Test Method and Test Procedure | 12 |
| 6.2 | Configuration of the EUT | 13 |
| 6.3 | EUT Operation Condition. | 13 |
| 6.4 | Radiated Emission Limit | 13 |
| 6.5 | Test Result | 15 |
| 7.0 | Band Edge | 23 |
| 7.1 | Test Method and Test Procedure. | 23 |
| 7.2 | Radiated Test Setup. | 23 |
| 7.3 | Configuration of the EUT | 23 |
| 7.4 | EUT Operating Condition. | 23 |
| 7.5 | Band Edge Limit. | 23 |
| 7.6 | Band Edge Test Result. | 24 |
| 8.0 | Antenna Requirement | 28 |
| 9.0 | 20dB bandwidth measurement | 29 |
| 10.0 | FCC ID Label | 39 |
| 11.0 | Photo of Test Setup and EUT View | 40 |

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Date: 2023-08-25



1.0 General Details

1.1 Test Lab Details

Name: SHENZHEN TIMEWAY TESTING LABORATORIES.

Address: Zone C, 1st Floor, Block B, Jun Xiang Da Building, Zhongshan Park Road West, Tong Le

Village, Nanshan District, Shenzhen, China

Telephone: (755) 83448688 Fax: (755) 83442996

Site on File with the Federal Communications Commission – United Sates

Registration Number: 744189 For 3m Anechoic Chamber

1.2 Applicant Details

Applicant: Shenzhen SQT Electronics Co.,Ltd

Address: ZhengChengFeng TechnologyZone Xinsha Road,ShaYi Village, Sha jing Town, Baoan Area,

Shenzhen, China

Telephone: 0755-27568078 Fax: 0755-27568223

1.3 Description of EUT

Product: BT+wireless dual-mode Keyboard
Manufacturer: Shenzhen SQT Electronics Co.,Ltd

Address: ZhengChengFeng TechnologyZone Xinsha Road,ShaYi Village, Sha jing Town,

Baoan Area, Shenzhen, China

Trademark: GEEZER, MOFII

Model Number: Candy Pro

Additional Model SMK-646M3DM, SMK-646M2DM, SMK-646M4DM, SMK-646386DM,

Name: SMK-646385DM

Rating: DC3.0V

Battery: DC3.0V (2pcs AAA batteries)
Modulation Type: GFSK (Bluetooth Low Energy)

Operation Frequency: 2402-2480MHz

Channel Separate: 2MHz
Channel Number: 40

Hardware Version: XZR-SK646-V1.0

Software Version: YC1026 SK646 20230601 Candy Pro BT

Serial No.: SMK646M3D230600297

Antenna Designation PCB Printed Antenna with gain -0.93dBi Max (Get from the antenna specification)

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No.: TW2308077-02E Page 5 of 32

Date: 2023-08-25



1.4 Submitted Sample: 2 Samples

1.5 Test Duration 2023-08-03 to 2023-08-25

1.6 Test Uncertainty

Conducted Emissions Uncertainty =3.6dB

Radiated Emissions below 1GHz Uncertainty =4.7dB

Radiated Emissions above 1GHz Uncertainty =6.0dB

Conducted Power Uncertainty = 6.0dB

Occupied Channel Bandwidth Uncertainty = 5%

Conducted Emissions Uncertainty = 3.6dB

Note: The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.

1.7 Test Engineer

The sample tested by

Print Name: Andy Xing

Page 6 of 32

Report No.: TW2308077-02E

Date: 2023-08-25



| 2.0 Test Equipment | | | | | |
|--------------------|--------------|------------------|--------------|--------------|------------|
| Instrument Type | Manufacturer | Model | Serial No. | Date of Cal. | Due Date |
| ESPI Test Receiver | R&S | ESPI 3 | 100379 | 2023-07-14 | 2024-07-13 |
| LISN | R&S | EZH3-Z5 | 100294 | 2023-07-14 | 2024-07-13 |
| LISN | R&S | EZH3-Z5 | 100253 | 2023-07-14 | 2024-07-13 |
| Impuls-Begrenzer | R&S | ESH3-Z2 | 100281 | 2023-07-14 | 2024-07-13 |
| Loop Antenna | EMCO | 6507 | 00078608 | 2022-07-18 | 2025-07-17 |
| Spectrum | R&S | FSIQ26 | 100292 | 2023-07-14 | 2024-07-13 |
| Horn Antenna | A-INFO | LB-180400-KF | J211060660 | 2022-07-18 | 2025-07-17 |
| Horn Antenna | R&S | BBHA 9120D | 9120D-631 | 2022-07-18 | 2024-07-17 |
| Power meter | Anritsu | ML2487A | 6K00003613 | 2023-07-14 | 2024-07-13 |
| Power sensor | Anritsu | MA2491A | 32263 | 2023-07-14 | 2024-07-13 |
| Bilog Antenna | Schwarebeck | VULB9163 | 9163/340 | 2022-07-18 | 2025-07-17 |
| 9*6*6 Anechoic | | | N/A | 2022-07-26 | 2025-07-25 |
| EMI Test Receiver | RS | ESVB | 826156/011 | 2023-07-14 | 2024-07-13 |
| EMI Test Receiver | RS | ESCS 30 | 834115/006 | 2023-07-14 | 2024-07-13 |
| Spectrum | HP/Agilent | E4407B | MY50441392 | 2023-07-14 | 2024-07-13 |
| Spectrum | RS | FSP | 1164.4391.38 | 2023-07-14 | 2024-07-13 |
| RF Cable | Zhengdi | ZT26-NJ-NJ-8M/FA | | 2023-07-14 | 2024-07-13 |
| RF Cable | Zhengdi | 7m | | 2023-07-14 | 2024-07-13 |
| Pre-Amplifier | Schwarebeck | BBV9743 | #218 | 2023-07-14 | 2024-07-13 |
| Pre-Amplifier | HP/Agilent | 8449B | 3008A00160 | 2023-07-14 | 2024-07-13 |
| LISN | SCHAFFNER | NNB42 | 00012 | 2023-07-14 | 2024-07-13 |
| ESPI Test Receiver | R&S | ESPI 3 | 100379 | 2023-07-14 | 2024-07-13 |
| LISN | R&S | EZH3-Z5 | 100294 | 2023-07-14 | 2024-07-13 |

2.2 Automation Test Software

For Conducted Emission Test

| Name | Version |
|--------|-------------------|
| EZ-EMC | Ver.EMC-CON 3A1.1 |

For Radiated Emissions

| Name | Version | |
|---|---------|--|
| EMI Test Software BL410-EV18.91 | V18.905 | |
| EMI Test Software BL410-EV18.806 High Frequency | V18.06 | |

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 7 of 32

Report No.: TW2308077-02E

Date: 2023-08-25



3.0 Technical Details

3.1 Summary of test results

| Standard | Test Type | Result | Notes |
|---|-------------------------------------|--------|----------|
| FCC Part 15, Paragraph 15.203 | Antenna Requirement | Pass | Complies |
| FCC Part 15, Paragraph 15.207 | Conducted Emission Test | N/A | N/A |
| FCC Part 15 Subpart C Paragraph 15.249(a) & 15.249(b) Limit | Field Strength of Fundamental | Pass | Complies |
| FCC Part 15, Paragraph 15.209 | Radiated Emission Test | Pass | Complies |
| FCC Part 15 Subpart C Paragraph 15.249(d) Limit | Band Edge Test | Pass | Complies |
| FCC Part 15.215(c) | 20dB bandwidth | Pass | Complies |

3.2 Test Standards

FCC Part 15 Subpart C, Paragraph 15.249, ANSI C63.4:2014 and ANSI C63.10:2013

4.0 EUT Modification


No modification by SHENZHEN TIMEWAY TESTING LABORATORIES

Date: 2023-08-25



5.0 Power Line Conducted Emission Test

5.1 Schematics of the test

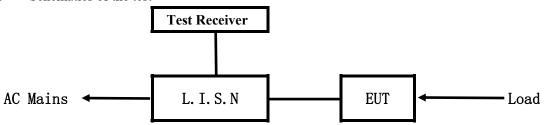


EUT: Equipment Under Test

5.2 Test Method and test Procedure

The EUT was tested according to ANSI C63.10-2013. The Frequency spectrum from 0.15MHz to 30MHz was investigated. The LISN used was 50ohm/50uH as specified by section 5.1 of ANSI C63.10-2013.

Test Voltage: N/A

Block diagram of Test setup

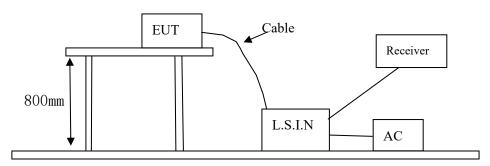

5.3 Configuration of the EUT

The EUT was configured according to ANSI C63.10-2013. All interface ports were connected to the appropriate peripherals. All peripherals and cables are listed below.

40 channels are provided to the EUT

A. EUT

| Device | Manufacturer | Model | FCC ID |
|--------------------------------|-------------------------------------|--|--------------|
| BT+wireless dual-mode Keyboard | Shenzhen SQT Electronics Co.,Ltd | Candy Pro, SMK-646M3DM, SMK-646M2DM, SMK-646M4DM, SMK-646386DM, SMK-646385DM | WOX-SK-646DM |

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Report No.: TW2308077-02E Page 9 of 32

Date: 2023-08-25



B. Internal Device

| Device | Manufacturer | Model | FCC ID/DOC |
|--------|--------------|-------|------------|
| N/A | | | |

C. Peripherals

| Device | Manufacturer | Model | Rating |
|--------|--------------|-------|--------|
| N/A | | | |

5.4 EUT Operating Condition

Operating condition is according to ANSI C63.10-2013

- A Setup the EUT and simulators as shown on follow
- B Enable AF signal and confirm EUT active to normal condition

5.5 Power line conducted Emission Limit according to Paragraph 15.207

| Frequency | Limits (dB µ V) | | |
|------------------|------------------|---------------|--|
| (MHz) | Quasi-peak Level | Average Level | |
| $0.15 \sim 0.50$ | 66.0~56.0* | 56.0~46.0* | |
| $0.50 \sim 5.00$ | 56.0 | 46.0 | |
| 5.00 ~ 30.00 | 60.0 | 50.0 | |

Notes: 1. *Decreasing linearly with logarithm of frequency.

2. The tighter limit shall apply at the transition frequencies

5.6 Test Results: N/A

Note: EUT powered by AAA battery, this test item not application

Date: 2023-08-25



6 Radiated Emission Test

- 6.1 Test Method and test Procedure:
- (1) The EUT was tested according to ANSI C63.10-2013. The radiated test was performed at Timeway EMC Laboratory. This site is on file with the FCC laboratory division, Registration No. 744189
- (2) The EUT, peripherals were put on the turntable which table size is 1m x 1.5 m, table high 0.8 m. All set up is according to ANSI C63.10-2013.
- (3) The frequency spectrum from 9kHz to 25 GHz was investigated. The frequency spectrum is set as follows:


| Frequency | Detector | RBW | VBW | Value |
|--------------|-----------------------|-------|--------|------------|
| 9KHz-150KHz | Quasi-peak | 200Hz | 600Hz | Quasi-peak |
| 150KHz-30MHz | Quasi-peak | 9KHz | 30KHz | Quasi-peak |
| 30MHz-1GHz | 30MHz-1GHz Quasi-peak | | 300KHz | Quasi-peak |
| Above 1GHz | Peak | 1MHz | 3MHz | Peak |
| ADOVE IGHZ | Peak | 1MHz | 10Hz | Average |

(Note: for Fundamental frequency radiated emission measurement, RBW=3MHz, VBW=10MHz). Measurements were made at 3 meters.

- (4) The antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency.
- (5) The antenna polarization: Vertical polarization and Horizontal polarization.

Block diagram of Test setup


For radiated emissions from 9kHz to 30MHz

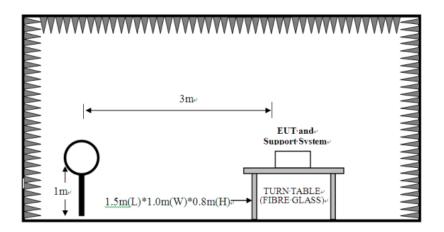


Date: 2023-08-25



For radiated emissions from 30MHz to1GHz

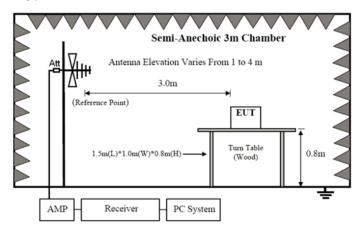

For radiated emissions above 1GHz

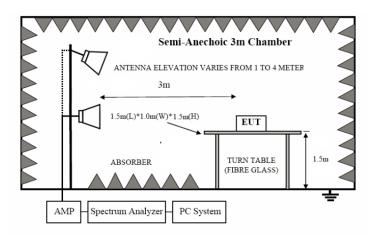

- 6.2 Configuration of the EUT
 Same as section 5.3 of this report
- 6.3 EUT Operating Condition

 Same as section 5.4 of this report.
- 6.4 Radiated Emission Limit

All emission from a digital device, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strength specified below:

A FCC Part 15 Subpart C Paragraph 15.249(a) Limit

| Fundamental Frequency | Field Strength of Fundamental (3m) | | Field Strength of Harmonics (3m) | | |
|-----------------------|------------------------------------|--------|----------------------------------|--------|--|
| (MHz) | mV/m | dBuV/m | uV/m | dBuV/m | |

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No.: TW2308077-02E Page 12 of 32

Date: 2023-08-25



| 2400-2483.5 | 50 | 94 (Average) | 114 (Peak) | 500 | 54 (Average) | 74 (Peak) |
|-------------|----|--------------|-------------------------|-----|--------------|------------------------|
| ZT00-ZT03.3 | 50 | JT (Average) | 11 7 (1 cak) | 500 | J+ (Average) | / T (1 Cak) |

Note:

- 1. RF Field Strength (dBuV) = 20 log RF Voltage (uV)
- 2.Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.
- 3. The emission limit in this paragraph is based on measurement instrumentation employing an average detector.

B. Frequencies in restricted band are complied to limit on Paragraph 15.209.

| | <u>.</u> | 9 1 |
|-----------------------|--------------|-----------------------------------|
| Frequency Range (MHz) | Distance (m) | Field strength (dB μ V/m) |
| 0.009-0.490 | 3 | 20log(2400/F(kHz)) +40log (300/3) |
| 0.490-1.705 | 3 | 20log(24000/F(kHz)) +40log (30/3) |
| 1.705-30 | 3 | 69.5 |
| 30-80 | 3 | 40.0 |
| 88-216 | 3 | 43.5 |
| 216-960 | 3 | 46.0 |
| Above 960 | 3 | 54.0 |

Note:

- 1. RF Voltage (dBuV) = 20 log RF Voltage (uV)
- 2. In the Above Table, the tighter limit applies at the band edges.
- 3. Distance refers to the distance in meters between the measuring instrument antenna and the EUT
- 4. All scanning using PK detector. And the final emission level was get using QP detector for frequency range from 30-1000MHz.As to 1G-25G, the final emission level got using PK. For fundamental measurement, PK detector used.
- 5. New battery was used during the test.

Report No.: TW2308077-02E Page 13 of 32

Date: 2023-08-25




6.5 Test result

A Fundamental & Harmonics Radiated Emission Data

Please refer to the following test plots for details: Low Channel-2402MHz

Horizontal

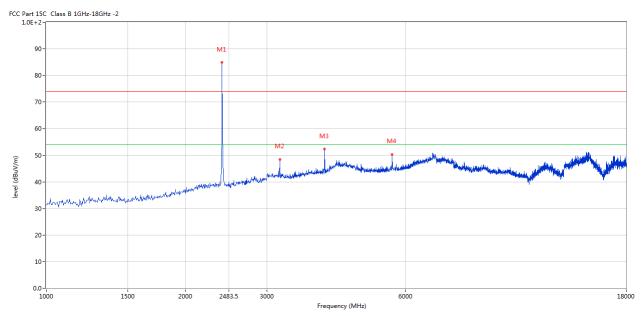


| No. | Frequency | Results | Factor | Limit | Over Limit | Detector | Table | Height | ANT | Verdict |
|-----|-----------|----------|--------|----------|------------|----------|--------|--------|------------|---------|
| | (MHz) | (dBuV/m) | (dB) | (dBuV/m) | (dB) | | (o) | (cm) | | |
| 1 | 2402 | 85.10 | -3.57 | 114.0 | -28.90 | Peak | 242.00 | 100 | Horizontal | Pass |
| 2 | 3200.950 | 48.48 | -1.97 | 74.0 | -25.52 | Peak | 335.00 | 100 | Horizontal | Pass |
| 3 | 4003.999 | 53.38 | 1.21 | 74.0 | -19.62 | Peak | 279.00 | 100 | Horizontal | Pass |
| 4 | 5605.849 | 50.29 | 3.92 | 74.0 | -23.71 | Peak | 360.00 | 100 | Horizontal | Pass |

Report No.: TW2308077-02E Page 14 of 32

Date: 2023-08-25



Vertical

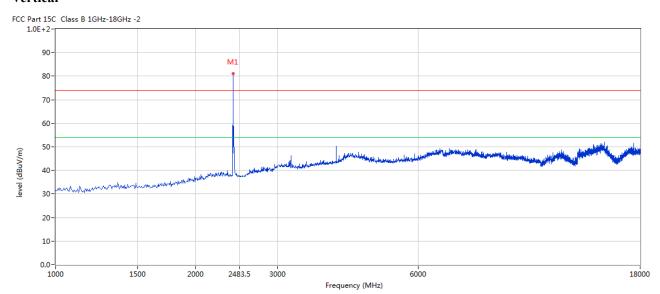

| No. | Frequency | Results | Factor | Limit | Over Limit | Detector | Table (o) | Height | ANT | Verdict |
|-----|-----------|----------|--------|----------|------------|----------|-----------|--------|----------|---------|
| | (MHz) | (dBuV/m) | (dB) | (dBuV/m) | (dB) | | | (cm) | | |
| 1 | 2402 | 81.12 | -3.57 | 114.0 | -32.88 | Peak | 59.00 | 100 | Vertical | Pass |


Report No.: TW2308077-02E Page 15 of 32

Date: 2023-08-25



Please refer to the following test plots for details: Middle Channel-2440MHz

Horizontal

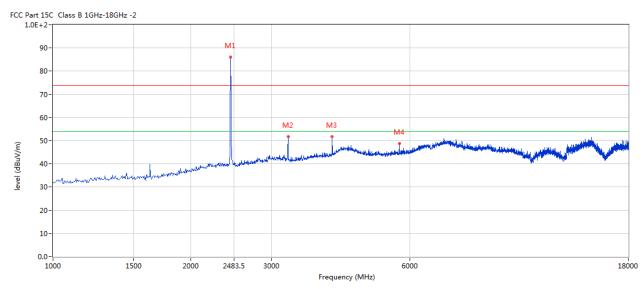


| No. | Frequency | Results | Factor | Limit | Over Limit | Detector | Table | Height | ANT | Verdict |
|-----|-----------|----------|--------|----------|------------|----------|--------|--------|------------|---------|
| | (MHz) | (dBuV/m) | (dB) | (dBuV/m) | (dB) | | (o) | (cm) | | |
| 1 | 2440 | 86.08 | -3.57 | 114.0 | -27.92 | Peak | 200.00 | 100 | Horizontal | Pass |
| 2 | 3256.186 | 51.69 | -2.05 | 74.0 | -22.31 | Peak | 359.00 | 100 | Horizontal | Pass |
| 3 | 4067.733 | 51.78 | 1.34 | 74.0 | -22.22 | Peak | 284.00 | 100 | Horizontal | Pass |
| 4 | 5695.076 | 48.75 | 3.83 | 74.0 | -25.25 | Peak | 340.00 | 100 | Horizontal | Pass |

Report No.: TW2308077-02E Page 16 of 32

Date: 2023-08-25



Vertical

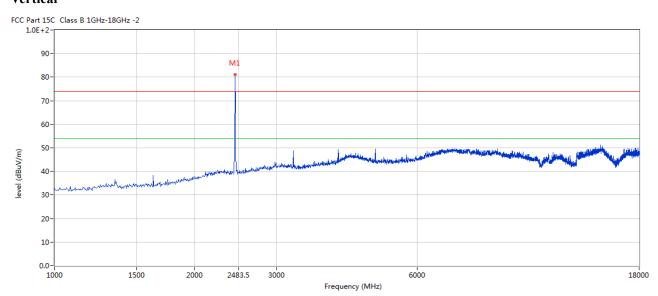

| No. | Frequency | Results | Factor | Limit | Over Limit | Detector | Table | Height | ANT | Verdict |
|-----|-----------|----------|--------|----------|------------|----------|-------|--------|----------|---------|
| | (MHz) | (dBuV/m) | (dB) | (dBuV/m) | (dB) | | (o) | (cm) | | |
| 1 | 2440 | 81.98 | -3.57 | 114.0 | -32.02 | Peak | 47.00 | 100 | Vertical | Pass |


Report No.: TW2308077-02E Page 17 of 32

Date: 2023-08-25



Please refer to the following test plots for details: High Channel-2480MHz

Horizontal

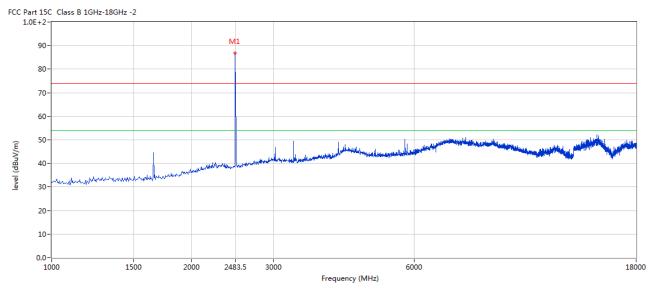

| No. | Frequency | Results | Factor | Limit | Over Limit | Detector | Table | Height | ANT | Verdict |
|-----|-----------|----------|--------|----------|------------|----------|--------|--------|------------|---------|
| | (MHz) | (dBuV/m) | (dB) | (dBuV/m) | (dB) | | (o) | (cm) | | |
| 1 | 2480 | 87.29 | -3.57 | 114.0 | -26.71 | Peak | 224.00 | 100 | Horizontal | Pass |


Page 18 of 32

Report No.: TW2308077-02E

Date: 2023-08-25



Vertical

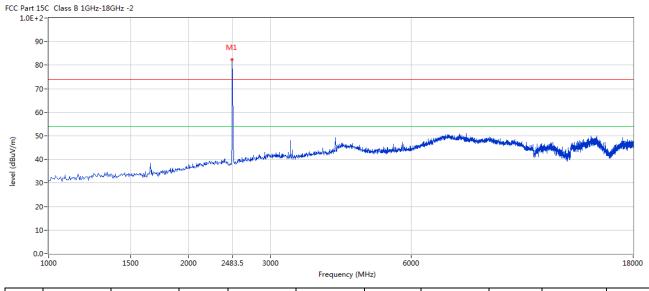

| No. | Frequency | Results | Factor | Limit | Over Limit | Detector | Table (o) | Height | ANT | Verdict |
|-----|-----------|----------|--------|----------|------------|----------|-----------|--------|----------|---------|
| | (MHz) | (dBuV/m) | (dB) | (dBuV/m) | (dB) | | | (cm) | | |
| 1 | 2480 | 82.33 | -3.57 | 114.0 | -31.67 | Peak | 240.00 | 100 | Vertical | Pass |

Note: (1) Emission Level = Reading Level + Antenna Factor + Cable Loss-Amplifier

- (2) Margin=Emission-Limits
- (3) According to section 15.35(b), the peak limit is 20dB higher than the average limit
- (4) For test purpose, keep EUT continuous transmitting
- (5) For emission above 18GHz and Below 30MHz, It is only the floor noise and less than the limit for more than 20dB. No necessary to take down.
- (6) the measured PK value less than the AV limit.

Report No.: TW2308077-02E Page 19 of 32

Date: 2023-08-25




B. General Radiated Emission Data Radiated Emission In Horizontal (30MHz----1000MHz)

EUT set Condition: Keep Tx transmitting

Results: Pass

Please refer to following diagram for individual

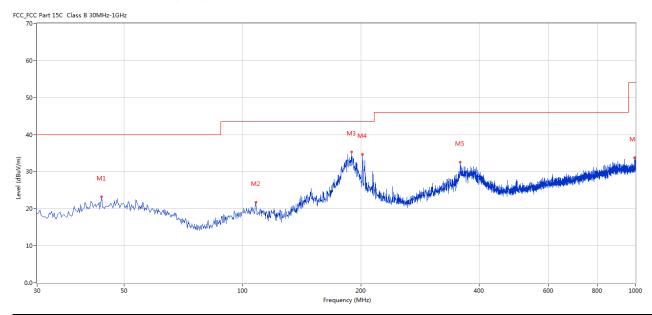

| No. | Frequency | Results | Factor | Limit | Margin | Detector | Table | Height | Antenna | Verdict |
|-----|-----------|----------|--------|----------|--------|----------|----------|--------|------------|---------|
| | (MHz) | (dBuV/m) | (dB) | (dBuV/m) | (dB) | | (Degree) | (cm) | | |
| 1 | 43.819 | 23.23 | -11.48 | 40.0 | 16.77 | Peak | 101.00 | 100 | Horizontal | Pass |
| 2 | 108.065 | 21.80 | -13.42 | 43.5 | 21.70 | Peak | 284.00 | 100 | Horizontal | Pass |
| 3 | 189.768 | 35.38 | -14.33 | 43.5 | 8.12 | Peak | 220.00 | 100 | Horizontal | Pass |
| 4 | 201.890 | 34.70 | -13.41 | 43.5 | 8.80 | Peak | 360.00 | 100 | Horizontal | Pass |
| 5 | 358.263 | 32.53 | -9.48 | 46.0 | 13.47 | Peak | 12.00 | 100 | Horizontal | Pass |
| 6 | 993.697 | 33.72 | -1.34 | 54.0 | 20.28 | Peak | 46.00 | 100 | Horizontal | Pass |

Report No.: TW2308077-02E Page 20 of 32

Date: 2023-08-25




Radiated Emission In Vertical (30MHz----1000MHz)

EUT set Condition: Keep Tx transmitting

Results: Pass

Please refer to following diagram for individual

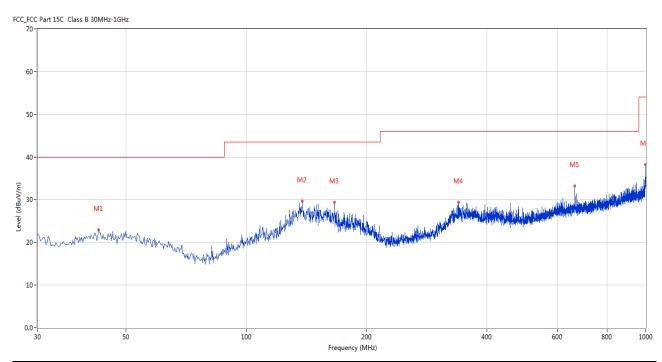

| No. | Frequency | Results | Factor | Limit | Margin | Detector | Table | Height | Antenna | Verdict |
|-----|-----------|----------|--------|----------|--------|----------|----------|--------|----------|---------|
| | (MHz) | (dBuV/m) | (dB) | (dBuV/m) | (dB) | | (Degree) | (cm) | | |
| 1 | 42.607 | 22.90 | -11.55 | 40.0 | 17.10 | Peak | 278.00 | 100 | Vertical | Pass |
| 2 | 137.886 | 29.64 | -17.28 | 43.5 | 13.86 | Peak | 238.00 | 100 | Vertical | Pass |
| 3 | 166.251 | 29.37 | -16.07 | 43.5 | 14.13 | Peak | 234.00 | 100 | Vertical | Pass |
| 4 | 339.595 | 29.41 | -9.80 | 46.0 | 16.59 | Peak | 80.00 | 100 | Vertical | Pass |
| 5 | 663.737 | 33.25 | -4.42 | 46.0 | 12.75 | Peak | 63.00 | 100 | Vertical | Pass |
| 6 | 997.818 | 38.29 | -1.23 | 54.0 | 15.71 | Peak | 1.00 | 100 | Vertical | Pass |

Date: 2023-08-25




7. Band Edge

7.1 Test Method and test Procedure:

- (1) The EUT was tested according to ANSI C63.10–2013. The radiated test was performed at Timeway EMC Laboratory. This site is on file with the FCC laboratory division, Registration No. 744189
- (2) Set Spectrum as RBW=1MHz, VBW=3MHz and Peak detector used for PK value. RBW=1MHz, VBW=10Hz and Peak detector used for AV value.
- (3) The antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency.
- (4) The antenna polarization: Vertical polarization and Horizontal polarization.

7. 2 Radiated Test Setup

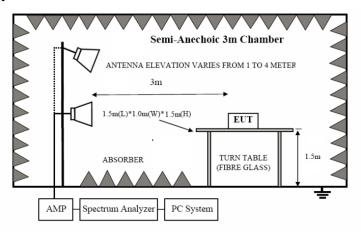

For the actual test configuration, please refer to the related items – Photos of Testing

7.3 Configuration of the EUT

Same as section 5.3 of this report

7.4 EUT Operating Condition

Same as section 5.4 of this report.

7.5 Band Edge Limit

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.

The report refers only to the sample tested and does not apply to the bulk.


Report No.: TW2308077-02E Page 22 of 32

Date: 2023-08-25



7.6 Test Result

| Product: | BT+wireless dual-mode Keyboard | Polarity | Horizontal |
|--------------|--------------------------------|--------------|------------|
| Mode | Keeping Transmitting | Test Voltage | DC3.0V |
| Temperature | 24 deg. C, | Humidity | 56% RH |
| Test Result: | Pass | | |

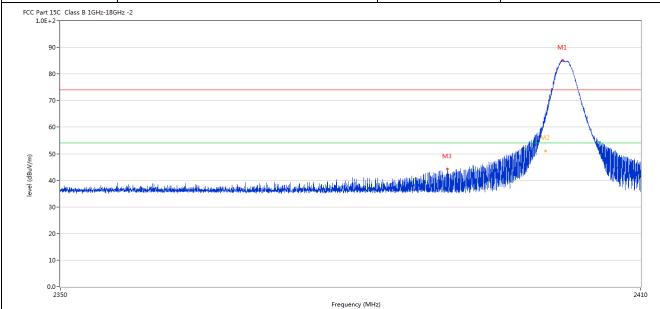


| No | Frequency | Results | Factor | Limit | Over Limit | Detector | Table | Height | ANT | Verdict |
|-----|-----------|----------|--------|----------|------------|----------|--------|--------|------------|---------|
| | (MHz) | (dBuV/m) | (dB) | (dBuV/m) | (dB) | | (0) | (cm) | | |
| 1 | 2401.827 | 85.05 | -3.57 | 74.0 | 11.05 | Peak | 245.00 | 100 | Horizontal | N/A |
| 2 | 2400.042 | 63.02 | -3.57 | 74.0 | -10.98 | Peak | 195.00 | 100 | Horizontal | Pass |
| 2** | 2400.042 | 51.02 | -3.57 | 54.0 | -2.98 | AV | 195.00 | 100 | Horizontal | Pass |
| 3 | 2389.875 | 44.23 | -3.53 | 74.0 | -29.77 | Peak | 245.00 | 100 | Horizontal | Pass |

Report No.: TW2308077-02E Page 23 of 32



| Product: | BT+wireless dual-mode Keyboard | Detector | Vertical |
|--------------|--------------------------------|--------------|----------|
| Mode | Keeping Transmitting | Test Voltage | DC3.0V |
| Temperature | 24 deg. C, | Humidity | 56% RH |
| Test Result: | Pass | | |

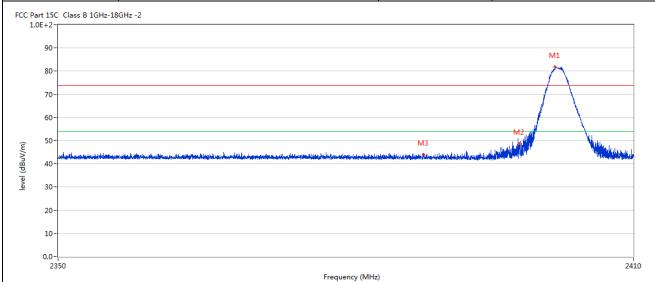


Over Limit No. Frequency Results Factor Limit Detector Table Height ANT Verdict (MHz) (dBuV/m) (dB) (dBuV/m) (dB) (o) (cm) 2401.752 80.95 74.0 5.95 327.00 N/A 1 -3.57Peak 100 Vertical Pass 2 2400.057 48.85 -3.57 74.0 -13.15 Peak 21.00 100 Vertical 3 2390.010 43.01 -3.53 74.0 -30.99 Peak 249.00 100 Vertical Pass

Report No.: TW2308077-02E Page 24 of 32



| Product: | BT+wireless dual-mode Keyboard | Polarity | Horizontal |
|--------------|--------------------------------|--------------|------------|
| Mode | Keeping Transmitting | Test Voltage | DC3.0V |
| Temperature | 24 deg. C, | Humidity | 56% RH |
| Test Result: | Pass | | |

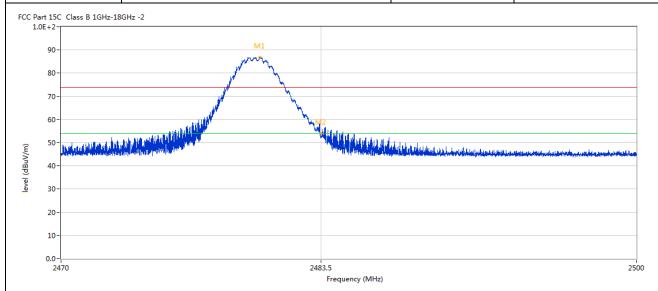

| No. | Frequency | Results | Factor | Limit | Over | Detector | Table | Height | ANT | Verdict |
|-----|-----------|----------|--------|----------|------------|----------|--------|--------|------------|---------|
| | (MHz) | (dBuV/m) | (dB) | (dBuV/m) | Limit (dB) | | (o) | (cm) | | |
| 1 | 2480.317 | 86.78 | -3.57 | 74.0 | 12.78 | Peak | 207.00 | 100 | Horizontal | N/A |
| 2 | 2483.500 | 53.93 | -3.57 | 74.0 | -20.07 | Peak | 222.00 | 100 | Horizontal | Pass |
| 2** | 2483.500 | 39.25 | -3.57 | 54.0 | -14.75 | AV | 222.00 | 100 | Horizontal | Pass |

Report No.: TW2308077-02E Page 25 of 32



| Product: | | , | | -mode Keybo | oard | Detec | tor | | Vertical | |
|----------------|---|--|-------------|-------------|------------------------------------|----------------------------------|------------------------------|---------------------------------|-------------------------------|------------------|
| | Mode | Keeping Transmitting | | | | Test Vo | ltage | | DC3.0V | |
| Te | Temperature 24 deg. C, | | | | Humio | lity | | 56% RH | | |
| Te | est Result: | | Pass | | | | | | | |
| | 90-80- | 8GHz -2 | , N | 11 | | | | | | |
| level (dBuV/m) | 60 - 50 - 60 - 60 - 60 - 60 - 60 - 60 - | Maliging States and the states of the states | | M | e Manusikaliantiko errainerrain | athydrin acerd artifectures to a | angenery lines from the said | alitik, mine ili vedenin men ke | na akipun Just-da Ana Habatan | and the state of |
| o. | 50- 40- 30- | Results | Factor | N | Marinda katharin assemption | Detector | Table | Height | ANT | 2500 Verdic |
| | 50 - 40 - 30 - 20 - 10 - 2470 | | Factor (dB) | 2483 | 3.5 Frequency (MHz) | | Table (o) | Height (cm) | ANT | |
| | 50- 40- 30- 20- 10- 0.0- 2470 | Results | | 2483 | 3.5 Frequency (MHz) | | | _ | ANT | 2500 Verdic |

Note: 1. The PK emission level less than the AV limit. No necessary to record the AV emission level.

Report No.: TW2308077-02E Page 26 of 32

Date: 2023-08-25



8.0 Antenna Requirement

Applicable Standard

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

This product has a PCB Printed Antenna. The antenna gain is -0.93dBi Max. It fulfills the requirement of this section.

Test Result: Pass

Date: 2023-08-25



Page 27 of 32

9.0 20dB Bandwidth Measurement

Test Configuration



Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 30kHz RBW and 100kHz VBW.

The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.

Limit

N/A

Page 28 of 32

Report No.: TW2308077-02E

Date: 2023-08-25



Test Result

| Product: | BT+wireless dual-mode Key | board Test Mode | : Keep transmitting | |
|----------------|---------------------------|-----------------|--|-----|
| Mode | Keeping Transmitting | Test Voltag | e DC3.0V | |
| Temperature | 24 deg. C, | Humidity | 56% RH | |
| Test Result: | Pass | Detector | PK | |
| 20dB Bandwidth | 1.263MHz | | | |
| | Marker 1 [T1 ndB] | RBW 100 | kHz RF Att 20 dB | |
| Ref Lvl | ndB 20.00 d | B VBW 300 | kHz | |
| 10 dBm | BW 1.26252505 M | Hz SWT 5 | ms Unit dBm | |
| 10 | | ▼ 1 | [T1] 0.84 dBm | |
| | | 1 | 2.40230962 GHz | A |
| 0 | | nd | 20.00 dB | |
| | | BW | | |
| -10 | | ~ | -19.45 dBm | |
| | T1 | ∇ _T | 2.40143788 GHz 2.40143788 GHz -19.50 dBm | |
| -20 | <u> </u> | | 2.40270040 GHz | |
| 1MAX | | | | 1MA |
| -30 | | | | |
| Jan War | | | V mm | |
| -40 | | | | |
| | | | | |
| -50 | | | | |
| | | | | |
| -60 | | | | |
| | | | | |
| -70 | | | | |
| | | | | |
| -80 | | | | |
| | | | | |
| -90 | | | | |
| Center 2. | 402 GHz 3 | 00 kHz/ | Span 3 MHz | |
| Date: 18. | .AUG.2023 14:05:47 | | | |
| | | | | |

Page 29 of 32

Report No.: TW2308077-02E



| Product: | BT+wireless dual-mode Keyboard | Test Mode: | Keep transmitting |
|-------------------|--------------------------------|------------------------|----------------------------|
| Mode | Keeping Transmitting | Test Voltage | DC3.0V |
| Temperature | 24 deg. C, | Humidity | 56% RH |
| Test Result: | Pass | Detector | PK |
| 20dB Bandwidth | 1.263MHz | | |
| | Marker 1 [T1 ndB] | RBW 100 kHz | |
| Ref Lvl 10 dBm | ndB 20.00 dB BW 1.26252505 MHz | VBW 300 kHz | Unit dBm |
| 10 asm | BW 1.26252505 MHz | SWT 5 ms | Unit asm |
| | | ▼ 1 [5 | [1] 0.06 dBm |
| 0 | | 1 | 2.44006914 GHz |
| | | ndB BW | 20.00 dB 1.26252505 MHz |
| -10 | | _ | [T1] -19.92 dBm |
| | | | 2.43943788 GHz |
| | T. | ∇_{T2} | [2]1] -19.64 dBm |
| -20 | | | 2.44070040 GHz |
| | | | |
| -30 | | | |
| | | | |
| -40 | | | |
| | | | |
| -50 | | | |
| | | | |
| -60 | | | |
| | | | |
| -70 | | | |
| | | | |
| -80 | | | |
| | | | |
| -90 | | | |
| Center 2 | .44 GHz 300 | cHz/ | Span 3 MHz |
| Date: 18 | 3.AUG.2023 14:02:29 | | |

Page 30 of 32

Report No.: TW2308077-02E



| Product: | BT+wireless dual-mode Keybo | ard Test Mode: | Keep transmitting |
|---------------------------------------|--|-----------------|-------------------|
| Mode | Keeping Transmitting | Test Voltage | DC3.0V |
| Temperature | 24 deg. C, | Humidity | 56% RH |
| Test Result: | Pass Detector PK | | |
| 20dB Bandwidth | 1.257MHz | | |
| R. | Marker 1 [T1 ndB] | RBW 100 kHz | RF Att 20 dB |
| Ref Lvl | ndB 20.00 dE | VBW 300 kHz | |
| 10 dBm | BW 1.25651303 MH | z SWT 5 ms | Unit dBm |
| 10 | | ▼ 1 [: | r1] -1.08 dBm |
| | | 1 | 2.48006914 GHz |
| 0 | | ndB | 20.00 dB |
| | | BW | 1.25651303 MHz |
| -10 | | | 2.47944389 GHz |
| | TO STATE OF THE ST | V _{T2} | [T1] -21.37 dBm |
| -20 | y | | 2.48070040 GHz |
| 1MAX | | | 1MA |
| -30 | | | |
| · · · · · · · · · · · · · · · · · · · | | | |
| -40 | | | |
| | | | |
| -50 | | | |
| | | | |
| -60 | | | |
| | | | |
| -70 | | | |
| | | | |
| -80 | | | |
| | | | |
| -90 | | | |
| Center 2 | | 0 kHz/ | Span 3 MHz |
| Date: 18 | 3.AUG.2023 14:01:25 | | |

Report No.: TW2308077-02E Page 31 of 32

Date: 2023-08-25




10.0 FCC ID Label

FCC ID: WOX-SK-646DM

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation

The label must not be a stick-on paper label. The label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

Mark Location:

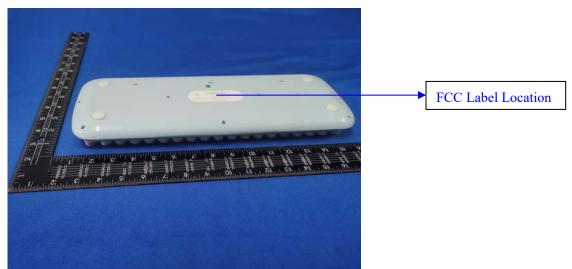


Date: 2023-08-25



11.0 Photo of testing

11.1 Conducted test View-N/A

Radiated emission test view

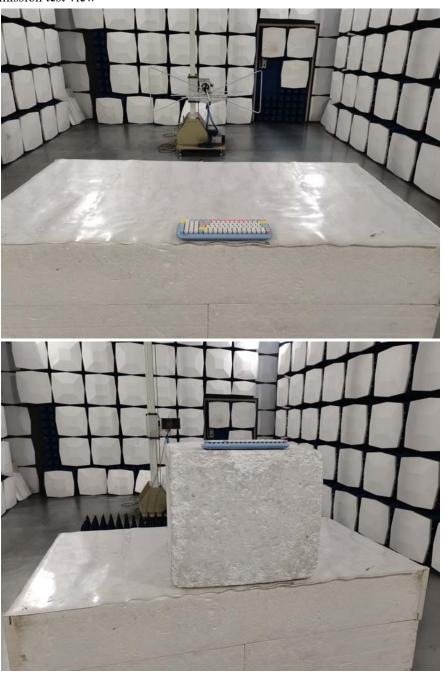

11.2 Photographs – EUT

Please refer test report TW2308077-01E

-- End of the report--

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.