

Report No.: TW2411006-01E

Applicant: Shenzhen SQT Electronics Co., Ltd

Product: BT + Wireless dual-mode keyboard

Model No.: SK-695DM, ANNI, SK-697DM

Trademark: N/A

Test Standards: FCC Part 15.249

Test result:

It is herewith confirmed and found to comply with the

requirements set up by ANSI C63.10 & FCC Part 15 Subpart C, Paragraph 15.249 regulations for the evaluation of

electromagnetic compatibility

Approved By

Terry Tang

Manager

Dated: November 08, 2024

Results appearing herein relate only to the sample tested The technical reports is issued errors and omissions exempt and is subject to withdrawal at

SHENZHEN TIMEWAY TESTING LABORATORIES

Zone C, 1st Floor, Block B, Jun Xiang Da Building, Zhongshan Park Road West, Tong Le Village, Nanshan District, Shenzhen, China

Tel (755) 83448688, Fax (755) 83442996, E-Mail: info@timeway-lab.com

Report No.: TW2411006-01E Page 2 of 38

Date: 2024-11-08



Special Statement:

FCC-Registration No.: 744189

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 744189.

Industry Canada (IC) — Registration No.:5205A

The EMC Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 5205A.

A2LA (Certification Number:5013.01)

The EMC Laboratory has been accredited by the American Association for Laboratory Accreditation (A2LA). Certification Number:5013.01

CAB identifier: CN0033

Report No.: TW2411006-01E

Date: 2024-11-08



Test Report Conclusion

Content

1.0	General Details	4
1.1	Test Lab Details	4
1.2	Applicant Details	4
1.3	Description of EUT	4
1.4	Submitted Sample	4
1.5	Test Duration.	5
1.6	Test Uncertainty	5
1.7	Test By	5
2.0	List of Measurement Equipment	6
3.0	Technical Details	7
3.1	Summary of Test Results	7
3.2	Test Standards	7
4.0	EUT Modification.	7
5.0	Power Line Conducted Emission Test.	8
5.1	Schematics of the Test	8
5.2	Test Method and Test Procedure	8
5.3	Configuration of the EUT	8
5.4	EUT Operating Condition	9
5.5	Conducted Emission Limit.	9
5.6	Test Result	9
6.0	Radiated Emission test	10
5.1	Test Method and Test Procedure	10
5.2	Configuration of the EUT	11
5.3	EUT Operation Condition	11
5.4	Radiated Emission Limit	12
5.5	Test Result.	13
7.0	Band Edge	21
7.1	Test Method and Test Procedure	21
7.2	Radiated Test Setup.	21
7.3	Configuration of the EUT	21
7.4	EUT Operating Condition	21
7.5	Band Edge Limit	21
7.6	Band Edge Test Result.	22
8.0	Antenna Requirement.	26
9.0	20dB bandwidth measurement.	27
10.0	FCC ID Label	30
11.0	Photo of Test Setup and EUT View.	31

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

adopt any other remedies which may be appropriate.

Report No.: TW2411006-01E Page 4 of 38

Date: 2024-11-08



1.0 General Details

1.1 Test Lab Details

Name: SHENZHEN TIMEWAY TESTING LABORATORIES.

Address: Zone C, 1st Floor, Block B, Jun Xiang Da Building, Zhongshan Park Road West, Tong Le

Village, Nanshan District, Shenzhen, China

Telephone: (755) 83448688 Fax: (755) 83442996

Site on File with the Federal Communications Commission – United Sates

Registration Number: 744189 For 3m Anechoic Chamber

1.2 Applicant Details

Applicant: Shenzhen SQT Electronics Co., Ltd

Address: ZhengChengFeng TechnologyZone Xinsha Road, ShaYi Village, Sha jing Town, Baoan Area,

Shenzhen, China

1.3 Description of EUT

Product: BT + Wireless dual-mode keyboard

Manufacturer: Shenzhen SQT Electronics Co., Ltd

Address: ZhengChengFeng TechnologyZone Xinsha Road, ShaYi Village, Sha jing

Town, Baoan Area, Shenzhen, China

Trademark: N/A

Model Number: SK-695DM

Additional Model Name ANNI, SK-697DM

Rating: DC3V, 8mA

Battery: DC3.0V, 2pc AAA battery

Modulation Type: GFSK

Operation Frequency: 2402-2480MHz

Channel Separation: 2MHz
Channel Number: 40

Hardware Version: VER:1.2

Software Version: 241024_蓝牙名 fsqsg_SK695_3V.dat 标识"N2"

Serial No.: SK695DM240800611

Antenna Designation PCB antenna with gain -0.61dBi Max (Get from the antenna test report)

1.4 Submitted Sample: 4 Samples

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No.: TW2411006-01E Page 5 of 38

Date: 2024-11-08



1.5 Test Duration

2024-11-01 to 2024-11-08

1.6 Test Uncertainty

Conducted Emissions Uncertainty = 3.6dB

Radiated Emissions below 1GHz Uncertainty =4.7dB

Radiated Emissions above 1GHz Uncertainty =6.0dB

Conducted Power Uncertainty =6.0dB

Occupied Channel Bandwidth Uncertainty = 5%

Conducted Emissions Uncertainty = 3.6dB

Note: The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.

1.7 Test Engineer

The sample tested by

Print Name: Andy Xing

Page 6 of 38

Report No.: TW2411006-01E

Date: 2024-11-08



2.0 Test Equipment					
Instrument Type	Manufacturer	Model	Serial No.	Date of Cal.	Due Date
ESPI Test Receiver	R&S	ESPI 3	100379	2024-07-12	2025-07-11
LISN	R&S	EZH3-Z5	100294	2024-07-12	2025-07-11
LISN	R&S	EZH3-Z5	100253	2024-07-12	2025-07-11
Impuls-Begrenzer	R&S	ESH3-Z2	100281	2024-07-12	2025-07-11
Loop Antenna	EMCO	6507	00078608	2022-07-18	2025-07-17
Spectrum	R&S	FSIQ26	100292	2024-07-12	2025-07-11
Horn Antenna	A-INFO	LB-180400-KF	J211060660	2022-07-18	2025-07-17
Horn Antenna	R&S	BBHA 9120D	9120D-631	2022-07-18	2025-07-17
Power meter	Anritsu	ML2487A	6K00003613	2024-07-12	2025-07-11
Power sensor	Anritsu	MA2491A	32263	2024-07-12	2025-07-11
Bilog Antenna	Schwarebeck	VULB9163	9163/340	2022-07-18	2025-07-17
9*6*6 Anechoic			N/A	2022-07-26	2025-07-25
EMI Test Receiver	RS	ESVB	826156/011	2024-07-12	2025-07-11
EMI Test Receiver	RS	ESCS 30	834115/006	2024-07-12	2025-07-11
Spectrum	HP/Agilent	E4407B	MY50441392	2024-07-12	2025-07-11
Spectrum	RS	FSP	1164.4391.38	2024-07-12	2025-07-11
RF Cable	Zhengdi	ZT26-NJ-NJ-8M/FA	1	2024-07-12	2025-07-11
RF Cable	Zhengdi	7m		2024-07-12	2025-07-11
Pre-Amplifier	Schwarebeck	BBV9743	#218	2024-07-12	2025-07-11
Pre-Amplifier	HP/Agilent	8449B	3008A00160	2024-07-12	2025-07-11
LISN	SCHAFFNER	NNB42	00012	2024-07-12	2025-07-11
ESPI Test Receiver	R&S	ESPI 3	100379	2024-07-12	2025-07-11
LISN	R&S	EZH3-Z5	100294	2024-07-12	2025-07-11

2.2 Automation Test Software

For Conducted Emission Test

Name	Version
EZ-EMC	Ver.EMC-CON 3A1.1

For Radiated Emissions

Name	Version
EMI Test Software BL410-EV18.91	V18.905
EMI Test Software BL410-EV18.806 High Frequency	V18.06

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 7 of 38

Report No.: TW2411006-01E

Date: 2024-11-08



3.0 Technical Details

3.1 Summary of test results

The EUT has been tested according to the following specifications:

Standard	Test Type	Result	Notes
FCC Part 15, Paragraph 15.203	Antenna Requirement	Pass	Complies
FCC Part 15, Paragraph 15.207	Conducted Emission Test	N/A	N/A
FCC Part 15 Subpart C Paragraph 15.249(a) & 15.249(b) Limit	Field Strength of Fundamental	Pass	Complies
FCC Part 15, Paragraph 15.209	Radiated Emission Test	Pass	Complies
FCC Part 15 Subpart C Paragraph 15.249(d) Limit	Band Edge Test	Pass	Complies

3.2 Test Standards

FCC Part 15 Subpart C, Paragraph 15.249, ANSI C63.4:2014 and ANSI C63.10:2013

4.0 EUT Modification

No modification by SHENZHEN TIMEWAY TESTING LABORATORIES


Report No.: TW2411006-01E

Date: 2024-11-08



5. Power Line Conducted Emission Test

5.1 Schematics of the test

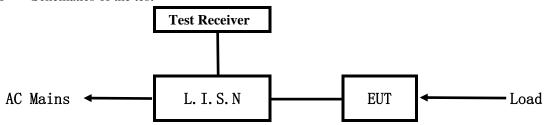


EUT: Equipment Under Test

5.2 Test Method and test Procedure

The EUT was tested according to ANSI C63.10-2013. The Frequency spectrum from 0.15MHz to 30MHz was investigated. The LISN used was 50ohm/50uH as specified by section 5.1 of ANSI C63.10-2013.

Test Voltage: N/A

Block diagram of Test setup

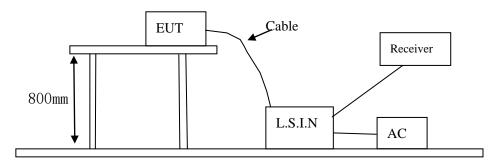

5.3 Configuration of the EUT

The EUT was configured according to ANSI C63.10-2013. All interface ports were connected to the appropriate peripherals. All peripherals and cables are listed below.

40 channels are provided to the EUT

A. EUT

Device	Manufacturer	Model	FCC ID
BT + Wireless	Shenzhen SQT Electronics	SK-695DM, ANNI,	WOY CV 605DM
dual-mode keyboard	Co., Ltd	SK-697DM	WOX-SK-695DM

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Report No.: TW2411006-01E Page 9 of 38

Date: 2024-11-08



B. Internal Device

Device	Manufacturer	Model	FCC ID/DOC
N/A			

C. Peripherals

Device	Manufacturer	Model	Rating
N/A			

5.4 EUT Operating Condition

Operating condition is according to ANSI C63.10-2013

- A Setup the EUT and simulators as shown on follow
- B Enable AF signal and confirm EUT active to normal condition

5.5 Power line conducted Emission Limit according to Paragraph 15.207

Frequency	Limits (dB μ V)			
(MHz)	Quasi-peak Level	Average Level		
0.15 ~ 0.50	66.0~56.0*	56.0~46.0*		
0.50 ~ 5.00	56.0	46.0		
5.00 ~ 30.00	60.0	50.0		

Notes: 1. *Decreasing linearly with logarithm of frequency.

2. The tighter limit shall apply at the transition frequencies

5.6 Test Results: N/A

Note: EUT powered by AAA battery, so this test item not applicable.

Report No.: TW2411006-01E Page 10 of 38

Date: 2024-11-08




6 Radiated Emission Test

- 6.1 Test Method and test Procedure:
- (1) The EUT was tested according to ANSI C63.10-2013. The radiated test was performed at Timeway EMC Laboratory. This site is on file with the FCC laboratory division, Registration No. 744189
- (2) The EUT, peripherals were put on the turntable which table size is 1m x 1.5 m, table high 0.8 m. All set up is according to ANSI C63.10-2013.
- (3) The frequency spectrum from 9kHz to 25 GHz was investigated. All readings from 30 MHz to 1 GHz are quasi-peak values with a resolution bandwidth of 120 kHz. All readings are above 1 GHz, peak values with a resolution bandwidth of 1 MHz (Note: for Fundamental frequency radiated emission measurement, RBW=3MHz, VBW=10MHz). Measurements were made at 3 meters.
- (4) The antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency.
- (5) The antenna polarization: Vertical polarization and Horizontal polarization.

Block diagram of Test setup

For radiated emissions from 9kHz to 30MHz

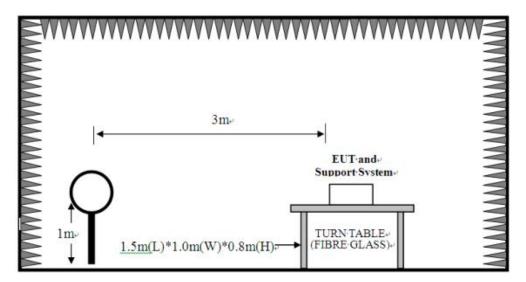


Report No.: TW2411006-01E


Date: 2024-11-08



For radiated emissions from 30MHz to1GHz

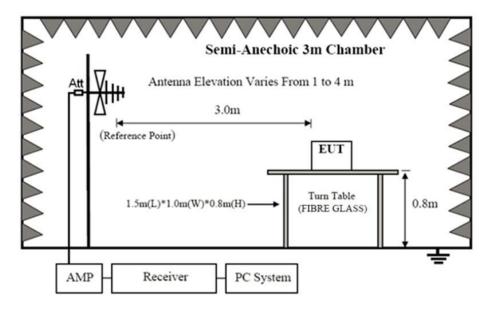

For radiated emissions above 1GHz

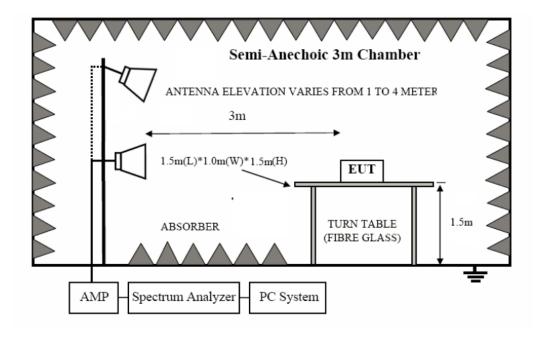

6.2 Configuration of the EUT Same as section 5.3 of this report

6.3 EUT Operating Condition

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.



Date: 2024-11-08



Same as section 5.4 of this report.

6.4 Radiated Emission Limit

All emission from a digital device, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strength specified below:

A FCC Part 15 Subpart C Paragraph 15.249(a) Limit

Fundamental Frequency	Field Stre	ength of Fundame	ntal (3m)	Field S	trength of Harmo	onics (3m)
(MHz)	mV/m	mV/m dBuV/m uV/m dBuV		V/m		
2400-2483.5	50	94 (Average)	114 (Peak)	500	54 (Average)	74 (Peak)

Note:

- 1. RF Field Strength (dBuV) = 20 log RF Voltage (uV)
- 2.Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.
- 3. The emission limit in this paragraph is based on measurement instrumentation employing an average detector.

B. Frequencies in restricted band are complied to limit on Paragraph 15.209.

Frequency Range (MHz)	Distance (m)	Field strength (dB μ V/m)
0.009-0.490	3	20log(2400/F(kHz)) +40log (300/3)
0.490-1.705	3	20log(24000/F(kHz)) +40log (30/3)
1.705-30	3	69.5
30-80	3	40.0
88-216	3	43.5
216-960	3	46.0
Above 960	3	54.0

Note:

- 1. RF Voltage $(dBuV) = 20 \log RF Voltage (uV)$
- 2. In the Above Table, the tighter limit applies at the band edges.
- 3. Distance refers to the distance in meters between the measuring instrument antenna and the EUT
- 4. All scanning using PK detector. And the final emission level was get using QP detector for frequency range from 30-1000MHz.As to 1G-25G, the final emission level got using PK. For fundamental measurement, PK detector used.
- 5. For radiated emissions from 9kHz to 30MHz, the emission level is much less than the limit for more than 20dB. No necessary to take down the record.
- 6. New battery was used during the radiation test.

Report No.: TW2411006-01E Page 13 of 38

Date: 2024-11-08




6.5 Test result

A Fundamental & Harmonics Radiated Emission Data

Please refer to the following test plots for details: Low Channel-2402MHz

Horizontal

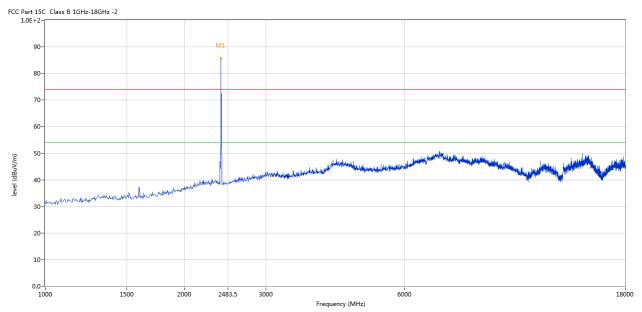


No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
1	2402	85.73	-3.57	114.0	-28.27	Peak	185.00	100	Horizontal	Pass

Report No.: TW2411006-01E Page 14 of 38

Date: 2024-11-08



Vertical

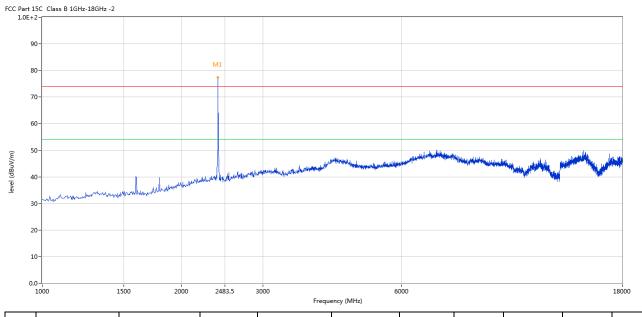

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
1	2402	77.44	-3.57	114.0	-36.56	Peak	17.00	100	Vertical	Pass


Report No.: TW2411006-01E Page 15 of 38

Date: 2024-11-08



Please refer to the following test plots for details: Middle Channel- 2440MHz

Horizontal

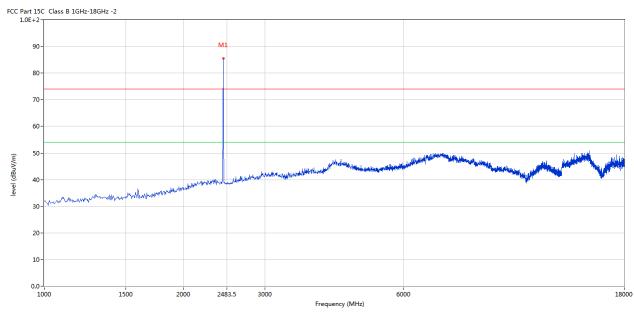


	No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
		(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
Ī	1	2441	81.58	-3.57	114.0	-32.42	Peak	187.00	100	Horizontal	Pass

Report No.: TW2411006-01E Page 16 of 38

Date: 2024-11-08



Vertical

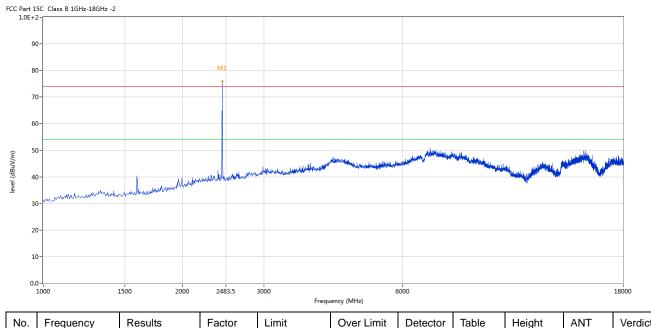

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
1	2441	75.83	-3.57	114.0	-38.17	Peak	349.00	100	Vertical	Pass


Report No.: TW2411006-01E Page 17 of 38

Date: 2024-11-08



Please refer to the following test plots for details: High Channel-2480MHz

Horizontal

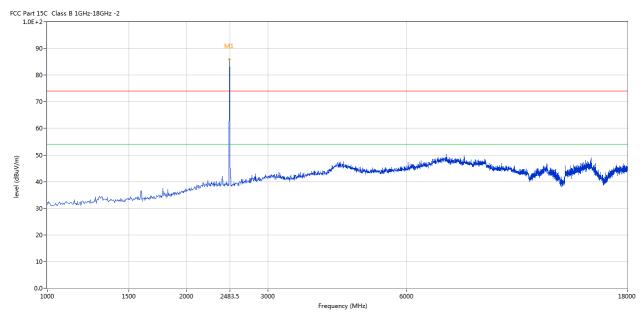

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
1	2480	85.86	-3.57	114.0	-28.14	Peak	39.00	100	Horizontal	Pass


Page 18 of 38

Report No.: TW2411006-01E

Date: 2024-11-08



Vertical

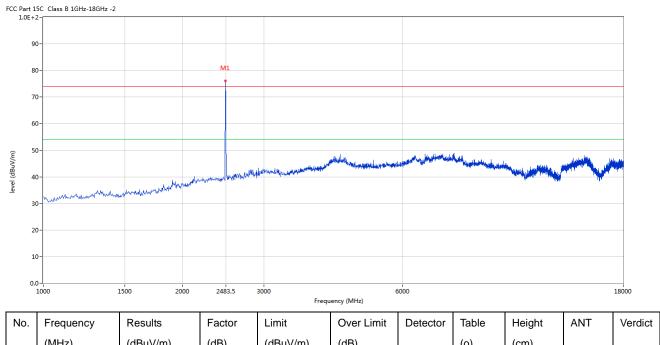

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
1	2480	75.11	-3.57	114.0	-38.89	Peak	301.00	100	Vertical	Pass

Note: (2) Emission Level = Reading Level + Antenna Factor + Cable Loss-Amplifier

- (3) Margin=Emission-Limits
- (4) According to section 15.35(b), the peak limit is 20dB higher than the average limit
- (5) For test purpose, keep EUT continuous transmitting
- (5) For emission above 18GHz and Below 30MHz, it is only the floor noise. No necessary to take down.
- (6) the measured PK value less than the AV limit.

Report No.: TW2411006-01E Page 19 of 38

Date: 2024-11-08




B. General Radiated Emission Data Radiated Emission In Horizontal (30MHz----1000MHz)

EUT set Condition: Keep Tx transmitting

Results: Pass

Please refer to following diagram for individual

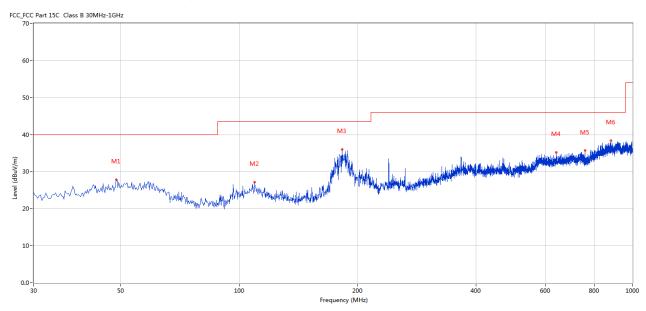

No.	Frequency	Results	Factor	Limit	Margin	Detector	Table	Height	Antenna	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(Degree)	(cm)		
1	48.668	27.79	-5.27	40.0	12.21	Peak	110.00	100	Horizontal	Pass
2	109.520	27.18	-5.98	43.5	16.32	Peak	178.00	100	Horizontal	Pass
3	182.737	35.99	-7.41	43.5	7.51	Peak	299.00	100	Horizontal	Pass
4	639.493	35.15	1.49	46.0	10.85	Peak	20.00	100	Horizontal	Pass
5	756.833	35.73	1.62	46.0	10.27	Peak	291.00	100	Horizontal	Pass
6	880.477	38.39	5.09	46.0	7.61	Peak	20.00	100	Horizontal	Pass

Report No.: TW2411006-01E Page 20 of 38

Date: 2024-11-08




Radiated Emission In Vertical (30MHz----1000MHz)

EUT set Condition: Keep Tx transmitting

Results: Pass

Please refer to following diagram for individual

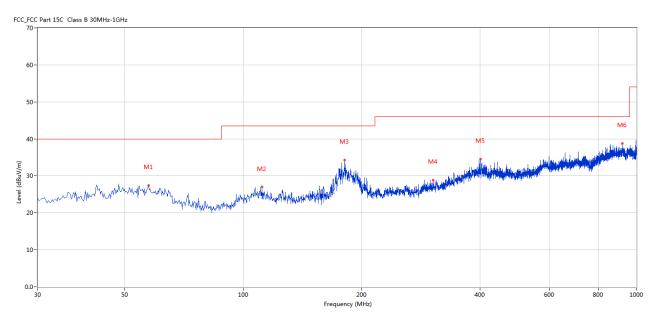

No.	Frequency	Results	Factor	Limit	Margin	Detector	Table	Height	Antenna	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(Degree)	(cm)		
1	57.396	27.38	-4.92	40.0	12.62	Peak	140.00	100	Vertical	Pass
2	111.702	26.96	-6.08	43.5	16.54	Peak	229.00	100	Vertical	Pass
3	181.282	34.28	-7.72	43.5	9.22	Peak	273.00	100	Vertical	Pass
4	303.714	28.91	-4.06	46.0	17.09	Peak	64.00	100	Vertical	Pass
5	401.417	34.53	-1.64	46.0	11.47	Peak	296.00	100	Vertical	Pass
6	920.722	38.77	5.58	46.0	7.23	Peak	248.00	100	Vertical	Pass

Report No.: TW2411006-01E

Date: 2024-11-08




7. Band Edge

7.1 Test Method and test Procedure:

- (1) The EUT was tested according to ANSI C63.10–2013. The radiated test was performed at Timeway EMC Laboratory. This site is on file with the FCC laboratory division, Registration No. 744189
- (2) Set Spectrum as RBW=1MHz, VBW=3MHz and Peak detector used for PK value. RBW=1MHz, VBW=10Hz and Peak detector used for AV value.
- (3) The antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency.
- (4) The antenna polarization: Vertical polarization and Horizontal polarization.

7. 2 Radiated Test Setup

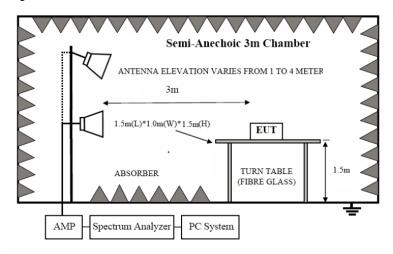

For the actual test configuration, please refer to the related items – Photos of Testing

7.3 Configuration of the EUT

Same as section 5.3 of this report

7.4 EUT Operating Condition

Same as section 5.4 of this report.

7.5 Band Edge Limit

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.


Report No.: TW2411006-01E Page 22 of 38

Date: 2024-11-08



7.6 Test Result

Product:	BT + Wireless dual-mode keyboard	Polarity	Horizontal
Mode	Keeping Transmitting	Test Voltage	DC3.0V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass		

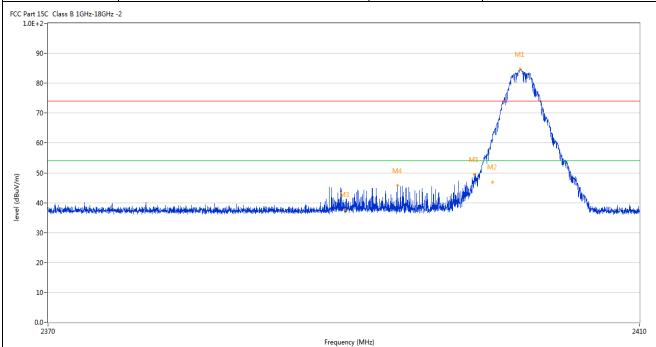

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
1	2401.872	84.66	-3.57	74.0	10.66	Peak	47.00	100	Horizontal	N/A
2	2400.000	62.03	-3.57	74.0	-11.97	Peak	47.00	100	Horizontal	Pass
2**	2400.000	46.86	-3.57	54.0	-7.14	AV	47.00	100	Horizontal	Pass
3	2390.000	37.71	-3.53	74.0	-36.29	Peak	150.00	100	Horizontal	Pass
4	2393.574	45.71	-3.54	74.0	-28.29	Peak	52.00	100	Horizontal	Pass
5	2398.763	49.45	-3.56	74.0	-24.55	Peak	47.00	100	Horizontal	Pass

Report No.: TW2411006-01E Page 23 of 38



Product: BT + Wireless dual-mode keyboard Detector Vertical											
Temperature 24 deg. C, Humidity 56% RH Test Result: Pass]	Product:	BT + Wi	reless dual	-mode keyboa	ard	Detector		V	ertical	
Part ISC Class 8 16Hr-180Hr - 2 Part ISC Class 8 16Hr - 180Hr - 1		Mode	Ke	eeping Tra	nsmitting	Т	est Voltag	ge	D	C3.0V	
Part 15C Class 8 16Hz-18GHz - 2 90 80 70 60 90 10 10 10 10 10 10 11 2401.992 76.67 73.57 74.0 21.83 Park 15C Class 8 16Hz-18GHz - 2 100	Te	mperature		24 deg	. C,		Humidity	,	56	5% RH	
1.06-2-2-2-2-2-2-2-2-2-2-2-2-2-2-2-2-2-2-2	Te	st Result:		Pass	3						
No. Frequency (MHz) Results Factor Limit Over Limit Detector Table Height ANT Verd (MHz) (dBuV/m) (dB) (dBuV/m) (dB) (o) (cm) 1 2401.992 76.67 -3.57 74.0 2.67 Peak 350.00 100 Vertical N/A 2 2400.000 52.17 -3.57 74.0 -21.83 Peak 323.00 100 Vertical Pass			2								
No. Frequency (MHz) Results Factor Limit Over Limit Detector Table Height ANT Verd (MHz) (dBuV/m) (dB) (dBuV/m) (dB) (o) (cm) 1 2401.992 76.67 -3.57 74.0 2.67 Peak 350.00 100 Vertical N/A 2 2400.000 52.17 -3.57 74.0 -21.83 Peak 323.00 100 Vertical Pass	0										
70 60 60 60 60 60 60 60 60 60 60 60 60 60	9	0-							1.41		
Frequency (MHz) No. Frequency (MHz) No. (dBuV/m) (dB) (dBuV/m) (dB) 1 2401.992 76.67 -3.57 74.0 2.67 Peak 350.00 100 Vertical N/A 2 2400.000 52.17 -3.57 74.0 -21.83 Peak 323.00 100 Vertical Pass	8	0-							ΛΛΛ 1 1.		
10-20-20-20-20-20-20-20-20-20-20-20-20-20	7	0-						۸	An Andr		
40- 20- 10- 2370 Frequency (MHz) No. Frequency Results Factor Limit Over Limit Detector Table Height ANT Verd (MHz) (dBuV/m) (dB) (dBuV/m) (dB) (o) (cm) 1 2401.992 76.67 -3.57 74.0 2.67 Peak 350.00 100 Vertical N/A 2 2400.000 52.17 -3.57 74.0 -21.83 Peak 323.00 100 Vertical Pass	6	0-						, , , , , , , , , , , , , , , , , , ,	- ''		
40- 20- 10- 2370 Frequency (MHz) No. Frequency Results Factor Limit Over Limit Detector Table Height ANT Verd (MHz) (dBuV/m) (dB) (dBuV/m) (dB) (o) (cm) 1 2401.992 76.67 -3.57 74.0 2.67 Peak 350.00 100 Vertical N/A 2 2400.000 52.17 -3.57 74.0 -21.83 Peak 323.00 100 Vertical Pass	5	0						MA	19		
30- 20- 300- 200- 300- 200- 300- 300- 30					- 11	LMβ	1	الالليب	""	M.	
20- 10- 2370 Frequency (MHz) No. Frequency Results Factor Limit Over Limit Detector Table Height ANT Verd (MHz) (dBuV/m) (dB) (dBuV/m) (dB) 1 2401.992 76.67 -3.57 74.0 2.67 Peak 350.00 100 Vertical N/A 2 2410.000 52.17 -3.57 74.0 -21.83 Peak 323.00 100 Vertical Pass	4							AND THE		What wild but were	Mark History
No. Frequency (MHz) No. Frequency (MHz) Results Factor Limit Over Limit Detector Table Height ANT Verd (MHz) (MHz) (dBuV/m) (dB) (dBuV/m) (dB) (o) (cm) 1 2401.992 76.67 -3.57 74.0 2.67 Peak 350.00 100 Vertical N/A 2 2400.000 52.17 -3.57 74.0 -21.83 Peak 323.00 100 Vertical Pass	3	0-									
No. Frequency (MHz) No. Frequency (MHz) Results Factor Limit Over Limit Detector Table Height ANT Verd (MHz) (MHz) (dBuV/m) (dB) (dBuV/m) (dB) (o) (cm) 1 2401.992 76.67 -3.57 74.0 2.67 Peak 350.00 100 Vertical N/A 2 2400.000 52.17 -3.57 74.0 -21.83 Peak 323.00 100 Vertical Pass	2	0-									
No. Frequency (MHz) No. Frequency (MHz) Results Factor Limit Over Limit Detector Table Height ANT Verd (MHz) (MHz) (dBuV/m) (dB) (dBuV/m) (dB) (o) (cm) 1 2401.992 76.67 -3.57 74.0 2.67 Peak 350.00 100 Vertical N/A 2 2400.000 52.17 -3.57 74.0 -21.83 Peak 323.00 100 Vertical Pass	1	n-									
Prequency (MHz) Results Factor Limit Over Limit Detector Table Height ANT Verd (MHz) (MHz) (dBuV/m) (dB) (dBuV/m) (dB) (o) (cm) 1 2401.992 76.67 -3.57 74.0 2.67 Peak 350.00 100 Vertical N/A 2 2400.000 52.17 -3.57 74.0 -21.83 Peak 323.00 100 Vertical Pass	•										
No. Frequency (MHz) (dBuV/m) (dB) (dBuV/m) (dB) (Detector (Cm) (Cm) (Cm) (MHz) (Detector (Cm) (MHz) (Detector (Cm) (Cm) (Cm) (Cm) (Detector (Cm) (Cm) (Cm) (Cm) (Cm) (Cm) (Cm) (Cm)	0.	0- 2370				(MILE)					2410
(MHz) (dBuV/m) (dB) (dB) (o) (cm) 1 2401.992 76.67 -3.57 74.0 2.67 Peak 350.00 100 Vertical N/A 2 2400.000 52.17 -3.57 74.0 -21.83 Peak 323.00 100 Vertical Pass	No	Frequency	Paculte	Factor			Detector	Table	Height	ANT	Verdi
1 2401.992 76.67 -3.57 74.0 2.67 Peak 350.00 100 Vertical N/A 2 2400.000 52.17 -3.57 74.0 -21.83 Peak 323.00 100 Vertical Pass	١٠.						Detector			AINI	veiu
2 2400.000 52.17 -3.57 74.0 -21.83 Peak 323.00 100 Vertical Pass	1	` '	, ,	+ ' '	, ,		Peak			Vertical	N/A
		2700.000	JZ. 17	-0.01	17.0	21.00	ı car	JZJ.00	100	v c i licai	Pacc

Report No.: TW2411006-01E Page 24 of 38



]	Product:	BT + Wi	reless dua	ıl-mode keybo	ard	Pola	rity		Horizonta	ıl
	Mode	K	eeping Tr	ansmitting		Test Vo	oltage		DC3.0V	
Те	mperature		24 de	g. C,		Humi	dity		56% RH	
Te	est Result:		Pas	ss						
CC Part 1	LSC Class B 1GHz-18GHz 2-	2								
9	0-		M1							
			No. ora	n _h						
8	0-		/	1						
7	0-		- /	\						
6	0-		f							
. 5	0-		1	M2						
4	0-	للمعلى المعلى ال								
_		And the visite of the same of		,	had hit but a single pillippin began in the facility	Harriegoph Lord and the Angelijie	nament of recent design of the	And the state of t	A STATE OF THE STA	hija jakuwai
3	0-									
2	0-									
	0-									
1	0-									
				2483.5	0.011					
0.	2470			Fre	equency (MHz)					2500
0.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	
0.	2470	Results (dBuV/m)	Factor (dB)	1		Detector	Table (o)	Height (cm)	ANT	Verdi
0.	Frequency			Limit	Over Limit	Detector Peak		_	ANT Horizontal	

Report No.: TW2411006-01E Page 25 of 38



Product:	BT + Wi	reless dual	-mode keyboard	rd l	Detector		Ve	rtical	
Mode	K	eeping Tra	nsmitting	Te	st Voltage	;	DC	C3.0V	
Temperature		24 deg	. C,	I	Humidity		569	% RH	
Test Result:		Pas	S						
Part 15C Class B 1GHz-18GHz - 1.0E+2-	2								
90-									
50									
80-		M1							
70-		And the said	M _M						
		N,	¹ \ _						
60-			─\						
			M ₂						
	tulanik dakan dinik kahil dini bisarah	p ^r	Max.	alkkaad, aada, aada laa, dhiila dhii	handaladik daya	d international international party of the latest and the latest a	htm://www.dish.gov/day		de la composition de
	interpretation and think to the plant and the second secon		Max.		Land of the state	distribusi dalah sebada Alba	hta militaria provincia provincia	delegation of the second delegation of the sec	de palata
50- 40-	actaphic below a distribute by the best of the contract of the	p de de la companya d	Max.	al-kepal sigh, ad his all lates h	lan principal politic disconsi		htamathaisteoirthisteoirtha	aldersalization accessed black or	
30- 20-	untaplicability and inches the state of the	p ^r	Max.	akteed ask ask for all beliefs	li espelator (septili de seri	distribusi Maradishka Mili	hi amiliani massi a aha abba	dhistophysics Albert	
50- 40- 30-	instantish da indisinda da indi	par de la companya de	Max.		le e principal de la constante	distribute de	d and industry of a selection of the sel	addresis entre in allege	
30 - 20 -	kolaspileibelde vaddink kepileibelde provid		2483.5		ine produced popular despec	distribusi Marakishooli Ak	de anadrona por esta esta esta esta esta esta esta esta	dhistain san dhi	2500
30 - 20 - 10 - 2470	installed the second of the se		2483.5 Frequer	ency (MHz)					1
30- 20- 10- 2470	Results	Factor	2483.5 Frequer	ency (MHz) Over Limit	Detector	Table	Height	ANT	1
30- 20- 10- 2470 No. Frequency (MHz)	(dBuV/m)	(dB)	Limit (dBuV/m) (ency (MHz) Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdi
30- 20- 10- 2470			2483.5 Frequer Limit (dBuV/m) (74.0 1	ency (MHz) Over Limit		Table	Height		1

Report No.: TW2411006-01E

Date: 2024-11-08



Page 26 of 38

8.0 Antenna Requirement

Applicable Standard

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

This product has an PCB antenna. The antenna gain is -0.61dBi Max. It fulfills the requirement of this section. Test Result: Pass


Page 27 of 38

Report No.: TW2411006-01E

Date: 2024-11-08



9.0 20dB Bandwidth Measurement					
Product:	BT + Wireless dual-mode keyboard	Test Mode:	Keep transmitting		
Mode	Keeping Transmitting	Test Voltage	DC3.0V		
Temperature	24 deg. C,	Humidity	56% RH		
Test Result:	Pass	Detector	PK		
20dB Bandwidth	1.242MHz				

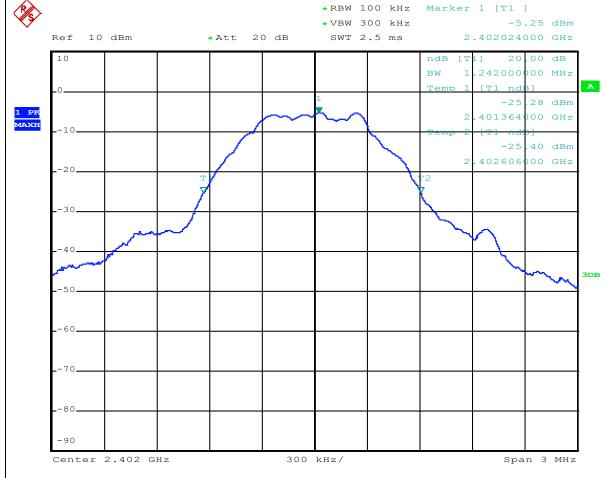

Date: 8.NOV.2024 09:26:17


Page 28 of 38

Report No.: TW2411006-01E

Date: 2024-11-08



Product:	BT + Wireless dual-mode keyboard	Test Mode:	Keep transmitting
Mode	Keeping Transmitting	Test Voltage	DC3.0V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK
20dB Bandwidth	1.242MHz		

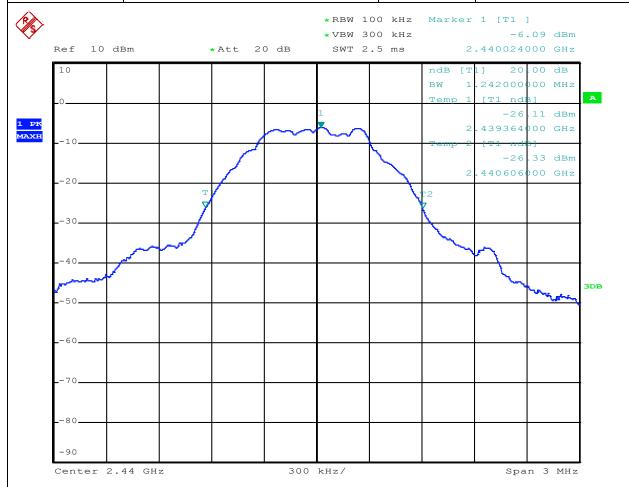

Date: 8.NOV.2024 09:26:52


Page 29 of 38

Report No.: TW2411006-01E

Date: 2024-11-08



Product:	BT + Wireless dual-mode keyboard	Test Mode:	Keep transmitting
Mode	Keeping Transmitting	Test Voltage	DC3.0V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK
20dB Bandwidth	1.236MHz		

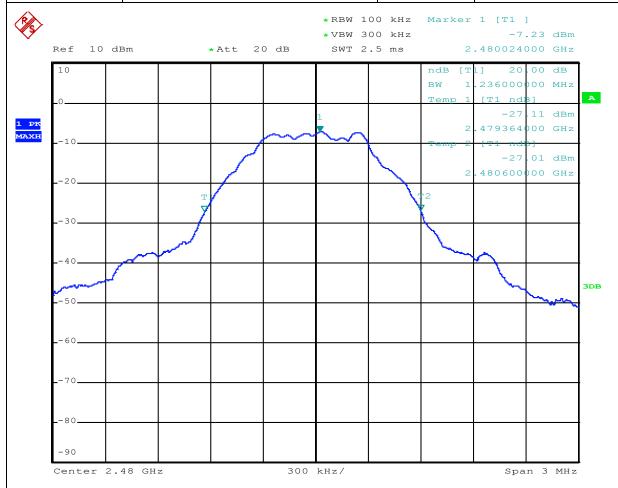

Date: 8.NOV.2024 09:27:28

Report No.: TW2411006-01E Page 30 of 38

Date: 2024-11-08



10.0 FCC ID Label


FCC ID: WOX-SK-695DM

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) this device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation

The label must not be a stick-on paper label. The label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

Mark Location:

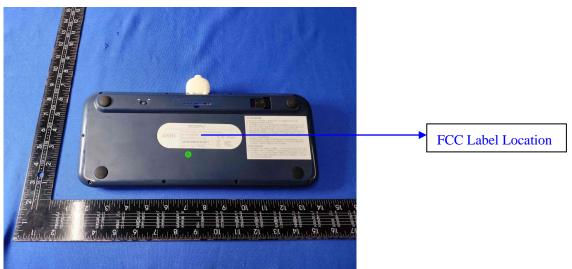

Report No.: TW2411006-01E

Date: 2024-11-08



11.0 Photo of testing

11.1 Conducted test View-N/A

Radiated emission test view





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 32 of 38

Report No.: TW2411006-01E

Date: 2024-11-08

11.2







The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

adopt any other remedies which may be appropriate.

Page 33 of 38

Report No.: TW2411006-01E

Date: 2024-11-08



Outside View-Keyboard



The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES.

will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

adopt any other remedies which may be appropriate.

Page 34 of 38

Report No.: TW2411006-01E

Date: 2024-11-08



Outside View-keyboard



The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No.: TW2411006-01E Page 35 of 38



Outside View-keyboard



Page 36 of 38

Report No.: TW2411006-01E

Date: 2024-11-08



Inside View-keyboard





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.


Page 37 of 38

Report No.: TW2411006-01E

Date: 2024-11-08



Inside View-keyboard

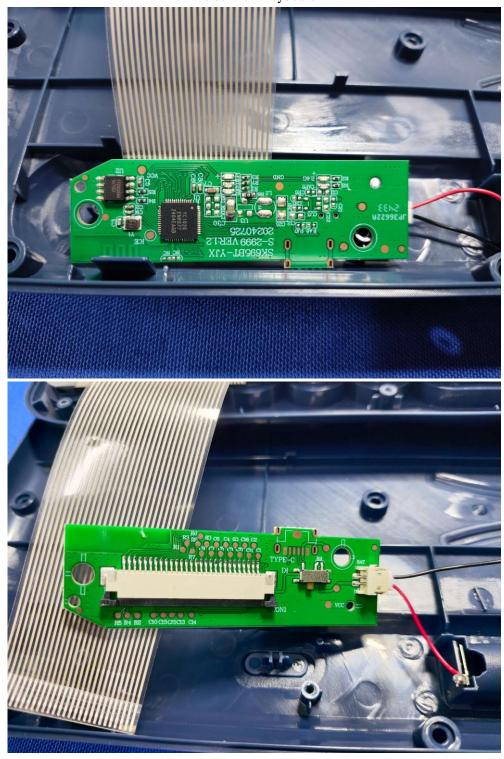

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.


Page 38 of 38

Report No.: TW2411006-01E

Date: 2024-11-08



Outside View-keyboard

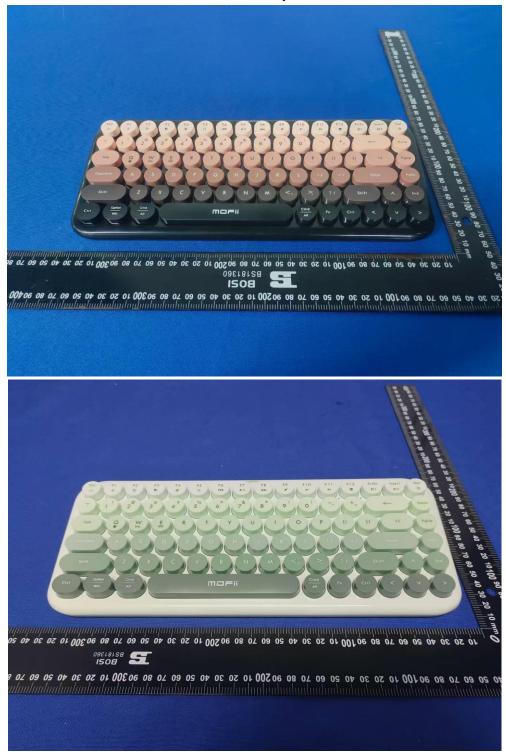

-- End of the Report--

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.