

Applicant: Shenzhen SQT Electronics Co., Ltd

Product: BT + Wireless dual-mode keyboard

Model No.: SK-695DM, ANNI, SK-697DM

Trademark: N/A

Test Standards: FCC Part 15.249

Test result:

It is herewith confirmed and found to comply with the

requirements set up by ANSI C63.10 &FCC Part 15 Subpart C, Paragraph 15.249 regulations for the evaluation of

electromagnetic compatibility

Approved By

Term long

Terry Tang

Manager

Dated: November 08, 2024

Results appearing herein relate only to the sample tested The technical reports is issued errors and omissions exempt and is subject to withdrawal at

SHENZHEN TIMEWAY TESTING LABORATORIES

Zone C, 1st Floor, Block B, Jun Xiang Da Building, Zhongshan Park Road West, Tong Le Village, Nanshan District, Shenzhen, China

Tel (755) 83448688, Fax (755) 83442996, E-Mail:info@timeway-lab.com

Report No.: TW2411006-02E Page 2 of 31

Date: 2024-11-08



Special Statement:

FCC-Registration No.: 744189

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 744189.

Industry Canada (IC) —Registration No.:5205A

The EMC Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 5205A.

A2LA (Certification Number:5013.01)

The EMC Laboratory has been accredited by the American Association for Laboratory Accreditation (A2LA). Certification Number:5013.01

CAB identifier: CN0033

Date: 2024-11-08



Test Report Conclusion

Content General Details 1.0 1.1 Test Lab Details.... 4 1.2 Applicant Details.... 4 1.3 Description of EUT 4 1.4 Submitted Sample.... 4 Test Duration. 1.5 5 5 1.6 Test Uncertainty. 1.7 Test By..... 5 2.0 List of Measurement Equipment. 6 7 3.0 Technical Details..... 3.1 Summary of Test Results.... 7 3.2 7 Test Standards.... 4.0 7 EUT Modification.... 5.0 Power Line Conducted Emission Test. 8 5.1 Schematics of the Test..... 8 Test Method and Test Procedure.... 5.2 8 Configuration of the EUT..... 5.3 8 5.4 EUT Operating Condition.... 9 9 5.5 Conducted Emission Limit..... 5.6 Test Result. 6.0 Radiated Emission test.... 10 Test Method and Test Procedure. 10 6.1 6.2 Configuration of the EUT..... 11 EUT Operation Condition.... 6.3 11 6.4 Radiated Emission Limit.... 12 6.5 Test Result. 13 7.0 Band Edge.... 21 7.1 Test Method and Test Procedure.... 21 7.2 Radiated Test Setup. 21 7.3 Configuration of the EUT..... 21 7.4 EUT Operating Condition.... 21 7.5 Band Edge Limit. 21 7.6 Band Edge Test Result. 22 8.0 Antenna Requirement..... 26 9.0 20dB bandwidth measurement.... 27 FCC ID Label.... 10.0 30

The report refers only to the sample tested and does not apply to the bulk.

11.0

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Photo of Test Setup and EUT View....

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Date: 2024-11-08



1.0 General Details

1.1 Test Lab Details

Name: SHENZHEN TIMEWAY TESTING LABORATORIES.

Address: Zone C, 1st Floor, Block B, Jun Xiang Da Building, Zhongshan Park Road West, Tong Le

Village, Nanshan District, Shenzhen, China

Telephone: (755) 83448688 Fax: (755) 83442996

Site on File with the Federal Communications Commission – United Sates

Registration Number: 744189 For 3m Anechoic Chamber

1.2 Applicant Details

Applicant: Shenzhen SQT Electronics Co., Ltd

Address: ZhengChengFeng TechnologyZone Xinsha Road, ShaYi Village, Sha jing Town, Baoan

Area, Shenzhen, China

1.3 Description of EUT

Product: BT + Wireless dual-mode keyboard

Manufacturer: Shenzhen SQT Electronics Co., Ltd

Address: ZhengChengFeng TechnologyZone Xinsha Road, ShaYi Village, Sha jing

Town, Baoan Area, Shenzhen, China

Trademark: N/A
Additional Trademark: N/A

Model Number: SK-695DM

Additional Model Name ANNI, SK-697DM

Hardware Version: VER:1.2

Software Version: 241024_蓝牙名 fsqsg_SK695_3V.dat 标识"N2"

Serial No.: SK695DM240800611

Rating: DC3V, 8mA

Battery: DC3.0V, 2pc AAA battery
Modulation Type: GFSK (Bluetooth Low Energy)

Operation Frequency: 2402-2480MHz

Channel Separate: 2MHz Channel Number: 40

Antenna Designation PCB antenna with gain -0.61dBi Max (Get from the antenna specification)

1.4 Submitted Sample: 4 Samples

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No.: TW2411006-02E Page 5 of 31

Date: 2024-11-08



1.5 Test Duration

2024-11-01 to 2024-11-08

1.6 Test Uncertainty

Conducted Emissions Uncertainty =3.6dB

Radiated Emissions below 1GHz Uncertainty =4.7dB

Radiated Emissions above 1GHz Uncertainty =6.0dB

Conducted Power Uncertainty =6.0dB

Occupied Channel Bandwidth Uncertainty = 5%

Conducted Emissions Uncertainty =3.6dB

Note: The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.

1.7 Test Engineer

The sample tested by

Print Name: Terry Tang

Page 6 of 31

Report No.: TW2411006-02E

Date: 2024-11-08



2.0 Test Equipment						
Instrument Type	Manufacturer	Model	Serial No.	Date of Cal.	Due Date	
ESPI Test Receiver	R&S	ESPI 3	100379	2024-07-12	2025-07-11	
LISN	R&S	EZH3-Z5	100294	2024-07-12	2025-07-11	
LISN	R&S	EZH3-Z5	100253	2024-07-12	2025-07-11	
Impuls-Begrenzer	R&S	ESH3-Z2	100281	2024-07-12	2025-07-11	
Loop Antenna	EMCO	6507	00078608	2022-07-18	2025-07-17	
Spectrum	R&S	FSIQ26	100292	2024-07-12	2025-07-11	
Horn Antenna	A-INFO	LB-180400-KF	J211060660	2022-07-18	2025-07-17	
Horn Antenna	R&S	BBHA 9120D	9120D-631	2022-07-18	2025-07-17	
Power meter	Anritsu	ML2487A	6K00003613	2024-07-12	2025-07-11	
Power sensor	Anritsu	MA2491A	32263	2024-07-12	2025-07-11	
Bilog Antenna	Schwarebeck	VULB9163	9163/340	2022-07-18	2025-07-17	
9*6*6 Anechoic			N/A	2022-07-26	2025-07-25	
EMI Test Receiver	RS	ESVB	826156/011	2024-07-12	2025-07-11	
EMI Test Receiver	RS	ESCS 30	834115/006	2024-07-12	2025-07-11	
Spectrum	HP/Agilent	E4407B	MY50441392	2024-07-12	2025-07-11	
Spectrum	RS	FSP	1164.4391.38	2024-07-12	2025-07-11	
RF Cable	Zhengdi	ZT26-NJ-NJ-8M/FA		2024-07-12	2025-07-11	
RF Cable	Zhengdi	7m		2024-07-12	2025-07-11	
Pre-Amplifier	Schwarebeck	BBV9743	#218	2024-07-12	2025-07-11	
Pre-Amplifier	HP/Agilent	8449B	3008A00160	2024-07-12	2025-07-11	
LISN	SCHAFFNER	NNB42	00012	2024-07-12	2025-07-11	
ESPI Test Receiver	R&S	ESPI 3	100379	2024-07-12	2025-07-11	
LISN	R&S	EZH3-Z5	100294	2024-07-12	2025-07-11	

2.2 Automation Test Software

For Conducted Emission Test

Name	Version		
EZ-EMC	Ver.EMC-CON 3A1.1		

For Radiated Emissions

Name	Version		
EMI Test Software BL410-EV18.91	V18.905		
EMI Test Software BL410-EV18.806 High Frequency	V18.06		

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 7 of 31

Report No.: TW2411006-02E

Date: 2024-11-08



3.0 Technical Details

3.1 Summary of test results

The EUT has been tested according to the following specifications:

Standard	Test Type	Result	Notes
FCC Part 15, Paragraph 15.203	Antenna Requirement	Pass	Complies
FCC Part 15, Paragraph 15.207	Conducted Emission Test	Pass	N/A
FCC Part 15 Subpart C Paragraph 15.249(a) & 15.249(b) Limit	Field Strength of Pass Fundamental		Complies
FCC Part 15, Paragraph 15.209	Radiated Emission Test	Pass	Complies
FCC Part 15 Subpart C Paragraph 15.249(d) Limit	Band Edge Test	Pass	Complies

3.2 Test Standards

FCC Part 15 Subpart C, Paragraph 15.249, ANSI C63.4:2014 and ANSI C63.10:2013

4.0 EUT Modification


No modification by SHENZHEN TIMEWAY TESTING LABORATORIES

Date: 2024-11-08



5. Power Line Conducted Emission Test

5.1 Schematics of the test

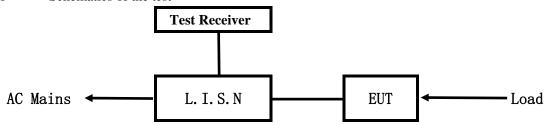


EUT: Equipment Under Test

5.2 Test Method and test Procedure

The EUT was tested according to ANSI C63.10-2013. The Frequency spectrum from 0.15MHz to 30MHz was investigated. The LISN used was 50ohm/50uH as specified by section 5.1 of ANSI C63.10 –2013.

Test Voltage: N/A

Block diagram of Test setup

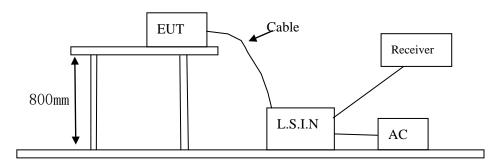

5.3 Configuration of the EUT

The EUT was configured according to ANSI C63.10-2013. All interface ports were connected to the appropriate peripherals. All peripherals and cables are listed below.

79 channels are provided to the EUT

A. EUT

Device	Manufacturer	Model	FCC ID	
BT + Wireless dual-mode	Shenzhen SQT	SK-695DM, ANNI,	WOX-SK-695DM	
keyboard	Electronics Co., Ltd	SK-697DM	WOA-SK-093DM	

The report refers only to the sample tested and does not apply to the bulk.

Page 9 of 31

Report No.: TW2411006-02E

Date: 2024-11-08



B. Internal Device

Device	Manufacturer	Model	FCC ID/DOC
N/A			

C. Peripherals

ſ	Device	Manufacturer	Model	Rating
ŀ	N/A	Wandiacturer	Wodel	Rating

5.4 EUT Operating Condition

Operating condition is according to ANSI C63.10-2013

- A Setup the EUT and simulators as shown on follow
- B Enable AF signal and confirm EUT active to normal condition

5.5 Power line conducted Emission Limit according to Paragraph 15.207

Frequency	Limits (dB µ V)				
(MHz)	Quasi-peak Level	Average Level			
$0.15 \sim 0.50$	66.0~56.0*	56.0~46.0*			
$0.50 \sim 5.00$	56.0	46.0			
5.00 ~ 30.00	60.0	50.0			

Notes:

- 1. *Decreasing linearly with logarithm of frequency.
- 2. The tighter limit shall apply at the transition frequencies

N/A

5.6 Test Results:

Note: EUT powered by AAA battery, so this test item not applicable.

Report No.: TW2411006-02E Page 10 of 31

Date: 2024-11-08




6 Radiated Emission Test

- 6.1 Test Method and test Procedure:
- (1) The EUT was tested according to ANSI C63.10-2013. The radiated test was performed at Timeway EMC Laboratory. This site is on file with the FCC laboratory division, Registration No. 744189
- (2) The EUT, peripherals were put on the turntable which table size is 1m x 1.5 m, table high 0.8 m. All set up is according to ANSI C63.10-2013.
- (3) The frequency spectrum from 30 MHz to 25 GHz was investigated. All readings from 30 MHz to 1 GHz are quasi-peak values with a resolution bandwidth of 120 kHz. All readings are above 1 GHz, peak values with a resolution bandwidth of 1 MHz (Note: for Fundamental frequency radiated emission measurement, RBW=3MHz, VBW=10MHz). Measurements were made at 3 meters.
- (4) The antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency.
- (5) The antenna polarization: Vertical polarization and Horizontal polarization.

Block diagram of Test setup

For radiated emissions from 9kHz to 30MHz

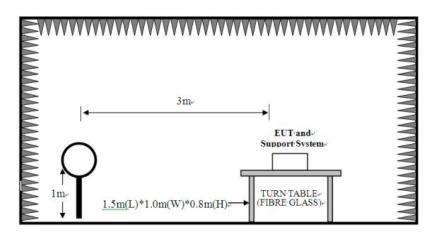


Page 11 of 31

Report No.: TW2411006-02E


Date: 2024-11-08



For radiated emissions from 30MHz to1GHz

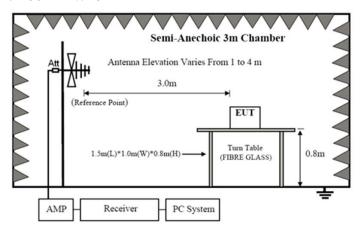

For radiated emissions above 1GHz

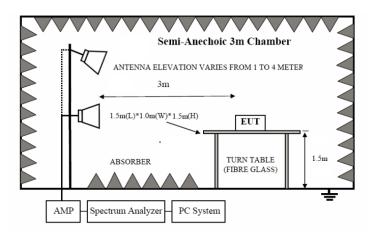

- 6.2 Configuration of The EUT

 Same as section 5.3 of this report
- 6.3 EUT Operating Condition

 Same as section 5.4 of this report.

Report No.: TW2411006-02E Page 12 of 31

Date: 2024-11-08



6.4 Radiated Emission Limit

All emission from a digital device, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strength specified below:

A FCC Part 15 Subpart C Paragraph 15.249(a) Limit

Fundamental Frequency	Field Stre	ength of Fundame	ntal (3m)	Field Strength of Harmonics (3m)			
(MHz)	mV/m dBuV/m			uV/m	dBuV/m		
2400-2483.5	50	94 (Average)	114 (Peak)	500	54 (Average)	74 (Peak)	

Note:

- 1. RF Field Strength (dBuV) = 20 log RF Voltage (uV)
- 2.Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.
- 3. The emission limit in this paragraph is based on measurement instrumentation employing an average detector.

B. Frequencies in restricted band are complied to limit on Paragraph 15.209.

Frequency Range (MHz)	Distance (m)	Field strength (dB μ V/m)		
0.009-0.490	3	20log(2400/F(kHz)) +40log (300/3)		
0.490-1.70	3	20log(24000/F(kHz)) +40log (30/3)		
1.705-30	3	69.5		
30-88	3	40.0		
88-216	3	43.5		
216-960	3	46.0		
Above 960	3	54.0		

Note:

- 1. RF Voltage $(dBuV) = 20 \log RF \text{ Voltage } (uV)$
- 2. In the Above Table, the tighter limit applies at the band edges.
- 3. Distance refers to the distance in meters between the measuring instrument antenna and the EUT
- 4. All scanning using PK detector. And the final emission level was get using QP detector for frequency range from 30-1000MHz.As to 1G-25G, the final emission level got using PK. For fundamental measurement, PK detector used.
- 5. For radiated emissions from 9kHz to 30MHz, the emission level is much less than the limit for more than 20dB. No necessary to take down the record.
- 6. Battery full charged during tests.

Report No.: TW2411006-02E Page 13 of 31

Date: 2024-11-08




6.5 Test result

A Fundamental & Harmonics Radiated Emission Data

Please refer to the following test plots for details: Low Channel-2402MHz

Horizontal

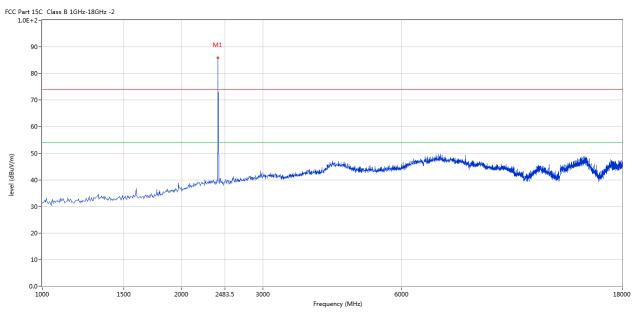


No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
1	2402	85.85	-3.57	114.0	-28.15	Peak	166.00	100	Horizontal	Pass

Report No.: TW2411006-02E Page 14 of 31

Date: 2024-11-08



Vertical

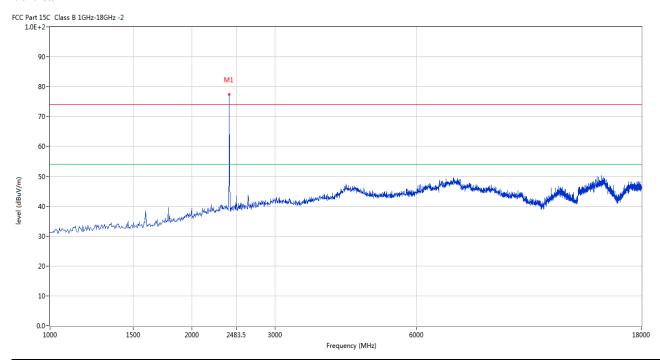

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
1	2402	77.35	-3.57	114.0	-36.65	Peak	333.00	100	Vertical	Pass


Report No.: TW2411006-02E Page 15 of 31

Date: 2024-11-08



Please refer to the following test plots for details: Middle Channel-2440MHz

Horizontal

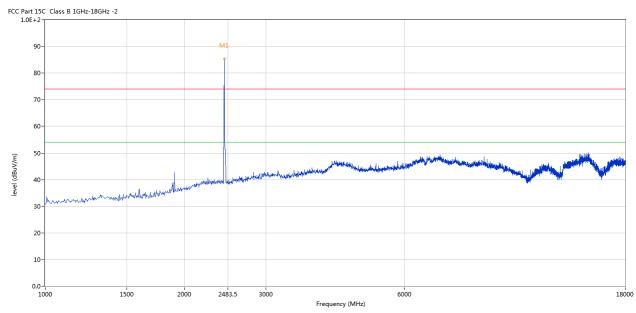


No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
1	2441	85.22	-3.57	114.0	-28.78	Peak	118.00	100	Horizontal	Pass

Report No.: TW2411006-02E Page 16 of 31

Date: 2024-11-08



Vertical

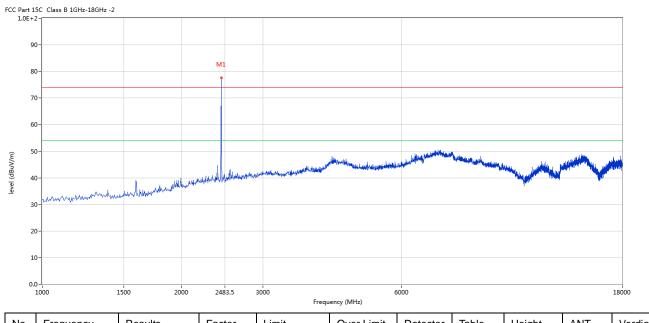

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
1	2441	77.66	-3.57	114.0	-36.34	Peak	150.00	100	Vertical	Pass


Report No.: TW2411006-02E Page 17 of 31

Date: 2024-11-08



Please refer to the following test plots for details: High Channel-2480MHz

Horizontal

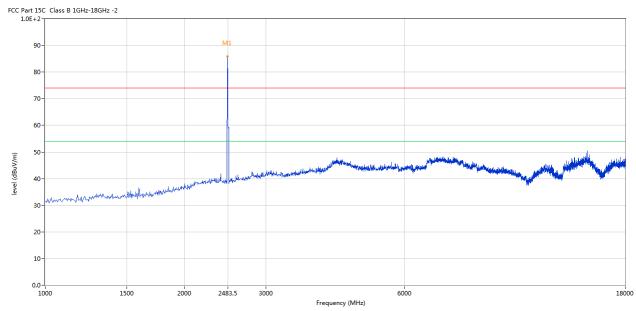

Ī	No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
		(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
	1	2480	85.86	-3.57	114.0	-28.14	Peak	162.00	100	Horizontal	Pass


Page 18 of 31

Report No.: TW2411006-02E

Date: 2024-11-08



Vertical

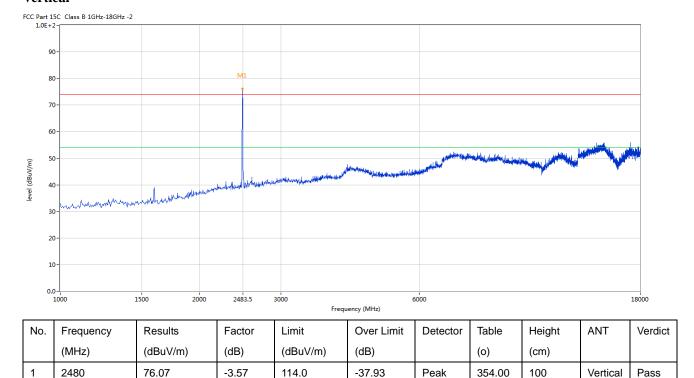

Note: (2) Emission Level = Reading Level + Antenna Factor + Cable Loss-Amplifier

- (3) Margin=Emission-Limits
- (4) According to section 15.35(b), the peak limit is 20dB higher than the average limit
- (5) For test purpose, keep EUT continuous transmitting
- (5) For emission above 18GHz and Below 30MHz, It is only the floor noise. No necessary to take down.
- (6) the measured PK value less than the AV limit.

Report No.: TW2411006-02E Page 19 of 31

Date: 2024-11-08




B. General Radiated Emission Data Radiated Emission In Horizontal (30MHz----1000MHz)

EUT set Condition: Keep Tx transmitting

Results: Pass

Please refer to following diagram for individual

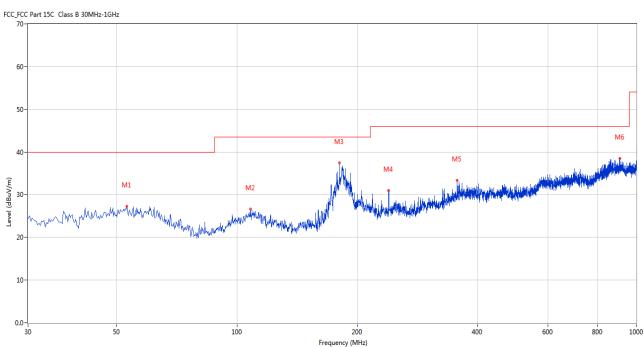

No.	Frequency	Results	Factor	Limit	Margin	Detector	Table	Height	Antenna	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(Degree)	(cm)		
1	53.032	27.29	-5.03	40.0	12.71	Peak	181.00	100	Horizontal	Pass
2	108.065	26.62	-5.99	43.5	16.88	Peak	306.00	100	Horizontal	Pass
3	180.555	37.49	-7.93	43.5	6.01	Peak	256.00	100	Horizontal	Pass
4	239.953	30.94	-5.65	46.0	15.06	Peak	196.00	100	Horizontal	Pass
5	356.081	33.31	-2.17	46.0	12.69	Peak	24.00	100	Horizontal	Pass
6	908.600	38.44	5.13	46.0	7.56	Peak	284.00	100	Horizontal	Pass

Report No.: TW2411006-02E Page 20 of 31

Date: 2024-11-08




Radiated Emission In Vertical (30MHz----1000MHz)

EUT set Condition: Keep Tx transmitting

Results: Pass

Please refer to following diagram for individual

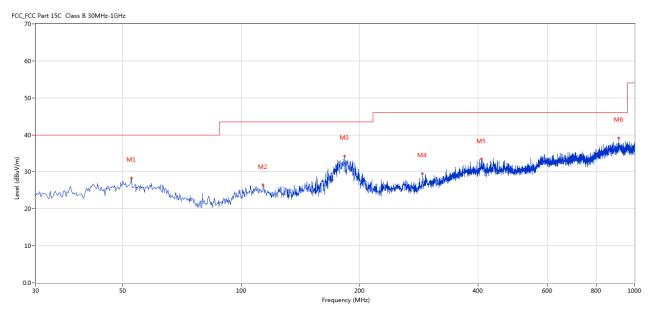

No.	Frequency	Results	Factor	Limit	Margin	Detector	Table	Height	Antenna	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(Degree)	(cm)		
1	52.547	28.32	-4.94	40.0	11.68	Peak	38.00	100	Vertical	Pass
2	113.642	26.43	-6.49	43.5	17.07	Peak	219.00	100	Vertical	Pass
3	182.979	34.32	-7.37	43.5	9.18	Peak	237.00	100	Vertical	Pass
4	288.440	29.49	-4.46	46.0	16.51	Peak	324.00	100	Vertical	Pass
5	407.963	33.44	-1.16	46.0	12.56	Peak	276.00	100	Vertical	Pass
6	913.692	39.13	5.33	46.0	6.87	Peak	286.00	100	Vertical	Pass

Date: 2024-11-08




7. Band Edge

7.1 Test Method and test Procedure:

- (1) The EUT was tested according to ANSI C63.10–2013. The radiated test was performed at Timeway EMC Laboratory. This site is on file with the FCC laboratory division, Registration No. 744189
- (2) Set Spectrum as RBW=1MHz, VBW=3MHz and Peak detector used for PK value. RBW=1MHz, VBW=10Hz and Peak detector used for AV value.
- (3) The antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency.
- (4) The antenna polarization: Vertical polarization and Horizontal polarization.

7. 2 Radiated Test Setup

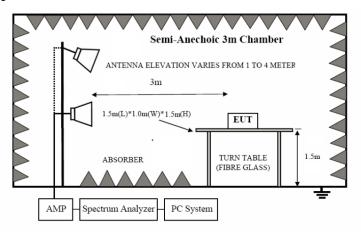

For the actual test configuration, please refer to the related items – Photos of Testing

7.3 Configuration of the EUT

Same as section 5.3 of this report

7.4 EUT Operating Condition

Same as section 5.4 of this report.

7.5 Band Edge Limit

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.


Report No.: TW2411006-02E Page 22 of 31

Date: 2024-11-08



7.6 Test Result

Product:	BT + Wireless dual-mode keyboard	Polarity	Horizontal
Mode	Keeping Transmitting	Test Voltage	DC3.0V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass		

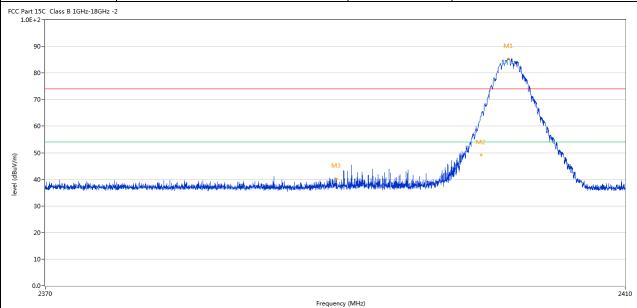


No	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
1	2401.892	85.38	-3.57	74.0	11.38	Peak	163.00	100	Horizontal	N/A
2	2400.000	64.07	-3.57	74.0	-9.93	Peak	158.00	100	Horizontal	Pass
2**	2400.000	49.14	-3.57	54.0	-4.86	AV	158.00	100	Horizontal	Pass
3	2390.000	40.14	-3.53	74.0	-33.86	Peak	62.00	100	Horizontal	Pass

Report No.: TW2411006-02E Page 23 of 31

Date: 2024-11-08



	Vertical	Detector	BT + Wireless dual-mode keyboard	Product:
	DC3.0V	Test Voltage	Keeping Transmitting	Mode
	56% RH	Humidity	24 deg. C,	Temperature
			Pass	Test Result:
_				Test Result: FCC Part 15C Class B 1GHz-18GHz -1 1.0E+2

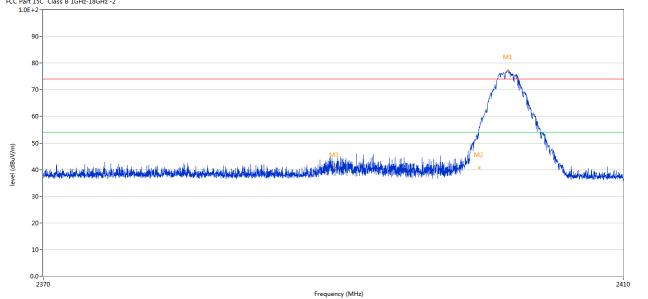

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
1	2401.992	77.25	-3.57	74.0	3.25	Peak	329.00	100	Vertical	N/A
2	2400.000	55.85	-3.57	74.0	-18.15	Peak	288.00	100	Vertical	Pass
2**	2400.000	40.72	-3.57	54.0	-13.28	AV	288.00	100	Vertical	Pass
3	2390.000	40.56	-3.53	74.0	-33.44	Peak	182.50	100	Vertical	Pass

Report No.: TW2411006-02E Page 24 of 31

Date: 2024-11-08



J	Product:	BT + Win	eless dual	l-mode keyboa	ırd	Polarity		Н	orizontal	
	Mode	Ke	eping Tra	nsmitting	To	est Voltage	e	Γ	DC3.0V	
Te	mperature		24 deg	g. C,]	Humidity		5	6% RH	
Te	est Result:		Pas	S						
C Part 1	LSC Class B 1GHz-18GHz =	-2								
. 50		Missouri annis-manishi peliti melitika katalah katalah katalah katalah katalah katalah katalah katalah katalah	M1	Markon Ma	· Anterior construction and the	s Affin kalder op to land on a state of the	isobweed morning and Addition	isterna oly dollarovo y	of was himbooks of water allow a like	Allandinasee
	0-									
,										
20	0-									
20	0-									
20	0-			2483.5 Fre	equency (MHz)					2500
10	0-	Results	Factor	Fre	equency (MHz) Over	Detector	Table	Height	ANT	ı
10	0-	Results (dBuV/m)	Factor (dB)	Limit		Detector	Table (o)	Height (cm)	ANT	ı
20	o- 2470 Frequency			Limit (dBuV/m)	Over	Detector Peak			ANT Horizontal	2500 Verdi

Report No.: TW2411006-02E Page 25 of 31

Date: 2024-11-08



	Product:	BT + Wir	eless dual-	mode keyboard	l De	etector		Vei	tical	
	Mode	Ke	eping Tran	nsmitting	Test	Voltage		DC	3.0V	
Te	mperature		24 deg.	С,	Hu	midity		56%	6 RH	
Te	est Result:		Pass	!						
Part 1 1.0E+	L5C Class B 1GHz-18GHz -	-2								
9	0-									
8	0-		M1	An						
7	0-		my 4 W	M _M						
6	0-		Jal Jan	Ma.						
				414						
5	0-		T ^{al}	₩.						
	0-11	z kirkyzd stolacz Z kold docista wiele d	J ^M	M ₂		والمناد المراجع	ah tuhun dibih se distan	ing transport to be properly		
4	O-Amarika da Marika da Mar	a terland solve to make the passed	J ^{el}	M2 M2			a produce de la compansión de la compans		Lightedaraged Ausglieghi	hole ball
3	0-		J ^M	M2					Light short was a straight.	A A A A A A A A A A A A A A A A A A A
3	O-Amarika da Marika da Mar	a Stabilist de politicis de la compansa de la comp		M2	ik din bish bishka	بالمغم أراب بالمعالم	ok dankarahlisk reptabentu	ha dhean in jada hada dhe	Little to made and	hold the
3	0-	a farkiyaldarikir idi aldı desirin metal		M2	Addishbulk	الماداد في الماداد الم		koltoniojeko kirkut	li dei de versione de la contrada d	
4 3 2 1 1 O.	0-	a julyadanin al-lahih kabupatan		M2		المائد أنبار فرزما أناسه	de goden district e deserbu	k pi te a viz jek ka kir koji	l de de constante de la consta	2500
4 3 2 1 1 0.		a Stabusel Andrew Alanda Maria Canada d			ency (MHz)	and disciplinated and the	akanda atau atau da	ka kacia bahahan	liste de come de la coloción	2500
4-33-2-1-0.		Results	Factor	Limit (ency (MHz) Over Limit	Detector	Table	Height	ANT	ı
4 3 2 1 1 O.	0-0-0-0-2470		Factor (dB)	Limit (ency (MHz)					2500 Verdi
4-33-2-1-0.	0	Results		Limit (dBuV/m) (ency (MHz) Over Limit		Table	Height		I

Date: 2024-11-08



Page 26 of 31

8.0 Antenna Requirement

Applicable Standard

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

This product has a PCB antenna with gain -0.61dBi maximum. It fulfills the requirement of this section.

Test Result: Pass

Page 27 of 31

Report No.: TW2411006-02E

Date: 2024-11-08



Product:	BT + Wir	reless dual	-mode k	eyboard		Test Mode	:	Keep trans	mitting
Mode	Ke	eeping Tra	nsmittin	g		Test Voltag	ge	DC3.0)V
Гетрегаture		24 deg	. C,			Humidity		56% F	RH
Test Result:		Pass	S			Detector		PK	
dB Bandwidth		1.206N	ſНz						
Ref 10 dE	sm	*Att 20	dB	*RBW 30 *VBW 10 SWT 5	00 k] 9.39 dBm 8000 GHz	
10						ndB BW Temp	[Tl] 20 1.206000 1 [Tl no	0000 MHz	A
-10			1			Temp	-29 2.401382	9.60 dBm 2000 GHz	
20		\mathcal{M}	<i>)\</i> \\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\	ww	1	Λ		9.29 dBm 8000 GHz	
30						12			
40	Now					- CAN	~~		
-50	<i>J</i>						\\	1	3DB
60								WW	
70									
80									
-90 Center 2.4	103 CH-		300	kHz/			G.	an 3 MHz	
CCIICEL 2.5	.02 0112		300	/			39	an o miz	

The report refers only to the sample tested and does not apply to the bulk.

Date: 8.NOV.2024 09:29:36


Page 28 of 31

Report No.: TW2411006-02E

Date: 2024-11-08



Product:	BT + Wireless dual-mode keyboard	Test Mode:	Keep transmitting
Mode	Keeping Transmitting	Test Voltage	DC3.0V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK
20dB Bandwidth	1.200MHz		

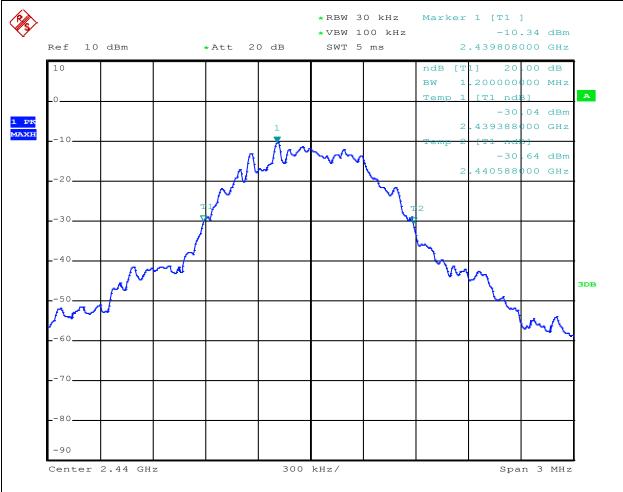

Date: 8.NOV.2024 09:30:10


Page 29 of 31

Report No.: TW2411006-02E

Date: 2024-11-08



Product:	BT + Wireless dual-mode keyboard	Test Mode:	Keep transmitting
Mode	Keeping Transmitting	Test Voltage	DC3.0V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK
20dB Bandwidth	1.200MHz		

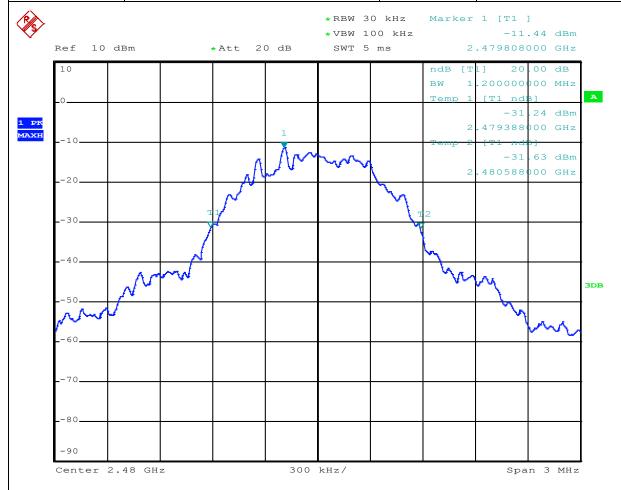

Date: 8.NOV.2024 09:30:57

Report No.: TW2411006-02E Page 30 of 31

Date: 2024-11-08



10.0 FCC ID Label


FCC ID: WOX-SK-695DM

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) this device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation

The label must not be a stick-on paper label. The label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

Mark Location:

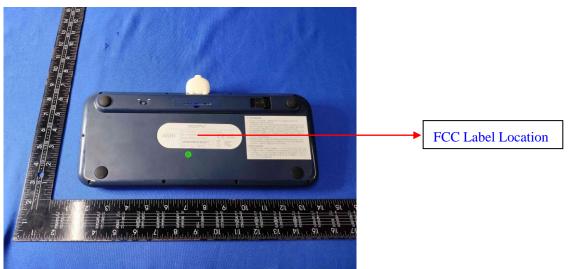

Date: 2024-11-08



11.0 Photo of testing

11.1 Conducted test View—N/A

Radiated emission test view



Photographs - EUT

Please refer test report TW2411006-01E

-- End of the report--

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.