

Applicant: Shenzhen SQT Electronics Co.,Ltd

Product: BT+wireless dual-mode Mouse

Model No.: Candy Pro, SMK-646M3DM, SMK-646M2DM,

SMK-646M4DM, SMK-646386DM, SMK-646385DM, M3DM

Trademark: GEEZER, MOFII

Test Standards: FCC Part 15.249

Test result:

It is herewith confirmed and found to comply with the

requirements set up by ANSI C63.10 & FCC Part 15 Subpart C,

Paragraph 15.249 regulations for the evaluation of

electromagnetic compatibility

Approved By

Terry long

Terry Tang

Manager

Dated: August 28, 2023

Results appearing herein relate only to the sample tested The technical reports is issued errors and omissions exempt and is subject to withdrawal at

SHENZHEN TIMEWAY TESTING LABORATORIES

Zone C, 1st Floor, Block B, Jun Xiang Da Building, Zhongshan Park Road West, Tong Le Village, Nanshan District, Shenzhen, China

Tel (755) 83448688, Fax (755) 83442996, E-Mail:info@timeway-lab.com



Report No.: TW2308078-02E Page 2 of 32

Date: 2023-08-28



Special Statement:

FCC-Registration No.: 744189

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 744189.

Industry Canada (IC) — Registration No.:5205A

The EMC Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 5205A.

A2LA (Certification Number:5013.01)

The EMC Laboratory has been accredited by the American Association for Laboratory Accreditation (A2LA). Certification Number:5013.01

Date: 2023-08-28



Test Report Conclusion

('ont	tent	
COII	ıcııı	

1.0	General Details	4
1.1	Test Lab Details	4
1.2	Applicant Details	4
1.3	Description of EUT	4
1.4	Submitted Sample	4
1.5	Test Duration.	5
1.6	Test Uncertainty	5
1.7	Test By	5
2.0	List of Measurement Equipment	6
3.0	Technical Details	7
3.1	Summary of Test Results	7
3.2	Test Standards	7
4.0	EUT Modification	7
5.0	Power Line Conducted Emission Test	8
5.1	Schematics of the Test	8
5.2	Test Method and Test Procedure	8
5.3	Configuration of the EUT	8
5.4	EUT Operating Condition.	9
5.5	Conducted Emission Limit.	9
5.6	Test Result.	9
6.0	Radiated Emission test	10
6.1	Test Method and Test Procedure.	10
6.2	Configuration of the EUT	11
6.3	EUT Operation Condition.	11
6.4	Radiated Emission Limit.	11
6.5	Test Result.	13
7.0	Band Edge	21
7.1	Test Method and Test Procedure.	21
7.2	Radiated Test Setup.	21
7.3	Configuration of the EUT	21
7.4	EUT Operating Condition.	21
7.5	Band Edge Limit.	21
7.6	Band Edge Test Result.	22
8.0	Antenna Requirement	26
9.0	20dB bandwidth measurement	27
10.0	FCC ID Label	37
11.0	Photo of Test Setup and EUT View	38

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Date: 2023-08-28



1.0 General Details

1.1 Test Lab Details

Name: SHENZHEN TIMEWAY TESTING LABORATORIES.

Address: Zone C, 1st Floor, Block B, Jun Xiang Da Building, Zhongshan Park Road West, Tong Le

Village, Nanshan District, Shenzhen, China

Telephone: (755) 83448688 Fax: (755) 83442996

Site on File with the Federal Communications Commission – United Sates

Registration Number: 744189 For 3m Anechoic Chamber

1.2 Applicant Details

Applicant: Shenzhen SQT Electronics Co.,Ltd

Address: ZhengChengFeng TechnologyZone Xinsha Road,ShaYi Village, Sha jing Town, Baoan Area,

Shenzhen, China

Telephone: 0755-27568078 Fax: 0755-27568223

1.3 Description of EUT

Product: BT+wireless dual-mode Mouse

Manufacturer: Shenzhen SOT Electronics Co.,Ltd

Address: ZhengChengFeng TechnologyZone Xinsha Road,ShaYi Village, Sha jing Town,

Baoan Area, Shenzhen, China

Trademark: GEEZER, MOFII

Model Number: Candy Pro

Additional SMK-646M3DM, SMK-646M2DM, SMK-646M4DM, SMK-646386DM,

Model Name: SMK-646385DM, M3DM

Rating: DC1.5V

Battery: DC1.5V (1pc AA battery)

Modulation Type: GFSK (Bluetooth Low Energy)

Operation Frequency: 2402-2480MHz

Channel Separate: 2MHz
Channel Number: 40

Hardware Version: M3DM S-2858

Software Version: YC1056-BT V6.N.1_SVN2297_M3_20230601_Candy Pro BT

Serial No.: SMK646M3D230600297

Antenna Designation: PCB Printed Antenna with gain -0.93dBi Max (Get from the antenna specification)

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No.: TW2308078-02E Page 5 of 32

Date: 2023-08-28



1.4 Submitted Sample: 2 Samples

1.5 Test Duration 2023-08-03 to 2023-08-28

1.6 Test Uncertainty

Conducted Emissions Uncertainty =3.6dB

Radiated Emissions below 1GHz Uncertainty =4.7dB

Radiated Emissions above 1GHz Uncertainty =6.0dB

Conducted Power Uncertainty = 6.0dB

Occupied Channel Bandwidth Uncertainty = 5%

Conducted Emissions Uncertainty = 3.6dB

Note: The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.

1.7 Test Engineer

The sample tested by

Print Name: Andy Xing

Page 6 of 32

Report No.: TW2308078-02E

Date: 2023-08-28



2.0 Test Equipment						
Instrument Type	Manufacturer	Model	Serial No.	Date of Cal.	Due Date	
ESPI Test Receiver	R&S	ESPI 3	100379	2023-07-14	2024-07-13	
LISN	R&S	EZH3-Z5	100294	2023-07-14	2024-07-13	
LISN	R&S	EZH3-Z5	100253	2023-07-14	2024-07-13	
Impuls-Begrenzer	R&S	ESH3-Z2	100281	2023-07-14	2024-07-13	
Loop Antenna	EMCO	6507	00078608	2022-07-18	2025-07-17	
Spectrum	R&S	FSIQ26	100292	2023-07-14	2024-07-13	
Horn Antenna	A-INFO	LB-180400-KF	J211060660	2022-07-18	2025-07-17	
Horn Antenna	R&S	BBHA 9120D	9120D-631	2022-07-18	2024-07-17	
Power meter	Anritsu	ML2487A	6K00003613	2023-07-14	2024-07-13	
Power sensor	Anritsu	MA2491A	32263	2023-07-14	2024-07-13	
Bilog Antenna	Schwarebeck	VULB9163	9163/340	2022-07-18	2025-07-17	
9*6*6 Anechoic		-	N/A	2022-07-26	2025-07-25	
EMI Test Receiver	RS	ESVB	826156/011	2023-07-14	2024-07-13	
EMI Test Receiver	RS	ESCS 30	834115/006	2023-07-14	2024-07-13	
Spectrum	HP/Agilent	E4407B	MY50441392	2023-07-14	2024-07-13	
Spectrum	RS	FSP	1164.4391.38	2023-07-14	2024-07-13	
RF Cable	Zhengdi	ZT26-NJ-NJ-8M/FA		2023-07-14	2024-07-13	
RF Cable	Zhengdi	7m		2023-07-14	2024-07-13	
Pre-Amplifier	Schwarebeck	BBV9743	#218	2023-07-14	2024-07-13	
Pre-Amplifier	HP/Agilent	8449B	3008A00160	2023-07-14	2024-07-13	
LISN	SCHAFFNER	NNB42	00012	2023-07-14	2024-07-13	
ESPI Test Receiver	R&S	ESPI 3	100379	2023-07-14	2024-07-13	
LISN	R&S	EZH3-Z5	100294	2023-07-14	2024-07-13	

2.2 Automation Test Software

For Conducted Emission Test

Name	Version	
EZ-EMC	Ver.EMC-CON 3A1.1	

For Radiated Emissions

Name	Version
EMI Test Software BL410-EV18.91	V18.905
EMI Test Software BL410-EV18.806 High Frequency	V18.06

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 7 of 32

Report No.: TW2308078-02E

Date: 2023-08-28



3.0 Technical Details

3.1 Summary of test results

The EUT has	been tested	l according to	o the foll	owing s	specifications:

Standard	Test Type	Result	Notes
FCC Part 15, Paragraph 15.203	Antenna Requirement	Pass	Complies
FCC Part 15, Paragraph 15.207	Conducted Emission Test	N/A	N/A
FCC Part 15 Subpart C Paragraph 15.249(a) & 15.249(b) Limit	Field Strength of Fundamental	Pass	Complies
FCC Part 15, Paragraph 15.209	Radiated Emission Test	Pass	Complies
FCC Part 15 Subpart C Paragraph 15.249(d) Limit	Band Edge Test	Pass	Complies
FCC Part 15.215(c)	20dB bandwidth	Pass	Complies

3.2 Test Standards

FCC Part 15 Subpart C, Paragraph 15.249, ANSI C63.4:2014 and ANSI C63.10:2013

4.0 EUT Modification


No modification by SHENZHEN TIMEWAY TESTING LABORATORIES

Date: 2023-08-28



5.0 Power Line Conducted Emission Test

5.1 Schematics of the test

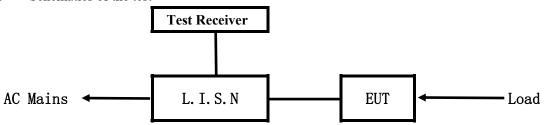


EUT: Equipment Under Test

5.2 Test Method and test Procedure

The EUT was tested according to ANSI C63.10-2013. The Frequency spectrum from 0.15MHz to 30MHz was investigated. The LISN used was 50ohm/50uH as specified by section 5.1 of ANSI C63.10-2013.

Test Voltage: N/A

Block diagram of Test setup

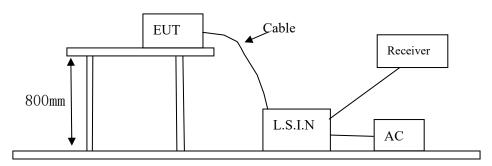

5.3 Configuration of the EUT

The EUT was configured according to ANSI C63.10-2013. All interface ports were connected to the appropriate peripherals. All peripherals and cables are listed below.

40 channels are provided to the EUT

A. EUT

Device	Manufacturer	Model	FCC ID
		Candy Pro, SMK-646M3DM,	
BT+wireless	Shenzhen SQT	SMK-646M2DM, SMK-646M4DM,	WOY CM M2DM
dual-mode Mouse	Electronics Co.,Ltd	SMK-646386DM, SMK-646385DM,	WOX-SM-M3DM
		M3DM	

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Report No.: TW2308078-02E Page 9 of 32

Date: 2023-08-28



B. Internal Device

Device	Manufacturer	Model	FCC ID/DOC
N/A			

C. Peripherals

Device	Manufacturer	Model	Rating
N/A			

5.4 EUT Operating Condition

Operating condition is according to ANSI C63.10-2013

- A Setup the EUT and simulators as shown on follow
- B Enable AF signal and confirm EUT active to normal condition

5.5 Power line conducted Emission Limit according to Paragraph 15.207

Frequency	Limits (dB μ V)		
(MHz)	Quasi-peak Level	Average Level	
$0.15 \sim 0.50$	66.0~56.0*	56.0~46.0*	
$0.50 \sim 5.00$	56.0	46.0	
5.00 ~ 30.00	60.0	50.0	

Notes:

- 1. *Decreasing linearly with logarithm of frequency.
- 2. The tighter limit shall apply at the transition frequencies

5.6 Test Results: N/A

Note: EUT powered by AA battery, this test item not applicable.

Date: 2023-08-28



6 Radiated Emission Test

- 6.1 Test Method and test Procedure:
- (1) The EUT was tested according to ANSI C63.10-2013. The radiated test was performed at Timeway EMC Laboratory. This site is on file with the FCC laboratory division, Registration No. 744189
- (2) The EUT, peripherals were put on the turntable which table size is 1m x 1.5 m, table high 0.8 m. All set up is according to ANSI C63.10-2013.
- (3) The frequency spectrum from 9kHz to 25 GHz was investigated. The frequency spectrum is set as follows:


Frequency	Detector	RBW	VBW	Value
9KHz-150KHz	Quasi-peak	200Hz	600Hz	Quasi-peak
150KHz-30MHz	Quasi-peak	9KHz	30KHz	Quasi-peak
30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak
Above 1GHz	Peak	1MHz	3MHz	Peak
ADOVE IGHZ	Peak	1MHz	10Hz	Average

(Note: for Fundamental frequency radiated emission measurement, RBW=3MHz, VBW=10MHz). Measurements were made at 3 meters.

- (4) The antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency.
- (5) The antenna polarization: Vertical polarization and Horizontal polarization.

Block diagram of Test setup


For radiated emissions from 9kHz to 30MHz

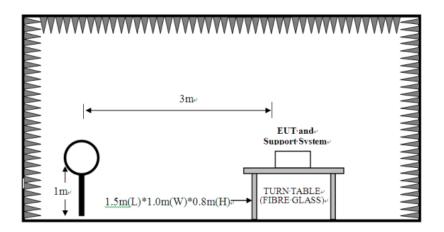


Date: 2023-08-28



For radiated emissions from 30MHz to1GHz

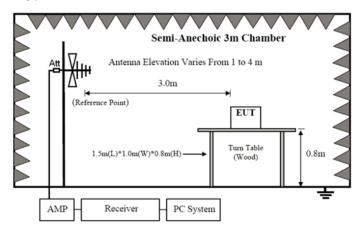

For radiated emissions above 1GHz

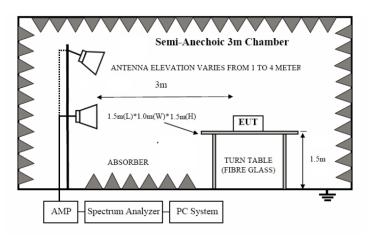

- 6.2 Configuration of the EUT
 Same as section 5.3 of this report
- 6.3 EUT Operating Condition

 Same as section 5.4 of this report.
- 6.4 Radiated Emission Limit

All emission from a digital device, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strength specified below:

A FCC Part 15 Subpart C Paragraph 15.249(a) Limit

Fundamental Frequency	Field Stre	ength of Fundamental (3m)	Field Strength of Harmonics (3m)			
(MHz) mV/		dBuV/m	uV/m	dBuV/m		

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No.: TW2308078-02E Page 12 of 32

Date: 2023-08-28



2400-2483.5 50	94 (Average)	114 (Peak)	500	54 (Average)	74 (Peak)
----------------	--------------	------------	-----	--------------	-----------

Note:

- 1. RF Field Strength (dBuV) = 20 log RF Voltage (uV)
- 2.Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.
- 3. The emission limit in this paragraph is based on measurement instrumentation employing an average detector.

B. Frequencies in restricted band are complied to limit on Paragraph 15.209.

Frequency Range (MHz)	Distance (m)	Field strength (dB μ V/m)
0.009-0.490	3	20log(2400/F(kHz)) +40log (300/3)
0.490-1.705	3	20log(24000/F(kHz)) +40log (30/3)
1.705-30	3	69.5
30-80	3	40.0
88-216	3	43.5
216-960	3	46.0
Above 960	3	54.0

Note:

- 1. RF Voltage $(dBuV) = 20 \log RF \text{ Voltage } (uV)$
- 2. In the Above Table, the tighter limit applies at the band edges.
- 3. Distance refers to the distance in meters between the measuring instrument antenna and the EUT
- 4. All scanning using PK detector. And the final emission level was get using QP detector for frequency range from 30-1000MHz.As to 1G-25G, the final emission level got using PK. For fundamental measurement, PK detector used.
- 5. New battery was used during the test.

Report No.: TW2308078-02E Page 13 of 32

Date: 2023-08-28




6.5 Test result

A Fundamental & Harmonics Radiated Emission Data

Please refer to the following test plots for details: Low Channel-2402MHz

Horizontal

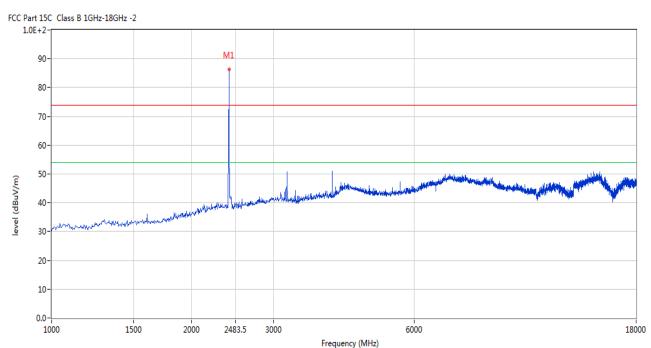


No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)		
1	2402	86.25	-3.57	114.0	-27.75	Peak	0.00	100	Horizontal	Pass

Report No.: TW2308078-02E Page 14 of 32

Date: 2023-08-28



Vertical

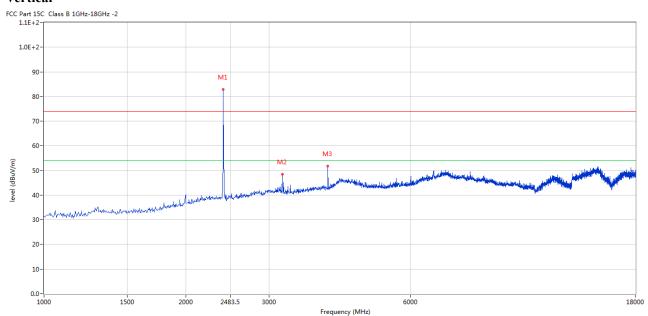

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)		
1	2402	82.63	-3.57	114.0	-31.37	Peak	313.00	100	Vertical	Pass
2	3200.950	48.51	-1.97	74.0	-25.49	Peak	148.00	100	Vertical	Pass
3	4003.999	52.86	1.21	74.0	-21.14	Peak	153.00	100	Vertical	Pass


Report No.: TW2308078-02E Page 15 of 32

Date: 2023-08-28



Please refer to the following test plots for details: Middle Channel-2440MHz

Horizontal

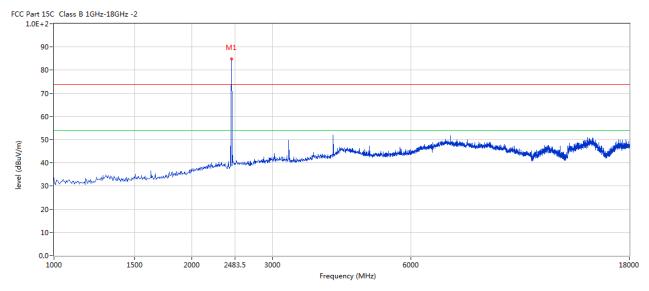

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
1	2440	84.88	-3.57	114.0	-29.12	Peak	334.00	100	Horizontal	Pass


Report No.: TW2308078-02E Page 16 of 32

Date: 2023-08-28



Vertical



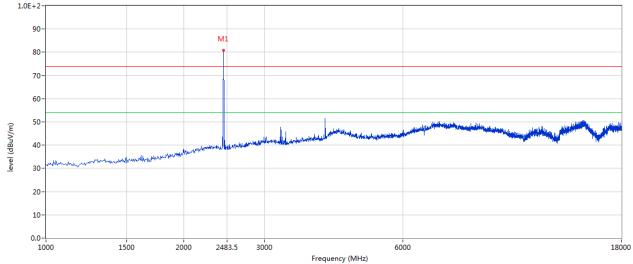

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
1	2440	80.90	-3.57	114.0	-33.10	Peak	11.00	100	Vertical	Pass


Report No.: TW2308078-02E Page 17 of 32

Report No.: TW2308078-0. Date: 2023-08-28



Please refer to the following test plots for details: High Channel-2480MHz

Horizontal

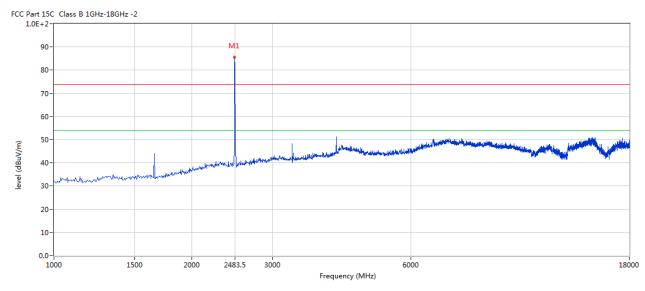

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
1	2480	85.58	-3.57	114.0	-28.42	Peak	158.00	100	Horizontal	Pass


Page 18 of 32

Report No.: TW2308078-02E

Date: 2023-08-28



Vertical

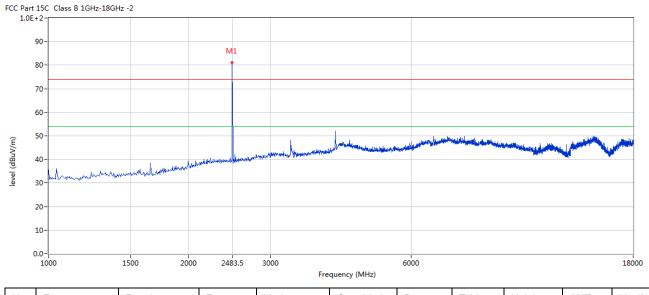

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
1	2480	81.07	-3.57	114.0	-32.93	Peak	351.00	100	Vertical	Pass

Note: (1) Emission Level = Reading Level + Antenna Factor + Cable Loss-Amplifier

- (2) Margin=Emission-Limits
- (3) According to section 15.35(b), the peak limit is 20dB higher than the average limit
- (4) For test purpose, keep EUT continuous transmitting
- (5) For emission above 18GHz and Below 30MHz, It is only the floor noise and less than the limit for more than 20dB. No necessary to take down.
- (6) the measured PK value less than the AV limit.

Date: 2023-08-28




B. General Radiated Emission Data Radiated Emission In Horizontal (30MHz----1000MHz)

EUT set Condition: Keep Tx transmitting

Results: Pass

Please refer to following diagram for individual

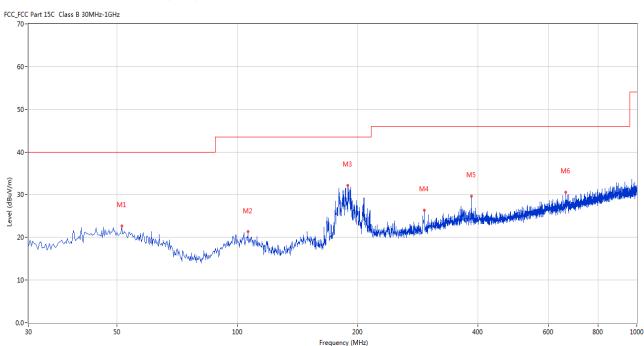

No.	Frequency	Results	Factor	Limit	Margin	Detector	Table	Height	Antenna	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(Degree)	(cm)		
1	51.335	22.63	-11.41	40.0	17.37	Peak	345.00	100	Horizontal	Pass
2	106.368	21.29	-13.34	43.5	22.21	Peak	300.00	100	Horizontal	Pass
3	189.040	32.21	-14.33	43.5	11.29	Peak	215.00	100	Horizontal	Pass
4	294.016	26.37	-11.24	46.0	19.63	Peak	99.00	100	Horizontal	Pass
5	385.174	29.63	-9.18	46.0	16.37	Peak	0.00	100	Horizontal	Pass
6	664.221	30.56	-4.37	46.0	15.44	Peak	191.00	100	Horizontal	Pass

Report No.: TW2308078-02E Page 20 of 32

Date: 2023-08-28




Radiated Emission In Vertical (30MHz----1000MHz)

EUT set Condition: Keep Tx transmitting

Results: Pass

Please refer to following diagram for individual

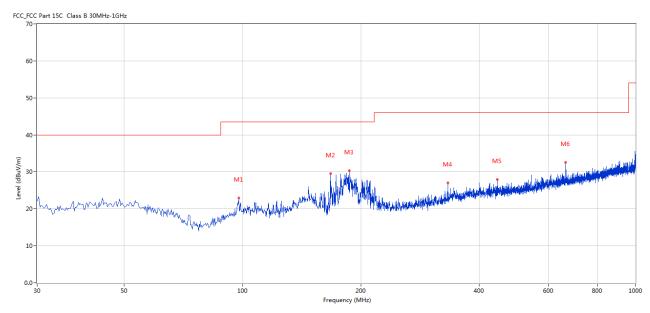

No.	Frequency	Results	Factor	Limit	Margin	Detector	Table	Height	Antenna	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(Degree)	(cm)		
1	97.883	22.99	-13.75	43.5	20.51	Peak	161.00	100	Vertical	Pass
2	167.463	29.59	-16.11	43.5	13.91	Peak	206.00	100	Vertical	Pass
3	186.616	30.27	-14.69	43.5	13.23	Peak	255.00	100	Vertical	Pass
4	333.049	26.98	-10.08	46.0	19.02	Peak	46.00	100	Vertical	Pass
5	445.299	28.00	-8.00	46.0	18.00	Peak	45.00	100	Vertical	Pass
6	663.737	32.58	-4.42	46.0	13.42	Peak	92.00	100	Vertical	Pass

Date: 2023-08-28




7. Band Edge

7.1 Test Method and test Procedure:

- (1) The EUT was tested according to ANSI C63.10–2013. The radiated test was performed at Timeway EMC Laboratory. This site is on file with the FCC laboratory division, Registration No. 744189
- (2) Set Spectrum as RBW=1MHz, VBW=3MHz and Peak detector used for PK value. RBW=1MHz, VBW=10Hz and Peak detector used for AV value.
- (3) The antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency.
- (4) The antenna polarization: Vertical polarization and Horizontal polarization.

7. 2 Radiated Test Setup

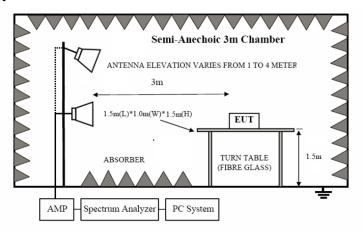

For the actual test configuration, please refer to the related items – Photos of Testing

7.3 Configuration of the EUT

Same as section 5.3 of this report

7.4 EUT Operating Condition

Same as section 5.4 of this report.

7.5 Band Edge Limit

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.

The report refers only to the sample tested and does not apply to the bulk.


Report No.: TW2308078-02E Page 22 of 32

Date: 2023-08-28



7.6 Test Result

Product:	BT+wireless dual-mode Mouse	Polarity	Horizontal
Mode	Keeping Transmitting	Test Voltage	DC1.5V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass		

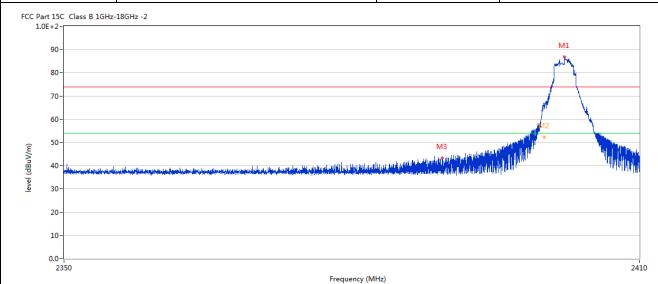


Frequency Results Factor Limit Over Limit Detector Table Height **ANT** Verdict (dBuV/m) (dBuV/m) (MHz) (dB) (dB) (o) (cm) -3.57 2402.127 85.73 74.0 11.73 Peak 0.00 100 Horizontal N/A 1 2 2400.000 65.27 -3.57 74.0 -8.73 Peak 3.00 100 Horizontal Pass 2** 2400.000 52.23 -3.57 54.0 -1.77 ΑV 3.00 100 Horizontal Pass -3.53 74.0 -30.68 Pass 3 2390.115 43.32 Peak 0.00 100 Horizontal

Report No.: TW2308078-02E Page 23 of 32



Product:	BT+wireless dual-mode Mouse	Detector	Vertical
Mode	Keeping Transmitting	Test Voltage	DC1.5V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass		

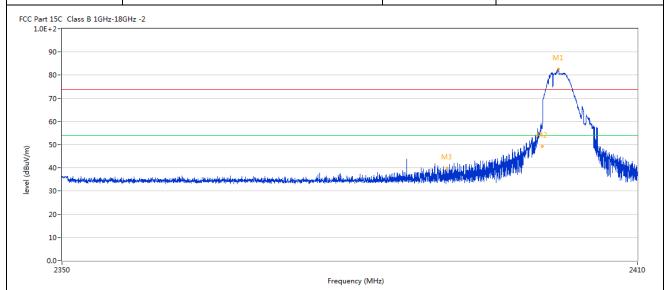


No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
1	2401.647	82.50	-3.57	74.0	8.50	Peak	281.00	100	Vertical	N/A
2	2400.000	62.21	-3.57	74.0	-11.79	Peak	21.00	100	Vertical	Pass
2**	2400.000	49.16	-3.57	54.0	-4.84	AV	21.00	100	Vertical	Pass
3	2390.000	39.70	-3.53	74.0	-34.30	Peak	27.33	100	Vertical	Pass

Report No.: TW2308078-02E Page 24 of 32



Product:	BT+wireless dual-mode Mouse	Polarity	Horizontal
Mode	Keeping Transmitting	Test Voltage	DC1.5V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass		

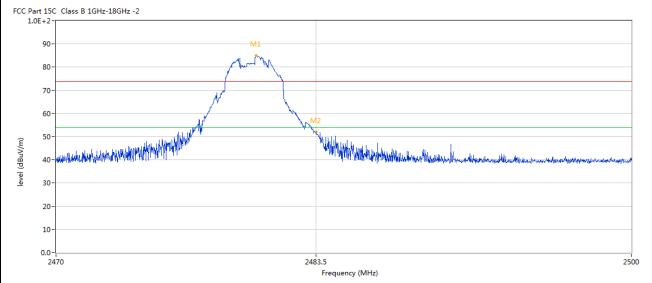

No.	Frequency	Results	Factor	Limit	Over	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	Limit (dB)		(o)	(cm)		
1	2480.397	85.14	-3.57	74.0	11.14	Peak	235.00	100	Horizontal	N/A
2	2483.500	51.91	-3.57	74.0	-22.09	Peak	117.00	100	Horizontal	Pass

Report No.: TW2308078-02E Page 25 of 32



]	Product:	BT+w	ireless dua	l-mode Mou	se	Detec	tor		Vertical		
	Mode	K	eeping Tra	nsmitting		Test Voltage			DC1.5V	DC1.5V	
Temperature Test Result:			24 deg	g. C,		Humidity			56% RH		
			Pas	S							
	rt 15C Class B 1GHz-18 IE+2- 90- 80- 70- 60-	3GHz -2		M1							
level (dBuV/m)	50- 201-2019-00-2019-00-00-00-00-00-00-00-00-00-00-00-00-00	than silver of trid of the first file of the property of the p	M	M2	Hilly list of when the special physical streets and	Legentralization de cape de Maria	europe Nograhadoukergeon	المنافقة وإنصاره والمعارض والمعارض أفا المعارض المافة المعارض المافة المعارض المافة المعارض المافة المعارض الم	inge, ski fyrskipensemen geforflegt	erina de de la como de	
level (dBuV/m)	40	tansilgen(Polis)Polis)Polis)Polis)Polis	, M	2483.		ish Turngeriland makendung-de	anan Manhardan	mangganamy danggalahangga	hat, at her discussing as hating	2500	
	30-	Results	Factor	2483.	.5	Detector	Table	Height	ANT	2500	
	30- 20- 10- 0.0- 2470			2483.	.5 Frequency (MHz)					2500	
(m/\mu (dBu\n/m) level (dBu\n/m)	30- 20- 10- 0.0- 2470	Results	Factor	2483.	.5 Frequency (MHz) Over Limit		Table	Height			

Note: 1. The PK emission level less than the AV limit. No necessary to record the AV emission level.

Date: 2023-08-28



Page 26 of 32

8.0 Antenna Requirement

Applicable Standard

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

This product has a PCB Printed Antenna. The antenna gain is -0.93dBi Max. It fulfills the requirement of this section.

Test Result: Pass

Date: 2023-08-28



Page 27 of 32

9.0 20dB Bandwidth Measurement

Test Configuration



Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 30kHz RBW and 100kHz VBW.

The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.

Limit

N/A

Page 28 of 32

Report No.: TW2308078-02E

Date: 2023-08-28



Test Result

Product:	BT+wirele	ss dual-mode Mouse		Test Mode:		Keep tran	ısmitting	
Mode		ng Transmitting		Test Voltage		DC1.5V		
Temperature	24 deg. C,					56% RH		
Test Result:		Pass		Detector		PK		
20dB Bandwidth		1.263MHz						
\triangle	Marker	1 [T1 ndB]	RI	BW 100 k	Hz RI	F Att	20 dB	
Ref Lvl	ndB	20.00 dB	VE	BW 300 k	Hz			
10 dBm	BW 3	1.26252505 MHz	SV	WT 5 n	ns Ui	nit	dBm	ı
10				v ₁	[T1]		1.85 dBm	
				1		2.40231		A
0			<u> </u>	ndl	8	20	.00 dB	
				BW		1.26252		
-10				VZ.T	[T1]	-19	.26 dBm	
		TI		$oldsymbol{ abla}_{ m T}$	2 F 2 1]	-19	788 GHz	
-20		7		1	, A ₁₊₁	2.40270	040 GHz	
1MAX					\mathrea \tag{\tau}	_		1MA
-30						m		
	-mary						\	
-40								
-50								
-60								
7.0								
-70								
-80								
-90 Center 2.	402 GH2	300 k	Н 7 /		<u>I</u>	Sn a	n 3 MHz	J
			/			ъра	5 1.1112	
Date: 18	.AUG.2023 14	1:05:22						

Page 29 of 32

Report No.: TW2308078-02E



Product:	BT+wireless dual-mod	e Mouse	Test Mode:	Keep tra	nsmitting
Mode	Keeping Transmitt	ting	Test Voltage	DC	1.5V
Temperature	24 deg. C,		Humidity	56% RH	
Test Result:	Pass	Pass		F	PK
20dB Bandwidth	1.263MHz				
Ref Lvl	Marker 1 [T1 no		300 kHz		20 dB
10 dBm	BW 1.2625250		WT 5 ms	Unit	dBm
10					
		1	▼ 1 [5	[1] (2.44006	.06 dBm 914 GHz
0			ndB	20	.00 dB
			BW V T1	1.26252 [T1] -19	505 MHz .80 dBm
-10				2.43943	
	T.		$\nabla_{\mathrm{T}_{2}}$	[2 1] -19	.74 dBm
-20				2.44070	040 GHz 1MA
-30	السير				
					~~
-40					V
-50					
-60					
-70					
-80					
-90					
Center 2	.44 GHz	300 kHz/		Spa	n 3 MHz
Date: 18	3.AUG.2023 14:03:10				

Page 30 of 32

Report No.: TW2308078-02E



Product:	BT+wireless dual-mode	Mouse	Test Mode:	Keep tra	nsmitting
Mode	Keeping Transmitting 24 deg. C,		Test Voltage	DC1.5V 56% RH	
Temperature			Humidity		
Test Result:	Pass		Detector	I	PK
20dB Bandwidth	1.263MHz				
·	Marker 1 [T1 nd	B] RBW	V 100 kHz	RF Att	20 dB
Ref Lvl	ndB 20.0	0 dB VBW	N 300 kHz		
10 dBm	BW 1.2625250	5 MHz SWI	5 ms	Unit	dBm
10			▼ 1 [1	71] -1	.07 dBm
		1		2.48006	
0			ndB	20	.00 dB
			BW VT1 I	1.26252 T11 -21	505 MHz
-10				2.47943	788 GHz
	77.7		∇_{T2}	T1] -21	.21 dBm
-20	7		\	2.48070	040 GHz
1MAX					1M
-30					
	norman			<u></u>	min
-40					M
-50					
-60					
-70					
-80					
-90					
Center 2.4	8 GHz	300 kHz/		Spa	n 3 MHz

Report No.: TW2308078-02E Page 31 of 32

Date: 2023-08-28




10.0 FCC ID Label

FCC ID: WOX-SM-M3DM

The label must not be a stick-on paper label. The label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

Mark Location:

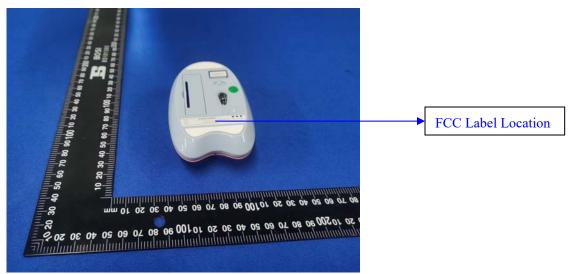


Date: 2023-08-28



11.0 Photo of testing

11.1 Conducted test View-N/A

Radiated emission test view

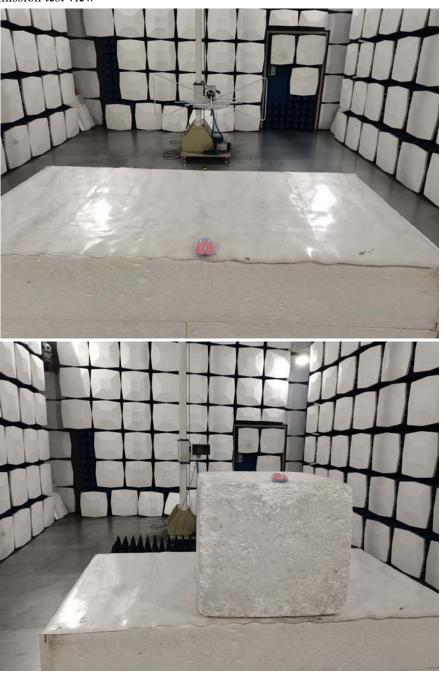

11.2 Photographs – EUT

Please refer test report TW2308078-01E

-- End of the report--

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.