

DATE: 25 January 2009

I.T.L. (PRODUCT TESTING) LTD.

FCC Radio Test Report

for

Visonic Ltd.

Equipment under test:

Wireless Emergency Button

MCT-220*

*See the customer's declaration on page 6.

Written by: *E. Ever*
E. Ever, Documentation

Approved by: *A. Sharabi*
A. Sharabi, Test Engineer

Approved by: *I. Raz*
I. Raz, EMC Laboratory Manager

This report must not be reproduced, except in full, without the written permission of I.T.L. (Product Testing) Ltd.

This report relates only to items tested.

Measurement/Technical Report for Visonic Ltd.

Wireless Emergency Button

MCT-220

FCC ID: WP3MCT220

IC ID: 1467C-MCT220

25 January 2009

This report concerns: Original Grant: x
 Class I change:
 Class II change:

Equipment type: Part 15 Security/Remote Control Transceiver

47CFR15 Section 15231 (a-d)

Measurement procedure used is ANSI C63.4-2003.

Application for Certification
prepared by:
 Ishaishou Raz
 ITL (Product Testing) Ltd.
 Kfar Bin Nun
 D.N. Shimshon 99780
 Israel
 e-mail Sraz@itl.co.il

Applicant for this device:
(different from "prepared by")
 Arik Elshtein
 Visonic Ltd.
 Tel Aviv
 Habarzel 24
 Israel 69710
 Tel: +936-03-6456789
 e-mail: aelshtein@visonic.com

TABLE OF CONTENTS

1.	GENERAL INFORMATION-----	5
1.1	Administrative Information.....	5
1.2	List of Accreditations	7
1.3	Product Description	8
1.4	Test Methodology.....	8
1.5	Test Facility	8
1.6	Measurement Uncertainty	8
2.	PRODUCT LABELING -----	9
3.	SYSTEM TEST CONFIGURATION-----	10
3.1	Justification.....	10
3.2	EUT Exercise Software	10
3.3	Special Accessories	10
3.4	Equipment Modifications	10
3.5	Configuration of Tested System.....	10
4.	TEST SET-UP PHOTO-----	11
5.	AVERAGE FACTOR CALCULATION -----	12
5.1	Test Instrumentation Used	14
6.	PERIODIC OPERATION -----	15
6.1	Specification	15
6.2	Requirements	15
6.3	Results.....	15
6.1	Test Instrumentation Used	18
7.	FIELD STRENGTH OF FUNDAMENTAL -----	19
7.1	Test Specification	19
7.2	Test Procedure.....	19
7.3	Measured Data.....	19
7.4	Test Instrumentation Used	23
8.	RADIATED EMISSION, 9 KHZ – 30 MHZ -----	24
8.1	Test Specification	24
8.2	Test Procedure.....	24
8.3	Measured Data.....	24
8.4	Test Instrumentation Used	25
8.5	Field Strength Calculation	26
9.	SPURIOUS RADIATED EMISSION -----	27
9.1	Test Specification	27
9.2	Test Procedure.....	27
9.3	Test Data	28
9.4	Test Instrumentation Used	30
10.	BANDWIDTH -----	31
10.1	Test procedure	31
10.2	Results table.....	33
10.3	Test Equipment Used.....	35
11.	COMPARISON REQUIREMENTS FCC WITH INDUSTRY CANADA-----	36

12.	APPENDIX A - CORRECTION FACTORS	37
12.1	Correction factors for CABLE	37
12.2	Correction factors for CABLE	38
12.3	Correction factors for CABLE	39
12.4	Correction factors for CABLE	40
12.6	Correction factors for LOG PERIODIC ANTENNA	41
12.5	Correction factors for LOG PERIODIC ANTENNA	42
12.6	Correction factors for BICONICAL ANTENNA	43
12.7	Correction factors for BICONICAL ANTENNA	44
12.8	Correction factors for Double-Ridged Waveguide Horn	45
12.9	Correction factors for Horn Antenna	46
12.10	Correction factors for Horn Antenna	47
12.11	Correction factors for ACTIVE LOOP ANTENNA	48

1. General Information

1.1 Administrative Information

Manufacturer:	Visonic Ltd.
Manufacturer's Address:	Habarzel 24 Tel Aviv Israel 69710 Tel: +936-03-6456789 Fax: +936-03-6456788
Manufacturer's Representative:	Arik Elshtein
Equipment Under Test (E.U.T):	Wireless Emergency Button
Equipment Model No.:	MCT-220*
Equipment Serial No.:	Not designated
Date of Receipt of E.U.T:	7.12.08
Start of Test:	8.12.08
End of Test:	8.12.08
Test Laboratory Location:	I.T.L (Product Testing) Ltd. Kfar Bin Nun, ISRAEL 99780
Test Specifications:	FCC Part 15 Sub-part C

*See the customer's declaration on following page.

21 JANUARY 2009

DECLARATION

I HEREBY DECLARE THAT THE IPB WIRELESS DESK TOP TRANSMITTER TESTED (RADIATED EMISSION SCREENING)AT THE I.T.L. EMC LABORATORY ON 19 MAY 2005 IS AS FOLLOWS:

Model Names:MCT 220
Visonic Part Number: 0-101047

PLEASE USE THE ABOVE NAMES AND SERIAL NUMBER IN THE TEST REPORT AND CERTIFICATE.

THANK YOU,



ARICK ELSHTEIN

INTERNATIONAL STANDARDS MANAGER

Head Office



24 Habarzel Street, Tel Aviv, 69710, Israel
Postal Address: P.O.B 22020, Tel Aviv, 61220



Tel: 972 3 6456789
Fax: 972 3 6456788



www.visonic.com

1.2 List of Accreditations

The EMC laboratory of I.T.L. is accredited by the following bodies:

1. The American Association for Laboratory Accreditation (A2LA) (U.S.A.), Certificate No. 1152.01.
2. The Federal Communications Commission (FCC) (U.S.A.), Registration No. 90715.
3. The Israel Ministry of the Environment (Israel), Registration No. 1104/01.
4. The Voluntary Control Council for Interference by Information Technology Equipment (VCCI) (Japan), Registration Numbers: C-1350, R-1285.
5. Industry Canada (Canada), File No. IC 4025.
6. TUV Product Services, England, ASLLAS No. 97201.
7. Nemko (Norway), Authorization No. ELA 207.

I.T.L. Product Testing Ltd. is accredited by the American Association for Laboratory Accreditation (A2LA) and the results shown in this test report have been determined in accordance with I.T.L.'s terms of accreditation unless stated otherwise in the report.

1.3 Product Description

The MCT-220 enables people, for example senior citizens in their home environment, to transmit an emergency call when they are at some distance from their communication unit.

1.4 Test Methodology

Both conducted and radiated testing were performed according to the procedures in ANSI C63.4: 2003. Radiated testing was performed at an antenna to EUT distance of 3 meters.

1.5 Test Facility

The radiated emissions tests were performed at I.T.L.'s testing facility at Kfar Bin-Nun, Israel. This site is a FCC listed test laboratory (FCC Registration No. 90715, date of listing August 22, 2006). I.T.L.'s EMC Laboratory is also accredited by A2LA, certificate No. 1152.01.

1.6 Measurement Uncertainty

Radiated Emission

The Open Site complies with the ± 4 dB Normalized Site Attenuation requirements of ANSI C63.4-2003. In accordance with Paragraph 5.4.6.1 of this standard, this tolerance includes instrumentation calibration errors, measurement technique errors, and errors due to site anomalies.

2. Product Labeling



Figure 1. FCC Label

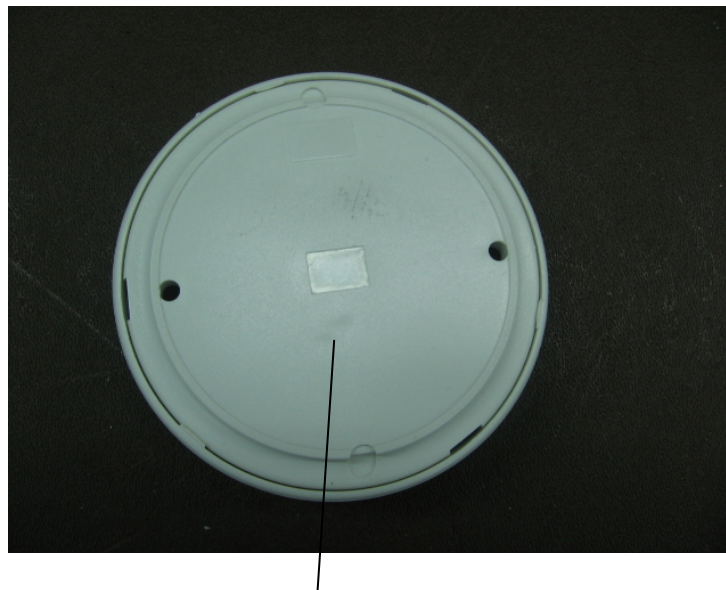


Figure 2. Location of Label on EUT

3. System Test Configuration

3.1 *Justification*

Radiated emission screening was performed in 3 orthogonal orientations. The worst case orientation was the vertical position.

3.2 *EUT Exercise Software*

Manufacturing software was used for the tests.

3.3 *Special Accessories*

No special accessories were needed.

3.4 *Equipment Modifications*

No modifications were needed in order to achieve compliance

3.5 *Configuration of Tested System*

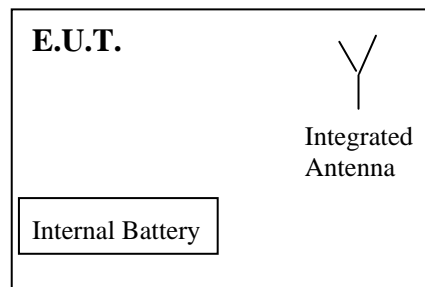


Figure 3. Configuration of Tested System


4. Test Set-up Photo



Figure 4. Radiated Emission Test

5. Average Factor Calculation

1. Transmission pulse duration = 862 usec
 2. Transmission pulse period = 1.2msec
 3. bursts within = 45.25
 4. Average Factor = $20 \log \left[\frac{\text{Pulse duration}}{\text{Pulse period}} \times \frac{\text{bursts duration}}{100\text{msec}} \right]$
- $$\text{Average Factor} = 20 \log \left[\frac{0.862}{1.2} \times \frac{45.25}{100} \times 2 \right] = -3.74\text{dB}$$

 17:07:38 DEC 08, 2008

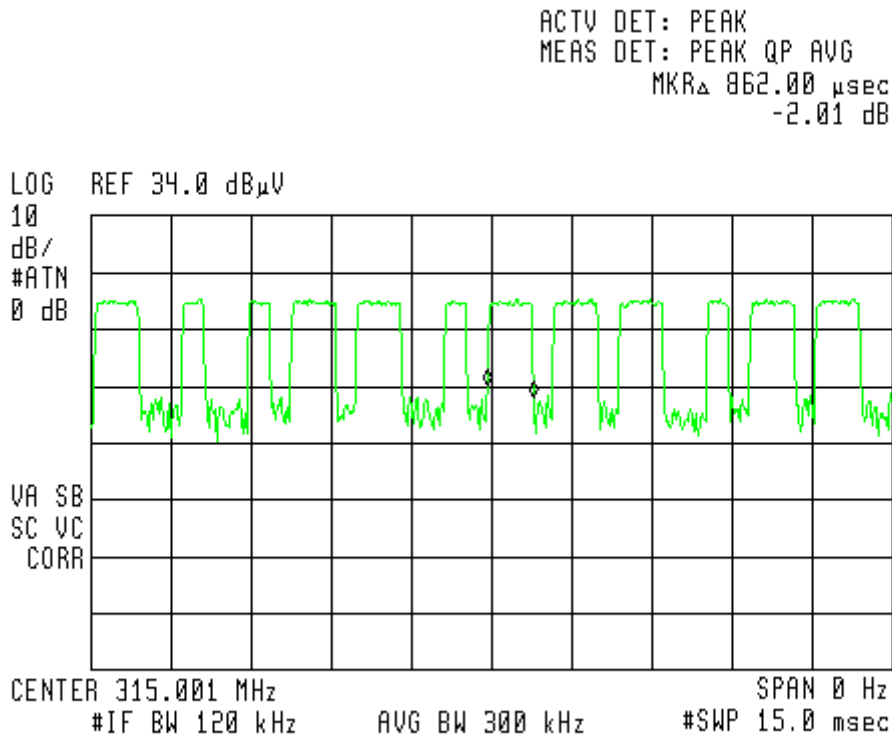


Figure 5. Transmission pulse duration (at worst case)= 862usec

17:08:59 DEC 08, 2008

ACTV DET: PEAK
 MEAS DET: PEAK QP AVG
 MKR Δ 1.2000 msec
 -5.91 dB

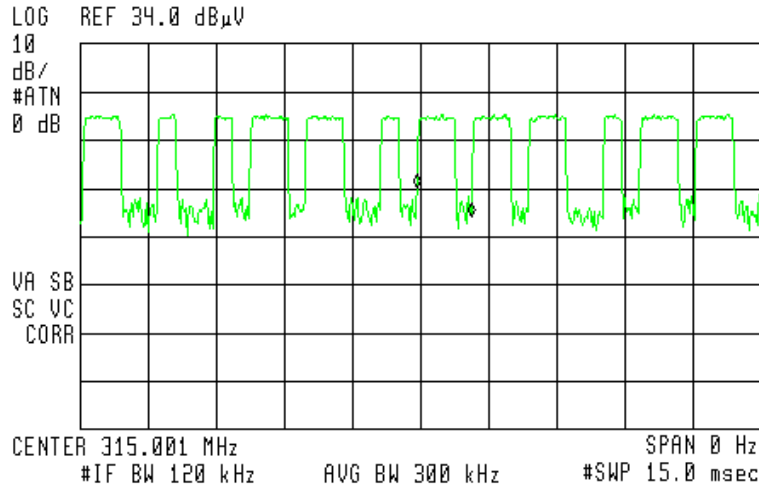


Figure 6. Transmission pulse period (at worst case) = 1.2msec

17:11:16 DEC 08, 2008

ACTV DET: PEAK
 MEAS DET: PEAK QP AVG
 MKR Δ 45.250 msec
 -1.91 dB

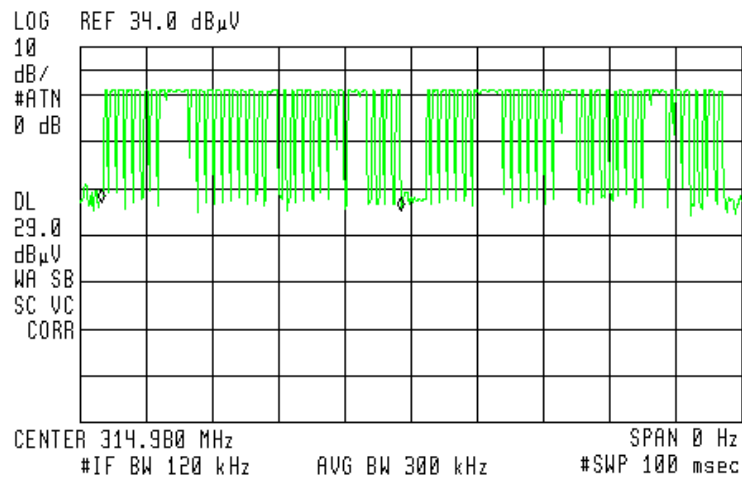


Figure 7. Burst duration = 45.25msec

5.1 Test Instrumentation Used

Instrument	Manufacturer	Model	Serial Number	Calibration	Period
Spectrum Analyzer	HP	8592L	3826A01204	March 5, 2008	1 Year
Antenna Bioconical	ARA	BCD 235/B	1041	March 23, 2008	1 year
Antenna Log Periodic	ARA	LPD-2010/A	1038	November 06, 2008	1 year
Antenna-Log Periodic	A.H.System	SAS-200/511	253	February 4, 2007	2 year
Antenna Mast	ARA	AAM-4A	1001	N/A	N/A
Turntable	ARA	ART-1001/4	1001	N/A	N/A
Mast & Table Controller	ARA	ACU-2/5	1001	N/A	N/A

6. Periodic Operation

6.1 Specification

F.C.C., Part 15, Subpart C, Section 15.231(a)

6.2 Requirements


Requirement	Rationale	Verdict
Continuous transmissions are not permitted.	N.A	Complies
A manually operated transmitter shall be deactivated within not more than 5 seconds after releasing the switch.	<i>Figure 8</i>	Complies
An automatically operated transmitter shall cease operation within 5 seconds after activation.	<i>Figure 9</i>	Complies
Periodic transmissions at regular predetermined intervals are not permitted.	N.A	Complies
Polling or supervised transmissions to determine system integrity of transmitter used in security or safety applications shall not exceed more than 2 seconds per hour.	<i>Figure 10</i>	Complies

6.3 Results

JUDGEMENT: Passed

The EUT met the FCC Part 15, Subpart C, Section 15.231(a) specification requirements.

TEST PERSONNEL:


Tester Signature:  Date: 25/01/2009

Typed/Printed Name: A. Sharabi

Periodic Operation

E.U.T Description Wireless Emergency Button
 Type MCT-220
 Serial Number: Not Designated

Specification: F.C.C., Part 15, Subpart C, 15.231(a)

 17:17:57 DEC 08, 2008

ACTV DET: PEAK
 MEAS DET: PEAK QP AVG
 MKR Δ 2.7250 sec
 -.60 dB

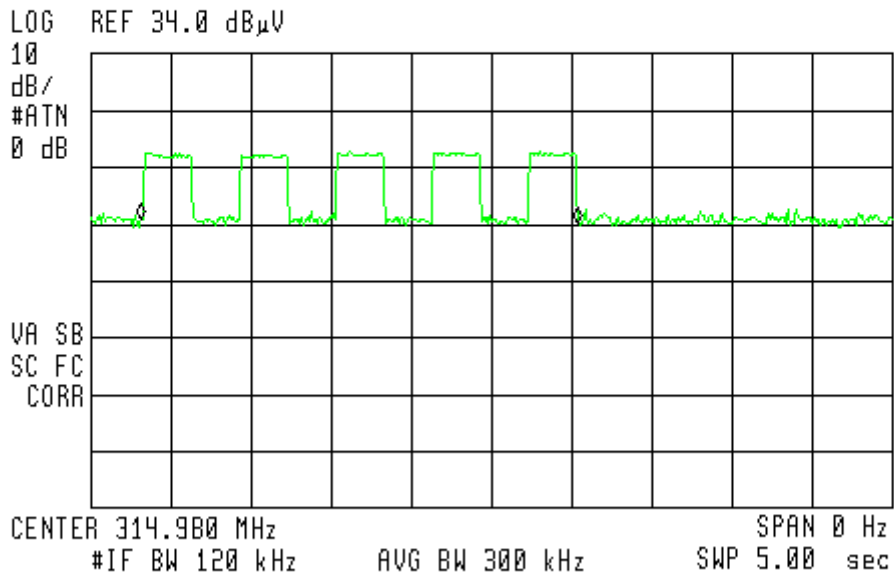


Figure 8. Manually operated transmitter

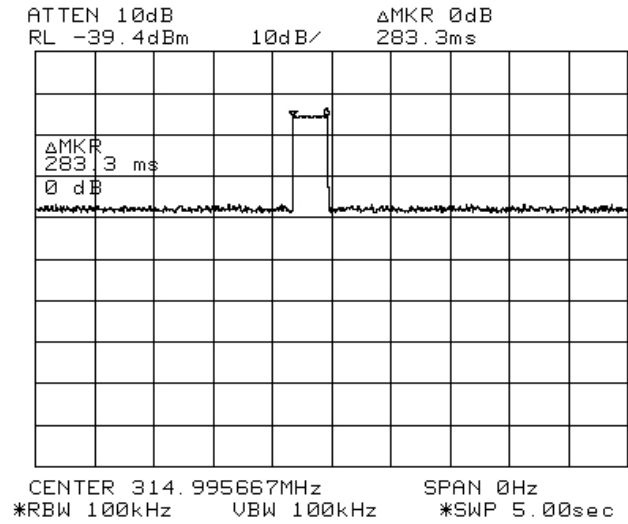


Figure 9. Automatic operated transmitter at low battery condition

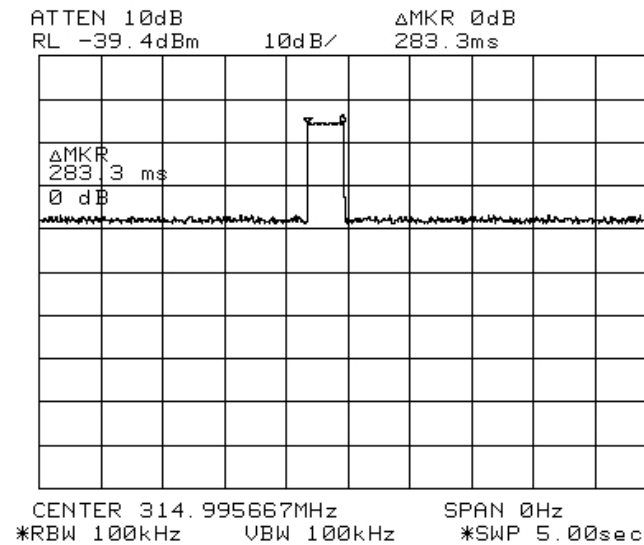


Figure 10. Supervised transmissions to determine system integrity (0.283sec in 1 hour)

6.1 *Test Instrumentation Used*

Instrument	Manufacturer	Model	Serial Number	Calibration	Period
Spectrum Analyzer	HP	8591E	314U01226	August 25, 2008	1 Year

7. Field Strength of Fundamental

7.1 Test Specification

F.C.C., Part 15, Subpart C, Section 15.231(b)

7.2 Test Procedure

The E.U.T. operation mode and test set-up are as described in Section 3.

The E.U.T. was placed on a non-conductive table, 0.8 meters above the O.A.T.S. ground plane.

The EMI receiver was set to the E.U.T. Fundamental Frequency (315 MHz) and Peak Detection.

The turntable and antenna mast were adjusted for maximum level reading on the EMI receiver.

The measurement was performed for vertical and horizontal polarizations of the test antenna.

The average result is:

Peak Level(dB μ V/m) + E.U.T. Duty Cycle Factor, in 100msec time window (dB)

7.3 Measured Data

JUDGEMENT: Passed by 10.7 dB

The EUT met the FCC Part 15, Subpart C, Section 15.231(b) specification requirements.

The details of the highest emissions are given in *Figure 11* to *Figure 13*.

TEST PERSONNEL:

Tester Signature: 

Date: 25/01/2009

Typed/Printed Name: A. Sharabi

Field Strength of Fundamental

E.U.T Description Wireless Emergency Button
 Type MCT-220
 Serial Number: Not Designated

Specification: F.C.C., Part 15, Subpart C, 15.231(b)

Antenna Polarization: Horizontal/Vertical

Test Distance: 3 meters

Detector: Peak

Freq.	Pol.	Peak Amp	Average Factor	AVG Result	AVG Specification	Margin
(MHz)	V/H	(dB μ V/m)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
315.00	H	58.2	-3.74	54.5	75.6	-21.1
315.00	V	68.6	-3.74	64.9	75.6	-10.7

Figure 11. Field Strength of Fundamental. Antenna Polarization: HORIZONTAL/VERTICAL. Detector: Peak

Notes:

1. Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.
2. "Peak Amp." (dB μ V/m) included the "Correction Factors".
3. "Correction Factors" (dB) = Test Antenna Correction Factor(dB) + Cable Loss.
4. "Average Factor = $20 \log [(burst\ duration/100msec)*Num\ of\ burst\ within\ 100msec]$ ="
5. "Average Result" (dB μ V/m)=Peak Amp. (dB μ V/m)+D.C.F. (dB)

Field Strength of Fundamental


E.U.T Description Wireless Emergency Button
 Type MCT-220
 Serial Number: Not Designated

Specification: F.C.C., Part 15, Subpart C, 15.231(b)


Antenna Polarization: Horizontal

Test Distance: 3 meters

Detectors: Peak, Quasi-peak, Average

 15:51:41 DEC 08, 2008

ACTV DET: PEAK
 MEAS DET: PEAK QP AVG
 MKR 315.005 MHz
 58.19 dB μ V/m

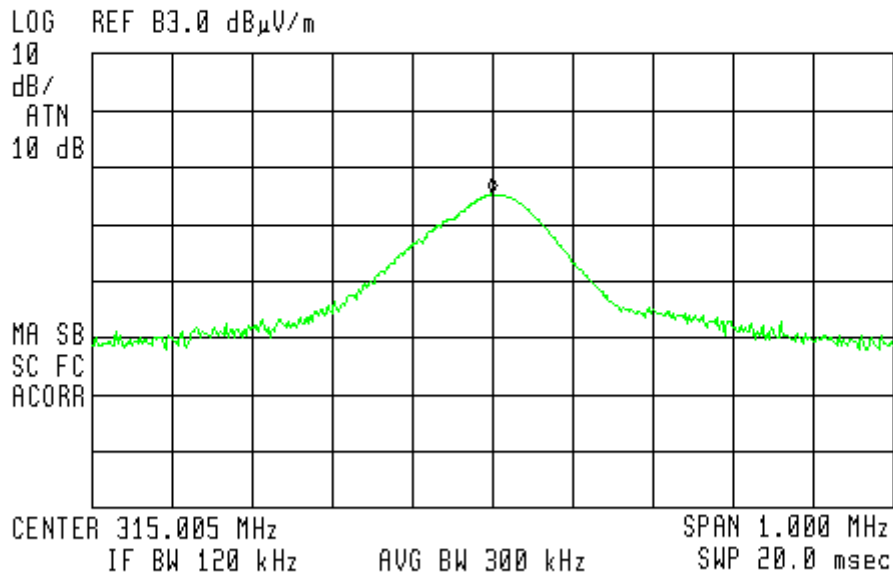

**Figure 12. Field Strength of Fundamental. Antenna Polarization: HORIZONTAL.
 Detectors: Peak, Quasi-peak, Average**

Field Strength of Fundamental


E.U.T Description Wireless Emergency Button
 Type MCT-220
 Serial Number: Not Designated

Specification: F.C.C., Part 15, Subpart C, 15.231(b)

Antenna Polarization: Vertical

Test Distance: 3 meters

Detectors: Peak, Quasi-peak, Average

 15:38:30 DEC 08, 2008

ACTV DET: PEAK
 MEAS DET: PEAK QP AVG
 MKR 315.005 MHz
 68.64 dB μ V/m

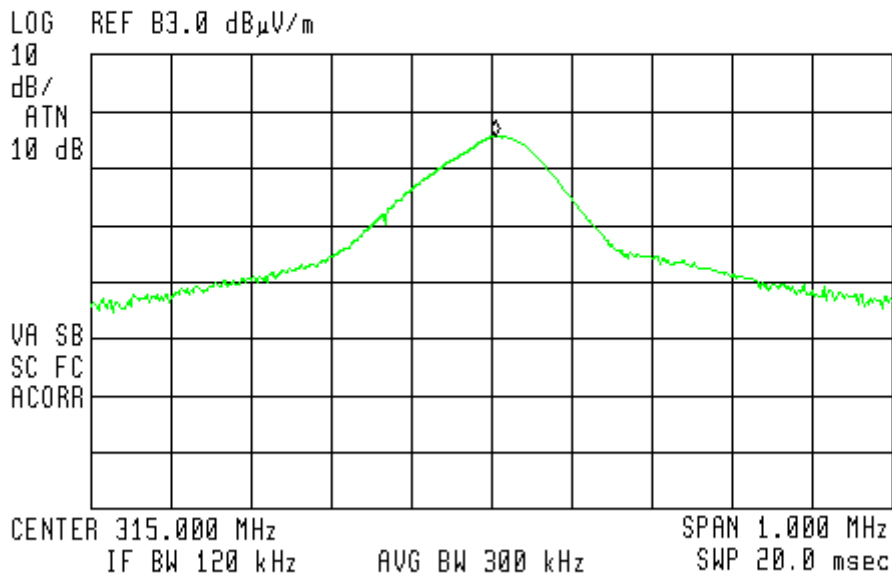


Figure 13. Field Strength of Fundamental. Antenna Polarization: VERTICAL. Detectors: Peak

7.4 Test Instrumentation Used

Instrument	Manufacturer	Model	Serial Number	Calibration	Period
EMI Receiver	HP	85422E	3906A00276	November 17, 2008	1 year
RF Section	HP	85420E	3705A00248	November 16, 2008	1 year
Active Loop Antenna	EMCO	6502	9506-2950	October 15, 2008	1 year
Antenna Mast	ARA	AAM-4A	1001	N/A	N/A
Turntable	ARA	ART-1001/4	1001	N/A	N/A
Mast & Table Controller	ARA	ACU-2/5	1001	N/A	N/A
Printer	HP	LaserJet 2200	JPKG19982	N/A	N/A

8. Radiated Emission, 9 kHz – 30 MHz

8.1 Test Specification

9 kHz-30 MHz, FCC, Part 15, Subpart C, Section 209

8.2 Test Procedure

The E.U.T. operation mode and test set-up are as described in Section 3.

A preliminary measurement to characterize the E.U.T was performed inside the shielded room at a distance of 3 meters, using peak detection mode and broadband antennas. The preliminary measurements produced a list of the highest emissions. The E.U.T was then transferred to the open site, and placed on a remote-controlled turntable. The E.U.T was placed on a non-metallic table, 0.8 meters above the ground. The configuration tested is shown in Figure 3.1.

The frequency range 9 kHz-30 MHz was scanned.

The emissions were measured using a computerized EMI receiver complying to CISPR 16 requirements. The specification limits and applicable correction factors are loaded to the receiver via a 3.5" floppy disk.

In the frequency range 9 kHz-30MHz, the loop antenna was rotated on its vertical axis. The antenna height (center of loop) was 1 meter at a distance of 10 meters.


8.3 Measured Data

JUDGEMENT: Passed

The EUT was tested and it met the requirements of the FCC Part 15, Subpart C, specification.

No signals were found in the frequency range of 9 kHz to 30 MHz.

TEST PERSONNEL:

Tester Signature:  Date: 25/01/2009

Typed/Printed Name: A. Sharabi

8.4 Test Instrumentation Used

Instrument	Manufacturer	Model	Serial Number	Calibration	Period
EMI Receiver	HP	85422E	3906A00276	November 17, 2008	1 year
RF Section	HP	85420E	3705A00248	November 16, 2008	1 year
Active Loop Antenna	EMCO	6502	9506-2950	October 15, 2008	1 year
Antenna Mast	ARA	AAM-4A	1001	N/A	N/A
Turntable	ARA	ART-1001/4	1001	N/A	N/A
Mast & Table Controller	ARA	ACU-2/5	1001	N/A	N/A
Printer	HP	LaserJet 2200	JPKG19982	N/A	N/A

8.5 **Field Strength Calculation**

The field strength is calculated directly by the EMI Receiver software, and a "Correction Factors" data disk, using the following equation:

$$FS = RA + AF + CF$$

FS:	Field Strength [dB μ v/m]
RA:	Receiver Amplitude [dB μ v]
AF:	Receiving Antenna Correction Factor [dB/m]
CF:	Cable Attenuation Factor [dB]

No external pre-amplifiers are used.

9. Spurious Radiated Emission

9.1 Test Specification

30 - 3500 MHz, F.C.C., Part 15, Subpart C

9.2 Test Procedure

The E.U.T. operation mode and test set-up are as described in Section 3. See Section 3.1 Justification of the System Test Configuration concerning the E.U.T. orientation for this test.

A preliminary measurement to characterize the E.U.T was performed inside the shielded room at a distance of 3 meters, using peak detection mode and broadband antennas. The preliminary measurements produced a list of the highest emissions. The E.U.T was then transferred to the open site, and placed on a remote-controlled turntable. The E.U.T was placed on a non-metallic table, 0.8 meters above the ground. The configuration tested is shown in *Figure 3*. The signals from the list of the highest emissions were verified and the list was updated accordingly.

The levels of the emissions within the frequency ranges of the restricted bands (Section 15.205 of FCC Part 15) were compared to the limits of the table in Section 15.209 (a), General Requirements.

The emissions were measured using a computerized EMI receiver complying to CISPR 16 requirements. The specification limits and applicable correction factors are loaded to the receiver via a 3.5" floppy disk.

In the frequency range 2.9 – 3.5 GHz, a spectrum analyzer including a low noise amplifier was used. The test distance was 3 meters. During peak measurements, the I.F. bandwidth was 1 MHz, and video bandwidth 3 MHz. During average measurements, the I.F. bandwidth was 1 MHz and video bandwidth was 100 Hz. The readings were maximized by adjusting the antenna height between 1-4 meters, the turntable azimuth between 0-360°, and the antenna polarization. Verification of the E.U.T emissions was based on the following methods: turning the E.U.T on and off; using a frequency span less than 10 MHz; observation of the signal level during turntable rotation. (Background noise is not affected by the rotation of the E.U.T.)

The emissions were measured at a distance of 3 meters.

9.3 **Test Data**

JUDGEMENT: Passed by 7.3 dB

The EUT met the requirements of the F.C.C. Part 15, Subpart C, specification.

The margin between the emission level and the specification limit was 7.3 dB in the worst case at the frequency of 1575.00 MHz, vertical polarization.

TEST PERSONNEL:

Tester Signature: _____ 

Date: 25/01/2009

Typed/Printed Name: A. Sharabi

Radiated Emission

E.U.T Description Wireless Emergency Button
 Type MCT-220
 Serial Number: Not Designated

Specification: FCC Part 15, Subpart C

Antenna Polarization: Horizontal/Vertical Frequency range: 30 MHz to 300 MHz
 Antenna: 3 meters distance Detectors: Peak, Quasi-peak

Frequency	Peak Amp	Average Factor	Avg Amp	Antenna Polarity	Specification	Margin
(MHz)	(dB μ V/m)	(dB)	(dB μ V/m)	(H/V)	(dB μ V/m)	(dB)
630.00	35.5	-4.18	31.3	V	55.6	-24.3
945.30	48.3	-4.18	44.1	V	55.6	-11.5
1260.00	50.5	-4.18	46.3	V	55.6	-9.3
1575.00	50.9	-4.18	46.7	V	54.0	-7.3

**Figure 14. Radiated Emission. Antenna Polarization: VERTICAL.
 Detectors: Peak, Quasi-peak**

Note: Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

9.4 Test Instrumentation Used

Instrument	Manufacturer	Model	Serial Number	Calibration	Period
EMI Receiver	HP	85422E	3906A00276	November 17, 2008	1 year
RF Section	HP	85420E	3705A00248	November 16, 2008	1 year
Spectrum Analyzer	HP	8592L	3826A01204	March 5, 2008	1 Year
Antenna Bioconical	ARA	BCD 235/B	1041	March 23, 2008	1 year
Antenna Log Periodic	ARA	LPD-2010/A	1038	November 06, 2008	1 year
Antenna-Log Periodic	A.H.System	SAS-200/511	253	February 4, 2007	2 year
Double Ridged Waveguide Horn Antenna	EMCO	3115	29845	March 16, 2008	2 Years
Horn Antenna	ARA	SWH-28	1008	December 8, 2006	2 Years
Antenna Mast	ARA	AAM-4A	1001	N/A	N/A
Low Noise Amplifier	DBS MICROWAVE	LNA-DBS-0411N313	013	November 2, 2007	1 Year
Low Noise Amplifier	Sophia Wireless	LNA 28-B	232	January 9, 2008	1 Year
Low Noise Amplifier	MK Milliwave	MKT6-3000 4000-30-13P	399	January 9, 2008	1 Year
Turntable	ARA	ART-1001/4	1001	N/A	N/A
Mast & Table Controller	ARA	ACU-2/5	1001	N/A	N/A
Printer	HP	LaserJet 2200	JPKG19982	N/A	N/A

10. Bandwidth

10.1 Test procedure

The transmitter unit operated with normal modulation. The spectrum analyzer was set to 30 kHz resolution BW and center frequency of the transmitter fundamental. The spectrum bandwidth of the transmitter unit was measured and recorded. The BW was measured at 20 dBc points.

The EUT was set up as shown in *Figure 3*, and its proper operation was checked. The transmitter occupied bandwidth was measured with the EMI receiver as frequency delta between reference points on the modulation envelope.

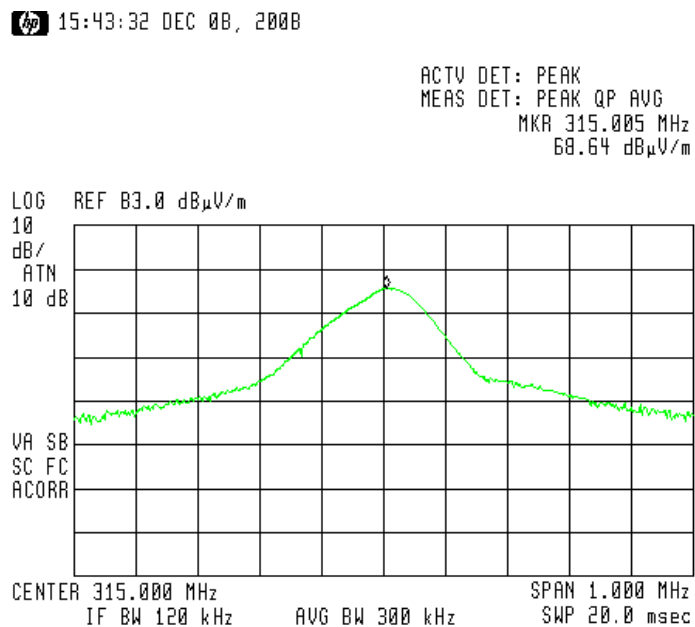


Figure 15..F_{peak}

15:44:49 DEC 08, 2008

ACTV DET: PEAK
 MEAS DET: PEAK QP AVG
 MKR 314.800 MHz
 47.80 dB μ V/m

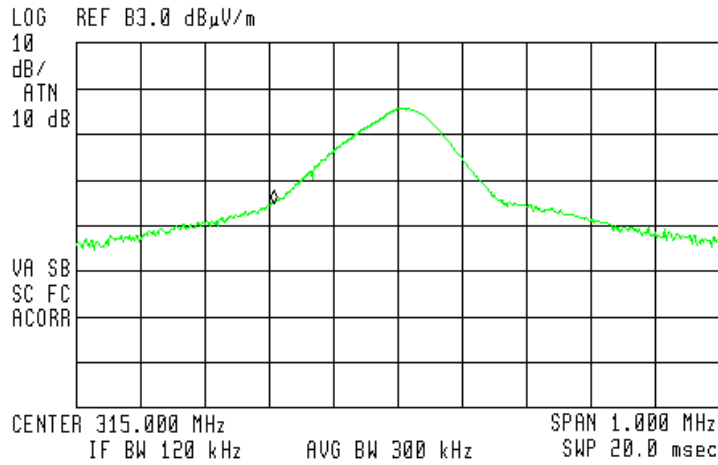


Figure 16 F_{Low}

15:45:54 DEC 08, 2008

ACTV DET: PEAK
 MEAS DET: PEAK QP AVG
 MKR 315.168 MHz
 47.72 dB μ V/m

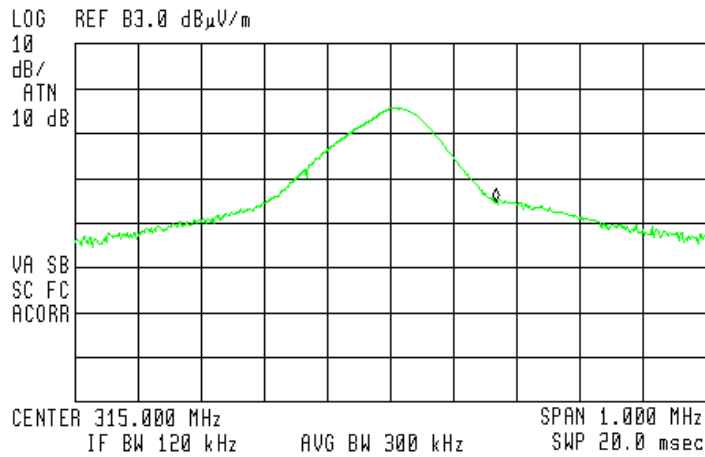


Figure 17 F_{High}

10.2 Results table


E.U.T Description: Wireless Emergency Button
 Model: MCT-220
 Serial Number: Not Designated
 Specification: F.C.C. Part 15, Subpart C: 15.231(c)

Bandwidth Reading (kHz)	Specification (1) (kHz)	Margin (kHz)
360	< 787	427

Figure 18 Bandwidth

JUDGEMENT: Passed by 427 kHz

TEST PERSONNEL:


Tester Signature:  Date: 25/01/2009

Typed/Printed Name: A. Sharabi

(1) 0.25% of the E.U.T. fundamental frequency, Section 15.231(c).

Bandwidth for Industry Canada

E.U.T Description Wireless Emergency Button
 Type MCT-220
 Serial Number: Not Designated

 15:48:37 DEC 08, 2008

ACTV DET: PEAK
 MEAS DET: PEAK QP AVG
 MKR Δ 705 kHz
 .06 dB

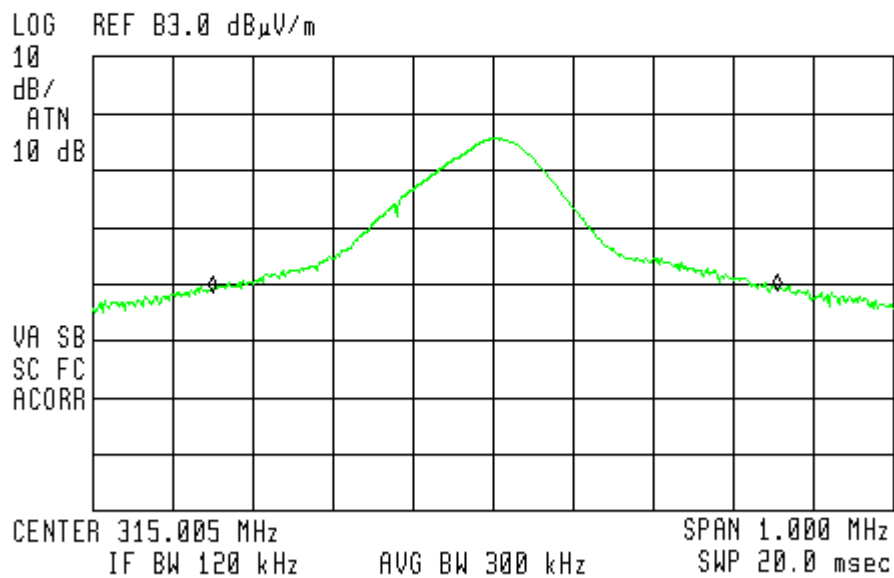


Figure 19 26dB Bandwidth for Industry Canada = 705 kHz

10.3 Test Equipment Used.

Instrument	Manufacturer	Model	Serial Number	Calibration	Period
EMI Receiver	HP	85422E	3906A00276	November 17, 2008	1 year
RF Section	HP	85420E	3705A00248	November 16, 2008	1 year
Antenna Log Periodic	ARA	LPD-2010/A	1038	November 06, 2008	1 Year
Antenna Mast	ARA	AAM-4A	1001	N/A	N/A
Turntable	ARA	ART-1001/4	1001	N/A	N/A
Mast & Table Controller	ARA	ACU-2/5	1001	N/A	N/A
Printer	HP	LaserJet 2200	JPKG19982	N/A	N/A

11. Comparison requirements FCC with Industry Canada

EUT	FCC Specification	According FCC Standard	IC Standard
MCT-220	Periodic Operation	FCC Part 15.231 (a)(1-5)	RSS- 210 Section 2.6 Annex 1, A1.1.1
	Field Strength at Fundamental	FCC Part 15.231 (b)	RSS- 210 Annex 1 A1.1.2, Section 2.6
	Spurious Emissions	FCC Part 15.231 (b)	RSS- 210 Section 2.6 Annex 1 A1.1.2
	Bandwidth	FCC Part 15.231 (c)	RSS- 210 Section 2.6 Annex 1 A1.1.3

12. APPENDIX A - CORRECTION FACTORS

12.1 Correction factors for CABLE

from EMI receiver
to test antenna
at 3 meter range.

FREQUENCY (MHz)	CORRECTION FACTOR (dB)	FREQUENCY (MHz)	CORRECTION FACTOR (dB)
10.0	0.3	1200.0	7.3
20.0	0.6	1400.0	7.8
30.0	0.8	1600.0	8.4
40.0	0.9	1800.0	9.1
50.0	1.1	2000.0	9.9
60.0	1.2	2300.0	11.2
70.0	1.3	2600.0	12.2
80.0	1.4	2900.0	13.0
90.0	1.6		
100.0	1.7		
150.0	2.0		
200.0	2.3		
250.0	2.7		
300.0	3.1		
350.0	3.4		
400.0	3.7		
450.0	4.0		
500.0	4.3		
600.0	4.7		
700.0	5.3		
800.0	5.9		
900.0	6.3		
1000.0	6.7		

NOTES:

1. The cable type is RG-214.
2. The overall length of the cable is 27 meters.
3. The above data is located in file 27MO3MO.CBL on the disk marked "Radiated Emission Tests EMI Receiver".

12.2 Correction factors for CABLE
from EMI receiver
to test antenna
at 3 meter range.

FREQUENCY (GHz)	CORRECTION FACTOR (dB)
1.0	1.2
2.0	1.6
3.0	2.0
4.0	2.4
5.0	3.0
6.0	3.4
7.0	3.8
8.0	4.2
9.0	4.6
10.0	5.0
12.0	5.8

NOTES:

- 1. The cable type is RG-8.*
- 2. The overall length of the cable is 10 meters.*

12.3 Correction factors for CABLE
from spectrum analyzer
to test antenna above 2.9 GHz

FREQUENCY (GHz)	CORRECTION FACTOR (dB)	FREQUENCY (GHz)	CORRECTION FACTOR (dB)
1.0	1.9	14.0	9.1
2.0	2.7	15.0	9.5
3.0	3.5	16.0	9.9
4.0	4.2	17.0	10.2
5.0	4.9	18.0	10.4
6.0	5.5	19.0	10.7
7.0	6.0	20.0	10.9
8.0	6.5	21.0	11.2
9.0	7.0	22.0	11.6
10.0	7.5	23.0	11.9
11.0	7.9	24.0	12.3
12.0	8.3	25.0	12.6
13.0	8.7	26.0	13.0

NOTES:

- 1. The cable type is SUCOFLEX 104 E manufactured by SUHNER.*
- 2. The cable is used for measurements above 2.9 GHz.*
- 3. The overall length of the cable is 10 meters.*

12.4 Correction factors for CABLE
from EMI receiver
to test antenna
at 10 meter range.

FREQUENCY (MHz)	CORRECTION FACTOR (dB)	FREQUENCY (MHz)	CORRECTION FACTOR (dB)
10.0	0.3	1200.0	9.8
20.0	0.8	1400.0	10.0
30.0	0.9	1600.0	11.3
40.0	1.2	1800.0	12.2
50.0	1.4	2000.0	13.1
60.0	1.6	2300.0	14.5
70.0	1.8	2600.0	15.9
80.0	1.9	2900.0	16.4
90.0	2.0		
100.0	2.1		
150.0	2.6		
200.0	3.2		
250.0	3.8		
300.0	4.2		
350.0	4.6		
400.0	5.1		
450.0	5.3		
500.0	5.6		
600.0	6.3		
700.0	7.0		
800.0	7.6		
900.0	8.0		
1000.0	8.7		

NOTES:

1. The cable type is RG-214.
2. The overall length of the cable is 34 meters.
3. The above data is located in file 34M10MO.CBL on the disk marked "Radiated Emissions Tests EMI Receiver".

12.6 Correction factors for LOG PERIODIC ANTENNA

Type LPD 2010/A at 3 and 10 meter ranges.

Distance of 3 meters

FREQUENCY (MHz)	AFE (dB/m)
200.0	9.1
250.0	10.2
300.0	12.5
400.0	15.4
500.0	16.1
600.0	19.2
700.0	19.4
800.0	19.9
900.0	21.2
1000.0	23.5

Distance of 10 meters

FREQUENCY (MHz)	AFE (dB/m)
200.0	9.0
250.0	10.1
300.0	11.8
400.0	15.3
500.0	15.6
600.0	18.7
700.0	19.1
800.0	20.2
900.0	21.1
1000.0	23.2

NOTES:

1. Antenna serial number is 1038.
2. The above lists are located in file number 38M30.ANT for a 3 meter range,
and file number 38M100.ANT for a 10 meter range.
3. The files mentioned above are located on the disk marked "Radiated Emission
Test EMI Receiver".

12.5 Correction factors for

LOG PERIODIC ANTENNA

**Type SAS-200/511
at 3 meter range.**

FREQUENCY (GHz)	ANTENNA FACTOR (dB)
1.0	24.9
1.5	27.8
2.0	29.9
2.5	31.2
3.0	32.8
3.5	33.6
4.0	34.3
4.5	35.2
5.0	36.2
5.5	36.7
6.0	37.2
6.5	38.1

FREQUENCY (GHz)	ANTENNA FACTOR (dB)
7.0	38.6
7.5	39.2
8.0	39.9
8.5	40.4
9.0	40.8
9.5	41.1
10.0	41.7
10.5	42.4
11.0	42.5
11.5	43.1
12.0	43.4
12.5	44.4
13.0	44.6

NOTES:

1. Antenna serial number is 253.
2. The above lists are located in file number SAS3M0.ANT for a 3 meter range.
3. The files mentioned above are located on the disk marked "Antenna Factors".

**12.6 Correction factors for BICONICAL ANTENNA
Type BCD-235/B,
at 3 meter range**

FREQUENCY (MHz)	AFE (dB/m)
20.0	19.4
30.0	14.8
40.0	11.9
50.0	10.2
60.0	9.1
70.0	8.5
80.0	8.9
90.0	9.6
100.0	10.3
110.0	11.0
120.0	11.5
130.0	11.7
140.0	12.1
150.0	12.6
160.0	12.8
170.0	13.0
180.0	13.5
190.0	14.0
200.0	14.8
210.0	15.3
220.0	15.8
230.0	16.2
240.0	16.6
250.0	17.6
260.0	18.2
270.0	18.4
280.0	18.7
290.0	19.2
300.0	19.9
310	20.7
320	21.9
330	23.4
340	25.1
350	27.0

NOTES:

1. Antenna serial number is 1041.
2. The above list is located in file 19BC10M1.ANT on the disk marked "Radiated Emissions Tests EMI Receiver".

**12.7 Correction factors for BICONICAL ANTENNA
Type BCD-235/B,
10 meter range**

FREQUENCY (MHz)	AFE (dB/m)
30.0	12.1
40.0	10.6
50.0	10.6
60.0	8.9
70.0	8.5
80.0	9.6
90.0	9.4
100.0	9.6
110.0	10.3
120.0	10.7
130.0	12.6
140.0	12.7
150.0	12.7
160.0	13.8
170.0	13.7
180.0	14.9
190.0	13.4
200.0	13.1
210.0	14.0
220.0	14.5
230.0	15.8
240.0	16.0
250.0	16.6
260.0	16.7
270.0	18.3
280.0	18.5
290.0	19.3
300.0	20.9

NOTES:

1. Antenna serial number is 1041.
2. The above list is located in file 41BC10M1.ANT on the disk marked "Radiated Emissions Tests EMI Receiver".

12.8 Correction factors for Double-Ridged Waveguide Horn

**Model: 3115, S/N 29845
at 3 meter range.**

FREQUENCY (GHz)	ANTENNA FACTOR (dB 1/m)	ANTENN A Gain (dBi)	FREQUENCY (GHz)	ANTENNA FACTOR (dB 1/m)	ANTENNA Gain (dBi)
1.0	24.8	5.4	10.0	38.8	11.4
1.5	26.1	7.6	10.5	38.9	11.8
2.0	28.6	7.7	11.0	39.0	12.1
2.5	29.8	8.4	11.5	39.6	11.8
3.0	31.4	8.4	12.0	39.8	12.0
3.5	32.4	8.7	12.5	39.6	12.5
4.0	33.7	8.6	13.0	40.0	12.5
4.5	33.4	9.9	13.5	39.8	13.0
5.0	34.5	9.7	14.0	40.2	13.0
5.5	35.1	9.9	14.5	40.6	12.9
6.0	35.4	10.4	15.0	41.3	12.4
6.5	35.6	10.8	15.5	39.5	14.6
7.0	36.2	10.9	16.0	38.8	15.5
7.5	37.3	10.4	16.5	40.0	14.6
8.0	37.7	10.6	17.0	41.4	13.4
8.5	38.3	10.5	17.5	44.8	10.3
9.0	38.5	10.8	18.0	47.2	8.1
9.5	38.7	11.1			

12.9 Correction factors for

**Horn Antenna
Model: SWH-28
at 1 meter range.**

FREQUENCY (GHz)	AFE (dB /m)	Gain (dB1)
18.0	40.3	16.1
19.0	40.3	16.3
20.0	40.3	16.1
21.0	40.3	16.3
22.0	40.4	16.8
23.0	40.5	16.4
24.0	40.5	16.6
25.0	40.5	16.7
26.0	40.6	16.4

12.10 Correction factors for

**Horn Antenna
Model: V637**

FREQUENCY (GHz)	APE (dB /m)	Gain (dB1)
26.0	43.6	14.9
27.0	43.7	15.1
28.0	43.8	15.3
29.0	43.9	15.5
30.0	43.9	15.8
31.0	44.0	16.0
32.0	44.1	16.2
33.0	44.1	16.4
34.0	44.1	16.7
35.0	44.2	16.9
36.0	44.2	17.1
37.0	44.2	17.4
38.0	44.2	17.6
39.0	44.2	17.8
40.0	44.2	18.0

12.11 Correction factors for ACTIVE LOOP ANTENNA

Model 6502

S/N 9506-2950

FREQUENCY (MHz)	Magnetic Antenna Factor (dB)	Electric Antenna Factor (dB)
.009	-35.1	16.4
.010	-35.7	15.8
.020	-38.5	13.0
.050	-39.6	11.9
.075	-39.8	11.8
.100	-40.0	11.6
.150	-40.0	11.5
.250	-40.0	11.6
.500	-40.0	11.5
.750	-40.1	11.5
1.000	-39.9	11.7
2.000	-39.5	12.0
3.000	-39.4	12.1
4.000	-39.7	11.9
5.000	-39.7	11.8
10.000	40.2	11.3
15.000	-40.7	10.8
20.000	-40.5	11.0
25.000	-41.3	10.2
30.000	42.3	9.2