



Hermon Laboratories Ltd.  
Harakevet Industrial Zone, Binyamina 30500,  
Israel  
Tel. +972-4-6288001  
Fax. +972-4-6288277  
E-mail: mail@hermonlabs.com

# TEST REPORT

ACCORDING TO: FCC 47CFR part 15 subpart C § 15.247 (FHSS) and subpart B,  
RSS-210 issue 8 Annex 8, ICES-003 Issue 4:2004

FOR:

**Visonic Ltd.**

**Wireless PowerG  
Temperature Detector**

**Model: TMD-560 PG2 (915)**

This report is in conformity with ISO/ IEC 17025. The "A2LA Accredited" symbol endorsement applies only to the tests and calibrations that are listed in the scope of Hermon Laboratories accreditation. The test results relate only to the items tested. This test report shall not be reproduced in any form except in full with the written approval of Hermon Laboratories Ltd.

## Table of contents

1	Applicant information .....	3
2	Equipment under test attributes .....	3
3	Manufacturer information .....	3
4	Test details .....	3
5	Tests summary .....	4
6	EUT description .....	5
6.1	General information .....	5
6.2	Test configuration .....	5
6.3	Changes made in the EUT .....	5
6.4	Transmitter characteristics .....	6
7	Transmitter tests according to 47CFR part 15 subpart C and RSS-210 Annex 8 requirements .....	7
7.1	20 dB bandwidth .....	7
7.2	Carrier frequency separation .....	11
7.3	Number of hopping frequencies .....	13
7.4	Average time of occupancy .....	16
7.5	Peak output power .....	19
7.6	Band edge radiated emissions .....	25
7.7	Field strength of spurious emissions .....	29
7.8	Antenna requirements .....	61
8	Unintentional emissions .....	62
8.1	Radiated emission measurements .....	62
9	APPENDIX A Test equipment and ancillaries used for tests .....	68
10	APPENDIX B Measurement uncertainties .....	69
11	APPENDIX C Test laboratory description .....	70
12	APPENDIX D Specification references .....	70
13	APPENDIX E Test equipment correction factors .....	71
14	APPENDIX F Abbreviations and acronyms .....	79

## 1 Applicant information

**Client name:** Visonic Ltd.  
**Address:** Habarzel street 24, Tel Aviv 69710, Israel  
**Telephone:** +972 3645 6714  
**Fax:** +972 3645 6788  
**E-mail:** aelshtein@visonic.com  
**Contact name:** Mr. Arick Elshtein

## 2 Equipment under test attributes

**Product name:** Wireless PowerG Temperature Detector  
**Product type:** Transceiver  
**Model(s):** TMD-560 PG2  
**Hardware version:** 02  
**Software release:** 1.2  
**Receipt date:** 6/21/2011

## 3 Manufacturer information

**Manufacturer name:** Visonic Ltd.  
**Address:** Habarzel street 24, Tel Aviv 69710, Israel  
**Telephone:** +972 3645 6714  
**Fax:** +972 3645 6788  
**E-Mail:** aelshtein@visonic.com  
**Contact name:** Mr. Arick Elshtein

## 4 Test details




**Project ID:** 22354  
**Location:** Hermon Laboratories Ltd. Harakevet Industrial Zone, Binyamina 30500, Israel  
**Test started:** 6/21/2011  
**Test completed:** 9/12/2011  
**Test specification(s):** FCC 47CFR part 15, subpart C, §15.247 (FHSS); subpart B;  
RSS-210 issue 8 Annex 8, RSS-Gen issue 3, ICES-003 issue 4:2004

## 5 Tests summary

Test	Status
<b>Transmitter characteristics</b>	
FCC Section 15.247(a)1, RSS-210 section A8.1(a), The 20 dB bandwidth	Pass
FCC Section 15.247(a)1, RSS-210 section A8.1(b), Frequency separation	Pass
FCC Section 15.247(a)1, RSS-210 section A8.1(c), Number of hopping frequencies	Pass
FCC Section 15.247(a)1, RSS-210 section A8.1(c), Average time of occupancy	Pass
FCC Section 15.247(b), RSS-210 section A8.4(1), Peak output power	Pass
FCC Section 15.247(d), RSS-210 section A8.5, Emissions at band edges	Pass
FCC Section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions	Pass
FCC Section 15.203, RSS-Gen section 7.1.2, Antenna requirements	Pass
FCC Section 15.207(a), RSS-Gen section 7.2.4, Conducted emission	Not required
FCC Section 15.247(i), RSS-Gen, section 5.5, RF exposure	Pass, the exhibit to the application of certification is provided
<b>Unintentional emissions</b>	
FCC Section 15.107, Conducted emission at AC power port	Not required
FCC Section 15.109, RSS-Gen section 6.1, ICES-003, Section 5.5, Radiated emission	Pass

Testing was completed against all relevant requirements of the test standard. The results obtained indicate that the product under test complies in full with the requirements tested.

The test results relate only to the items tested. Pass/ fail decision was based on nominal values.


	Name and Title	Date	Signature
<b>Tested by:</b>	Mrs. E. Pitt, test engineer	September 12, 2011	
<b>Reviewed by:</b>	Mrs. M. Cherniavsky, certification engineer	April 3, 2012	
<b>Approved by:</b>	Mr. M. Nikishin, EMC and radio group manager	April 4, 2012	

## 6 EUT description

### 6.1 General information

The EUT, TMD-560 PG2, is a wireless PowerG detector used with the PowerMaster alarm system. The detector is designed to update the alarm system control panel upon any change of temperature. The EUT is equipped with an integral antenna and is powered by 3 V internal battery.

### 6.2 Test configuration

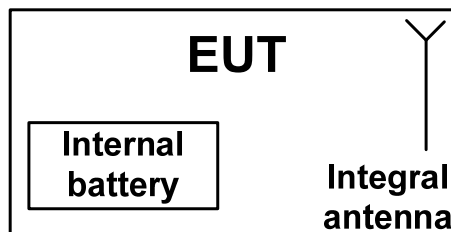

### 6.3 Changes made in the EUT

No changes were implemented in the EUT.

## 6.4 Transmitter characteristics

Type of equipment			
X	Stand-alone (Equipment with or without its own control provisions)		
	Combined equipment (Equipment where the radio part is fully integrated within another type of equipment)		
	Plug-in card (Equipment intended for a variety of host systems)		
Intended use		Condition of use	
	fixed	Always at a distance more than 2 m from all people	
X	mobile	Always at a distance more than 20 cm from all people	
	portable	May operate at a distance closer than 20 cm to human body	
Assigned frequency ranges		902 – 928 MHz	
Operating frequencies		912.750 – 919.106 MHz	
Maximum rated output power		At transmitter 50 $\Omega$ RF output connector	dBm
		Peak output power	21.0 dBm
Is transmitter output power variable?		X	No
			Yes
			continuous variable
			stepped variable with stepsize
	minimum RF power	dBm	
	maximum RF power	dBm	
Antenna connection			
unique coupling	standard connector	X	integral
		X	with temporary RF connector
		X	without temporary RF connector
Antenna/s technical characteristics			
Type	Manufacturer	Model number	Gain
Internal	Visonic	Built-in helical antenna	-7 dBi
Transmitter aggregate data rate/s		50 kbps	
Type of modulation		GFSK	
Modulating test signal (baseband)		PRBS	
Maximum transmitter duty cycle in normal use		0.1%	
Transmitter power source			
X	Battery	Nominal rated voltage	3.0 VDC
	DC	Nominal rated voltage	VDC
	AC mains	Nominal rated voltage	VAC
		Frequency	
Common power source for transmitter and receiver			
		X	yes
			no
Spread spectrum technique used		X	Frequency hopping (FHSS)
			Digital transmission system (DTS)
			Hybrid
Spread spectrum parameters for transmitters tested per FCC 15.247 only			
FHSS	Total number of hops	50	
	Bandwidth per hop	107 kHz	
	Max. separation of hops	131 kHz	



<b>Test specification:</b>		<b>Section 15.247(a)1, RSS-210 section A8.1(a), 20 dB bandwidth</b>	
<b>Test procedure:</b>		Public notice DA 00-705	
<b>Test mode:</b>		<b>Verdict:</b> PASS	
<b>Date(s):</b>			
<b>Temperature:</b> 23 °C	<b>Air Pressure:</b> 1010 hPa	<b>Relative Humidity:</b> 41 %	<b>Power Supply:</b> 3 V battery
<b>Remarks:</b>			

## 7 Transmitter tests according to 47CFR part 15 subpart C and RSS-210 Annex 8 requirements

### 7.1 20 dB bandwidth

#### 7.1.1 General

This test was performed to measure the 20 dB bandwidth of the transmitter hopping channel. Specification test limits are given in Table 7.1.1.

Table 7.1.1 The 20 dB bandwidth limits

Assigned frequency, MHz	Maximum bandwidth, kHz	Modulation envelope reference points*, dBc
902.0 – 928.0	500	20
2400.0 – 2483.5	NA	
5725.0 – 5850.0	1000	

- Modulation envelope reference points provided in terms of attenuation below the peak of modulated carrier.

#### 7.1.2 Test procedure

7.1.2.1 The EUT was set up as shown in Figure 7.1.1, energized and its proper operation was checked.

7.1.2.2 The EUT was set to transmit modulated carrier at maximum data rate.

7.1.2.3 The transmitter bandwidth was measured with spectrum analyzer as frequency delta between reference points on modulation envelope and provided in Table 7.1.2 and the associated plots.

7.1.2.4 The test was repeated for mid and high carrier frequencies.

Figure 7.1.1 The 20 dB bandwidth test setup





<b>Test specification:</b>	<b>Section 15.247(a)1, RSS-210 section A8.1(a), 20 dB bandwidth</b>		
<b>Test procedure:</b>	Public notice DA 00-705		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date(s):</b>	8/31/2011		
<b>Temperature:</b> 23 °C	<b>Air Pressure:</b> 1010 hPa	<b>Relative Humidity:</b> 41 %	<b>Power Supply:</b> 3 V battery
<b>Remarks:</b>			

**Table 7.1.2 The 20 dB bandwidth test results**

ASSIGNED FREQUENCY BAND: 902-928 MHz  
DETECTOR USED: Peak  
SWEEP TIME: Auto  
VIDEO BANDWIDTH: ≥ RBW  
MODULATION ENVELOPE REFERENCE POINTS: 20.0 dBc  
FREQUENCY HOPPING: Disabled

Carrier frequency, MHz	Type of modulation	Data rate, kbps	Symbol rate, Msymbols/s	20 dB bandwidth, kHz	Limit, kHz	Margin, kHz	Verdict
912.750	GFSK	50	NA	106.0	500	-394.0	Pass
915.863				107.0	500	-393.0	
919.106				106.5	500	-393.5	

**Reference numbers of test equipment used**

HL 3001								
---------	--	--	--	--	--	--	--	--

Full description is given in Appendix A.









HERMON LABORATORIES

<b>Test specification:</b> Section 15.247(a)1, RSS-210 section A8.1(a), 20 dB bandwidth			
<b>Test procedure:</b> Public notice DA 00-705			
<b>Test mode:</b> Compliance	<b>Verdict:</b> PASS		
<b>Date(s):</b> 8/31/2011			
<b>Temperature:</b> 23 °C	<b>Air Pressure:</b> 1010 hPa	<b>Relative Humidity:</b> 41 %	<b>Power Supply:</b> 3 V battery
<b>Remarks:</b>			

Plot 7.1.1 The 20 dB bandwidth test result at low frequency

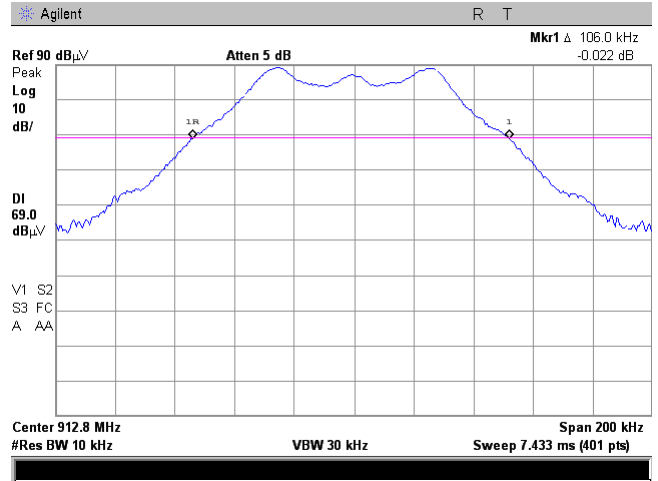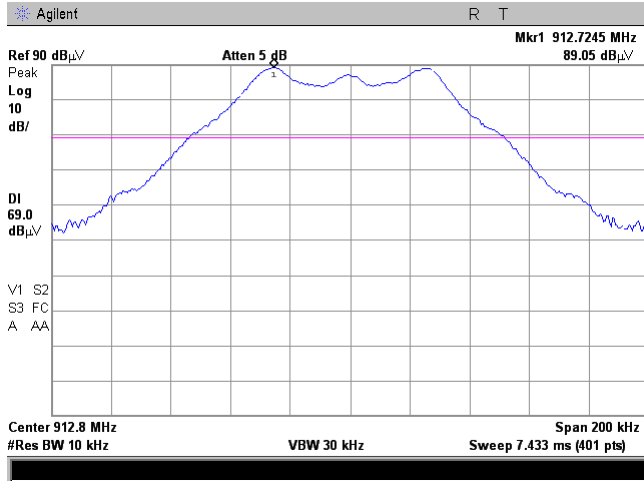

Plot 7.1.2 The 20 dB bandwidth test result at mid frequency

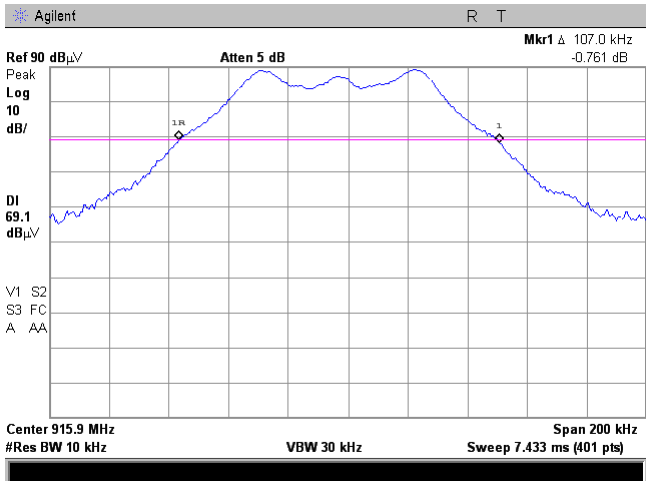
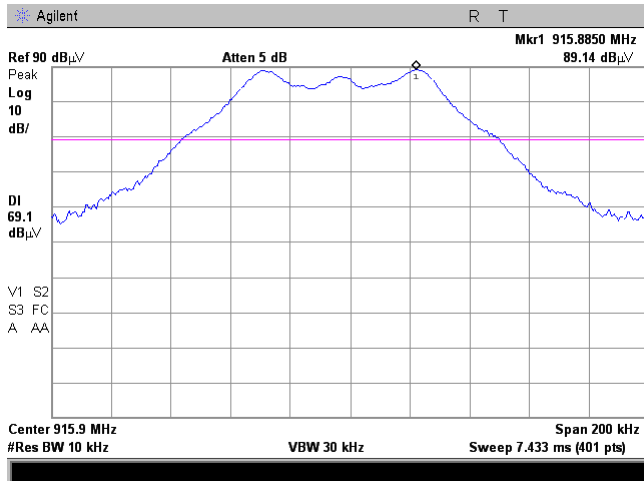




HERMON LABORATORIES

<b>Test specification:</b> Section 15.247(a)1, RSS-210 section A8.1(a), 20 dB bandwidth			
<b>Test procedure:</b> Public notice DA 00-705			
<b>Test mode:</b> Compliance	<b>Verdict:</b> PASS		
<b>Date(s):</b> 8/31/2011			
<b>Temperature:</b> 23 °C	<b>Air Pressure:</b> 1010 hPa	<b>Relative Humidity:</b> 41 %	<b>Power Supply:</b> 3 V battery
<b>Remarks:</b>			

Plot 7.1.3 The 20 dB bandwidth test result at high frequency

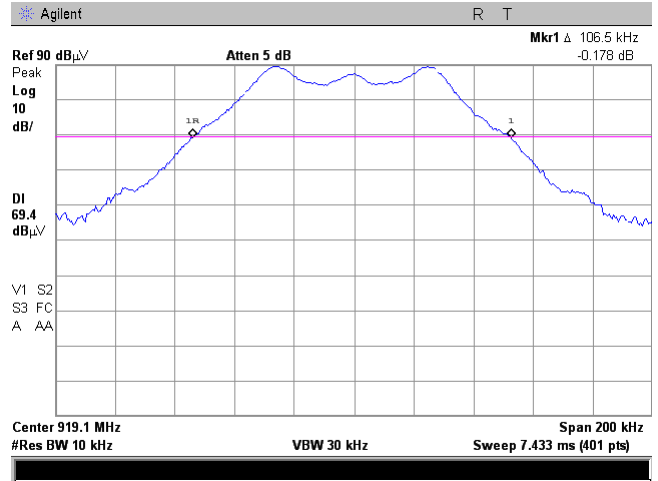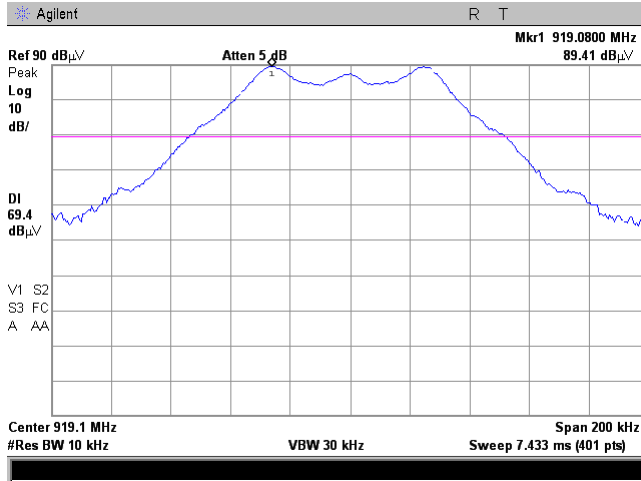



<b>Test specification:</b> Section 15.247(a)1, RSS-210 section A8.1(b), Frequency separation	
<b>Test procedure:</b>	Public notice DA 00-705
<b>Test mode:</b>	Compliance
<b>Date(s):</b>	8/31/2011
<b>Temperature:</b> 23 °C	<b>Air Pressure:</b> 1010 hPa
<b>Relative Humidity:</b> 41 %	<b>Power Supply:</b> 3 V battery
<b>Remarks:</b>	
<b>Verdict: PASS</b>	

## 7.2 Carrier frequency separation

### 7.2.1 General

This test was performed to measure frequency separation between the peaks of adjacent channels. Specification test limits are given in Table 7.2.1.

Table 7.2.1 Carrier frequency separation limits

Assigned frequency range, MHz	Carrier frequency separation
902.0 – 928.0	25 kHz or <b>20 dB bandwidth</b> of the hopping channel, whichever is greater
2400.0 – 2483.5	
5725.0 – 5850.0	

### 7.2.2 Test procedure

- 7.2.2.1 The EUT was set up as shown in Figure 7.2.1, energized with frequency hopping function enabled and its proper operation was checked.
- 7.2.2.2 The spectrum analyzer span was set to capture the carrier frequency and both of adjacent channels, the lower and the higher. The resolution bandwidth was set wider than 1 % of the frequency span.
- 7.2.2.3 The spectrum analyzer was set in max hold mode and allowed trace to stabilize.
- 7.2.2.4 The frequency separation between the peaks of adjacent channels was measured as provided in Table 7.2.2 and the associated plots.

Figure 7.2.1 Carrier frequency separation test setup





<b>Test specification:</b> Section 15.247(a)1, RSS-210 section A8.1(b), Frequency separation	
<b>Test procedure:</b>	Public notice DA 00-705
<b>Test mode:</b>	Compliance
<b>Date(s):</b>	8/31/2011
<b>Temperature:</b> 23 °C	<b>Air Pressure:</b> 1010 hPa
<b>Relative Humidity:</b> 41 %	<b>Power Supply:</b> 3 V battery
<b>Remarks:</b>	
<b>Verdict: PASS</b>	

Table 7.2.2 Carrier frequency separation test results

ASSIGNED FREQUENCY: 902-928 MHz  
 MODULATION: GFSK  
 BIT RATE: 50 kbps  
 DETECTOR USED: Peak  
 RESOLUTION BANDWIDTH: ≥ 1% of the span  
 VIDEO BANDWIDTH: ≥ RBW  
 FREQUENCY HOPPING: Enabled  
 20 dB BANDWIDTH: 107 kHz

Carrier frequency separation, kHz	Limit, kHz	Margin*	Verdict
131	107	24	Pass


\* - Margin = Carrier frequency separation – specification limit.

Reference numbers of test equipment used

HL 1431	HL 1984	HL 2883	HL 3386				
---------	---------	---------	---------	--	--	--	--

Full description is given in Appendix A.

Plot 7.2.1 Carrier frequency separation

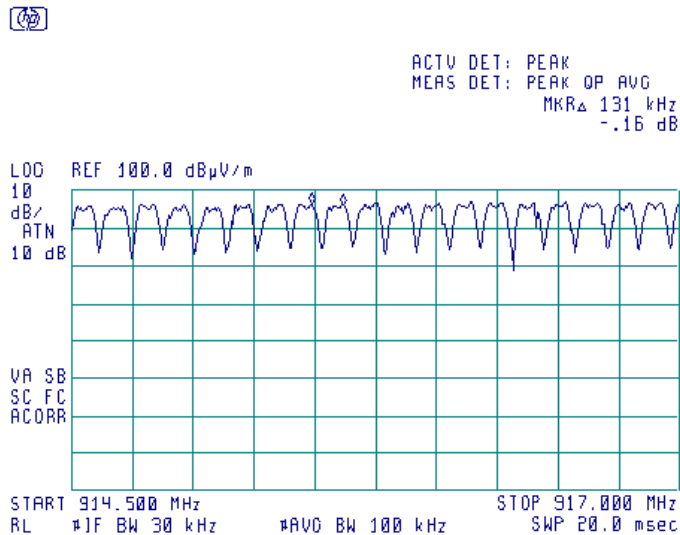



<b>Test specification:</b>	<b>Section 15.247(a)1, RSS-210 section A8.1(c), Number of hopping frequencies</b>		
<b>Test procedure:</b>	Public notice DA 00-705		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date(s):</b>	8/31/2011		
<b>Temperature:</b> 23 °C	<b>Air Pressure:</b> 1010 hPa	<b>Relative Humidity:</b> 41 %	<b>Power Supply:</b> 3 V battery
<b>Remarks:</b>			

### 7.3 Number of hopping frequencies

#### 7.3.1 General

This test was performed to calculate the number of hopping frequencies used by the EUT. Specification test limits are given in Table 7.3.1.

Table 7.3.1 Minimum number of hopping frequencies

Assigned frequency range, MHz	Number of hopping frequencies
902.0 – 928.0	50 (if the 20 dB bandwidth is less than 250 kHz) 25 (if the 20 dB bandwidth is 250 kHz or greater)
2400.0 – 2483.5	15
5725.0 – 5850.0	75

#### 7.3.2 Test procedure

- 7.3.2.1 The EUT was set up as shown in Figure 7.3.1, energized with frequency hopping function enabled and its proper operation was checked.
- 7.3.2.2 Initially the spectrum analyzer span was set equal to frequency band of operation and the resolution bandwidth was set wider than 1 % of the frequency span. If the separate hopping channels were not clearly resolved the frequency band of operation was broken to sections and the resolution bandwidth was set wider than 1 % of the frequency span of each section.
- 7.3.2.3 The spectrum analyzer was set in max hold mode and allowed trace to stabilize.
- 7.3.2.4 The number of frequency hopping channels was calculated as provided in Table 7.3.2 and the associated plots.

Figure 7.3.1 Hopping frequencies test setup





HERMON LABORATORIES

<b>Test specification:</b>	<b>Section 15.247(a)1, RSS-210 section A8.1(c), Number of hopping frequencies</b>		
<b>Test procedure:</b>	Public notice DA 00-705		
<b>Test mode:</b>	Compliance	<b>Verdict: PASS</b>	
<b>Date(s):</b>	8/31/2011		
<b>Temperature:</b> 23 °C	<b>Air Pressure:</b> 1010 hPa	<b>Relative Humidity:</b> 41 %	<b>Power Supply:</b> 3 V battery
<b>Remarks:</b>			

**Table 7.3.2 Hopping frequencies test results**

ASSIGNED FREQUENCY: 902-928 MHz  
 MODULATION: GFSK  
 BIT RATE: 50 kbps  
 DETECTOR USED: Peak  
 RESOLUTION BANDWIDTH: ≥ 1% of the span  
 VIDEO BANDWIDTH: ≥ RBW  
 FREQUENCY HOPPING: Enabled

Number of hopping frequencies	Minimum number of hopping frequencies	Margin*	Verdict
50	50	0	Pass


\* - Margin = Number of hopping frequencies – Minimum number of hopping frequencies.

**Reference numbers of test equipment used**

HL 1431	HL 1984	HL 2883	HL 3386				
---------	---------	---------	---------	--	--	--	--

Full description is given in Appendix A.

**Plot 7.3.1 Number of hopping frequencies in the frequency range 912 –914.5 MHz (fourteen)**

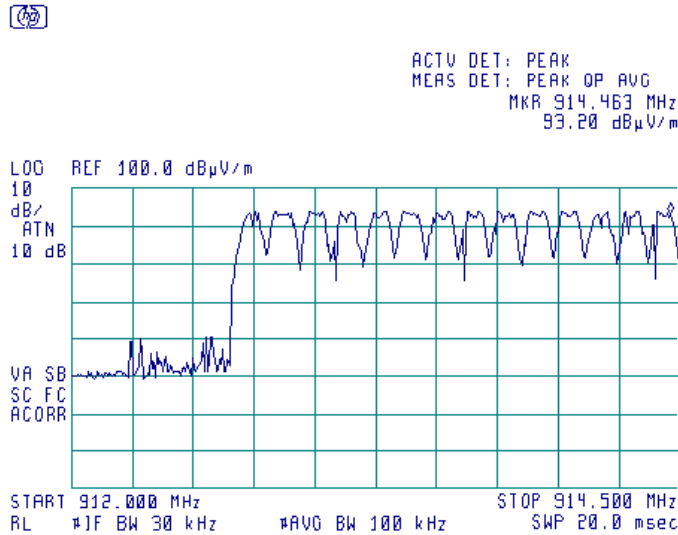





HERMON LABORATORIES

<b>Test specification:</b>		<b>Section 15.247(a)1, RSS-210 section A8.1(c), Number of hopping frequencies</b>	
<b>Test procedure:</b>		Public notice DA 00-705	
<b>Test mode:</b>		<b>Verdict:</b> PASS	
<b>Date(s):</b>		8/31/2011	
<b>Temperature:</b> 23 °C	<b>Air Pressure:</b> 1010 hPa	<b>Relative Humidity:</b> 41 %	<b>Power Supply:</b> 3 V battery
<b>Remarks:</b>			

Plot 7.3.2 Number of hopping frequencies in the frequency range 914.5 –917.0 MHz (nineteen)

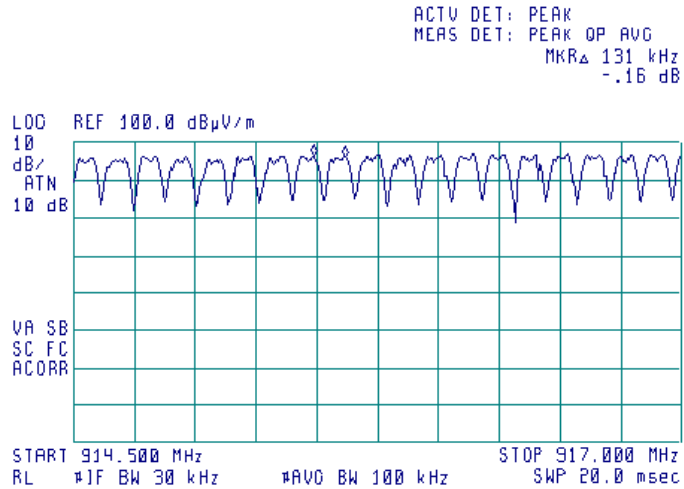

Plot 7.3.3 Number of hopping frequencies in the frequency range 917 –919.5 MHz (seventeen)

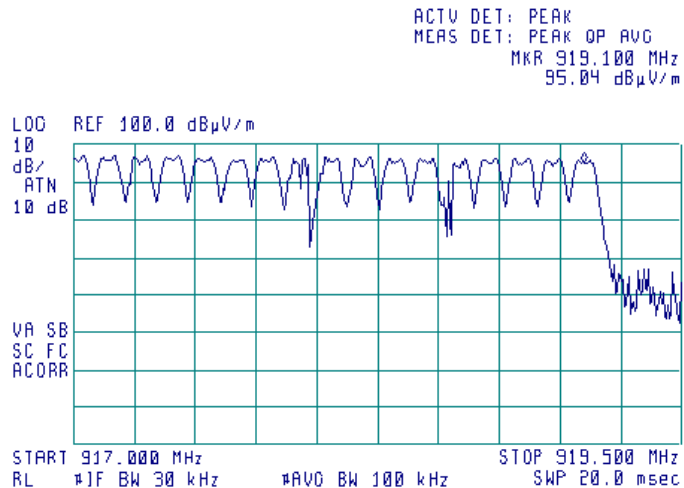



<b>Test specification:</b>		<b>Section 15.247(a)1, RSS-210 section A8.1(c), Average time of occupancy</b>	
<b>Test procedure:</b>		Public notice DA 00-705	
<b>Test mode:</b>		Compliance	
<b>Date(s):</b>		8/31/2011	
<b>Temperature:</b> 23 °C		<b>Air Pressure:</b> 1010 hPa	
<b>Remarks:</b>		<b>Verdict:</b> PASS	
		<b>Relative Humidity:</b> 41 %	
		<b>Power Supply:</b> 3 V battery	

## 7.4 Average time of occupancy

### 7.4.1 General

This test was performed to calculate the average time of occupancy (dwell time) on any frequency channel of the EUT. Specification test limits are given in Table 7.4.1.


Table 7.4.1 Average time of occupancy limits

Assigned frequency range, MHz	Maximum average time of occupancy, s	Investigated period, s	Number of hopping frequencies
902.0 – 928.0	0.4	20.0	≥ 50
902.0 – 928.0	0.4	10.0	< 50
2400.0 – 2483.5	0.4	0.4 × N	N (≥ 15)
5725.0 – 5850.0	0.4	30.0	≥ 75

### 7.4.2 Test procedure

- 7.4.2.1 The EUT was set up as shown in Figure 7.4.1, energized with frequency hopping function enabled and its proper operation was checked.
- 7.4.2.2 The spectrum analyzer span was set to zero centered on a hopping channel.
- 7.4.2.3 The single transmission duration and period were measured with oscilloscope.
- 7.4.2.4 The average time of occupancy was calculated as the single transmission time multiplied by the investigated period and divided by the single transmission period.
- 7.4.2.5 The test results provided in Table 7.4.2 and the associated plots.

Figure 7.4.1 Average time of occupancy test setup







<b>Test specification:</b>	<b>Section 15.247(a)1, RSS-210 section A8.1(c), Average time of occupancy</b>		
<b>Test procedure:</b>	Public notice DA 00-705		
<b>Test mode:</b>	Compliance	<b>Verdict: PASS</b>	
<b>Date(s):</b>	8/31/2011		
<b>Temperature:</b> 23 °C	<b>Air Pressure:</b> 1010 hPa	<b>Relative Humidity:</b> 41 %	<b>Power Supply:</b> 3 V battery
<b>Remarks:</b>			

**Table 7.4.2 Average time of occupancy test results**

ASSIGNED FREQUENCY: 902-928 MHz  
 MODULATION: GFSK  
 DETECTOR USED: Peak  
 RESOLUTION BANDWIDTH: 1 MHz  
 VIDEO BANDWIDTH: 3 MHz  
 NUMBER OF HOPPING FREQUENCIES: 50  
 INVESTIGATED PERIOD: 20s  
 FREQUENCY HOPPING: Enabled

Carrier frequency, MHz	Single transmission duration, s	Single transmission period, s	Average time of occupancy*, s	Bit rate, kbps	Limit, s	Margin, s**	Verdict
915.863	0.004312	2	0.043	50	0.4	-0.357	Pass

\* - Average time of occupancy = (Single transmission duration × Investigated period) / Single transmission period.

\*\* - Margin = Average time of occupancy – specification limit.

**Reference numbers of test equipment used**

HL 1431	HL 1984	HL 2883	HL 3386				
---------	---------	---------	---------	--	--	--	--


Full description is given in Appendix A.




HERMON LABORATORIES

<b>Test specification:</b>		<b>Section 15.247(a)1, RSS-210 section A8.1(c), Average time of occupancy</b>	
<b>Test procedure:</b>		Public notice DA 00-705	
<b>Test mode:</b>		Compliance	
<b>Date(s):</b>		8/31/2011	
<b>Temperature: 23 °C</b>		<b>Air Pressure: 1010 hPa</b>	
<b>Remarks:</b>		<b>Verdict: PASS</b>	
		<b>Relative Humidity: 41 %</b>	
		<b>Power Supply: 3 V battery</b>	

Plot 7.4.1 Single transmission duration

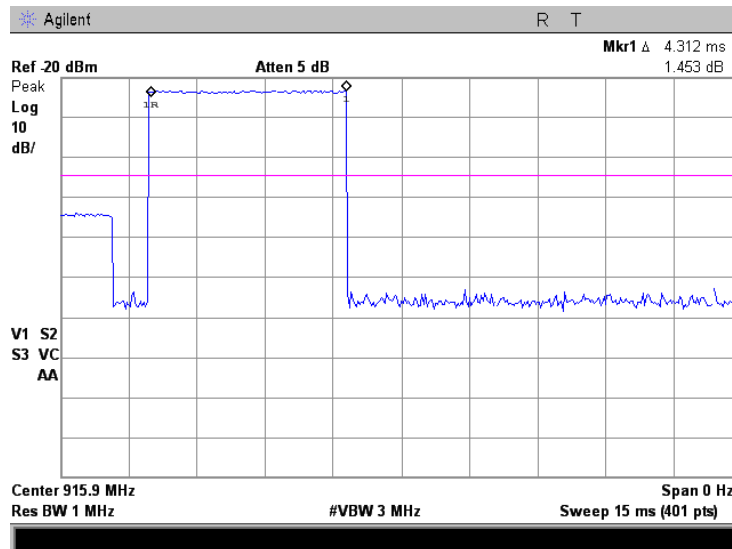

Plot 7.4.2 Single transmission period

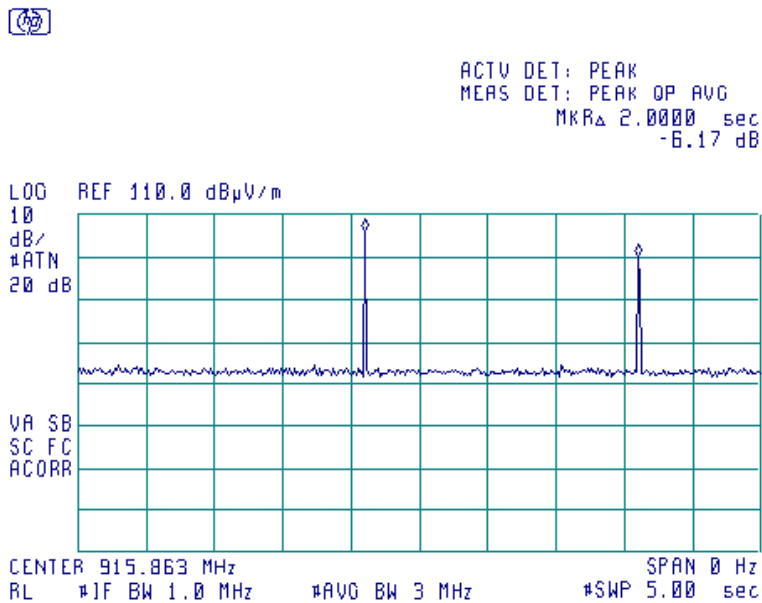



<b>Test specification:</b>		<b>Section 15.247(b), RSS-210 section A8.4(1), Peak output power</b>	
<b>Test procedure:</b>		Public notice DA 00-705	
<b>Test mode:</b>		Compliance	
<b>Date(s):</b>		9/7/2011	
<b>Temperature:</b> 22 °C		<b>Air Pressure:</b> 1008 hPa	
<b>Remarks:</b>		<b>Verdict:</b> PASS	
		<b>Relative Humidity:</b> 52 %	
		<b>Power Supply:</b> 3 V battery	

## 7.5 Peak output power

### 7.5.1 General

This test was performed to measure the maximum peak output power radiated by transmitter. Specification test limits are given in Table 7.5.1.

**Table 7.5.1 Peak output power limits**

Assigned frequency range, MHz	Peak output power*		Equivalent field strength limit @ 3m, dB(μV/m)*	Maximum antenna gain, dBi
	W	dBm		
902.0 – 928.0	1	30	131.2	6.0*
2400.0 – 2483.5	0.125 (<75 hopping channels)	21.0(<75 hopping channels)	122.2 (<75 hopping channels)	
	1.0 (≥75 hopping channels)	30.0 (≥75 hopping channels)	131.2 (≥75 hopping channels)	
5725.0 – 5850.0	1.0	30.0	131.2	

\*- Equivalent field strength limit was calculated from the peak output power as follows:  $E = \sqrt{30 \times P \times G} / r$ , where P is peak output power in Watts, r is antenna to EUT distance in meters and G is transmitter antenna gain in dBi.

\*\* - The limit is provided in terms of conducted RF power at the antenna connector. If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power limit shall be reduced below the stated value as follows:

- by 1 dB for every 3 dB that the directional gain of antenna exceeds 6 dBi for fixed point-to-point transmitters operate in 2400-2483.5 MHz band;
- without any corresponding reduction for fixed point-to-point transmitters operate in 5725-5850 MHz band;
- by the amount in dB that the directional gain of antenna exceeds 6 dBi for the rest of transmitters.

### 7.5.2 Test procedure

**7.5.2.1** The EUT was set up as shown in Figure 7.5.1, energized and its proper operation was checked.

**7.5.2.2** The EUT was adjusted to produce maximum available to end user RF output power.

**7.5.2.3** The frequency span of spectrum analyzer was set approximately 5 times wider than 20 dB bandwidth of the EUT and the resolution bandwidth was set wider than 20 dB bandwidth of the EUT. To find maximum radiation the turntable was rotated 360° and the measuring antenna height was swept in both vertical and horizontal polarizations.

**7.5.2.4** The maximum field strength of the EUT carrier frequency was measured as provided in Table 7.5.2 and associated plots.

**7.5.2.5** The maximum peak output power was calculated from the field strength of carrier as follows:

$$P = (E \times d)^2 / (30 \times G),$$

where P is the peak output power in W, E is the field strength in V/m, d is the test distance and G is the transmitter numeric antenna gain over an isotropic radiator.

The above equation was converted in logarithmic units for 3 m test distance:


$$\text{Peak output power in dBm} = \text{Field strength in dB}(\mu\text{V/m}) - \text{Transmitter antenna gain in dBi} - 95.2 \text{ dB}$$

**7.5.2.6** The worst test results (the lowest margins) were recorded in Table 7.5.2.



<b>Test specification:</b>	<b>Section 15.247(b), RSS-210 section A8.4(1), Peak output power</b>		
<b>Test procedure:</b>	Public notice DA 00-705		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date(s):</b>	9/7/2011		
<b>Temperature:</b> 22 °C	<b>Air Pressure:</b> 1008 hPa	<b>Relative Humidity:</b> 52 %	<b>Power Supply:</b> 3 V battery
<b>Remarks:</b>			

Figure 7.5.1 Setup for carrier field strength measurements

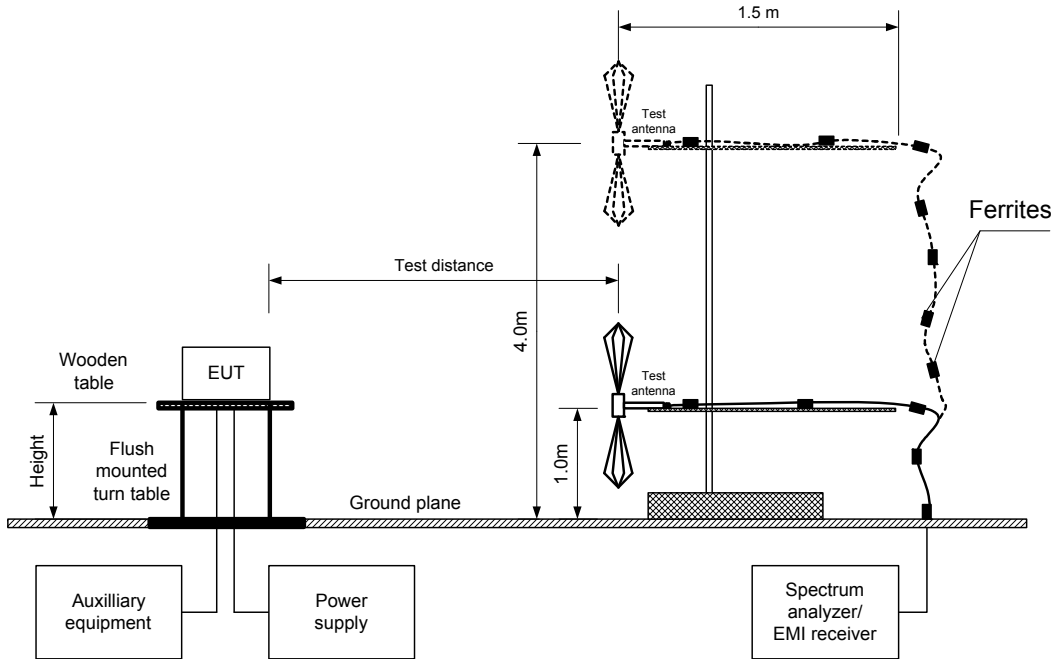



<b>Test specification:</b>		<b>Section 15.247(b), RSS-210 section A8.4(1), Peak output power</b>	
<b>Test procedure:</b>		Public notice DA 00-705	
<b>Test mode:</b>		Compliance	
<b>Date(s):</b>		9/7/2011	
<b>Temperature:</b> 22 °C		<b>Air Pressure:</b> 1008 hPa	
		<b>Relative Humidity:</b> 52 %	
		<b>Power Supply:</b> 3 V battery	
<b>Remarks:</b>			

**Table 7.5.2 Peak output power test results**

ASSIGNED FREQUENCY: 902-928 MHz  
 TEST DISTANCE: 3 m  
 TEST SITE: Semi anechoic chamber  
 EUT HEIGHT: 0.8 m  
 DETECTOR USED: Peak  
 TEST ANTENNA TYPE: Biconilog (30 MHz – 1000 MHz)  
 MODULATION: GFSK  
 BIT RATE: 50 kbps  
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum  
 DETECTOR USED: Peak  
 RESOLUTION BANDWIDTH: 120 MHz  
 VIDEO BANDWIDTH: 300 MHz  
 FREQUENCY HOPPING: Disabled

Frequency, MHz	Field strength, dB(µV/m)	Antenna polarization	Antenna height, m	Azimuth, degrees*	EUT antenna gain, dBi	Peak output power, dBm**	Limit, dBm	Margin, dB***	Verdict
912.750	106.4	V	1.00	176	-7.0	18.1	30.0	-11.9	Pass
915.863	109.3	V	1.00	178	-7.0	21.0	30.0	-9.0	Pass
919.106	103.8	V	1.00	177	-7.0	15.5	30.0	-14.5	Pass

\*- EUT front panel refer to 0 degrees position of turntable.

\*\* - Peak output power was calculated from the field strength of carrier as follows:  $P = (E \times d)^2 / (30 \times G)$ ,

where P is the peak output power in W, E is the field strength in V/m, d is the test distance in meters and G is the transmitter numeric antenna gain over an isotropic radiator. The above equation was converted in logarithmic units for 3 m test distance: *Peak output power in dBm = Field strength in dB(µV/m) - Transmitter antenna gain in dBi - 95.2 dB*

\*\*\* - Margin = Peak output power – specification limit.

Note: Maximum peak output power was obtained at Unom input power voltage.

**Reference numbers of test equipment used**

HL 0521	HL 0604	HL 2871	HL 3623				
---------	---------	---------	---------	--	--	--	--


Full description is given in Appendix A.




HERMON LABORATORIES

<b>Test specification:</b>		<b>Section 15.247(b), RSS-210 section A8.4(1), Peak output power</b>	
<b>Test procedure:</b>		Public notice DA 00-705	
<b>Test mode:</b>		Compliance	
<b>Date(s):</b>		9/7/2011	
<b>Temperature:</b> 22 °C		<b>Air Pressure:</b> 1008 hPa	
		<b>Relative Humidity:</b> 52 %	
		<b>Power Supply:</b> 3 V battery	
<b>Remarks:</b>			
		<b>Verdict:</b> PASS	

Plot 7.5.1 Field strength of carrier at low frequency at vertical antenna polarization

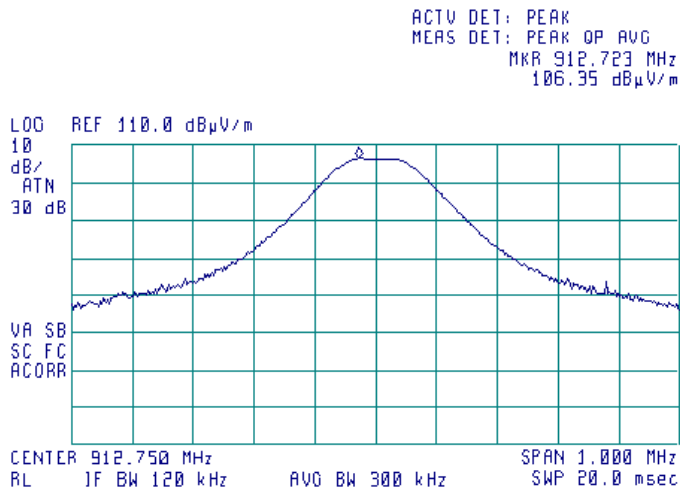

Plot 7.5.2 Field strength of carrier at low frequency at horizontal antenna polarization

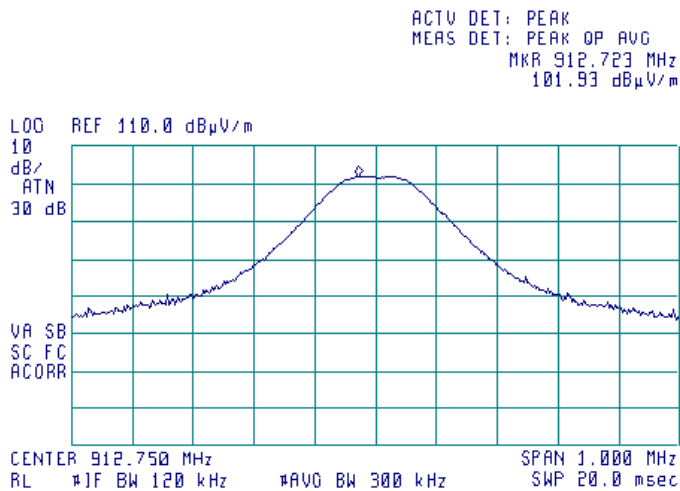





HERMON LABORATORIES

<b>Test specification:</b>		<b>Section 15.247(b), RSS-210 section A8.4(1), Peak output power</b>	
<b>Test procedure:</b>		Public notice DA 00-705	
<b>Test mode:</b>		Compliance	
<b>Date(s):</b>		9/7/2011	
<b>Temperature:</b> 22 °C		<b>Air Pressure:</b> 1008 hPa	
		<b>Relative Humidity:</b> 52 %	
		<b>Power Supply:</b> 3 V battery	
<b>Remarks:</b>			
		<b>Verdict:</b> PASS	

Plot 7.5.3 Field strength of carrier at mid frequency at vertical antenna polarization

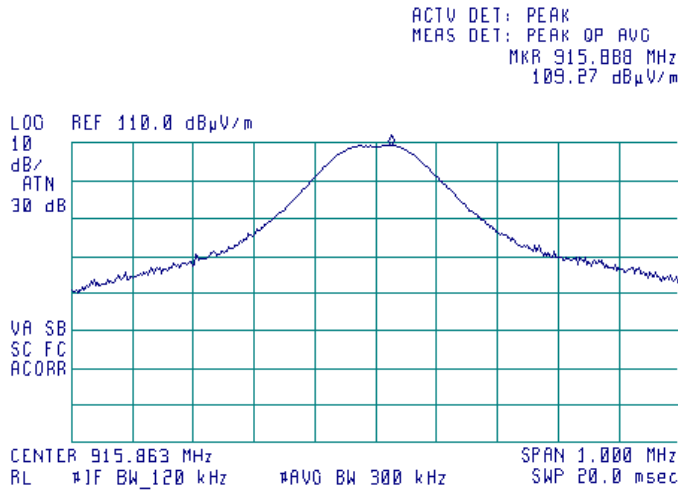

Plot 7.5.4 Field strength of carrier at mid frequency at horizontal antenna polarization

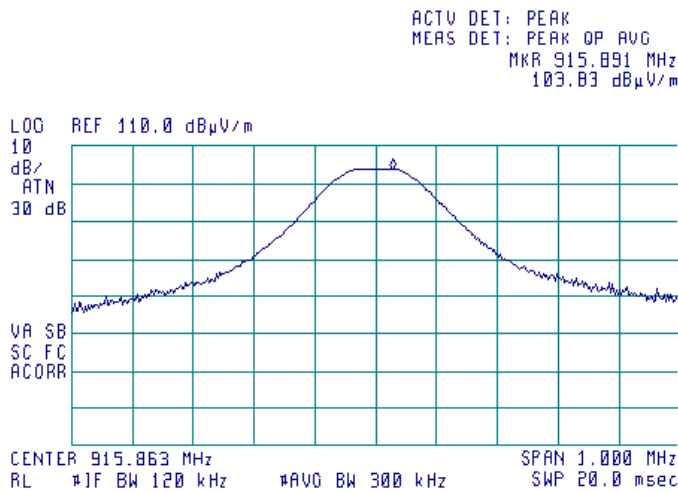





HERMON LABORATORIES

<b>Test specification:</b>		<b>Section 15.247(b), RSS-210 section A8.4(1), Peak output power</b>	
<b>Test procedure:</b>		Public notice DA 00-705	
<b>Test mode:</b>		Compliance	
<b>Date(s):</b>		9/7/2011	
<b>Temperature:</b> 22 °C		<b>Air Pressure:</b> 1008 hPa	
		<b>Relative Humidity:</b> 52 %	
		<b>Power Supply:</b> 3 V battery	
<b>Remarks:</b>			
		<b>Verdict:</b> PASS	

Plot 7.5.5 Field strength of carrier at high frequency at vertical antenna polarization

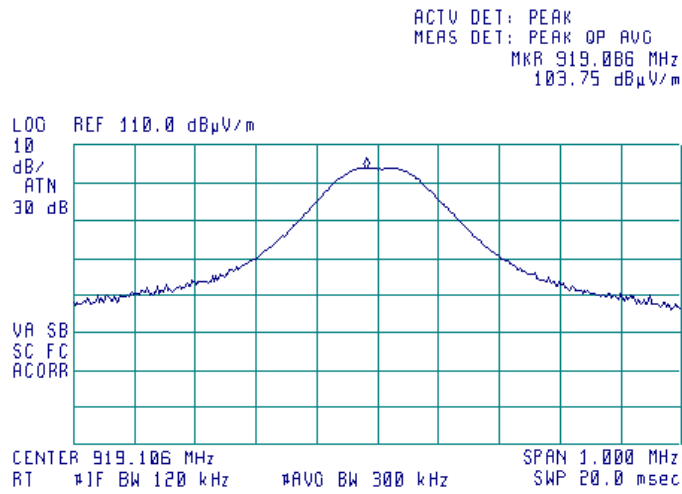

Plot 7.5.6 Field strength of carrier at high frequency at horizontal antenna polarization

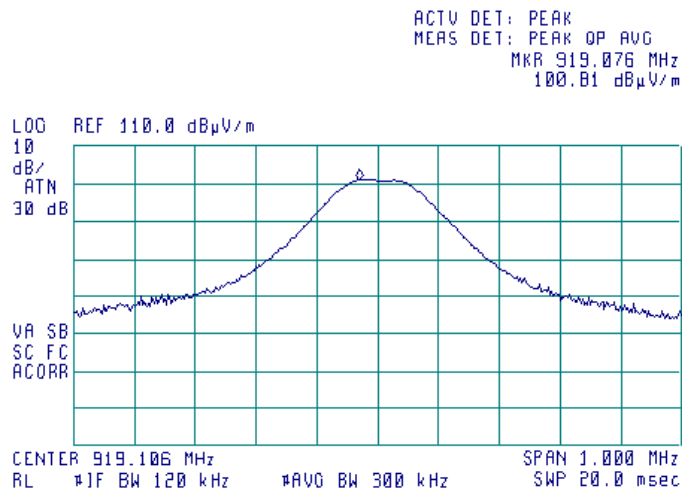





<b>Test specification:</b> Section 15.247(d), RSS-210 section A8.5, Emissions at band edges	
<b>Test procedure:</b>	Public notice DA 00-705
<b>Test mode:</b>	Compliance
<b>Date(s):</b>	8/31/2011 - 9/6/2011
<b>Temperature:</b> 24.1 °C	<b>Air Pressure:</b> 1010 hPa
<b>Relative Humidity:</b> 34 %	<b>Power Supply:</b> 3 V battery
<b>Remarks:</b>	
<b>Verdict: PASS</b>	

## 7.6 Band edge radiated emissions

### 7.6.1 General

This test was performed to measure emissions, radiated from the EUT at the assigned frequency band edges. Specification test limits are given in Table 7.6.1.

Table 7.6.1 Band edge emission limits

Assigned frequency, MHz	Attenuation below carrier*, dBc	Field strength at 3 m within restricted bands, dB(µV/m)	
		Peak	Average
902.0 – 928.0	20.0	74.0	54.0
2400.0 – 2483.5			
5725.0 – 5850.0			

\* - Band edge emission limit is provided in terms of attenuation below the peak of modulated carrier measured with the same resolution bandwidth.

### 7.6.2 Test procedure

- 7.6.2.1 The EUT was set up as shown in Figure 7.6.1, energized normally modulated at the maximum data rate with its hopping function disabled and its proper operation was checked.
- 7.6.2.2 The EUT was adjusted to produce maximum available to end user RF output power at the lowest carrier frequency. The spectrum analyzer span was set to capture the carrier frequency and associated modulation products. The resolution bandwidth was set wider than 1 % of the frequency span.
- 7.6.2.3 The spectrum analyzer was set in max hold mode and allowed trace to stabilize. The highest emission level within the authorized band was measured.
- 7.6.2.4 The maximum band edge emission and modulation product outside of the band were measured as provided in Table 7.6.2 and associated plots and referenced to the highest emission level measured within the authorized band.
- 7.6.2.5 The above procedure was repeated with the EUT adjusted to produce maximum RF output power at the highest carrier frequency.
- 7.6.2.6 The above procedure was repeated with the frequency hopping function enabled.

Figure 7.6.1 Band edge emission test setup





HERMON LABORATORIES

<b>Test specification:</b>		<b>Section 15.247(d), RSS-210 section A8.5, Emissions at band edges</b>	
<b>Test procedure:</b>		Public notice DA 00-705	
<b>Test mode:</b>		Compliance	
<b>Date(s):</b>		8/31/2011 - 9/6/2011	
<b>Temperature:</b> 24.1 °C		<b>Air Pressure:</b> 1010 hPa	
		<b>Relative Humidity:</b> 34 %	
		<b>Power Supply:</b> 3 V battery	
<b>Remarks:</b>			

**Table 7.6.2 Band edge emission test results**

ASSIGNED FREQUENCY RANGE: 902 – 928 MHz  
 DETECTOR USED: Peak  
 MODULATION: FSK  
 MODULATING SIGNAL: PRBS  
 BIT RATE: 50 kbps  
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum  
 RESOLUTION BANDWIDTH: ≥ 1% of the span  
 VIDEO BANDWIDTH: ≥ RBW

Frequency, MHz	Band edge emission, dBuV	Emission at carrier, dBuV	Attenuation below carrier, dBc	Limit, dBc	Margin, dB*	Verdict
<b>Frequency hopping disabled</b>						
902.00	28.22	84.32	56.10	20.0	36.10	Pass
928.00	28.77	83.63	54.86		34.86	
<b>Frequency hopping enabled</b>						
902.00	36.04	84.32	48.28	20.0	28.28	Pass
928.00	36.22	83.63	47.41		27.41	

\*- Margin = Attenuation below carrier – specification limit.

**Reference numbers of test equipment used**


HL 0337	HL 1457	HL 2909				
---------	---------	---------	--	--	--	--

Full description is given in Appendix A.




<b>Test specification:</b> Section 15.247(d), RSS-210 section A8.5, Emissions at band edges			
<b>Test procedure:</b> Public notice DA 00-705			
<b>Test mode:</b> Compliance	<b>Verdict:</b> PASS		
<b>Date(s):</b> 8/31/2011 - 9/6/2011			
<b>Temperature:</b> 24.1 °C	<b>Air Pressure:</b> 1010 hPa	<b>Relative Humidity:</b> 34 %	<b>Power Supply:</b> 3 V battery
<b>Remarks:</b>			

Plot 7.6.1 The highest band edge emission at low carrier frequency with hopping function disabled

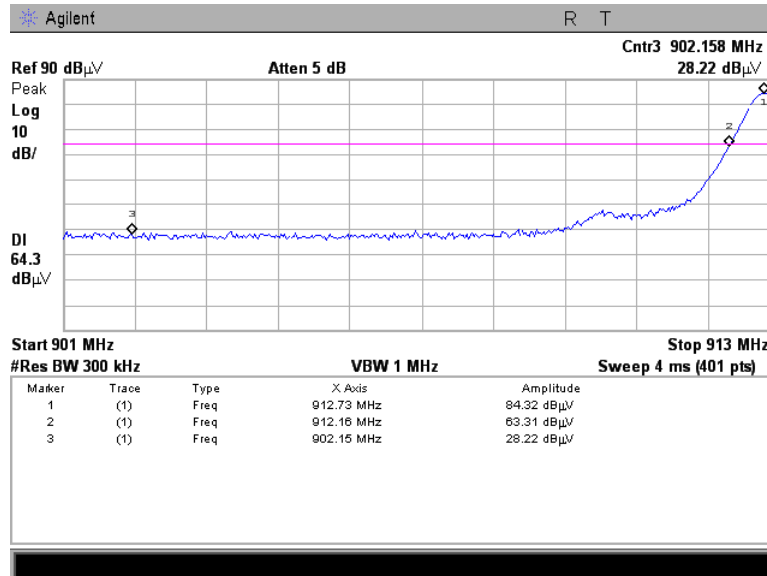


Plot 7.6.2 The highest band edge emission at high carrier frequency with hopping function disabled

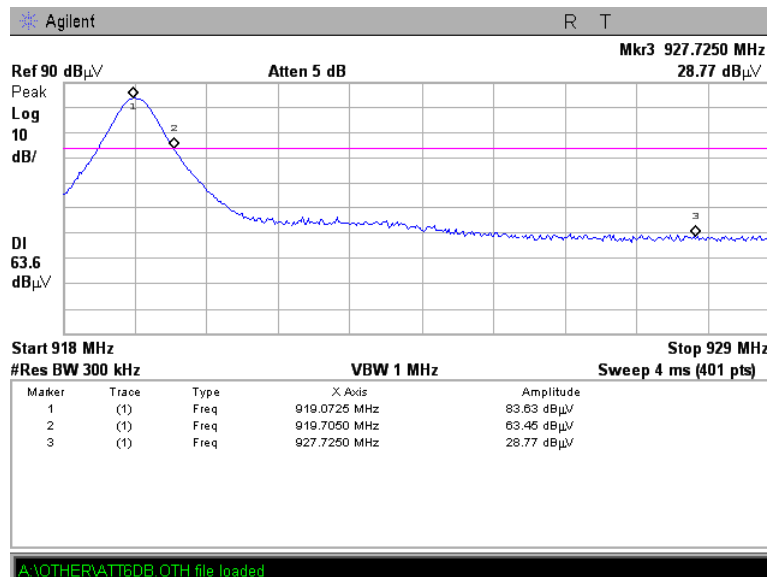




<b>Test specification:</b>		<b>Section 15.247(d), RSS-210 section A8.5, Emissions at band edges</b>	
<b>Test procedure:</b>		Public notice DA 00-705	
<b>Test mode:</b>		<b>Verdict:</b> PASS	
<b>Date(s):</b>		8/31/2011 - 9/6/2011	
<b>Temperature:</b> 24.1 °C	<b>Air Pressure:</b> 1010 hPa	<b>Relative Humidity:</b> 34 %	<b>Power Supply:</b> 3 V battery
<b>Remarks:</b>			

Plot 7.6.3 The highest band edge emission at low carrier frequency with hopping function enabled

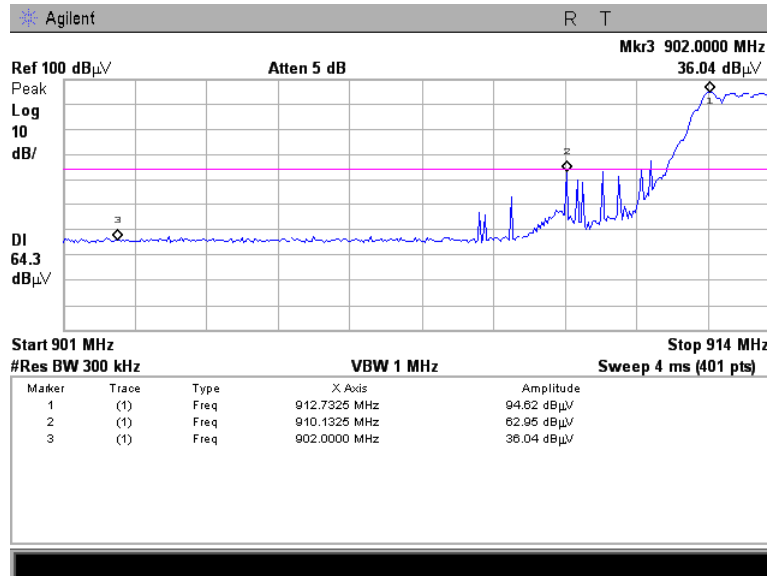

Plot 7.6.4 The highest band edge emission at high carrier frequency with hopping function enabled

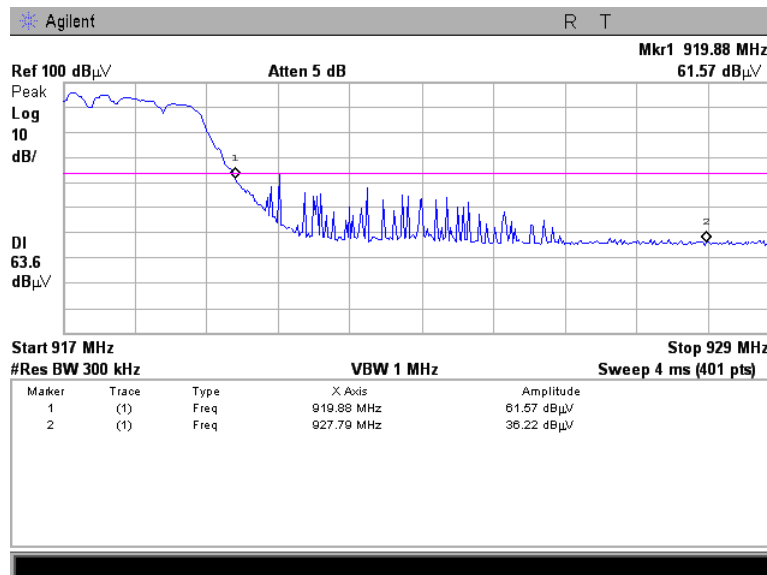



<b>Test specification:</b>	<b>Section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions</b>		
<b>Test procedure:</b>	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
<b>Test mode:</b>	Compliance	<b>Verdict: PASS</b>	
<b>Date(s):</b>	9/12/2011		
<b>Temperature:</b> 25 °C	<b>Air Pressure:</b> 1012 hPa	<b>Relative Humidity:</b> 33 %	<b>Power Supply:</b> 3 V battery
<b>Remarks:</b>			

## 7.7 Field strength of spurious emissions

### 7.7.1 General

This test was performed to measure field strength of spurious emissions from the EUT. Specification test limits are given in Table 7.7.1.

**Table 7.7.1 Radiated spurious emissions limits**

Frequency, MHz	Field strength at 3 m within restricted bands, dB(μV/m) <sup>***</sup>			Attenuation of field strength of spurious versus carrier outside restricted bands, dBc <sup>***</sup>
	Peak	Quasi Peak	Average	
0.009 – 0.090	148.5 – 128.5	NA	128.5 – 108.5 <sup>**</sup>	20.0
0.090 – 0.110	NA	108.5 – 106.8 <sup>**</sup>	NA	
0.110 – 0.490	126.8 – 113.8	NA	106.8 – 93.8 <sup>**</sup>	
0.490 – 1.705	NA	73.8 – 63.0 <sup>**</sup>	NA	
1.705 – 30.0*		69.5		
30 – 88		40.0		
88 – 216		43.5		
216 – 960		46.0		
960 - 1000		54.0		
1000 – 10 <sup>th</sup> harmonic		74.0		

\*- The limit for 3 m test distance was calculated using the inverse square distance extrapolation factor as follows:  

$$\text{Lim}_{S_2} = \text{Lim}_{S_1} + 40 \log (S_1/S_2),$$
 where  $S_1$  and  $S_2$  – standard defined and test distance respectively in meters.

\*\* - The limit decreases linearly with the logarithm of frequency.

\*\*\* - The field strength limits applied from the lowest radio frequency generated in the device, without going below 9 kHz up to the tenth harmonic of the highest fundamental frequency.

### 7.7.2 Test procedure for spurious emission field strength measurements in 9 kHz to 30 MHz band

7.7.2.1 The EUT was set up as shown in Figure 7.7.1, energized and the performance check was conducted.

7.7.2.2 The specified frequency range was investigated with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360° and the measuring antenna was rotated around its vertical axis.

7.7.2.3 The worst test results (the lowest margins) were recorded and shown in the associated plots.

### 7.7.3 Test procedure for spurious emission field strength measurements above 30 MHz

7.7.3.1 The EUT was set up as shown in Figure 7.7.2, energized and the performance check was conducted.

7.7.3.2 The specified frequency range was investigated with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360°, the measuring antenna height was changed from 1 to 4 m, its polarization was switched from vertical to horizontal.

7.7.3.3 The worst test results (the lowest margins) were recorded and shown in the associated plots.



<b>Test specification:</b>	<b>Section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions</b>		
<b>Test procedure:</b>	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date(s):</b>	9/12/2011		
<b>Temperature:</b> 25 °C	<b>Air Pressure:</b> 1012 hPa	<b>Relative Humidity:</b> 33 %	<b>Power Supply:</b> 3 V battery
<b>Remarks:</b>			

Figure 7.7.1 Setup for spurious emission field strength measurements below 30 MHz


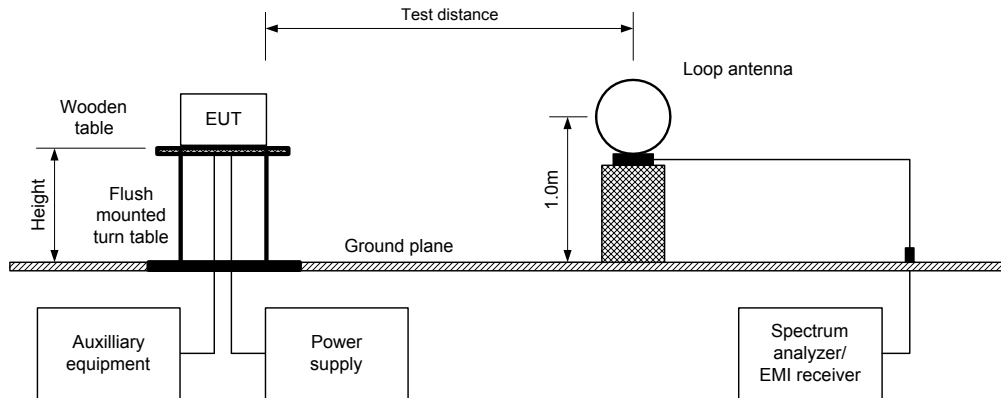


Figure 7.7.2 Setup for spurious emission field strength measurements above 30 MHz



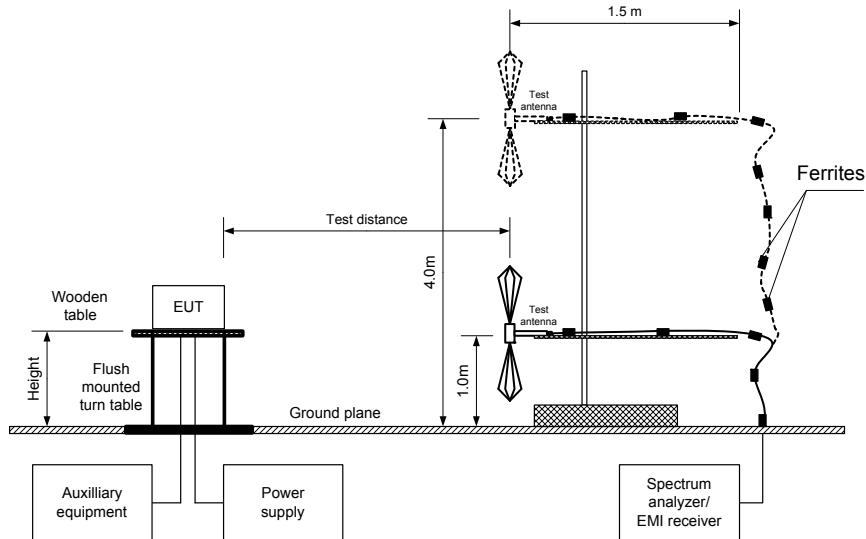

<b>Test specification:</b>		<b>Section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions</b>	
<b>Test procedure:</b>		Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4	
<b>Test mode:</b>		Compliance	
<b>Date(s):</b>		9/12/2011	
<b>Temperature:</b> 25 °C		<b>Air Pressure:</b> 1012 hPa	
		<b>Relative Humidity:</b> 33 %	
		<b>Power Supply:</b> 3 V battery	
<b>Remarks:</b>			

**Table 7.7.2 Field strength of emissions outside restricted bands**

ASSIGNED FREQUENCY: 902-928 MHz  
 INVESTIGATED FREQUENCY RANGE: 0.009 -9500 MHz  
 TEST DISTANCE: 3 m  
 MODULATION: GFSK  
 MODULATING SIGNAL: PRBS  
 BIT RATE: 50 kbps  
 DUTY CYCLE: 100 %  
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum  
 DETECTOR USED: Peak  
 RESOLUTION BANDWIDTH: 100 kHz  
 VIDEO BANDWIDTH: 300 kHz  
 TEST ANTENNA TYPE: Active loop (9 kHz – 30 MHz)  
 Biconilog (30 MHz – 1000 MHz)  
 Double ridged guide (above 1000 MHz)  
 Disabled

FREQUENCY HOPPING:

Frequency, MHz	Field strength of spurious, dB(µV/m)	Antenna polarization	Antenna height, m	Azimuth, degrees*	Field strength of carrier, dB(µV/m)	Attenuation below carrier, dBc	Limit, dBc	Margin, dB**	Verdict
<b>Low carrier frequency</b>									
1825.500	63.9	H	1.40	167	105.9	42.0	20.0	-22.0	Pass
5476.500	56.9	V	1.40	160		49.0		-29.0	
<b>Mid carrier frequency</b>									
1831.726	67.9	H	1.35	171	109.1	41.2	20.0	-21.2	Pass
5495.178	60.9	V	1.40	160		48.2		-28.2	
<b>High carrier frequency</b>									
1838.212	61.8	H	1.30	173	103.6	41.9	20.0	-21.9	Pass
5514.636	55.6	H	1.40	160		48.1		-28.1	

\*- EUT front panel refers to 0 degrees position of turntable.

\*\*- Margin = Attenuation below carrier – specification limit.



HERMON LABORATORIES

<b>Test specification:</b>		<b>Section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions</b>	
<b>Test procedure:</b>		Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4	
<b>Test mode:</b>		Compliance	
<b>Date(s):</b>		9/12/2011	
<b>Temperature: 25 °C</b>		<b>Air Pressure: 1012 hPa</b>	
<b>Remarks:</b>		<b>Verdict: PASS</b>	
		<b>Relative Humidity: 33 %</b>	
		<b>Power Supply: 3 V battery</b>	

**Table 7.7.3 Field strength of spurious emissions above 1 GHz within restricted bands**

ASSIGNED FREQUENCY: 902-928 MHz  
 INVESTIGATED FREQUENCY RANGE: 1000 -9500 MHz  
 TEST DISTANCE: 3 m  
 MODULATION: GFSK  
 MODULATING SIGNAL: PRBS  
 BIT RATE: 50 kbps  
 DUTY CYCLE: 100 %  
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum  
 DETECTOR USED: Peak  
 RESOLUTION BANDWIDTH: 1000 kHz  
 TEST ANTENNA TYPE: Double ridged guide  
 FREQUENCY HOPPING: Disabled

Frequency, MHz	Antenna		Azimuth, degrees*	Peak field strength(VBW=3 MHz)			Average field strength(VBW=10 Hz)				Verdict
	Polarization	Height, m		Measured, dB(µV/m)	Limit, dB(µV/m)	Margin, dB**	Measured, dB(µV/m)	Calculated, dB(µV/m)	Limit, dB(µV/m)	Margin, dB***	
<b>Low carrier frequency</b>											
2738.250	H	1.00	210	54.2	74.0	-19.8	52.6	25.3	54.0	-28.7	Pass
3651.000	H	1.80	180	54.5	74.0	-19.5	52.4	25.1	54.0	-28.9	
4563.750	V	1.60	180	55.2	74.0	-18.8	53.4	26.1	54.0	-27.9	
7302.000	H	1.40	167	60.3	74.0	-13.7	55.6	28.3	54.0	-25.7	
9127.500	V	1.30	175	54.7	74.0	-19.3	52.4	25.1	54.0	-28.9	
<b>Mid carrier frequency</b>											
2747.589	H	1.00	210	58.8	74.0	-15.2	58.1	30.8	54.0	-23.2	Pass
3663.452	H	1.80	200	57.9	74.0	-16.1	56.7	29.4	54.0	-24.6	
4579.315	V	1.60	180	60.5	74.0	-13.5	59.5	32.2	54.0	-21.8	
7326.904	H	1.50	170	59.2	74.0	-14.8	57.4	30.1	54.0	-23.9	
9158.630	V	1.30	172	54.2	74.0	-19.8	49.3	22.0	54.0	-32.0	
<b>High carrier frequency</b>											
2757.318	H	1.00	210	52.1	74.0	-21.9	50.4	23.1	54.0	-30.9	Pass
3676.424	H	1.80	200	52.0	74.0	-22.0	49.1	21.8	54.0	-32.2	
4595.530	V	1.60	180	51.5	74.0	-22.5	48.6	21.3	54.0	-32.7	
7352.848	H	1.35	172	56.3	74.0	-17.7	53.9	26.6	54.0	-27.4	
9191.060	V	1.50	178	49.7	74.0	-24.3	44.6	17.3	54.0	-36.7	

\*- EUT front panel refers to 0 degrees position of turntable.  
 \*\*- Margin = Measured field strength - specification limit.  
 \*\*\*- Margin = Calculated field strength - specification limit,  
 where Calculated field strength = Measured field strength + average factor.

**Table 7.7.4 Average factor calculation**

Transmission pulse		Transmission burst		Transmission train duration, ms	Average factor, dB
Duration, ms	Period, ms	Duration, ms	Period, ms		
4.312	2000	NA	NA	NA	-27.3

\*- Average factor was calculated as follows

for pulse train shorter than 100 ms: 
$$Average\ factor = 20 \times \log_{10} \left( \frac{Pulse\ duration}{Pulse\ period} \times \frac{Burst\ duration}{Train\ duration} \times Number\ of\ bursts\ within\ pulse\ train \right)$$

for pulse train longer than 100 ms: 
$$Average\ factor = 20 \times \log_{10} \left( \frac{Pulse\ duration}{Pulse\ period} \times \frac{Burst\ duration}{100\ ms} \times Number\ of\ bursts\ within\ 100\ ms \right)$$





<b>Test specification:</b>		<b>Section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions</b>	
<b>Test procedure:</b>		Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4	
<b>Test mode:</b>		Compliance	
<b>Date(s):</b>		9/12/2011	
<b>Temperature:</b> 25 °C		<b>Air Pressure:</b> 1012 hPa	
<b>Remarks:</b>		<b>Verdict:</b> PASS	
		<b>Relative Humidity:</b> 33 %	
		<b>Power Supply:</b> 3 V battery	

**Table 7.7.5 Field strength of spurious emissions below 1 GHz within restricted bands**

ASSIGNED FREQUENCY: 902-928 MHz  
 INVESTIGATED FREQUENCY RANGE: 0.009 – 1000 MHz  
 TEST DISTANCE: 3 m  
 MODULATION: GFSK  
 ASSIGNED FREQUENCY: 902-928 MHz  
 BIT RATE: 50 kbps  
 DUTY CYCLE: 100 %  
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum  
 RESOLUTION BANDWIDTH: 0.2 kHz (9 kHz – 150 kHz)  
 9.0 kHz (150 kHz – 30 MHz)  
 120 kHz (30 MHz – 1000 MHz)  
 VIDEO BANDWIDTH: > Resolution bandwidth  
 TEST ANTENNA TYPE: Active loop (9 kHz – 30 MHz)  
 Biconilog (30 MHz – 1000 MHz)  
 FREQUENCY HOPPING: Disabled

Frequency, MHz	Peak emission, dB(µV/m)	Quasi-peak			Antenna polarization	Antenna height, m	Turn-table position**, degrees	Verdict
		Measured emission, dB(µV/m)	Limit, dB(µV/m)	Margin, dB*				
<b>Low carrier frequency</b>								
No emissions were found								Pass
<b>Mid carrier frequency</b>								
No emissions were found								Pass
<b>High carrier frequency</b>								
No emissions were found								Pass

\*- Margin = Measured emission - specification limit.  
 \*\*- EUT front panel refer to 0 degrees position of turntable.

**Table 7.7.6 Restricted bands**

MHz	MHz	MHz	MHz	MHz	GHz
0.09 - 0.11	8.37625 - 8.38675	73 - 74.6	399.9 - 410	2690 - 2900	10.6 - 12.7
0.495 - 0.505	8.41425 - 8.41475	74.8 - 75.2	608 - 614	3260 - 3267	13.25 - 13.4
2.1735 - 2.1905	12.29 - 12.293	108 - 121.94	960 - 1240	3332 - 3339	14.47 - 14.5
4.125 - 4.128	12.51975 - 12.52025	123 - 138	1300 - 1427	3345.8 - 3358	15.35 - 16.2
4.17725 - 4.17775	12.57675 - 12.57725	149.9 - 150.05	1435 - 1626.5	3600 - 4400	17.7 - 21.4
4.20725 - 4.20775	13.36 - 13.41	156.52475 - 156.52525	1645.5 - 1646.5	4500 - 5150	22.01 - 23.12
6.215 - 6.218	16.42 - 16.423	156.7 - 156.9	1660 - 1710	5350 - 5460	23.6 - 24
6.26775 - 6.26825	16.69475 - 16.69525	162.0125 - 167.17	1718.8 - 1722.2	7250 - 7750	31.2 - 31.8
6.31175 - 6.31225	16.80425 - 16.80475	167.72 - 173.2	2200 - 2300	8025 - 8500	36.43 - 36.5
8.291 - 8.294	25.5 - 25.67	240 - 285	2310 - 2390	9000 - 9200	Above 38.6
8.362 - 8.366	37.5 - 38.25	322 - 335.4	2483.5 - 2500	9300 - 9500	

**Reference numbers of test equipment used**

HL 0446	HL 0521	HL 0604	HL 1984	HL 2871	HL 3121	HL 3531	HL 3623
---------	---------	---------	---------	---------	---------	---------	---------

Full description is given in Appendix A.




HERMON LABORATORIES

<b>Test specification:</b>		<b>Section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions</b>	
<b>Test procedure:</b>		Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4	
<b>Test mode:</b>		Compliance	
<b>Date(s):</b>		9/12/2011	
<b>Temperature:</b> 25 °C		<b>Air Pressure:</b> 1012 hPa	
<b>Remarks:</b>		<b>Verdict:</b> PASS	
		<b>Relative Humidity:</b> 33 %	
		<b>Power Supply:</b> 3 V battery	


**Plot 7.7.1 Radiated emission measurements at the low carrier frequency**

TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical

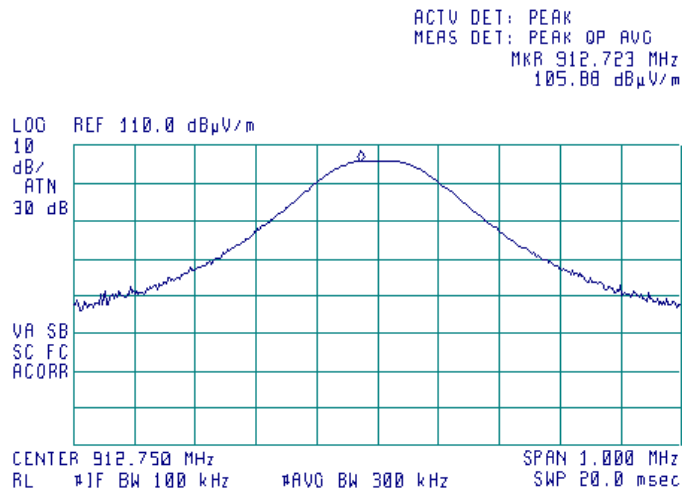

**Plot 7.7.2 Radiated emission measurements at the low carrier frequency**

TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Horizontal

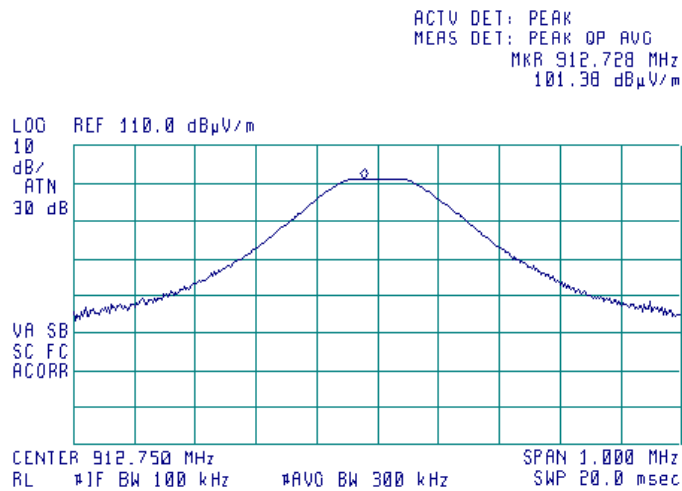




HERMON LABORATORIES

<b>Test specification:</b>		<b>Section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions</b>	
<b>Test procedure:</b>		Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4	
<b>Test mode:</b>		<b>Verdict: PASS</b>	
<b>Date(s):</b>		9/12/2011	
<b>Temperature:</b> 25 °C	<b>Air Pressure:</b> 1012 hPa	<b>Relative Humidity:</b> 33 %	<b>Power Supply:</b> 3 V battery
<b>Remarks:</b>			


**Plot 7.7.3 Radiated emission measurements at the mid carrier frequency**

TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical

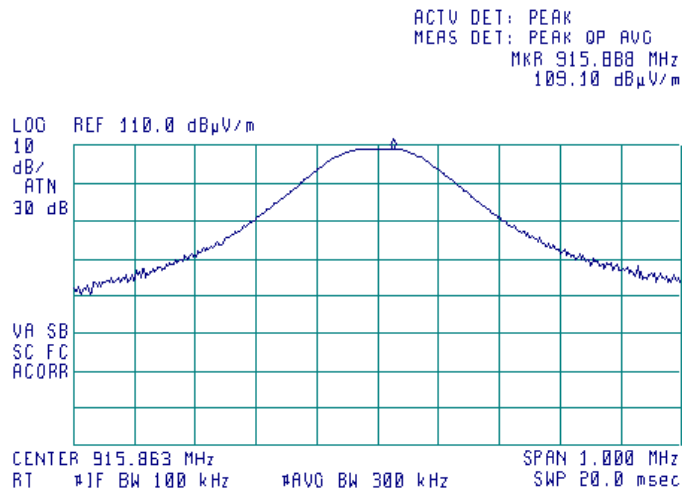

**Plot 7.7.4 Radiated emission measurements at the mid carrier frequency**

TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Horizontal

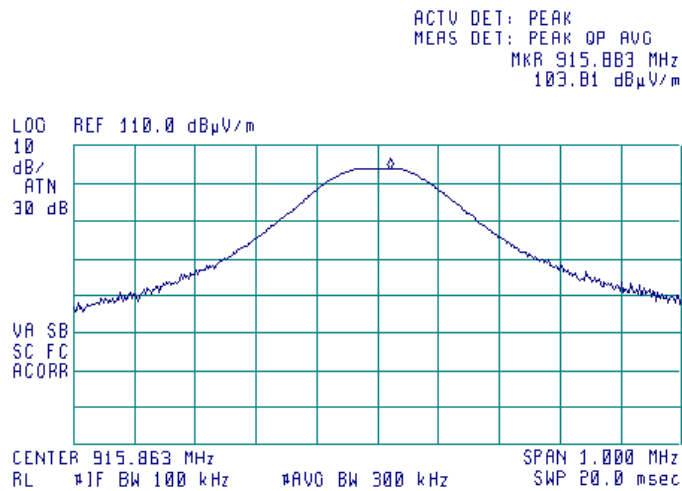




HERMON LABORATORIES

<b>Test specification:</b>		<b>Section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions</b>	
<b>Test procedure:</b>		Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4	
<b>Test mode:</b>		<b>Verdict:</b> PASS	
<b>Date(s):</b>		9/12/2011	
<b>Temperature:</b> 25 °C	<b>Air Pressure:</b> 1012 hPa	<b>Relative Humidity:</b> 33 %	<b>Power Supply:</b> 3 V battery
<b>Remarks:</b>			


**Plot 7.7.5 Radiated emission measurements at the high carrier frequency**

TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical

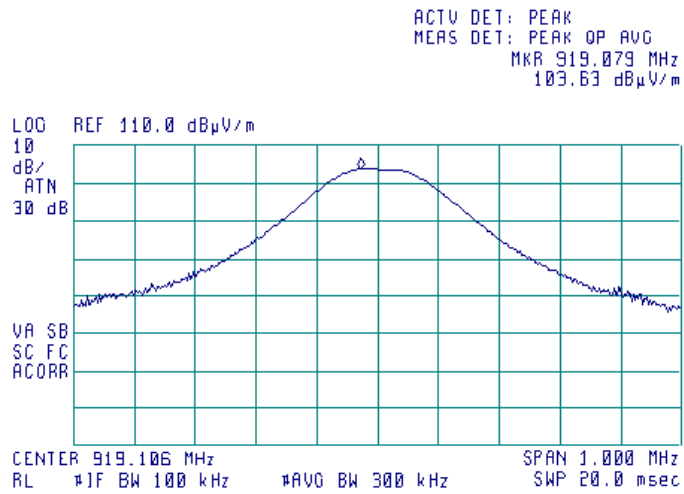

**Plot 7.7.6 Radiated emission measurements at the high carrier frequency**

TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Horizontal

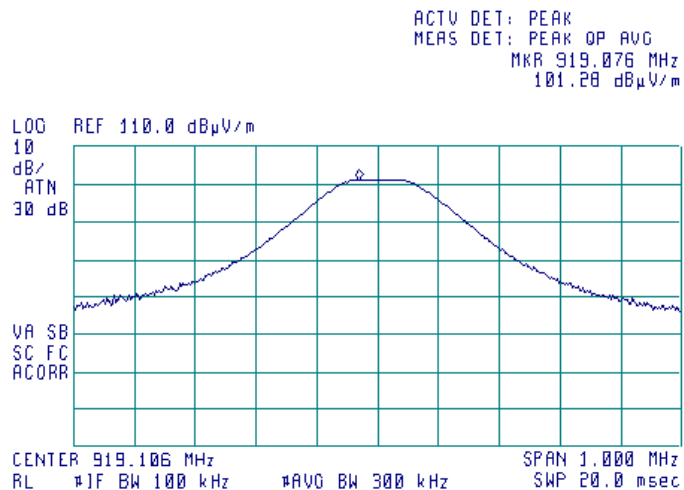




HERMON LABORATORIES

<b>Test specification:</b>	<b>Section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions</b>		
<b>Test procedure:</b>	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date(s):</b>	9/12/2011		
<b>Temperature:</b> 25 °C	<b>Air Pressure:</b> 1012 hPa	<b>Relative Humidity:</b> 33 %	<b>Power Supply:</b> 3 V battery
<b>Remarks:</b>			


Plot 7.7.7 Radiated emission measurements from 9 to 150 kHz at the low, mid and high carrier frequency

TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical

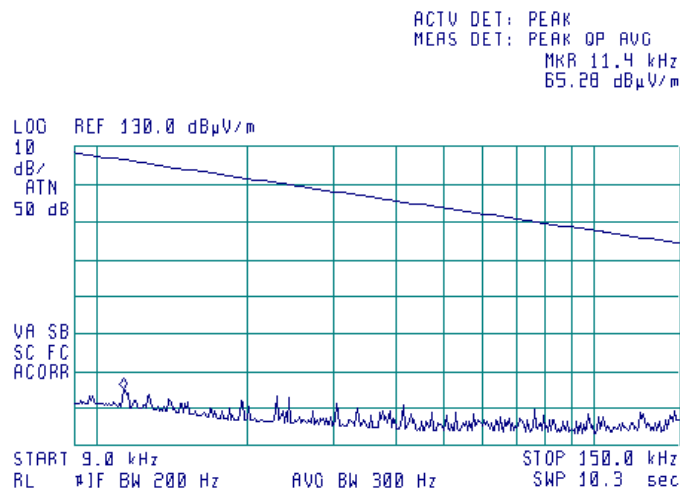

Plot 7.7.8 Radiated emission measurements from 0.15 to 30 MHz at the low, mid and high carrier frequency

TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical

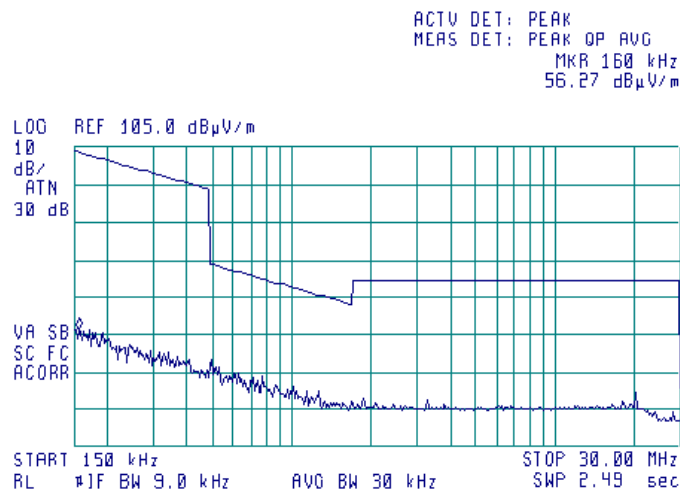




HERMON LABORATORIES

<b>Test specification:</b> Section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions	
<b>Test procedure:</b> Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4	
<b>Test mode:</b> Compliance	<b>Verdict:</b> PASS
<b>Date(s):</b> 9/12/2011	
<b>Temperature:</b> 25 °C	<b>Air Pressure:</b> 1012 hPa
	<b>Relative Humidity:</b> 33 %
<b>Power Supply:</b> 3 V battery	
<b>Remarks:</b>	


Plot 7.7.9 Radiated emission measurements from 30 to 1000 MHz at the low carrier frequency

TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical and Horizontal

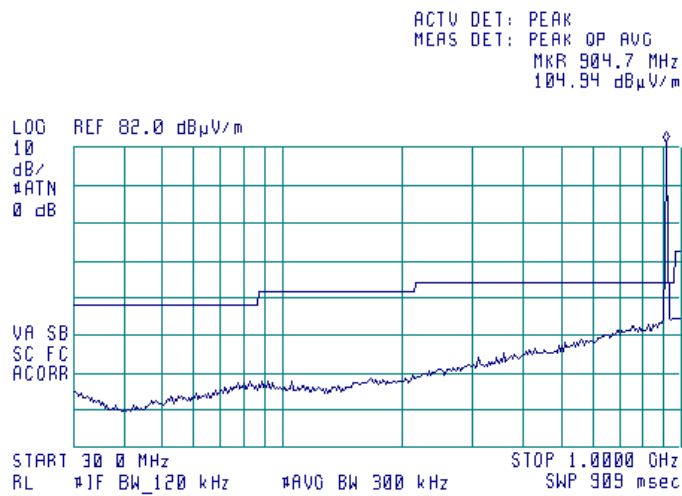

Plot 7.7.10 Radiated emission measurements from 30 to 1000 MHz at the mid carrier frequency

TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical and Horizontal

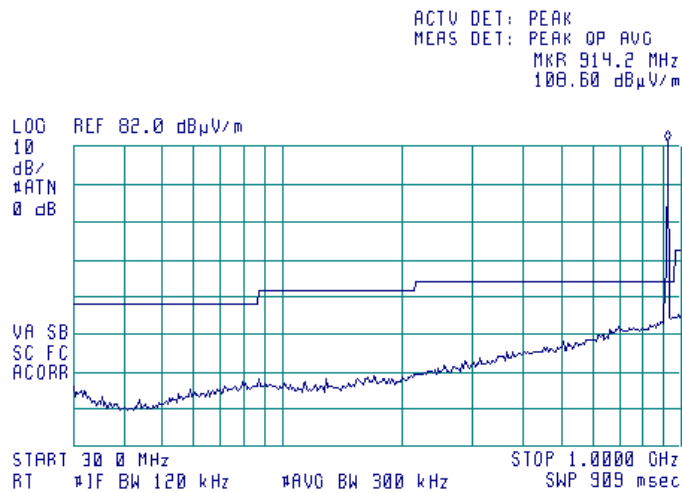




HERMON LABORATORIES

<b>Test specification:</b>	<b>Section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions</b>		
<b>Test procedure:</b>	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date(s):</b>	9/12/2011		
<b>Temperature:</b> 25 °C	<b>Air Pressure:</b> 1012 hPa	<b>Relative Humidity:</b> 33 %	<b>Power Supply:</b> 3 V battery
<b>Remarks:</b>			



Plot 7.7.11 Radiated emission measurements from 30 to 1000 MHz at the high carrier frequency

TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical and Horizontal

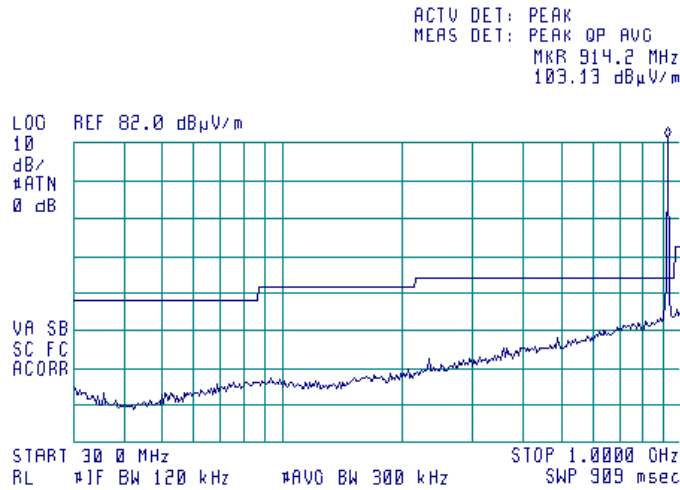

Plot 7.7.12 Radiated emission measurements from 1000 to 2900 MHz at the low carrier frequency

TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical and Horizontal

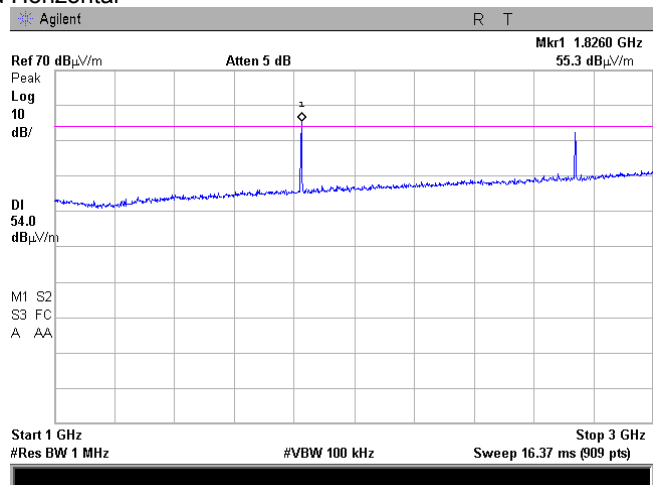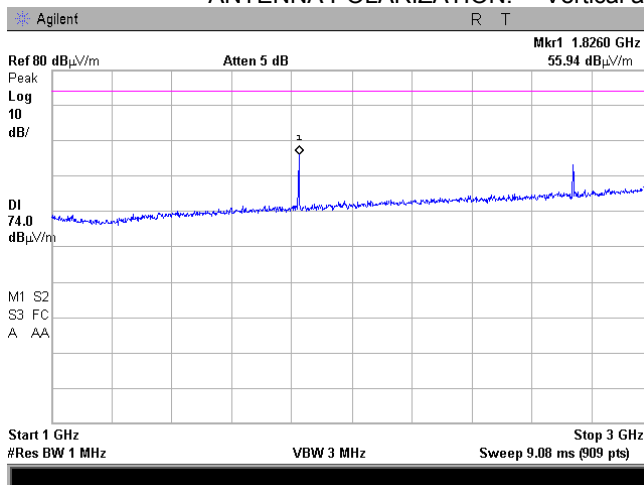





HERMON LABORATORIES

<b>Test specification:</b>	<b>Section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions</b>		
<b>Test procedure:</b>	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date(s):</b>	9/12/2011		
<b>Temperature:</b> 25 °C	<b>Air Pressure:</b> 1012 hPa	<b>Relative Humidity:</b> 33 %	<b>Power Supply:</b> 3 V battery
<b>Remarks:</b>			



Plot 7.7.13 Radiated emission measurements from 1000 to 2900 MHz at the mid carrier frequency

TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical and Horizontal

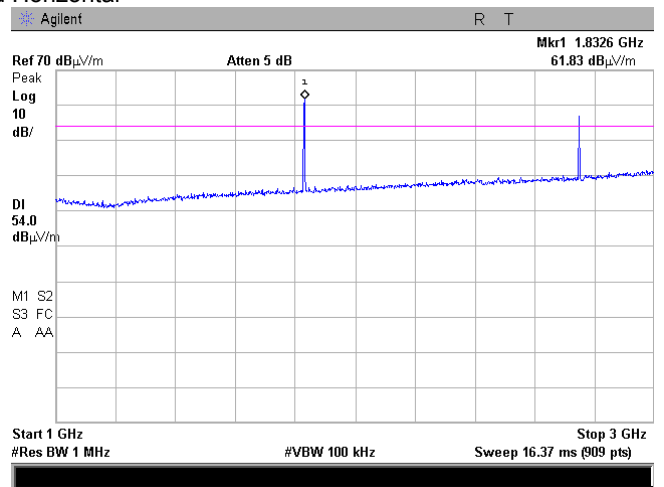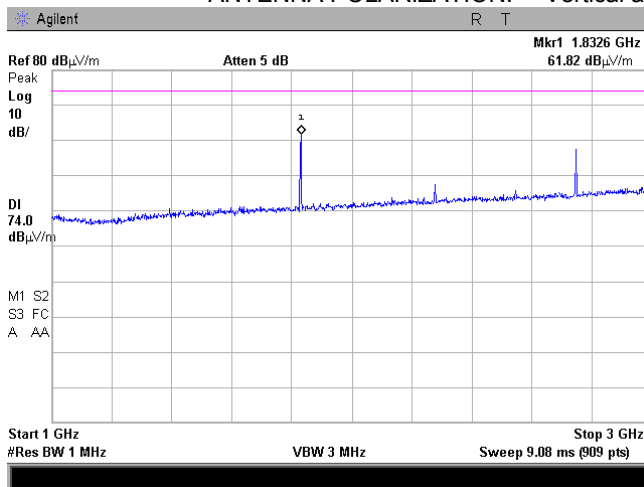

Plot 7.7.14 Radiated emission measurements from 1000 to 2900 MHz at the high carrier frequency

TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical and Horizontal

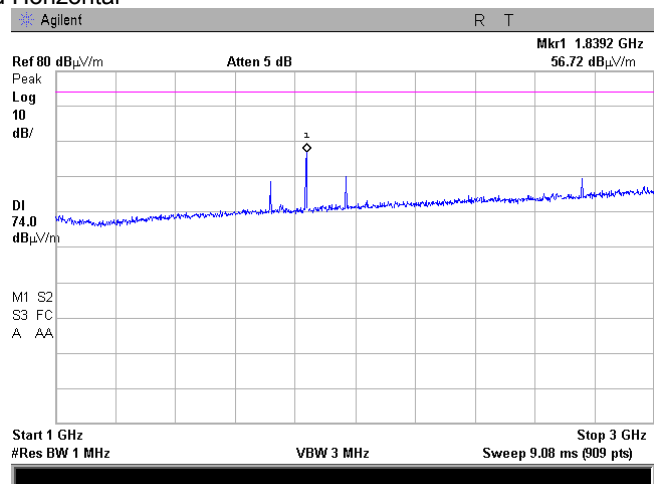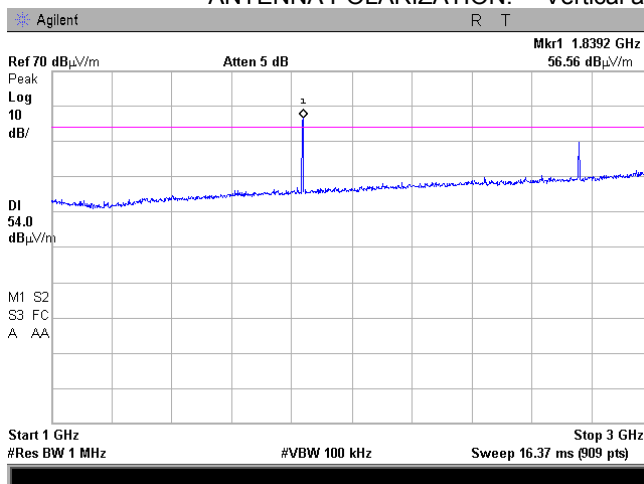







HERMON LABORATORIES

<b>Test specification:</b>	<b>Section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions</b>		
<b>Test procedure:</b>	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
<b>Test mode:</b>	Compliance	<b>Verdict: PASS</b>	
<b>Date(s):</b>	9/12/2011		
<b>Temperature: 25 °C</b>	<b>Air Pressure: 1012 hPa</b>	<b>Relative Humidity: 33 %</b>	<b>Power Supply: 3 V battery</b>
<b>Remarks:</b>			


Plot 7.7.15 Radiated emission measurements from 3000 to 9500 MHz at the low carrier frequency

TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical and Horizontal

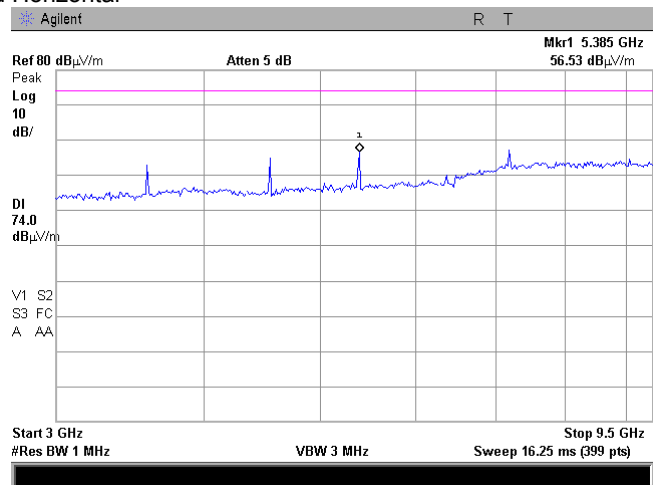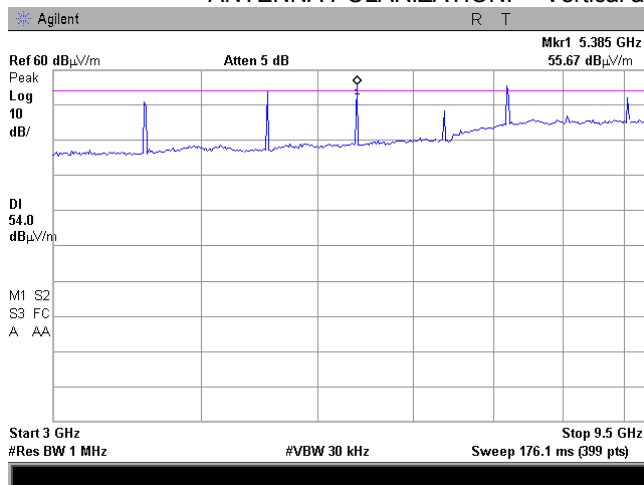

Plot 7.7.16 Radiated emission measurements from 2900 to 9500 MHz at the mid carrier frequency

TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical and Horizontal

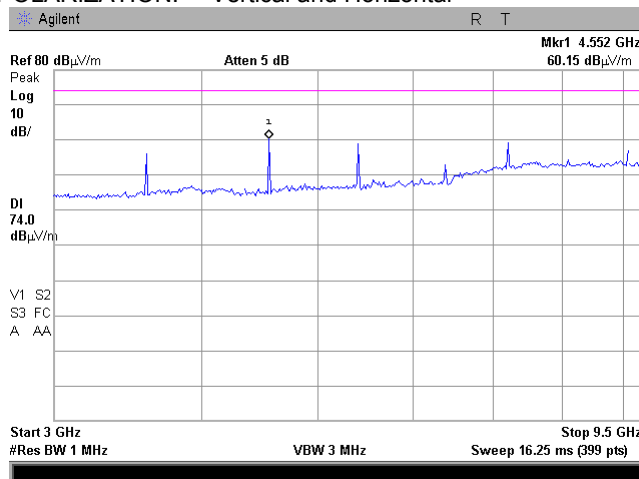





HERMON LABORATORIES

<b>Test specification:</b>	<b>Section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions</b>		
<b>Test procedure:</b>	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
<b>Test mode:</b>	Compliance	<b>Verdict: PASS</b>	
<b>Date(s):</b>	9/12/2011		
<b>Temperature:</b> 25 °C	<b>Air Pressure:</b> 1012 hPa	<b>Relative Humidity:</b> 33 %	<b>Power Supply:</b> 3 V battery
<b>Remarks:</b>			

Plot 7.7.17 Radiated emission measurements from 2900 to 9500 MHz at the high carrier frequency

TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical and Horizontal

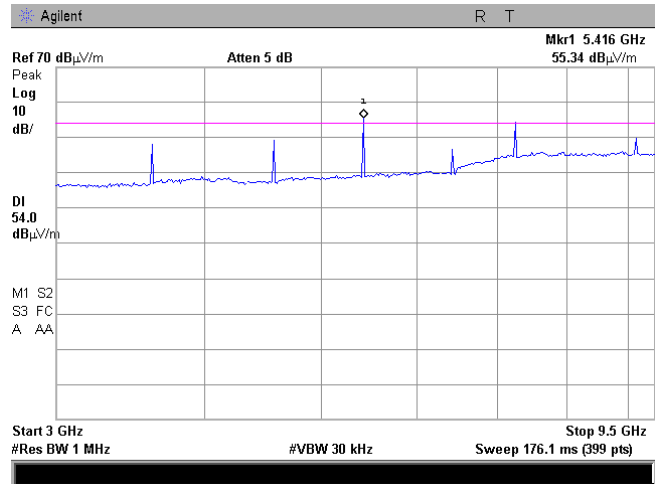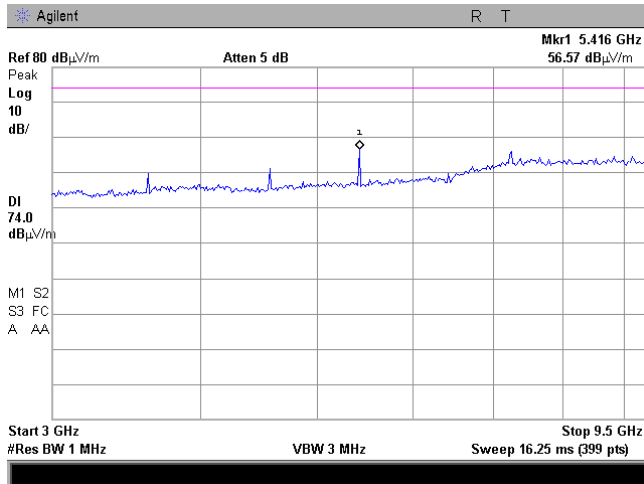




HERMON LABORATORIES

<b>Test specification:</b>		<b>Section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions</b>	
<b>Test procedure:</b>		Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4	
<b>Test mode:</b>		<b>Verdict: PASS</b>	
<b>Date(s):</b>		9/12/2011	
<b>Temperature:</b> 25 °C	<b>Air Pressure:</b> 1012 hPa	<b>Relative Humidity:</b> 33 %	<b>Power Supply:</b> 3 V battery
<b>Remarks:</b>			


**Plot 7.7.18 Radiated emission measurements at the second harmonic of low carrier frequency**

TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical

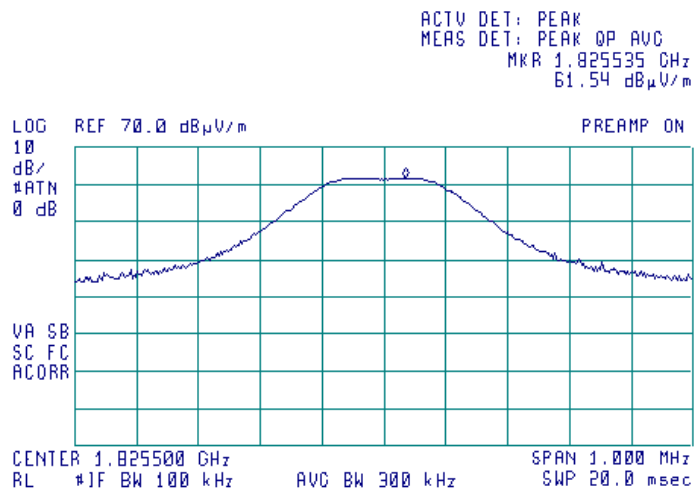

**Plot 7.7.19 Radiated emission measurements at the second harmonic of low carrier frequency**

TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Horizontal

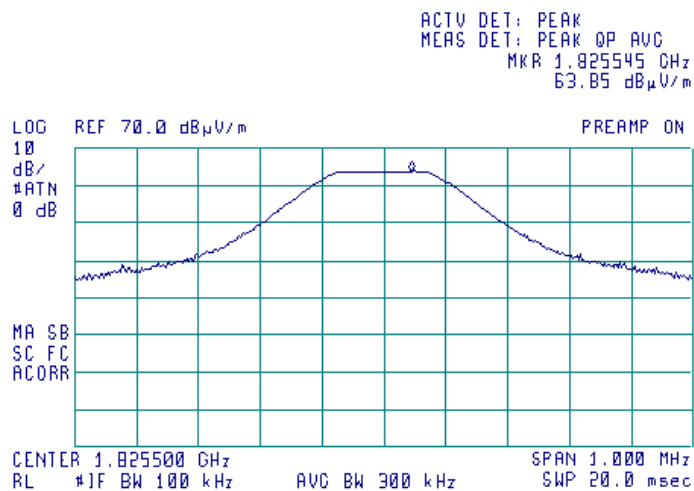




HERMON LABORATORIES

<b>Test specification:</b>		<b>Section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions</b>	
<b>Test procedure:</b>		Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4	
<b>Test mode:</b>		<b>Verdict:</b> PASS	
<b>Date(s):</b>		9/12/2011	
<b>Temperature:</b> 25 °C	<b>Air Pressure:</b> 1012 hPa	<b>Relative Humidity:</b> 33 %	<b>Power Supply:</b> 3 V battery
<b>Remarks:</b>			


**Plot 7.7.20 Radiated emission measurements at the second harmonic of mid carrier frequency**

TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical

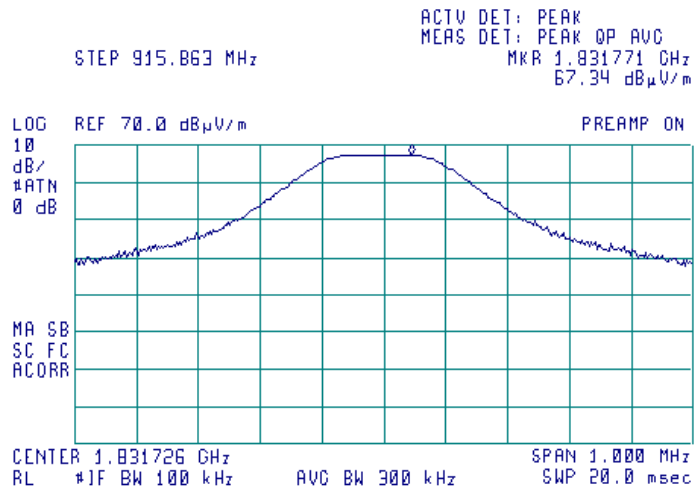

**Plot 7.7.21 Radiated emission measurements at the second harmonic of mid carrier frequency**

TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Horizontal

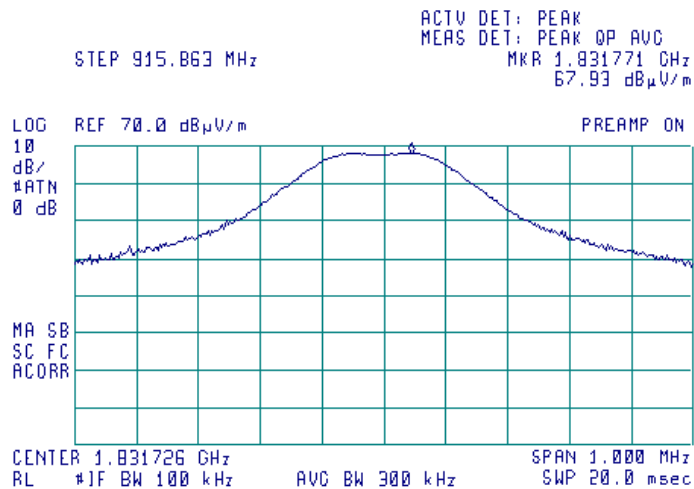




HERMON LABORATORIES

<b>Test specification:</b>		<b>Section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions</b>	
<b>Test procedure:</b>		Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4	
<b>Test mode:</b>		<b>Verdict:</b> PASS	
<b>Date(s):</b> 9/12/2011			
<b>Temperature:</b> 25 °C	<b>Air Pressure:</b> 1012 hPa	<b>Relative Humidity:</b> 33 %	<b>Power Supply:</b> 3 V battery
<b>Remarks:</b>			


Plot 7.7.22 Radiated emission measurements at the second harmonic of high carrier frequency

TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical

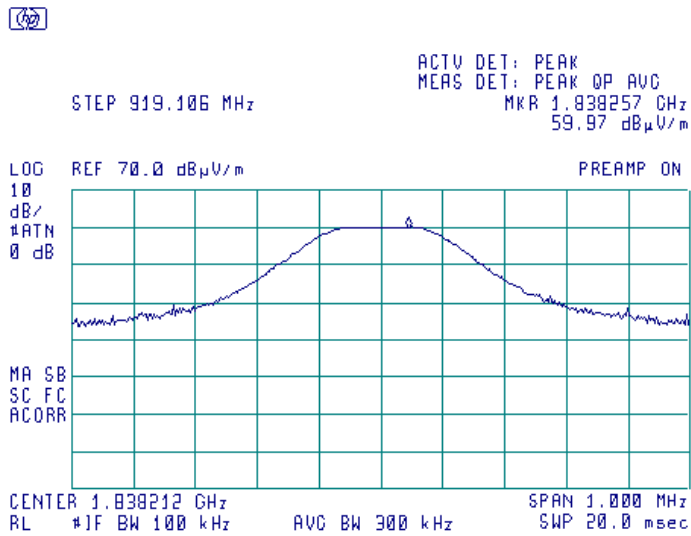

Plot 7.7.23 Radiated emission measurements at the second harmonic of high carrier frequency

TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Horizontal

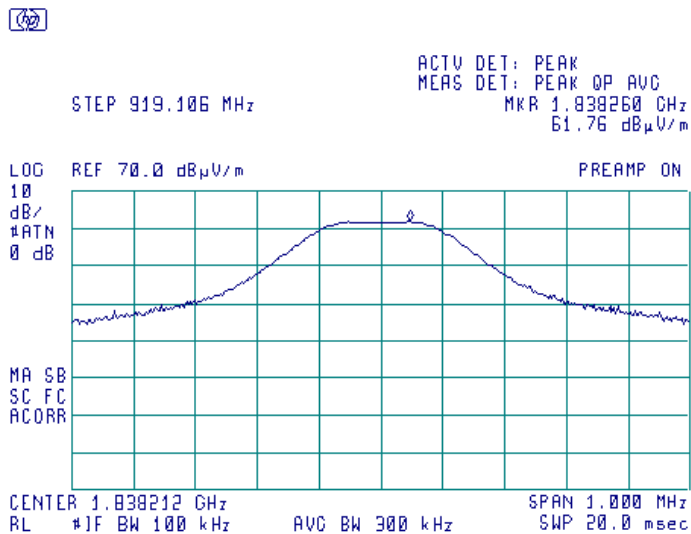





HERMON LABORATORIES

<b>Test specification:</b> Section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions	
<b>Test procedure:</b> Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4	
<b>Test mode:</b> Compliance	<b>Verdict:</b> PASS
<b>Date(s):</b> 9/12/2011	
<b>Temperature:</b> 25 °C	<b>Air Pressure:</b> 1012 hPa
<b>Relative Humidity:</b> 33 %	<b>Power Supply:</b> 3 V battery
<b>Remarks:</b>	

Plot 7.7.24 Radiated emission measurements at the third harmonic of low carrier frequency

TEST SITE:  
TEST DISTANCE:  
ANTENNA POLARIZATION:  
DETECTOR: Peak



OATS  
3 m  
Vertical  
DETECTOR: Average

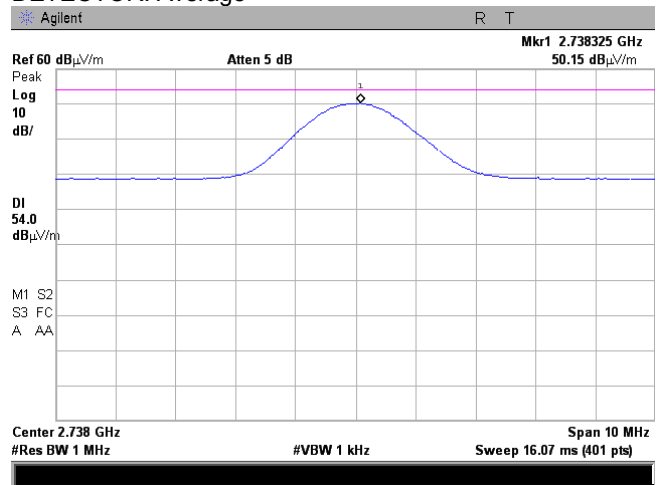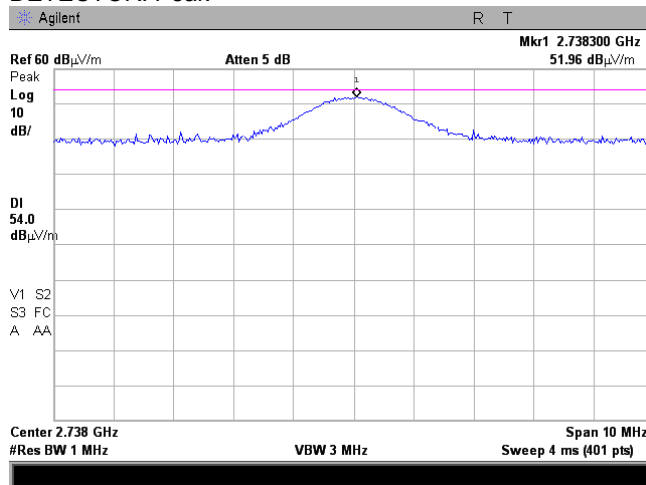

Plot 7.7.25 Radiated emission measurements at the third harmonic of low carrier frequency

TEST SITE:  
TEST DISTANCE:  
ANTENNA POLARIZATION:  
DETECTOR: Peak

OATS  
3 m  
Horizontal  
DETECTOR: Average

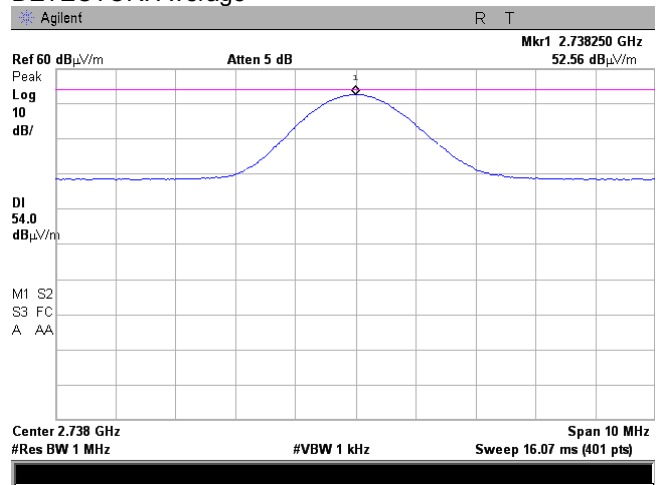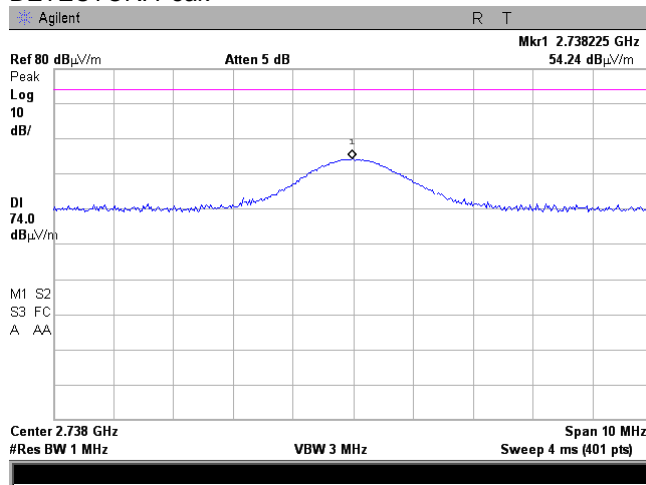





HERMON LABORATORIES

<b>Test specification:</b> Section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions	
<b>Test procedure:</b> Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4	
<b>Test mode:</b> Compliance	<b>Verdict:</b> PASS
<b>Date(s):</b> 9/12/2011	
<b>Temperature:</b> 25 °C	<b>Air Pressure:</b> 1012 hPa
<b>Relative Humidity:</b> 33 %	<b>Power Supply:</b> 3 V battery
<b>Remarks:</b>	

Plot 7.7.26 Radiated emission measurements at the third harmonic of mid carrier frequency

TEST SITE:  
TEST DISTANCE:  
ANTENNA POLARIZATION:  
DETECTOR: Peak



OATS  
3 m  
Vertical  
DETECTOR: Average

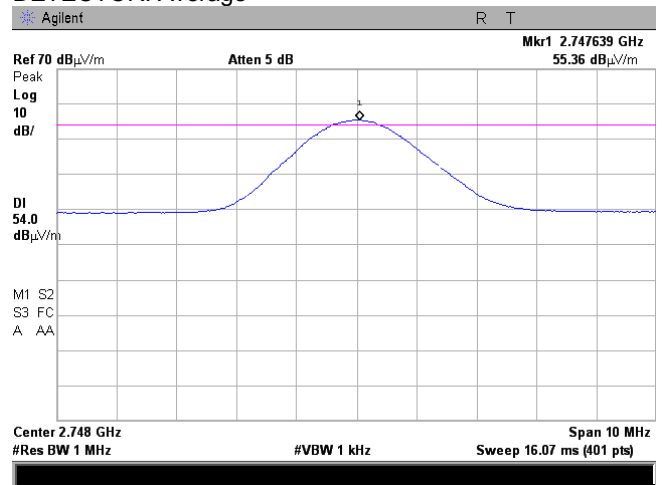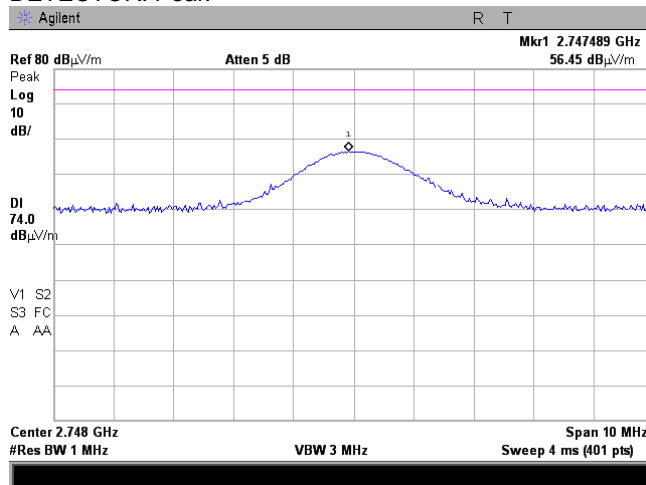

Plot 7.7.27 Radiated emission measurements at the third harmonic of mid carrier frequency

TEST SITE:  
TEST DISTANCE:  
ANTENNA POLARIZATION:  
DETECTOR: Peak

OATS  
3 m  
Horizontal  
DETECTOR: Average

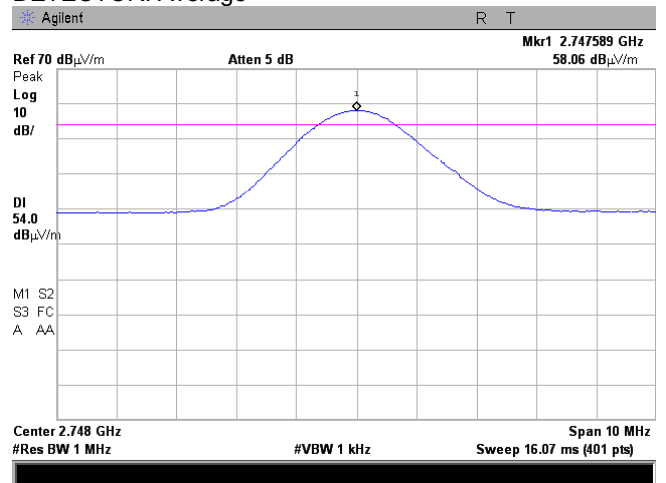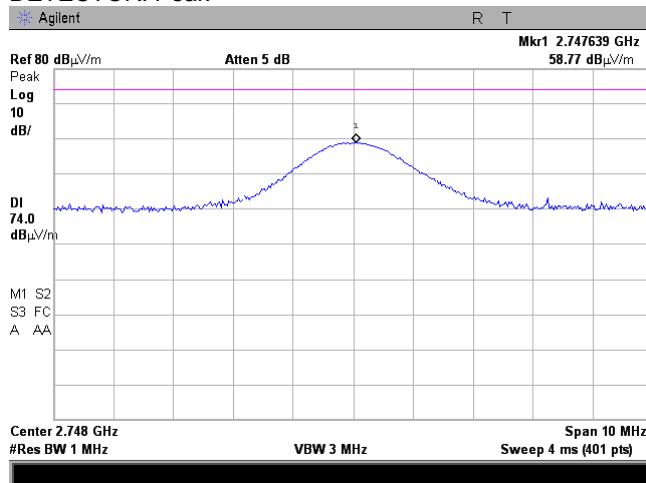





HERMON LABORATORIES

<b>Test specification:</b> Section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions	
<b>Test procedure:</b> Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4	
<b>Test mode:</b> Compliance	<b>Verdict:</b> PASS
<b>Date(s):</b> 9/12/2011	
<b>Temperature:</b> 25 °C	<b>Air Pressure:</b> 1012 hPa
<b>Relative Humidity:</b> 33 %	<b>Power Supply:</b> 3 V battery
<b>Remarks:</b>	

Plot 7.7.28 Radiated emission measurements at the third harmonic of high carrier frequency

TEST SITE:  
TEST DISTANCE:  
ANTENNA POLARIZATION:  
DETECTOR: Peak



OATS  
3 m  
Vertical  
DETECTOR: Average

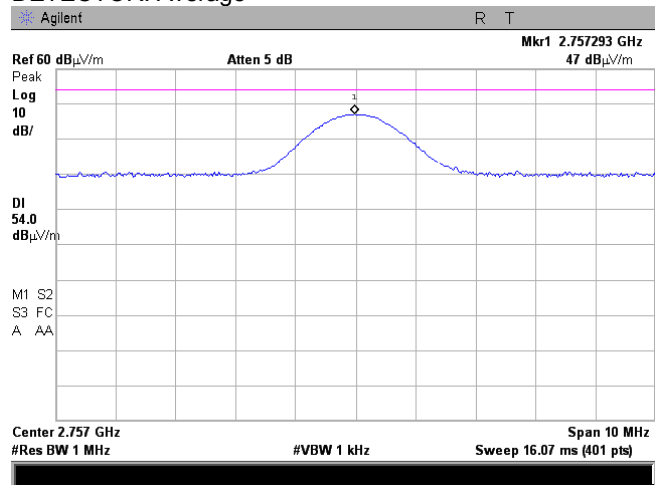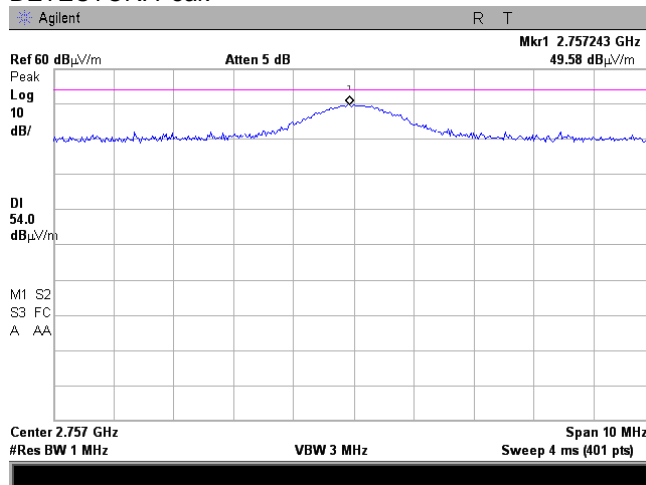

Plot 7.7.29 Radiated emission measurements at the third harmonic of high carrier frequency

TEST SITE:  
TEST DISTANCE:  
ANTENNA POLARIZATION:  
DETECTOR: Peak

OATS  
3 m  
Horizontal  
DETECTOR: Average

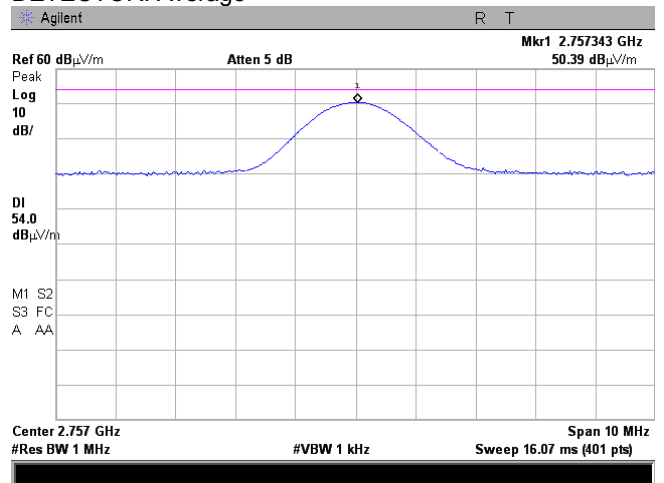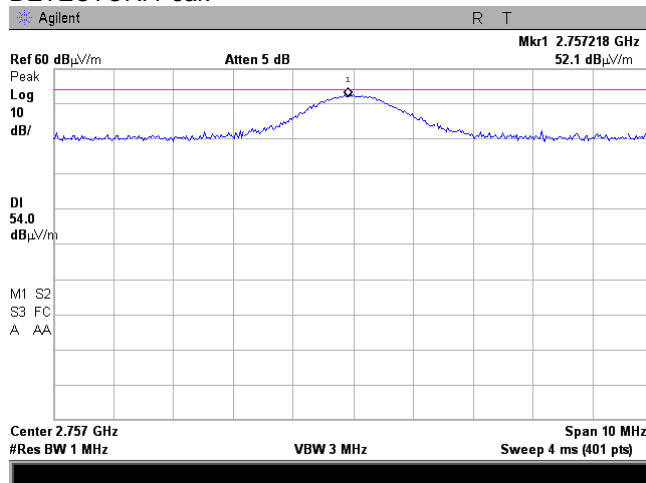







HERMON LABORATORIES

<b>Test specification:</b> Section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions	
<b>Test procedure:</b> Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4	
<b>Test mode:</b> Compliance	<b>Verdict:</b> PASS
<b>Date(s):</b> 9/12/2011	
<b>Temperature:</b> 25 °C	<b>Air Pressure:</b> 1012 hPa
<b>Relative Humidity:</b> 33 %	<b>Power Supply:</b> 3 V battery
<b>Remarks:</b>	

Plot 7.7.30 Radiated emission measurements at the fourth harmonic of low carrier frequency

TEST SITE:  
TEST DISTANCE:  
ANTENNA POLARIZATION:  
DETECTOR: Peak



OATS  
3 m  
Vertical  
DETECTOR: Average

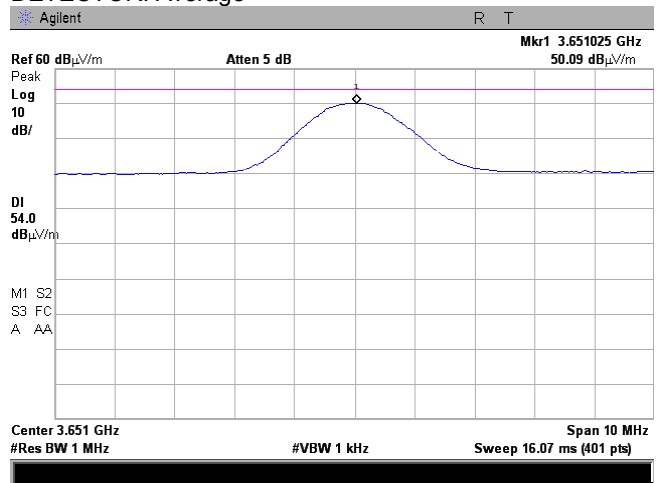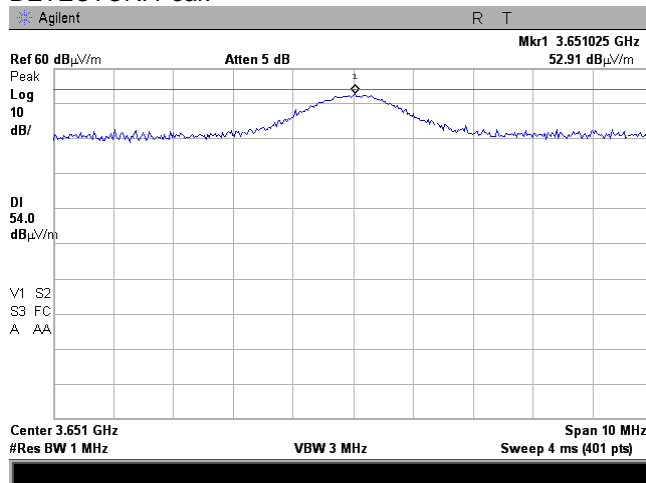

Plot 7.7.31 Radiated emission measurements at the fourth harmonic of low carrier frequency

TEST SITE:  
TEST DISTANCE:  
ANTENNA POLARIZATION:  
DETECTOR: Peak

OATS  
3 m  
Horizontal  
DETECTOR: Average

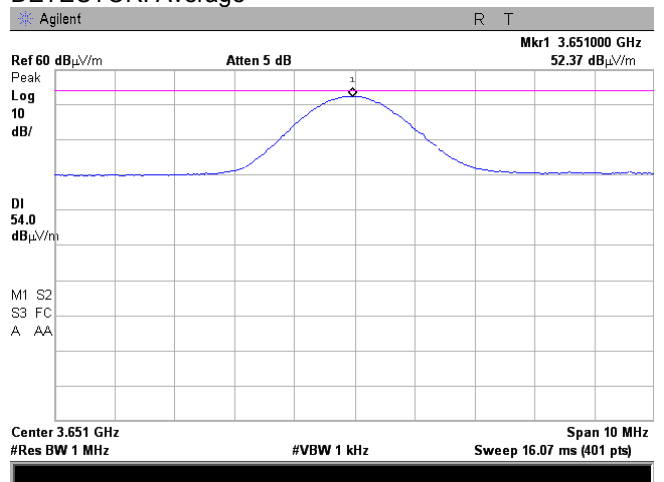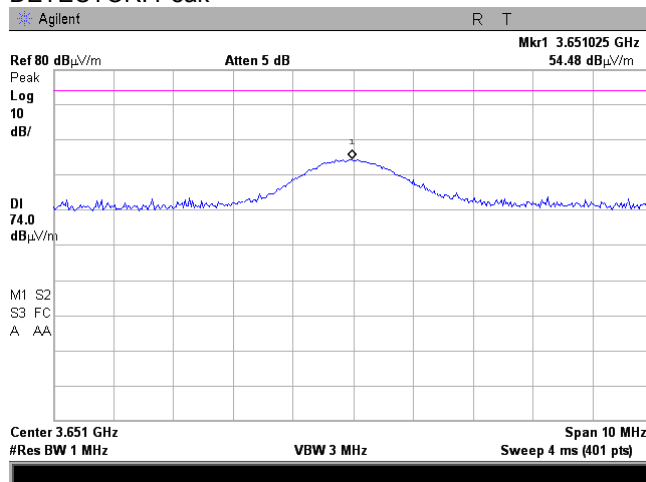





HERMON LABORATORIES

<b>Test specification:</b> Section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions	
<b>Test procedure:</b> Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4	
<b>Test mode:</b> Compliance	<b>Verdict:</b> PASS
<b>Date(s):</b> 9/12/2011	
<b>Temperature:</b> 25 °C	<b>Air Pressure:</b> 1012 hPa
	<b>Relative Humidity:</b> 33 %
	<b>Power Supply:</b> 3 V battery
<b>Remarks:</b>	

Plot 7.7.32 Radiated emission measurements at the fourth harmonic of mid carrier frequency

TEST SITE:  
TEST DISTANCE:  
ANTENNA POLARIZATION:  
DETECTOR: Peak



OATS  
3 m  
Vertical  
DETECTOR: Average

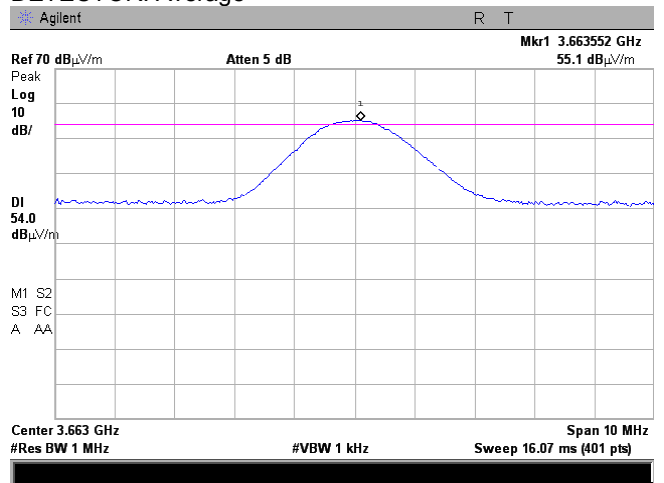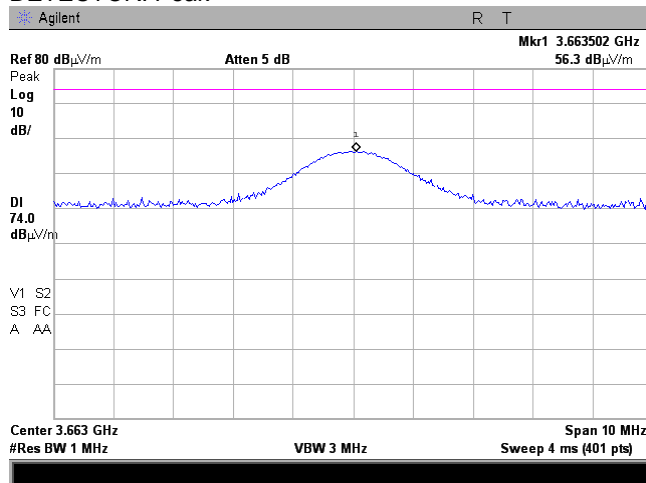

Plot 7.7.33 Radiated emission measurements at the fourth harmonic of mid carrier frequency

TEST SITE:  
TEST DISTANCE:  
ANTENNA POLARIZATION:  
DETECTOR: Peak

OATS  
3 m  
Horizontal  
DETECTOR: Average

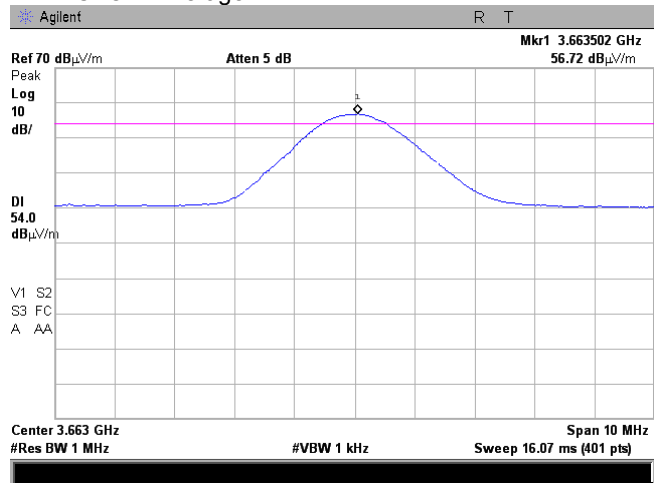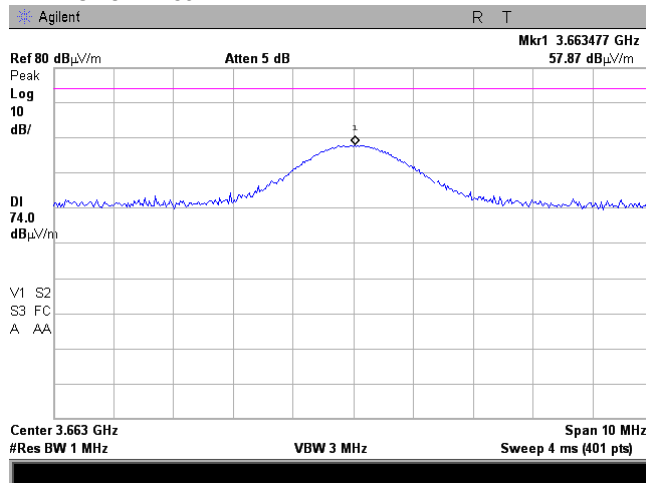





HERMON LABORATORIES

<b>Test specification:</b> Section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions	
<b>Test procedure:</b> Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4	
<b>Test mode:</b> Compliance	<b>Verdict:</b> PASS
<b>Date(s):</b> 9/12/2011	
<b>Temperature:</b> 25 °C	<b>Air Pressure:</b> 1012 hPa
<b>Relative Humidity:</b> 33 %	<b>Power Supply:</b> 3 V battery
<b>Remarks:</b>	

Plot 7.7.34 Radiated emission measurements at the fourth harmonic of high carrier frequency

TEST SITE:  
TEST DISTANCE:  
ANTENNA POLARIZATION:  
DETECTOR: Peak



OATS  
3 m  
Vertical  
DETECTOR: Average

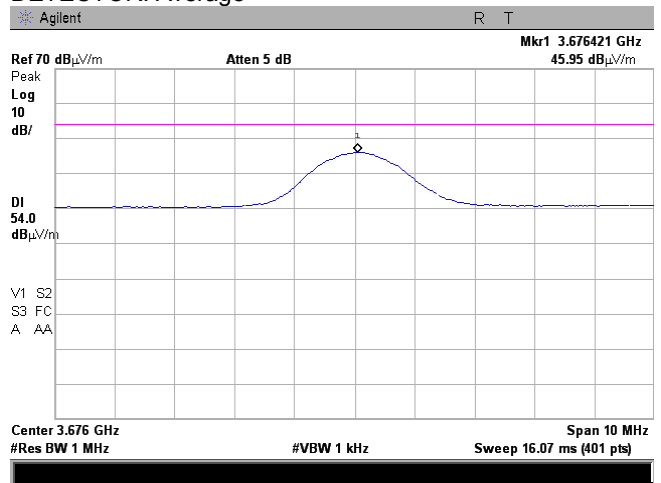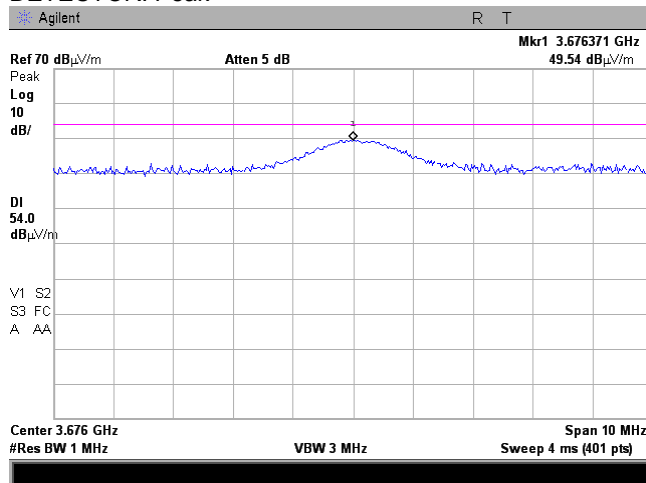

Plot 7.7.35 Radiated emission measurements at the fourth harmonic of high carrier frequency

TEST SITE:  
TEST DISTANCE:  
ANTENNA POLARIZATION:  
DETECTOR: Peak

OATS  
3 m  
Horizontal  
DETECTOR: Average

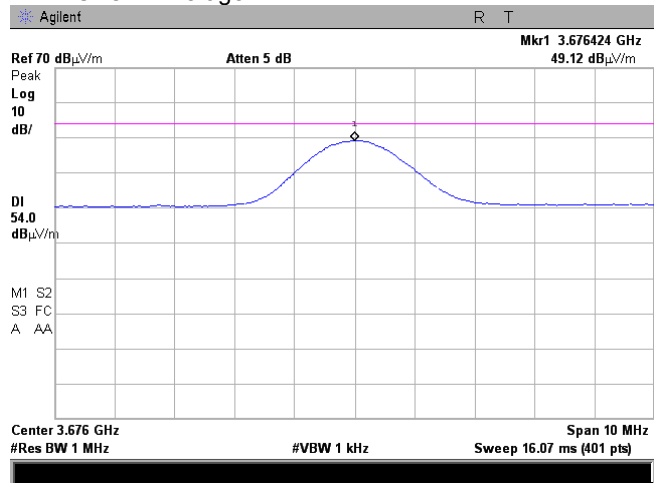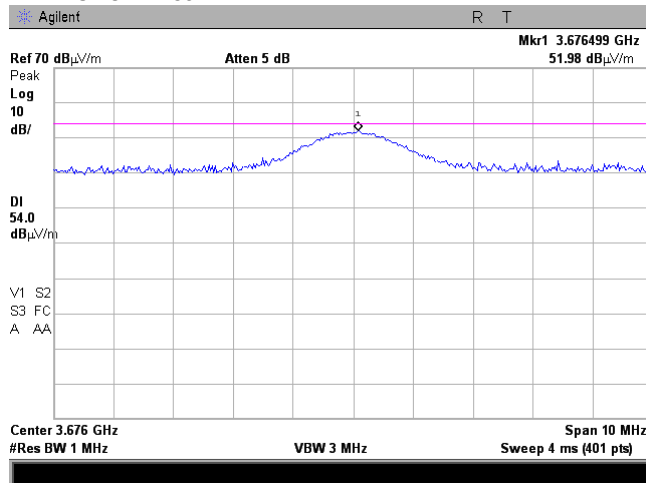





HERMON LABORATORIES

<b>Test specification:</b> Section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions	
<b>Test procedure:</b> Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4	
<b>Test mode:</b> Compliance	<b>Verdict:</b> PASS
<b>Date(s):</b> 9/12/2011	
<b>Temperature:</b> 25 °C	<b>Air Pressure:</b> 1012 hPa
	<b>Relative Humidity:</b> 33 %
	<b>Power Supply:</b> 3 V battery
<b>Remarks:</b>	

Plot 7.7.36 Radiated emission measurements at the fifth harmonic of low carrier frequency

TEST SITE:  
TEST DISTANCE:  
ANTENNA POLARIZATION:  
DETECTOR: Peak



OATS  
3 m  
Vertical  
DETECTOR: Average

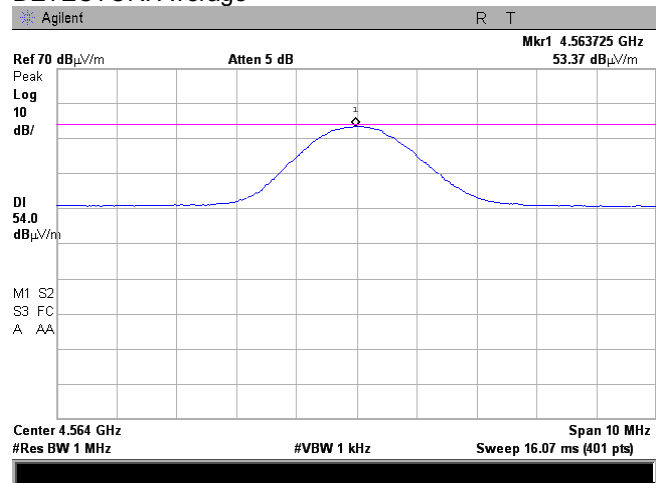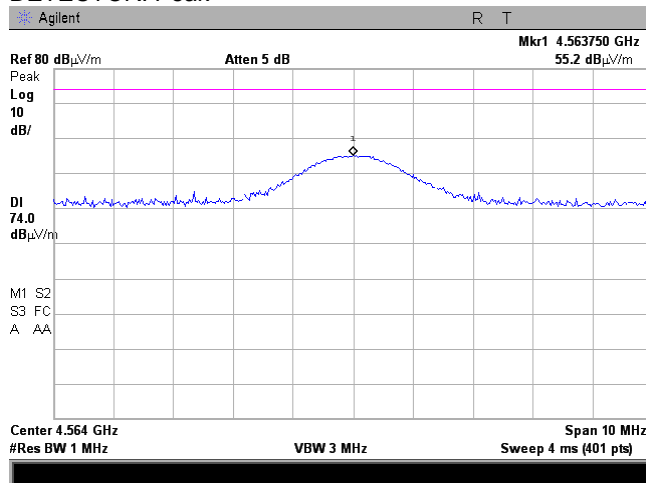

Plot 7.7.37 Radiated emission measurements at the fifth harmonic of low carrier frequency

TEST SITE:  
TEST DISTANCE:  
ANTENNA POLARIZATION:  
DETECTOR: Peak

OATS  
3 m  
Horizontal  
DETECTOR: Average

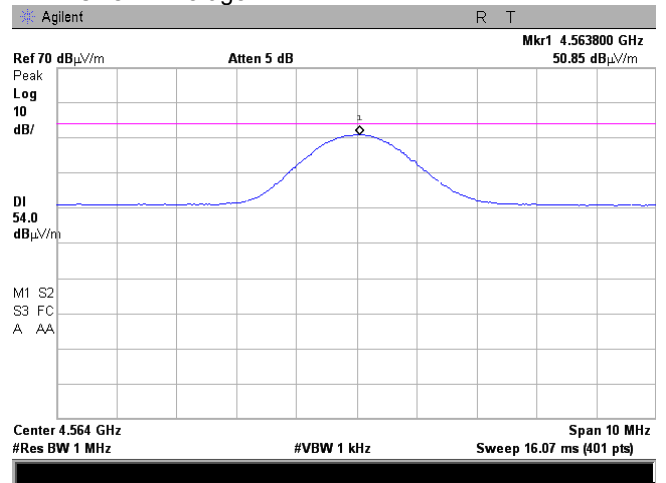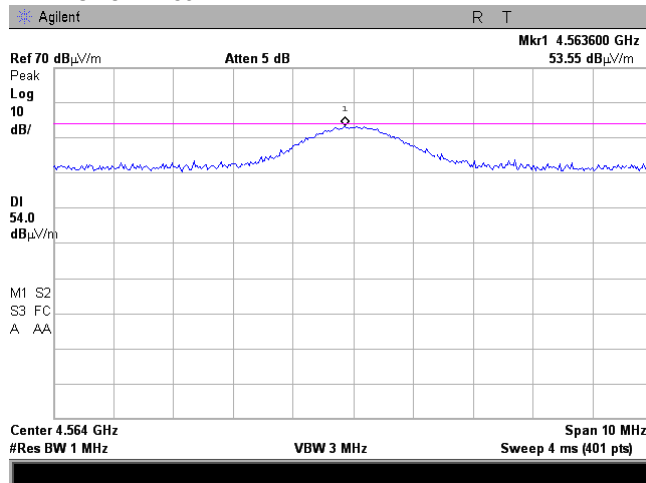





HERMON LABORATORIES

<b>Test specification:</b> Section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions	
<b>Test procedure:</b> Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4	
<b>Test mode:</b> Compliance	<b>Verdict:</b> PASS
<b>Date(s):</b> 9/12/2011	
<b>Temperature:</b> 25 °C	<b>Air Pressure:</b> 1012 hPa
	<b>Relative Humidity:</b> 33 %
	<b>Power Supply:</b> 3 V battery
<b>Remarks:</b>	

Plot 7.7.38 Radiated emission measurements at the fifth harmonic of mid carrier frequency

TEST SITE:  
TEST DISTANCE:  
ANTENNA POLARIZATION:  
DETECTOR: Peak



OATS  
3 m  
Vertical  
DETECTOR: Average

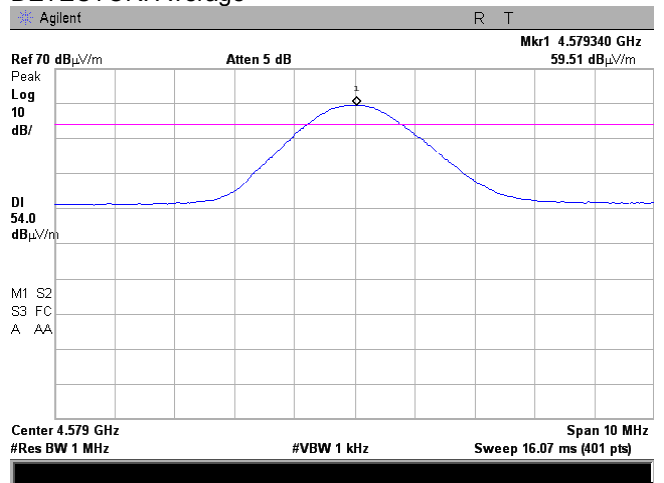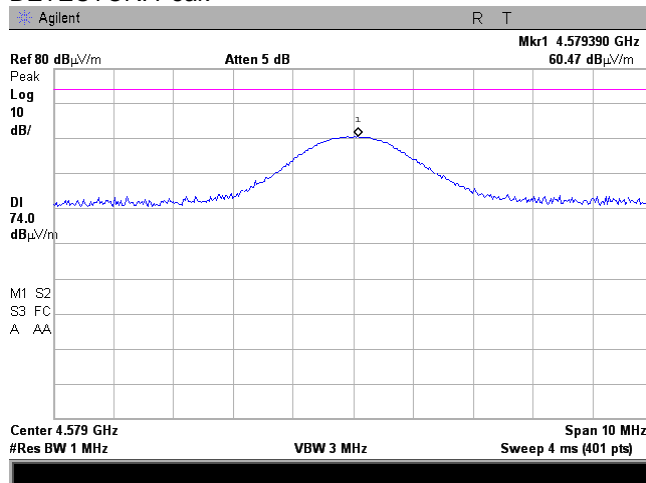

Plot 7.7.39 Radiated emission measurements at the fifth harmonic of mid carrier frequency

TEST SITE:  
TEST DISTANCE:  
ANTENNA POLARIZATION:  
DETECTOR: Peak

OATS  
3 m  
Horizontal  
DETECTOR: Average

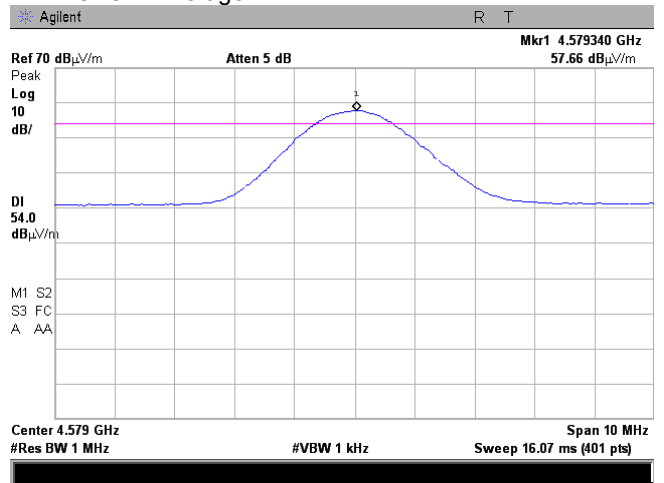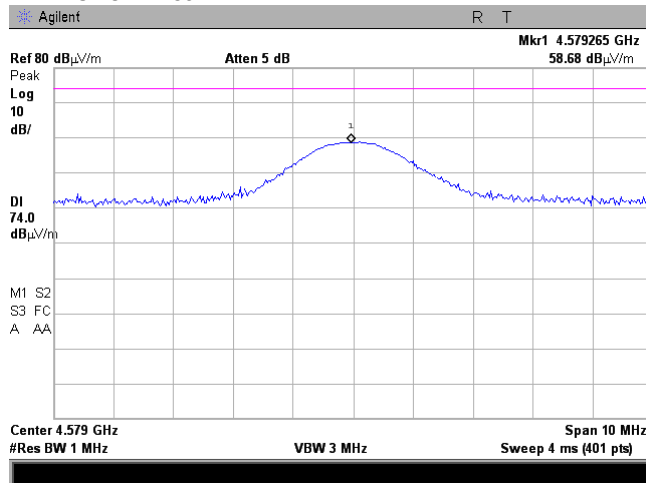





HERMON LABORATORIES

<b>Test specification:</b> Section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions			
<b>Test procedure:</b> Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4			
<b>Test mode:</b> Compliance	<b>Verdict:</b> PASS		
<b>Date(s):</b> 9/12/2011			
<b>Temperature:</b> 25 °C	<b>Air Pressure:</b> 1012 hPa	<b>Relative Humidity:</b> 33 %	<b>Power Supply:</b> 3 V battery
<b>Remarks:</b>			

Plot 7.7.40 Radiated emission measurements at the fifth harmonic of high carrier frequency

TEST SITE:  
TEST DISTANCE:  
ANTENNA POLARIZATION:  
DETECTOR: Peak



OATS  
3 m  
Vertical  
DETECTOR: Average

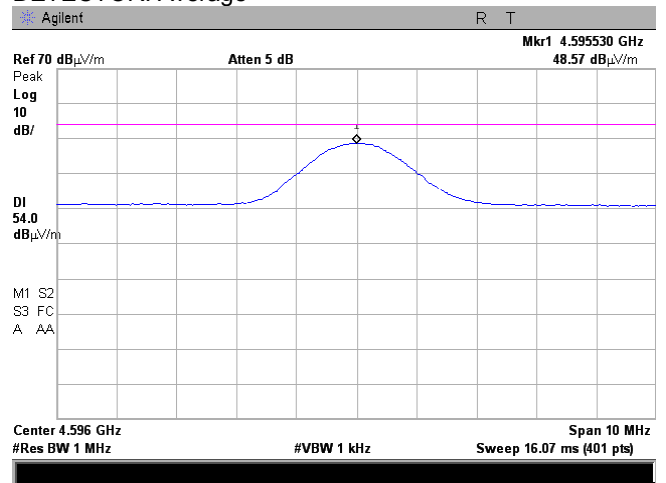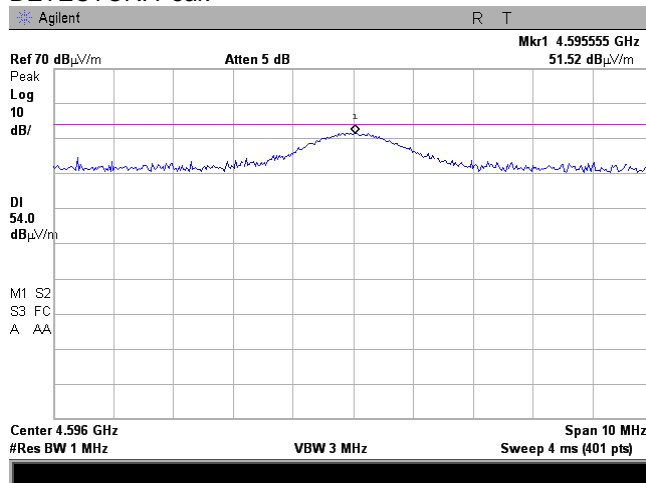

Plot 7.7.41 Radiated emission measurements at the fifth harmonic of high carrier frequency

TEST SITE:  
TEST DISTANCE:  
ANTENNA POLARIZATION:  
DETECTOR: Peak

OATS  
3 m  
Horizontal  
DETECTOR: Average

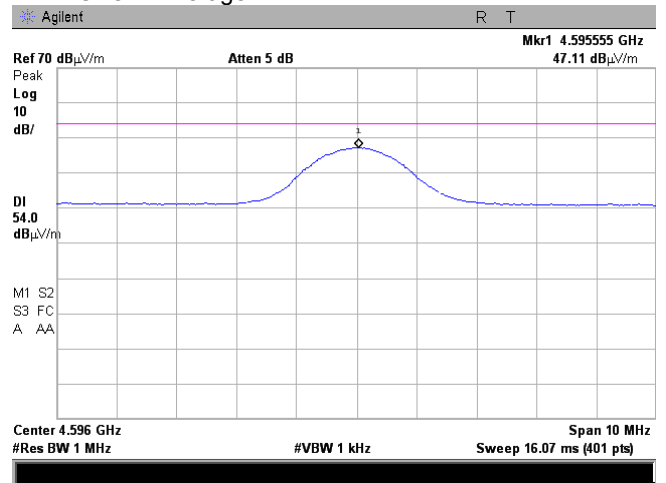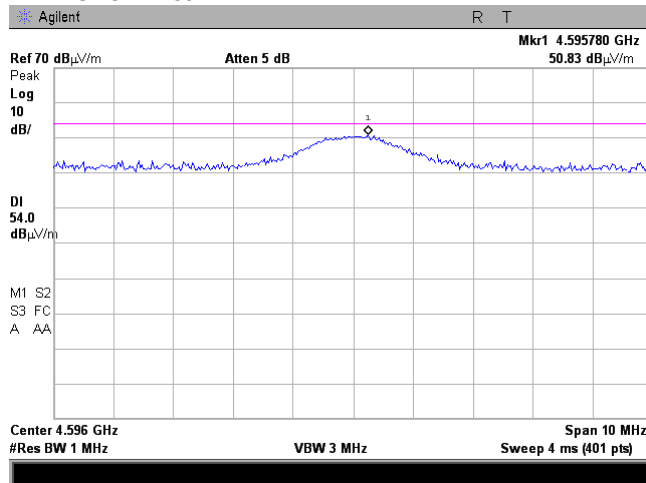





HERMON LABORATORIES

<b>Test specification:</b> Section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions	
<b>Test procedure:</b> Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4	
<b>Test mode:</b> Compliance	<b>Verdict:</b> PASS
<b>Date(s):</b> 9/12/2011	
<b>Temperature:</b> 25 °C	<b>Air Pressure:</b> 1012 hPa
<b>Relative Humidity:</b> 33 %	<b>Power Supply:</b> 3 V battery
<b>Remarks:</b>	

Plot 7.7.42 Radiated emission measurements at the sixth harmonic of low carrier frequency

TEST SITE:  
TEST DISTANCE:  
ANTENNA POLARIZATION: Vertical



OATS  
3 m  
ANTENNA POLARIZATION: Horizontal

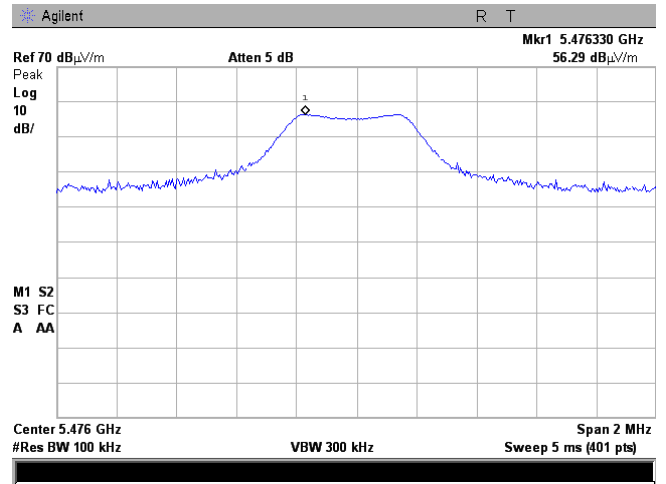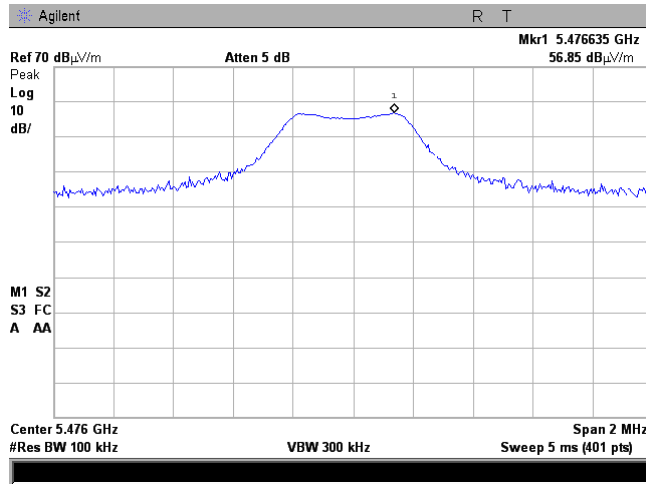

Plot 7.7.43 Radiated emission measurements at the sixth harmonic of mid carrier frequency

TEST SITE:  
TEST DISTANCE:  
ANTENNA POLARIZATION: Vertical

OATS  
3 m  
ANTENNA POLARIZATION: Horizontal

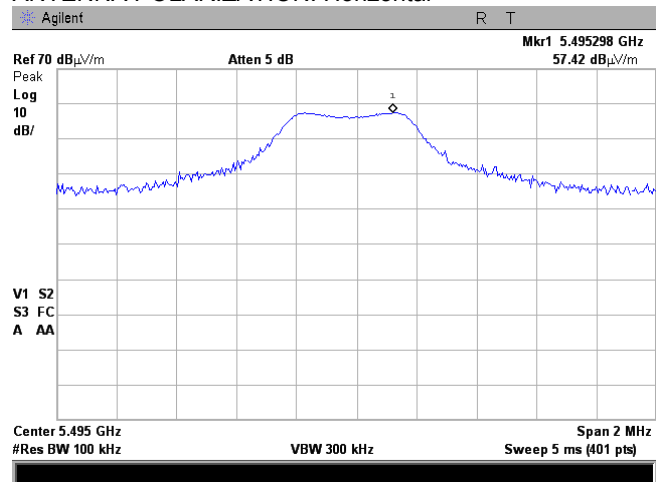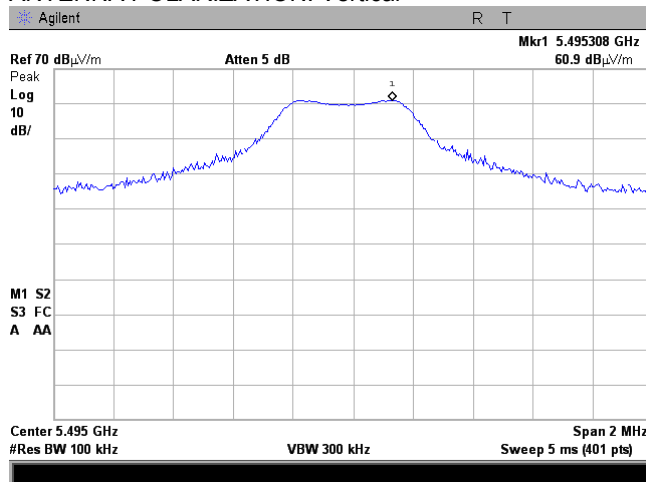





HERMON LABORATORIES

<b>Test specification:</b> Section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions	
<b>Test procedure:</b> Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4	
<b>Test mode:</b> Compliance	<b>Verdict:</b> PASS
<b>Date(s):</b> 9/12/2011	
<b>Temperature:</b> 25 °C	<b>Air Pressure:</b> 1012 hPa
<b>Relative Humidity:</b> 33 %	<b>Power Supply:</b> 3 V battery
<b>Remarks:</b>	

Plot 7.7.44 Radiated emission measurements at the sixth harmonic of high carrier frequency

TEST SITE:  
TEST DISTANCE:  
ANTENNA POLARIZATION: Vertical



OATS  
3 m  
ANTENNA POLARIZATION: Horizontal

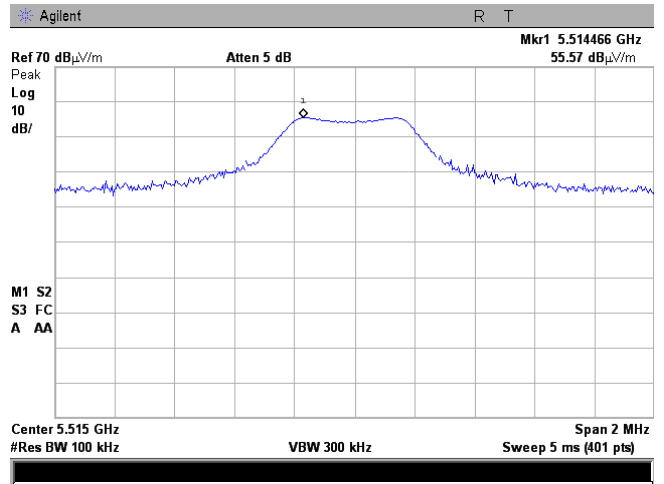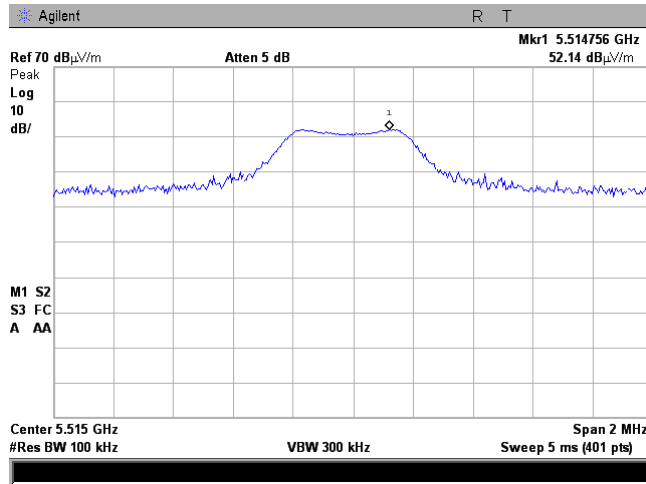

Plot 7.7.45 Radiated emission measurements at the eighth harmonic of low carrier frequency

TEST SITE:  
TEST DISTANCE:  
ANTENNA POLARIZATION:  
DETECTOR: Peak

OATS  
3 m  
Vertical and Horizontal  
DETECTOR: Average

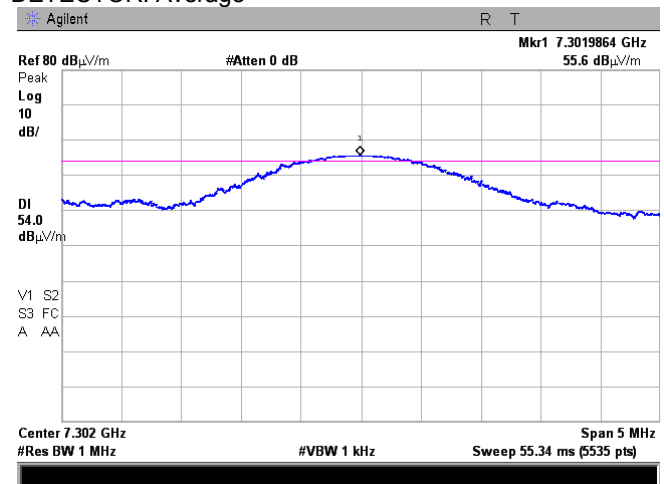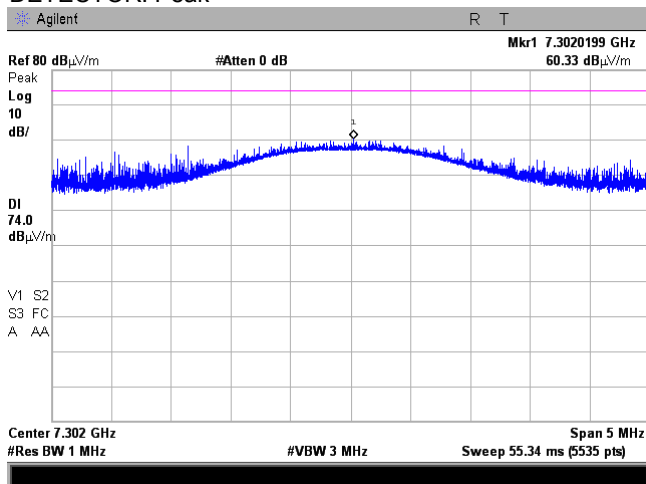







HERMON LABORATORIES

<b>Test specification:</b> Section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions	
<b>Test procedure:</b> Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4	
<b>Test mode:</b> Compliance	<b>Verdict:</b> PASS
<b>Date(s):</b> 9/12/2011	
<b>Temperature:</b> 25 °C	<b>Air Pressure:</b> 1012 hPa
	<b>Relative Humidity:</b> 33 %
	<b>Power Supply:</b> 3 V battery
<b>Remarks:</b>	

Plot 7.7.46 Radiated emission measurements at the eighth harmonic of mid carrier frequency

TEST SITE:  
TEST DISTANCE:  
ANTENNA POLARIZATION:  
DETECTOR: Peak



OATS  
3 m  
Vertical and Horizontal  
DETECTOR: Average

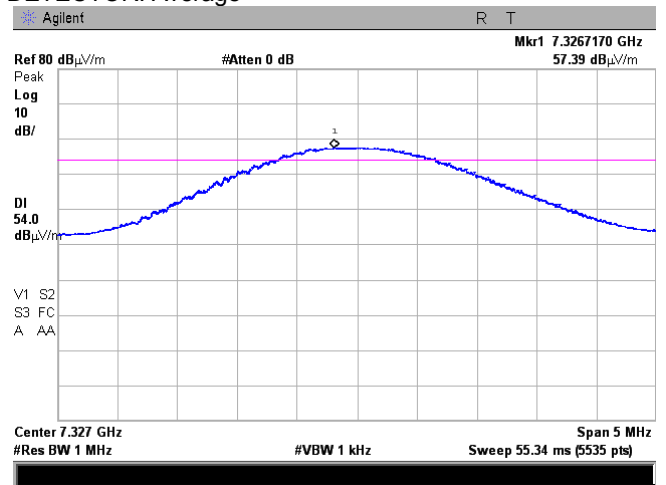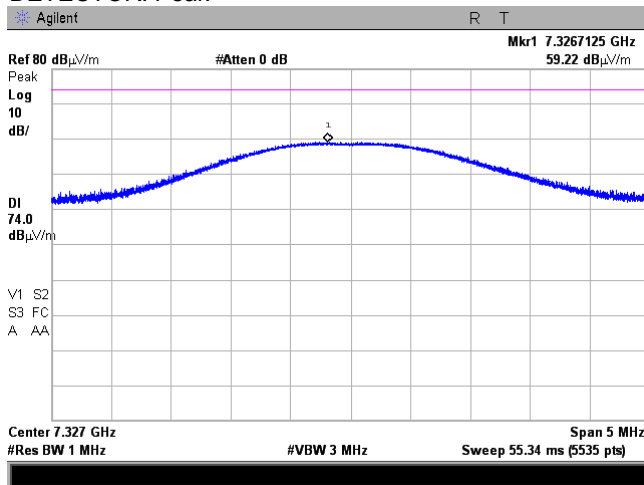

Plot 7.7.47 Radiated emission measurements at the eighth harmonic of high carrier frequency

TEST SITE:  
TEST DISTANCE:  
ANTENNA POLARIZATION:  
DETECTOR: Peak

OATS  
3 m  
Vertical and Horizontal  
DETECTOR: Average

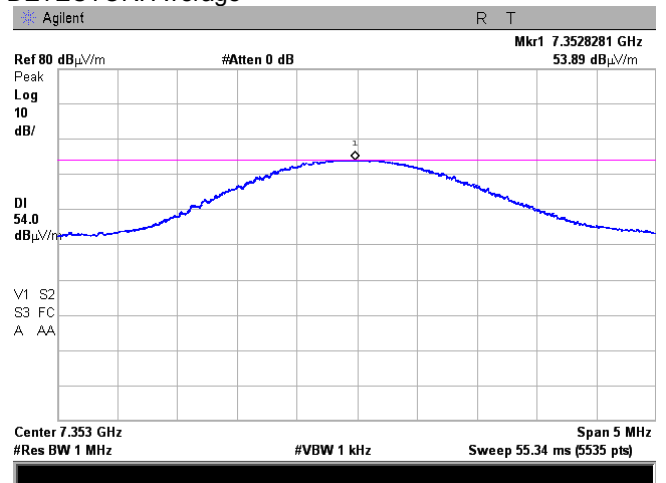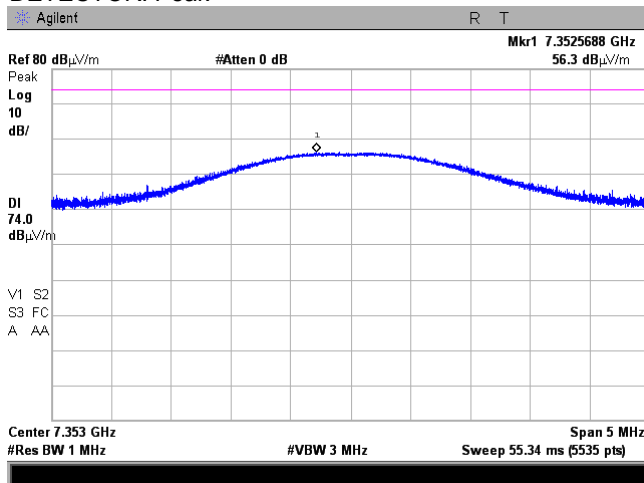





HERMON LABORATORIES

<b>Test specification:</b> Section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions	
<b>Test procedure:</b> Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4	
<b>Test mode:</b> Compliance	<b>Verdict:</b> PASS
<b>Date(s):</b> 9/12/2011	
<b>Temperature:</b> 25 °C	<b>Air Pressure:</b> 1012 hPa
	<b>Relative Humidity:</b> 33 %
	<b>Power Supply:</b> 3 V battery
<b>Remarks:</b>	

Plot 7.7.48 Radiated emission measurements at the tenth harmonic of low carrier frequency

TEST SITE:  
TEST DISTANCE:  
ANTENNA POLARIZATION:  
DETECTOR: Peak



OATS  
3 m  
Vertical and Horizontal  
DETECTOR: Average

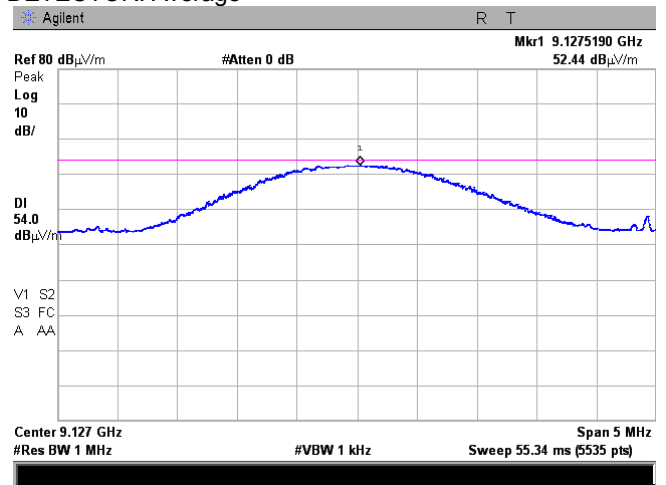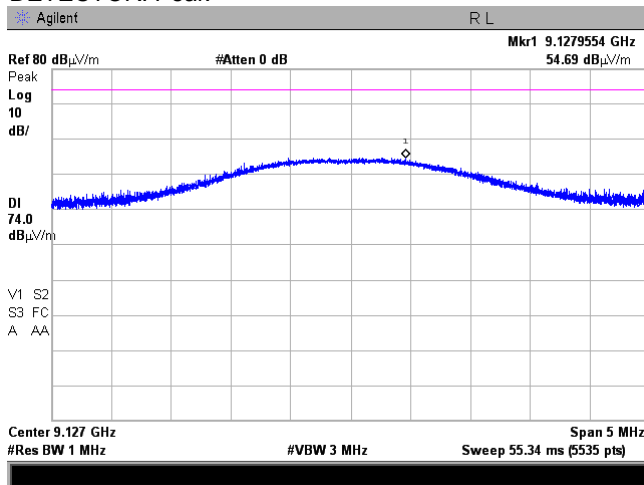

Plot 7.7.49 Radiated emission measurements at the tenth harmonic of mid carrier frequency

TEST SITE:  
TEST DISTANCE:  
ANTENNA POLARIZATION:  
DETECTOR: Peak

OATS  
3 m  
Vertical and Horizontal  
DETECTOR: Average

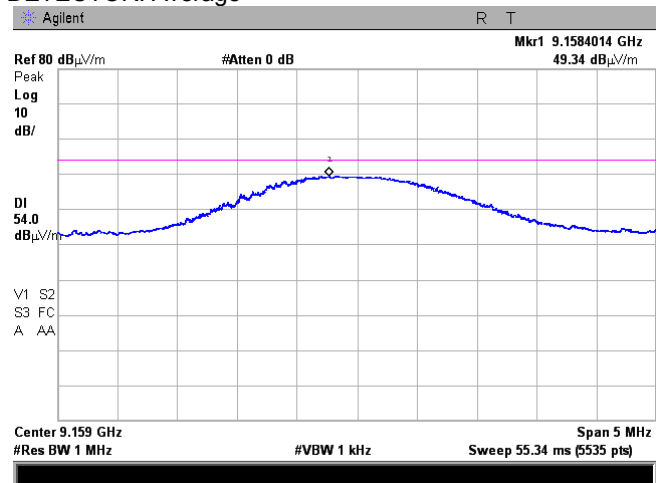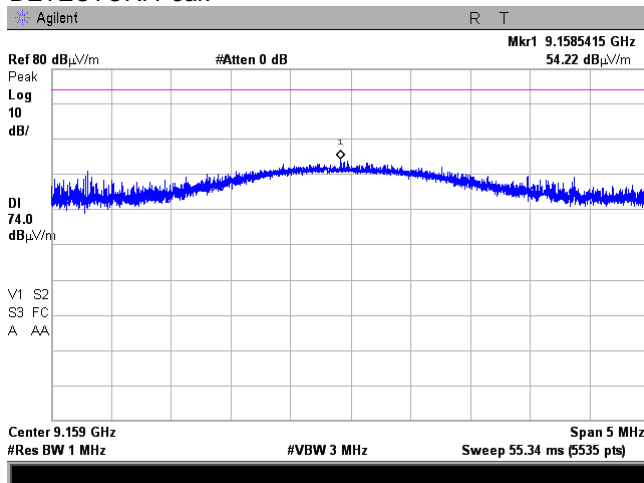





HERMON LABORATORIES

<b>Test specification:</b>		<b>Section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions</b>	
<b>Test procedure:</b>		Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4	
<b>Test mode:</b>		<b>Verdict: PASS</b>	
<b>Date(s):</b>		9/12/2011	
<b>Temperature:</b> 25 °C	<b>Air Pressure:</b> 1012 hPa	<b>Relative Humidity:</b> 33 %	<b>Power Supply:</b> 3 V battery
<b>Remarks:</b>			

Plot 7.7.50 Radiated emission measurements at the tenth harmonic of high carrier frequency

TEST SITE:  
TEST DISTANCE:  
ANTENNA POLARIZATION:  
DETECTOR: Peak


OATS  
3 m  
Vertical and Horizontal  
DETECTOR: Average

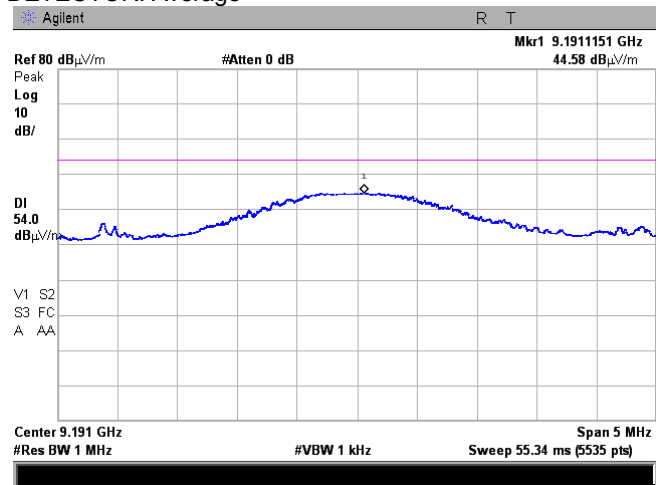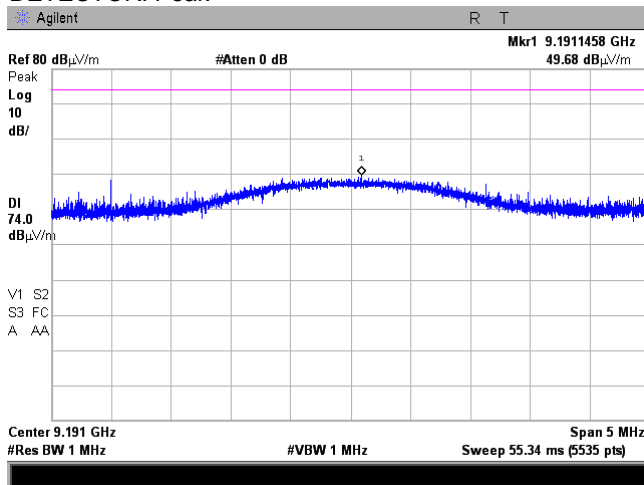




<b>Test specification:</b>	<b>Section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions</b>		
<b>Test procedure:</b>	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date(s):</b>	9/12/2011		
<b>Temperature:</b> 25 °C	<b>Air Pressure:</b> 1012 hPa	<b>Relative Humidity:</b> 33 %	<b>Power Supply:</b> 3 V battery
<b>Remarks:</b>			

Plot 7.7.51 Transmission pulse duration

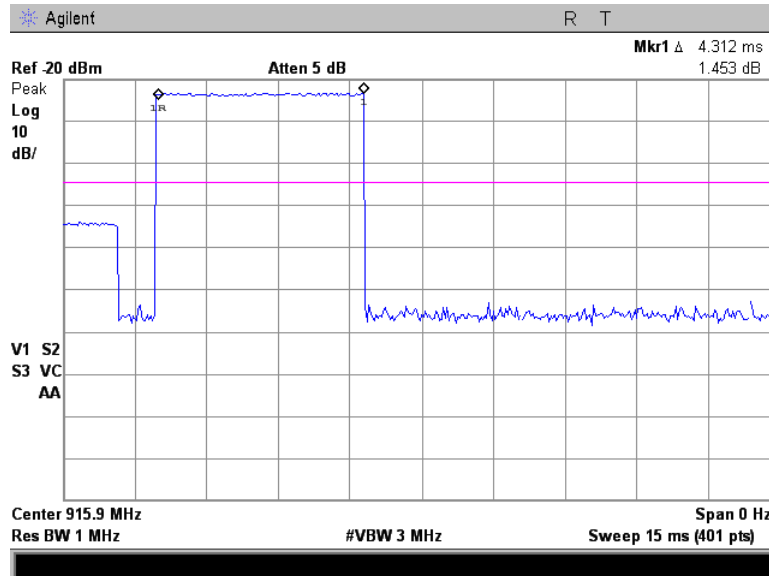

Plot 7.7.52 Transmission pulse period

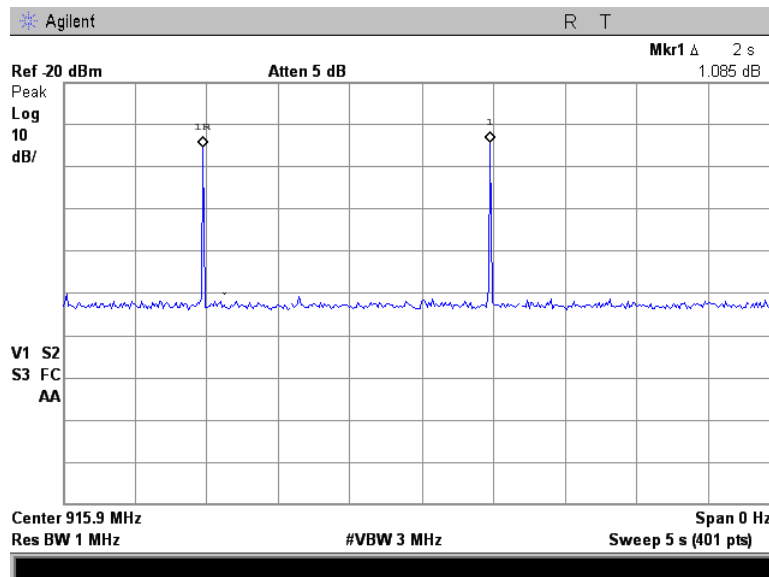



<b>Test specification:</b>	<b>Section 15.203, RSS-Gen section 7.1.2, Antenna requirements</b>		
<b>Test procedure:</b>	Public notice DA 00-705		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	PASS
<b>Date(s):</b>	9/7/2011		
<b>Temperature:</b> 23 °C	<b>Air Pressure:</b> 1008 hPa	<b>Relative Humidity:</b> 44 %	<b>Power Supply:</b> 3 V battery
<b>Remarks:</b>			


### 7.8 Antenna requirements

The EUT was verified for compliance with antenna requirements. A transmitter shall be designed to ensure that no antenna other than that furnished by the responsible party will be used with the device. It may be either permanently attached or employs a unique antenna connector for every antenna proposed for use with the EUT. This requirement does not apply to professionally installed transmitters. The rationale for compliance with the above requirements was either visual inspection results or supplier declaration. The summary of results is provided in Table 7.8.1.

Table 7.8.1 Antenna requirements

Requirement	Rationale	Verdict
The transmitter antenna is permanently attached	Visual inspection	Comply
The transmitter employs a unique antenna connector	NA	
The transmitter requires professional installation	NA	

Photograph 7.8.1 Antenna assembly

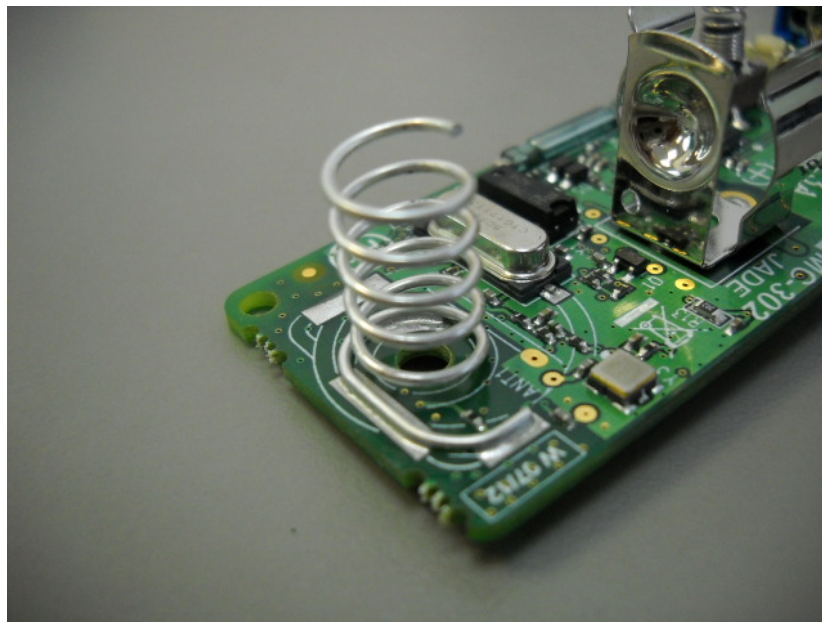



<b>Test specification:</b>	<b>Section 15.109, RSS-Gen Section 6.1, ICES-003 Class B, Radiated emission</b>		
<b>Test procedure:</b>	ANSI C63.4, Sections 11.6 and 12.1.4		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date(s):</b>	9/12/2011		
<b>Temperature:</b> 21 °C	<b>Air Pressure:</b> hPa	<b>Relative Humidity:</b> 50 %	<b>Power Supply:</b> 3 V battery
<b>Remarks:</b>			

## 8 Unintentional emissions

### 8.1 Radiated emission measurements

#### 8.1.1 General

This test was performed to measure radiated emissions from the EUT enclosure. Specification test limits are given in Table 8.1.1, Table 8.1.2, Table 8.1.3.

**Table 8.1.1 Radiated emission test limits according to FCC Part 15 Section 15.109**

Frequency, MHz	Class B limit, dB(μV/m)		Class A limit, dB(μV/m)	
	10 m distance	3 m distance	10 m distance	3 m distance
30 - 88	29.5*	40.0	39.0	49.5*
88 - 216	33.0*	43.5	43.5	54.0*
216 - 960	35.5*	46.0	46.4	56.9*
Above 960	43.5*	54.0	49.5	60.0*

\* The limit for test distance other than specified was calculated using the inverse linear distance extrapolation factor as follows:  $Lim_{S2} = Lim_{S1} + 20 \log(S1/S2)$ , where  $S1$  and  $S2$  – standard defined and test distance respectively in meters.

**Table 8.1.2 Radiated emission limits according to RSS-Gen Section 6.1**

Frequency, MHz	Field strength limit at 3 m test distance, dB(μV/m)
30 - 88	40.0
88 - 216	43.5
216 - 960	46.0
960 - 3 <sup>rd</sup> harmonic**	54.0

\*\* - harmonic of the highest frequency the EUT generates, uses, operates or tunes to.

**Table 8.1.3 Radiated emissions limits according to ICES-003 Section 5.5 Class B**

Frequency, MHz	Limit, dB(μV/m)	
	10 m distance	3 m distance
30 - 230	30.0	40.0*
230 - 1000	37.0	47.0*

\* The limit for 3-m test distance shall be increased by 10 dB.

#### 8.1.2 Test procedure

**8.1.2.1** The EUT was set up as shown in Figure 8.1.1 and associated photograph/s, energized and the performance check was conducted.


**8.1.2.2** The specified frequency range was investigated with biconilog antenna connected to EMI receiver. To find maximum radiation the turntable was rotated 360°, the measuring antenna height was changed from 1 to 4 m, its polarization was switched from vertical to horizontal and the EUT cables position was varied.

**8.1.2.3** The worst test results (the lowest margins) were recorded in Table 8.1.4 and shown in the associated plots.



<b>Test specification:</b>	<b>Section 15.109, RSS-Gen Section 6.1, ICES-003 Class B, Radiated emission</b>		
<b>Test procedure:</b>	ANSI C63.4, Sections 11.6 and 12.1.4		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date(s):</b>	9/12/2011		
<b>Temperature:</b> 21 °C	<b>Air Pressure:</b> hPa	<b>Relative Humidity:</b> 50 %	<b>Power Supply:</b> 3 V battery
<b>Remarks:</b>			

Figure 8.1.1 Setup for radiated emission measurements in anechoic chamber, table-top equipment

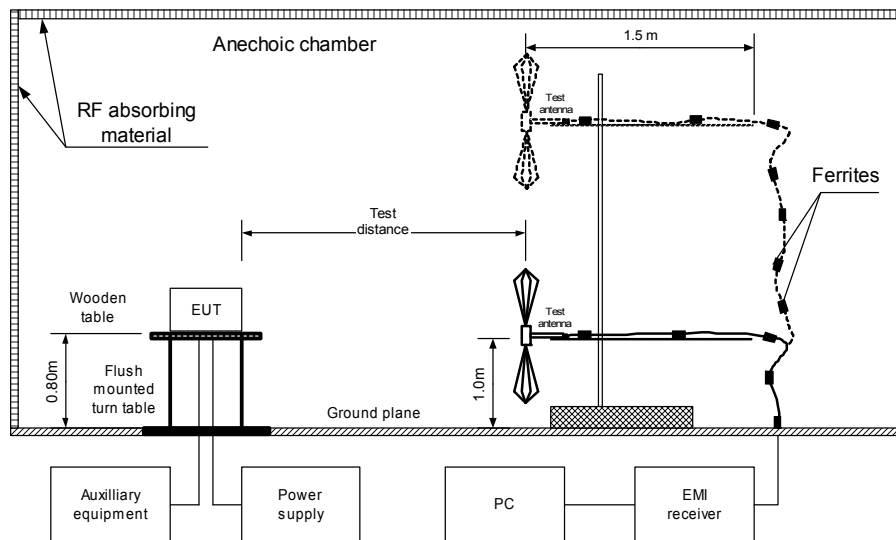

Photograph 8.1.1 Setup for radiated emission measurements





<b>Test specification:</b>	<b>Section 15.109, RSS-Gen Section 6.1, ICES-003 Class B, Radiated emission</b>		
<b>Test procedure:</b>	ANSI C63.4, Sections 11.6 and 12.1.4		
<b>Test mode:</b>	Compliance	<b>Verdict: PASS</b>	
<b>Date(s):</b>	9/12/2011		
<b>Temperature:</b> 21 °C	<b>Air Pressure:</b> hPa	<b>Relative Humidity:</b> 50 %	<b>Power Supply:</b> 3 V battery
<b>Remarks:</b>			

**Table 8.1.4 Radiated emission test results**

EUT SET UP: TABLE-TOP  
LIMIT: Class B  
EUT OPERATING MODE: Receive / Stand-by  
TEST SITE: SEMI ANECHOIC CHAMBER  
TEST DISTANCE: 3 m

DETECTORS USED: PEAK / QUASI-PEAK  
FREQUENCY RANGE: 30 MHz – 1000 MHz  
RESOLUTION BANDWIDTH: 120 kHz

Frequency, MHz	Peak emission, dB(µV/m)	Quasi-peak			Antenna polarization	Antenna height, m	Turn-table position**, degrees	Verdict
		Measured emission, dB(µV/m)	Limit, dB(µV/m)	Margin, dB*				
No emissions were found								Pass

DETECTORS USED: PEAK / AVERAGE  
FREQUENCY RANGE: 1000 MHz – 6000 MHz  
RESOLUTION BANDWIDTH: 1000 kHz

Frequency, MHz	Peak			Average			Antenna polarization	Antenna height, m	Turn-table position**, degrees	Verdict
	Measured emission, dB(µV/m)	Limit, dB(µV/m)	Margin, dB*	Measured emission, dB(µV/m)	Limit, dB(µV/m)	Margin, dB*				
No emissions were found										Pass

\*- Margin = Measured emission - specification limit.  
\*\*- EUT front panel refer to 0 degrees position of turntable.

**Reference numbers of test equipment used**

HL 0521	HL 0604	HL 1984	HL 2871	HL 3623			
---------	---------	---------	---------	---------	--	--	--

Full description is given in Appendix A.






<b>Test specification:</b>	<b>Section 15.109, RSS-Gen Section 6.1, ICES-003 Class B, Radiated emission</b>		
<b>Test procedure:</b>	ANSI C63.4, Sections 11.6 and 12.1.4		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date(s):</b>	9/12/2011		
<b>Temperature:</b> 21 °C	<b>Air Pressure:</b> hPa	<b>Relative Humidity:</b> 50 %	<b>Power Supply:</b> 3 V battery
<b>Remarks:</b>			


**Plot 8.1.1 Radiated emission measurements in 30 - 1000 MHz range according to FCC part 15 and RSS-Gen**

TEST SITE: Semi anechoic chamber  
LIMIT: Class B  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical  
EUT OPERATING MODE: Receive / Stand-by

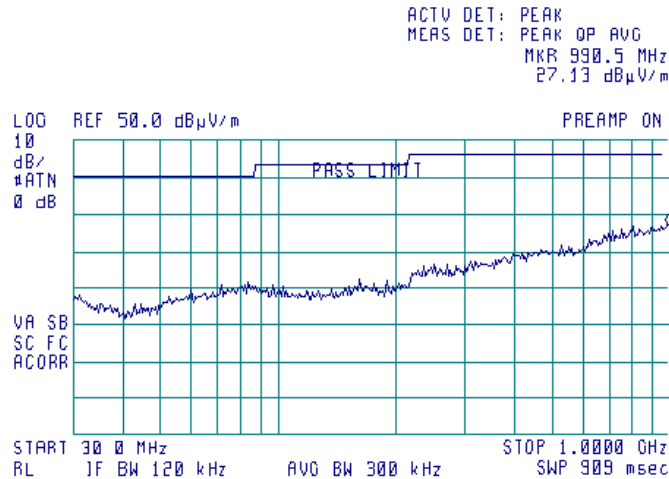

**Plot 8.1.2 Radiated emission measurements in 30 - 1000 MHz range according to FCC part 15 and RSS-Gen**

TEST SITE: Semi anechoic chamber  
LIMIT: Class B  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Horizontal  
EUT OPERATING MODE: Receive / Stand-by

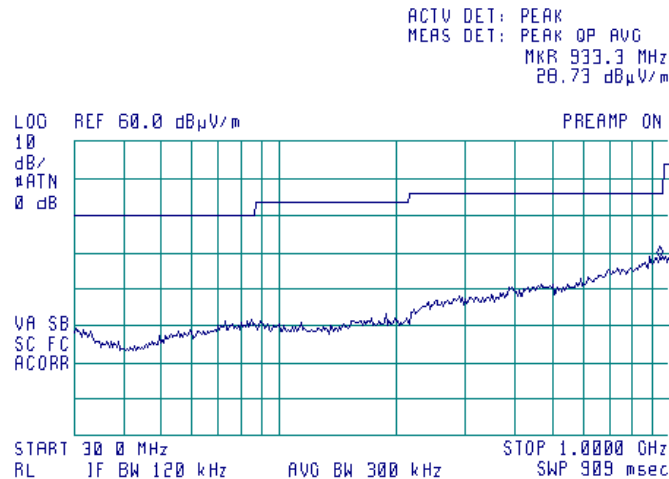




<b>Test specification:</b>	<b>Section 15.109, RSS-Gen Section 6.1, ICES-003 Class B, Radiated emission</b>		
<b>Test procedure:</b>	ANSI C63.4, Sections 11.6 and 12.1.4		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date(s):</b>	9/12/2011		
<b>Temperature:</b> 21 °C	<b>Air Pressure:</b> hPa	<b>Relative Humidity:</b> 50 %	<b>Power Supply:</b> 3 V battery
<b>Remarks:</b>			


**Plot 8.1.3 Radiated emission measurements above 1000 MHz according to FCC part 15 and RSS-Gen**

TEST SITE: Semi anechoic chamber  
LIMIT: Class B  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical  
EUT OPERATING MODE: Receive / Stand-by

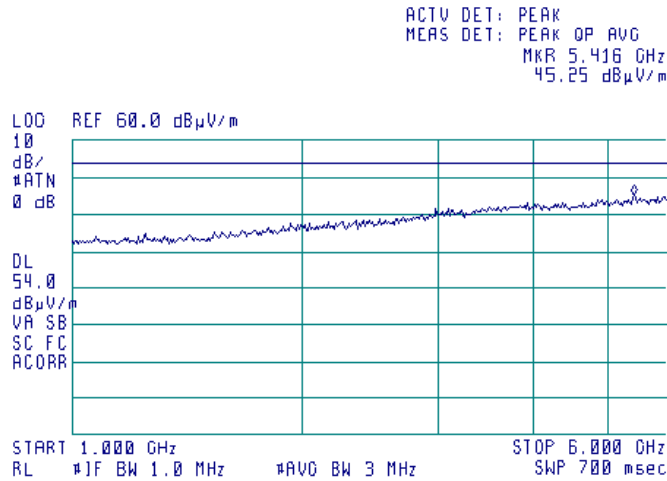

**Plot 8.1.4 Radiated emission measurements above 1000 MHz according to FCC part 15 and RSS-Gen**

TEST SITE: Semi anechoic chamber  
LIMIT: Class B  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Horizontal  
EUT OPERATING MODE: Receive / Stand-by

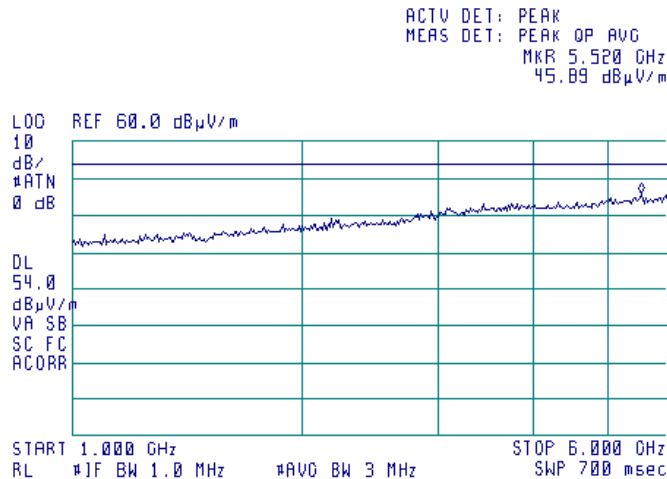




<b>Test specification:</b>	<b>Section 15.109, RSS-Gen Section 6.1, ICES-003 Class B, Radiated emission</b>		
<b>Test procedure:</b>	ANSI C63.4, Sections 11.6 and 12.1.4		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date(s):</b>	9/12/2011		
<b>Temperature:</b> 21 °C	<b>Air Pressure:</b> hPa	<b>Relative Humidity:</b> 50 %	<b>Power Supply:</b> 3 V battery
<b>Remarks:</b>			


**Plot 8.1.5 Radiated disturbance measurements in 30 - 1000 MHz range according to ICES-003**

TEST SITE: Anechoic chamber  
LIMIT: Class B  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical

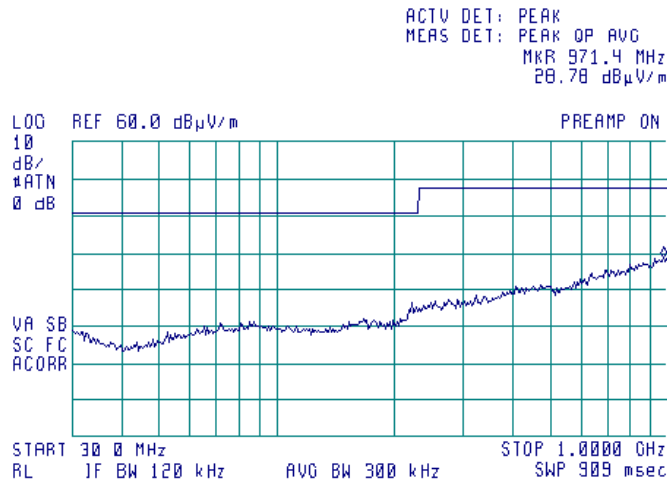

**Plot 8.1.6 Radiated disturbance measurements in 30 - 1000 MHz range according to ICES-003**

TEST SITE: Anechoic chamber  
LIMIT: Class B  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Horizontal

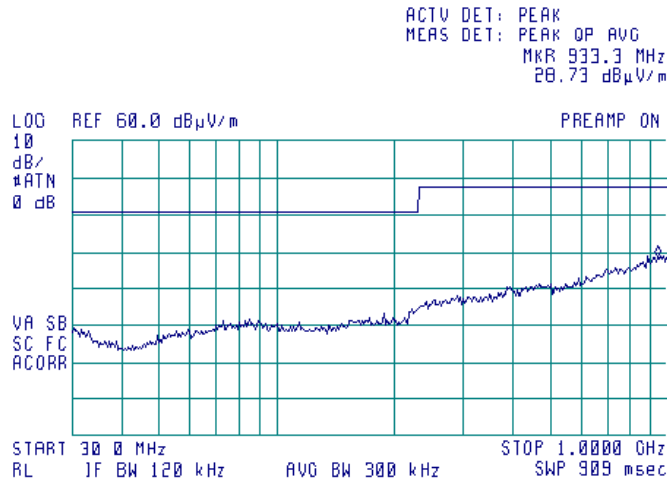

**9 APPENDIX A Test equipment and ancillaries used for tests**

HL No	Description	Manufacturer	Model	Ser. No.	Last Cal./ Check	Due Cal./ Check
0337	Probe Set, Hand held, 5 probes	Electro-Metrics	EHFP-30	238	07-Jun-11	07-Jun-12
0446	Antenna, Loop, Active, 10 kHz - 30 MHz	EMCO	6502	2857	03-Jul-11	03-Jul-12
0521	EMI Receiver (Spectrum Analyzer) with RF filter section 9 kHz-6.5 GHz	Hewlett Packard	8546A	3617A 00319, 3448A002 53	29-Aug-11	29-Sep-12
0604	Antenna BiconiLog Log-Periodic/T Bow-TIE, 26 - 2000 MHz	EMCO	3141	9611-1011	11-Jan-12	11-Jan-13
1431	Receiver RF Section, 9 kHz-2.9 GHz, part of HL1430 system	Agilent Technologies	85422E	308070026 2	25-Nov-11	25-Nov-12
1457	Cable, 1 m	Harbour Industries	MIL 17/60- RG142	1457	01-Sep-11	01-Sep-12
1984	Antenna, Double-Ridged Waveguide Horn, 1-18 GHz, 300 W	EMC Test Systems	3115	9911-5964	16-Nov-11	16-Nov-12
2871	Microwave Cable Assembly, 18 GHz, 6.4 m, SMA - SMA	Huber-Suhner	198-8155- 00	2871	20-Sep-11	20-Sep-12
2883	Cable, 18 GHz N-type, M-F, 3 m	Bird Electronic Corp.	TC- MNFN-3.0	211539 003	01-Dec-11	01-Dec-12
2909	Spectrum analyzer, ESA-E, 100 Hz to 26.5 GHz	Agilent Technologies	E4407B	MY414447 62	08-May-11	08-May-12
3001	EMC Analyzer, 9 kHz to 3 GHz	Agilent Technologies	E7402A	US394401 80	26-Dec-11	26-Dec-12
3123	Microwave Cable Assembly, 18 GHz, 5.0 m, SMA - SMA	Huber-Suhner	198-9155- 00	3123	25-Jul-11	25-Jul-12
3386	Microwave Cable Assembly, 26.5 GHz, 1.0 m, N type/N type	Suhner Sucoflex	104EA	3386	30-Dec-11	30-Dec-12
3531	Amplifier, low noise, 2 to 8 GHz	Quinstar Technology	QLJ- 02084040 -J0	111590020 02	23-Dec-11	23-Dec-12
3623	Cable RF, 6.0 m, N type-N type, DC-6.5 GHz	Belden	MIL C-17	NA	19-May-11	19-May-12

**10 APPENDIX B Measurement uncertainties****Expanded uncertainty at 95% confidence in Hermon Labs EMC measurements**

<b>Test description</b>	<b>Expanded uncertainty</b>
Conducted carrier power at RF antenna connector	Below 12.4 GHz: $\pm 1.7$ dB 12.4 GHz to 40 GHz: $\pm 2.3$ dB
Conducted emissions at RF antenna connector	9 kHz to 2.9 GHz: $\pm 2.6$ dB 2.9 GHz to 6.46 GHz: $\pm 3.5$ dB 6.46 GHz to 13.2 GHz: $\pm 4.3$ dB 13.2 GHz to 22.0 GHz: $\pm 5.0$ dB 22.0 GHz to 26.8 GHz: $\pm 5.5$ dB 26.8 GHz to 40.0 GHz: $\pm 4.8$ dB
Occupied bandwidth	$\pm 8.0$ %
Duty cycle, timing (Tx ON / OFF) and average factor measurements	$\pm 1.0$ %
Conducted emissions with LISN	9 kHz to 150 kHz: $\pm 3.9$ dB 150 kHz to 30 MHz: $\pm 3.8$ dB
Radiated emissions at 3 m measuring distance Horizontal polarization	Biconilog antenna: $\pm 5.3$ dB Biconical antenna: $\pm 5.0$ dB Log periodic antenna: $\pm 5.3$ dB Double ridged horn antenna: $\pm 5.3$ dB
Vertical polarization	Biconilog antenna: $\pm 6.0$ dB Biconical antenna: $\pm 5.7$ dB Log periodic antenna: $\pm 6.0$ dB Double ridged horn antenna: $\pm 6.0$ dB

Hermon Laboratories is accredited by A2LA for calibration according to present requirements of ISO/IEC 17025 and NCSL Z540-1. The accreditation is granted to perform calibration of parameters that are listed in the Scope of Hermon Laboratories Accreditation.

Hermon Laboratories calibrates its reference and transfer standards by calibration laboratories accredited to ISO/IEC 17025 by a mutually recognized Accreditation Body or by a recognized national metrology institute. All reference and transfer standards used in the calibration system are traceable to national or international standards.

In-house calibration of all test and measurement equipment is performed on a regular basis according to Hermon Laboratories calibration procedures, manufacturer calibration/verification procedures or procedures defined in the relevant standards. The Hermon Laboratories test and measurement equipment is calibrated within the tolerances specified by the manufacturers and/or by the relevant standards.

## 11 APPENDIX C Test laboratory description

Tests were performed at Hermon Laboratories Ltd., which is a fully independent, private, EMC, safety, environmental and telecommunication testing facility.

Hermon Laboratories is listed by the Federal Communications Commission (USA) for all parts of Code of Federal Regulations 47 (CFR 47), Registration Numbers 90624 for OATS and 90623 for the anechoic chamber; by Industry Canada for electromagnetic emissions (file numbers IC 2186A-1 for OATS, IC 2186A-2 for anechoic chamber, IC 2186A-3 for full-anechoic chamber for RE measurements above 1 GHz), certified by VCCI, Japan (the registration numbers are R-808 for OATS, R-1082 for anechoic chamber, G-27 for full-anechoic chamber for RE measurements above 1 GHz, C-845 for conducted emissions site, T-1606 for conducted emissions at telecommunication ports), has a status of a Telefication - Listed Testing Laboratory, Certificate No. L138/00. The laboratory is accredited by American Association for Laboratory Accreditation (USA) according to ISO/IEC 17025 for electromagnetic compatibility, product safety, telecommunications testing and environmental simulation (for exact scope please refer to Certificate No. 839.01). The FCC Designation Number is US1003.

Address: P.O. Box 23, Binyamina 30500, Israel.  
Telephone: +972 4628 8001  
Fax: +972 4628 8277  
e-mail: mail@hermonlabs.com  
website: www.hermonlabs.com

Person for contact: Mr. Alex Usoskin, CEO.

## 12 APPENDIX D Specification references

FCC 47CFR part 15: 2011	Radio Frequency Devices
Public notice DA 00- 705: 2000	Filing and measurement guidelines for frequency hopping spread spectrum systems.
ANSI C63.2: 1996	American National Standard for Instrumentation-Electromagnetic Noise and Field Strength, 10 kHz to 40 GHz-Specifications
ANSI C63.4: 2003	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
RSS-210 Issue 8: 2010	Low Power Licence- Exempt Radiocommunication Devices
RSS-Gen Issue 3: 2010	General Requirements and Information for the Certification of Radiocommunication Equipment



### 13 APPENDIX E Test equipment correction factors

Antenna factor  
Active loop antenna  
Model 6502, S/N 2857, HL 0446

Frequency, MHz	Magnetic antenna factor, dB	Electric antenna factor, dB
0.009	-32.8	18.7
0.010	-33.8	17.7
0.020	-38.3	13.2
0.050	-41.1	10.4
0.075	-41.3	10.2
0.100	-41.6	9.9
0.150	-41.7	9.8
0.250	-41.6	9.9
0.500	-41.8	9.8
0.750	-41.9	9.7
1.000	-41.4	10.1
2.000	-41.5	10.0
3.000	-41.4	10.2
4.000	-41.4	10.1
5.000	-41.5	10.1
10.000	-41.9	9.6
15.000	-41.9	9.6
20.000	-42.2	9.3
25.000	-42.8	8.7
30.000	-44.0	7.5

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB( $\mu$ V) to convert it into field intensity in dB( $\mu$ V/m).



**Antenna factor**  
**Biconilog antenna EMCO Model 3141**  
**Ser.No.1011, HL 0604**

Frequency, MHz	Antenna Factor, dB(1/m)
26	7.8
28	7.8
30	7.8
40	7.2
60	7.1
70	8.5
80	9.4
90	9.8
100	9.7
110	9.3
120	8.8
130	8.7
140	9.2
150	9.8
160	10.2
170	10.4
180	10.4
190	10.3
200	10.6
220	11.6
240	12.4
260	12.8
280	13.7
300	14.7
320	15.2
340	15.4
360	16.1
380	16.4
400	16.6
420	16.7
440	17.0
460	17.7
480	18.1
500	18.5
520	19.1
540	19.5
560	19.8
580	20.6
600	21.3
620	21.5
640	21.2
660	21.4
680	21.9
700	22.2
720	22.2
740	22.1
760	22.3
780	22.6
800	22.7
820	22.9
840	23.1
860	23.4
880	23.8
900	24.1
920	24.1

Frequency, MHz	Antenna Factor, dB(1/m)
940	24.0
960	24.1
980	24.5
1000	24.9
1020	25.0
1040	25.2
1060	25.4
1080	25.6
1100	25.7
1120	26.0
1140	26.4
1160	27.0
1180	27.0
1200	26.7
1220	26.5
1240	26.5
1260	26.5
1280	26.6
1300	27.0
1320	27.8
1340	28.3
1360	28.2
1380	27.9
1400	27.9
1420	27.9
1440	27.8
1460	27.8
1480	28.0
1500	28.5
1520	28.9
1540	29.6
1560	29.8
1580	29.6
1600	29.5
1620	29.3
1640	29.2
1660	29.4
1680	29.6
1700	29.8
1720	30.3
1740	30.8
1760	31.1
1780	31.0
1800	30.9
1820	30.7
1840	30.6
1860	30.6
1880	30.6
1900	30.6
1920	30.7
1940	30.9
1960	31.2
1980	31.6
2000	32.0

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB(μV) to convert it into field intensity in dB(μV/m).





**Antenna factor**  
**Double-ridged wave guide horn antenna**  
**Model 3115, S/N 9911-5964, HL1984**

<b>Frequency, MHz</b>	<b>Antenna factor, dB(1/m)</b>
1000.0	24.7
1500.0	25.7
2000.0	27.6
2500.0	28.9
3000.0	31.2
3500.0	32.0
4000.0	32.5
4500.0	32.7
5000.0	33.6
5500.0	35.1
6000.0	35.4
6500.0	34.9
7000.0	36.1
7500.0	37.8
8000.0	38.0
8500.0	38.1
9000.0	39.1
9500.0	38.3
10000.0	38.6
10500.0	38.2
11000.0	38.7
11500.0	39.5
12000.0	40.0
12500.0	40.4
13000.0	40.5
13500.0	41.1
14000.0	41.6
14500.0	41.7
15000.0	38.7
15500.0	38.2
16000.0	38.8
16500.0	40.5
17000.0	42.5
17500.0	45.9
18000.0	49.4

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB( $\mu$ V) to convert it into field intensity in dB( $\mu$ V/m).



**Cable loss**  
Cable coaxial, Huber-Suhner, 18 GHz, 6.4 m, SMA - SMA, model 198-8155-00,  
HL 2871

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
10	0.12	5750	2.34	12000	3.55
30	0.14	6000	2.39	12250	3.61
100	0.27	6250	2.46	12500	3.67
250	0.45	6500	2.52	12750	3.74
500	0.63	6750	2.58	13000	3.79
750	0.76	7000	2.64	13250	3.82
1000	0.89	7250	2.68	13500	3.83
1250	1.01	7500	2.73	13750	3.83
1500	1.12	7750	2.78	14000	3.88
1750	1.23	8000	2.83	14250	3.93
2000	1.32	8250	2.88	14500	3.96
2250	1.41	8500	2.94	14750	4.01
2500	1.49	8750	2.97	15000	4.00
2750	1.58	9000	3.02	15250	4.01
3000	1.66	9250	3.07	15500	4.00
3250	1.73	9500	3.13	15750	4.13
3500	1.80	9750	3.18	16000	4.22
3750	1.87	10000	3.21	16250	4.29
4000	1.93	10250	3.26	16500	4.29
4250	2.01	10500	3.30	16750	4.32
4500	2.06	10750	3.36	17000	4.37
4750	2.12	11000	3.39	17250	4.45
5000	2.17	11250	3.44	17500	4.49
5250	2.24	11500	3.48	17750	4.53
5500	2.29	11750	3.52	18000	4.55



**Cable loss**  
**Cable coaxial, Bird, 18 GHz, N-type, M-F, model TC-MNFN-3.0, S/N 211539 003**  
**HL 2883**

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
10	0.06	5750	1.70	12000	2.46
30	0.12	6000	1.75	12250	2.48
100	0.21	6250	1.80	12500	2.52
250	0.34	6500	1.81	12750	2.50
500	0.47	6750	1.86	13000	2.54
750	0.59	7000	1.86	13250	2.48
1000	0.67	7250	1.92	13500	2.63
1250	0.76	7500	1.96	13750	2.65
1500	0.84	7750	1.98	14000	2.72
1750	0.92	8000	2.02	14250	2.67
2000	0.98	8250	2.03	14500	2.70
2250	1.05	8500	2.05	14750	2.72
2500	1.12	8750	2.11	15000	2.79
2750	1.17	9000	2.17	15250	2.80
3000	1.22	9250	2.17	15500	2.83
3250	1.27	9500	2.20	15750	2.75
3500	1.33	9750	2.19	16000	2.82
3750	1.38	10000	2.22	16250	2.85
4000	1.42	10250	2.25	16500	2.90
4250	1.46	10500	2.30	16750	2.89
4500	1.51	10750	2.28	17000	2.88
4750	1.54	11000	2.32	17250	2.85
5000	1.59	11250	2.34	17500	2.96
5250	1.62	11500	2.39	17750	3.04
5500	1.65	11750	2.42	18000	3.04



**Cable loss**  
**Microwave Cable Assembly, 18 GHz, 6.4 m, SMA – SMA, Huber-Suhner, model 198-9155-00**  
**HL 3121**

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
10	0.08	3600	2.10	7400	3.08	11200	3.85	15100	4.58
30	0.18	3700	2.14	7500	3.11	11300	3.85	15200	4.60
50	0.26	3800	2.18	7600	3.14	11400	3.86	15300	4.63
100	0.34	3900	2.19	7700	3.16	11500	3.86	15400	4.65
200	0.47	4000	2.25	7800	3.18	11600	3.87	15500	4.71
300	0.59	4100	2.25	7900	3.20	11700	3.85	15600	4.70
400	0.66	4200	2.28	8000	3.22	11800	3.96	15700	4.69
500	0.75	4300	2.35	8100	3.26	11900	3.92	15800	4.71
600	0.83	4400	2.35	8200	3.27	12000	3.92	15900	4.74
700	0.90	4500	2.38	8300	3.29	12100	3.94	16000	4.69
800	0.96	4600	2.43	8400	3.30	12200	3.94	16100	4.72
900	1.02	4700	2.43	8500	3.31	12300	3.99	16200	4.71
1000	1.07	4800	2.45	8600	3.33	12400	4.02	16300	4.74
1100	1.12	4900	2.48	8700	3.35	12500	4.10	16400	4.74
1200	1.15	5000	2.55	8800	3.36	12600	4.09	16500	4.75
1300	1.22	5100	2.54	8900	3.38	12700	4.15	16600	4.78
1400	1.28	5200	2.56	9000	3.40	12800	4.15	16700	4.86
1500	1.29	5300	2.58	9100	3.41	12900	4.08	16800	4.84
1600	1.36	5400	2.61	9200	3.45	13000	4.21	16900	4.83
1700	1.40	5500	2.64	9300	3.48	13100	4.19	17000	4.86
1800	1.45	5600	2.69	9400	3.52	13200	4.29	17100	4.83
1900	1.51	5700	2.67	9500	3.54	13300	4.24	17200	4.90
2000	1.50	5800	2.71	9600	3.59	13400	4.26	17300	4.91
2100	1.56	5900	2.73	9700	3.59	13500	4.26	17400	4.94
2200	1.59	6000	2.75	9800	3.62	13600	4.29	17500	4.93
2300	1.63	6100	2.81	9900	3.70	13700	4.35	17600	4.93
2400	1.73	6200	2.80	10000	3.70	13800	4.31	17700	5.00
2500	1.73	6300	2.82	10100	3.72	13900	4.29	17800	5.01
2600	1.78	6400	2.85	10200	3.73	14000	4.32	17900	5.00
2700	1.84	6500	2.87	10300	3.75	14100	4.33	18000	5.00
2800	1.84	6600	2.90	10400	3.76	14200	4.34		
2900	1.91	6700	2.91	10500	3.77	14300	4.36		
3000	1.91	6800	2.94	10600	3.79	14400	4.38		
3100	1.97	6900	2.96	10700	3.80	14600	4.42		
3200	1.98	7000	2.98	10800	3.81	14700	4.42		
3300	2.04	7100	3.01	10900	3.81	14800	4.55		
3400	2.04	7200	3.02	11000	3.83	14900	4.55		
3500	2.10	7300	3.04	11100	3.84	15000	4.55		



**Cable loss**  
**Cable coaxial, Microwave Cable Assembly, 104EA, 18 GHz, 1.0 m**  
**Suhner Sucoflex, HL 3386**

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
10	0.05	5750	1.01	12000	1.29
30	0.07	6000	1.02	12250	1.33
100	0.12	6250	1.02	12500	1.36
250	0.18	6500	0.95	12750	1.35
500	0.26	6750	0.96	13000	1.36
750	0.32	7000	1.01	13250	1.39
1000	0.35	7250	1.04	13500	1.37
1250	0.41	7500	1.09	13750	1.43
1500	0.45	7750	1.12	14000	1.46
1750	0.50	8000	1.13	14250	1.39
2000	0.54	8250	1.15	14500	1.36
2250	0.57	8500	1.15	14750	1.47
2500	0.61	8750	1.15	15000	1.47
2750	0.64	9000	1.16	15250	1.41
3000	0.67	9250	1.14	15500	1.52
3250	0.70	9500	1.14	15750	1.54
3500	0.71	9750	1.19	16000	1.49
3750	0.74	10000	1.20	16250	1.48
4000	0.77	10250	1.22	16500	1.52
4250	0.80	10500	1.23	16750	1.56
4500	0.84	10750	1.22	17000	1.57
4750	0.85	11000	1.21	17250	1.53
5000	0.84	11250	1.24	17500	1.55
5250	0.85	11500	1.26	17750	1.55
5500	0.92	11750	1.28	18000	1.54



**Cable loss**  
**Cable coaxial, MIL C-17, N type-N type, 6 m**  
**Belden, HL 3623**

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
10	0.13	2600	4.38	5400	7.76
30	0.25	2700	4.53	5500	7.79
50	0.33	2800	4.64	5600	7.88
100	0.49	2900	4.79	5700	7.93
200	0.76	3000	4.93	5800	8.05
300	0.97	3100	5.02	5900	8.03
400	1.18	3200	5.18	6000	8.07
500	1.38	3300	5.27	6100	8.14
600	1.54	3400	5.41	6200	8.21
700	1.71	3500	5.57	6300	8.28
800	1.88	3600	5.65	6400	8.35
900	2.04	3700	5.82	6500	8.43
1000	2.19	3800	5.89		
1100	2.38	3900	6.02		
1200	2.61	4000	6.15		
1300	2.63	4100	6.26		
1400	2.79	4200	6.37		
1500	2.90	4300	6.52		
1600	3.08	4400	6.63		
1700	3.21	4500	6.74		
1800	3.31	4600	6.86		
1900	3.47	4700	6.98		
2000	3.59	4800	7.09		
2100	3.74	4900	7.17		
2200	3.86	5000	7.30		
2300	3.98	5100	7.41		
2400	4.12	5200	7.59		
2500	4.24	5300	7.71		



## 14 APPENDIX F Abbreviations and acronyms

A	ampere
AC	alternating current
A/m	ampere per meter
AM	amplitude modulation
AVRG	average (detector)
cm	centimeter
dB	decibel
dBm	decibel referred to one milliwatt
dB( $\mu$ V)	decibel referred to one microvolt
dB( $\mu$ V/m)	decibel referred to one microvolt per meter
dB( $\mu$ A)	decibel referred to one microampere
DC	direct current
EIRP	equivalent isotropically radiated power
ERP	effective radiated power
EUT	equipment under test
F	frequency
GHz	gigahertz
GND	ground
H	height
HL	Hermon laboratories
Hz	hertz
k	kilo
kHz	kilohertz
LO	local oscillator
m	meter
MHz	megahertz
min	minute
mm	millimeter
ms	millisecond
$\mu$ s	microsecond
NA	not applicable
NB	narrow band
OATS	open area test site
$\Omega$	Ohm
PM	pulse modulation
PS	power supply
ppm	part per million ( $10^{-6}$ )
QP	quasi-peak
RE	radiated emission
RF	radio frequency
rms	root mean square
Rx	receive
s	second
T	temperature
Tx	transmit
V	volt
WB	wideband

END OF DOCUMENT