



ECL-EMC Test Report No.: 08-165

Equipment under test: **Digita CordEx Station**

Type of test: **FCC 47 CFR Part 15 Subpart B&C for
unintentional and intentional radiators**

Measurement Procedures: **ANSI C63.4 (2003), ICES003 (2004),
RSS210 (2007) issue 7**

Test result: **Passed**

Date of issue:	12.11.08			Signature:
Issue-No.:	01	Author:	M. Lehmann Test engineer	
Date of delivery:	21.07.08	Checked:	Zapf Operational manager	
Test dates:	22.07. – 12.11.08			
Pages:	44			

Manufacturer: Grundig Business Systems GmbH

Weierstrasse 10
D-95448 Bayreuth
Germany

Test Location: HERBERG Service Plus GmbH
European Compliance Laboratory (ECL)

Nordostpark 51
D-90411 Nürnberg
Tel.: +49 0911 59835 91
Fax: +49 0911 59835 90

General:

The purpose of this report is to show compliance to the FCC regulations for unlicensed devices operating under section 15.249 of the Code of Federal Regulations title 47 and IC RSS210. This report informs about the results of the EMC tests, it only refers to the equipment under test. No part of this report may be reproduced in any form, without written permission.

Table of contents

1	TEST RESULTS SUMMERY	5
2	EQUIPMENT UNDER TEST	6
2.1	EUT DESIGNATION	6
2.2	DESCRIPTION.....	6
2.3	CONFIGURATION	6
2.3.1	INTERNAL RACK WIRING	7
2.3.2	CONNECTIONS	7
2.3.3	FREQUENCIES.....	7
2.3.4	USED SOFTWARE	7
2.4	OPERATING STATES.....	7
2.5	USED EQUIPMENT TO WORK WITH EUT (NOT EMC SPECIFIC)	7
2.6	TECHNICAL DATA OVERVIEW	7
3	DESCRIPTION OF EMC TEST CENTRE.....	8
3.1	REGISTRATIONS	8
3.2	MEASUREMENT UNCERTAINTY	9
4	ANTENNA REQUIREMENT	10
4.1	REGULATION.....	10
4.2	RESULT.....	10
5	RADIATED SPURIOUS EMISSIONS TEST (RECEIVER + TRANSMITTER)	11
5.1	REGULATION.....	11
5.2	RADIATED EMISSIONS TEST, 30 MHZ TO 26 GHZ	12
5.2.1	TEST EQUIPMENT USED:.....	12
5.2.2	TEST PROCEDURES.....	12
5.2.3	CALCULATION OF FIELD STRENGTH LIMITS	15
5.2.4	CALCULATION OF AVERAGE CORRECTION FACTOR	15
5.2.5	FIELD STRENGTH CALCULATION.....	16
5.2.6	TEST RESULTS SPURIOUS EMISSION 30 MHZ TO 1 GHZ AT 10M (CORRECTION FOR FIELD STRENGTH BY 20DB/DECADE)	17
5.2.7	TEST RESULTS SPURIOUS EMISSION 1 GHZ TO 18 GHZ (TRANSMIT + RECEIVE) AT 3M	21
5.2.8	TEST RESULTS SPURIOUS EMISSION 18 GHZ TO 26 GHZ (TRANSMIT + RECEIVE) AT 3M	23
6	CONDUCTED EMISSIONS TESTS	25
6.1	REGULATION.....	25
6.2	TEST EQUIPMENT	25
6.3	TEST PROCEDURES.....	25
6.4	TEST RESULTS	27
7	FIELD STRENGTH LIMITS (FUNDAMENTAL + HARMONICS)	32



•	FCC PART 15.249 “OPERATION WITHIN THE BAND 2400 -2483.5 MHZ”	32
•	RSS-210, ISSUE 7 “LOW POWER LICENCE-EXEMPT RADIO COMMUNICATION DEVICES”	32
7.1	REGULATION.....	32
7.2	BANDEDGE EMISSIONS & FIELD STRENGTH EMISSIONS (FUNDAMENTAL & HARMONICS).....	33
8	99% OCCUPIED BANDWIDTH RSS-GEN SECTION 4.6.1.....	35
8.1	RULE	35
8.2	MEASUREMENTS	36
9	20 DB BANDWIDTH §15.215 (C).....	39
9.1	RULE	39
9.2	MEASUREMENTS	40
10	ACCREDITATION CERTIFICATE	43

1 Test Results Summary

Summary of Test Results Digta CordEx Station

Requirement	CFR/IC Section	Report Section	Test Result
Antenna requirement	15.203 RSS-GEN 7.1.4	4	Pass
Radiated Spurious Emissions (Receiver + Transmitter)	15.109, 15.209, 15.249 RSS210 2.6 RSS-Gen7.3.2	5	Pass
Conducted emissions (Receiver + Transmitter)	15.107, 15.207 RSS-GEN 7.2.2	6	Pass
Field Strength Limits (Fundamental and Harmonics) Band edges measurement	15.249 RSS210 Annex A2.9	7	Pass
99% Bandwidth	RSS-GEN	8	Pass
20dB Bandwidth	15.215	9	Pass

The client has made the determination that EUT Condition, Characterization, and Mode of Operation are representative of production units, and meet the requirements of the specifications referenced herein.

Consistent with industry practice, measurement and test equipment not directly involved in obtaining measurement results but having an impact on measurements (such as cable loss, antenna factors, etc.) are factored into the "Correction Factor" documented in certain test results. Instrumentation employed for testing meets tolerances consistent with known Industry Standards and Regulations.

The measurements contained in this report were made in accordance with the procedure ANSI C63.4-1992 and all applicable Public Notices received prior to the date of testing. All emissions from the device were found to be within the limits outlined in this report.

The test results in this report apply only to the particular Equipment Under Test (EUT) as declared in this report.

2 Equipment under test

2.1 EUT designation

Digta CordEx Station
FCC ID: WPCGZS3000
IC Company Number: 7943A-GZS3000

2.2 Description

Digta CordEx Station is connected to the PC with USB and communicate wireless the Command- and Audio-Data with Digta CordEx Microphone, operated in a world-wide 2,4 – 2,5 GHz ISM band for home or office use.
(see detailed in external Operational description).

2.3 Configuration



Fig. 2.3.1: Station

2.3.1 Internal Rack wiring

Digta CordEx Station eight so often PCB

2.3.2 Connections

Digta CordEx Station with USB connected, power supply unit and foot-pedal (FS536)

2.3.3 Frequencies

Digta CordEx Station CPU-taktrate 63 MHz

Digta CordEx Station Timer-taktrate 32 KHz

Wireless-modul taktrate 16 MHz

The operational frequency band is 2402 – 2479 MHz (CH02 to CH79)

2.3.4 Used Software

Digta CordEx Station FW-DS: 0000 00047

Wireless Modul FW-RF: 0007

2.4 Operating states

The EUT have been tested in transmit and receive mode with 2Mbps. The tested Channels were CH02, CH40 and CH81.

2.5 Used Equipment to work with EUT (not EMC specific)

designation	instrument	manufact.	asset-no.	invent.-no.	calib.-date
Evo N610c	notebook	COMPAQ	470037-533		17.06.2008

2.6 Technical Data Overview

Frequency Range :	2402 – 2481 MHz
Tunable Bands :	1
Number of Channels:	79 in use
Operating Mode:	TX & RX at 2 Mbps
Type of Modulation:	GFSK
Emissions Designator:	3M40G1D
User Frequency Adjustment :	None, Software controlled
Rated Output Power	0 dBm
Type of Power Supply :	USB & Battery
Antenna Connector:	Integral antenna only
Antenna Diversity Supported :	None

3 Description of EMC test centre

3.1 Registrations



Registration No. (DATech): DAT-P-231/92-04



Registration No. (Kraftfahrt-Bundesamt): KBA-P 00053-03



Registration No.: 96997



Registration No.
for radiated emission: IC 3475



Registration No.
for conducted emission on power supply lines: C-2169
for conducted emission on telecommunication ports: T-140
for radiated emission: R-2016



Registered within Verizons ITL program.

3.2 Measurement Uncertainty

The table below shows the measurement uncertainties for each measurement method. The expanded uncertainty was calculated with worst case values over the complete frequency area.

Measurement method	Frequency area impulse duration time	Description	expanded Uncertainty (95% or k=2)
Radiated emission (EN 55022; ANSI C63.4 etc.)	30 MHz - 1 GHz	Semi anechoic chamber	± 4,7 dB
	1 GHz - 18 GHz	Fully anechoic chamber	± 3,9 dB
Conducted emission (EN 55022; ANSI C63.4 etc.)	9 kHz - 150 kHz		± 4,0 dB
	150 kHz - 30 MHz		± 3,6 dB
Harmonics (EN 61000-3-2)	2 ... 40 x f_N	Voltage	± 1%
	$f_N = 50$ Hz	Current	± 1%
Flicker (EN 61000-3-3)	$f_N = 50$ Hz	P_{st}	± 1,5%
ESD (EN 61000-4-2)	5/30ns	Rise time / half life	± 30%
		Voltage amplitude	± 10%
Radiated Immunity (EN 61000-4-3)	80 MHz - 1 GHz		± 42,7%
BURST (EN 61000-4-4)	5/50 ns	Rise time / half life	± 20%
		Voltage amplitude	± 4,1%
SURGE (EN 61000-4-5)	1,2/50 μ s 8/20 μ s	Voltage rise time / half life	± 30% / ±20%
		Current rise time / half life	± 20% / ±20%
		Charged voltage	± 4,1%
HF-Injection (EN 61000-4-6)	150 kHz - 80 MHz		± 9%
Voltage Dips, Interruptions (EN 61000-4-11)		Voltage level	± 1%
		Time	± 0,1%
Power induction	ITU-K.20	Frequency	± 0,1Hz
		Amplitude	± 1%

4 Antenna Requirement

Test requirement: FCC CFR47, Part 15C

4.1 Regulation

15.203 An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of Part 15C. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with Section 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded.

4.2 Result

EUT: **Digta CordEx Station**

Antenna is directly soldered on the PCB.

The EUT meets the requirements of this section.

5 Radiated Spurious Emissions Test (Receiver + Transmitter)

Test requirement: FCC CFR47, Part 15C

Test procedure: ANSI C63.4: 2003

5.1 Regulation

15.249(a) The field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Fundamental frequency (MHz)	Field strength of fundamental (milli volts/meter)	Field strength of harmonics (micro volts/meter)
902 – 928 MHz	50	500
2400 – 2483.5 MHz	50	500
5725 – 5875 MHz	50	500
24.0 – 24.25 GHz	250	2500

(b) Field strength limits are specified at a distance of 3 meters.

(c) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or the general radiated emission limits in §15.209, whichever is the lesser attenuations.

(d) As shown in §15.35(b), for frequencies above 1000 MHz, the above field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

Section 15.33 Frequency range of radiated measurements:

(a) Unless otherwise noted in the specific rule section under which the equipment operates for an intentional radiator the spectrum shall be investigated from the lowest radio frequency signal generated in the device, without going below 9 kHz, up to at least the frequency shown in this paragraph:

(1) If the intentional radiator operates below 10 GHz: to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.

5.2 Radiated Emissions Test, 30 MHz to 26 GHz

5.2.1 Test equipment used:

Designation	Equipment	Manufacturer	Cal	Due Cal	used
EMI test receiver	ESI40	Rohde & Schwarz	03.09.2008	03.09.2009	X
Amplifier	AFS4-00102000	Miteq	11.11.2008	11.11.2009	X
Amplifier	JS43-18004000-30-5A	Miteq	25.07.2008	25.07.2009	X
Amplifier	AM-1431-N	Miteq	17.10.2008	17.10.2009	X
Antenna	CBL 6111	Chase	09.07.2008	09.07.2009	X
Antenna	HL025	Rohde & Schwarz	05.12.2007	05.12.2008	X
Antenna	MWH-1826/B	ARA Inc.	01.10.2008	01.10.2009	X
LISN	Bajog 4-25/32	Bajog	19.09.2008	19.09.2009	X

5.2.2 Test Procedures

For tabletop equipment, the EUT is placed on a 0.8 meter high nonconductive table that sits on a flush mounted metal turntable. Floor standing equipment is placed directly on the flush mounted metal turntable. The EUT is connected to its associated peripherals with any excess I/O cabling bundled to approximately 1 meter.

Preview tests are performed. Emissions from the unit are maximized by adjusting the polarization and height of the receive antenna and rotating the EUT on the turntable. Manipulating the system cables also maximizes EUT emissions. All tests performed with the antenna placed in two polarizations: horizontal and vertical.

Radiated Emissions Test Characteristics	
Frequency range	30 MHz – 26 GHz
Test distance	3 m >1 GHz, 10m <1 GHz
Test instrumentation resolution bandwidth	120 kHz (30 MHz – 1 GHz) 1 MHz (1 GHz – 26 GHz)
Receive antenna scan height	1 m – 4 m
Receive antenna polarization	Vertical/Horizontal

* According to Section 15.31 (f)(1): At frequencies at or above 30 MHz, measurements may be performed at a distance other than what is specified provided: measurements are not made in the near field except where it can be shown that near field measurements are appropriate due to the characteristics of the device; and it can be demonstrated that the signal levels needed to be measured at the distance employed can be detected by the measurement equipment. (...) When performing measurements at a distance other than specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse linear-distance for field strength measurements; inverse-linear-distance-squared for power density measurements).

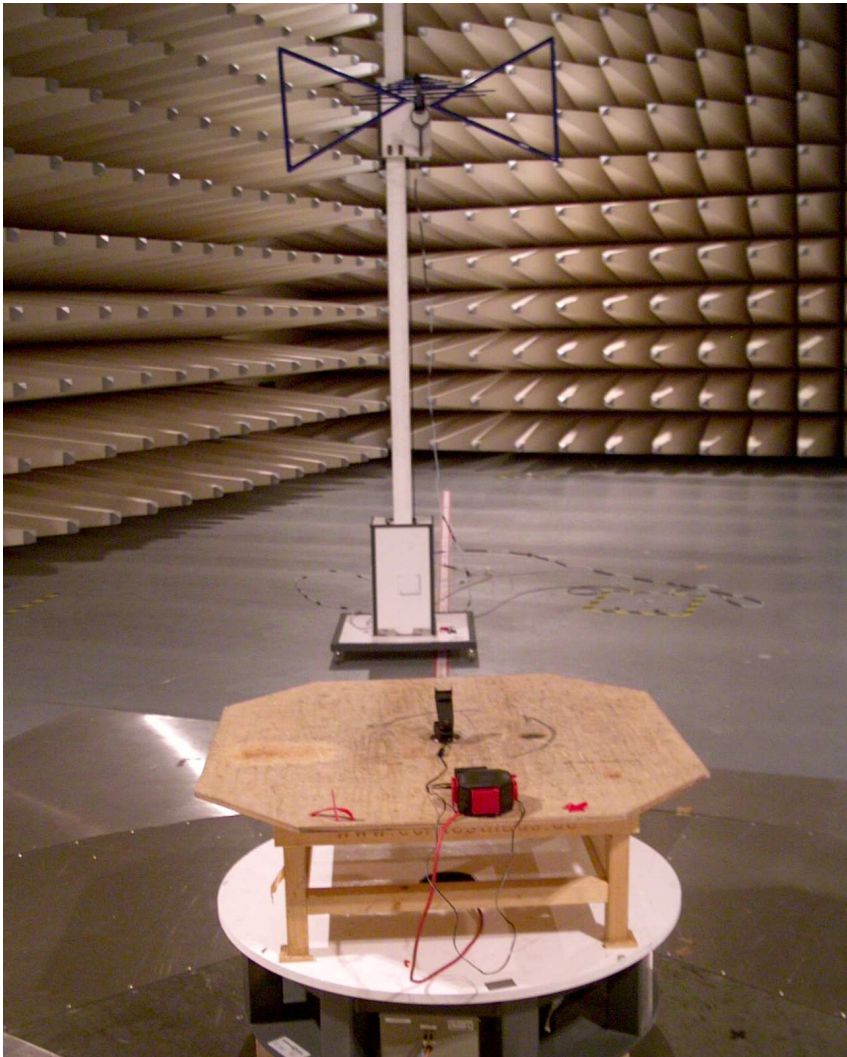


Fig. 5.2.1: Basic set-up for radiated emission; 30 MHz - 1 GHz

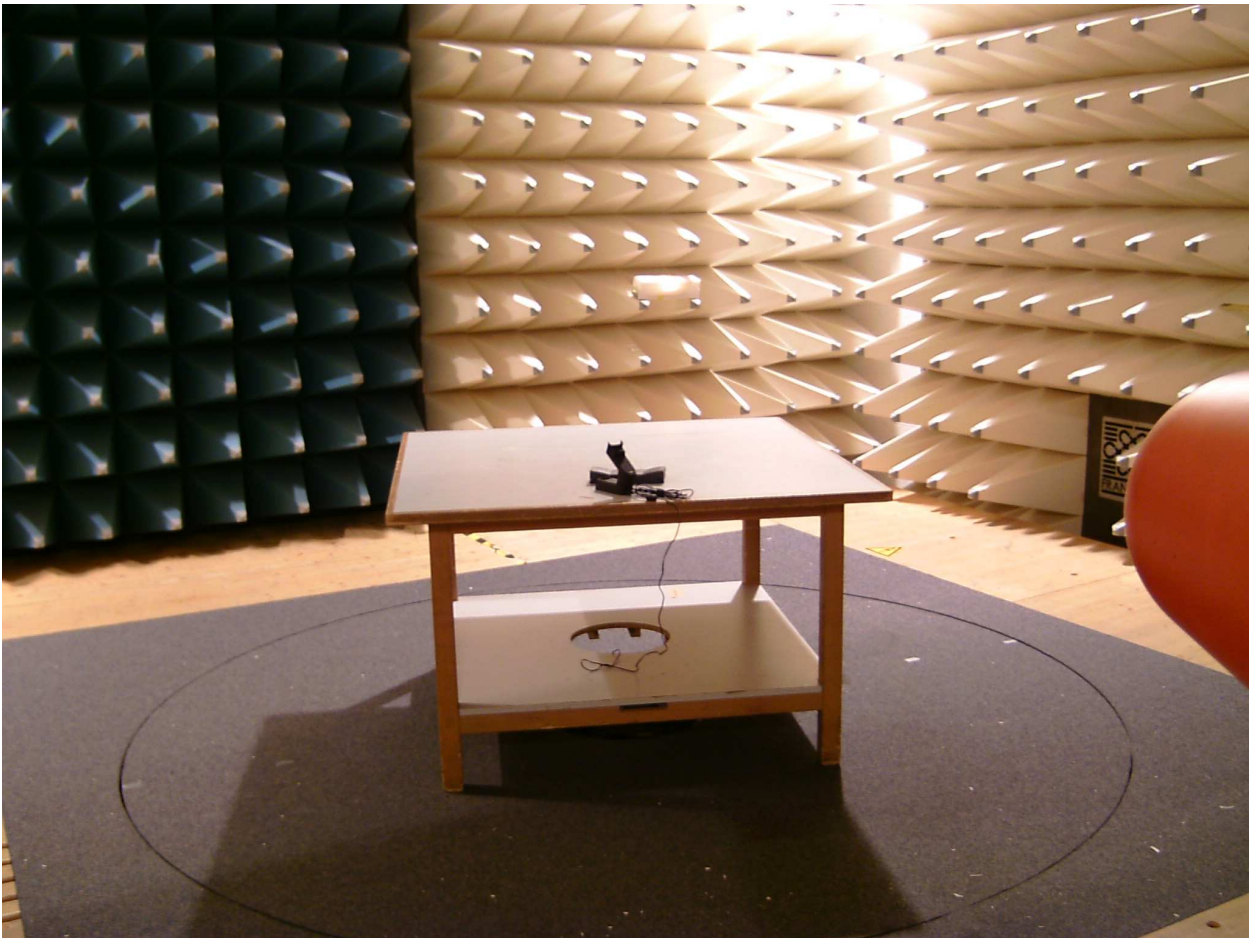


Fig. 5.2.2: Basic set-up for radiated emission test above 1 GHz

5.2.3 Calculation of Field Strength Limits

Fundamental field strength limit for the band 2400 – 2483,5 MHz:
 50 mV/m at 3 meters; 50 mV/m corresponds with 94.0 dB(μ V/m).

Harmonics field strength limit for the band 2400 – 2483,5 MHz:
 500 μ V/m at 3 meters; 500 μ V/m corresponds with 54.0 dB(μ V/m).

The above field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

Emissions radiated outside the frequency band 2400 – 2483,5 MHz, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

Calculation: microvolts/meter to dB(μ V/m)

Frequency [MHz]	Field Strength Limits according to §15.209		Measurement distance [m]
	[μ V/m]	[dB(μ V/m)]	
30 - 88	100	40.0	3
88 - 216	150	43.5	3
216 - 960	200	46.0	3
Above 960	500	54.0	3

The emission limits shown in the above table are based on measurements employing a CISPR quasipeak detector except for frequencies above 1000 MHz. Radiated emission limits above 1000 MHz are based on measurements employing an average detector.

The measurement of the spurious emission between 30MHz and 1 GHz has been performed at 10m distance. The results have been calculated by adding an extrapolation factor 20dB/decade for the 3m distance limits shown in the table.

5.2.4 Calculation of Average Correction Factor

The average correction factor is computed by analyzing the “worst case” on time in any 100 ms time period and using the formula:

$$\text{Correction Factor (dB)} = 20 \cdot \log(\text{worst case on time}/100 \text{ ms})$$

The peak to average ratio has been measured by using the right detectors of the ESI40. Therefore the correction factor was zero.

5.2.5 Field Strength Calculation

The field Strength is calculated by adding the Antenna Factor and the Cable Factor. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CF$$

where

- FS = Field Strength in dB(μ V/m)
- RA = Receiver Amplitude in dB(μ V)
- AF = Antenna Factor in dB(1/m)
- CF = Cable Attenuation Factor in dB

Assume a receiver reading of 23.5 dB(μ V) is obtained. The Antenna Factor of 7.4 dB(1/m) and a Cable Factor of 1.1 dB are added, giving a field strength of 32 dB(μ V/m). The 32 dB(μ V/m) value can be mathematically converted to its corresponding level in μ V/m.

$$FS = 23.5 \text{ dB}(\mu\text{V}) + 7.4 \text{ dB (1/m)} + 1.1 \text{ dB} = 32 \text{ dB}(\mu\text{/m})$$

$$FS = 10^{(32/20)} \mu\text{V/m} = 39.8 \mu\text{V/m}$$

For test distances other than what is specified, but fulfilling the requirements of Section 15.31 (f)(1) the field strength is calculated by adding additionally an extrapolation factor of 20 dB/decade (inverse linear-distance for field strength measurements). The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CF + DF$$

where

- FS = Field Strength in dB(μ V/m)
- RA = Receiver Amplitude in dB(μ V)
- AF = Antenna Factor in dB(1/m)
- CF = Cable Attenuation Factor in dB
- DF = Distance Extrapolation Factor in dB
- where $DF = 20\log(D_{\text{test}}/D_{\text{spec}})$ where D_{test} = test distance and D_{spec} = specified distance


Assume the test performed at a reduced test distance of 1.5 m instead of the specified distance of 3 m giving a Distance Extrapolation of $DF = 20\log(1.5\text{m}/3\text{m}) = -6 \text{ dB}$.

Assuming a receiver reading of 23.5 dB(μ V) is obtained. The Antenna Factor of 7.4 dB(1/m), the Cable Factor of 1.1 dB and the Distance Factor of -6 dB are added, giving a field strength of 26 dB(μ V/m). The 26 dB(μ V/m) value can be mathematically converted to its corresponding level in μ V/m.


$$FS = 23.5 \text{ dB}(\mu\text{V}) + 7.4 \text{ dB(1/m)} + 1.1 \text{ dB} - 6 \text{ dB} = 26 \text{ dB}(\mu\text{V/m})$$

$$FS = 10^{(26/20)} \mu\text{V/m} = 20.0 \mu\text{V/m}$$

5.2.6 Test Results spurious emission 30 MHz to 1 GHz at 10m (Correction for Field Strength by 20dB/decade)

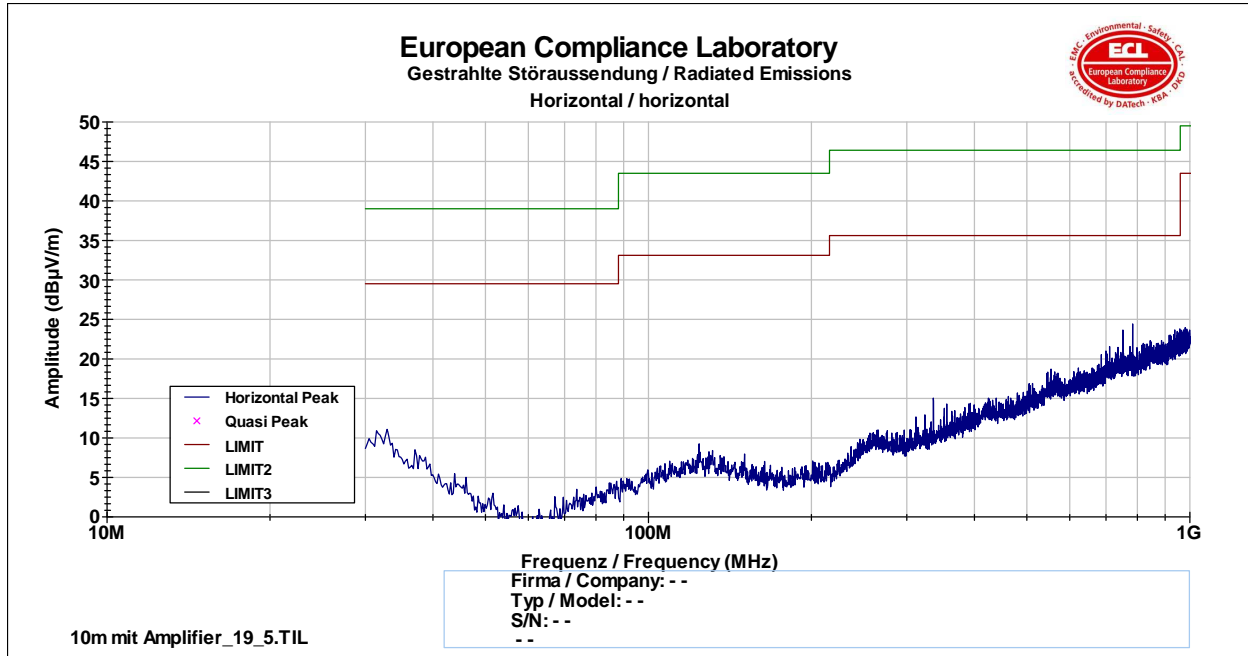

Measurementreport 1: 30MHz-1GHz	horizontal; receive mode at CH40 at 10m
------------------------------------	---

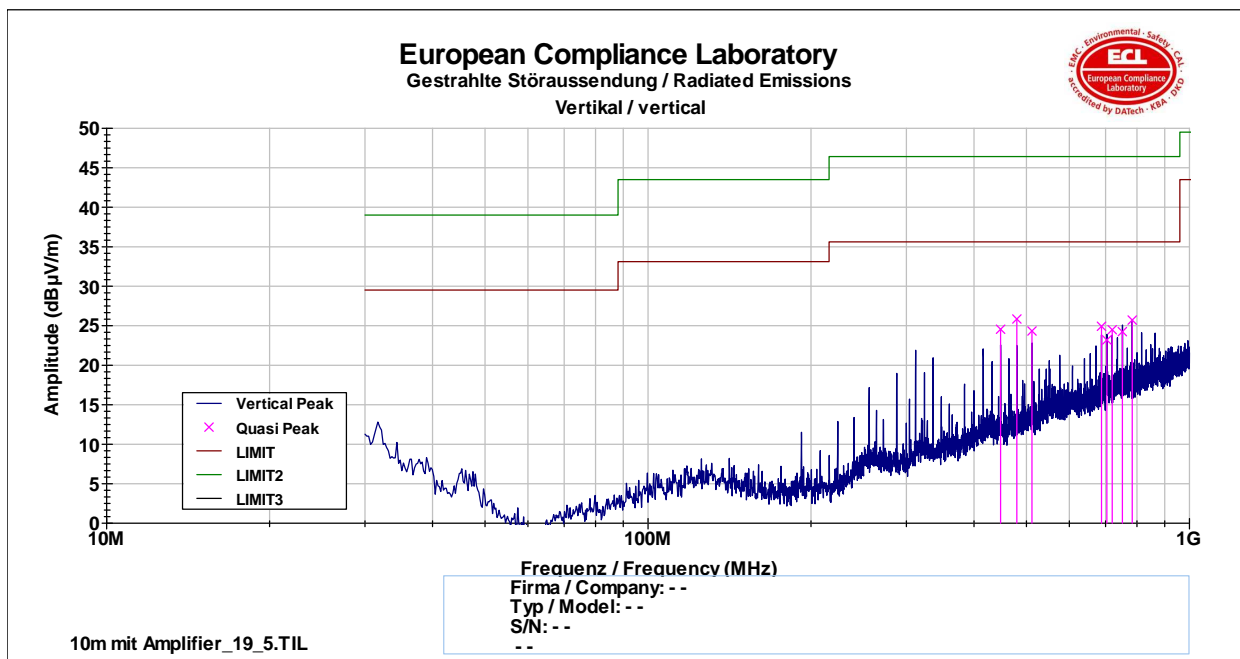


Frequency	Polarisation	Height	TT-Position	Cable Loss	Antenna Factor	Reading	Field Intensity	CF Distance 10m→3m	Limit	Margin
[MHz]	H/V	[cm]	[°]	[dB]	[dB]	[dB]	[dBµV/m]	dB	[dBµV/m]	[dB]
447.996	V	299	142	-34.2	16.9	41.8	24.5	10.45	46	11.05
480.01	V	330	142	-34.0	17.5	42.3	25.8	10.45	46	9.75
511.964	V	299	142	-33.8	18.0	40.1	24.3	10.45	46	11.25
688.006	V	220	115	-33.2	20.6	37.5	24.9	10.45	46	10.65
703.983	V	228	177	-33.1	20.9	35.3	23.2	10.45	46	12.35
720.02	V	228	154	-33.0	21.2	36.3	24.5	10.45	46	11.05
751.974	V	237	131	-33.0	21.9	35.4	24.2	10.45	46	11.35
783.985	V	197	100	-32.9	21.7	36.9	25.7	10.45	46	9.85

Measurement report 2: vertical; receive mode at CH40 at 10m
30 MHz – 1 GHz


Minimum margin: $46\text{dB}\mu\text{V/m} - (25,8\text{dB}\mu\text{V/m} + 10,5\text{ dB}\mu\text{V/m}) = 9.75\text{ dB}$
(Limit – (Field Intensity + CF10m) = Corrected Margin)

Measurements 3 and 4 of this section have been performed at 3m distance!

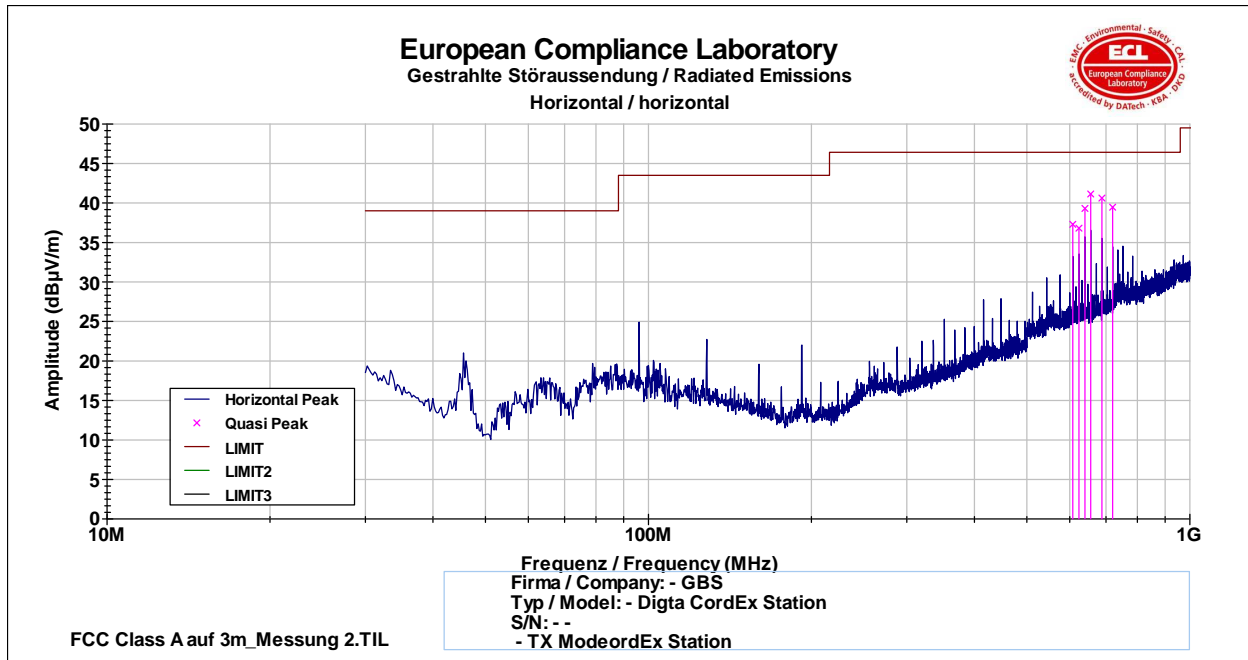

Frequency	Polarisation	Height	TT-Position	Cable Loss	Antenna Factor	Reading	Field Intensity	Limit	Margin
[MHz]	H/V	[cm]	[°]	[dB]	[dB]	[dB]	[dBµV/m]	[dBµV/m]	[dB]
608.004	H	136	100	3.2	19.8	14.4	37.3	46	8.7
623.981	H	145	-77	3.2	19.9	13.7	36.8	46	9.2
640.015	H	134	-67	3.2	20.1	16.0	39.3	46	6.7
655.992	H	127	-81	3.3	20.2	17.7	41.1	46	4.9
688.006	H	122	-97	3.4	20.6	16.6	40.6	46	5.4
720.02	H	115	-48	3.4	21.2	14.8	39.5	46	6.5


Measurement report 3: 30MHz-1GHz	horizontal; transmit mode at CH 40 at 3m
-------------------------------------	--

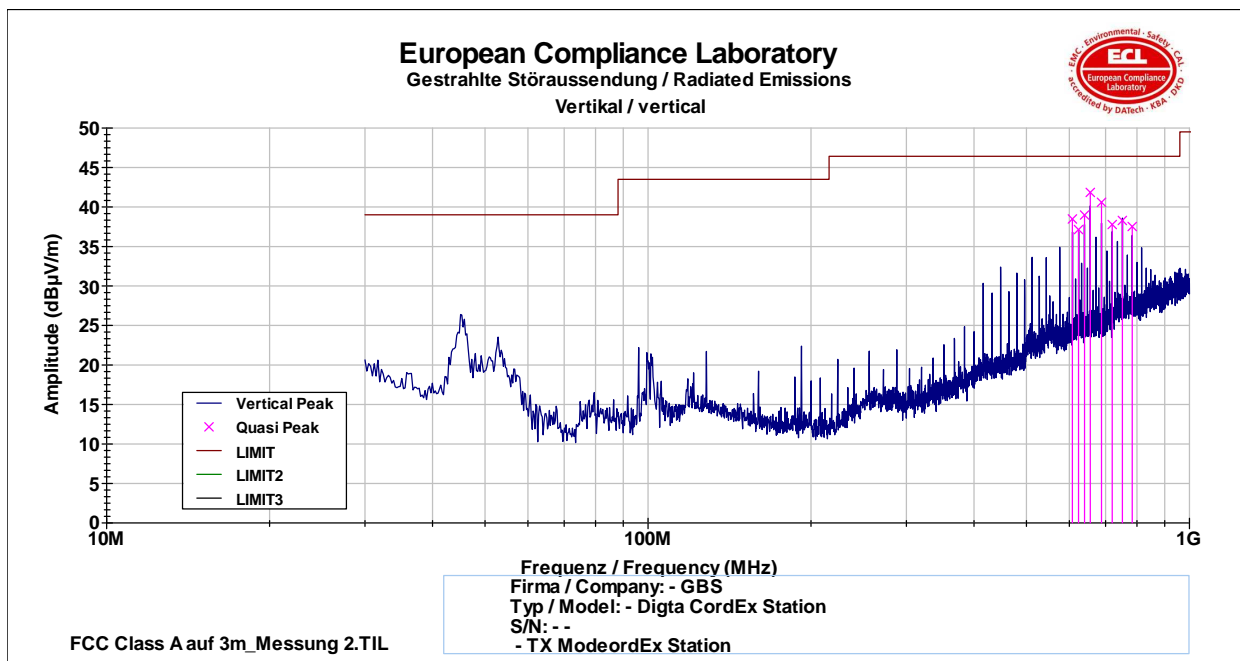


Frequency	Polarisation	Height	TT-Position	Cable Loss	Antenna Factor	Reading	Field Intensity	Limit	Margin
[MHz]	H/V	[cm]	[°]	[dB]	[dB]	[dB]	[dBµV/m]	[dBµV/m]	[dB]
608.004	V	109	135	3.2	19.8	15.6	38.5	46	7.5
623.981	V	109	122	3.2	19.9	14.0	37.1	46	8.3
640.015	V	109	137	3.2	20.1	15.7	39.0	46	7
655.992	V	100	129	3.3	20.2	18.4	41.8	46	4.2
688.006	V	109	-131	3.4	20.6	16.6	40.6	46	5.4
720.02	V	161	-10	3.4	21.2	13.1	37.8	46	8.2
751.974	V	149	24	3.5	21.9	12.9	38.3	46	7.7
783.985	V	156	-79	3.6	21.7	12.2	37.5	46	8.5

Measurement report 4: vertical; transmit mode at CH 40 at 3m
30 MHz – 1 GHz


5.2.7 Test Results spurious emission 1 GHz to 18 GHz (transmit + receive) at 3m

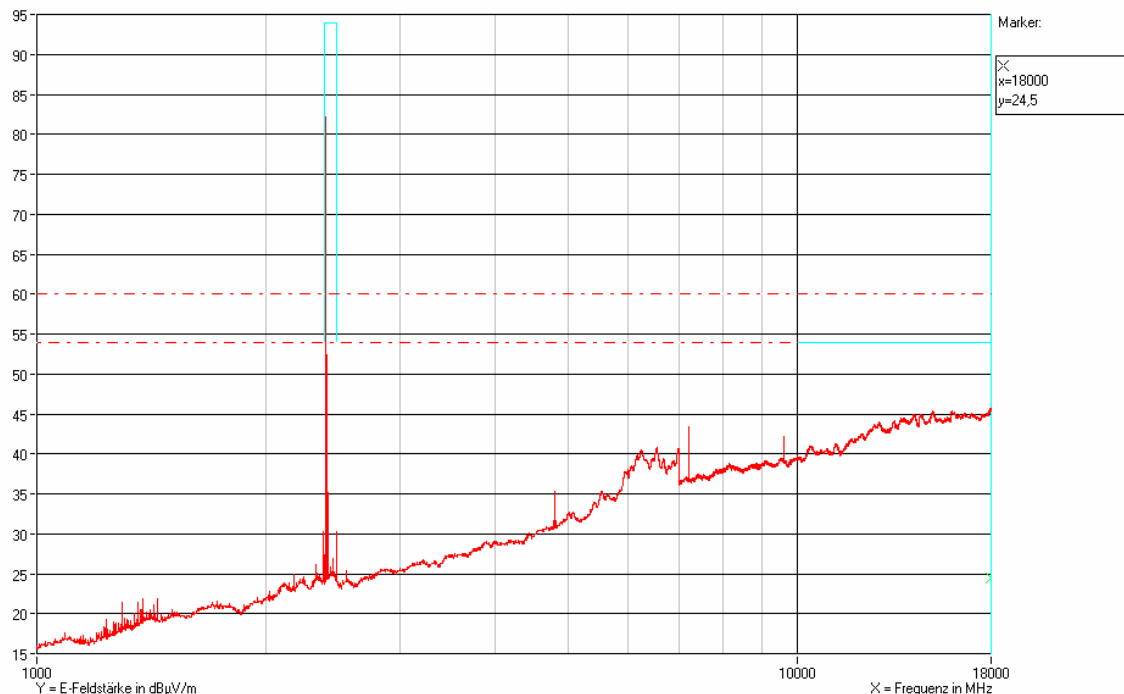


Measurement report 5: Horizontal + vertical (max. hold with Average Detector); transmit mode
1 GHz – 18 GHz CH 01

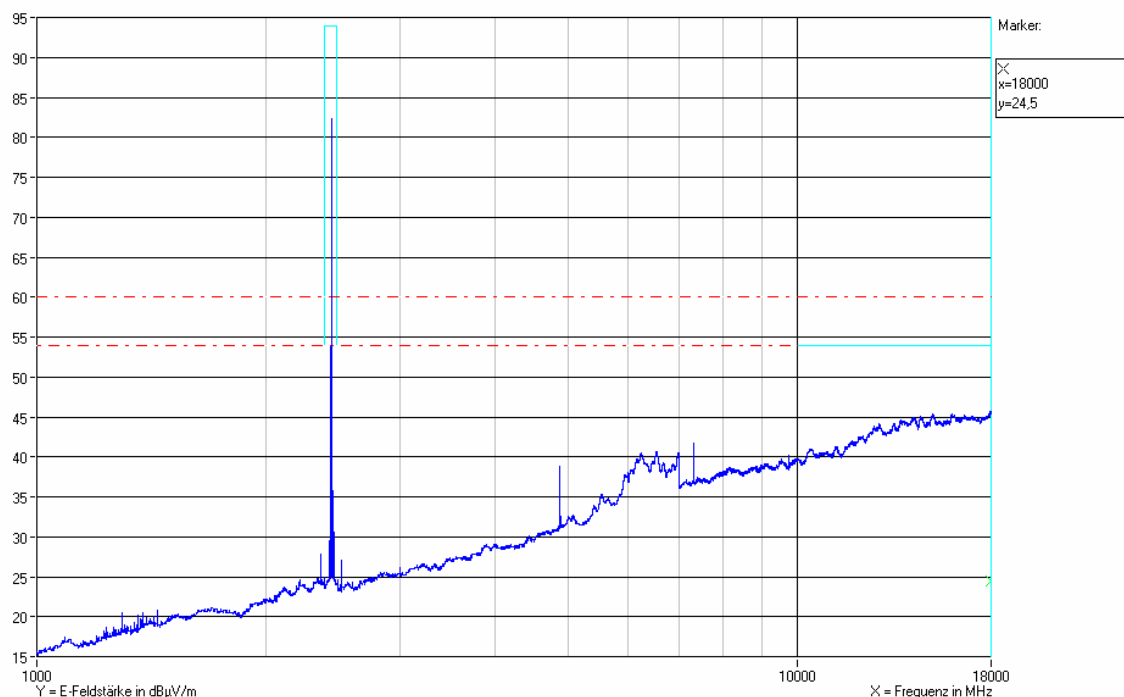

Measurement report 6: Horizontal + vertical (max. hold with Average Detector); transmit mode
1 GHz – 18 GHz CH 40

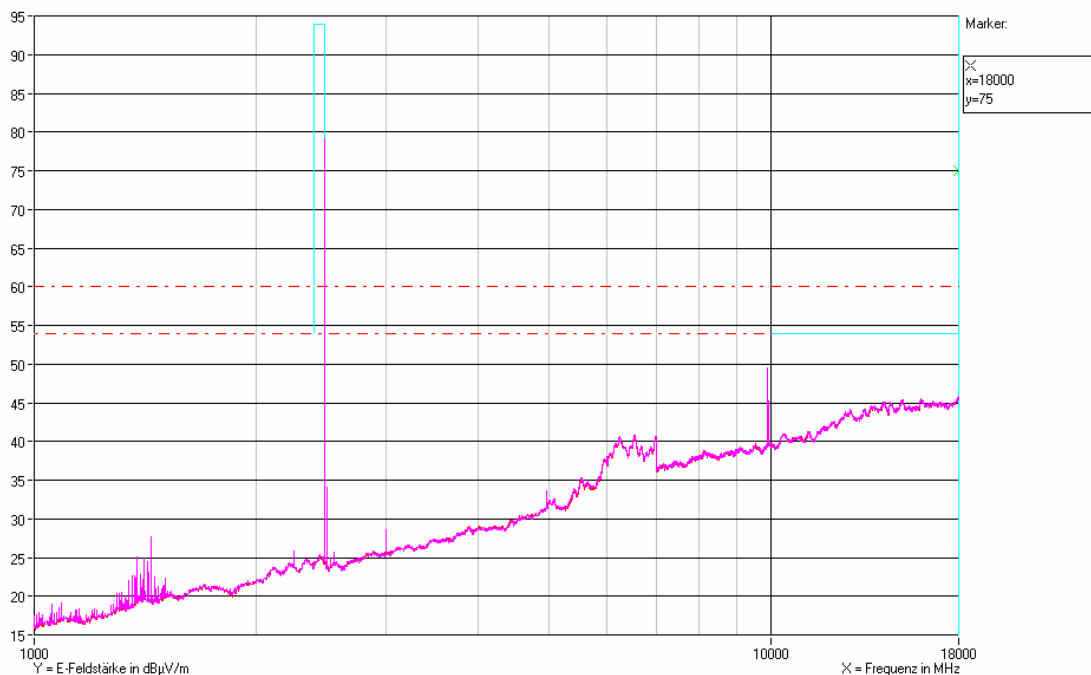


Measurement report 7: Horizontal + vertical (max. hold with Average Detector); transmit mode
1 GHz – 18 GHz CH 79

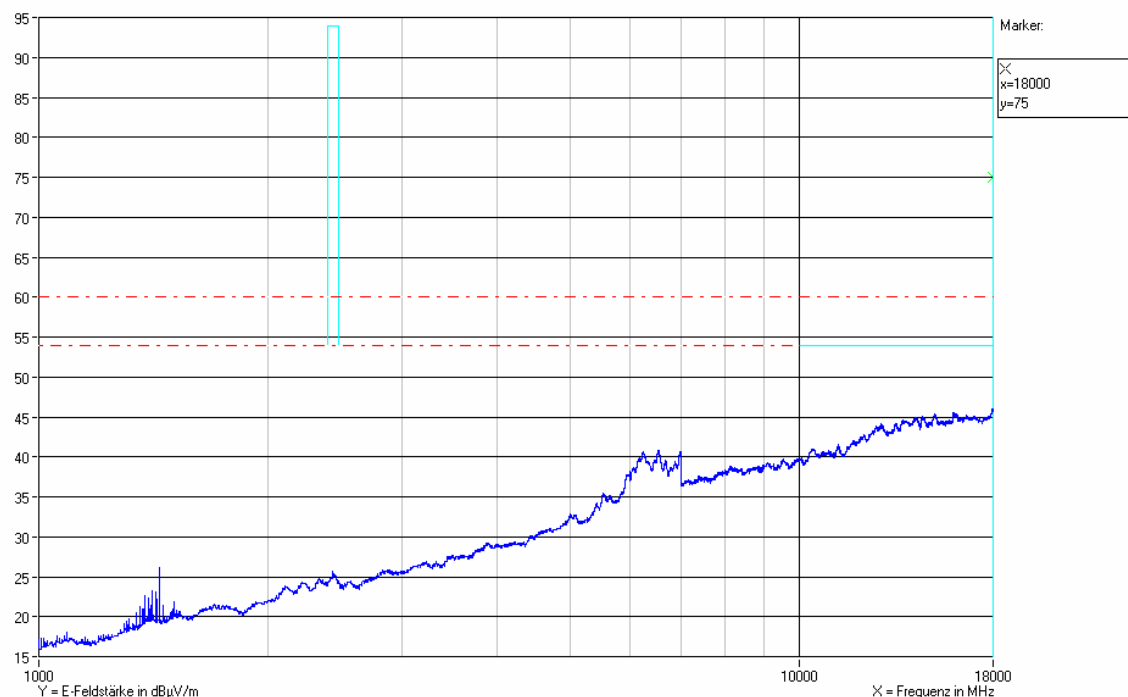


Measurement report 8: Horizontal + vertical (max. hold with Average Detector); receive mode
1 GHz – 18 GHz

5.2.8 Test Results spurious emission 18 GHz to 26 GHz (transmit + receive) at 3m

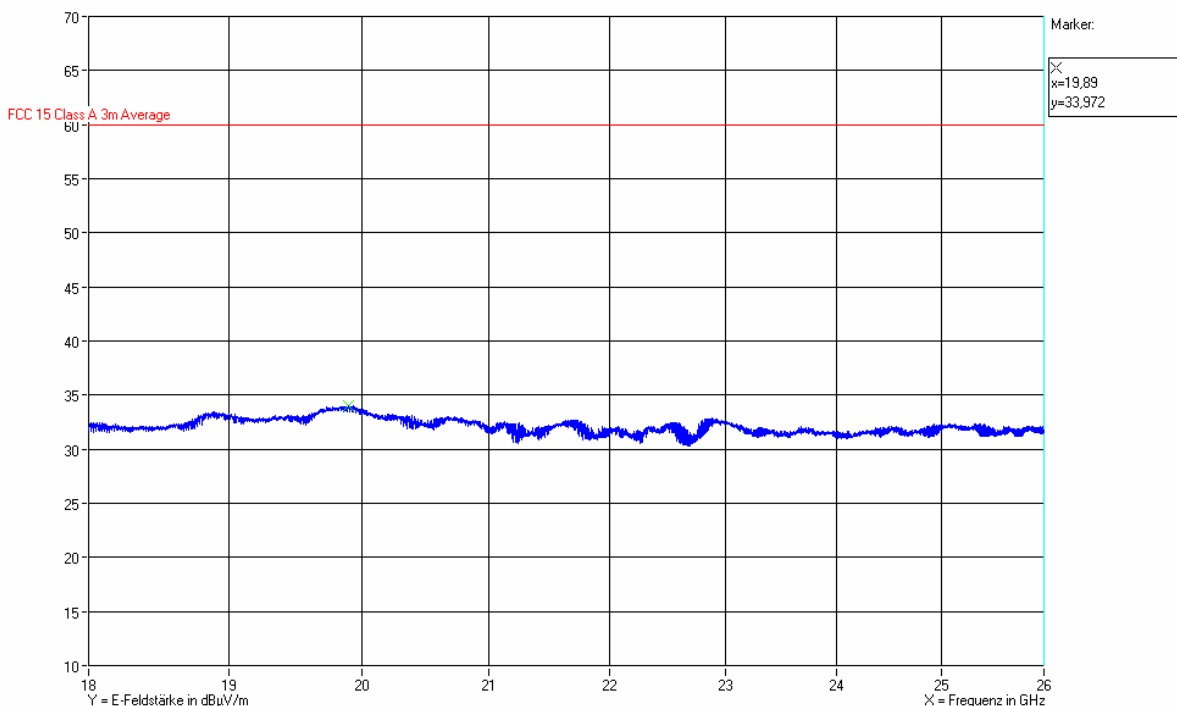

Measurement report 9: Horizontal + vertical (max. hold with Average detector); transmit mode 18 GHz – 26 GHz

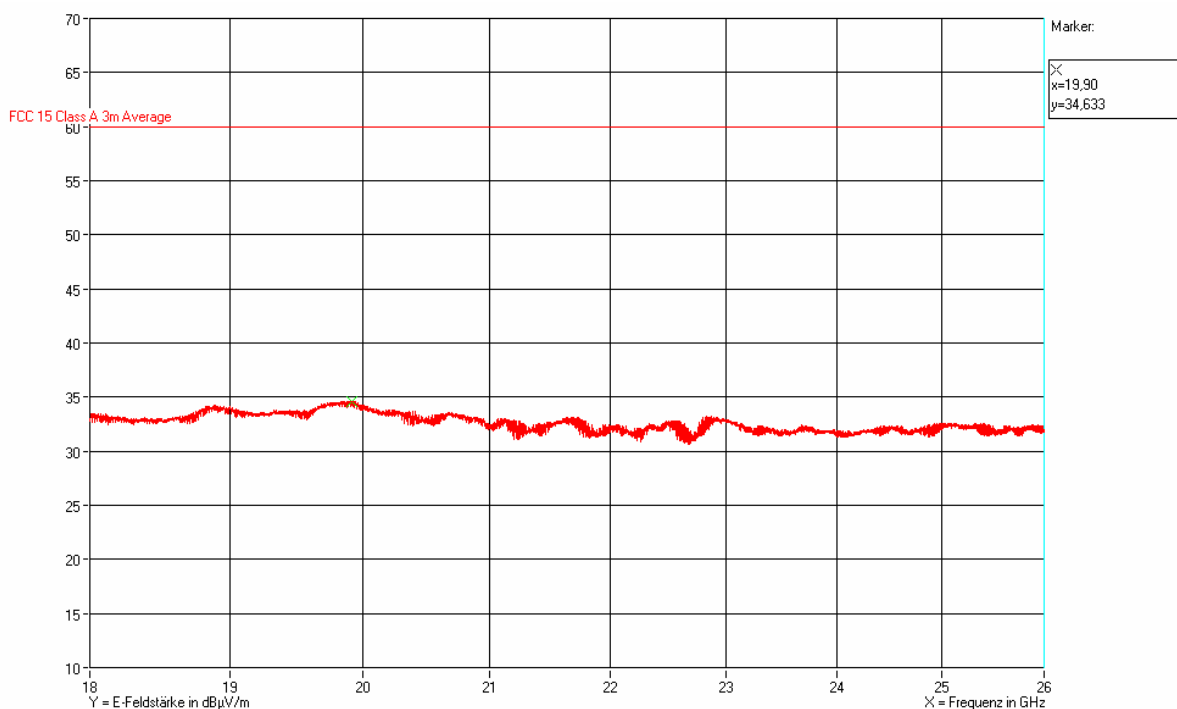

Measurement report 10: Horizontal + vertical (max. hold with Average detector); receive mode 18 GHz – 26 GHz



The peaks at 2.4 GHz are the fundametal frequencies.

EUT: **Digta CordEx Station**

The EUT meets the requirements of this section.

6 Conducted Emissions Tests

Test Requirement: FCC CFR47, Part 15C, RSS-GEN 7.2.2
 Test Procedure: ANSI C63.4: 1992

6.1 Regulation

Section 15.207 (a) For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolt. Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminals.

Section 15.207 (d) Measurements to demonstrate compliance with the conducted limits are not required for devices which only employ battery power for operation and which do not operate from the AC power lines or contain provisions for operation while connected to the AC power lines. Devices that include, or make provision for, the use of battery charger which permit operating while charging, AC adaptors or battery eliminators or that connect to the AC power lines indirectly, obtaining their power through another device which is connected to the AC power lines, shall be tested to demonstrate compliance with the conducted limits.

6.2 Test Equipment

Designation	Equipment	Manufacturer	CAL	DUE CAL	used
EMI test receiver	ESI40	Rohde & Schwarz	03.09.2008	03.09.2009	X
Transient Limiter	ESH3-Z2	Rohde & Schwarz	20.09.2008	20.09.2009	X
LISN (4x25 A)	LISN4-25/32	Bajog	19.09.2008	19.09.2009	X

6.3 Test Procedures

The supply voltage for the EUT was provided via a Line impedance stabilizing network (LISN). The LISNs were under the turntable and connected to the chamber ground.

The EUT, when intended for table-top use, was placed 0,4m from a vertical metal reference plane of at least 2m by 2m, and was kept at least 0,8m from any other metal surface or other ground plane was not part of the EUT. If the measurement was made in a screened enclosure, the distance of 0,4m was referred to one of the walls of the enclosure. If the measurement was made in a screened enclosure, the distance of 0,4m was referred to the horizontal metal ground plane.

A floor-standing EUT was placed on a horizontal metal ground plane; the points of contact were consistent with normal use, but not in metallic contact with the ground plane. The reference ground plane was at least 0,5m beyond the boundaries of the EUT, and had minimum dimensions of 2m by 2m.


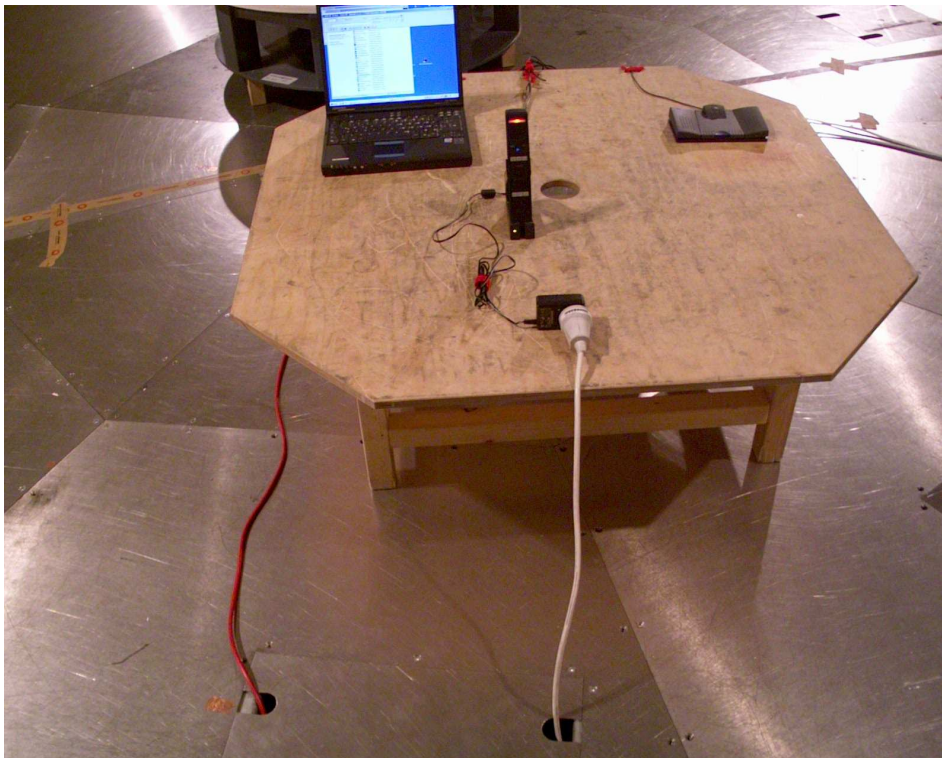


Fig. 6.3.1: Basic set-up for conducted emission test from power ports


6.4 Test Results

A functional test of the test equipment was carried out before and after the measurements.


Frequency range	Mode	Line	Detector	Measurement report
150 kHz - 30 MHz	play mode	N	peak / average	1
		L	peak / average	2
	record mode	N	peak / average	3
		L	peak / average	4
	Transmit mode	N	peak / average	5
		L	peak / average	6
	Receive mode	N	peak / average	7
		L	peak / average	8

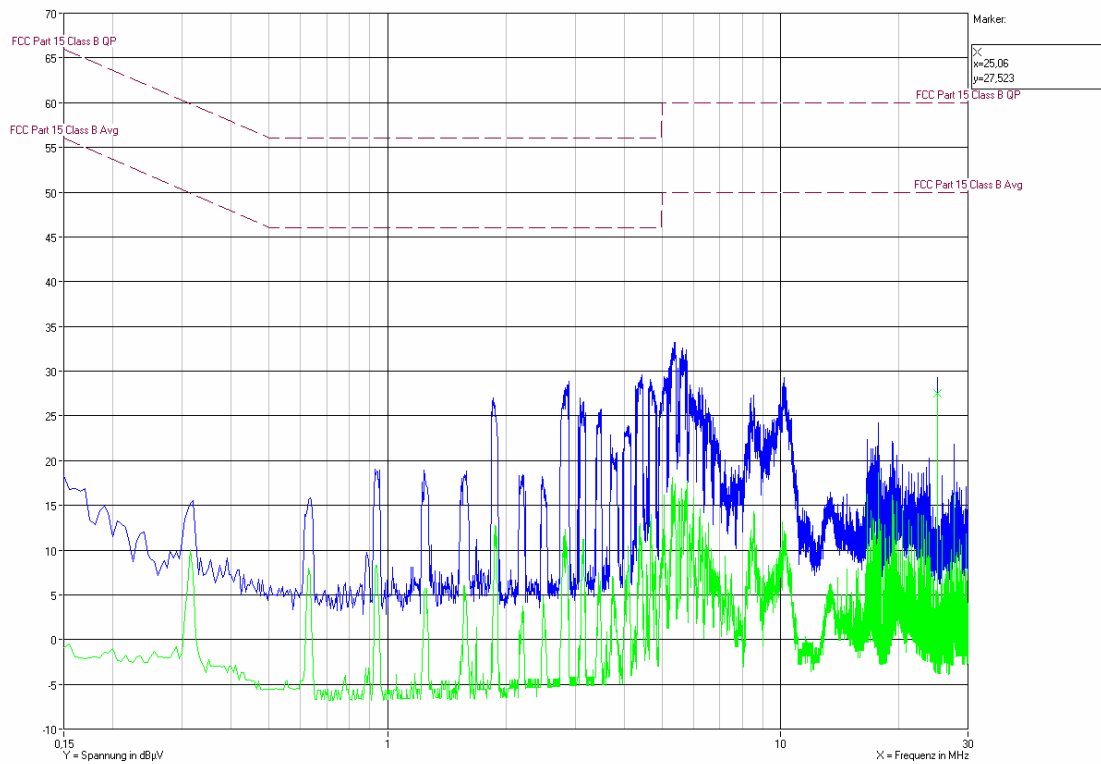


Measurement report 1: Neutral, play mode

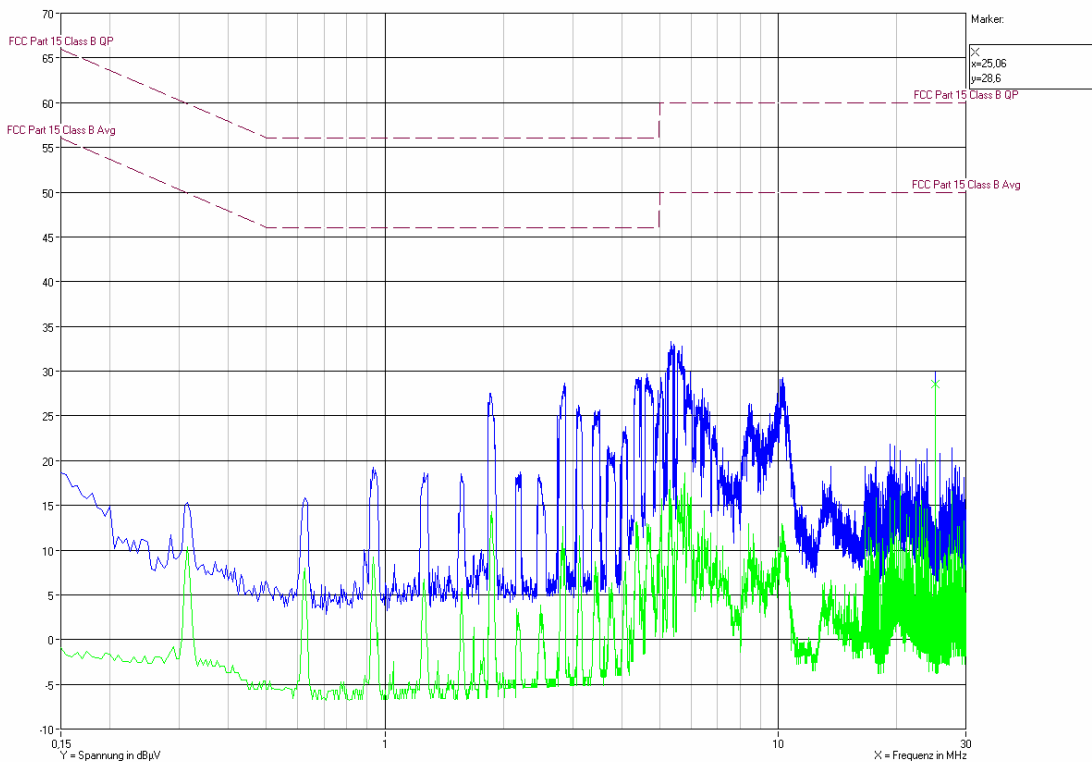


Measurement report 2: Line L1, play mode

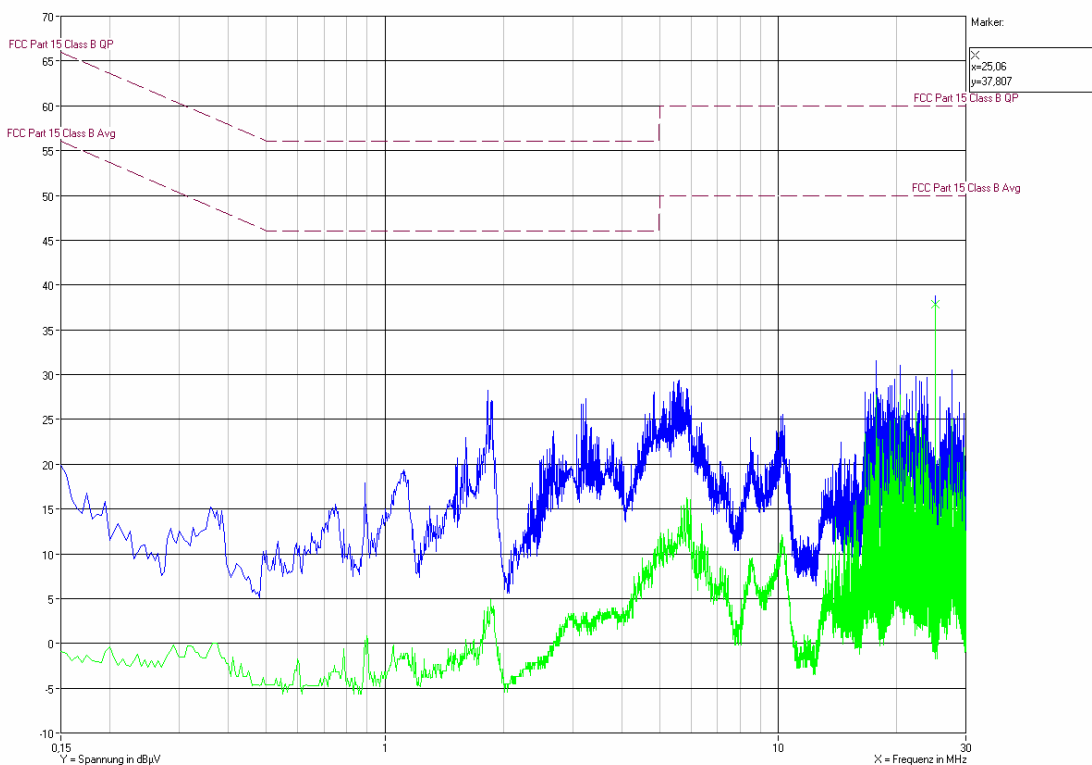


Measurement report 3: Neutral, record mode

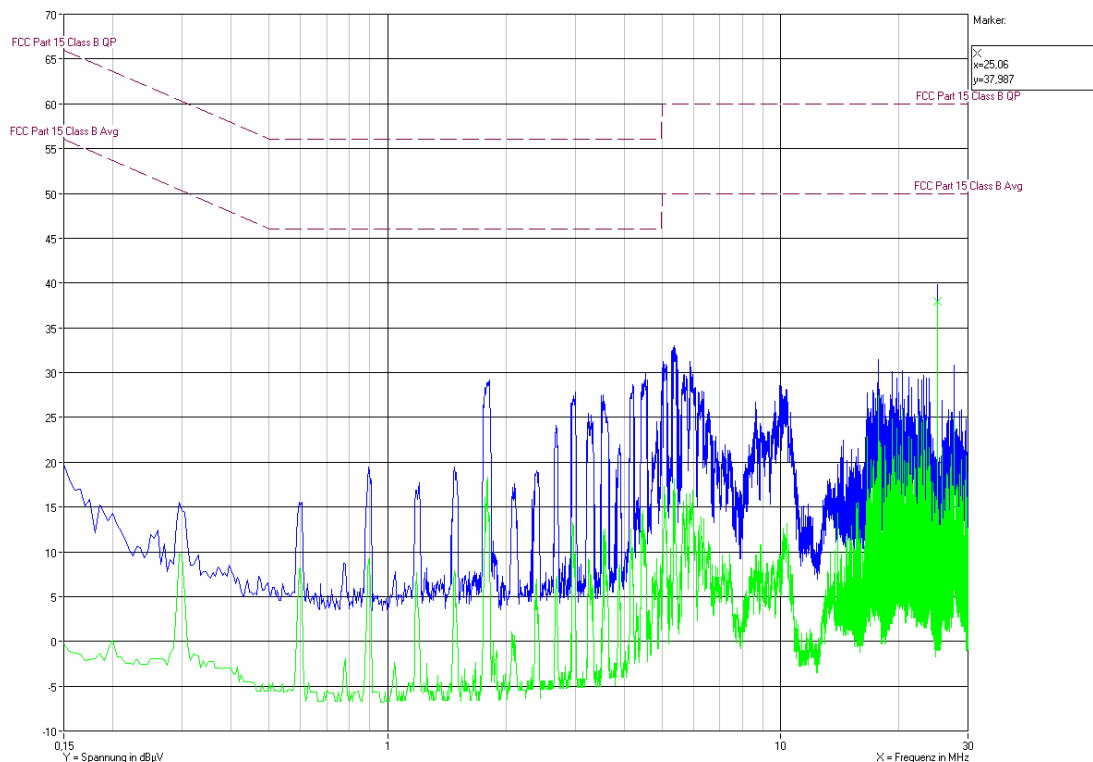


Measurement report 4: Line L1, record mode

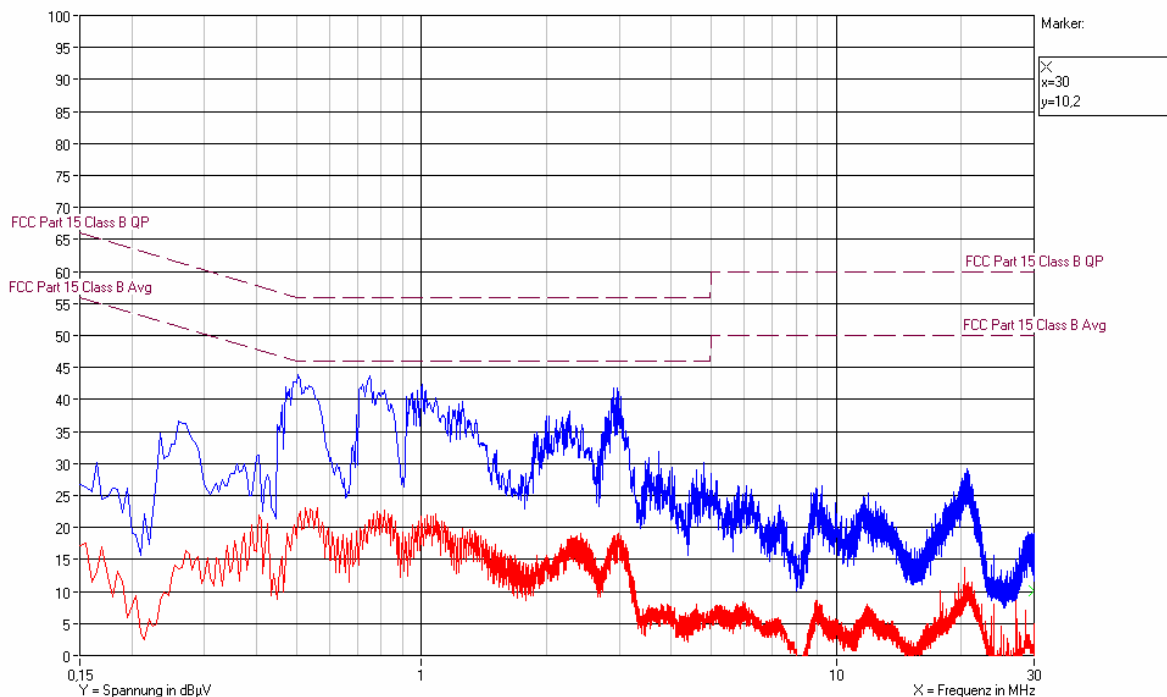


Measurement report 5: Neutral, Transmit mode

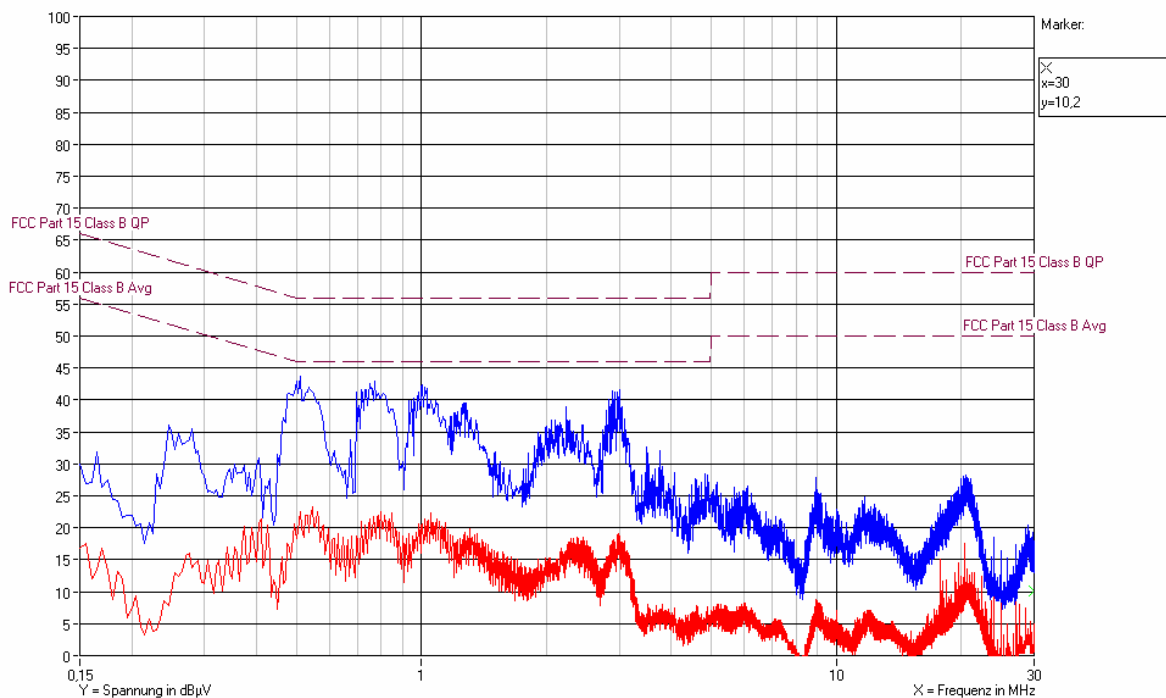

Measurement report 6: Line L1, Transmit mode

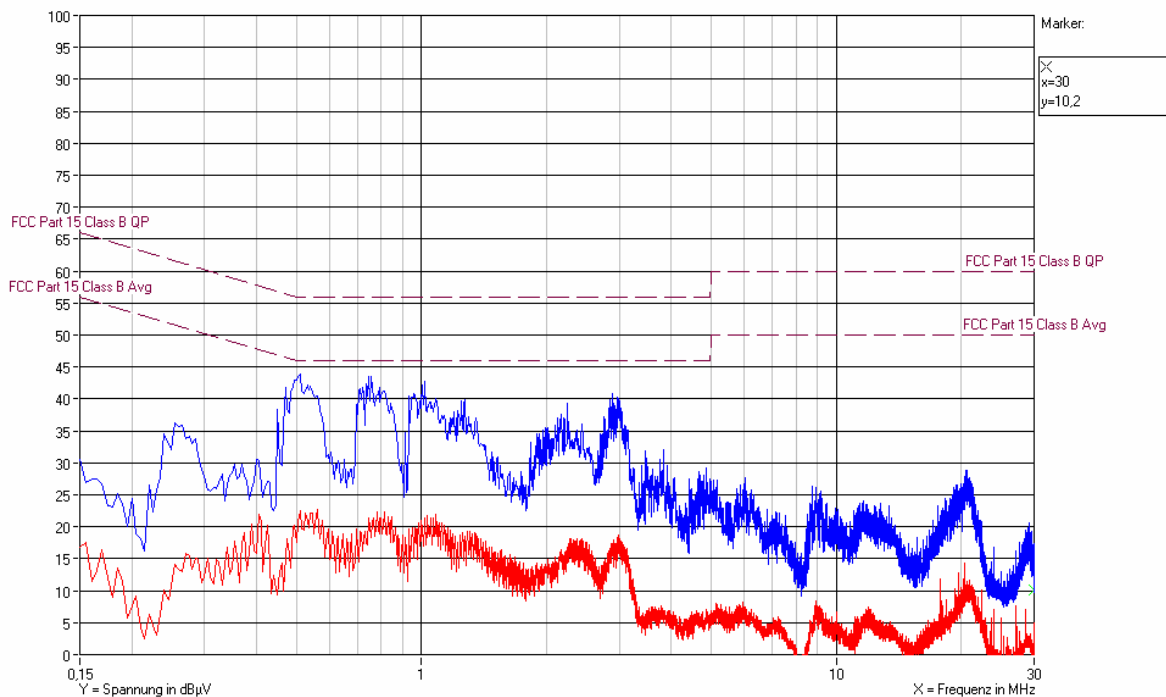

Measurement report 7: Neutral, Receive mode

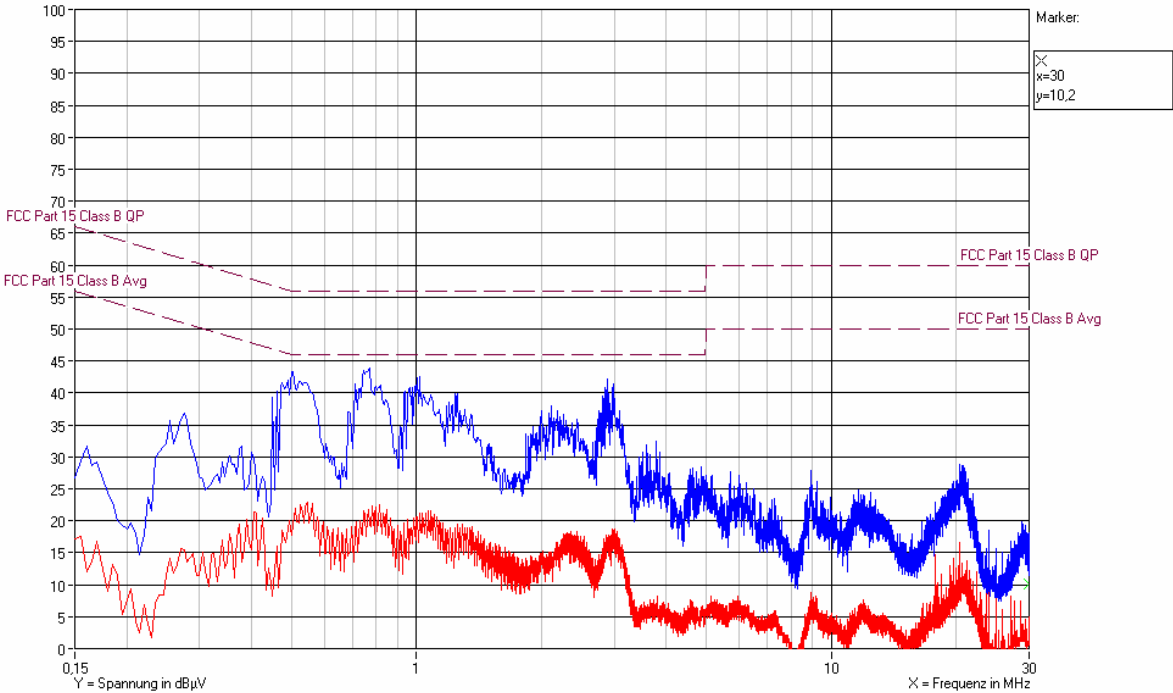

Measurement report 8: Line L1, Receive mode

7 Field strength limits (Fundamental + Harmonics)

- FCC Part 15.249 “Operation within the Band 2400 -2483.5 MHz”
- RSS-210, Issue 7 “Low Power Licence-Exempt Radio Communication Devices”

7.1 Regulation

(a) Except as provided in paragraph (b) of this section, the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:


Fundamental Frequency	Field Strength of Fundamental (millivolts/meter)	Field Strength of Harmonics (microvolts/meter)
902 - 928 MHz	50	500
2400 - 2483.5 MHz	50	500
5725 - 5875 MHz	50	500
24.0 - 24.25 GHz	250	2500

(c) Field strength limits are specified at a distance of 3 meters.

(d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.

(e) As shown in Section 15.35(b), for frequencies above 1000 MHz, the above field strength limits in paragraphs (a) and (b) of this section are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For point-to-point operation under paragraph (b) of this section, the peak field strength shall not exceed 2500 millivolts/meter at 3 meters along the antenna azimuth.


7.2 Bandedge emissions & Field strength emissions (Fundamental & Harmonics)

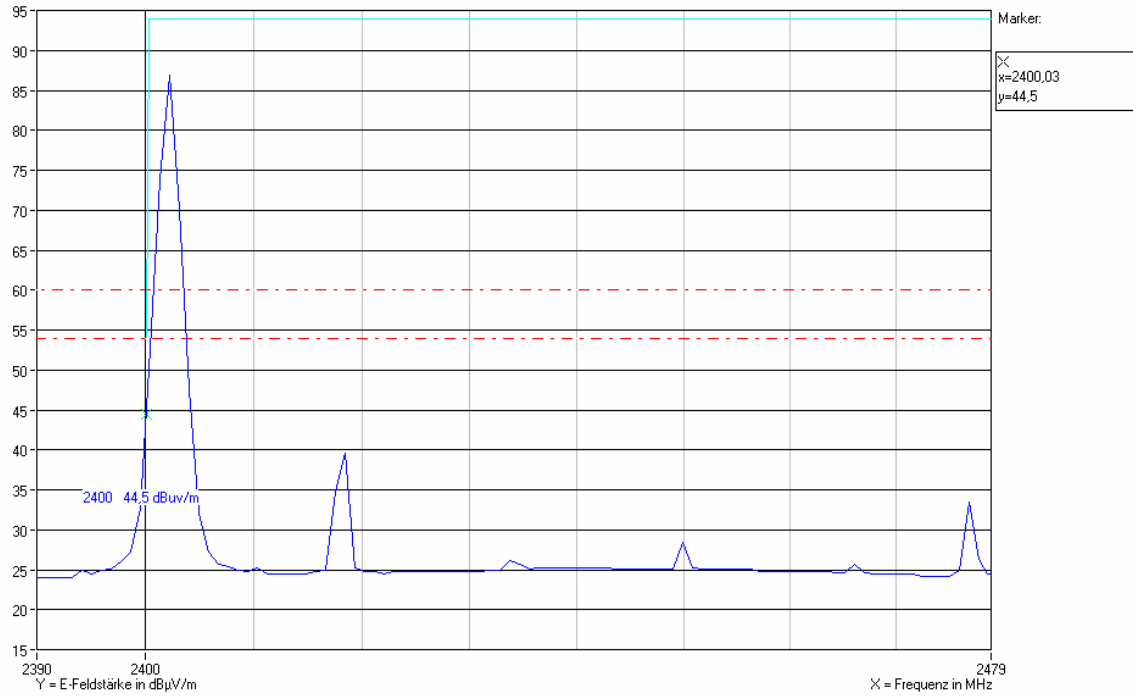

Measurement report 9:
2390 MHz – 2479

Horizontal + vertical (max. hold with Average detector); transmit mode
CH02

f MHz	Polar V/H	Height cm	Azimuth Deg	Receiver Reading	AF dB	Cabel loss dB	Amplifier Gain dB	Field strength dBuV/m	Limit dBmV/m	Margin dB
2400	V	100	35	35,9	29,4	2	22,8	44,5	54	9,5
2402,2	V	100	35	78,3	29,4	2	22,8	86,9	94	7,1

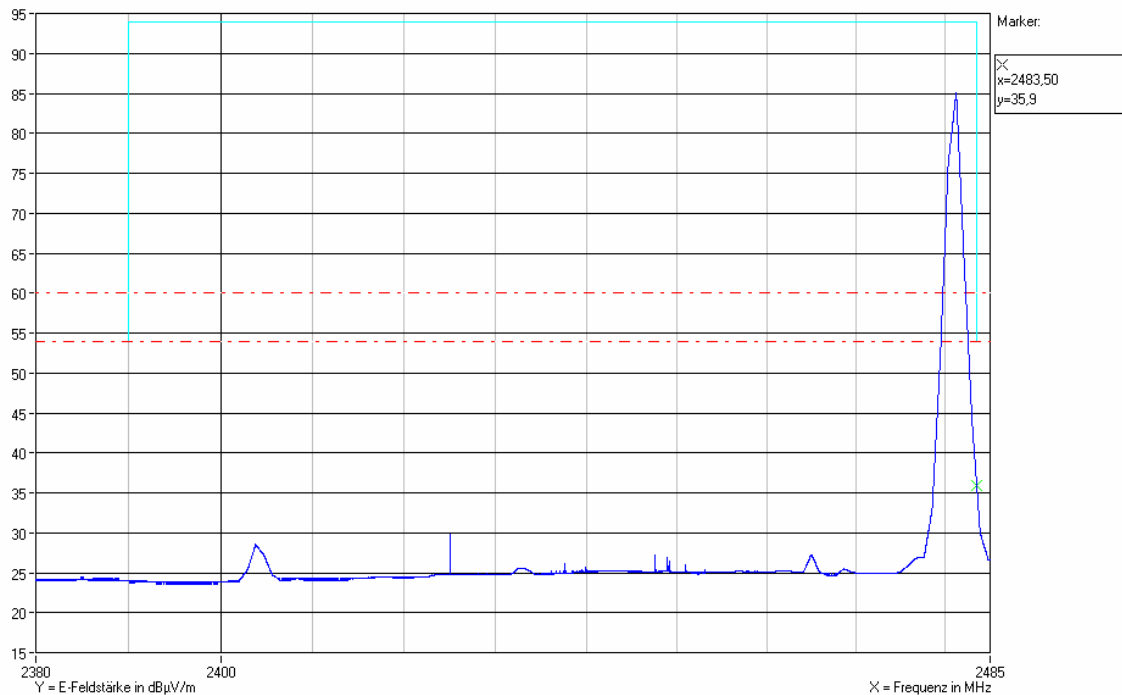

Measurement report 10: Horizontal + vertical (max. hold with Average detector); transmit mode
 2380 MHz – 2485 CH81

f MHz	Polar V/H	Heigth cm	Azimuth Deg	Receiver Reading	AF dB	Cabel loss dB	Amplifier Gain dB	Field strength dBuV/m	Limit dBmV/m	Margin dB
2481,060	H	114	46	53,4	29,5	-20,7	22,8	85	94,0	9
2483,5	H	114	46	27,1	29,5	2,1	22,8	35,9	54,0	19,9

8 99% Occupied Bandwidth RSS-Gen Section 4.6.1

8.1 Rule

When an occupied bandwidth value is not specified in the applicable RSS, the transmitted signal bandwidth to be reported is to be its 99% emission bandwidth, as calculated or measured. The transmitter shall be operated at its maximum carrier power measured under normal test conditions.


The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts. The resolution bandwidth shall be set to as close to 1% of the selected span as is possible without being below 1%. The video bandwidth shall be set to 3 times the resolution bandwidth. Video averaging is not permitted. Where practical, a sampling detector shall be used since a peak or, peak hold, may produce a wider bandwidth than actual.

The trace data points are recovered and are directly summed in linear terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached and that frequency recorded. The process is repeated for the highest frequency data points. This frequency is recorded.

The span between the two recorded frequencies is the occupied bandwidth.




8.2 Measurements

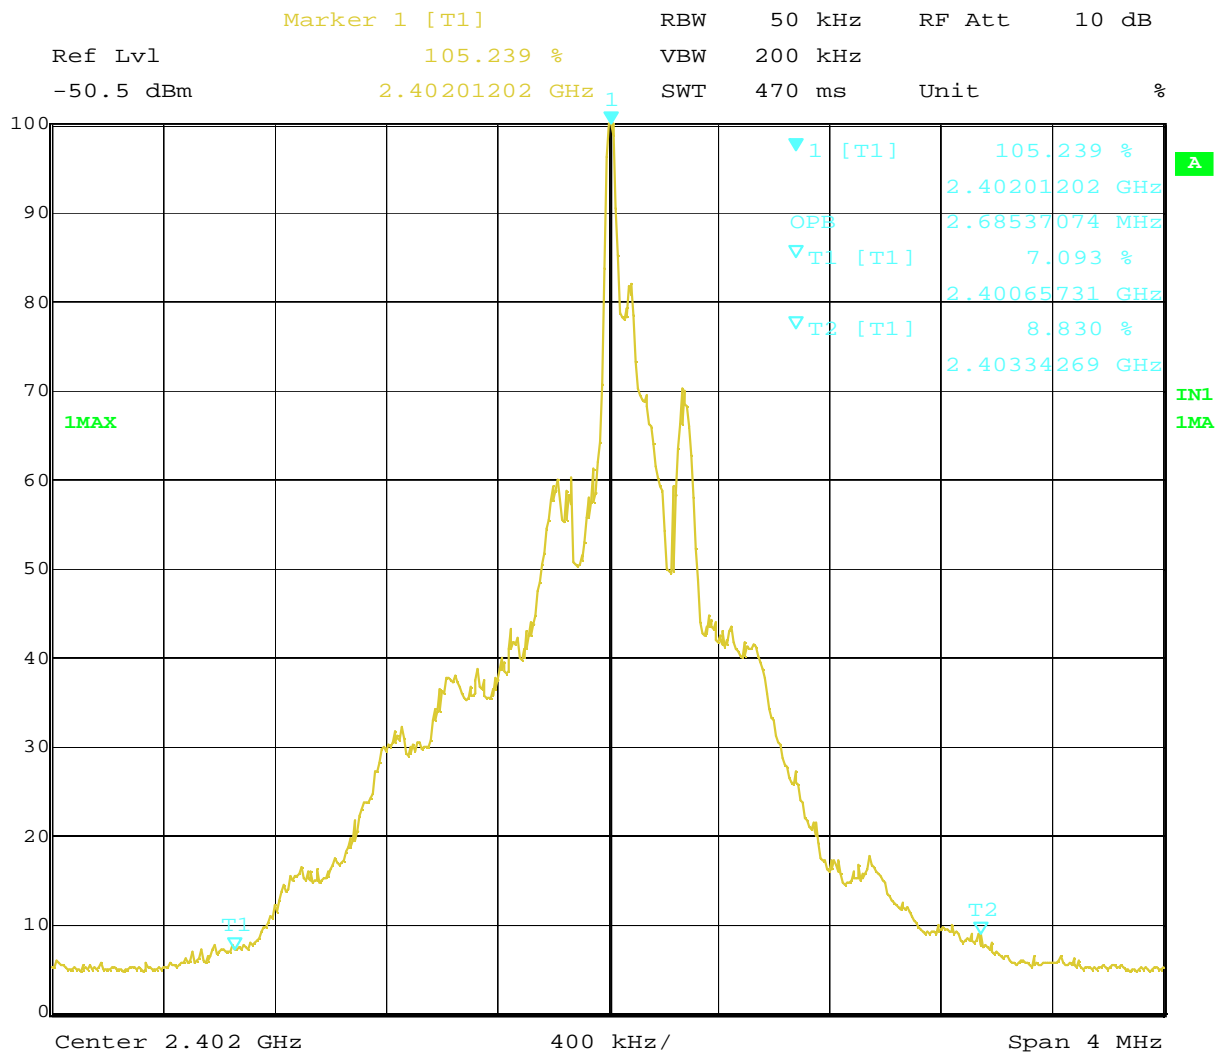


Date: 24.NOV.2008 17:49:23

CH02: 2,68 MHz

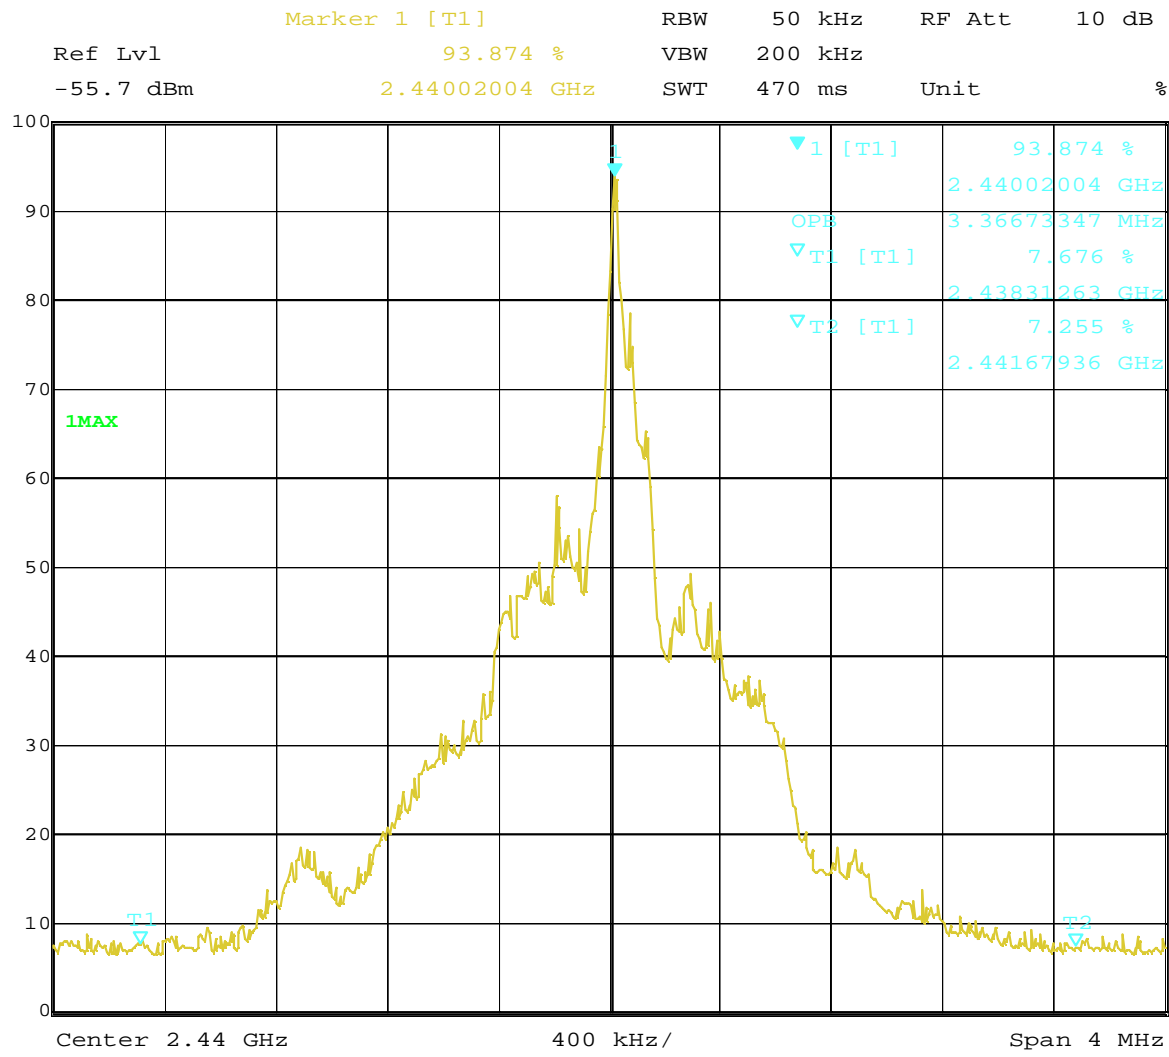

Date: 24.NOV.2008 18:13:39

CH40: 3,36 MHz

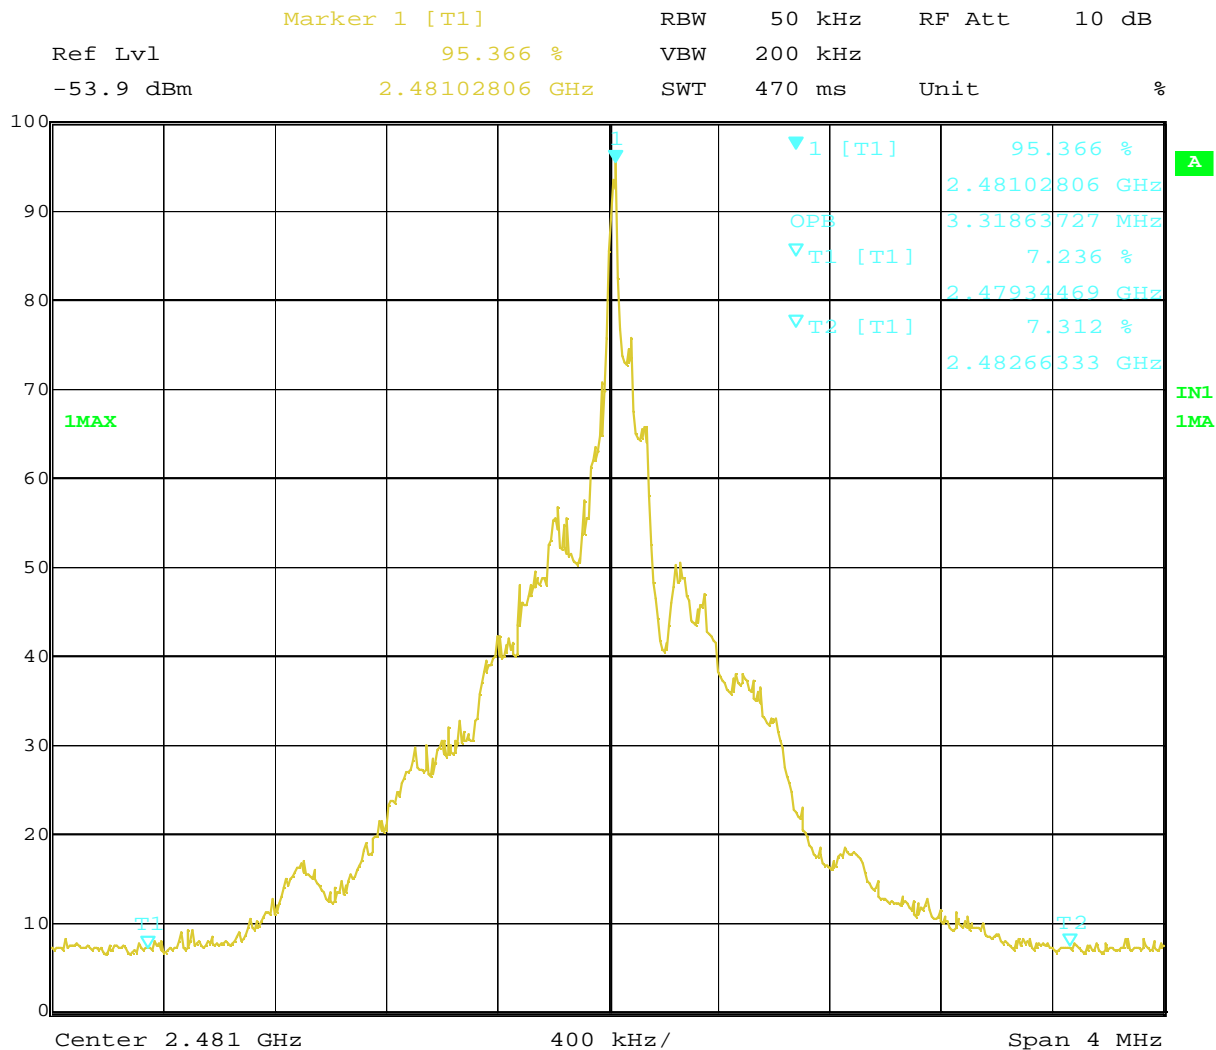

Date: 24.NOV.2008 18:21:26

CH81: 3,3 MHz

9 20 dB Bandwidth §15.215 (c)


9.1 Rule

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated. The requirement to contain the designated bandwidth of the emission within the specified frequency band includes the effects from frequency sweeping, frequency hopping and other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage. If a frequency stability is not specified in the regulations, it is recommended that the fundamental emission be kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation.



9.2 Measurements

Marker 1 [T1] RBW 50 kHz RF Att 10 dB
 Ref Lvl -70.56 dBm VBW 200 kHz
 -50.5 dBm 2.40076954 GHz SWT 470 ms Unit dB

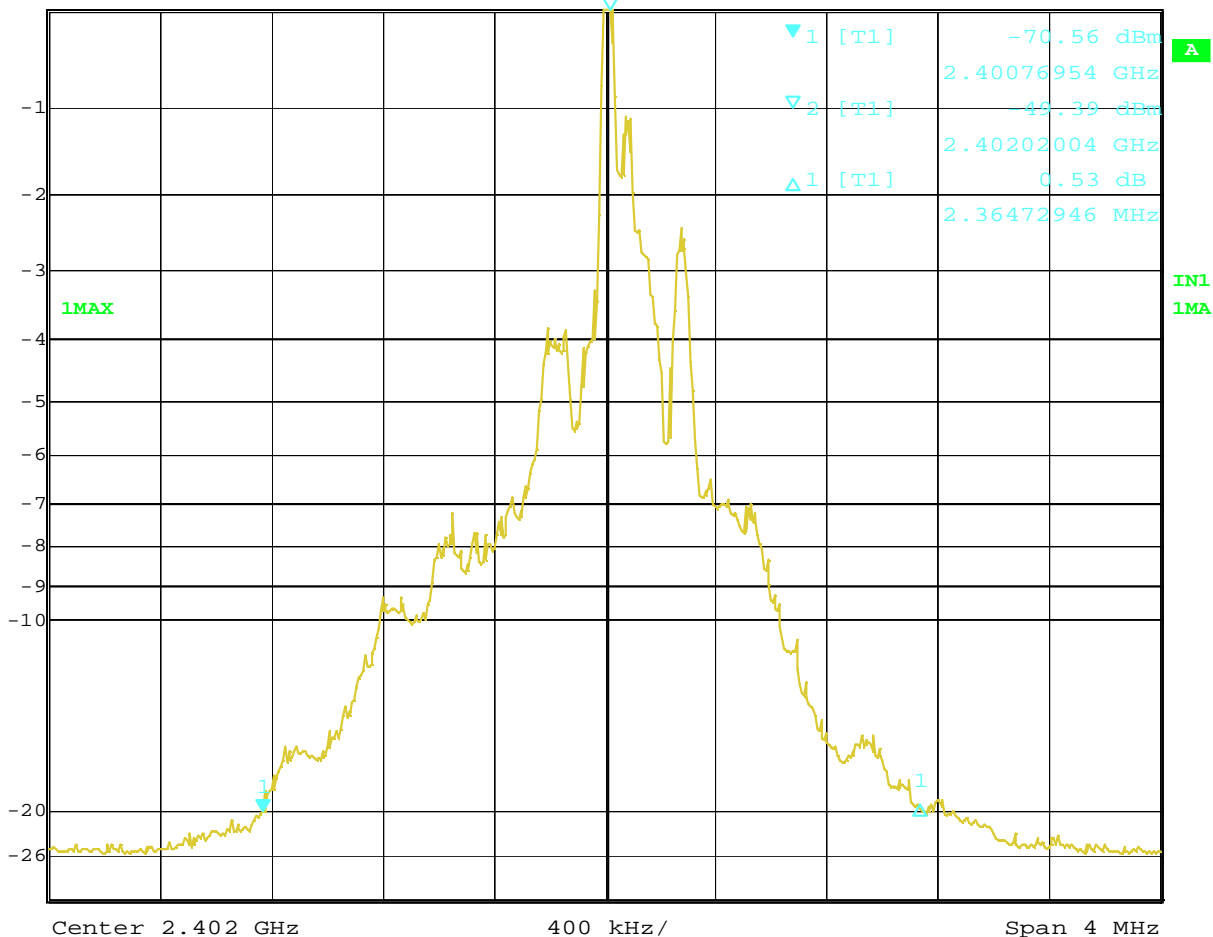


Date: 24.NOV.2008 17:59:38

CH02: 2,36 MHz




Delta 1 [T1] RBW 50 kHz RF Att 10 dB
 Ref Lvl -0.51 dB VBW 200 kHz
 -55.7 dBm 2.53306613 MHz SWT 470 ms Unit dB

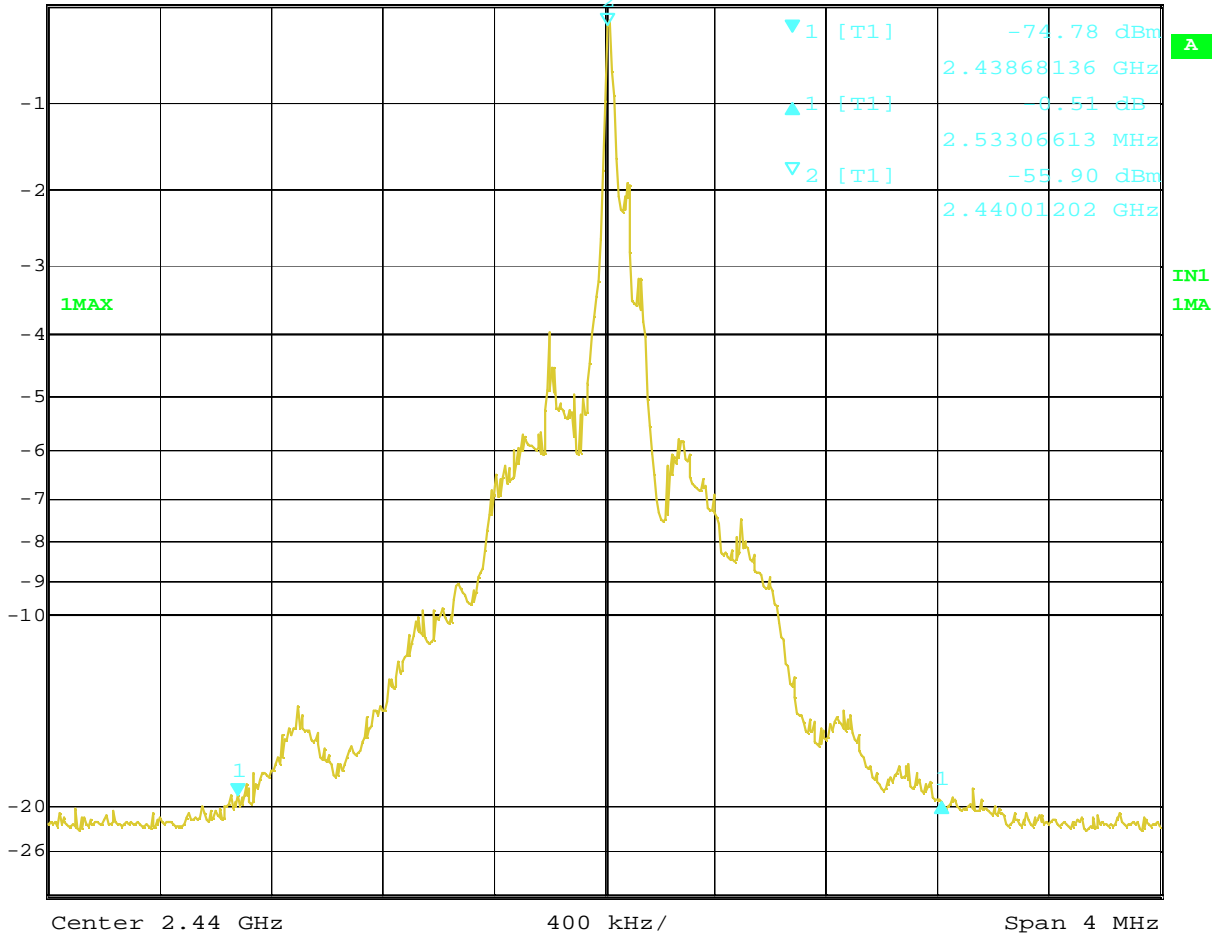



Delta 1 [T1] RBW 50 kHz RF Att 10 dB
 Ref Lvl -18.49 dB VBW 200 kHz
 -53.9 dBm 1.17034068 MHz SWT 470 ms Unit dB

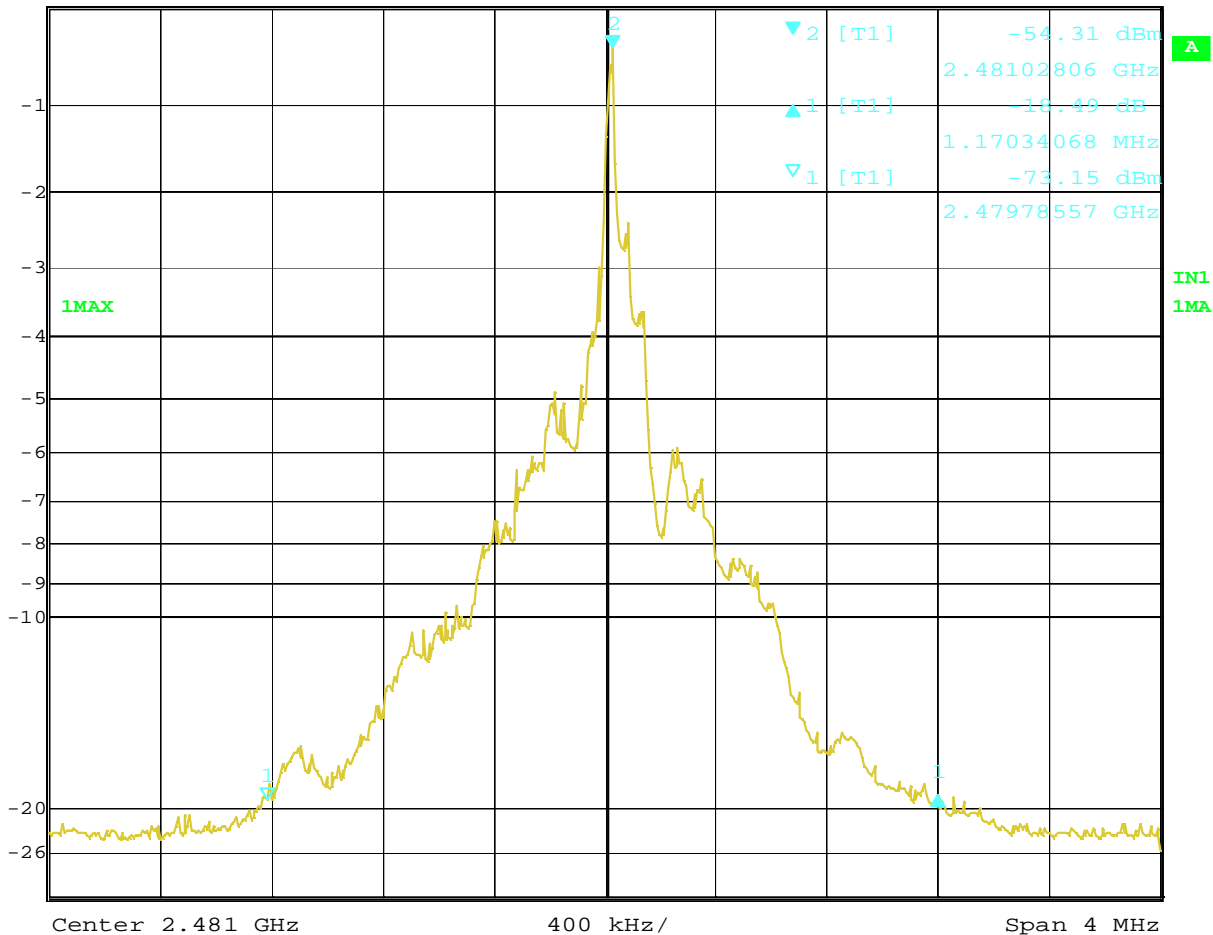

Date: 24.NOV.2008 18:20:23

CH81: 2,4 MHz

10 Accreditation certificate

DATech Deutsche Akkreditierungsstelle Technik GmbH
Unterzeichner der Multilateralen Abkommen von EA und ILAC zur
gegenseitigen Anerkennung

vertreten im

Deutschen AkkreditierungsRat



Akkreditierung

Die DATech Deutsche Akkreditierungsstelle Technik GmbH bestätigt hiermit, dass das
Prüflaboratorium

**HERBERG
Service Plus GmbH
European Compliance Laboratory (ECL)
Nordostpark 51**

D-90411 Nürnberg

die Kompetenz nach DIN EN ISO/IEC 17025 besitzt, Prüfungen in den Bereichen

**Elektromagnetische Verträglichkeit und Mobilfunk,
Sicherheit elektrischer Betriebsmittel, Umweltsimulation,
Telekommunikationsschnittstelle**


nach den in der Anlage aufgeführten Normen und Spezifikationen auszuführen.

Die Akkreditierung ist gültig bis: **07.02.2012**

Die Anlage ist Bestandteil der Urkunde und besteht aus **18** Seiten.

DAR-Registriernummer: **DAT-P-231/92-04**

Frankfurt/Main, 08.02.2007


i.V. Dipl.-Ing. (FH) R. Eger
Leiter der Akkreditierungsstelle

Mitglied in EA, ILAC, IAF

Siehe Hinweise auf der Rückseite



End of the test report