



**Application
For**

**Part 2, Subpart J, Paragraph 2.907 Equipment Authorization of Certification for an
Intentional Radiator per Part 15, Subpart C, paragraphs 15.207, 15.209 and 15.247**

And

**Innovation, Science, and Economic Development Canada
Certification Per
IC RSS-Gen General Requirements for Radio Apparatus
And
RSS-247 Digital Transmission Systems (DTSS), Frequency Hopping Systems
(FHSs) and License-Exempt Local Area Network (LE-LAN) Devices**

For the

**PakSense, Inc.
AutoSense II
Model Number: PSASII-03**

**FCC ID: WPEPSASII-03
IC: 8031A-PSASII03**

**UST Project: 19-0415
Issue Date: December 10, 2019**

Total Pages: 48

**3505 Francis Circle Alpharetta, GA 30004
PH: 770-740-0717 Fax: 770-740-1508
www.ustech-lab.com**



I certify that I am authorized to sign for the Test Agency and that all of the statements in this report and in the Exhibits attached hereto are true and correct to the best of my knowledge and belief:

US TECH (Agent Responsible For Test):

By: Alan Ghasiani

Name: Alan Ghasiani

Title: Compliance Engineer – President

Date: December 10, 2019



NVLAP LAB CODE 200162-0

This report shall not be reproduced except in full. This report may be copied in part only with the prior written approval of US Tech. The results contained in this report are subject to the adequacy and representative character of the sample provided. This report must not be used to claim product certification, approval, or endorsement by NVLAP, NIST or any agency of the Federal Government.

3505 Francis Circle Alpharetta, GA 30004
PH : 770-740-0717 Fax : 770-740-1508
www.ustech-lab.com

US Tech Test Report:
FCC ID:
IC:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15/IC RSS Certification
WPEPSASII-03
8031A-PSASII03
19-0415
December 10, 2019
PakSense, Inc.
PSASII-03

MEASUREMENT TECHNICAL REPORT

COMPANY NAME: PakSense, Inc.
MODEL: PSASII-03
FCC ID: WPEPSASII-03
IC: 8031A-PSASII03
DATE: December 10, 2019

This report concerns (check one): Original grant ☒
Class II change

Equipment type: 900 MHz Transmitter Module

Deferred grant requested per 47 CFR 0.457(d)(1)(ii)? Yes _____ No X

If yes, defer until: N/A
date

agrees to notify the Commission by N/A
date

of the intended date of announcement of the product so that the grant can be issued on that date.

Report prepared by:

US Tech
3505 Francis Circle
Alpharetta, GA 30004

Phone Number: (770) 740-0717
Fax Number: (770) 740-1508

Table of Contents

<u>Paragraph</u>	<u>Title</u>	<u>Page</u>
1	General Information	7
1.1	Purpose of this Report	7
1.2	Characterization of Test Sample.....	7
1.3	Product Description	7
1.4	Configuration of Tested System.....	8
1.5	Test Facility.....	8
1.6	Related Submittal(s)/Grant(s)	8
2	Tests and Measurements.....	10
2.1	Test Equipment.....	10
2.2	Modifications to EUT Hardware	10
2.3	Number of Measurements for Intentional Radiators (CFR 15.31(m), RSS-Gen 6.8)	11
2.4	Frequency Range of Radiated Measurements (CFR 15.33, RSS-Gen 6.13)	11
2.4.1	Intentional Radiator.....	11
2.4.2	Unintentional Radiator	11
2.5	Measurement Detector Function and Bandwidth (CFR 15.35, RSS-Gen 6.9, 6.13)	12
2.5.1	Detector Function and Associated Bandwidth	12
2.5.2	Corresponding Peak and Average Requirements.....	12
2.5.3	Pulsed Transmitter Averaging.....	12
2.6	Transmitter Duty Cycle (Part 15.35 (c), RSS-Gen 6.10)	12
2.7	Restricted Bands of Operation (Part 15.205, RSS-Gen 8.10).....	15
2.8	EUT Antenna Requirements (CFR 15.203, RSS-Gen 6.7)	15
2.9	Maximum Peak Conducted Output Power (CFR 15.247(b)(3), RSS-247 (5.4(d)))	16
2.10	Power Spectral Density (CFR 15.247(e), RSS-247 (5.2(b)))	20
2.11	Antenna Conducted Intentional and Spurious Emissions (CFR 15.209, 15.247(d)) (RSS-247 (5.5), RSS-Gen 8.9)	21
2.12	Intentional Radiator, Radiated Emissions (CFR 15.209, 15.247(d), RSS-247 (5.2),(5.5))	28
2.13	Band Edge Measurements – (CFR 15.247(d), RSS-Gen 8.10).....	31
2.14	Six (6) dB Bandwidth (CFR 15.247(a)(2), RSS-247 (5.2(a)))	34
2.15	99% Occupied Bandwidth (RSS-GEN (6.6)).....	38
2.16	Unintentional Radiator and Intentional Radiator Power Lines Conducted Emissions (CFR 15.107, 15.207, RSS-Gen 8.8)	42

US Tech Test Report:
FCC ID:
IC:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15/IC RSS Certification
WPEPSASII-03
8031A-PSASII03
19-0415
December 10, 2019
PakSense, Inc.
PSASII-03

2.17	Unintentional Radiator and Intentional Radiator, Radiated Emissions (CFR 15.109, 15.209, RSS-Gen 8.9)	44
2.18	Measurement Uncertainty	48
2.18.1	Conducted Emissions Measurement Uncertainty	48
2.18.2	Radiated Emissions Measurement Uncertainty	48
3	Test Results	48

List of Figures

<u>Figures</u>	<u>Title</u>	<u>Page</u>
Figure 1.	Block Diagram of Test Configuration	9
Figure 2.	Duty Cycle On Time.....	13
Figure 3.	Duty Cycle Off Time.....	14
Figure 4.	Output Power, Low Channel.....	17
Figure 5.	Output Power, Mid Channel.....	18
Figure 6.	Output Power, High Channel	19
Figure 7.	Conducted Spurious Emissions – Low Channel, 30 MHz – 1000 MHz.....	22
Figure 8.	Conducted Spurious Emissions – Low Channel, 1000 MHz - 9027 MHz ..	23
Figure 9.	Conducted Spurious Emissions – Mid Channel, 30 MHz - 1000 MHz	24
Figure 10.	Conducted Spurious Emissions – Mid Channel, 1000 MHz - 9152 MHz ..	25
Figure 11.	Conducted Spurious Emissions – High Channel, 30 MHz – 1000 MHz ..	26
Figure 12.	Conducted Spurious Emissions–High Channel, 1000 MHz – 9277 MHz ..	27
Figure 13.	Band Edge Compliance – Low Channel Delta - Peak.....	32
Figure 14.	Band Edge Compliance – High Channel Delta - Peak.....	33
Figure 15.	6 dB Bandwidth Low Channel.....	35
Figure 16.	6 dB Bandwidth Mid Channel.....	36
Figure 17.	6 dB Bandwidth High Channel	37
Figure 18.	99% Occupied Bandwidth - Low Channel.....	39
Figure 19.	99% Occupied Bandwidth - Mid Channel.....	40
Figure 20.	99% Occupied Bandwidth - High Channel.....	41

US Tech Test Report:
FCC ID:
IC:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15/IC RSS Certification
WPEPSASII-03
8031A-PSASII03
19-0415
December 10, 2019
PakSense, Inc.
PSASII-03

List of Tables

<u>Table</u>	<u>Title</u>	<u>Page</u>
Table 1.	EUT and Peripherals.....	9
Table 2.	Test Instruments	10
Table 3.	Number of Test Frequencies for Intentional Radiators.....	11
Table 4.	Peak Antenna Conducted Output Power per Part 15.247 (b)(3)	16
Table 5.	Peak Power Spectral Density.....	20
Table 6.	Peak Radiated Fundamental & Harmonic Emissions.....	29
Table 7.	Average Radiated Fundamental & Harmonic Emissions	30
Table 8.	Six (6) dB Bandwidth	34
Table 9.	99% Occupied Bandwidth.....	38
Table 10.	Transmitter Power Line Conducted Emissions Test Data, Part 15.207 ...	43
Table 11.	Spurious Radiated Emissions (9 kHz – 30 MHz)	45
Table 12.	Spurious Radiated Emissions (30 MHz – 1 GHz)	46
Table 13.	Spurious Radiated Emissions (1 GHz – 10 GHz).....	47

List of Attachments

FCC Agency Agreement	External Photos
Application Forms	FCC to IC Cross Reference
Letter of Confidentiality	Equipment Label(s) Block
Diagram(s)	IC Agency Agreement
Schematic(s)	Canadian Rep Letter
Test Configuration Photographs	
Internal Photographs	
Theory of Operation	
RF Exposure	
User's Manual	

US Tech Test Report:
FCC ID:
IC:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15/IC RSS Certification
WPEPSASII-03
8031A-PSASII03
19-0415
December 10, 2019
PakSense, Inc.
PSASII-03

1 General Information

1.1 Purpose of this Report

This report is prepared as a means of conveying test results and information concerning the suitability of this exact product for public distribution according to IC RSS-247 and FCC Rules and Regulations Part 15, Section 247.

1.2 Characterization of Test Sample

The sample used for testing was received by US Tech on October 9, 2019 in good operating condition.

1.3 Product Description

The Equipment under Test (EUT) is the PakSense, Inc. AutoSense II, Model PSASII-03. The EUT is a 900 MHz band radio transceiver used to communicate with other PakSense products. This product may be sold with the following options:

1. PSASII-03 with 900 MHz Reader (CGTX) radio module and WiFi module (FCC ID: NCMOCG2101; IC: 2734A-CG2101)
2. PSASII-03 with 900 MHz Reader (CGTX) radio module and cellular module (FCC ID: XMR201903EG25G; IC: 10224A-201903EG25G)
3. PSASII-03 with 900 MHz Reader (CGTX) radio module with both WiFi module and cellular module (FCC ID: NCMOCG2101; IC: 2734A-CG2101 and FCC ID: XMR201903EG25G; IC: 10224A-201903EG25G)

The WiFi and cellular modules have been previously approved as noted with the FCC ID and IC IDs above.

The EUT is declared to be a 902-928 MHz band radio, using FSK modulation with an output power setting of +3 dBm.

The EUT has been tested in the configuration which incorporates all three modules and had all three modules exercising during testing to ensure compliance as a co-located radio product.

1.4 Configuration of Tested System

The Test Sample was tested per *ANSI C63.10:2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices* for the intentional radiator aspect of the device and *ANSI C63.4:2014, Methods of Measurement of Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz (2014)* for the unintentional radiator aspect of the device as well as FCC subpart B and Cof Part 15 and per FCC KDB Publication number 558074 v05r02 for Digital Transmission Systems Operating Under section 15.247.

Digital, RF conducted and radiated verification emissions data (FCC 15.107 and 109) below 1 GHz were taken with the measuring receiver (or spectrum analyzer's) resolution bandwidth adjusted to 9 kHz and 120 kHz, respectively. All measurements performed above 1 GHz were made with a RBW of 1 MHz. All measurements are peak unless stated otherwise. The video filter associated with the spectrum analyzer was set to 3 times the RBW or as required per the standard throughout the evaluation process.

A list of EUT and Peripherals is found in Table 1 following. A block diagram of the tested system is shown in Figure 1. Test configuration photographs for spurious and fundamental emissions are provided in separate Appendices.

1.5 Test Facility

Testing was performed at US Tech's measurement facility at 3505 Francis Circle, Alpharetta, GA 30004. This site has been fully described and registered with the FCC. Its designation number is 186022. Additionally, this site has also been fully described and submitted to Industry Canada (IC), and has been approved under file number 9900A-1.

1.6 Related Submittal(s)/Grant(s)

The EUT is subject to the following FCC Equipment Authorizations:

- a) Certification of the transmitter incorporated within the EUT; see test data presented herein.
- b) Verification as a digital device under Part 15 Subpart B.

US Tech Test Report:
FCC ID:
IC:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15/IC RSS Certification
WPEPSASII-03
8031A-PSASII03
19-0415
December 10, 2019
PakSense, Inc.
PSASII-03

Table 1. EUT and Peripherals

EUT MANUFACTURER	MODEL NUMBER	SERIAL NUMBER	FCC/IC ID	CABLES P/D
EUT PakSense, Inc.	PSASII-03	Engineering Sample	FCC ID: WPEPSASII-03 IC: 8031A-PSASII03	P
PERIPHERAL MANUFACTURER	MODEL NUMBER	SERIAL NUMBER	FCC/IC ID	CABLES P/D
Power Adapter CUI Inc.	EMSA120150	N/A	N/A	N/A

S= Shielded, U= Unshielded, P= Power, D= Data

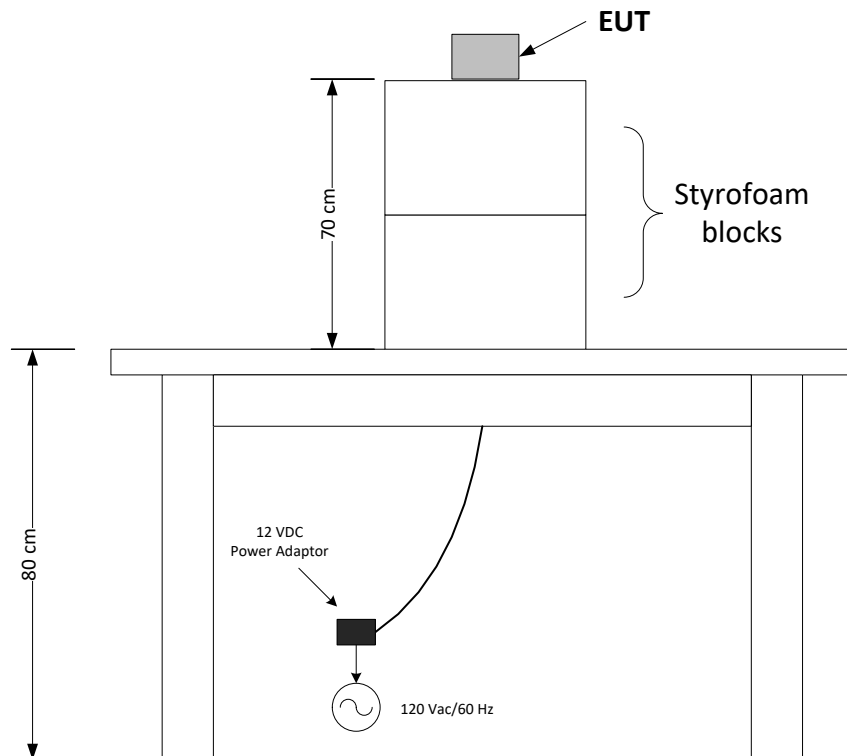


Figure 1. Block Diagram of Test Configuration

US Tech Test Report:
FCC ID:
IC:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15/IC RSS Certification
WPEPSASII-03
8031A-PSASII03
19-0415
December 10, 2019
PakSense, Inc.
PSASII-03

2 Tests and Measurements

2.1 Test Equipment

The table below lists test equipment used to evaluate this product.

Table 2. Test Instruments

TEST INSTRUMENT	MODEL NUMBER	MANUFACTURER	SERIAL NUMBER	CALIBRATION DUE DATE
SPECTRUM ANALYZER	E4407B	AGILENT	US41442935	8/17/2020
RF PREAMP 100 kHz to 1.3 GHz	8447D	HEWLETT-PACKARD	1937A02980	5/7/2020
PREAMP 1.0 GHz to 26.0 GHz	8449B	HEWLETT-PACKARD	3008A00480	4/8/2020
LOOP ANTENNA	SAS-200/562	A. H. Systems	142	1/22/2020 2 yr
BICONICAL ANTENNA	3110B	EMCO	9307-1431	01/23/2020 2yr Extended
LOG PERIODIC ANTENNA	3146	EMCO	9305-3600	2/1/2021 2 yr
HORN ANTENNA	3115	EMCO	9107-3723	11/28/2020 2 yr
HIGH PASS FILTER	VHF-1320 15542	MICROWAVE CIRCUITS	30843	04/02/2020

Note: The calibration interval of the above test instruments are 12 months unless stated otherwise and all calibrations are traceable to NIST/USA.

2.2 Modifications to EUT Hardware

No modifications were made by US Tech to bring the EUT into compliance with FCC Part 15.247 or IC RSS-210 requirements.

2.3 Number of Measurements for Intentional Radiators (CFR 15.31(m), RSS-Gen 6.8)

Measurements of intentional radiators or receivers shall be performed and reported for each band in which the device can be operated, with the device operating at the number of frequencies in each band specified in Table 3 as follows:

Table 3. Number of Test Frequencies for Intentional Radiators

Frequency Range over which the device operates	Number of Frequencies	Location in the Range of operation
1 MHz or less	1	Middle
1 to 10 MHz	2	1 near the top 1 near the bottom
Greater than 10 MHz	3	1 near top 1 near middle 1 near bottom

Because the EUT operates over 902.75 MHz to 927.25 MHz, 3 test frequencies will be used.

2.4 Frequency Range of Radiated Measurements (CFR 15.33, RSS-Gen 6.13)

2.4.1 Intentional Radiator

The spectrum shall be investigated for the intentional radiator from the lowest RF signal generated in the EUT, without going below 9 kHz to the 10th harmonic of the highest fundamental frequency generated or 40 GHz, whichever is the lowest.

2.4.2 Unintentional Radiator

For the digital device, an unintentional radiator, the frequency range shall be 30 MHz to 1000 MHz, or to the range specified in 2.4.1 above, whichever is the higher range of investigation.

2.5 Measurement Detector Function and Bandwidth (CFR 15.35, RSS-Gen 6.9, 6.13)

The radiated and conducted emissions limits shown herein are based on the parameters listed following.

2.5.1 Detector Function and Associated Bandwidth

On frequencies below 1000 MHz, the limits herein are based upon measurement equipment employing a CISPR Quasi-peak detector function and related measurement bandwidths (i.e. 9 kHz from 150 kHz to 30 MHz and 120 kHz from 30 MHz to 1000 MHz). Alternatively, measurements may be made with equipment employing a peak detector function as long as the same bandwidths specified for the Quasi-peak device are used.

2.5.2 Corresponding Peak and Average Requirements

Above 1000 MHz, radiated limits are based on measuring instrumentation employing an average detector function. When average radiated emissions are specified there is also a corresponding Peak requirement, as measured using a peak detector, of 20 dB greater than the average limit. For all measurements above 1000 MHz the Resolution Bandwidth shall be at least 1 MHz.

2.5.3 Pulsed Transmitter Averaging

When the radiated emissions limit is expressed as an average value, and the transmitter is pulsed, the measured field strength shall be determined by applying a Duty Cycle Correction Factor based upon dividing the total ON time during the first 100 ms period by 100 ms (or by the period if less than 100 ms). The duty cycle may also be expressed logarithmically in dB.

2.6 Transmitter Duty Cycle (Part 15.35 (c), RSS-Gen 6.10)

The EUT employs pulse transmission however for testing purpose the EUT was programmed to transmit at a rate >98%. The pulse transmission requirements of this subpart were acknowledge and considered during testing.

When the radiated emissions limit is expressed as an average value, and the transmitter is pulsed, the measured field strength shall be determined by applying a Duty Cycle Correction Factor based upon dividing the total ON time during the first 100 ms period by 100 ms (or by the period if less than 100 ms). The duty cycle may also be expressed logarithmically in dB.

US Tech Test Report:
FCC ID:
IC:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15/IC RSS Certification
WPEPSASII-03
8031A-PSASII03
19-0415
December 10, 2019
PakSense, Inc.
PSASII-03

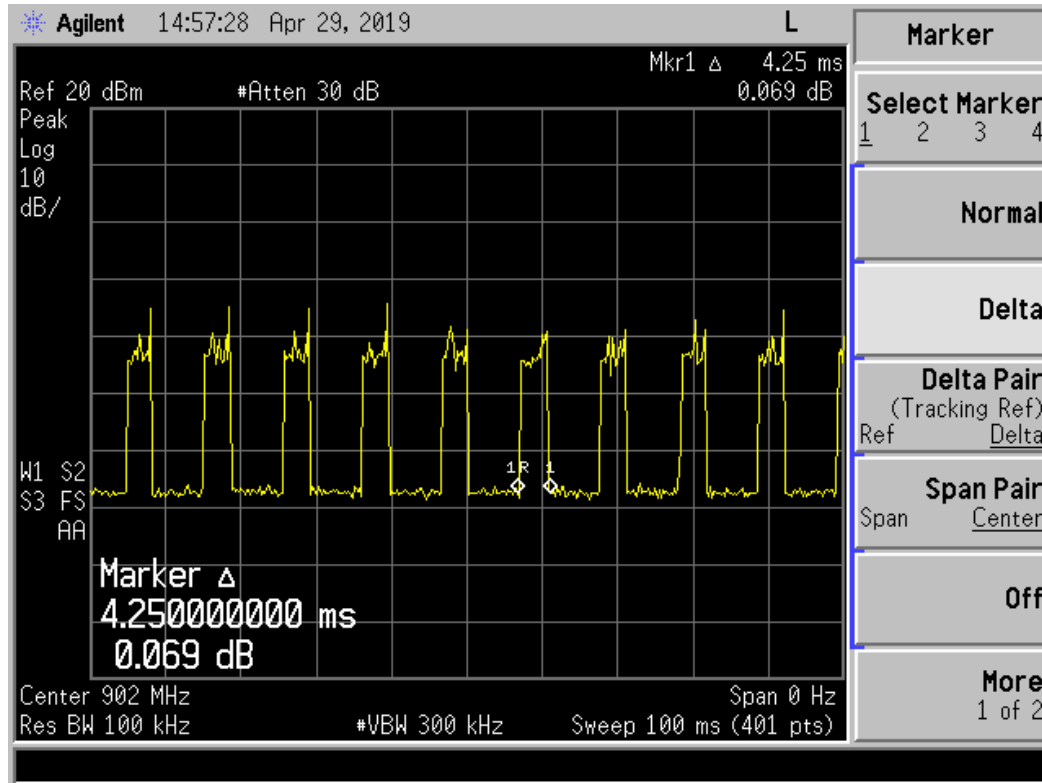


Figure 2. Duty Cycle On Time

US Tech Test Report:
FCC ID:
IC:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15/IC RSS Certification
WPEPSASII-03
8031A-PSASII03
19-0415
December 10, 2019
PakSense, Inc.
PSASII-03

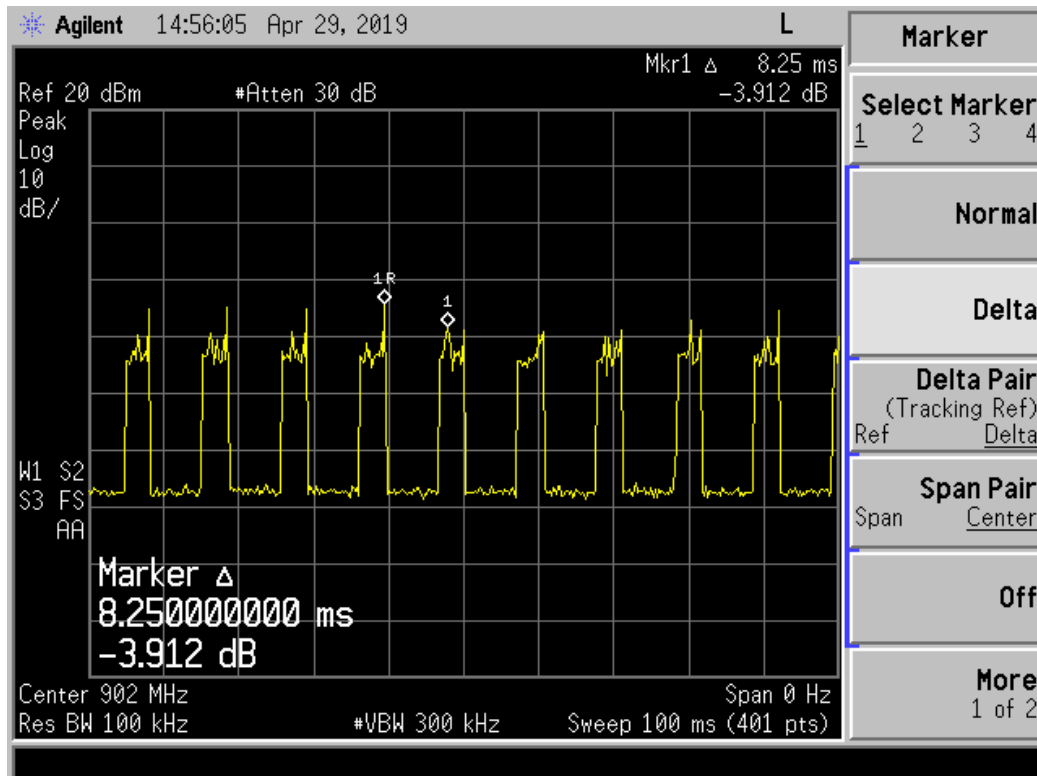


Figure 3. Duty Cycle Off Time

The duty cycle de-rating factor used in the calculation of average radiated limits per CFR 15.35(c) is described below. This factor was calculated by first determining the worst case scenario for system operation. With the worst case operating scenario the transmission duty cycle is calculated as:

4.25 mSec = ON time (Figure 2 above)
8.25 mSec = OFF time (Figure 3 above)

Duty Cycle Factor= ON time / (ON time+OFF time) = X
20 Log (X) = DC factor

4.25 mSec/ (12.5 mSec) = 0.34 or 34%
20 log (.34) = -9.37 dB = DC factor

US Tech Test Report:
FCC ID:
IC:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15/IC RSS Certification
WPEPSASII-03
8031A-PSASII03
19-0415
December 10, 2019
PakSense, Inc.
PSASII-03

2.7 Restricted Bands of Operation (Part 15.205, RSS-Gen 8.10)

Only spurious emissions can fall in the frequency bands of CFR 15.205. The field strength of these emissions cannot exceed the limits of 15.209. Radiated harmonics and other spurious emissions are examined for this requirement see paragraph 2.10.

2.8 EUT Antenna Requirements (CFR 15.203, RSS-Gen 6.7)

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

The EUT is designed for use with an omni directional dipole antenna. The antenna gain is 2.0 dBi.

US Tech Test Report:
FCC ID:
IC:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15/IC RSS Certification
WPEPSASII-03
8031A-PSASII03
19-0415
December 10, 2019
PakSense, Inc.
PSASII-03

2.9 Maximum Peak Conducted Output Power (CFR 15.247(b)(3), RSS-247 (5.4(d)))

The EUT was programmed to operate at a normal operating output power across the bandwidth. For this test the normal operating output power of the radio was set to +3 dBm by default via the pre-loaded test firmware.

Peak power within the band 902.75 MHz to 927.25 MHz was measured per FCC KDB Publication 558074v05r02. Antenna-port conducted test was performed.


Table 4. Peak Antenna Conducted Output Power per Part 15.247 (b)(3)

Frequency of Fundamental (MHz)	P _{Cond} (dBm)	P _{Cond} (mW)	FCC Limit (mW Maximum)
902.75	2.393	1.735	1000
915.25	2.397	1.737	1000
927.25	1.957	1.569	1000

Test Date: November 7, 2019

Tested By

Signature:

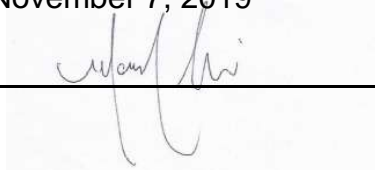

Name: Mark Afroozi

US Tech Test Report:
FCC ID:
IC:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15/IC RSS Certification
WPEPSASII-03
8031A-PSASII03
19-0415
December 10, 2019
PakSense, Inc.
PSASII-03

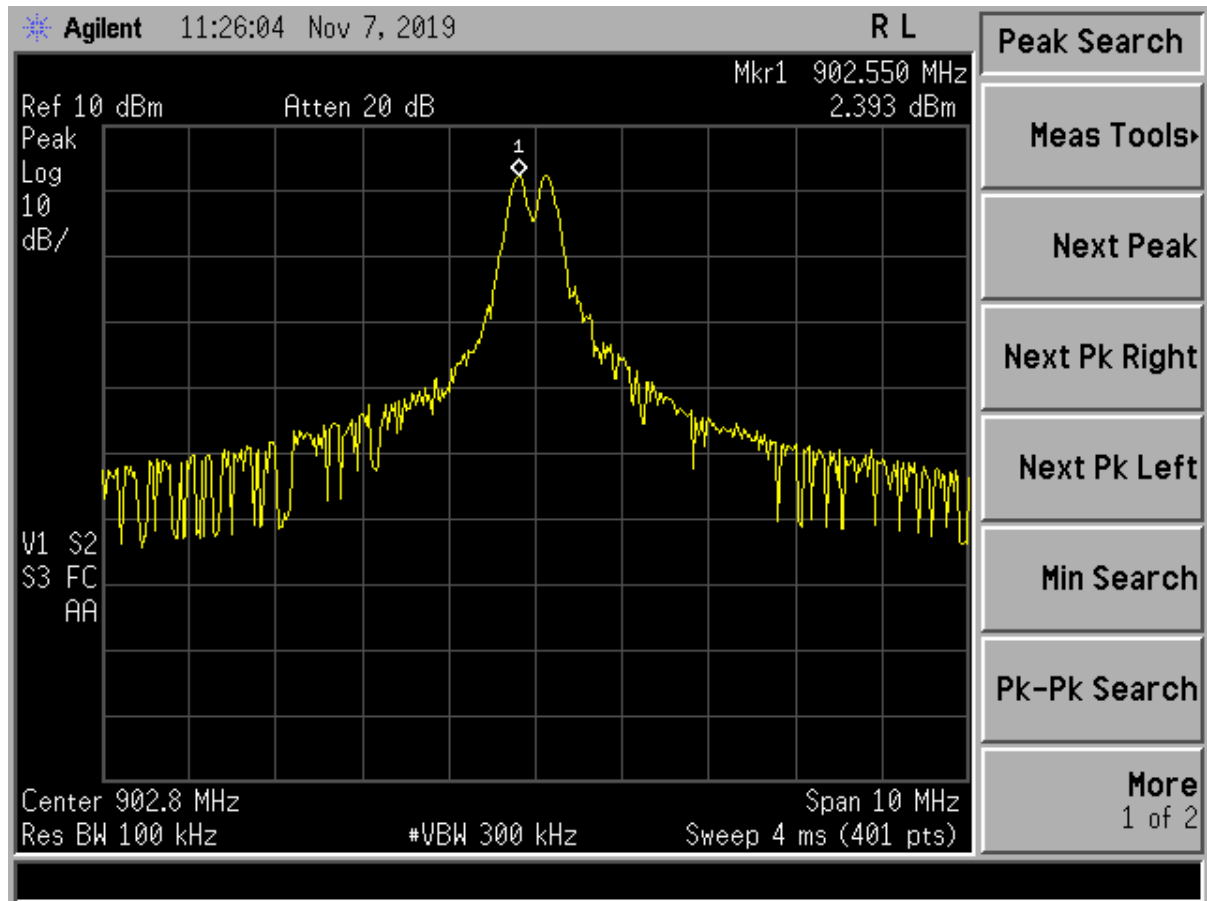


Figure 4. Output Power, Low Channel

US Tech Test Report:
FCC ID:
IC:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15/IC RSS Certification
WPEPSASII-03
8031A-PSASII03
19-0415
December 10, 2019
PakSense, Inc.
PSASII-03

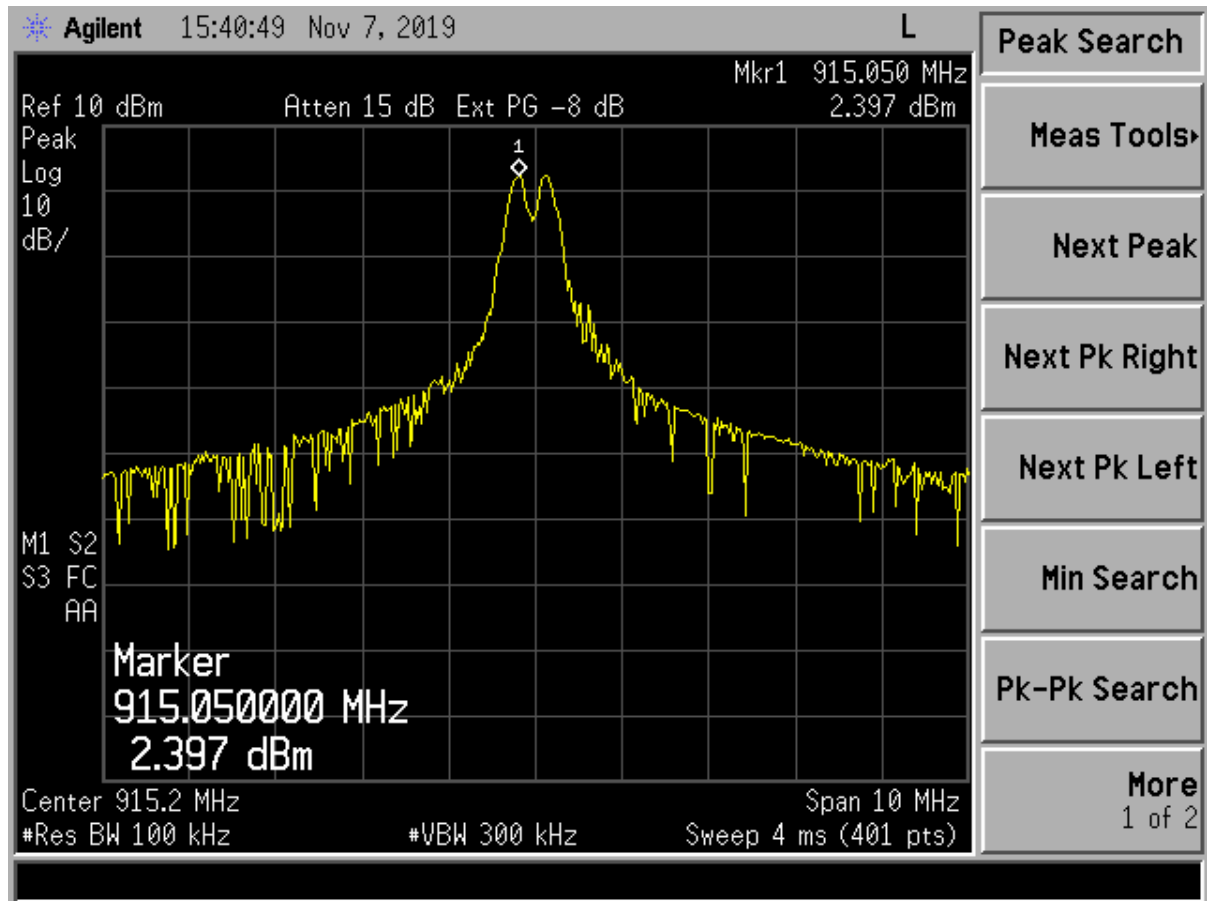


Figure 5. Output Power, Mid Channel

US Tech Test Report:
FCC ID:
IC:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15/IC RSS Certification
WPEPSASII-03
8031A-PSASII03
19-0415
December 10, 2019
PakSense, Inc.
PSASII-03

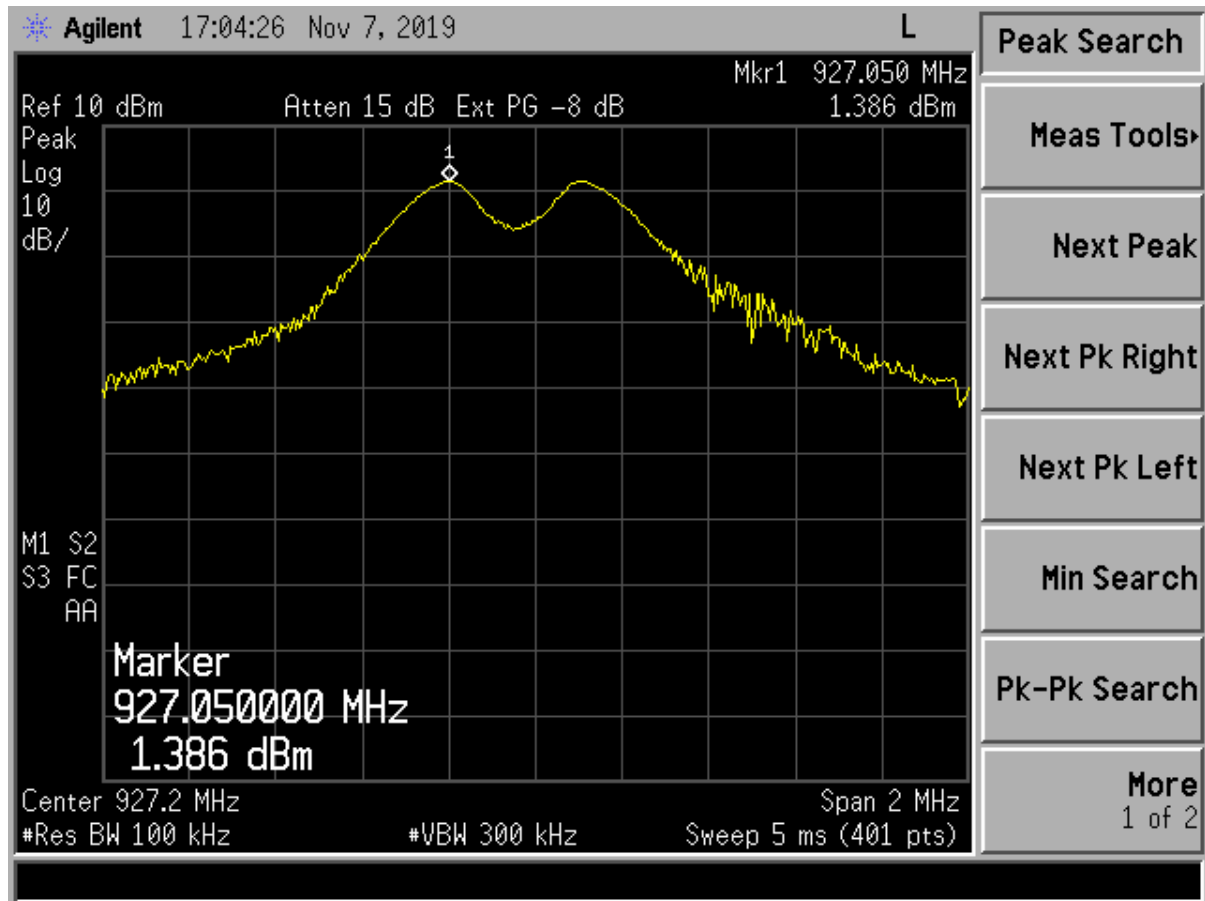


Figure 6. Output Power, High Channel

US Tech Test Report:
FCC ID:
IC:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15/IC RSS Certification
WPEPSASII-03
8031A-PSASII03
19-0415
December 10, 2019
PakSense, Inc.
PSASII-03

2.10 Power Spectral Density (CFR 15.247(e), RSS-247 (5.2(b)))

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. The same method of determining the conducted output power shall be used to determine the power spectral density.

If measured peak conducted output power complies with the regulatory requirement for PSD, then measurement of PSD is not required.


In this case, the peak conducted output power level of the transmitter falls below the +8 dB limit.

Table 5. Peak Power Spectral Density

Frequency of Fundamental (MHz)	PSD (dBm @100 kHz)	FCC Limit (dBm @3 kHz)	Margin
Measured peak conducted output power meets the regulatory requirements for PSD. The data is provided here for PSD.			
902.75	2.39	8.0	5.61
915.25	2.40	8.0	5.60
927.25	1.96	8.0	6.04

Test Date: November 7, 2019

Tested By
Signature:

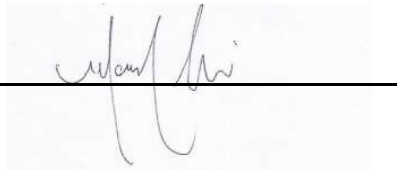

Name: Mark Afroози

US Tech Test Report:
FCC ID:
IC:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15/IC RSS Certification
WPEPSASII-03
8031A-PSASII03
19-0415
December 10, 2019
PakSense, Inc.
PSASII-03

2.11 Antenna Conducted Intentional and Spurious Emissions (CFR 15.209, 15.247(d)) (RSS-247 (5.5), RSS-Gen 8.9)

The EUT was put into a continuous-transmit mode of operation and tested per FCC KDB Publication 558074v05r02 for conducted out of band emissions radiating from the antenna port over the frequency range of 30 MHz to ten times the highest clock frequency generated or used in this case, 10 GHz. A conducted scan was performed on the EUT to identify and record spurious signals that were related to the transmitter. Antenna Conducted Emissions of a significant magnitude that fell within restricted bands were then measured as radiated emissions in the semi-anechoic chamber. The conducted emissions graphs are found in figures below. All spurious emissions must be at least 20 dB below the fundamental signal.

For Conducted RF antenna conducted tests, the RBW was set to 100 kHz, video bandwidth (VBW) > RBW, scan up through the 10th harmonic of the fundamental frequency. All harmonics/spurs must be at least 20 dB down from the highest emission level within the authorized band.

US Tech Test Report:
 FCC ID:
 IC:
 Test Report Number:
 Issue Date:
 Customer:
 Model:

FCC Part 15/IC RSS Certification
 WPEPSASII-03
 8031A-PSASII03
 19-0415
 December 10, 2019
 PakSense, Inc.
 PSASII-03

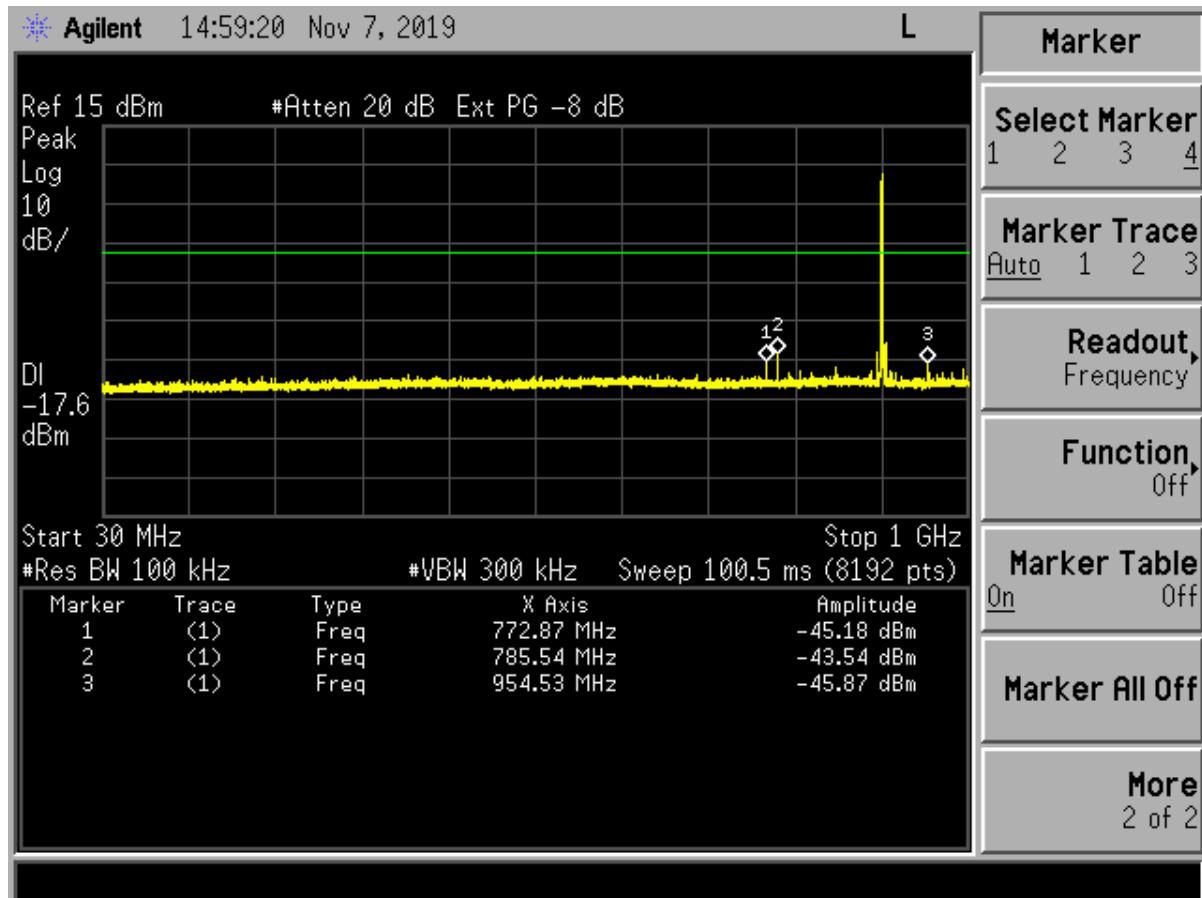


Figure 7. Conducted Spurious Emissions – Low Channel, 30 MHz – 1000 MHz

Note: Large signal shown is fundamental frequency.
 Green display line represents 20 dB below peak of fundamental frequency.

US Tech Test Report:
 FCC ID:
 IC:
 Test Report Number:
 Issue Date:
 Customer:
 Model:

FCC Part 15/IC RSS Certification
 WPEPSASII-03
 8031A-PSASII03
 19-0415
 December 10, 2019
 PakSense, Inc.
 PSASII-03

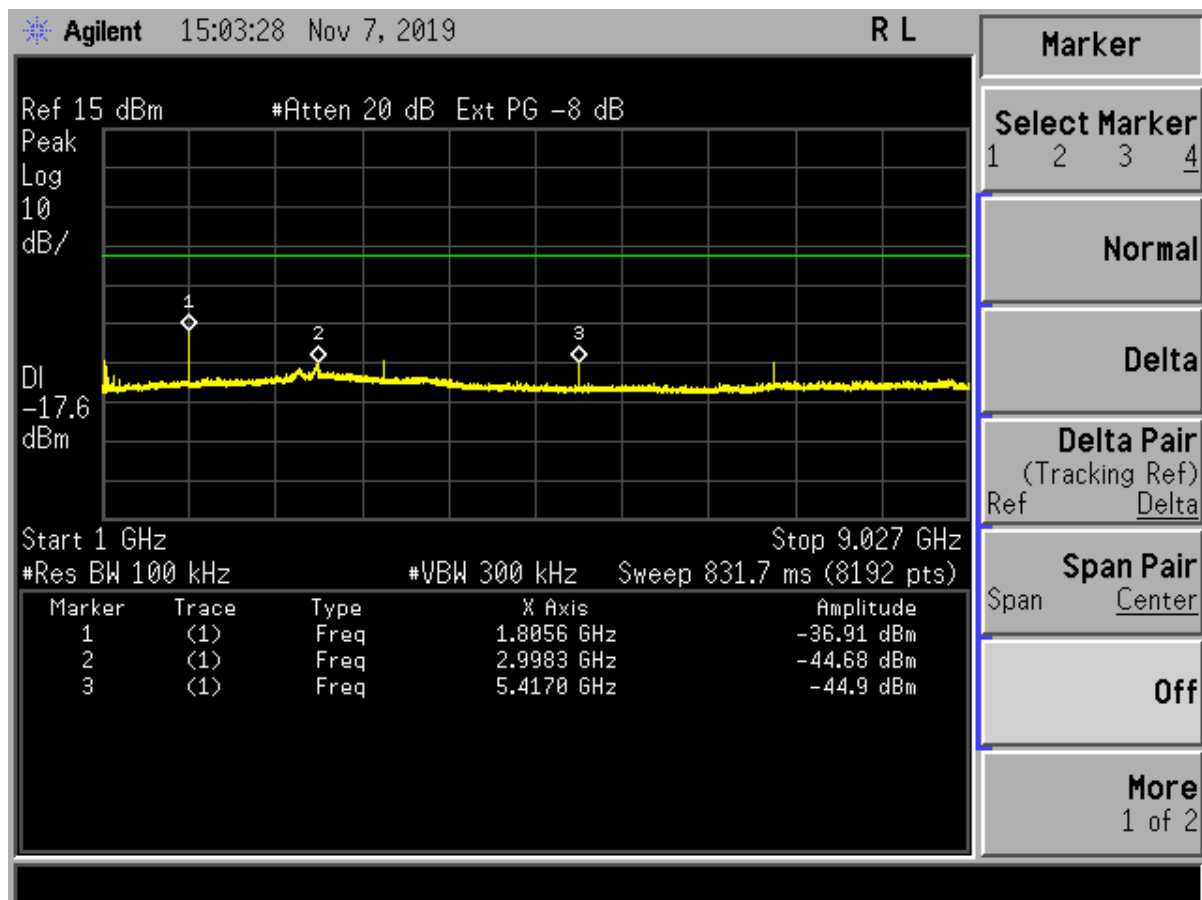


Figure 8. Conducted Spurious Emissions – Low Channel, 1000 MHz - 9027 MHz

Note: Green display line represents 20 dB below peak of fundamental frequency

US Tech Test Report:
 FCC ID:
 IC:
 Test Report Number:
 Issue Date:
 Customer:
 Model:

FCC Part 15/IC RSS Certification
 WPEPSASII-03
 8031A-PSASII03
 19-0415
 December 10, 2019
 PakSense, Inc.
 PSASII-03

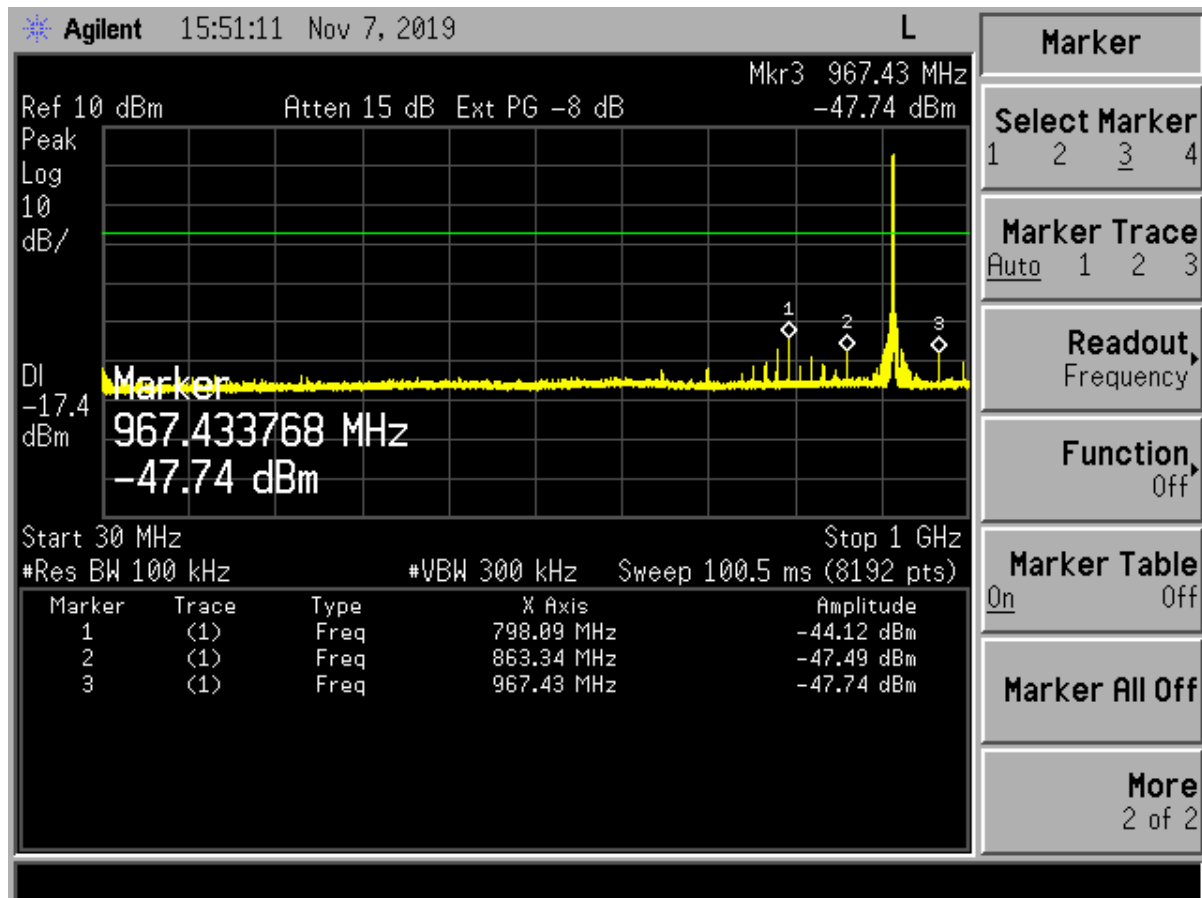


Figure 9. Conducted Spurious Emissions – Mid Channel, 30 MHz - 1000 MHz

Note: Large Signal shown is fundamental frequency.
 Green display line represents 20 dB below peak of fundamental frequency.

US Tech Test Report:
FCC ID:
IC:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15/IC RSS Certification
WPEPSASII-03
8031A-PSASII03
19-0415
December 10, 2019
PakSense, Inc.
PSASII-03

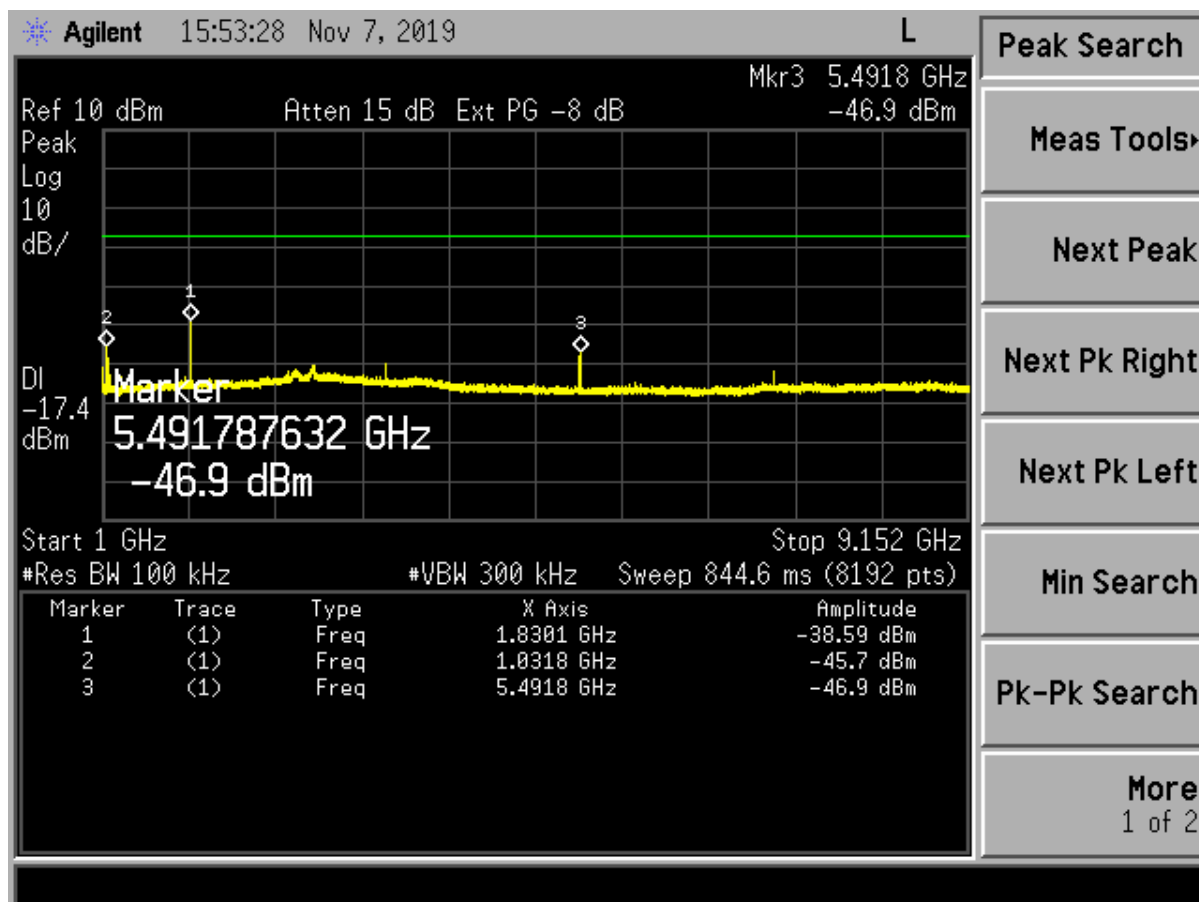


Figure 10. Conducted Spurious Emissions – Mid Channel, 1000 MHz - 9152 MHz

Note: Green display line represents 20 dB below peak of fundamental frequency.

US Tech Test Report:
FCC ID:
IC:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15/IC RSS Certification
WPEPSASII-03
8031A-PSASII03
19-0415
December 10, 2019
PakSense, Inc.
PSASII-03

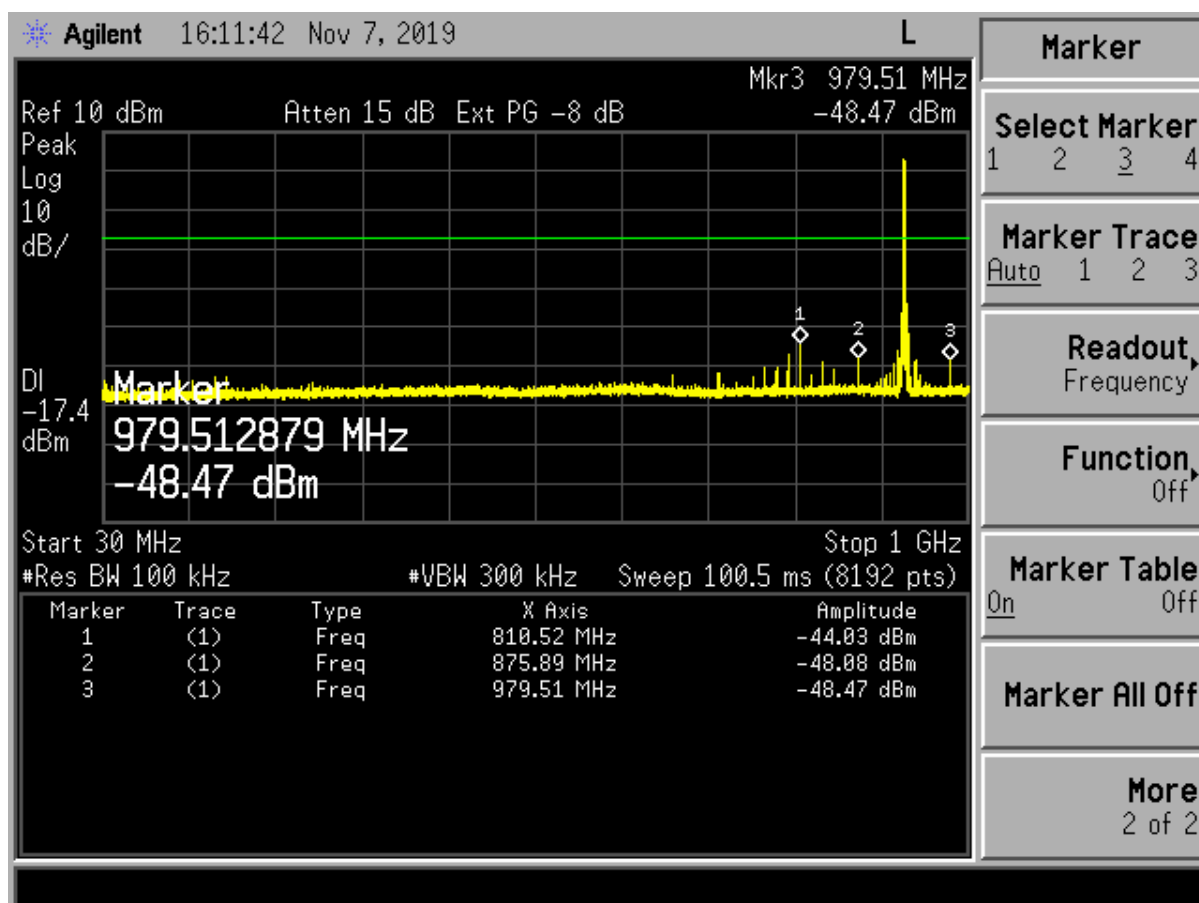


Figure 11. Conducted Spurious Emissions – High Channel, 30 MHz – 1000 MHz

Note: Large Signal shown is fundamental frequency.
Green display line represents 20 dB below peak of fundamental frequency.

US Tech Test Report:
 FCC ID:
 IC:
 Test Report Number:
 Issue Date:
 Customer:
 Model:

FCC Part 15/IC RSS Certification
 WPEPSASII-03
 8031A-PSASII03
 19-0415
 December 10, 2019
 PakSense, Inc.
 PSASII-03

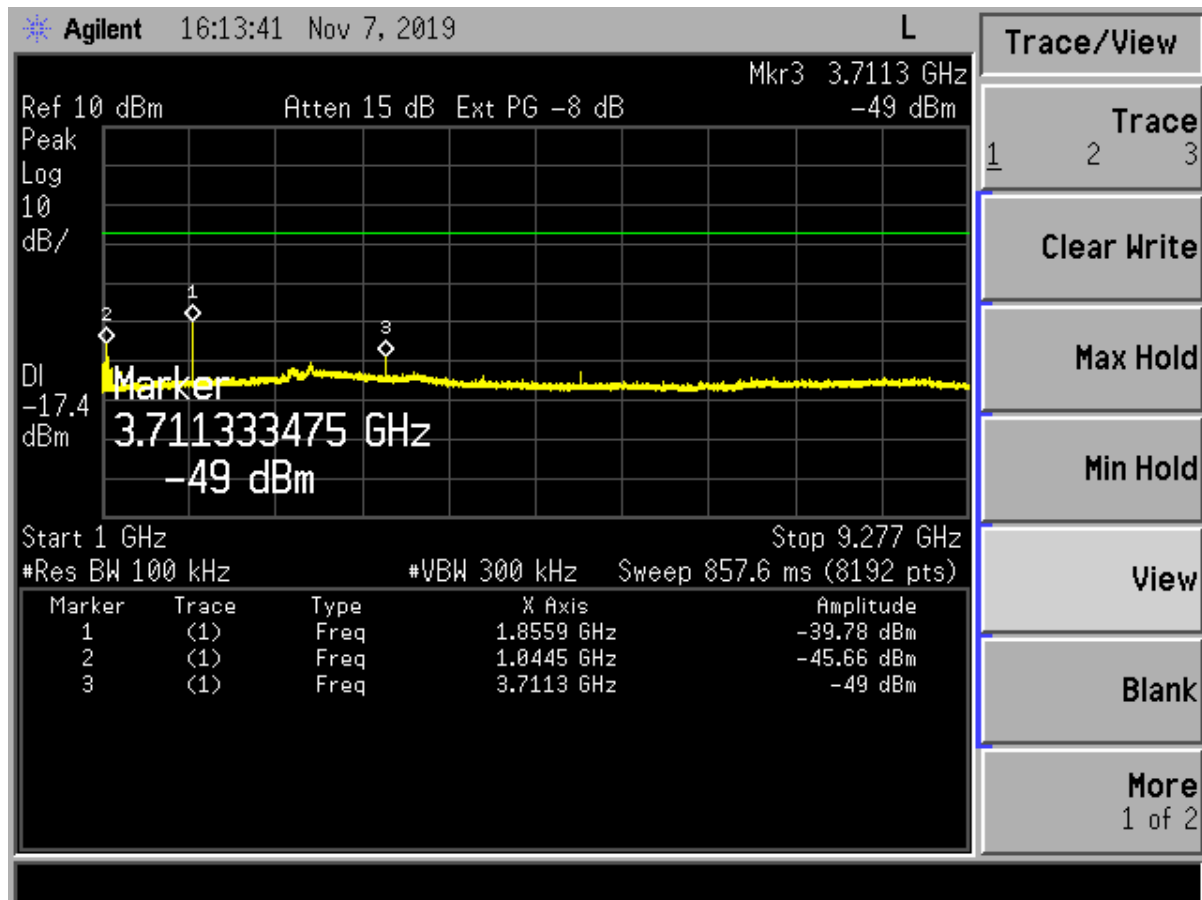


Figure 12. Conducted Spurious Emissions–High Channel, 1000 MHz – 9277 MHz

Note: Green display line represents 20 dB below peak of fundamental frequency.

2.12 Intentional Radiator, Radiated Emissions (CFR 15.209, 15.247(d), RSS-247 (5.2),(5.5))

On the test site, the EUT was mounted on top of a non-conductive table, 80 cm above the floor, by placing it in the X-Z plane along the Z axis with its bottom cover in parallel with the ground. The front of the EUT faced the measurement antenna located 3 meters away. Each signal measured was maximized by raising and lowering the receive antenna between 1 and 4 meters in height while monitoring the ever changing spectrum analyzer display (with channel A in the Clear-Write mode and channel B in the Max-Hold mode) for the largest signal visible. That exact antenna height where the signal was maximized was recorded for reproducibility purposes. Also, the EUT was rotated about its Y-axis while monitoring the Spectrum Analyzer display for maximum. The EUT azimuth was recorded for reproducibility purposes. The EUT was measured when both maxima were simultaneously satisfied.

For radiated measurements, the EUT was set into a continuous transmission mode. Below 1 GHz, the RBW of the measuring instrument was set equal to 120 kHz. Peak measurements above 1 GHz were measured using a RBW = 1 MHz, with a VBW $\geq 3 \times$ RBW. The results of peak radiated spurious emissions falling within restricted bands are given in Table 5 below.

For Average measurements above 1 GHz, the emissions were measured using an average detector or the duty cycle correction factor was applied to the Peak recorded value.

US Tech Test Report:
 FCC ID:
 IC:
 Test Report Number:
 Issue Date:
 Customer:
 Model:

FCC Part 15/IC RSS Certification
 WPEPSASII-03
 8031A-PSASII03
 19-0415
 December 10, 2019
 PakSense, Inc.
 PSASII-03

Table 6. Peak Radiated Fundamental & Harmonic Emissions

Tested By: AF	Test: FCC Part 15,247(d)			Client: PakSense, Inc.				
	Project: 19-0415			Model: PSASII-03				
Frequency (MHz)	Test Data (dBuV)	Additional Factor	AF+CL-PA (dB/m)	Corrected Results (dBuV/m)	Limits (dBuV/m)	Distance / Polarization	Margin (dB)	Detector
Low Channel								
902.75	63.59	--	25.65	89.24	--	3m./HORZ	--	PK
1805.50	51.42	--	-6.24	45.18	74.0	3.0m./HORZ	28.8	PK
2708.25	51.04	--	-2.52	48.52	74.0	3.0m./HORZ	25.5	PK
Middle Channel								
915.25	63.23	--	25.69	88.92	--	3m./HORZ	--	PK
1830.50	51.90	--	-6.28	45.62	74.0	3.0m./HORZ	28.4	PK
2745.75	51.13	--	-2.71	48.42	74.0	3.0m./HORZ	25.6	PK
High Channel								
927.25	62.54	--	25.68	88.22	--	3m./HORZ	--	PK
1854.50	52.80	--	-5.68	47.12	74.0	3.0m./HORZ	26.9	PK
2781.75	50.63	--	-2.85	47.78	74.0	3.0m./HORZ	26.2	PK

1. No other signals detected within 20 dB of specification limit. Harmonics investigated up to the 10th harmonic

Sample Calculation at 902.75 MHz:

Magnitude of Measured Frequency	63.59	dBuV
+Additional Factor	0.00	dB
+Antenna Factor + Cable Loss- Amplifier Gain	25.65	dB/m
Corrected Result	89.24	dBuV/m

Test Date: November 5, 2019

Tested By
 Signature: Afzal Fazal

Name: Afzal Fazal

US Tech Test Report:
 FCC ID:
 IC:
 Test Report Number:
 Issue Date:
 Customer:
 Model:

FCC Part 15/IC RSS Certification
 WPEPSASII-03
 8031A-PSASII03
 19-0415
 December 10, 2019
 PakSense, Inc.
 PSASII-03

Table 7. Average Radiated Fundamental & Harmonic Emissions

Tested By: AF	Test: FCC Part 15,247(d)			Client: PakSense, Inc..				
	Project: 19-0415			Model: PSASII-03				
Frequency (MHz)	Test Data (dBuV)	Additional Factor	AF+CL-PA (dB/m)	Corrected Results (dBuV/m)	Limits (dBuV/m)	Distance / Polarization	Margin (dB)	Detector
Low Channel								
902.75	62.49	--	25.65	88.14	--	3m./HORZ	--	QP
1805.50	33.76	--	-6.24	27.52	54.0	3.0m./HORZ	26.5	AVG
2708.25	32.05	--	-2.52	29.53	54.0	3.0m./HORZ	24.5	AVG
Middle Channel								
915.25	61.79	--	25.69	87.48	--	3m./HORZ		QP
1830.50	33.41	--	-6.28	27.13	54.0	3.0m./HORZ	26.9	AVG
2745.75	31.55	--	-2.71	28.84	54.0	3.0m./HORZ	25.2	AVG
High Channel								
927.25	61.35	--	25.68	87.03	--	3m./HORZ		QP
1854.50	33.74	--	-5.68	28.06	54.0	3.0m./HORZ	25.9	AVG
2781.75	31.03	--	-2.85	28.18	54.0	3.0m./HORZ	25.8	AVG

1. No other signals detected within 20 dB of specification limit. Harmonics investigated up to the 10th harmonic

Sample Calculation at 2708.25 MHz:

Magnitude of Measured Frequency	32.05	dBuV
+Additional Factor	0.00	dB
+Antenna Factor + Cable Loss+-Amplifier Gain	-2.52	dB/m
Corrected Result	29.53	dBuV/m

Test Date: November 5, 2019

Tested By
 Signature: Afzal Fazal

Name: Afzal Fazal

US Tech Test Report:
FCC ID:
IC:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15/IC RSS Certification
WPEPSASII-03
8031A-PSASII03
19-0415
December 10, 2019
PakSense, Inc.
PSASII-03

2.13 Band Edge Measurements – (CFR 15.247(d), RSS-Gen 8.10)

Band Edge measurements are made following the guidelines in FCC KDB Publication No. 558074 v05r02 with the EUT initially operating on the Lowest Channel and then operating on the Highest Channel within its band of operation. Antenna port conducted measurements are performed to demonstrate compliance with the requirement of 15.247(d) that all emissions outside of the band edges be attenuated by at least 20 dB when compared to its highest in-band value (contained in a 100 kHz band).

To capture the band edge set the Spectrum Analyzer frequency span large enough (usually around 10 MHz) to capture the peak level of the emission operating on the channel closest to the band edge as well as any modulation products falling outside of the authorized band of operation. Conducted measurements are performed with RBW $\geq 1\%$ of the frequency span. In all cases, the VBW is set $\geq 3 \times$ RBW. See figures and calculations below for more detail.

US Tech Test Report:
 FCC ID:
 IC:
 Test Report Number:
 Issue Date:
 Customer:
 Model:

FCC Part 15/IC RSS Certification
 WPEPSASII-03
 8031A-PSASII03
 19-0415
 December 10, 2019
 PakSense, Inc.
 PSASII-03

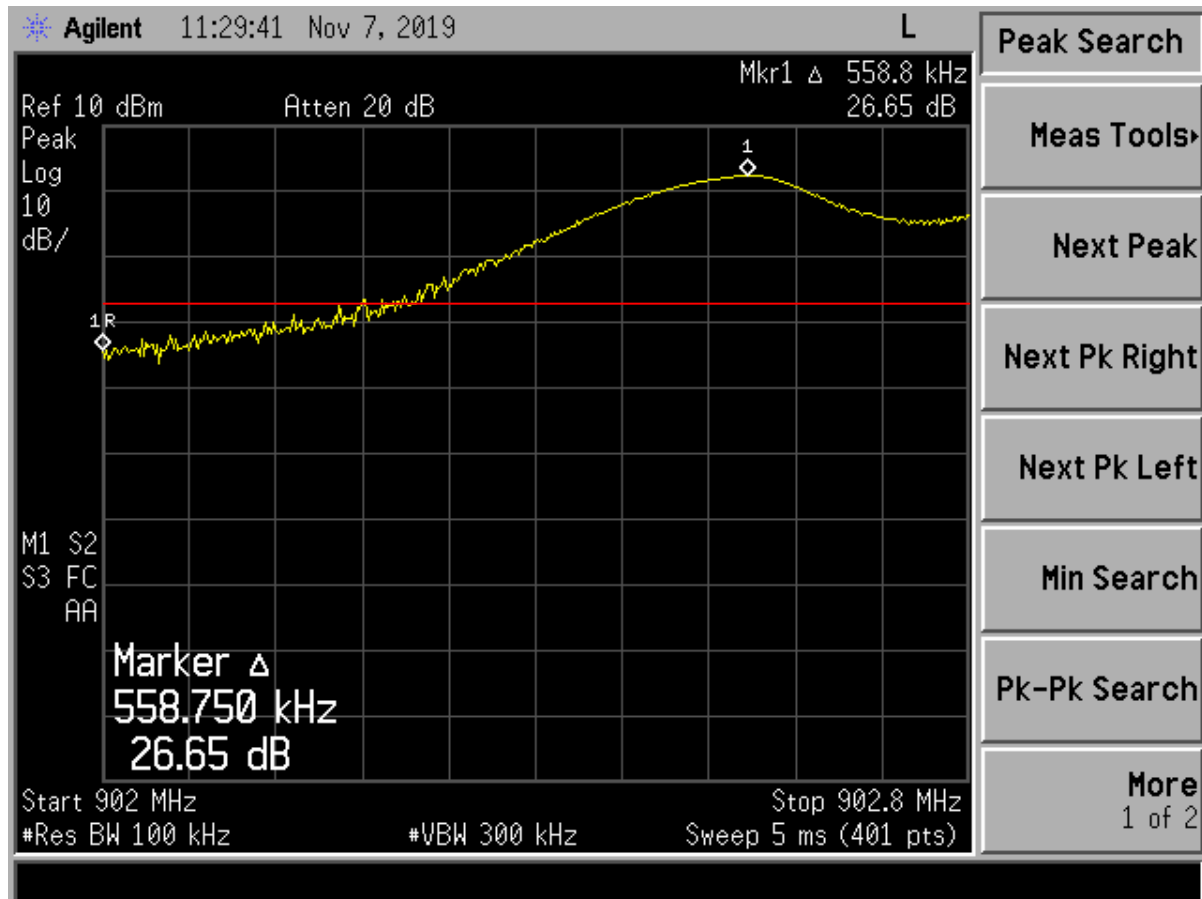


Figure 13. Band Edge Compliance – Low Channel Delta - Peak

Lower band edge must be 20 dB below the fundamental. This requirement is met.

Measured Result	26.65	dB
Band Edge Limit	20.00	dB
Band Edge Margin	6.65	dB

US Tech Test Report:
FCC ID:
IC:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15/IC RSS Certification
WPEPSASII-03
8031A-PSASII03
19-0415
December 10, 2019
PakSense, Inc.
PSASII-03

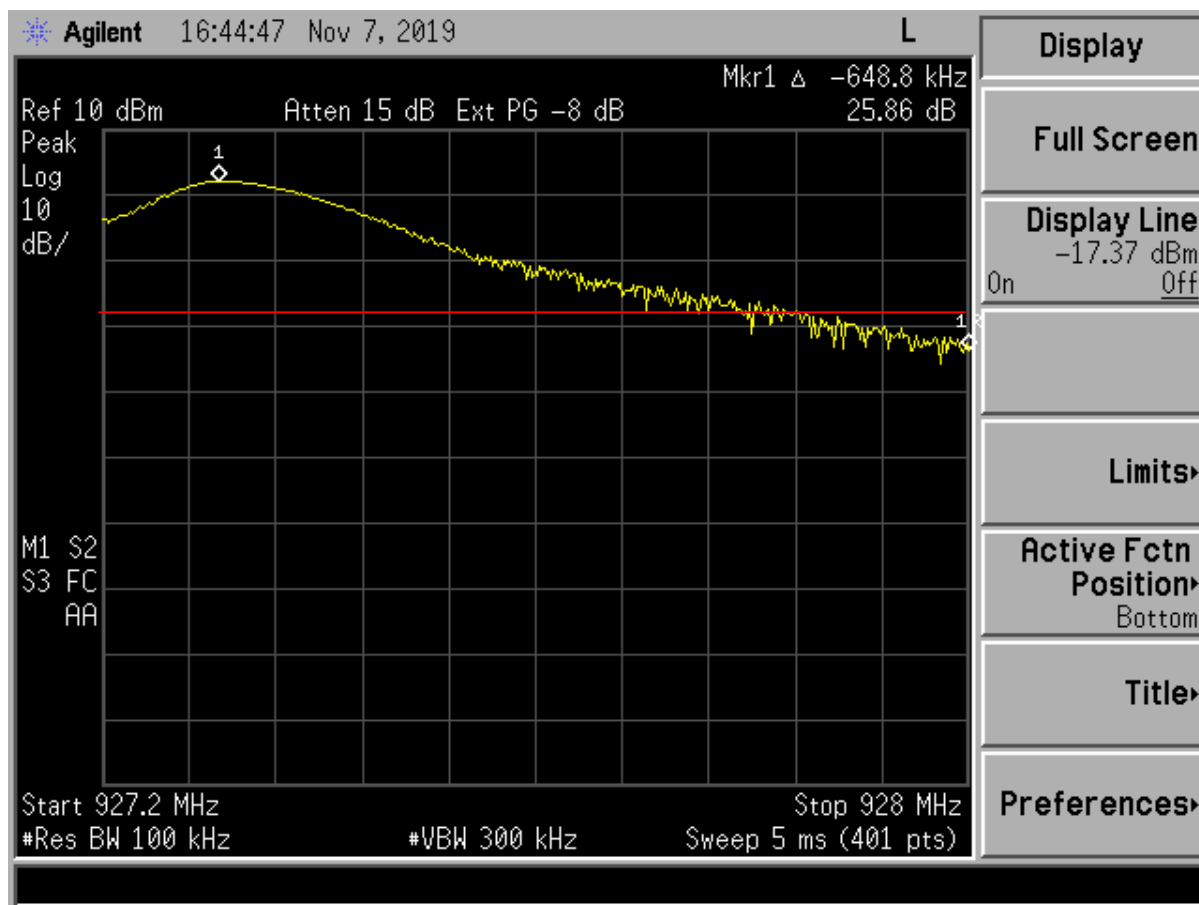


Figure 14. Band Edge Compliance – High Channel Delta - Peak

Higher band edge must be 20 dB below the fundamental. This requirement is met.

Measured Result	25.86	dB
Band Edge Limit	20.00	dB
Band Edge Margin	5.86	dB

US Tech Test Report:
FCC ID:
IC:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15/IC RSS Certification
WPEPSASII-03
8031A-PSASII03
19-0415
December 10, 2019
PakSense, Inc.
PSASII-03

2.14 Six (6) dB Bandwidth (CFR 15.247(a)(2), RSS-247 (5.2(a)))


The EUT antenna port was connected to a spectrum analyzer having a 50 Ω input impedance. Measurements were performed similar to the method of FCC, KDB Publication No. 558074 v05r02 for a bandwidth of 6 dB. The RBW was set to approximately 1/100 of the manufacturers claimed RBW and with the VBW \geq RBW. The results of this test are given in the table below and figures below.

Table 8. Six (6) dB Bandwidth

Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum FCC Bandwidth (MHz)
902.75	0.586	0.500
915.25	0.585	0.500
927.25	0.578	0.500

Test Date: November 7, 2019

Tested By
Signature:

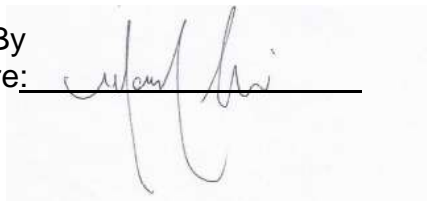

Name: Mark Afroози

US Tech Test Report:
FCC ID:
IC:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15/IC RSS Certification
WPEPSASII-03
8031A-PSASII03
19-0415
December 10, 2019
PakSense, Inc.
PSASII-03

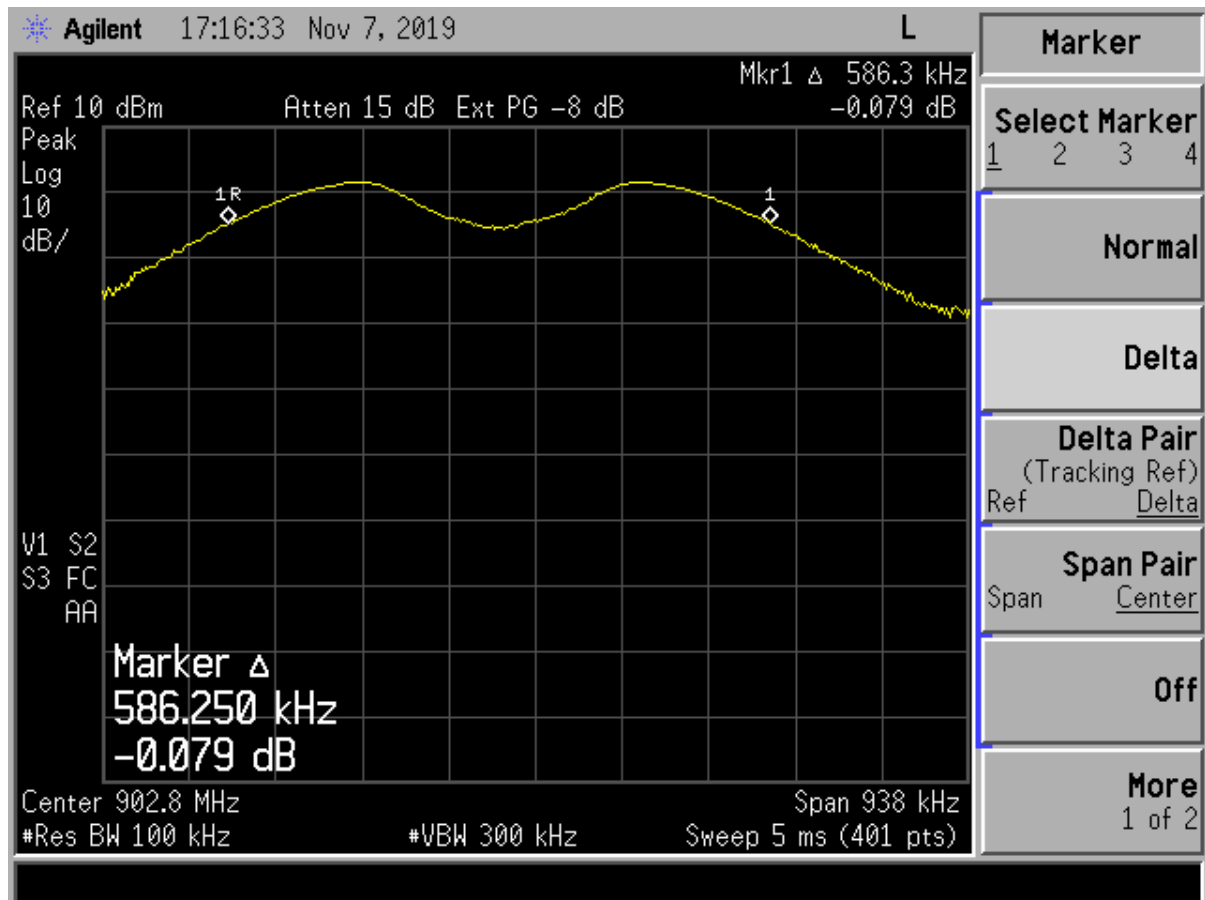


Figure 15. 6 dB Bandwidth Low Channel

US Tech Test Report:
FCC ID:
IC:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15/IC RSS Certification
WPEPSASII-03
8031A-PSASII03
19-0415
December 10, 2019
PakSense, Inc.
PSASII-03

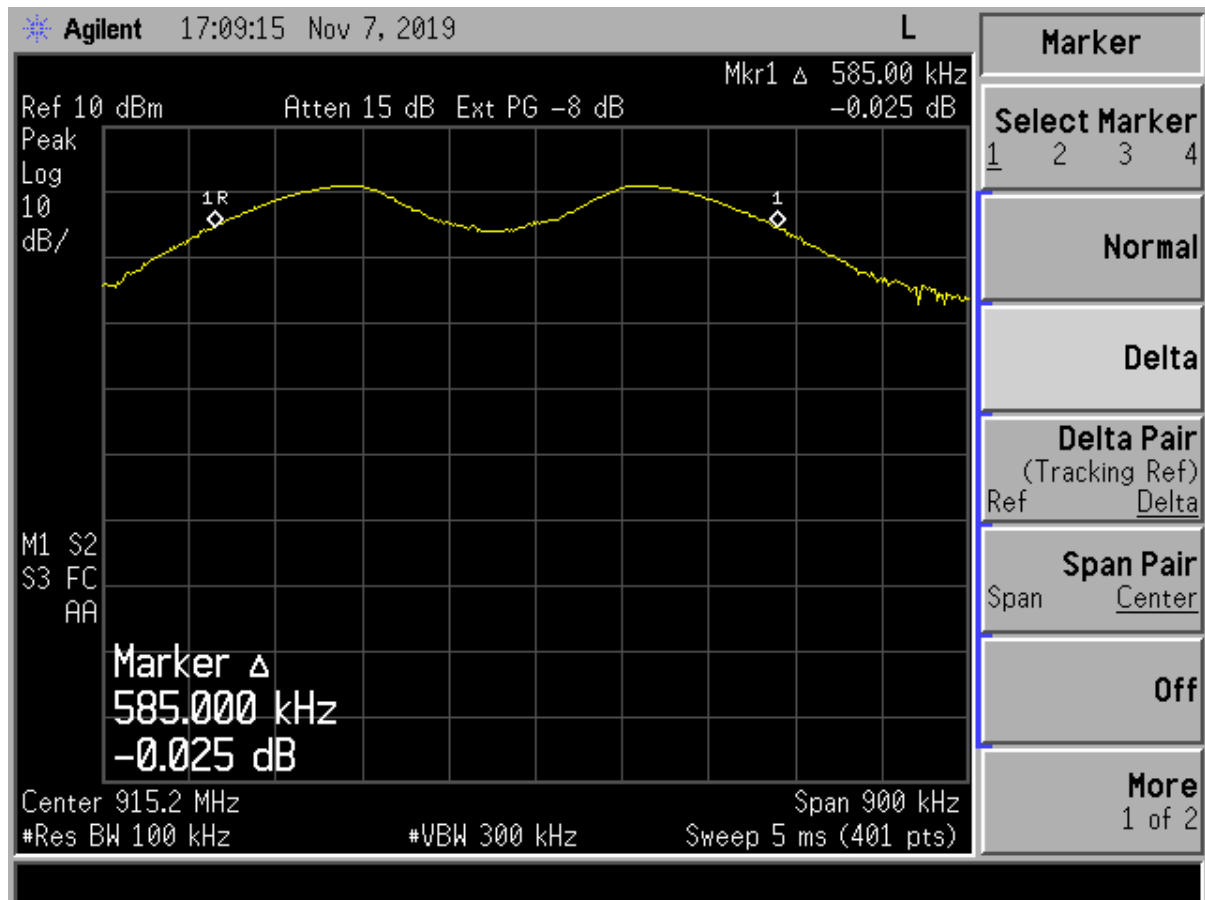


Figure 16. 6 dB Bandwidth Mid Channel

US Tech Test Report:
FCC ID:
IC:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15/IC RSS Certification
WPEPSASII-03
8031A-PSASII03
19-0415
December 10, 2019
PakSense, Inc.
PSASII-03

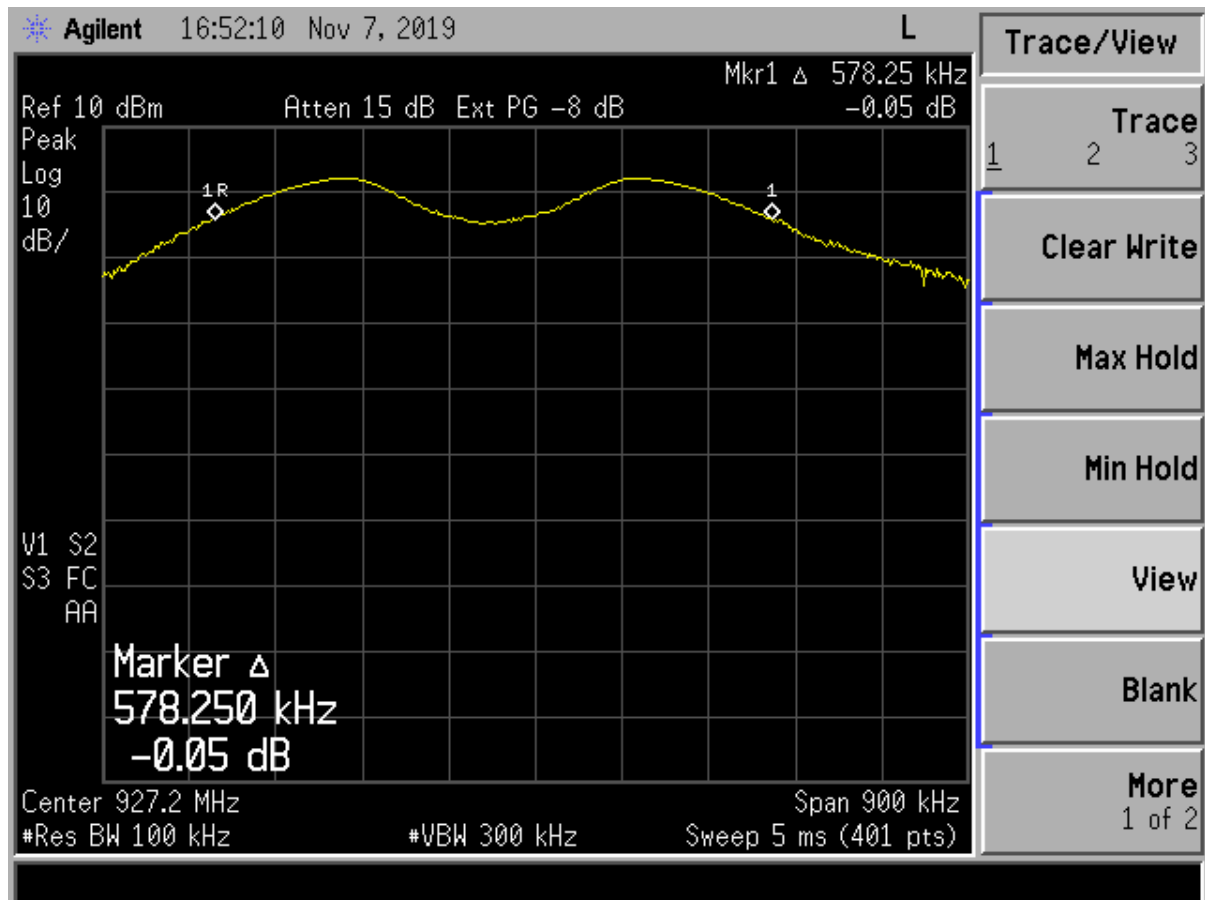


Figure 17. 6 dB Bandwidth High Channel

US Tech Test Report:
FCC ID:
IC:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15/IC RSS Certification
WPEPSASII-03
8031A-PSASII03
19-0415
December 10, 2019
PakSense, Inc.
PSASII-03

2.15 99% Occupied Bandwidth (RSS-GEN (6.6))


The EUT antenna port was connected to a spectrum analyzer having a 50Ω input impedance. Measurements were performed similar to the method of FCC, KDB Publication No. 558074 v05r02 and ANSI C63.10-2013, Clause 6.9.3. The nominal IF filter bandwidth was set to a value in the range of 1% to 5 % of the OBW. The video bandwidth was set to approximately three times the resolution bandwidth.

Table 9. 99% Occupied Bandwidth

Frequency (MHz)	(99%) Occupied Bandwidth (MHz)
902.75	603.67
915.25	608.05
927.25	617.25

Test Date: November 7, 2019

Tested By
Signature:

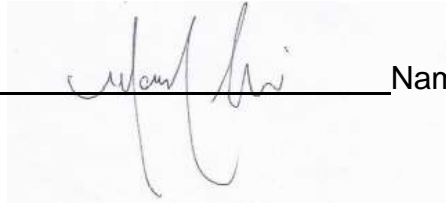

Name: Mark Afroози

US Tech Test Report:
FCC ID:
IC:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15/IC RSS Certification
WPEPSASII-03
8031A-PSASII03
19-0415
December 10, 2019
PakSense, Inc.
PSASII-03

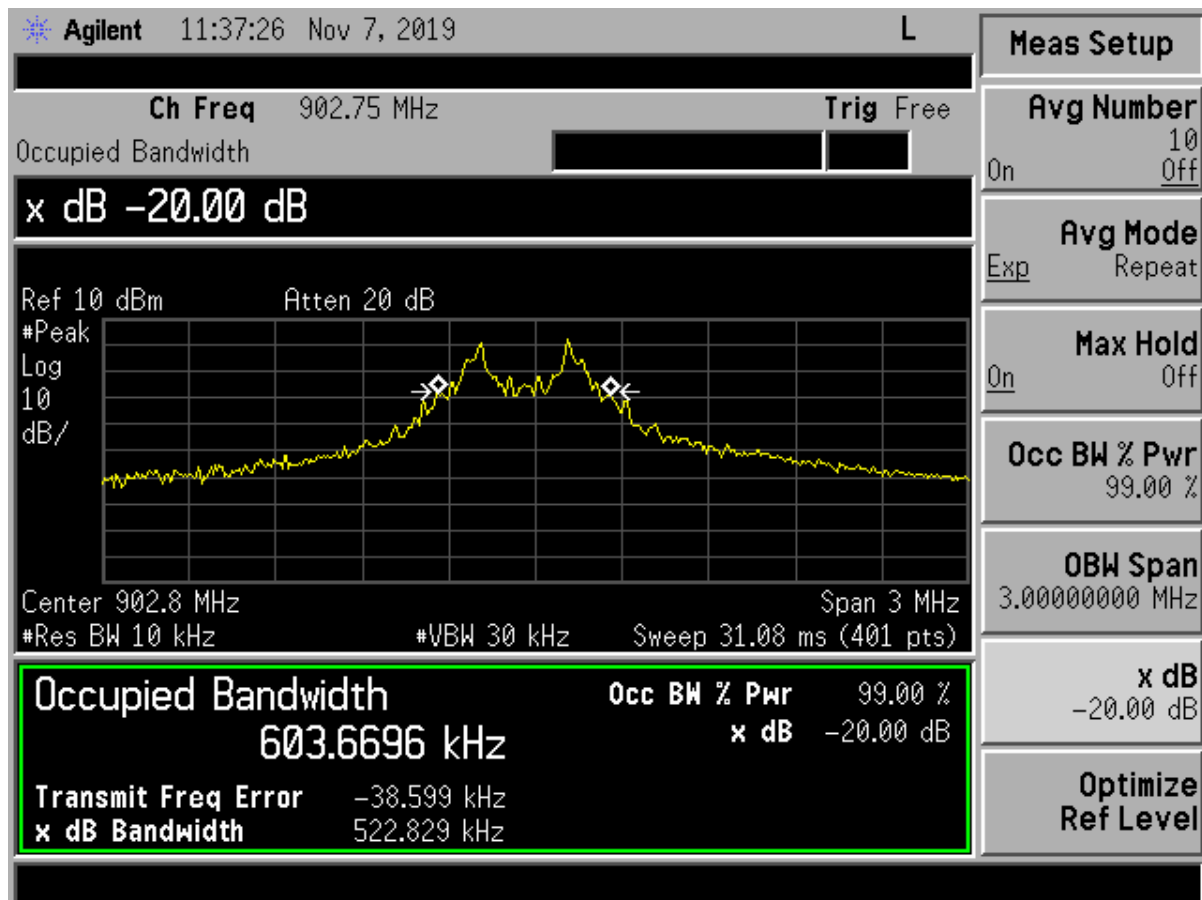


Figure 18. 99% Occupied Bandwidth - Low Channel

US Tech Test Report:
 FCC ID:
 IC:
 Test Report Number:
 Issue Date:
 Customer:
 Model:

FCC Part 15/IC RSS Certification
 WPEPSASII-03
 8031A-PSASII03
 19-0415
 December 10, 2019
 PakSense, Inc.
 PSASII-03

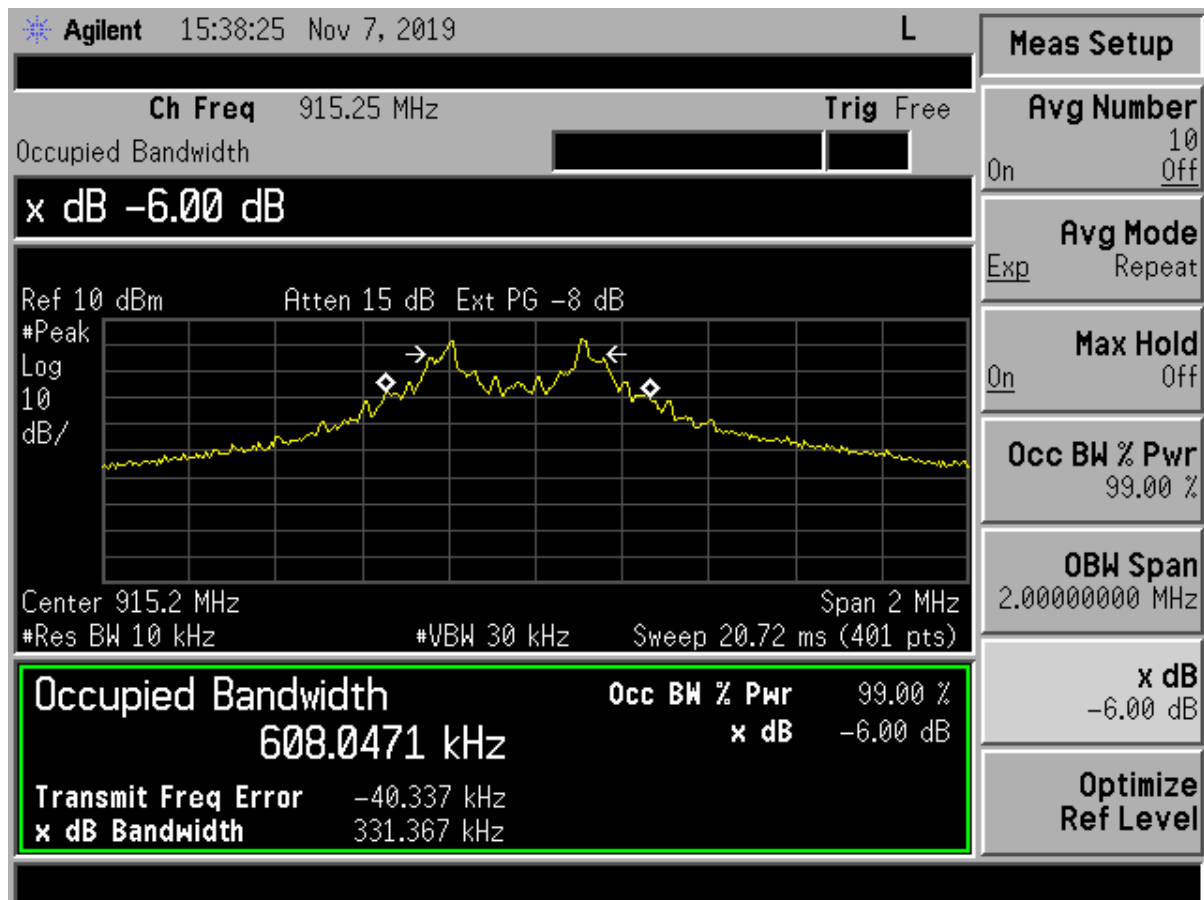


Figure 19. 99% Occupied Bandwidth - Mid Channel

US Tech Test Report:
FCC ID:
IC:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15/IC RSS Certification
WPEPSASII-03
8031A-PSASII03
19-0415
December 10, 2019
PakSense, Inc.
PSASII-03

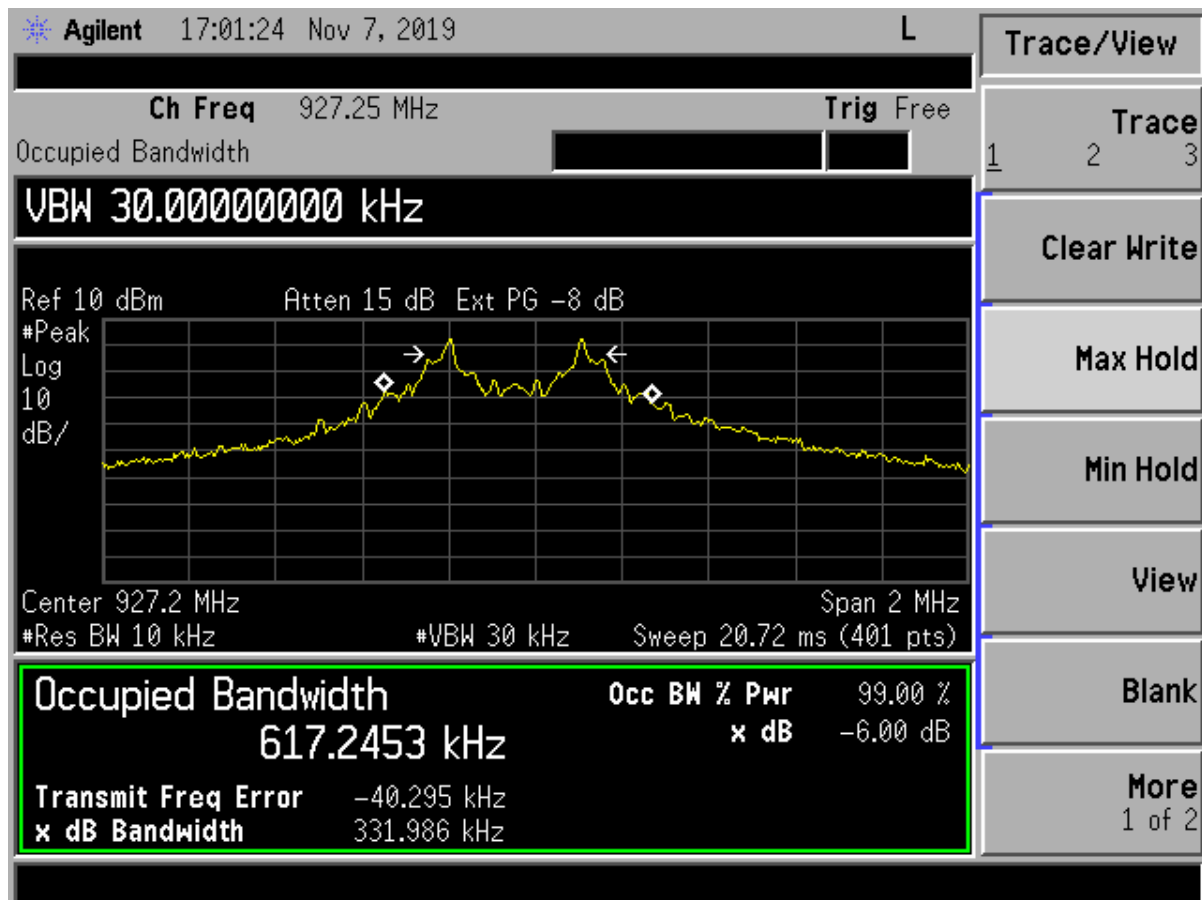


Figure 20. 99% Occupied Bandwidth - High Channel

US Tech Test Report:
FCC ID:
IC:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15/IC RSS Certification
WPEPSASII-03
8031A-PSASII03
19-0415
December 10, 2019
PakSense, Inc.
PSASII-03

2.16 Unintentional Radiator and Intentional Radiator Power Lines Conducted Emissions (CFR 15.107, 15.207, RSS-Gen 8.8)

The power line conducted voltage emission measurements have been carried out in accordance with CFR 15.207, per ANSI C63.4-2014, Paragraph 7, with a spectrum analyzer connected to a LISN and the EUT placed into a continuous mode of transmission.

The worst-case results for conducted emissions were determined to be produced when the EUT was operating under continuous transmission. The worst case emission occurred at 176 kHz on the Phase line and was 14.8 dB below the applicable limit. All other emissions were at least 16 dB below the limit. Those results are given in Table 5, following.

US Tech Test Report:
 FCC ID:
 IC:
 Test Report Number:
 Issue Date:
 Customer:
 Model:

FCC Part 15/IC RSS Certification
 WPEPSASII-03
 8031A-PSASII03
 19-0415
 December 10, 2019
 PakSense, Inc.
 PSASII-03

Table 10. Transmitter Power Line Conducted Emissions Test Data, Part 15.207

CONDUCTED EMISSIONS 150 kHz to 30 MHz						
Tested By: JF	Test: FCC Part 15.207 Class A			Client: PakSense, Inc		
	Project No.: 19-0415			Model: PSASII-03		
Frequency (MHz)	Test Data (dBuV)	LISN+CL-PA (dB)	Corrected Results (dBuV)	Avg Limits (dBuV)	Margin (dB)	Detector
120 Vac/ 60 Hz, Phase						
0.1760	51.09	0.07	51.16	66.0	14.8	AVG
0.5367	33.11	0.26	33.37	60.0	26.6	AVG
1.8000	28.26	0.20	28.46	60.0	31.5	AVG
5.1580	26.77	0.06	26.83	60.0	33.2	AVG
13.5500	33.06	0.62	33.68	60.0	26.3	AVG
24.2200	31.32	1.13	32.45	60.0	27.6	AVG
120 Vac/ 60 Hz, Neutral						
0.1780	49.86	0.12	49.98	66.0	16.0	AVG
0.5410	32.84	0.54	33.38	60.0	26.6	AVG
4.9300	29.00	0.42	29.42	60.0	30.6	AVG
5.2670	26.66	0.16	26.82	60.0	33.2	AVG
11.5300	25.78	0.55	26.33	60.0	33.7	AVG
24.2200	25.92	1.57	27.49	60.0	32.5	AVG

Sample Calculation at 0.1760 MHz – Phase Line:

Magnitude of Measured Frequency	51.09	dBuV
+Antenna Factor + Cable Loss- Amplifier Gain	0.07	dB/m
Corrected Result	51.16	dBuV/m

Test Date: October 18, 2019

Tested By
 Signature: 

Name: John Freeman

2.17 Unintentional Radiator and Intentional Radiator, Radiated Emissions (CFR 15.109, 15.209, RSS-Gen 8.9)

The test data provided herein is to support the verification requirement for radiated emissions coming from the EUT in a transmitting state per 15.209 and were investigated from 9kHz or the lowest operating clock frequency to 10 GHz and tested as detailed in ANSI C63.10:2013, Clause 6.4-6.6. Data is presented in the table below.

Radiated emissions within the band of 9 kHz to 30 MHz were investigated using a calibrated Loop Antenna and per the requirements of ANSI C63.10:2013.

Measurements were made with the analyzer's resolution bandwidth set to 120 kHz for measurements made below 1 GHz and 1 MHz for measurements made above 1 GHz. The video bandwidth was set to three times the resolution bandwidth; 1 MHz RBW and 3 MHz VBW. The test data was maximized for magnitude by rotating the turn-table through 360 degrees and raising and lowering the receiving antenna between 1 to 4 meters in height as a part of the measurement procedure.

The EUT incorporates a combination of certified modular transmitters along with this 900 MHz transmitter. Spurious unwanted emissions testing was performed on the EUT with all combinations of transmitters ON and exercising. There are no additional emissions generated due to simultaneous transmission operations compared to single transmitter operations. The test data collected with all transmitters ON and operating is presented below as the representative test data for this EUT.

US Tech Test Report:
FCC ID:
IC:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15/IC RSS Certification
WPEPSASII-03
8031A-PSASII03
19-0415
December 10, 2019
PakSense, Inc.
PSASII-03

Table 11. Spurious Radiated Emissions (9 kHz – 30 MHz)

Tested By: JF	Test: FCC Part 15.109/15.209			Client: PakSense, Inc				
	Project No.: 19-0415			Model: PSASII-03				
Frequency (MHz)	Test Data (dBuV)	Additional Factor	AF+CL-PA (dB/m)	Corrected Results (dBuV/m)	Limits (dBuV/m)	Distance / Polarization	Margin (dB)	Detector
All emissions were more than 20 dB below the applicable limit.								

Test Date: October 21, 2019

Tested By
Signature:



Name: John Freeman

US Tech Test Report:
 FCC ID:
 IC:
 Test Report Number:
 Issue Date:
 Customer:
 Model:

FCC Part 15/IC RSS Certification
 WPEPSASII-03
 8031A-PSASII03
 19-0415
 December 10, 2019
 PakSense, Inc.
 PSASII-03

Table 12. Spurious Radiated Emissions (30 MHz – 1 GHz)

Test By: JF	Test: FCC Part 15.109/15.209				Client: PakSense, Inc.		
	Project: 19-0415				Model: PSASII-03		
Frequency (MHz)	Test Data (dBuV)	AF+CL-PA (dB)	Results (dBuV/m)	Limits (dBuV/m)	Distance / Polarization	Margin (dB)	DETECTOR PK / QP/AVG
58.56	58.50	-27.23	31.27	39.0	3m./VERT	7.7	PK
94.88	50.25	-27.84	22.41	43.5	3m./VERT	21.1	PK
798.26	53.40	-13.41	39.99	46.4	3m./VERT	6.4	PK
785.23	50.23	-13.12	37.11	46.4	3m./VERT	9.3	PK
411.46	50.22	-19.67	30.55	46.4	3m./VERT	15.9	PK
863.18	48.49	-11.87	36.62	46.4	3m./VERT	9.8	PK
824.20	48.10	-12.52	35.58	46.4	3m./VERT	10.8	PK
967.19	47.04	-12.21	34.83	49.5	3m./VERT	14.7	PK
798.20	56.17	-12.61	43.56	46.4	3m./HORZ	2.8	QP
250.06	53.71	-23.87	29.84	46.4	3m./HORZ	16.6	PK
824.20	51.33	-11.72	39.61	46.4	3m./HORZ	6.8	QP
785.23	53.58	-12.32	41.26	46.4	3m./HORZ	5.1	QP
863.29	54.74	-11.17	41.82	46.4	3m./HORZ	4.6	QP
837.23	50.90	-11.50	39.40	46.4	3m./HORZ	7.0	PK
772.20	49.57	-12.32	37.25	46.4	3m./HORZ	9.2	PK
811.17	49.24	-11.95	37.29	46.4	3m./HORZ	9.1	PK
967.19	49.14	-11.51	37.63	49.5	3m./HORZ	11.9	PK

Sample Calculation at 58.56 MHz:

Magnitude of Measured Frequency	51.09	dBuV
+Antenna Factor + Cable Loss+ Amplifier Gain	-27.23	dB/m
Corrected Result	31.27	dBuV/m

Test Date: October 16, 2019

Tested By
 Signature: 

Name: John Freeman

US Tech Test Report:
FCC ID:
IC:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15/IC RSS Certification
WPEPSASII-03
8031A-PSASII03
19-0415
December 10, 2019
PakSense, Inc.
PSASII-03

Table 13. Spurious Radiated Emissions (1 GHz – 10 GHz)

Test By: M. Afroozi	Test: FCC Part 15.109/15.209				Client: PakSense, Inc.			
	Project: 19-0170				Model: PSASII-03			
Frequency (MHz)	Test Data (dBuV)	Additional Factors	AF+CL-PA (dB)	Results (dBuV/m)	Limits (dBuV/m)	Distance / Polarization	Margin (dB)	DETECTOR PK / QP/AVG
All emissions were more than 20 dB below the applicable limit.								

Test Date: October 21, 2019

Tested By

Signature: 

Name: John Freeman

US Tech Test Report:
FCC ID:
IC:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15/IC RSS Certification
WPEPSASII-03
8031A-PSASII03
19-0415
December 10, 2019
PakSense, Inc.
PSASII-03

2.18 Measurement Uncertainty

The measurement uncertainties given were calculated using the method detailed in CISPR 16-4-2:2011. A coverage factor of $k=2$ was used to give a level of confidence of approximately 95%.

2.18.1 Conducted Emissions Measurement Uncertainty

Measurement Uncertainty (within a 95% confidence level) for this test is ± 2.78 dB.

2.18.2 Radiated Emissions Measurement Uncertainty

For a measurement distance of 3 m the measurement uncertainty (with a 95% confidence level) for this test using a Biconical Antenna (30 MHz to 200 MHz) is ± 5.3 dB. This value includes all elements of measurement.

The measurement uncertainty (with a 95% confidence level) for this test using a Log Periodic Antenna (200 MHz to 1000 MHz) is ± 5.1 dB.

The measurement uncertainty (with a 95% confidence level) for this test using a Horn Antenna is ± 5.1 dB.

3 Test Results

The EUT is deemed to have met the requirements of the standards cited within the test report when tested as detailed in the present test report.