



Most Technology Service Co., Ltd.  
Tel: (86) 755-26825180 Fax: (86) 755-86170310  
Http:// www. szmost.com Email: szmost@szmost.com

**Test Report**

Product Name: Bluetooth Headset

FCC ID: WPU-BHTB10  
MODEL NO. : TB10

Applicant:

True Blue Wireless Inc.  
33 34th Street, 5th Floor, Brooklyn, NY 11232

Date Received: 06/07/2009

Date Tested: 06/05-06/2009



Most Technology Service Co., Ltd.  
Tel: (86) 755-26825180 Fax: (86) 755-86170310  
Http:// www. szmost.com Email: szmost@szmost.com

#### TABLE OF CONTENTS

**APPLICANT:** True Blue Wireless Inc.

**FCC ID:** WPU-BHTB10

#### TEST REPORT CONTAINING:

PAGE 1.....TEST EQUIPMENT LIST  
PAGE 2.....TEST PROCEDURE  
PAGE 3-5.....POWER LINE CONDUCTED INTERFERENCE  
PAGE 6-7.....RADIATION INTERFERENCE TEST DATA  
PAGE 8-11.....OCCUPIED BANDWIDTH AND PLOTS

#### EXHIBIT INCLUDED:

PAGE 1.....BLOCK DIAGRAM  
PAGE 2.....SCHEMATIC  
PAGE 3.....USERS MANUAL  
PAGE 4.....LABEL SAMPLE  
PAGE 5.....LABEL LOCATION  
PAGE 6.....EXTERNAL PHOTOGRAPHS  
PAGE 7.....INTERNAL PHOTOGRAPHS  
PAGE 8.....OPERATIONAL DESCRIPTION  
PAGE 9.....TEST SET UP PHOTOGRAPHS

**APPLICANT:** True Blue Wireless Inc.  
**FCC ID:** WPU-BHTB10

TABLE OF CONTENTS



Most Technology Service Co., Ltd.  
Tel: (86) 755-26825180 Fax: (86) 755-86170310  
Http:// www. szmost.com Email: szmost@szmost.com

## EMC Equipment List

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
EMI Test Receiver	ROHDE&SCHWARZ	ESCI	100492	Mar 10,2009	1 Year
LISN	ROHDE&SCHWARZ	ENV216	100093	Mar 10,2009	1 Year
EMI Test Receiver	ROHDE&SCHWARZ	ESCI	101202	Mar 10,2009	1 Year
Spectrum Analyzer	ANRITSU	MS2651B	6200238316	Mar 10,2009	1 Year
50 Coaxial Switch	ANRITSU CORP	MP59B	6200283933	Mar 10,2009	1 Year
Bilog Antenna	Sunol	JB3	A121206	Mar 10,2009	1 Year
Horn Antenna	EMCO	3115	640201028-06	Mar 10,2009	1 Year
50 Coaxial Switch	ANRITSU CORP	MP59B	6200283933	Mar 10,2009	1 Year
Cable	Resenberger	N/A	NO.1	Mar 10,2009	1 Year
Cable	SCHWARZBECK	N/A	NO.2	Mar 10,2009	1 Year
Cable	SCHWARZBECK	N/A	NO.3	Mar 10,2009	1 Year
Single Phase Power Line Filter	Kikusui	LIN40MA-PC R-L	LM002352	Mar 10,2009	1 Year
AC Power Source	Kikusui	AC40MA	LM003232	Mar 10,2009	1 Year
Test analyzer	Kikusui	KHA1000	LM003720	Mar 10,2009	1 Year
ESD Tester	Kikusui	KES4021	LM003537	Mar 10,2009	1 Year
Signal Generator	IFR	2032	203002/100	Mar 10,2009	1 Year
Amplifier	A&R	150W1000	301584	NCR	NCR
Dual Directional Coupler	A&R	DC6080	301508	Mar 10,2009	1 Year
Power Head	A&R	PH2000	301193	Mar 10,2009	1 Year
Power Meter	A&R	PM2002	302799	Mar 10,2009	1 Year
Field Monitor	A&R	FM5004	300329	Mar 10,2009	1 Year
Field Probe	A&R	FP5000	300221	Mar 10,2009	1 Year
EMCPRO System	EM Test	UCS-500-M4	V0648102026	Mar 10,2009	1 Year
EMCPRO System	EM Test	UCS-500-M4	V0648102026	Mar 10,2009	1 Year

Remark:

Test Firm Name: Most Technology Service Co., Ltd.

Test Firm Address:

No. 5, 2nd Langshan Road, North District, Hi-tech Industrial Park, Nanshan, Shenzhen, Guangdong, China

FCC Registered Test Site Number: 490827

APPLICANT: True Blue Wireless Inc.

FCC ID: WPU-BHTB10



Most Technology Service Co., Ltd.  
Tel: (86) 755-26825180 Fax: (86) 755-86170310  
Http:// www. szmost.com Email: szmost@szmost.com

## TEST PROCEDURE

**GENERAL:** This report shall NOT be reproduced except in full without the written approval of MOST TECHNOLOGY SERVICE CO., LTD. The EUT was transmitting a test signal during the testing.

**POWER LINE CONDUCTED INTERFERENCE:** The test procedure used was ANSI Standard C63.4-2003 using a 50  $\mu$ H LISN. Both Lines were observed. The bandwidth of the receiver was 10kHz with an appropriate sweep speed. The ambient temperature of the EUT was 25 with a humidity of 58%.

**RADIATION INTERFERENCE:** The test procedure used was ANSI Standard C63.4-2003 using a ANRITSU spectrum analyzer with a pre-selector. The analyzer was calibrated in dB above a micro volt at the output of the antenna. The resolution bandwidth was 100 kHz and the video bandwidth was 300 kHz up to 1 GHz and 1 MHz with a video BW of 3 MHz above 1 GHz. The ambient temperature of the EUT was 25 with a humidity of 58%.

**FORMULA OF CONVERSION FACTORS:** The Field Strength at 3m was established by adding the meter reading of the spectrum analyzer (which is set to read in units of dBuV) to the antenna correction factor supplied by the antenna manufacturer and cable loss. The antenna correction factors and cable loss are stated in terms of dB. The gain of the Pre-selector was accounted for in the Spectrum Analyzer Meter Reading.

Example:

Freq (MHz) METER READING + ACF + CABLE = FS  
33 20 dBuV + 10.36 dB + 0.9 dB = 31.26 dBuV/m @ 3m

**ANSI STANDARD C63.4-2003 10.1.7 MEASUREMENT PROCEDURES:** The EUT was placed on a table 80 cm high and with dimensions of 1m by 1.5m. The EUT was placed in the center of the table (1.5m side). The table used for radiated measurements is capable of continuous rotation.

When an emission was found, the table was rotated to produce the maximum signal strength. At this point, the antenna was raised and lowered from 1m to 4m. The antenna was placed in both the horizontal and vertical planes.

The situation was similar for the conducted measurement except that the table did not rotate. The EUT was setup as described in ANSI Standard C63.4-2003 10.1.7 with the EUT 40 cm from the vertical ground wall.

APPLICANT: True Blue Wireless Inc.  
FCC ID: WPU-BHTB10



Most Technology Service Co., Ltd.  
Tel: (86) 755-26825180 Fax: (86) 755-86170310  
Http:// www. szmost. com Email: szmost@szmost. com

**APPLICANT:** True Blue Wireless Inc.

**FCC ID:** WPU-BHTB10

**NAME OF TEST:** POWER LINE CONDUCTED INTERFERENCE

**RULES PART NUMBER:** 15.207

**REQUIREMENTS:**

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56 *	56 to 46 *
0.5-5	56	46
5-30	60	50

\* Decreases with the logarithm of the frequency.

**TEST PROCEDURE:** ANSI STANDARD C63.4-2003

THE HIGHEST EMISSION READ FOR LINE 1 WAS 42.52dB<sub>UV</sub> @ 0.466MHz.

THE HIGHEST EMISSION READ FOR LINE 2 WAS 49.00dB<sub>UV</sub> @ 0.274MHz.

THE PLOTS ON THE NEXT PAGE REPRESENT THE EMISSIONS READ FOR POWER LINE CONDUCTED FOR THIS DEVICE.

APPLICANT: True Blue Wireless Inc.  
FCC ID: WPU-BHTB10

### Conducted Emission Measurement


File :TB10

Data :#1

Date: 2009/06/06

Time: 10:35:32

80.0 dBuV

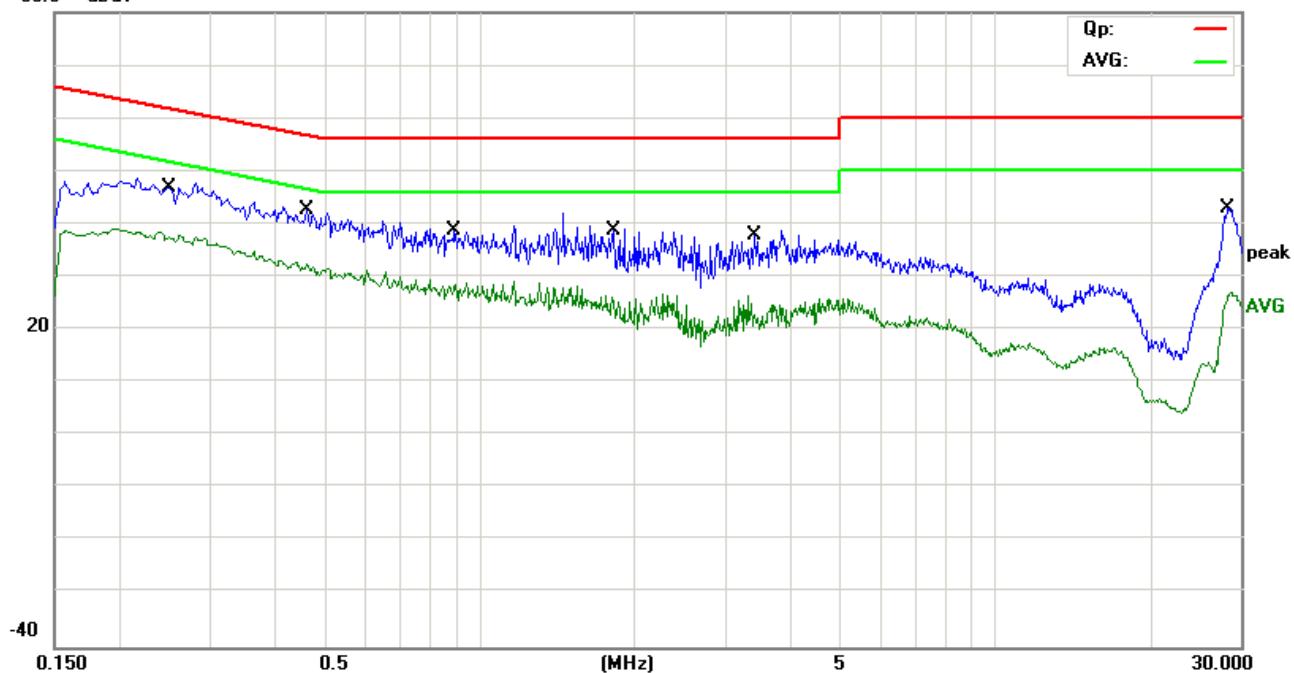

Site site #1

Phase: **L1**

Temperature: 26

Limit: FCC Part 15 C Conduction QP

Power: AC 120V/60Hz

Humidity: 60 %

EUT: Bluetooth Headset

M/N: TB10

Mode: Charging

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1		0.2500	35.30	11.67	46.97	61.76	-14.79	QP	
2	*	0.4660	32.29	10.23	42.52	56.58	-14.06	QP	
3		0.8980	28.76	10.00	38.76	56.00	-17.24	QP	
4		1.8220	29.67	9.18	38.85	56.00	-17.15	QP	
5		3.4220	27.49	10.42	37.91	56.00	-18.09	QP	
6		28.4220	34.05	9.00	43.05	60.00	-16.95	QP	

\*:Maximum data    x:Over limit    !:over margin

APPLICANT: True Blue Wireless Inc.  
 FCC ID: WPU-BHTB10

### Conducted Emission Measurement


File :TB10

Data :#2

Date: 2009/06/06

Time: 10:41:19

80.0 dBuV

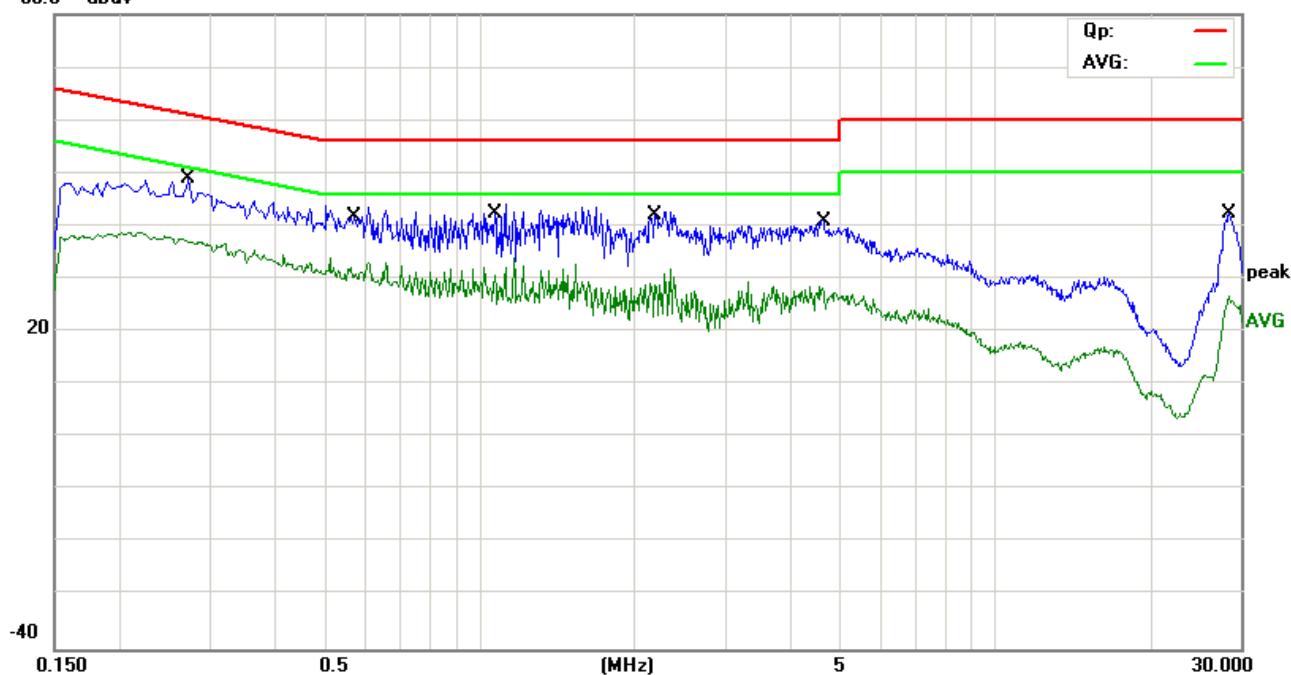

Site site #1

Phase: **N**

Temperature: 26

Limit: FCC Part 15 C Conduction QP

Power: AC 120V/60Hz

Humidity: 60 %

EUT: Bluetooth Headset

M/N: TB10

Mode: Charging

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1	*	0.2740	37.49	11.51	49.00	61.00	-12.00	QP	
2		0.5740	31.79	10.00	41.79	56.00	-14.21	QP	
3		1.0740	32.52	9.93	42.45	56.00	-13.55	QP	
4		2.1940	32.76	9.19	41.95	56.00	-14.05	QP	
5		4.6940	27.98	11.69	39.67	56.00	-16.33	QP	
6		28.4860	33.28	9.00	42.28	60.00	-17.72	QP	

\*:Maximum data    x:Over limit    !:over margin

APPLICANT: True Blue Wireless Inc.  
 FCC ID: WPU-BHTB10



Most Technology Service Co., Ltd.  
Tel: (86) 755-26825180 Fax: (86) 755-86170310  
Http:// www. szmost.com Email: szmost@szmost.com

**APPLICANT:** True Blue Wireless Inc.

**FCC ID:** WPU-BHTB10

**NAME OF TEST:** RADIATION INTERFERENCE

**RULES PART NUMBER:** 15.249, 15.209

**REQUIREMENTS:**

FIELD STRENGTH of Fundamental:	FIELD STRENGTH of Harmonics	S15.209
902-928 MHZ 2.4-2.4835 GHz		30 - 88 MHz 40 dBuV/m @3M 88 - 216 MHz 43.5 216 - 960 MHz 46
94 dBuV/m @3m	54 dBuV/m @3m	ABOVE 960 MHz 54dBuV/m

EMISSIONS RADIATED OUTSIDE OF THE SPECIFIED FREQUENCY BANDS, EXCEPT FOR HARMONICS, SHALL BE ATTENUATED BY AT LEAST 50 dB BELOW THE LEVEL OF THE FUNDAMENTAL OR TO THE GENERAL RADIATED EMISSION LIMITS IN 15.209, WHICHEVER IS THE LESSER ATTENUATION.

**REMARK:** Emissions attenuated more than 20 dB below the permissible value are not reported.

Frequency (MHz)	Antenna Polarization	Emission Level (dBuV/m)			FCC 15 Subpart C Limit (dBuV/m)
		Avg	QP	Peak	
Low frequency(2402.00MHz)					
209.98	Vertical	---	33.26	35.15	43.5
2402.23	Vertical	---	---	84.20	94.0
4804.10	Vertical	---	---	34.62	54.0
7206.11	Vertical	---	---	30.24	54.0
9608.22	Vertical	---	---	32.10	54.0
174.24	Horizontal	---	---	34.54	43.5
2402.00	Horizontal	---	---	83.89	94.0
4804.10	Horizontal	---	---	33.45	54.0
7206.19	Horizontal	---	---	32.03	54.0
9608.22	Horizontal	---	---	31.54	54.0
Middle frequency(2441.00MHz)					
209.65	Vertical	---	34.72	36.20	43.5
2441.13	Vertical	---	---	84.10	94.0
4882.14	Vertical	---	---	34.76	54.0
7323.27	Vertical	---	---	29.60	54.0
9764.35	Vertical	---	---	32.20	54.0
174.32	Horizontal	---	33.13	35.24	43.5
2441.64	Horizontal	---	---	84.02	94.0
4882.18	Horizontal	---	---	32.07	54.0
7323.22	Horizontal	---	---	31.67	54.0
9764.34	Horizontal	---	---	29.27	54.0

APPLICANT: True Blue Wireless Inc.  
FCC ID: WPU-BHTB10



Most Technology Service Co., Ltd.  
Tel: (86) 755-26825180 Fax: (86) 755-86170310  
Http:// www. szmost.com Email: szmost@szmost.com

**APPLICANT:** True Blue Wireless Inc.

**FCC ID:** WPU-BHTB10

**NAME OF TEST:** RADIATION INTERFERENCE

**RULES PART NUMBER:** 15.249, 15.209

**REQUIREMENTS:**

FIELD STRENGTH of Fundamental:	FIELD STRENGTH of Harmonics	S15.209
902-928 MHZ		30 - 88 MHz 40 dBuV/m @3M
2.4-2.4835 GHz		88 - 216 MHz 43.5
94 dBuV/m @3m	54 dBuV/m @3m	216 - 960 MHz 46 ABOVE 960 MHz 54 dBuV/m

EMISSIONS RADIATED OUTSIDE OF THE SPECIFIED FREQUENCY BANDS, EXCEPT FOR HARMONICS, SHALL BE ATTENUATED BY AT LEAST 50 dB BELOW THE LEVEL OF THE FUNDAMENTAL OR TO THE GENERAL RADIATED EMISSION LIMITS IN 15.209, WHICHEVER IS THE LESSER ATTENUATION.

**REMARK:** Emissions attenuated more than 20 dB below the permissible value are not reported.

**Continued:**

Frequency (MHz)	Antenna Polarization	Emission Level (dBuV/m)			FCC 15 Subpart C Limit (dBuV/m)
		Avg	QP	Peak	
High frequency(2480.00MHz)					
210.42	Vertical	---	33.34	35.22	43.5
2480.00	Vertical	---	----	84.05	94.0
4960.10	Vertical	---	---	32.90	54.0
7440.20	Vertical	---	---	31.63	54.0
9920.00	Vertical	---	---	31.89	54.0
175.00	Horizontal	---	32.01	35.15	43.5
2480.00	Horizontal	---	---	83.90	94.0
4960.10	Horizontal	---	---	32.90	54.0
7440.20	Horizontal	---	---	32.21	54.0
9920.00	Horizontal	---	---	30.27	54.0

**TEST PROCEDURE:** ANSI Standard C63.4-2003 using a ANRITSU spectrum analyzer with a pre-selector and an appropriate antenna. The resolution bandwidth of spectrum analyzer was 100 kHz below 1 GHz and 1 MHz above 1 GHz. An appropriate sweep speed was used. When an emission was found, the table was rotated to produce the maximum signal strength. The antenna was placed in both the horizontal and vertical planes and the worse case emissions were reported. The spectrum was searched to at least the tenth (10) harmonic of the fundamental.

APPLICANT: True Blue Wireless Inc.  
FCC ID: WPU-BHTB10



Most Technology Service Co., Ltd.  
Tel: (86) 755-26825180 Fax: (86) 755-86170310  
Http:// www. szmost.com Email: szmost@szmost.com

**APPLICANT:** True Blue Wireless Inc.

**FCC ID:** WPU-BHTB10

**NAME OF TEST:** Occupied Bandwidth and Band Edge Compliance

**RULES PART NUMBER:** 15.249

**REQUIREMENTS:** The field strength of any emissions appearing outside the band edges and up to 10 kHz above and below the band edges shall be attenuated at least 50 dB below the level of the carrier or to the general limits of 15.209.

Occupied Bandwidth plots are included on the following pages

**METHOD OF MEASUREMENT:** A small sample of the transmitter output was fed into the spectrum analyzer and the attached plot was printed. The vertical scale is set to -10 dB per division.

**TEST RESULTS:** The unit DOES meet the FCC requirements.


Band Edge Compliance Test						
Band Edge Frequency	Antenna Polarization	AV dBuV/m	QP dBuV/m	Peak dBuV/m	Limit (Peak) dBuV/m	Limit (AV) dBuV/m
2390.0 MHz	H	---	---	40.34	74.00	54.00
2390.0 MHz	V	---	---	41.80	74.00	54.00
2483.5 MHz	H	---	---	39.67	74.00	54.00
2483.5 MHz	V	---	---	40.03	74.00	54.00

APPLICANT: True Blue Wireless Inc.  
FCC ID: WPU-BHTB10



Most Technology Service Co., Ltd.  
Tel: (86) 755-26825180 Fax: (86) 755-86170310  
Http:// www. szmost.com Email: szmost@szmost.com

High

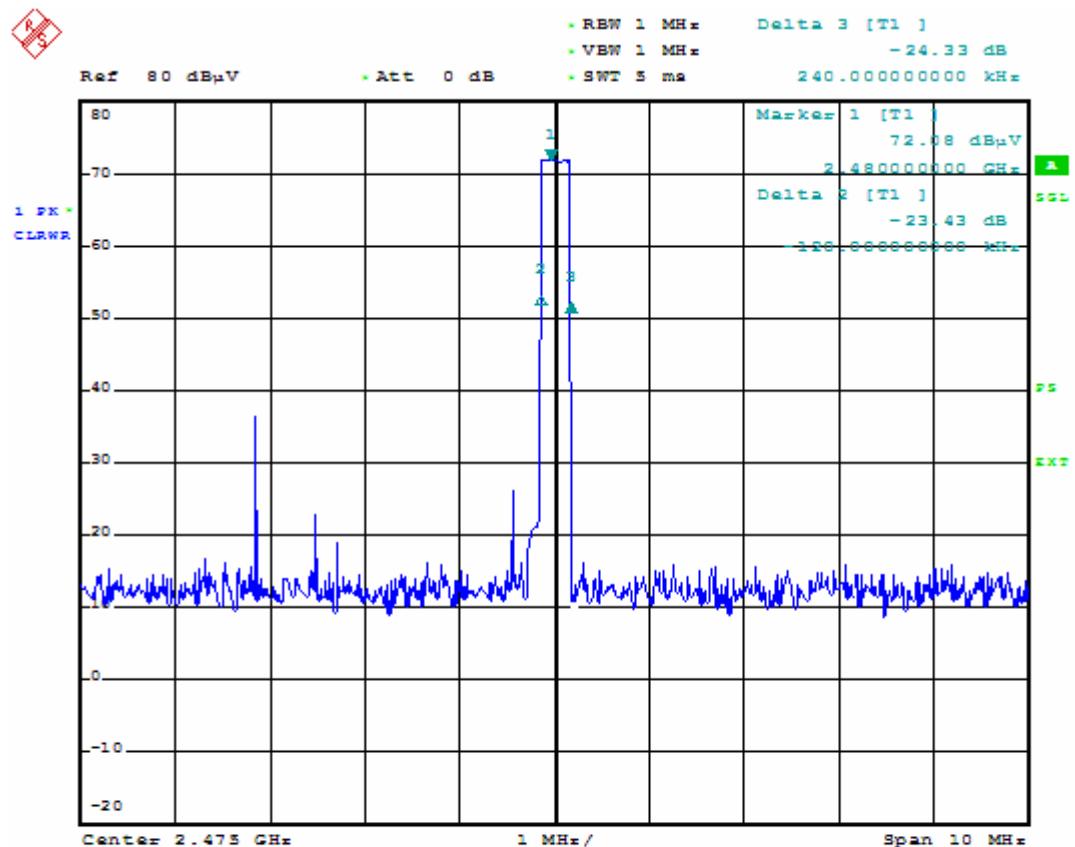


APPLICANT: True Blue Wireless Inc.  
FCC ID: WPU-BHTB10



Most Technology Service Co., Ltd.  
Tel: (86) 755-26825180 Fax: (86) 755-86170310  
Http:// www. szmost. com Email: szmost@szmost. com

Middle

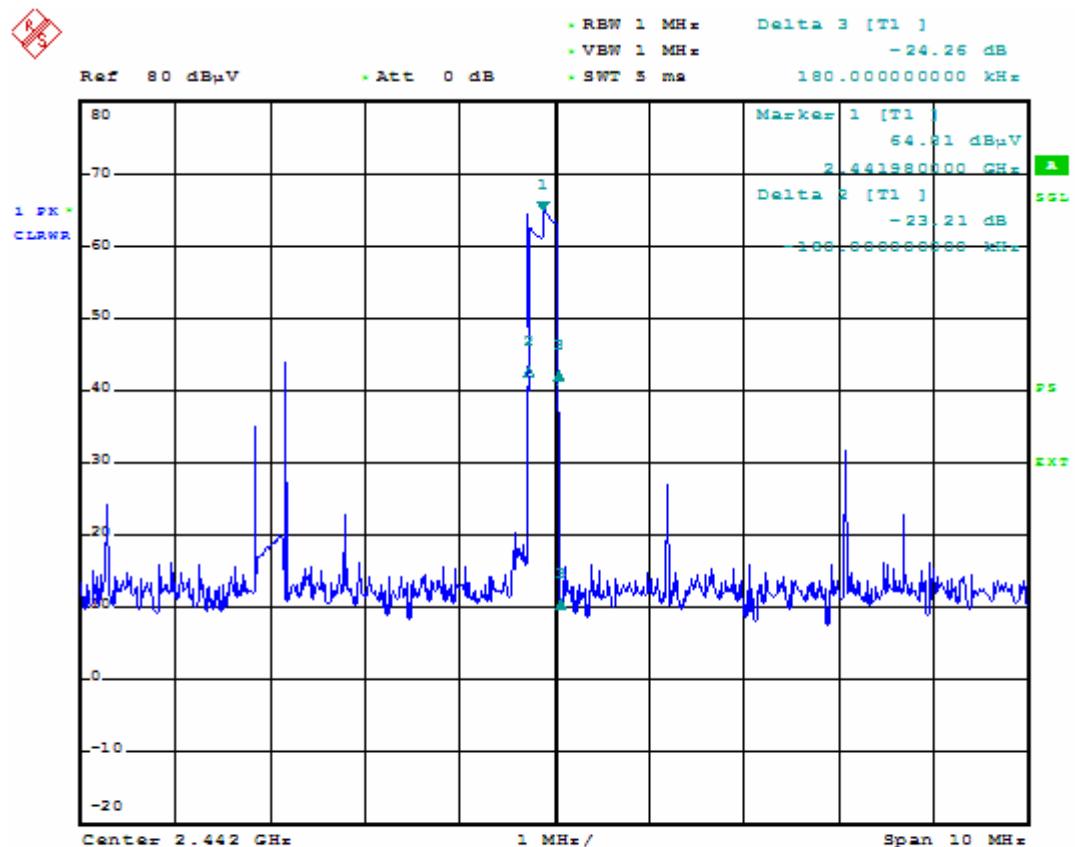


APPLICANT: True Blue Wireless Inc.  
FCC ID: WPU-BHTB10



Most Technology Service Co., Ltd.  
Tel: (86) 755-26825180 Fax: (86) 755-86170310  
Http:// www. szmost. com Email: szmost@szmost. com

Low

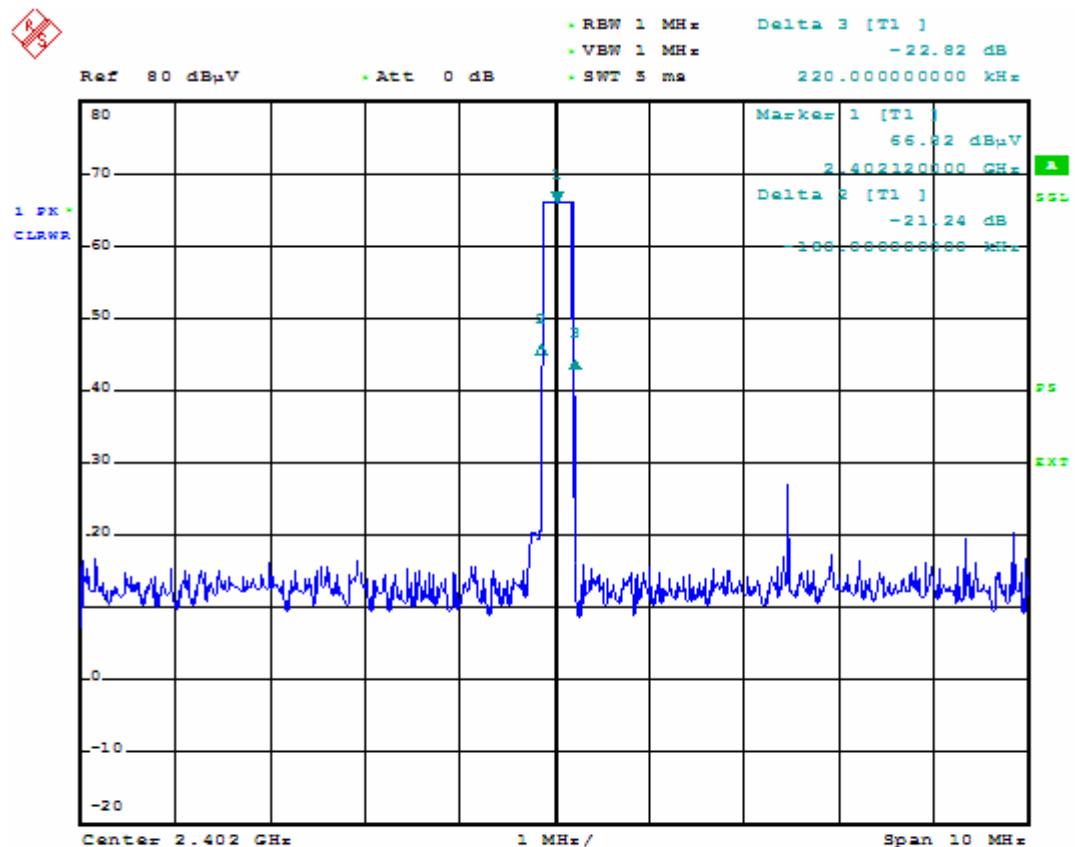

APPLICANT: True Blue Wireless Inc.  
FCC ID: WPU-BHTB10