



**FCC CFR47 PART 15 SUBPART E
INDUSTRY CANADA RSS-210 ISSUE 7**

CERTIFICATION TEST REPORT

FOR

CABIN WIRELESS ACCESS POINT

MODEL NUMBER: CWAP1120

**FCC ID: WPX-CWAP
IC: 8014A-CWAP**

REPORT NUMBER: 08U12179-2

ISSUE DATE: NOVEMBER 3, 2008

Prepared for
Aircell LLC
1250 NORTH ARLINGTON HEIGHTS RD.
ITASCA, IL 60143, U.S.A.

Prepared by
COMPLIANCE CERTIFICATION SERVICES
47173 BENICIA STREET
FREMONT, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888



NVLAP LAB CODE 200065-0

Revision History

Rev.	Issue Date	Revisions	Revised By
--	11/3/08	Initial Issue	F. Ibrahim

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS.....	4
2. TEST METHODOLOGY	5
3. FACILITIES AND ACCREDITATION.....	5
4. CALIBRATION AND UNCERTAINTY	5
4.1. MEASURING INSTRUMENT CALIBRATION.....	5
4.2. MEASUREMENT UNCERTAINTY.....	5
5. EQUIPMENT UNDER TEST	6
5.1. DESCRIPTION OF EUT.....	6
5.2. MAXIMUM OUTPUT POWER.....	6
5.3. DESCRIPTION OF AVAILABLE ANTENNAS.....	6
5.4. SOFTWARE AND FIRMWARE.....	6
5.5. WORST-CASE CONFIGURATION AND MODE	6
5.6. DESCRIPTION OF TEST SETUP.....	7
6. TEST AND MEASUREMENT EQUIPMENT	9
7. ANTENNA PORT TEST RESULTS	10
7.1. 802.11a MODE IN THE 5.2 GHz BAND.....	10
7.1.1. 26 dB and 99% BANDWIDTH	10
7.1.2. OUTPUT POWER	14
7.1.3. AVERAGE POWER	18
7.1.4. PEAK POWER SPECTRAL DENSITY.....	19
7.1.5. PEAK EXCURSION	23
7.1.6. CONDUCTED SPURIOUS EMISSIONS.....	27
8. RADIATED TEST RESULTS	31
8.1. LIMITS AND PROCEDURE	31
8.2. TRANSMITTER ABOVE 1 GHz	32
8.2.1. TX ABOVE 1 GHz FOR 802.11a MODE IN THE LOWER 5.2 GHz BAND	32
8.3. RECEIVER ABOVE 1 GHz	41
8.3.1. RX ABOVE 1 GHz FOR 20 MHz BANDWIDTH IN THE 5.2 GHz BAND	41
9. MAXIMUM PERMISSIBLE EXPOSURE.....	42
10. SETUP PHOTOS	46

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: Aircell LLC
1250 NORTH ARLINGTON HEIGHTS RD.
ITASCA, IL 60143, U.S.A.

EUT DESCRIPTION: CABIN WIRELESS ACCESS POINT

MODEL: CWAP1120

SERIAL NUMBER: 1295610098

DATE TESTED: OCTOBER 22-28, 2008

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart E	Pass
INDUSTRY CANADA RSS-210 Issue 7 Annex 9	Pass
INDUSTRY CANADA RSS-GEN Issue 2	Pass

Compliance Certification Services, Inc. (CCS) tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by CCS based on interpretations and/or observations of test results. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by CCS and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by CCS will constitute fraud and shall nullify the document. No part of this report may be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any government agency.

Approved & Released For CCS By:

Tested By:



FRANK IBRAHIM
EMC SUPERVISOR
COMPLIANCE CERTIFICATION SERVICES



TOM CHEN
EMC ENGINEER
COMPLIANCE CERTIFICATION SERVICES

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4-2003, FCC CFR 47 Part 2, FCC CFR 47 Part 15, RSS-GEN Issue 2, and RSS-210 Issue 7.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 Benicia Street, Fremont, California, USA.

CCS is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://www.ccsemc.com>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Power Line Conducted Emission	+/- 2.3 dB
Radiated Emission	+/- 3.4 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is an 802.11a/b/g transceiver.

The radio module is manufactured by Cisco.

5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak conducted output power as follows:

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
5180 - 5240	802.11a	4.89	3.08

5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes a Patch antenna, with a maximum gain of 7.3 dBi in the 5.2 GHz band, the antenna has a cable loss of 0.6 dB in the 5.2 GHz band, therefore, the effective antenna gain is 7.3 dBi – 0.6 dB = **6.7 dBi**.

5.4. SOFTWARE AND FIRMWARE

The firmware installed in the EUT during testing was 12.3(8)JEA.

5.5. WORST-CASE CONFIGURATION AND MODE

For Radiated Emissions below 1 GHz, the channel with highest conducted output power was selected. The channel with highest conducted output power was Low Channel (2412 MHz) in 11g mode.

The worst-case data rate was determined from previous experience with this radio module to be 1 Mbps for 11b, 6 Mbps for 11g and 11a modes.

5.6. DESCRIPTION OF TEST SETUP


SUPPORT EQUIPMENT

PERIPHERAL SUPPORT EQUIPMENT LIST				
Description	Manufacturer	Model	Serial Number	FCC ID
Laptop PC	HP	CRVSA-O2T1-75	CN24600052	N/A
Adaptor	HP	PPP014S	56A570BU4PX6D7	N/A
Antenna	SUNNER	SWA2458/360/7/20/V_	717255	N/A

I/O CABLES

I/O CABLE LIST						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length	Remarks
1	AC	1	AC	Un-Shielded	2.0 m	N/A
2	AC	1	AC	Un-Shielded	1.5m	N/A
3	DC	1	DC	Un-Shielded	2.0 m	N/A
4	RS232	1	DB9	Un-Shielded	1.0 m	N/A
5	Ethernet	1	RJ45	Shielded	6.5 m	N/A
6	Antenna	1	TNC-Type	Shielded	0.9m	N/A

SETUP DIAGRAM FOR TESTS

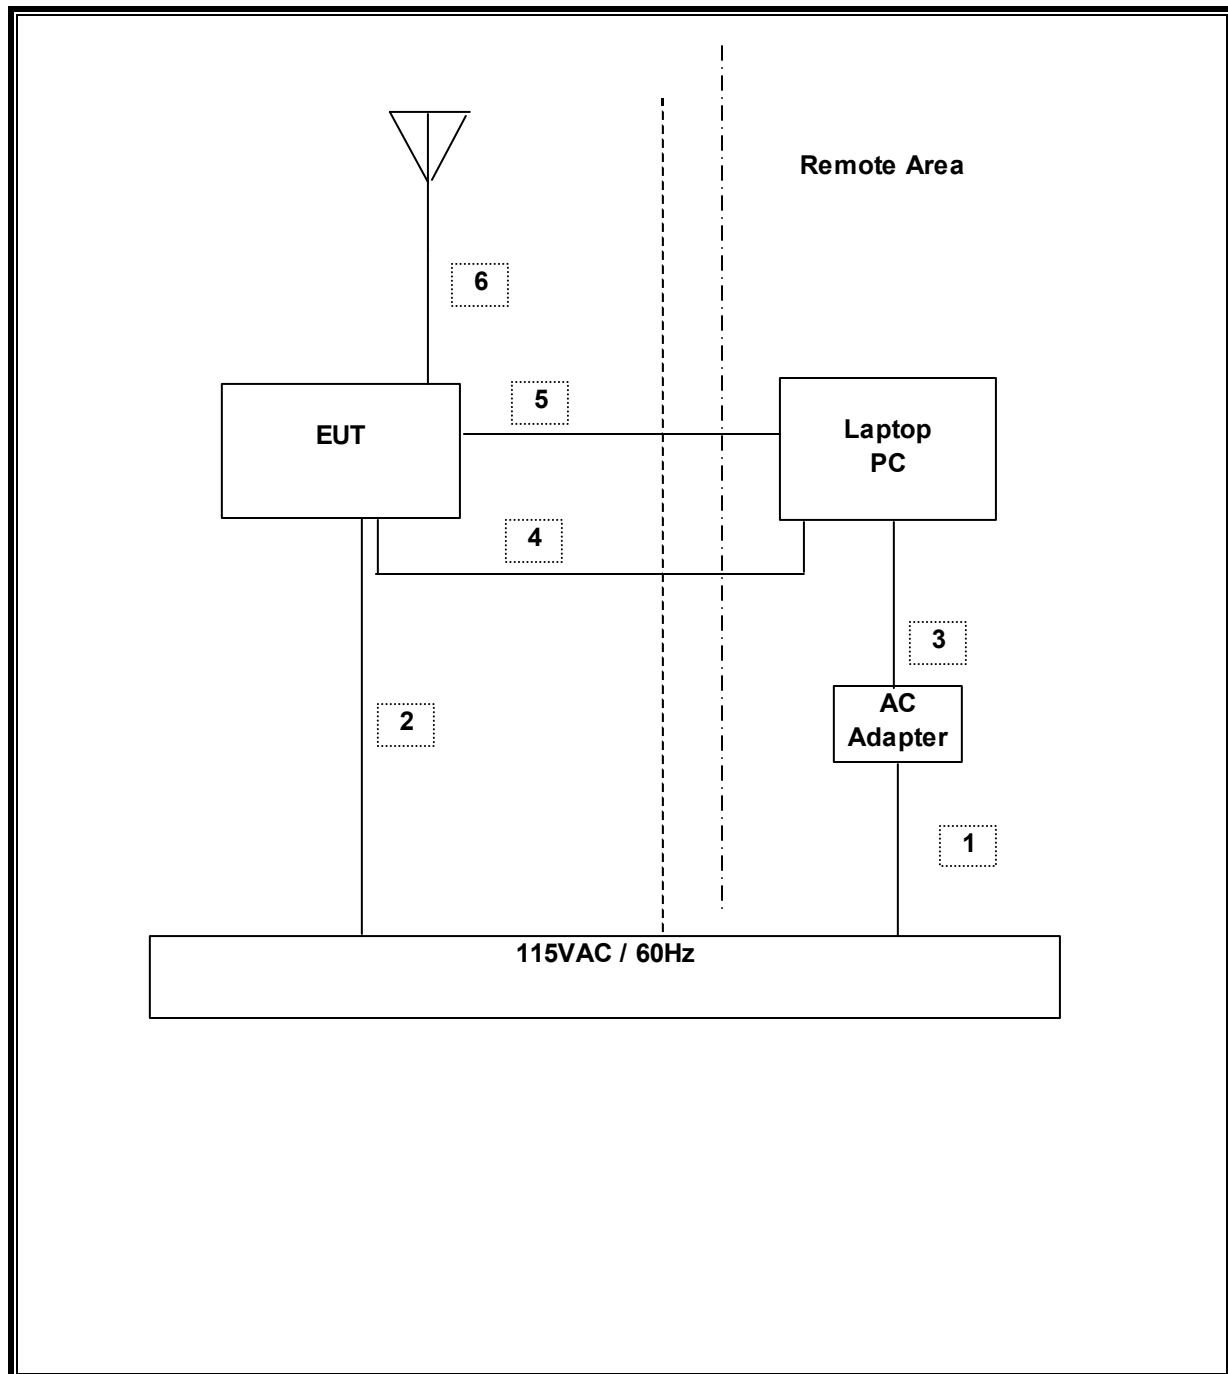

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST					
Description	Manufacturer	Model	Asset	Cal Date	Cal Due
Preamplifier, 1300 MHz	Agilent / HP	8447D	N/A	03/31/08	03/31/09
Spectrum Analyzer, 44 GHz	Agilent / HP	E4446A	C01069	04/08/08	10/08/09
EMI Receiver, 2.9 GHz	Agilent / HP	8542E	C00957	06/19/08	09/19/09
RF Filter Section, 2.9 GHz	Agilent / HP	85420E	C00958	06/19/08	09/19/09
Antenna, Bilog, 2 GHz	Sunol Sciences	JB1	C01016	02/11/08	02/11/09
Antenna, Horn, 18 GHz	EMCO	3115	C00872	04/22/08	04/22/09
Preamplifier, 26.5 GHz	Agilent / HP	8449B	C01052	08/05/08	08/05/09
Preamplifier, 40 GHz	Miteq	NSP4000-SP2	C00990	09/11/08	10/11/09
Antenna, Horn, 26.5 GHz	ARA	MMH-1826/B	C00980	09/29/07	11/28/08
Antenna, Horn, 40 GHz	ARA	MMH-2640/B	C00981	09/29/07	11/28/08

7. ANTENNA PORT TEST RESULTS

7.1. 802.11a MODE IN THE 5.2 GHz BAND

7.1.1. 26 dB and 99% BANDWIDTH

LIMITS

None; for reporting purposes only.


TEST PROCEDURE


The transmitter output is connected to the spectrum analyzer. The RBW is set to 1% to 3% of the measured bandwidth. The VBW is set to 3 times the RBW. The sweep time is coupled. The spectrum analyzer internal bandwidth function is utilized.


RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	5180	17.332	16.2253
Middle	5200	17.708	16.5087
High	5240	17.799	16.4741

26 dB and 99% BANDWIDTH

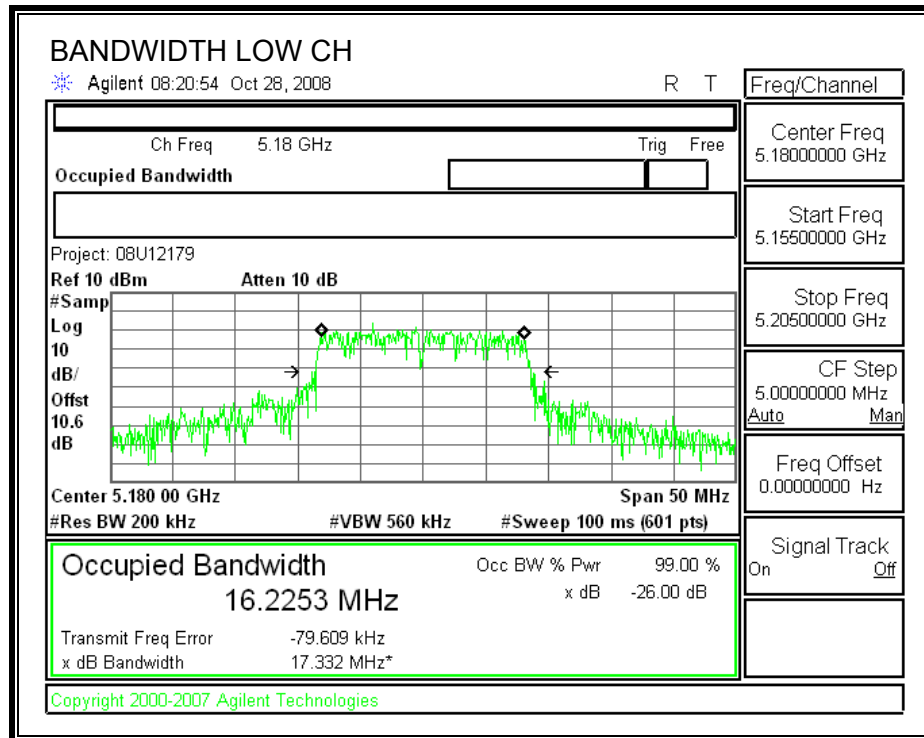

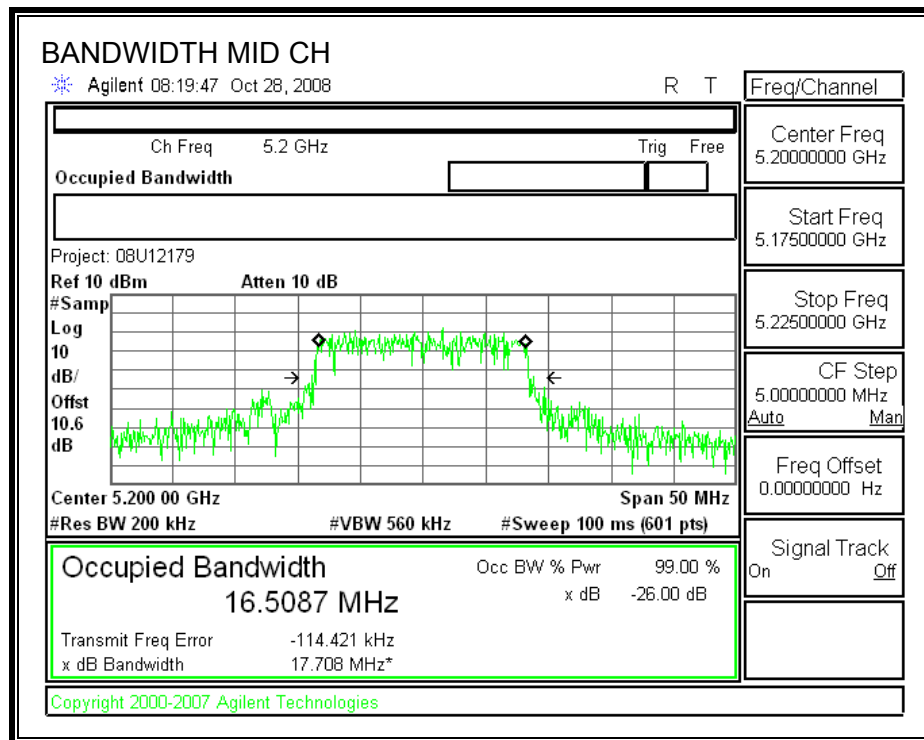

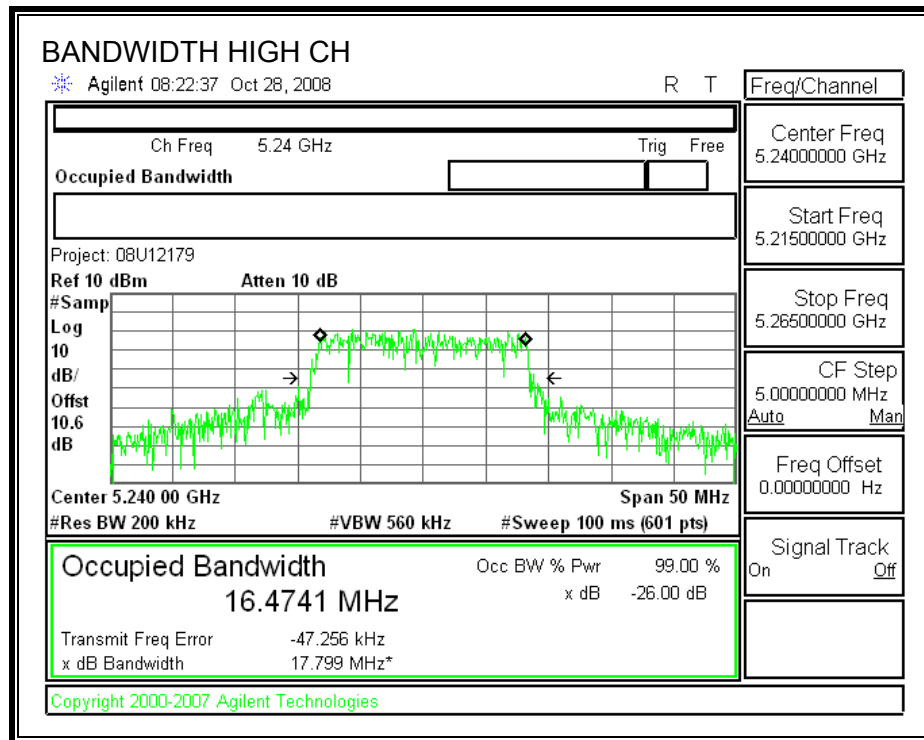

7.1.2. OUTPUT POWER

LIMITS

FCC §15.407 (a) (1)

IC RSS-210 A9.2 (1)

For the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 50 mW or $4 \text{ dBm} + 10 \log B$, where B is the 26-dB emission bandwidth in MHz. If transmitting antennas of directional gain greater than 6 dBi are used, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

The antenna gain is 7.3 dBi, it has a cable loss of 0.6 dB; therefore the effective antenna gain is $7.3 \text{ dBi} - 0.6 \text{ dB} = \mathbf{6.7 \text{ dBi}}$.

TEST PROCEDURE

The test is performed in accordance with FCC Public Notice: APPENDIX A Guidelines for Assessing Unlicensed National Information Infrastructure (U-NII) Devices – Part 15, Subpart E, August 2002.

The transmitter output operates continuously therefore Method # 1 is used.

RESULTS


Limit


Channel	Frequency (MHz)	Fixed Limit (dBm)	B (MHz)	4 + 10 Log B Limit (dBm)	Antenna Gain (dBi)	Limit (dBm)
Low	5180	17	17.332	16.39	6.70	15.69
Mid	5200	17	17.708	16.48	6.70	15.78
High	5240	17	17.799	16.50	6.70	15.80


Results

Channel	Frequency (MHz)	Power (dBm)	Limit (dBm)	Margin (dB)
Low	5180	4.89	15.69	-10.80
Mid	5200	4.12	15.78	-11.66
High	5240	4.05	15.80	-11.75

OUTPUT POWER

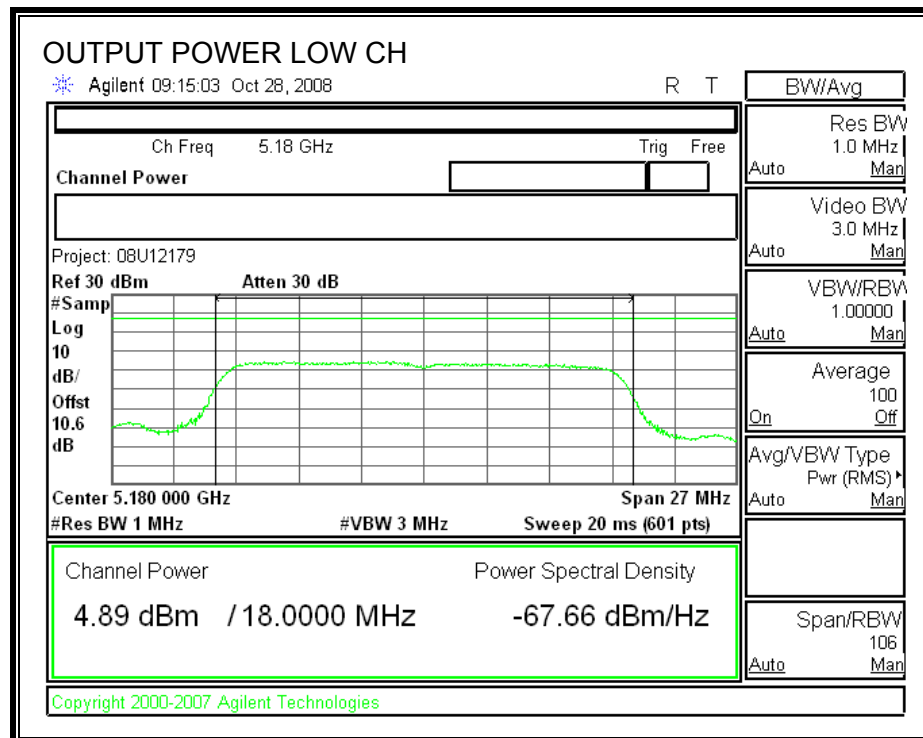

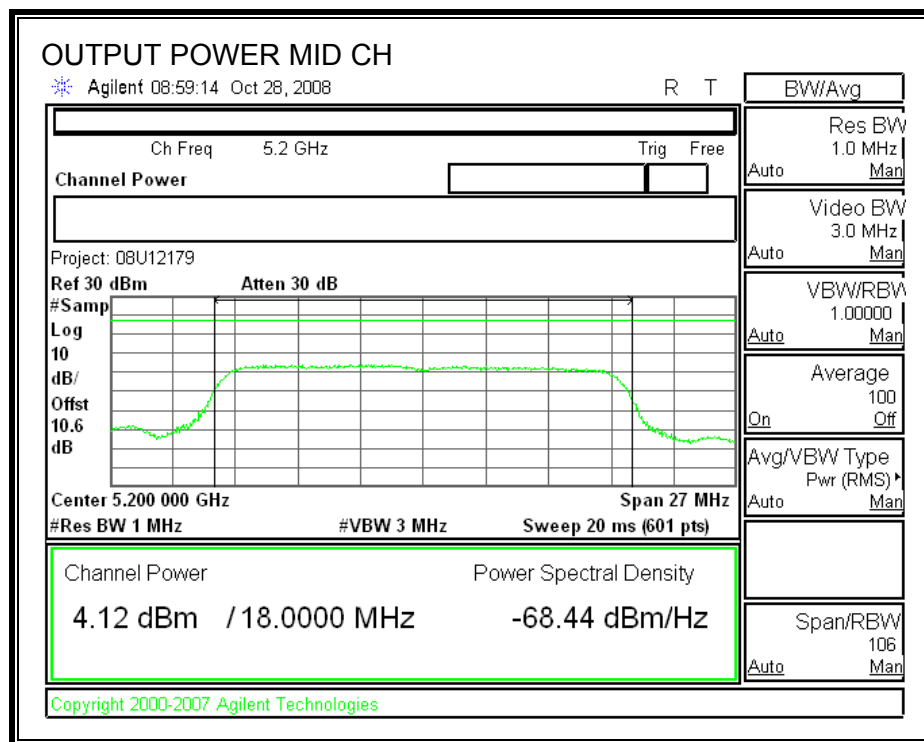

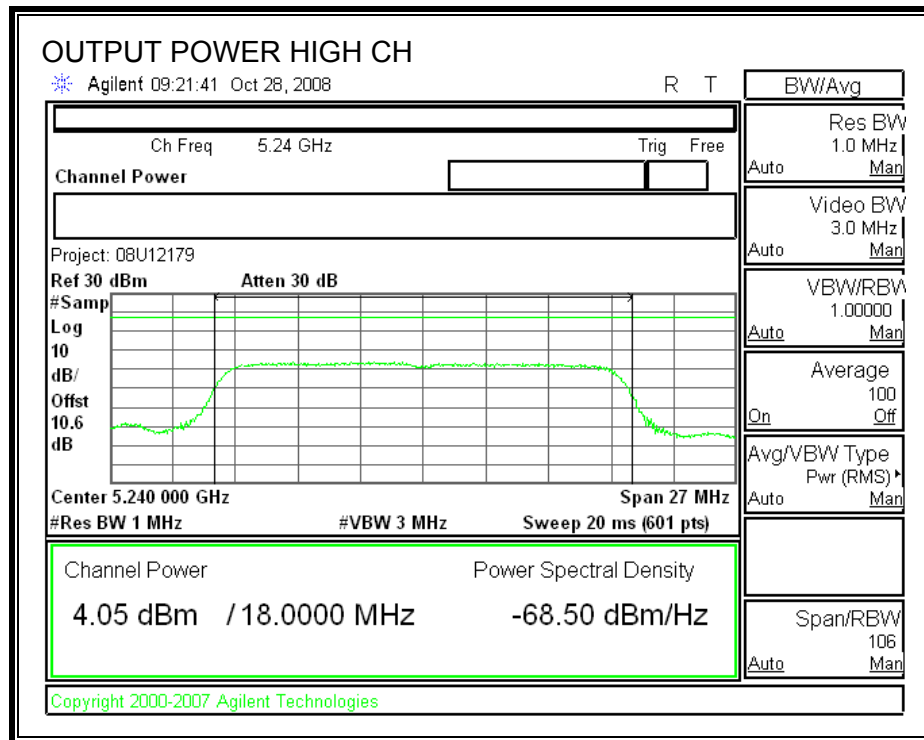

7.1.3. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

RESULTS

The cable assembly insertion loss of 10.6 dB (including 10 dB pad and 0.6 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

Channel	Frequency (MHz)	Power (dBm)
Low	5180	4.00
Middle	5200	3.50
High	5240	3.20

7.1.4. PEAK POWER SPECTRAL DENSITY

LIMITS

FCC §15.407 (a) (1)

IC RSS-210 A9.2 (1)

For the 5.15-5.25 GHz band, the peak power spectral density shall not exceed 4 dBm in any 1 MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

The maximum antenna gain is 7.3 and it has a cable loss of 0.6 dB, so the effective antenna gain is $7.3 - 0.6 = 6.7$ dBi, therefore the limit is **3.3 dBm**.


TEST PROCEDURE


The test is performed in accordance with FCC Public Notice: APPENDIX A Guidelines for Assessing Unlicensed National Information Infrastructure (U-NII) Devices – Part 15, Subpart E, August 2002. PPSD method #2 was used.


RESULTS

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Margin (dB)
Low	5180	-5.384	3.3	-8.684
Middle	5200	-6.277	3.3	-9.577
High	5240	-6.345	3.3	-9.645

POWER SPECTRAL DENSITY

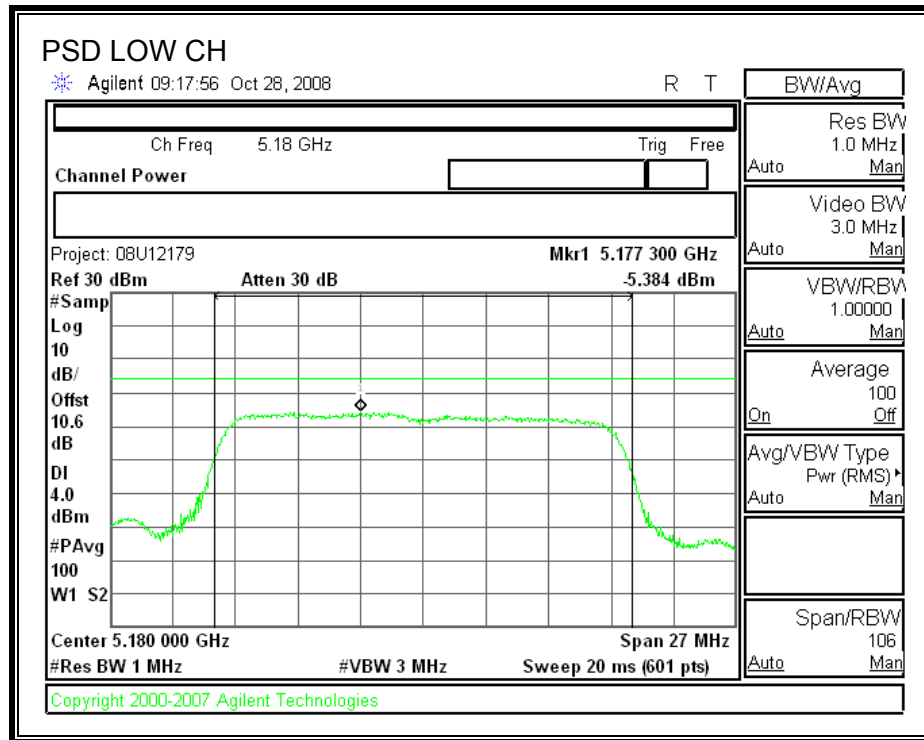

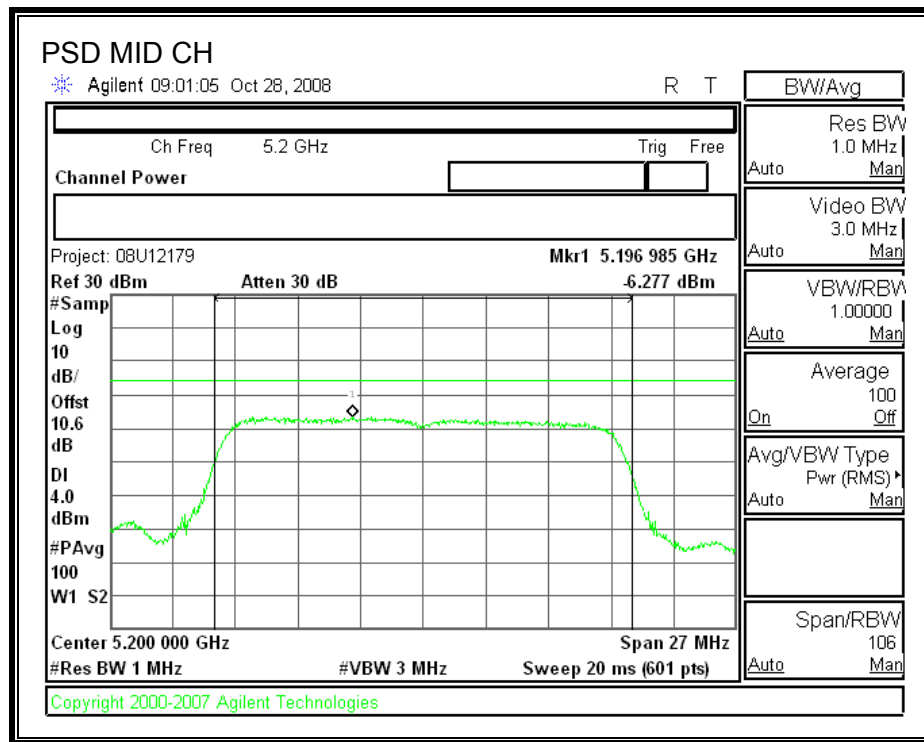

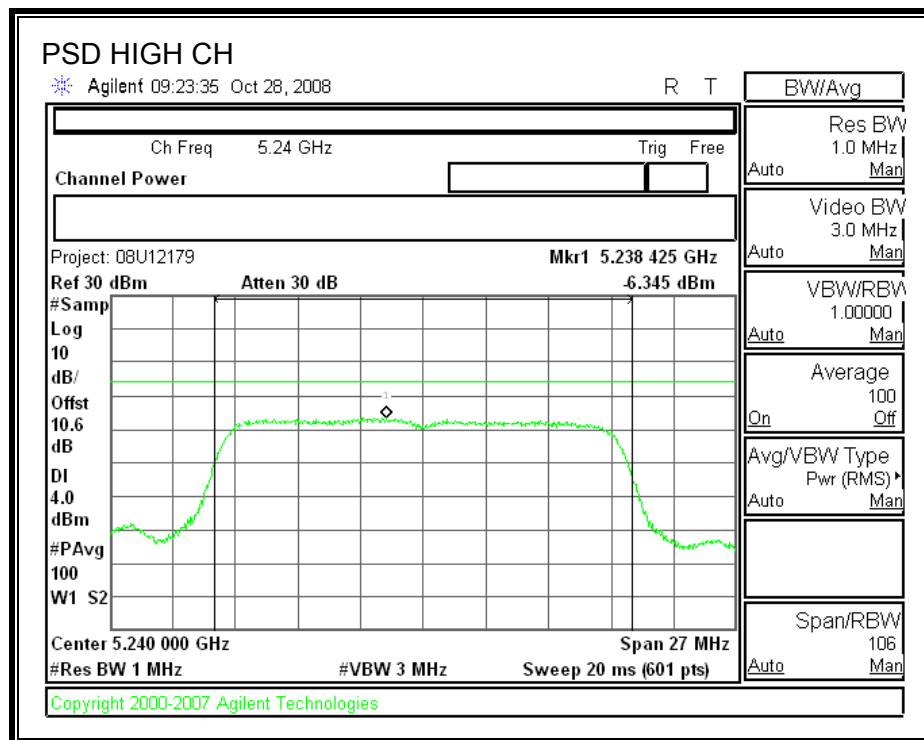

7.1.5. PEAK EXCURSION

LIMITS

FCC §15.407 (a) (6)

The ratio of the peak excursion of the modulation envelope (measured using a peak hold function) to the peak transmit power (measured as specified above) shall not exceed 13 dB across any 1 MHz bandwidth or the emission bandwidth whichever is less.

TEST PROCEDURE


The test is performed in accordance with FCC Public Notice: APPENDIX A Guidelines for Assessing Unlicensed National Information Infrastructure (U-NII) Devices – Part 15, Subpart E, August 2002.


Since Method # 1 was used for peak power measurements, Method # 1 settings are used for the second PPSD trace.


RESULTS

Channel	Frequency (MHz)	Peak Excursion (dB)	Limit (dB)	Margin (dB)
Low	5180	7.62	13	-5.38
Middle	5200	7.99	13	-5.01
High	5240	7.55	13	-5.45

PEAK EXCURSION

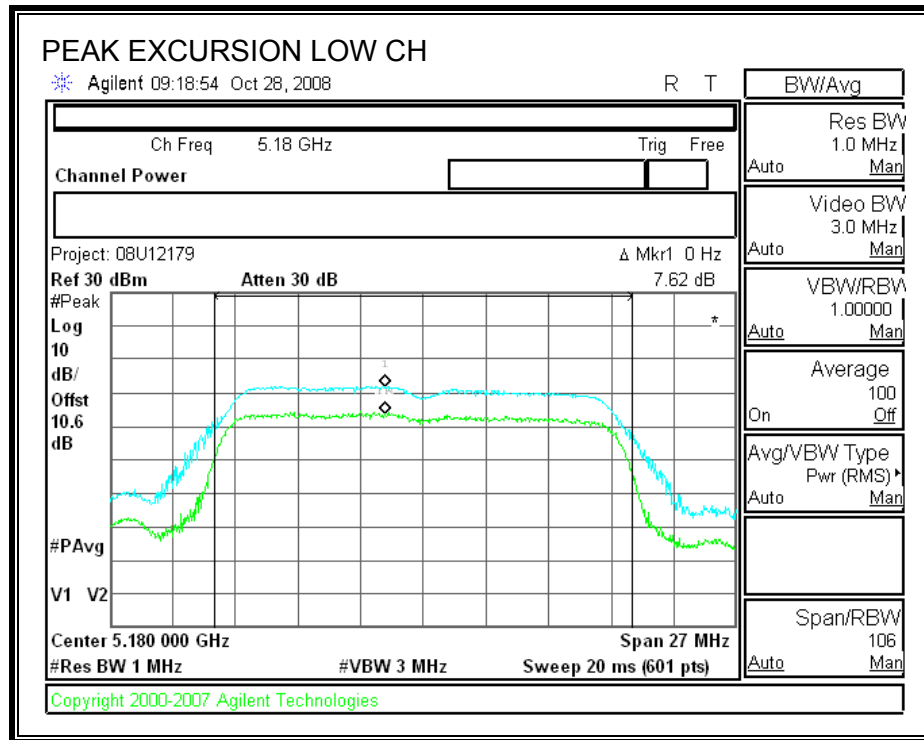

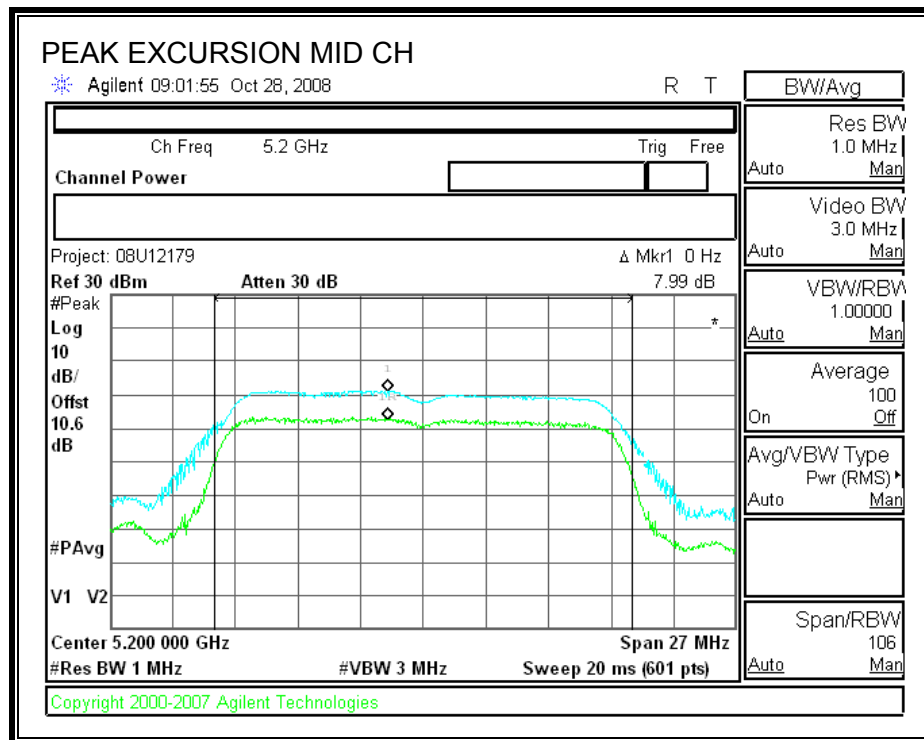

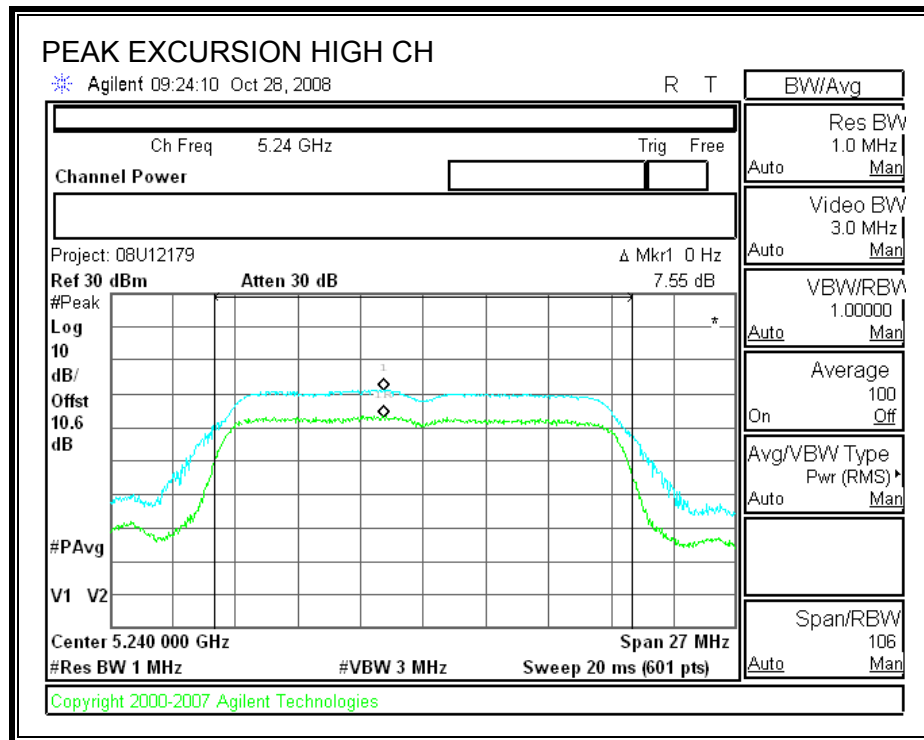

7.1.6. CONDUCTED SPURIOUS EMISSIONS

LIMITS

FCC §15.407 (b) (1)

IC RSS-210 A9.3 (1)

For transmitters operating in the 5.15-5.25 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm / MHz.

TEST PROCEDURE


Conducted RF measurements of the transmitter output are made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.


The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 1 MHz. The video bandwidth is set to 1 MHz. Peak detection measurements are compared to the average EIRP limit, adjusted for the maximum antenna gain. If necessary, additional average detection measurements are made.


Measurements are made over the 30 MHz to 40 GHz range with the transmitter set to the lowest, middle, and highest channels.

RESULTS

SPURIOUS EMISSIONS

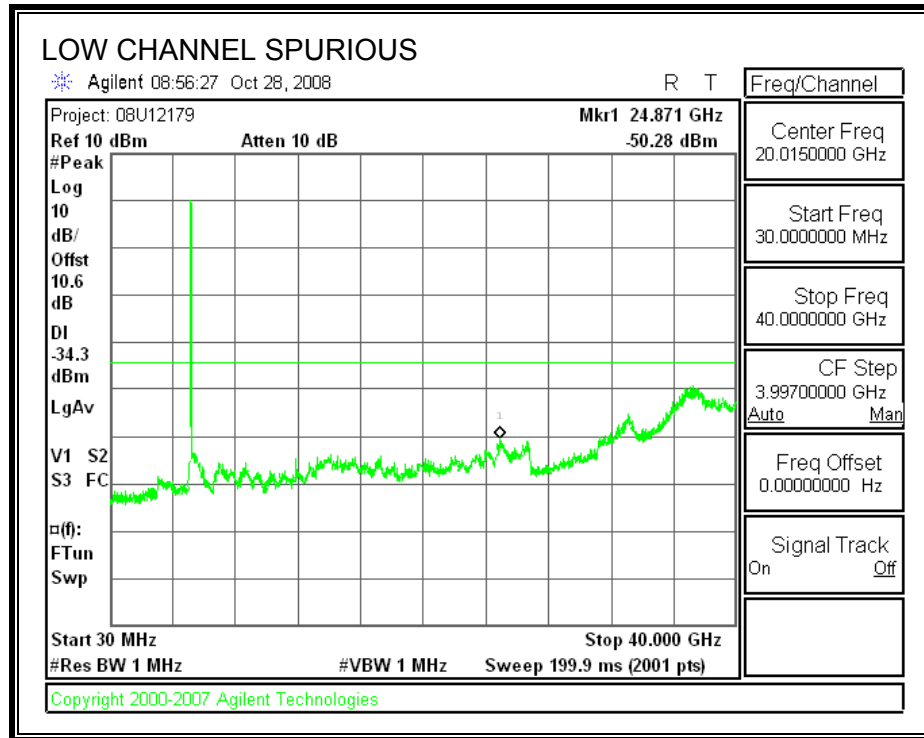

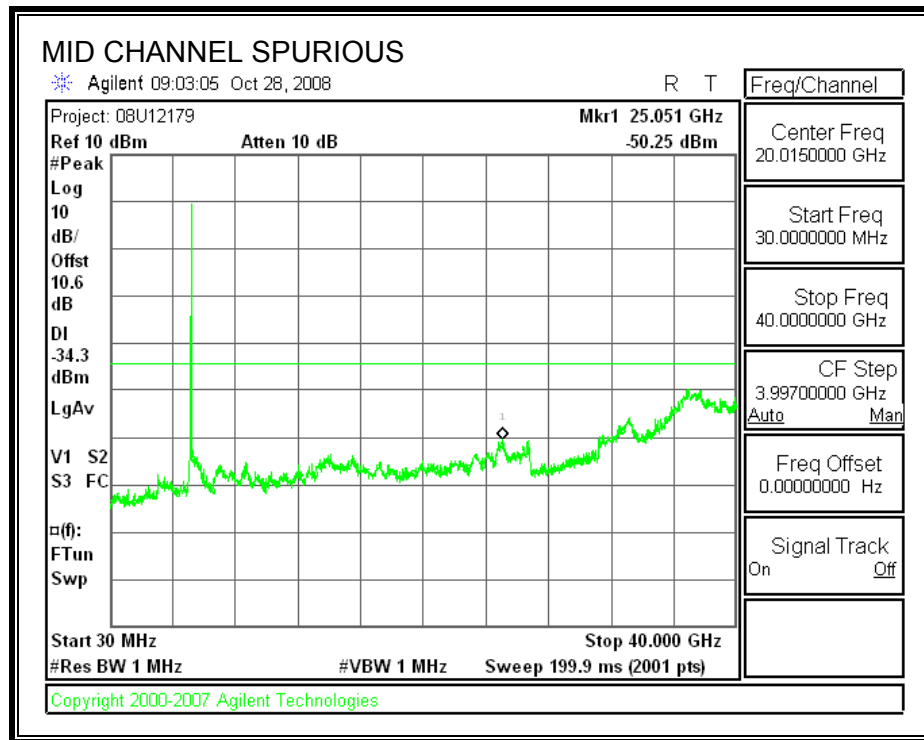

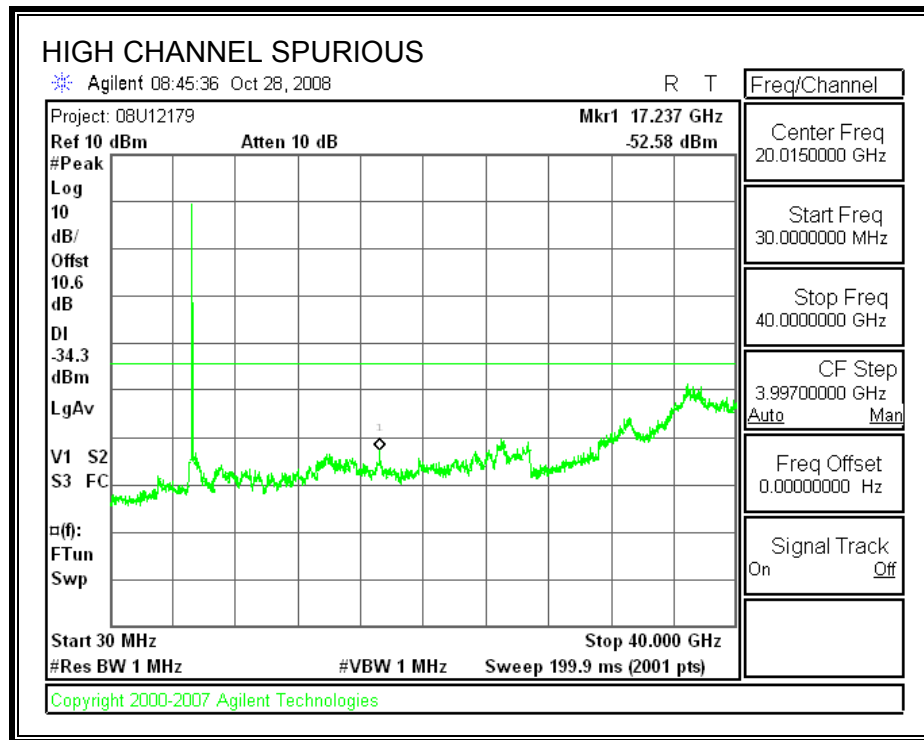

8. RADIATED TEST RESULTS

8.1. LIMITS AND PROCEDURE

LIMITS

FCC §15.205 and §15.209

IC RSS-210 Clause 2.6 (Transmitter)

IC RSS-GEN Clause 6 (Receiver)

Frequency Range (MHz)	Field Strength Limit ($\mu\text{V/m}$) at 3 m	Field Strength Limit (dB $\mu\text{V/m}$) at 3 m
30 - 88	100	40
88 - 216	150	43.5
216 - 960	200	46
Above 960	500	54

TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.4. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.


The spectrum from 30 MHz to 40 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in each applicable band.


The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

8.2. TRANSMITTER ABOVE 1 GHz


8.2.1. TX ABOVE 1 GHz FOR 802.11a MODE IN THE LOWER 5.2 GHz BAND


RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

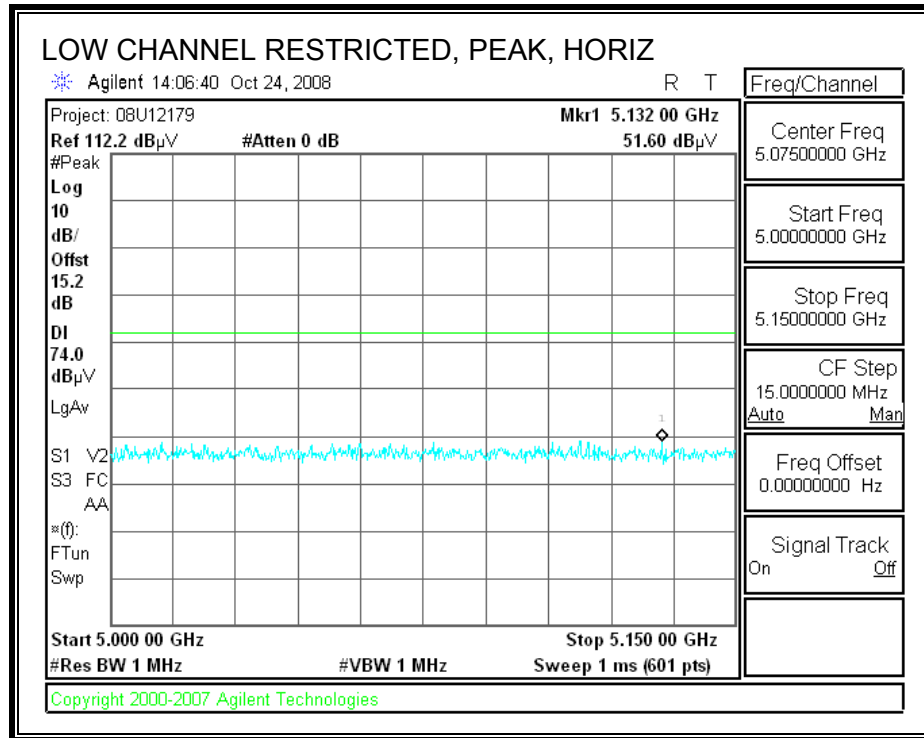

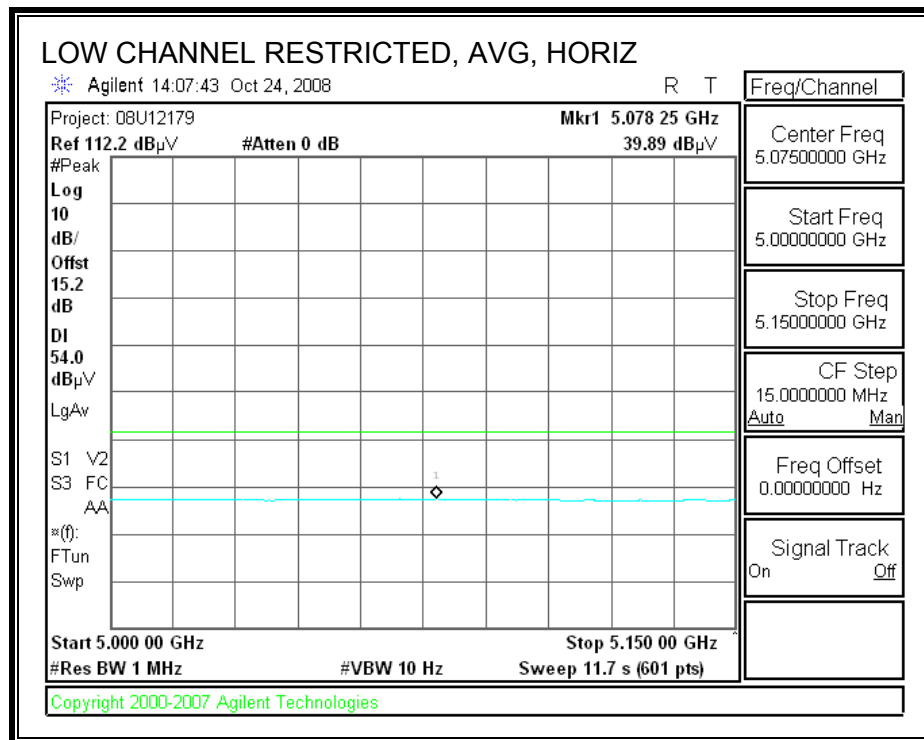



RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)

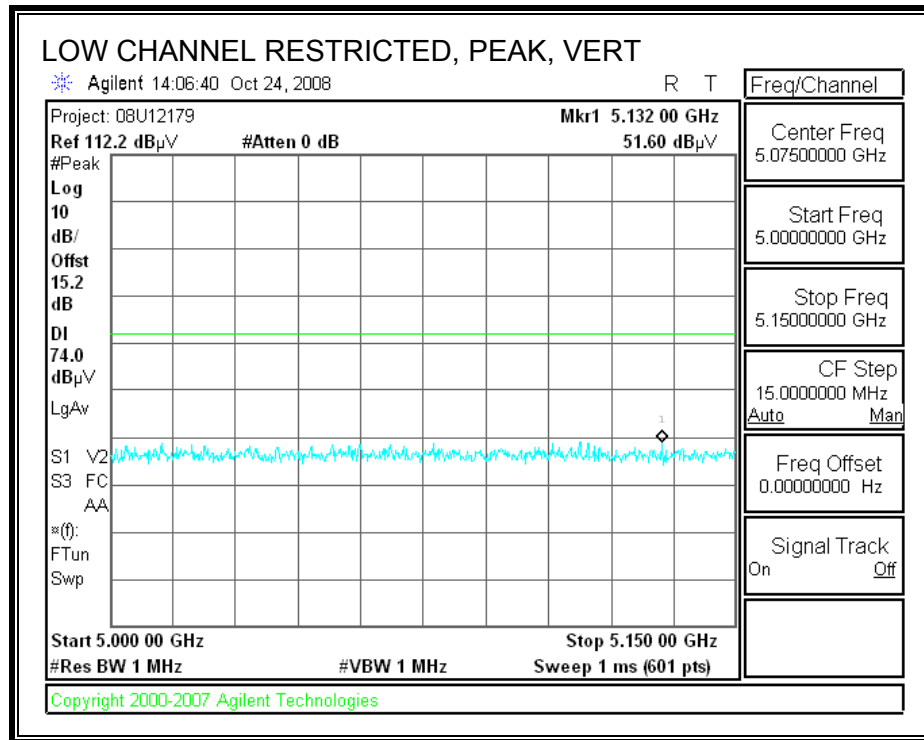

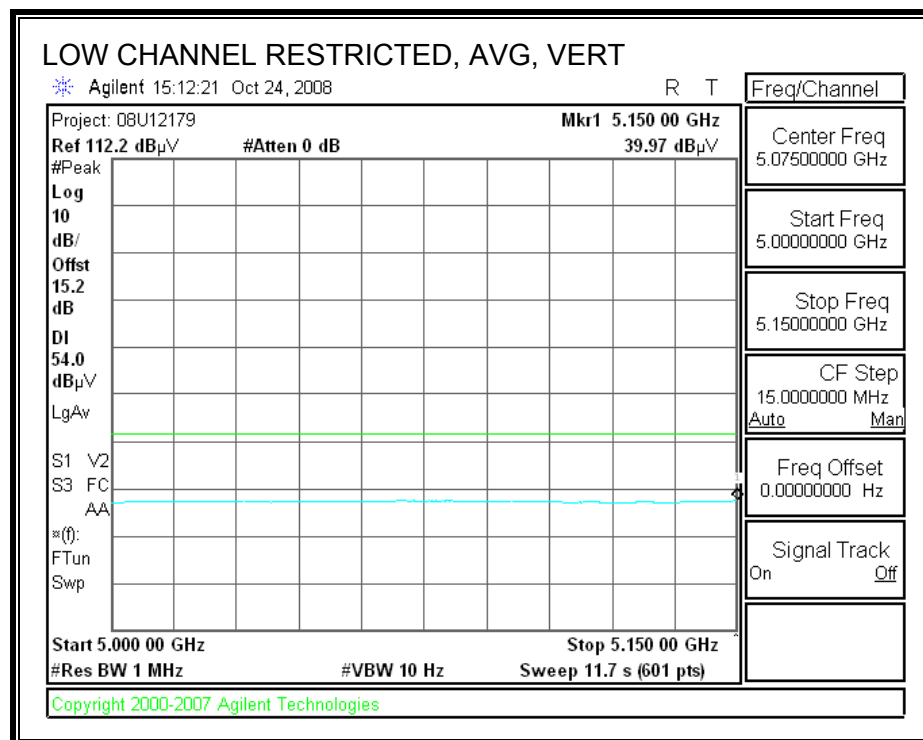



AUTHORIZED BANDEDGE (HIGH CHANNEL, HORIZONTAL)

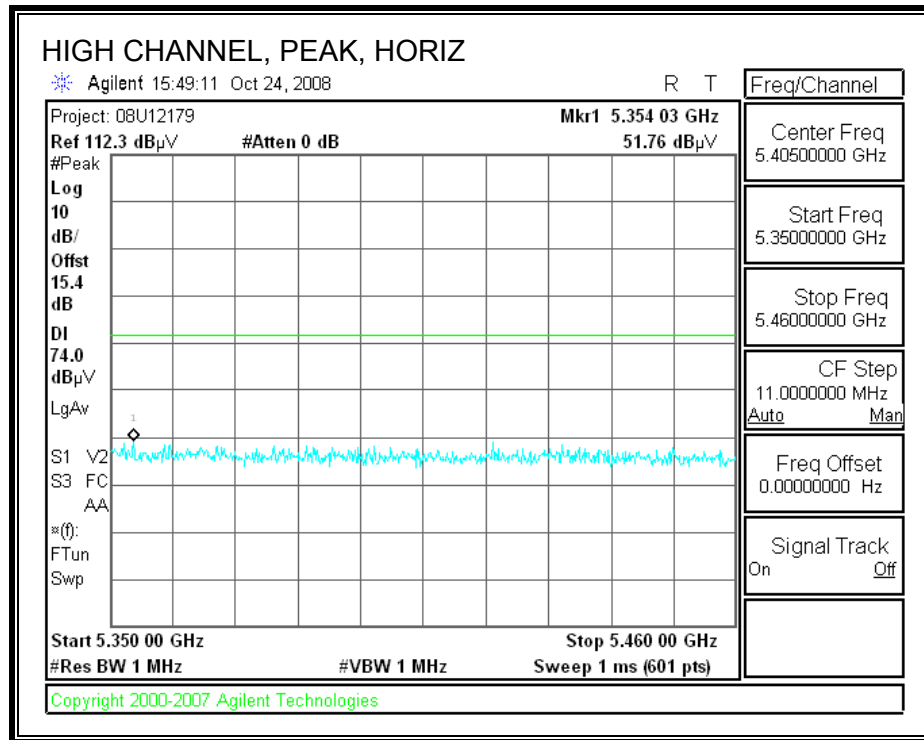

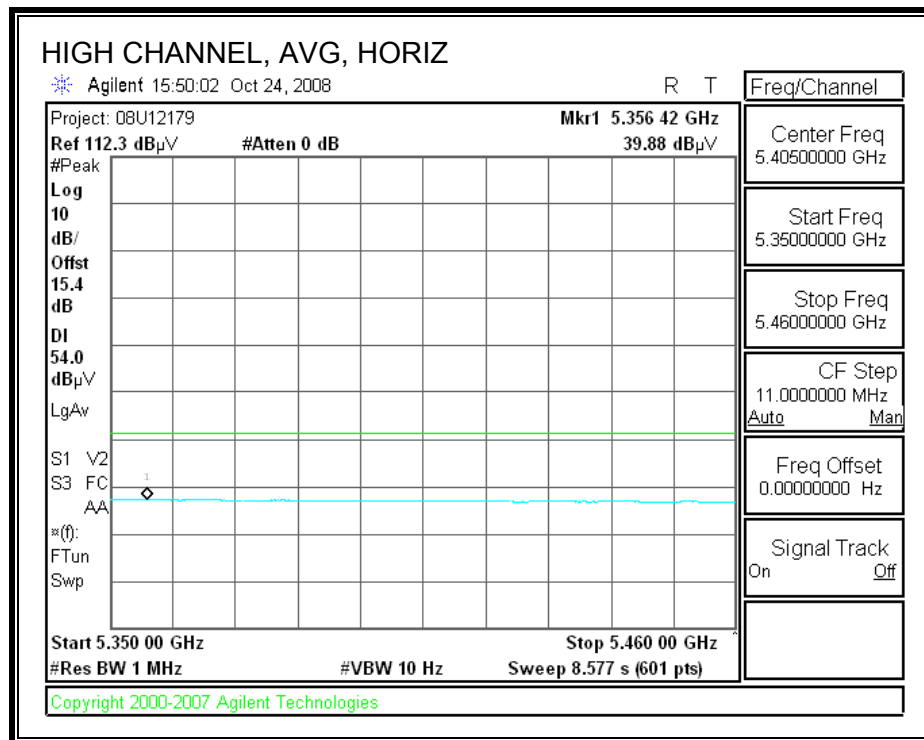

AUTHORIZED BANDEDGE (HIGH CHANNEL, VERTICAL)

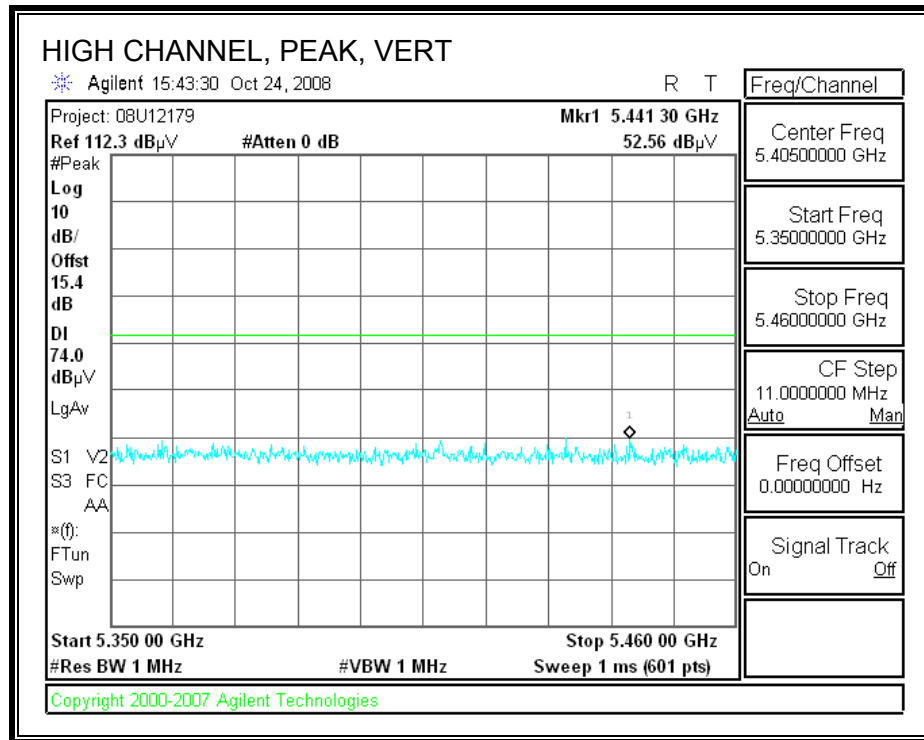

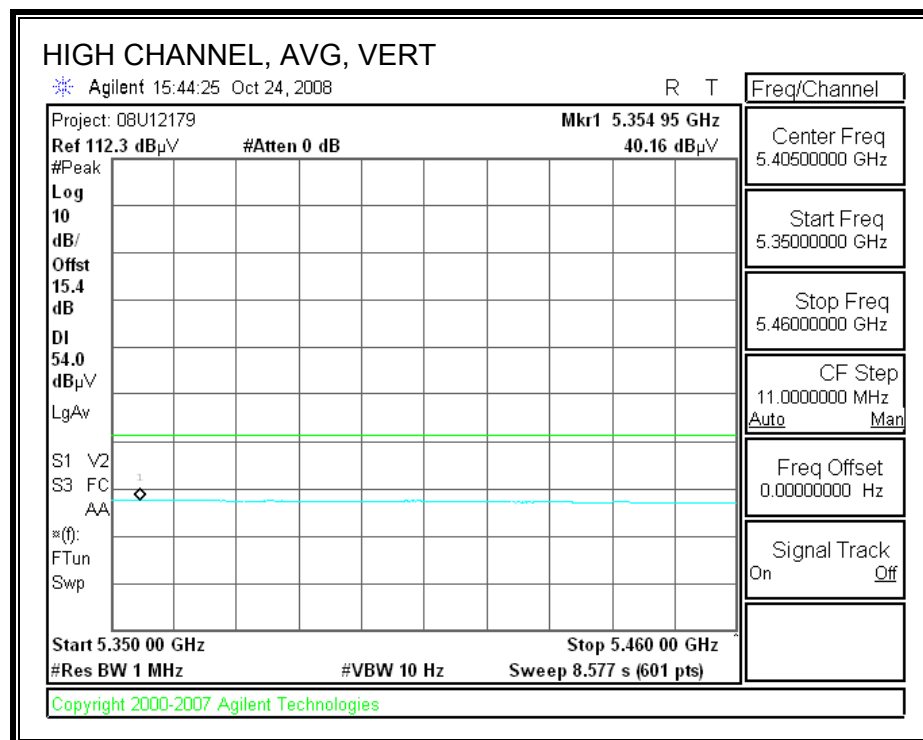

HARMONICS AND SPURIOUS EMISSIONS

High Frequency Measurement															
Compliance Certification Services, Fremont 5m Chamber															
Company:		Aircell													
Project #:		08U12179													
Date:		10/24/2008													
Test Engineer:		Tom Chen													
Configuration:		EUT with laptop PC													
Mode:		802.11a, TX													
Test Equipment:															
Horn 1-18GHz			Pre-amplifier 1-26GHz			Pre-amplifier 26-40GHz			Horn > 18GHz			Limit			
T136; M/N: 3117 @3m			T34 HP 8449B			T88 Miteq 26-40GHz			T39 ARA 18-26GHz & Mixer > 26GHz			FCC 15.205			
Hi Frequency Cables															
2 foot cable			3 foot cable			Chamber Cables			HPF			Reject Filter			
						C-5m Chamber						R_001			
<div style="display: flex; justify-content: space-between;"> <div> Peak Measurements RBW=VBW=1MHz Average Measurements RBW=1MHz ; VBW=10Hz </div> </div>															
f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Ftr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)
Low Ch, 5180 MHz															
15.540	3.0	39.6	29.0	39.5	9.7	-32.2	0.0	0.0	56.6	46.0	74	54	-17.4	-8.0	V
15.540	3.0	42.1	30.1	39.5	9.7	-32.2	0.0	0.0	59.1	47.1	74	54	-14.9	-6.9	H
Mid Ch, 5200 MHz															
15.600	3.0	40.3	29.0	39.3	9.7	-32.2	0.0	0.0	57.1	45.8	74	54	-16.9	-8.2	V
15.600	3.0	41.2	30.1	39.3	9.7	-32.2	0.0	0.0	58.0	46.9	74	54	-16.0	-7.1	H
High Ch, 5240 MHz															
15.720	3.0	39.6	28.1	38.9	9.7	-32.2	0.0	0.0	56.0	44.5	74	54	-18.0	-9.5	V
15.720	3.0	40.1	28.9	38.9	9.7	-32.2	0.0	0.0	56.5	45.3	74	54	-17.5	-8.7	H
Rev. 10.15.08															
f	Measurement Frequency					Amp	Preamp Gain					Avg Lim	Average Field Strength Limit		
Dist	Distance to Antenna					D Corr	Distance Correct to 3 meters					Pk Lim	Peak Field Strength Limit		
Read	Analyzer Reading					Avg	Average Field Strength @ 3 m					Avg Mar	Margin vs. Average Limit		
AF	Antenna Factor					Peak	Calculated Peak Field Strength					Pk Mar	Margin vs. Peak Limit		
CL	Cable Loss					HPF	High Pass Filter								

8.3. RECEIVER ABOVE 1 GHz

8.3.1. RX ABOVE 1 GHz FOR 20 MHz BANDWIDTH IN THE 5.2 GHz BAND

High Frequency Measurement																
Compliance Certification Services, Fremont 5m Chamber																
Company:		Aircell														
Project #:		08U12179														
Date:		10/24/2008														
Test Engineer:		Tom Chen														
Configuration:		EUT with laptop PC														
Mode:		802.11a, RX														
Test Equipment:																
Horn 1-18GHz		Pre-amplifier 1-26GHz		Pre-amplifier 26-40GHz		Horn > 18GHz		Limit								
T136; M/N: 3117 @3m		T34 HP 8449B		T88 Miteq 26-40GHz		T39; ARA 18-26GHz; S/N:1013		RX RSS 210								
Hi Frequency Cables																
2 foot cable		3 foot cable		Chamber Cables		HPF		Reject Filter		Peak Measurements RBW=VBW=1MHz Average Measurements RBW=1MHz; VBW=10Hz						
				C-5m Chamber												
f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Filt dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)	
Mid Ch, 5200 MHz																
1.320	3.0	59.2	33.8	28.3	2.7	-37.8	0.0	0.0	52.4	27.0	74	54	-21.6	-27.0	V	
1.853	3.0	60.6	34.5	30.1	3.3	-37.1	0.0	0.0	56.9	30.8	74	54	-17.1	-23.2	V	
2.667	3.0	58.1	33.1	31.1	4.1	-36.1	0.0	0.0	57.1	32.1	74	54	-16.9	-21.9	V	
2.900	3.0	54.7	30.7	31.5	4.2	-36.0	0.0	0.0	54.4	30.4	74	54	-19.6	-23.6	V	
1.320	3.0	57.9	32.7	28.3	2.7	-37.8	0.0	0.0	51.1	25.9	74	54	-22.9	-28.1	H	
1.867	3.0	58.0	33.3	30.1	3.3	-37.1	0.0	0.0	54.4	29.7	74	54	-19.6	-24.3	H	
2.120	3.0	55.7	31.7	30.6	3.6	-36.7	0.0	0.0	53.2	29.2	74	54	-20.8	-24.8	H	
2.900	3.0	51.7	29.4	31.5	4.2	-36.0	0.0	0.0	51.4	29.1	74	54	-22.6	-24.9	H	
Rev. 10.15.08																
f	Measurement Frequency					Amp	Preamp Gain					Avg Lim	Average Field Strength Limit			
Dist	Distance to Antenna					D Corr	Distance Correct to 3 meters					Pk Lim	Peak Field Strength Limit			
Read	Analyzer Reading					Avg	Average Field Strength @ 3 m					Avg Mar	Margin vs. Average Limit			
AF	Antenna Factor					Peak	Calculated Peak Field Strength					Pk Mar	Margin vs. Peak Limit			
CL	Cable Loss					HPF	High Pass Filter									

9. MAXIMUM PERMISSIBLE EXPOSURE

FCC RULES

§1.1310 The criteria listed in Table 1 shall be used to evaluate the environmental impact of human exposure to radio-frequency (RF) radiation as specified in §1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of §2.1093 of this chapter.

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposures				
0.3–3.0	614	1.63	*(100)	6
3.0–30	1842/f	4.89/f	*(900/f ²)	6
30–300	61.4	0.163	1.0	6
300–1500	f/300	6
1500–100,000	5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3–1.34	614	1.63	*(100)	30
1.34–30	824/f	2.19/f	*(180/f ²)	30

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)—Continued

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
30–300	27.5	0.073	0.2	30
300–1500	f/1500	30
1500–100,000	1.0	30

f = frequency in MHz

* = Plane-wave equivalent power density

NOTE 1 TO TABLE 1: Occupational/controlled limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure. Limits for occupational/controlled exposure also apply in situations when an individual is transient through a location where occupational/controlled limits apply provided he or she is made aware of the potential for exposure.

NOTE 2 TO TABLE 1: General population/uncontrolled exposures apply in situations in which the general public may be exposed, or in which persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or can not exercise control over their exposure.

IC RULES

IC Safety Code 6, Section 2.2.1 (a) A person other than an RF and microwave exposed worker shall not be exposed to electromagnetic radiation in a frequency band listed in Column 1 of Table 5, if the field strength exceeds the value given in Column 2 or 3 of Table 5, when averaged spatially and over time, or if the power density exceeds the value given in Column 4 of Table 5, when averaged spatially and over time.

Table 5
Exposure Limits for Persons Not Classed As RF and Microwave Exposed Workers (Including the General Public)

1 Frequency (MHz)	2 Electric Field Strength; rms (V/m)	3 Magnetic Field Strength; rms (A/m)	4 Power Density (W/m ²)	5 Averaging Time (min)
0.003–1	280	2.19		6
1–10	280/ f	2.19/ f		6
10–30	28	2.19/ f		6
30–300	28	0.073	2*	6
300–1 500	1.585 $f^{0.5}$	0.0042 $f^{0.5}$	$f/150$	6
1 500–15 000	61.4	0.163	10	6
15 000–150 000	61.4	0.163	10	616 000 / $f^{1.2}$
150 000–300 000	0.158 $f^{0.5}$	4.21 x 10 ⁻⁴ $f^{0.5}$	6.67 x 10 ⁻⁵ f	616 000 / $f^{1.2}$

* Power density limit is applicable at frequencies greater than 100 MHz.

Notes: 1. Frequency, f , is in MHz.
2. A power density of 10 W/m² is equivalent to 1 mW/cm².
3. A magnetic field strength of 1 A/m corresponds to 1.257 microtesla (μT) or 12.57 milligauss (mG).

CALCULATIONS

Given

$$E = \sqrt{(30 * P * G) / d}$$

and

$$S = E^2 / 3770$$

where

E = Field Strength in Volts/meter

P = Power in Watts

G = Numeric antenna gain

d = Distance in meters

S = Power Density in milliwatts/square centimeter

Combining equations, rearranging the terms to express the distance as a function of the remaining variables, changing to units of Power to mW and Distance to cm, and substituting the logarithmic form of power and gain yields:

$$d = 0.282 * 10^{((P + G) / 20)} / \sqrt{S}$$

where

d = MPE distance in cm

P = Power in dBm

G = Antenna Gain in dBi

S = Power Density Limit in mW/cm²

Rearranging terms to calculate the power density at a specific distance yields

$$S = 0.0795 * 10^{((P + G) / 10)} / (d^2)$$

The power density in units of mW/cm² is converted to units of W/m² by multiplying by a factor of 10.

LIMITS

From FCC §1.1310 Table 1 (B), the maximum value of $S = 1.0 \text{ mW/cm}^2$


From IC Safety Code 6, Section 2.2 Table 5 Column 4, $S = 10 \text{ W/m}^2$

RESULTS


Mode	Band	MPE Distance (cm)	Output Power (dBm)	Antenna Gain (dBi)	FCC Power Density (mW/cm ²)	IC Power Density (W/m ²)
WLAN	5 GHz	20.0	4.89	6.70	0.003	0.029


10. SETUP PHOTOS

ANTENNA PORT CONDUCTED RF MEASUREMENT SETUP

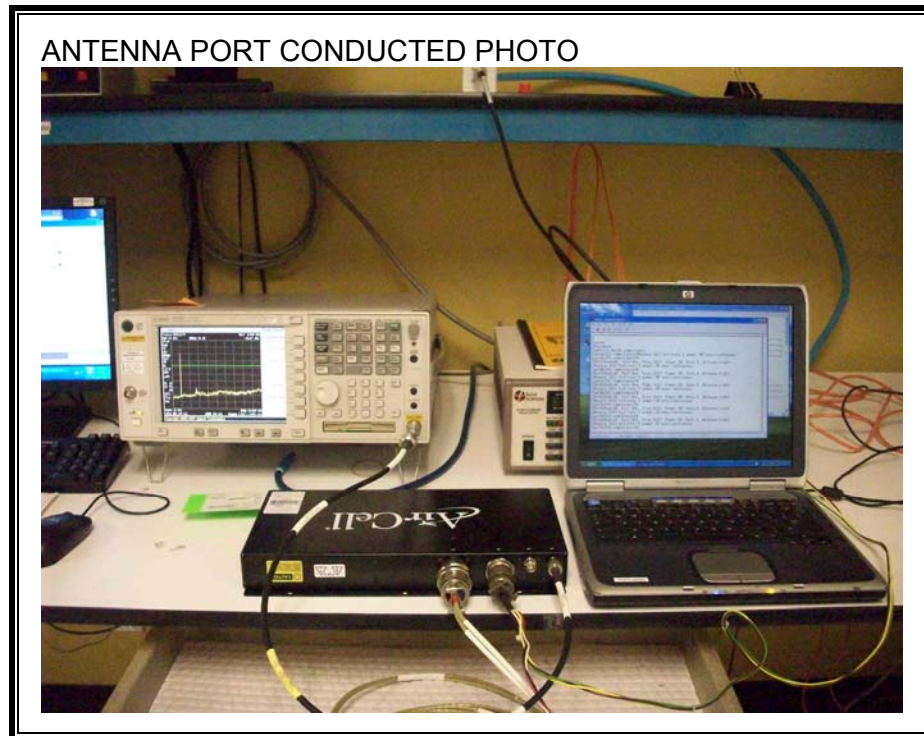

RADIATED RF MEASUREMENT SETUP

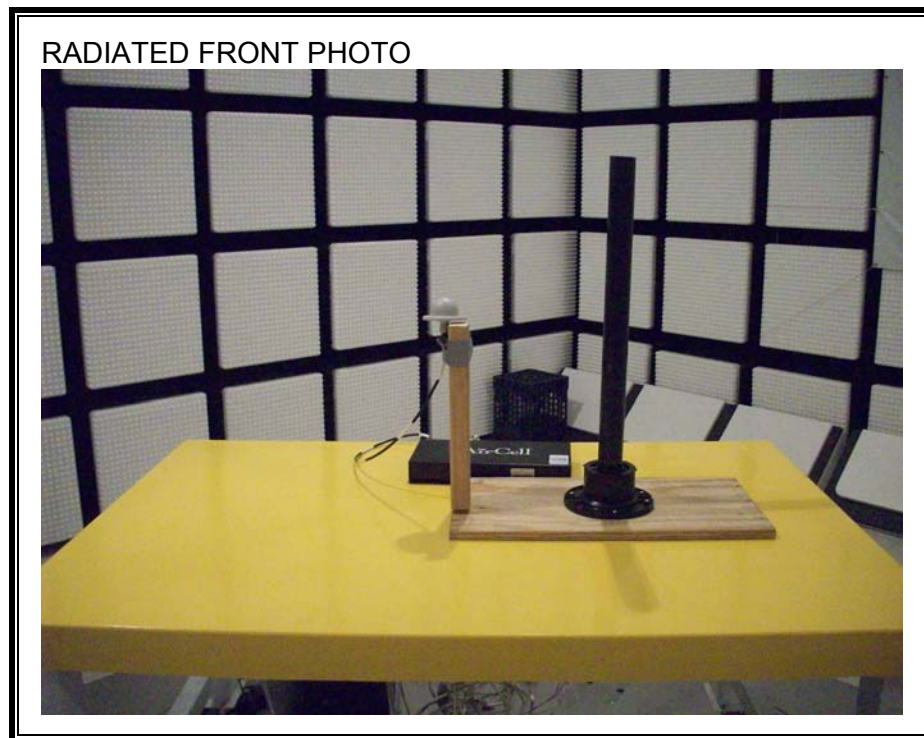

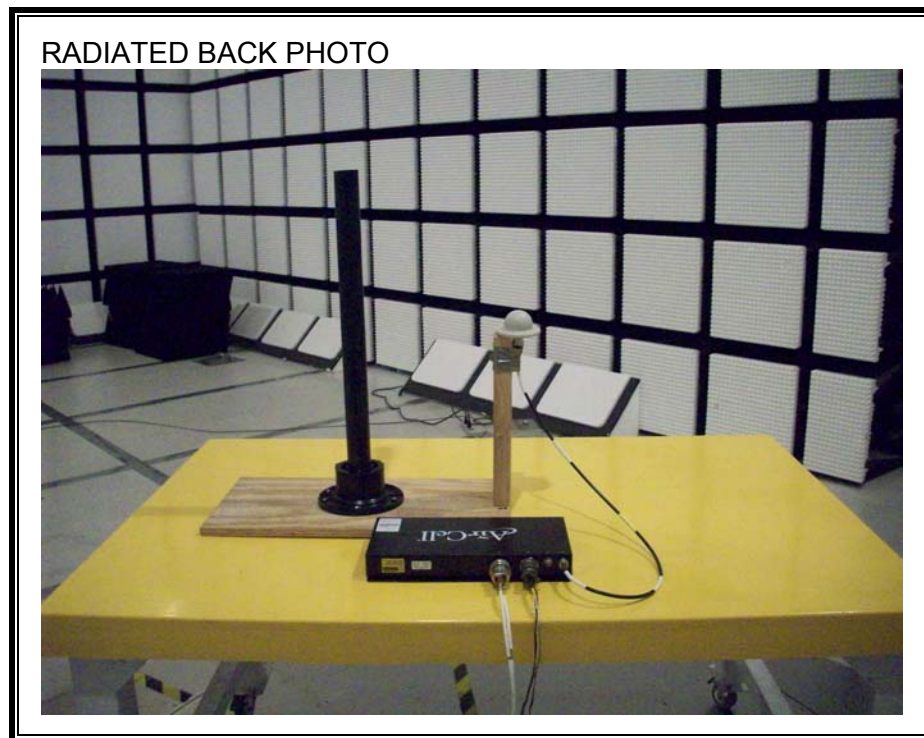

END OF REPORT