




Address: No.5, Langshan 2nd Rd., North Hi-Tech Industrial park
 Guangdong, China
 Tel: 0755-86170306 Fax: 0755-86170310

Radiated Emission Measurement

File : PDI-P26LCDE Data : #26 Date : 2011-7-8 Time : 8:35:19

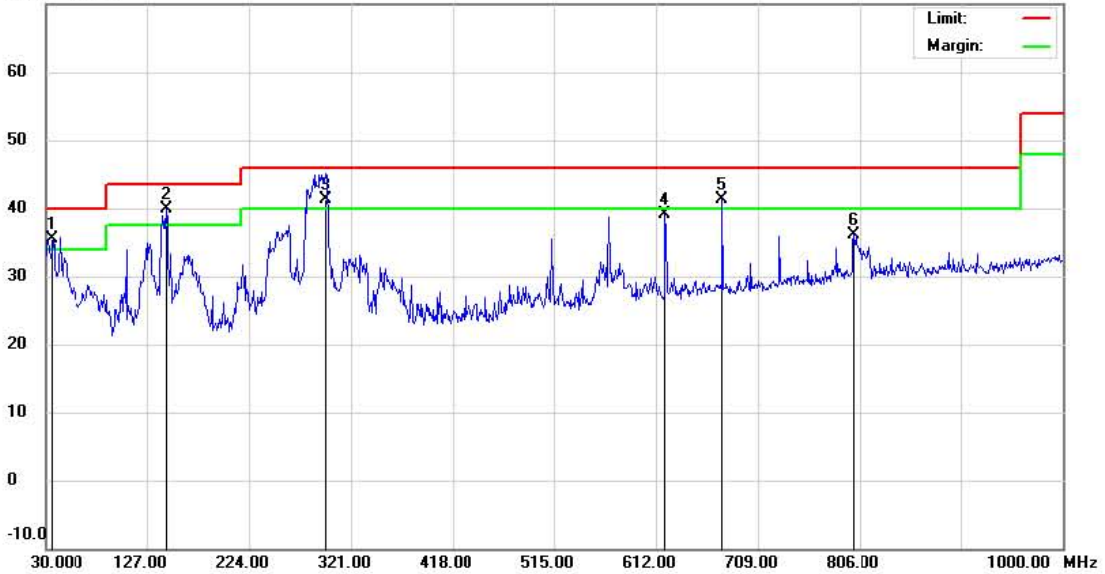

Site site MOST 3M Polarization: **Vertical** Temperature: 26
 Limit: FCC Part15 B 3M Radiation Power: AC 120V/60Hz Humidity: 61 %
 EUT: LCD TV Distance:
 M/N: PDI-P26LCDE
 Mode: DTV CH14-1
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Antenna Height cm	Table Degree degree	Comment
1		35.3200	14.80	20.68	35.48	40.00	-4.52	QP			
2	*	145.4299	23.02	16.87	39.89	43.50	-3.61	QP			
3		296.7500	22.00	19.30	41.30	46.00	-4.70	QP			
4		620.7300	15.59	23.51	39.10	46.00	-6.90	QP			
5		675.0498	16.78	24.55	41.33	46.00	-4.67	QP			
6		800.1799	10.12	25.90	36.02	46.00	-9.98	QP			

*:Maximum data x:Over limit | :over margin


Engineer Signature: Zero



Address: No.5, Langshan 2nd Rd., North Hi-Tech Industrial park
 Guangdong, China
 Tel: 0755-86170306 Fax: 0755-86170310

Radiated Emission Measurement

File :PDI-P26LCDE Data :#78 Date: 2011-7-8 Time: 19:25:55

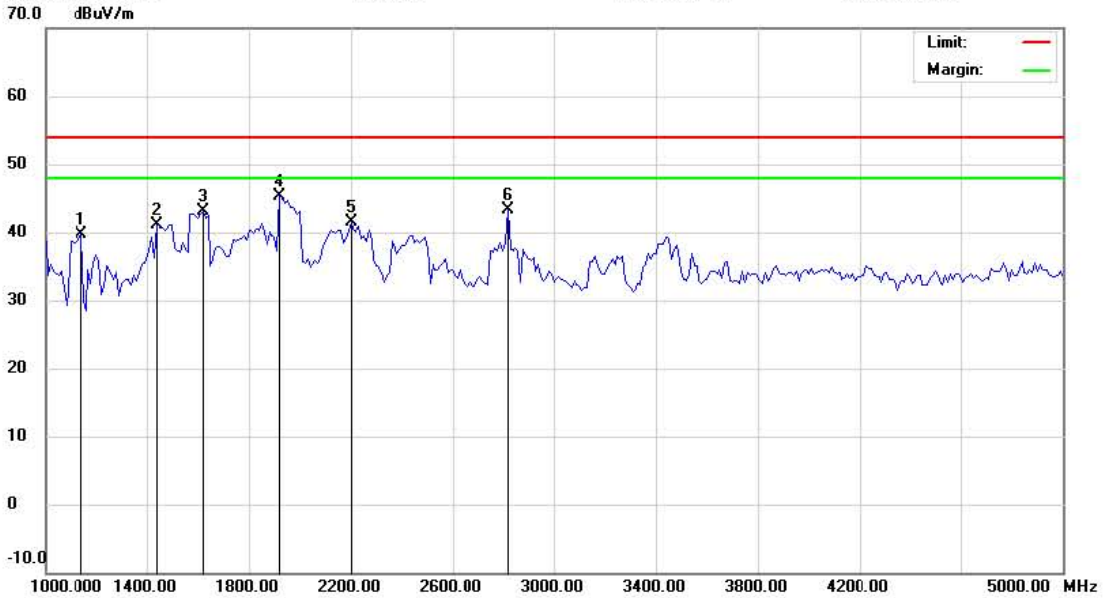

Site site #1 Polarization: **Vertical** Temperature: 26
 Limit: FCC Part15 B 3M Radiation(1000M-5000M) Power: AC 120V/60Hz Humidity: 61 %
 EUT: LC D TV Distance:
 M/N: PDI-P26LCDE
 Mode: DTV 14-1
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Antenna Height cm	Table Degree degree	Comment
1		1140.000	57.94	-18.17	39.77	54.00	-14.23	AVG			
2		1440.000	58.03	-16.85	41.18	54.00	-12.82	AVG			
3		1620.000	58.64	-15.57	43.07	54.00	-10.93	AVG			
4	*	1920.000	60.08	-14.70	45.38	54.00	-8.62	AVG			
5		2200.000	56.33	-14.86	41.47	54.00	-12.53	AVG			
6		2820.000	56.53	-13.20	43.33	54.00	-10.67	AVG			

*:Maximum data x:Over limit l:over margin


Engineer Signature: Kavin



Address: No.5, Langshan 2nd Rd., North Hi-Tech Industrial park
 Guangdong, China
 Tel: 0755-86170306 Fax: 0755-86170310

Radiated Emission Measurement

File : PDI-P26LCDE Data : #79 Date : 2011-7-8 Time : 19:26:54

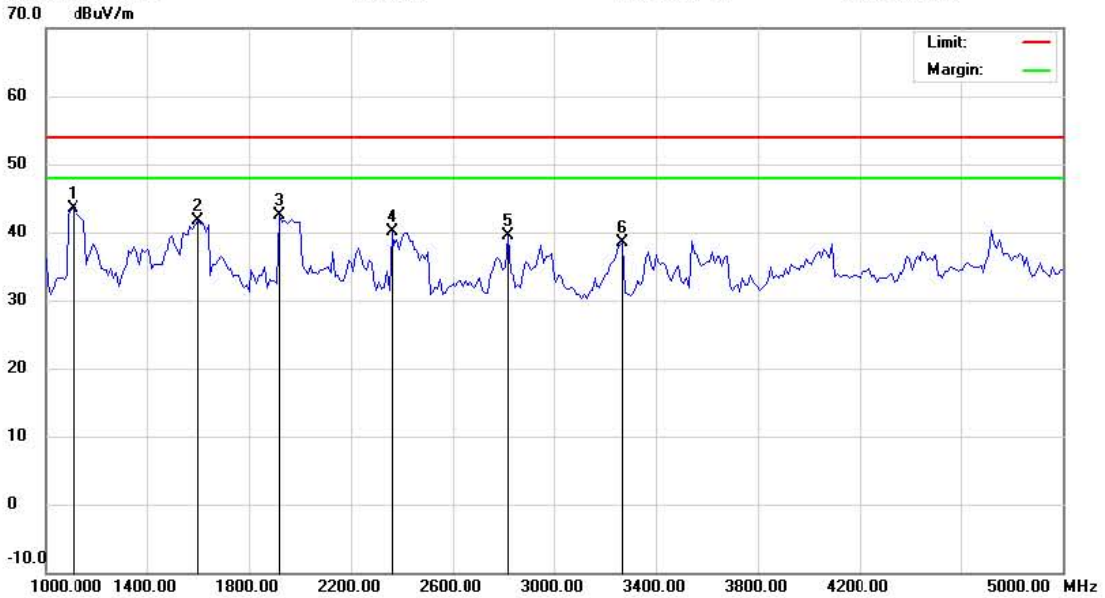

Site site #1 Polarization: **Horizontal** Temperature: 26
 Limit: FCC Part15 B 3M Radiation(1000M-5000M) Power: AC 120V/60Hz Humidity: 61 %
 EUT: LC D TV Distance:
 M/N: PDI-P26LCDE
 Mode: DTV 14-1
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Antenna Height cm	Table Degree degree	Comment
1	*	1110.000	61.81	-18.34	43.47	54.00	-10.53	AVG			
2		1600.000	57.39	-15.71	41.68	54.00	-12.32	AVG			
3		1920.000	57.17	-14.70	42.47	54.00	-11.53	AVG			
4		2360.000	54.11	-14.09	40.02	54.00	-13.98	AVG			
5		2820.000	52.61	-13.20	39.41	54.00	-14.59	AVG			
6		3270.000	50.48	-12.03	38.45	54.00	-15.55	AVG			

*:Maximum data x:Over limit l:over margin


Engineer Signature: Kavin



Address: No.5, Langshan 2nd Rd., North Hi-Tech Industrial park
 Guangdong, China
 Tel: 0755-86170306 Fax: 0755-86170310

Radiated Emission Measurement

File :PDI-P26LCDE Data :#27 Date: 2011-7-8 Time: 8:45:00

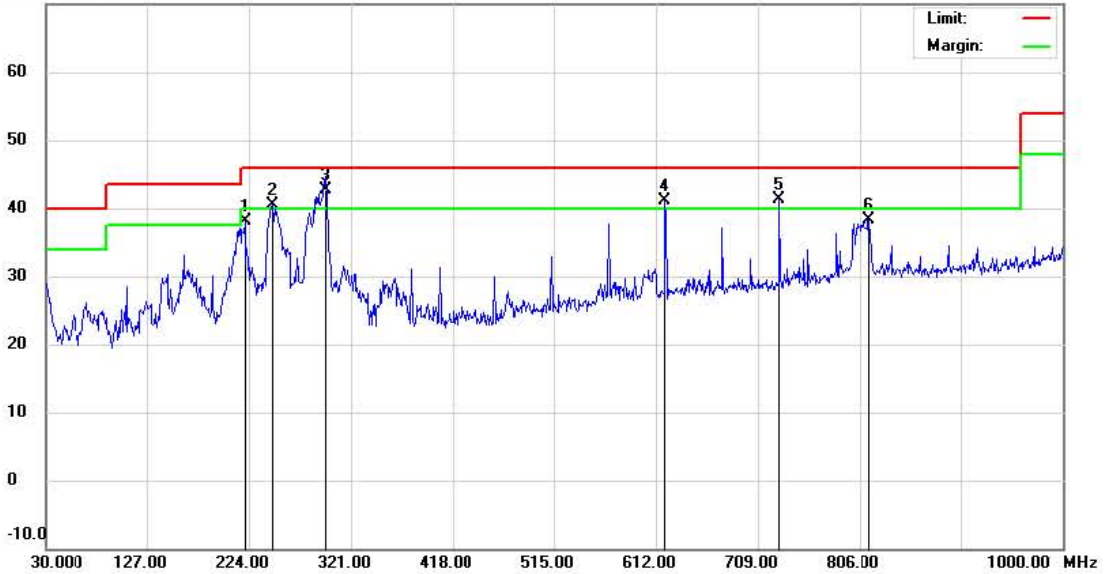

Site site MOST 3M Polarization: **Horizontal** Temperature: 26
 Limit: FCC Part15 B 3M Radiation Power: AC 120V/60Hz Humidity: 61 %
 EUT: LCD TV Distance:
 M/N: PDI-P26LCDE
 Mode: DTV CH14-1
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Antenna Height cm	Table Degree degree	Comment
1		220.1200	21.82	16.30	38.12	46.00	-7.88	QP			
2		246.3100	23.03	17.40	40.43	46.00	-5.57	QP			
3	*	296.7500	23.41	19.30	42.71	46.00	-3.29	QP			
4		620.7300	17.55	23.51	41.06	46.00	-4.94	QP			
5		729.3700	16.42	24.88	41.30	46.00	-4.70	QP			
6		815.7000	12.20	26.20	38.40	46.00	-7.60	QP			

*:Maximum data x:Over limit | :over margin


Engineer Signature: Zero



Address: No.5, Langshan 2nd Rd., North Hi-Tech Industrial park
 Guangdong, China
 Tel: 0755-86170306 Fax: 0755-86170310

Radiated Emission Measurement

File :PDI-P26LCDE Data :#24 Date: 2011-7-8 Time: 8:15:53

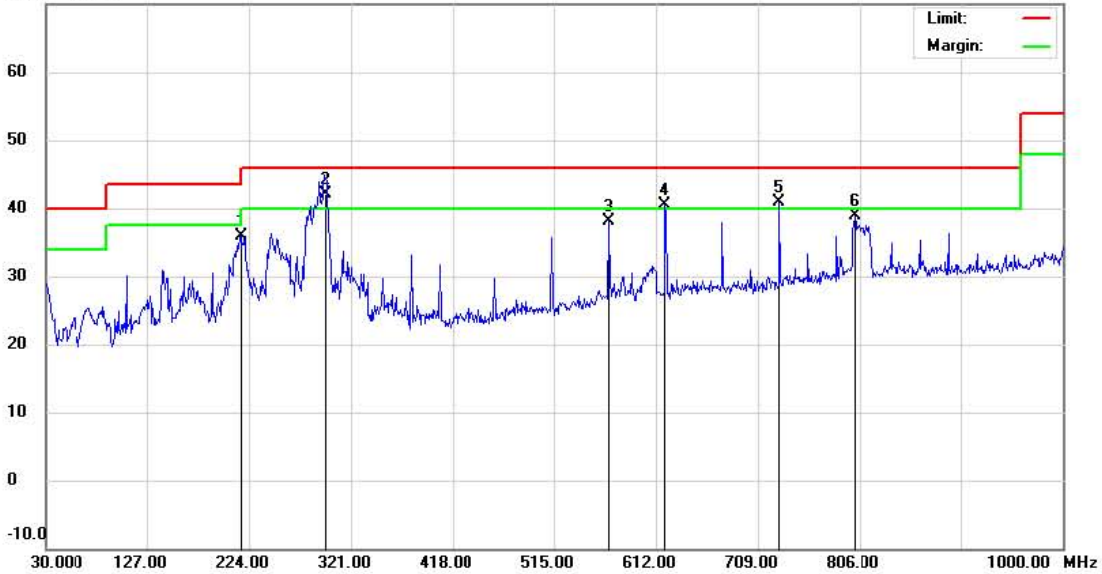

Site site MOST 3M Polarization: **Horizontal** Temperature: 26
 Limit: FCC Part15 B 3M Radiation Power: AC 120V/60Hz Humidity: 61 %
 EUT: LCD TV Distance:
 M/N: PDI-P26LCDE
 Mode: DTV CH69-1
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Antenna Height cm	Table Degree degree	Comment
1		216.2400	19.84	16.14	35.98	46.00	-10.02	QP			
2	*	295.7800	22.89	19.30	42.19	46.00	-3.81	QP			
3		567.3799	15.27	22.82	38.09	46.00	-7.91	QP			
4	l	620.7300	16.90	23.51	40.41	46.00	-5.59	QP			
5	l	729.3700	16.08	24.88	40.96	46.00	-5.04	QP			
6		801.1499	12.99	25.90	38.89	46.00	-7.11	QP			

*:Maximum data x:Over limit l:over margin


Engineer Signature: Zero



Address: No.5, Langshan 2nd Rd., North Hi-Tech Industrial park
 Guangdong, China
 Tel: 0755-86170306 Fax: 0755-86170310

Radiated Emission Measurement

File :PDI-P26LCDE Data :#25 Date: 2011-7-8 Time: 8:18:46

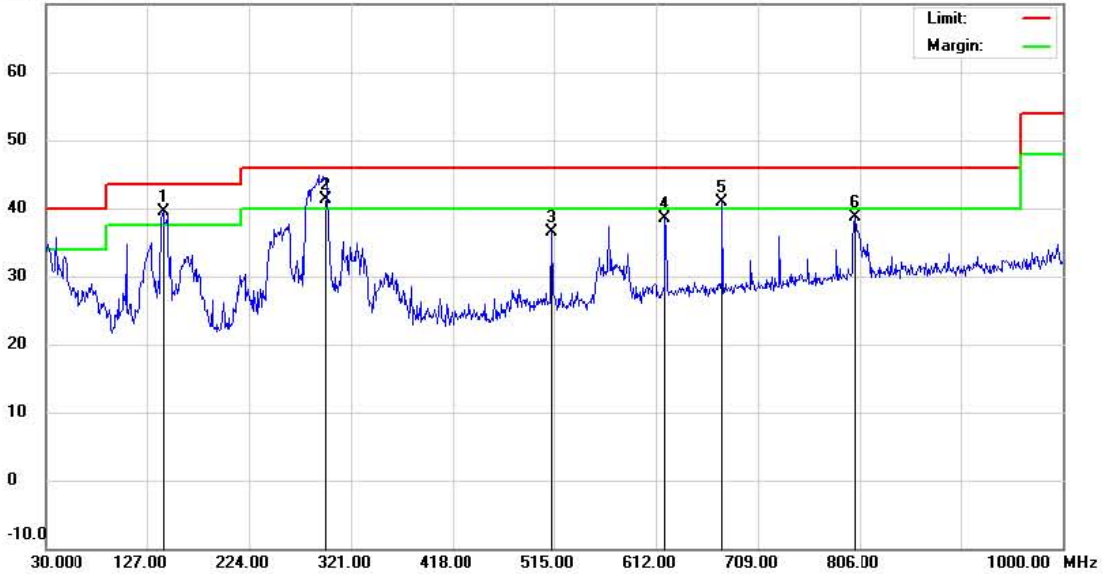

Site site MOST 3M Polarization: **Vertical** Temperature: 26
 Limit: FCC Part15 B 3M Radiation Power: AC 120V/60Hz Humidity: 61 %
 EUT: LCD TV Distance:
 M/N: PDI-P26LCDE
 Mode: DTV CH69-1
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Antenna Height cm	Table Degree degree	Comment
1	*	142.5200	22.40	17.05	39.45	43.50	-4.05	QP			
2		296.0110	22.00	19.30	41.30	46.00	-4.70	QP			
3		513.0597	14.95	21.56	36.51	46.00	-9.49	QP			
4		620.7300	15.02	23.51	38.53	46.00	-7.47	QP			
5		675.0498	16.37	24.55	40.92	46.00	-5.08	QP			
6		801.1499	12.88	25.90	38.78	46.00	-7.22	QP			

*:Maximum data x:Over limit | :over margin

Engineer Signature: Zero



Address: No.5, Langshan 2nd Rd., North Hi-Tech Industrial park
 Guangdong, China
 Tel: 0755-86170306 Fax: 0755-86170310

Radiated Emission Measurement

File : PDI-P26LCDE Data : #76 Date : 2011-7-8 Time : 19:23:18



Site site #1 Polarization: **Horizontal** Temperature: 26
 Limit: FCC Part15 B 3M Radiation(1000M-5000M) Power: AC 120V/60Hz Humidity: 61 %
 EUT: LC D TV Distance:
 M/N: PDI-P26LCDE
 Mode: DTV 69-1
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Antenna Height cm	Table Degree degree	Comment
1	*	1100.000	64.44	-18.40	46.04	54.00	-7.96	AVG			
2		1580.000	61.44	-15.83	45.61	54.00	-8.39	AVG			
3		2000.000	56.31	-14.77	41.54	54.00	-12.46	AVG			
4		2410.000	52.26	-13.81	38.45	54.00	-15.55	AVG			
5		2820.000	52.52	-13.20	39.32	54.00	-14.68	AVG			
6		3270.000	52.56	-12.03	40.53	54.00	-13.47	AVG			

*:Maximum data x:Over limit l:over margin


Engineer Signature: Kavin



Address: No.5, Langshan 2nd Rd., North Hi-Tech Industrial park
 Guangdong, China
 Tel: 0755-86170306 Fax: 0755-86170310

Radiated Emission Measurement

File : PDI-P26LCDE Data : #77 Date : 2011-7-8 Time : 19:24:09

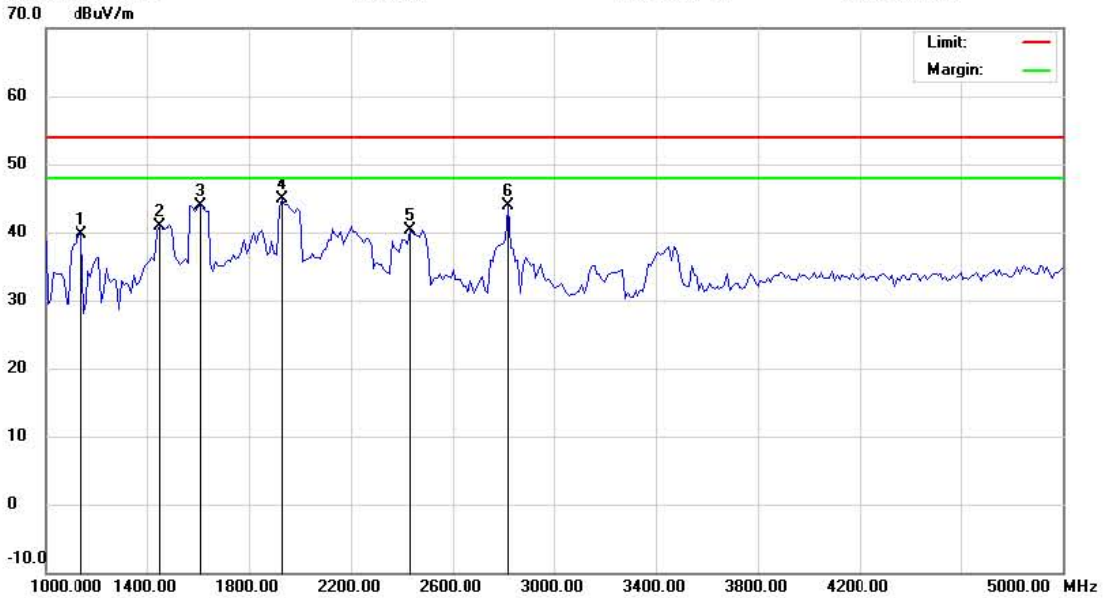

Site site #1 Polarization: **Vertical** Temperature: 26
 Limit: FCC Part15 B 3M Radiation(1000M-5000M) Power: AC 120V/60Hz Humidity: 61 %
 EUT: LC D TV Distance:
 M/N: PDI-P26LCDE
 Mode: DTV 69-1
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Antenna Height cm	Table Degree degree	Comment
1		1140.000	57.91	-18.17	39.74	54.00	-14.26	AVG			
2		1450.000	57.76	-16.77	40.99	54.00	-13.01	AVG			
3		1610.000	59.58	-15.64	43.94	54.00	-10.06	AVG			
4	*	1930.000	59.52	-14.71	44.81	54.00	-9.19	AVG			
5		2430.000	54.06	-13.71	40.35	54.00	-13.65	AVG			
6		2820.000	57.12	-13.20	43.92	54.00	-10.08	AVG			

*:Maximum data x:Over limit l:over margin


Engineer Signature: Kavin



Address: No.5, Langshan 2nd Rd., North Hi-Tech Industrial park
 Guangdong, China
 Tel: 0755-86170306 Fax: 0755-86170310

Radiated Emission Measurement

File :PDI-P26LCDE Data :#48 Date: 2011-7-8 Time: 13:33:22
 70.0 dBuV/m

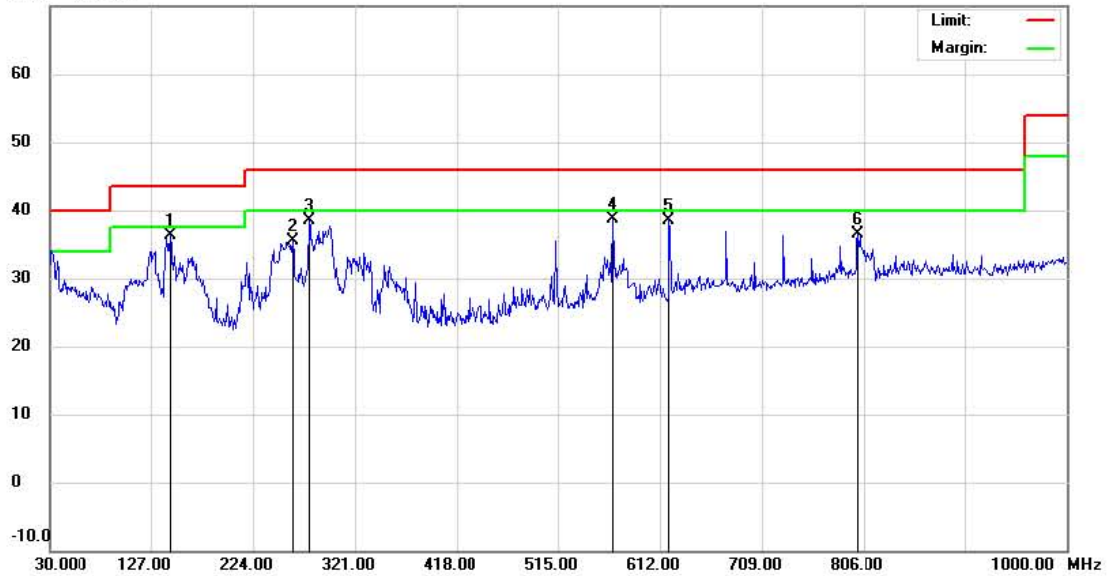

Site site MOST 3M Polarization: **Vertical** Temperature: 26
 Limit: FCC Part15 B 3M Radiation Power: AC 120V/60Hz Humidity: 61 %
 EUT: LCD TV Distance:
 M/N: PDI-P26LCDE
 Mode: USB Recording
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1	*	145.4300	19.52	16.87	36.39	43.50	-7.11	QP		
2		261.8299	17.75	17.84	35.59	46.00	-10.41	QP		
3		277.3500	19.22	19.29	38.51	46.00	-7.49	QP		
4		567.3799	15.87	22.82	38.69	46.00	-7.31	QP		
5		620.7300	15.09	23.51	38.60	46.00	-7.40	QP		
6		800.1799	10.62	25.90	36.52	46.00	-9.48	QP		

*:Maximum data x:Over limit l:over margin


Engineer Signature: Zero



Address: No.5, Langshan 2nd Rd., North Hi-Tech Industrial park
 Guangdong, China
 Tel: 0755-86170306 Fax: 0755-86170310

Radiated Emission Measurement

File :PDI-P26LCDE Data :#49 Date: 2011-7-8 Time: 13:36:46
 70.0 dBuV/m

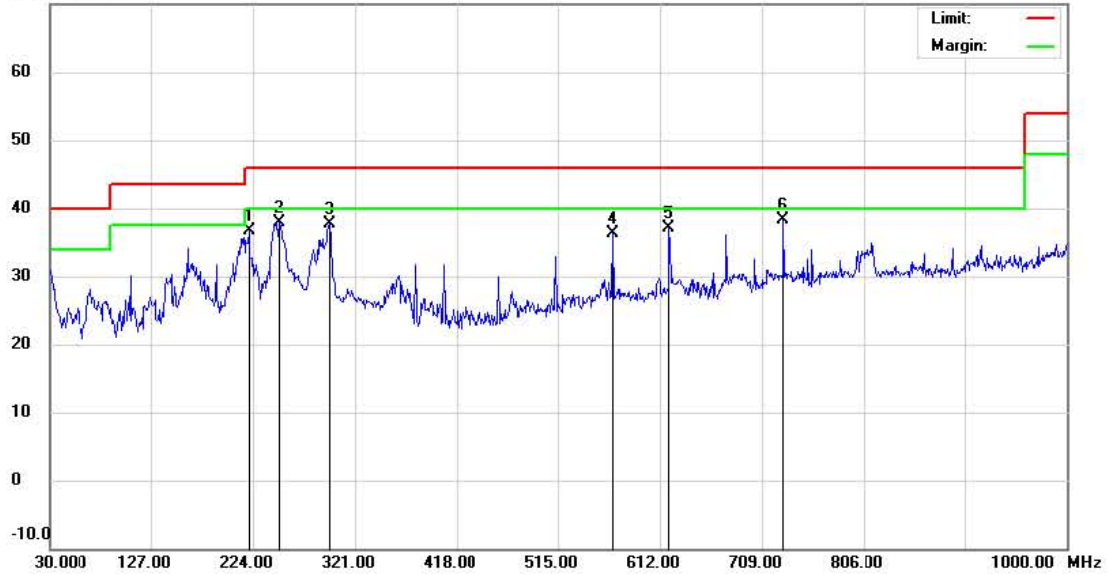

Site site MOST 3M Polarization: **Horizontal** Temperature: 26
 Limit: FCC Part15 B 3M Radiation Power: AC 120V/60Hz Humidity: 61 %
 EUT: LCD TV Distance:
 M/N: PDI-P26LCDE
 Mode: USB Recording
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Antenna Height cm	Table Degree degree	Comment
1		220.1200	20.32	16.30	36.62	46.00	-9.38	QP			
2		249.2199	20.54	17.40	37.94	46.00	-8.06	QP			
3		296.7500	18.41	19.30	37.71	46.00	-8.29	QP			
4		567.3799	13.39	22.82	36.21	46.00	-9.79	QP			
5		620.7300	13.55	23.51	37.06	46.00	-8.94	QP			
6	*	729.3700	13.42	24.88	38.30	46.00	-7.70	QP			

*:Maximum data x:Over limit l:over margin


Engineer Signature: Zero



Address: No.5, Langshan 2nd Rd., North Hi-Tech Industrial park
 Guangdong, China
 Tel: 0755-86170306 Fax: 0755-86170310

Radiated Emission Measurement

File : PDI-P26LCDE Data : #64 Date : 2011-7-8 Time : 18:42:20

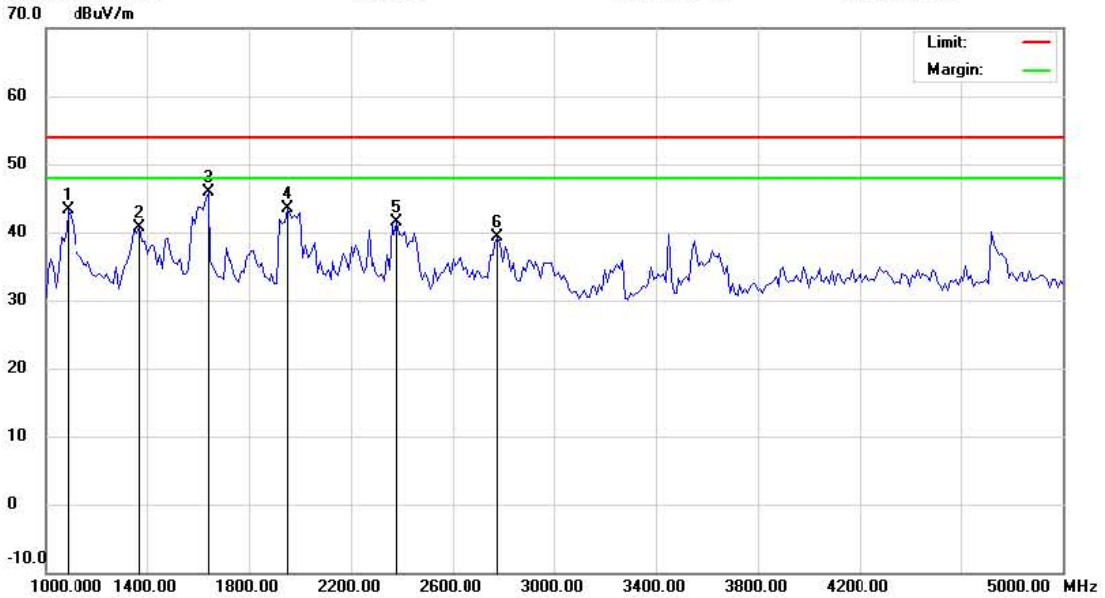

Site site #1 Polarization: **Horizontal** Temperature: 26
 Limit: FCC Part15 B 3M Radiation(1000M-5000M) Power: AC 120V/60Hz Humidity: 61 %
 EUT: LC D TV Distance:
 M/N: PDI-P26LCDE
 Mode: USB Recording
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Antenna Height cm	Table Degree degree	Comment
1		1090.000	61.85	-18.49	43.36	54.00	-10.64	AVG			
2		1370.000	58.03	-17.37	40.66	54.00	-13.34	AVG			
3	*	1640.000	61.38	-15.43	45.95	54.00	-8.05	AVG			
4		1950.000	58.18	-14.73	43.45	54.00	-10.55	AVG			
5		2380.000	55.38	-13.97	41.41	54.00	-12.59	AVG			
6		2780.000	52.55	-13.33	39.22	54.00	-14.78	AVG			

*:Maximum data x:Over limit l:over margin

Engineer Signature: Kavin



Address: No.5, Langshan 2nd Rd., North Hi-Tech Industrial park
 Guangdong, China
 Tel: 0755-86170306 Fax: 0755-86170310


Radiated Emission Measurement

File : PDI-P26LCDE
 70.0 dBuV/m

Data : #65

Date: 2011-7-8

Time: 18:48:34

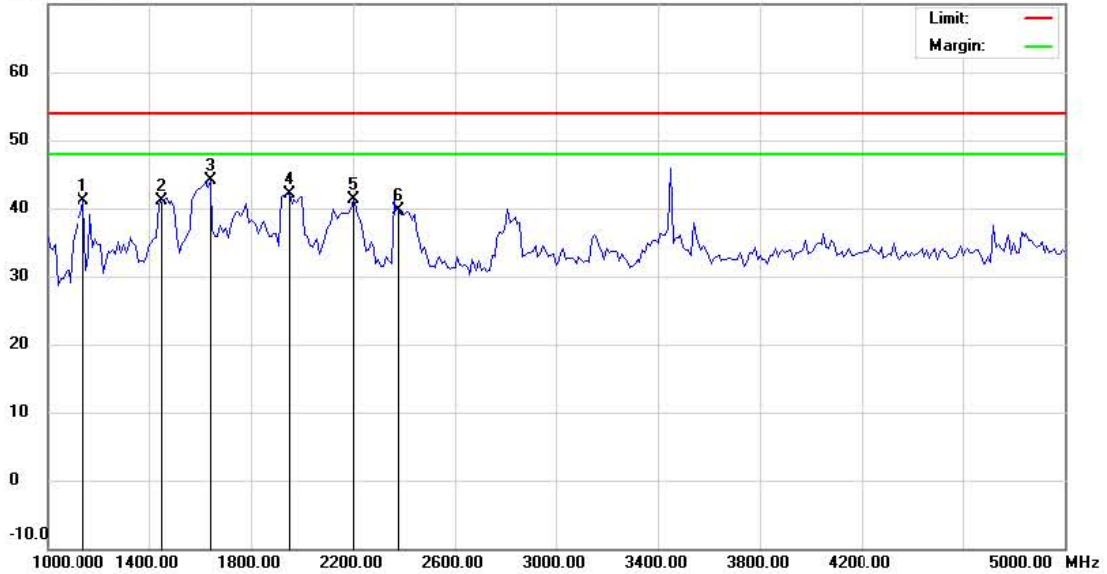

Site site #1 Polarization: **Vertical** Temperature: 26
 Limit: FCC Part15 B 3M Radiation(1000M-5000M) Power: AC 120V/60Hz Humidity: 61 %
 EUT: LC D TV Distance:
 M/N: PDI-P26LCDE
 Mode: USB Recording
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Antenna Height cm	Table Degree degree	Comment
1		1140.000	59.36	-18.17	41.19	54.00	-12.81	AVG			
2		1450.000	57.97	-16.77	41.20	54.00	-12.80	AVG			
3	*	1640.000	59.58	-15.43	44.15	54.00	-9.85	AVG			
4		1950.000	56.74	-14.73	42.01	54.00	-11.99	AVG			
5		2200.000	56.08	-14.86	41.22	54.00	-12.78	AVG			
6		2380.000	53.59	-13.97	39.62	54.00	-14.38	AVG			

*:Maximum data x:Over limit l:over margin


Engineer Signature: Kavin



Address: No.5, Langshan 2nd Rd., North Hi-Tech Industrial park
 Guangdong, China
 Tel: 0755-86170306 Fax: 0755-86170310

Radiated Emission Measurement

File : PDI-P26LCDE Data : #44 Date : 2011-7-8 Time : 10:10:04
 70.0 dBuV/m

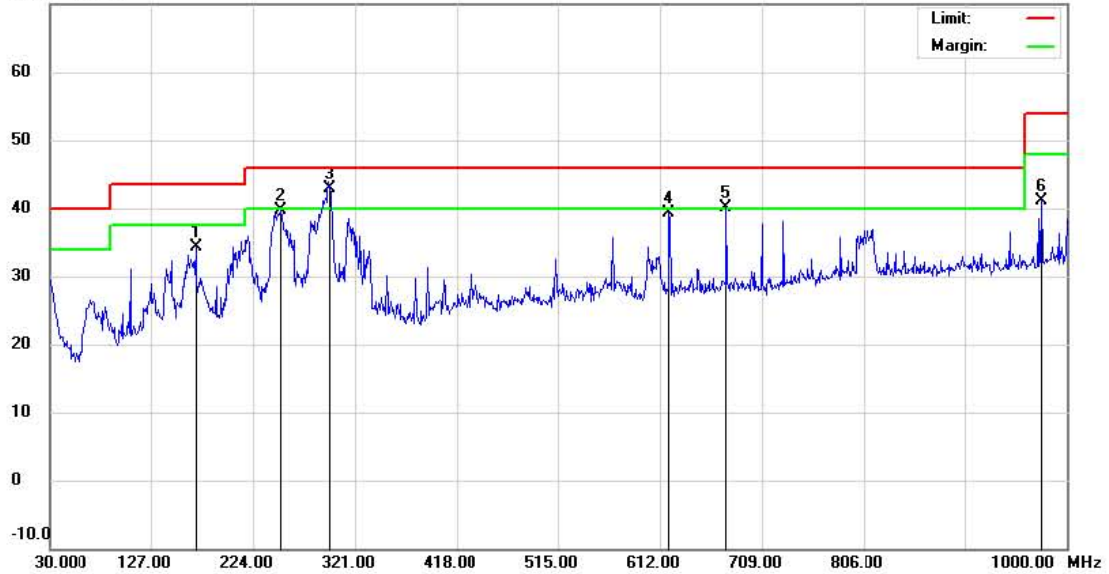

Site site MOST 3M Polarization: **Horizontal** Temperature: 26
 Limit: FCC Part15 B 3M Radiation Power: AC 120V/60Hz Humidity: 61 %
 EUT: LCD TV Distance:
 M/N: PDI-P26LCDE
 Mode: HDMI IN
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Antenna Height cm	Table Degree degree	Comment
1		169.6800	17.18	17.20	34.38	43.50	-9.12	QP			
2		250.1899	22.31	17.40	39.71	46.00	-6.29	QP			
3	*	295.7800	23.55	19.30	42.85	46.00	-3.15	QP			
4		620.7300	15.85	23.51	39.36	46.00	-6.64	QP			
5	!	675.0499	15.65	24.55	40.20	46.00	-5.80	QP			
6		975.7500	12.83	28.30	41.13	54.00	-12.87	QP			

*:Maximum data x:Over limit !:over margin


Engineer Signature: Zero



Address: No.5, Langshan 2nd Rd., North Hi-Tech Industrial park
 Guangdong, China
 Tel: 0755-86170306 Fax: 0755-86170310

Radiated Emission Measurement

File : PDI-P26LCDE Data : #45 Date : 2011-7-8 Time : 10:12:18

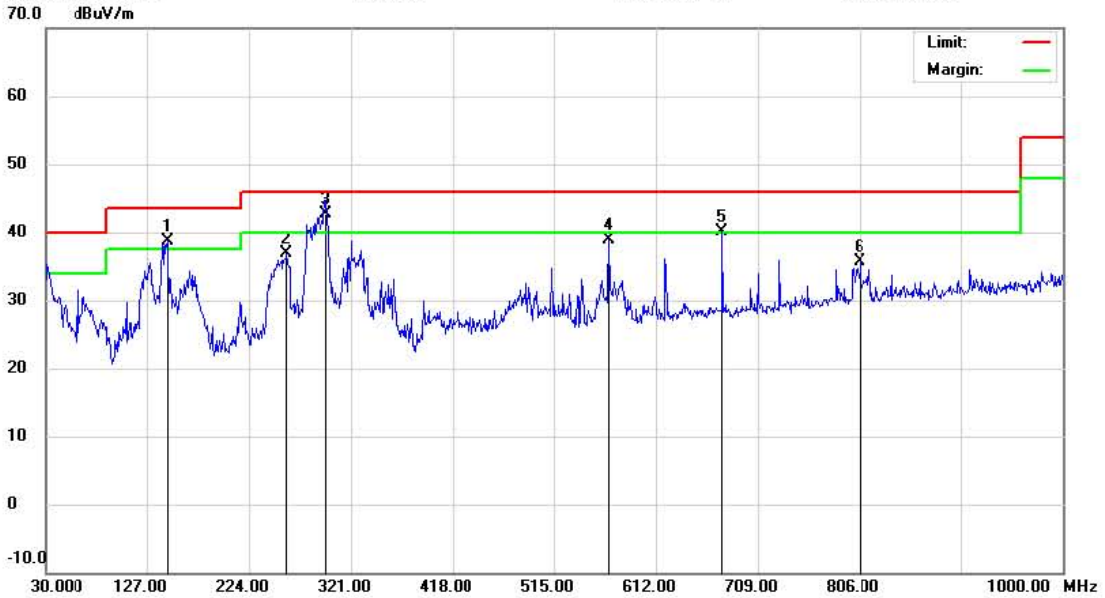

Site site MOST 3M Polarization: **Vertical** Temperature: 26
 Limit: FCC Part15 B 3M Radiation Power: AC 120V/60Hz Humidity: 61 %
 EUT: LCD TV Distance:
 M/N: PDI-P26LCDE
 Mode: HDMI IN
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Antenna Height cm	Table Degree degree	Comment
1		146.4000	21.92	16.79	38.71	43.50	-4.79	QP			
2		259.8899	19.27	17.60	36.87	46.00	-9.13	QP			
3	*	296.3300	23.40	19.30	42.70	46.00	-3.30	QP			
4		567.3799	16.00	22.82	38.82	46.00	-7.18	QP			
5		675.0499	15.64	24.55	40.19	46.00	-5.81	QP			
6		806.9700	9.88	25.90	35.78	46.00	-10.22	QP			

*:Maximum data x:Over limit | :over margin


Engineer Signature: Zero



Address: No.5, Langshan 2nd Rd., North Hi-Tech Industrial park
 Guangdong, China
 Tel: 0755-86170306 Fax: 0755-86170310

Radiated Emission Measurement

File : PDI-P26LCDE Data : #56 Date : 2011-7-8 Time : 18:20:57

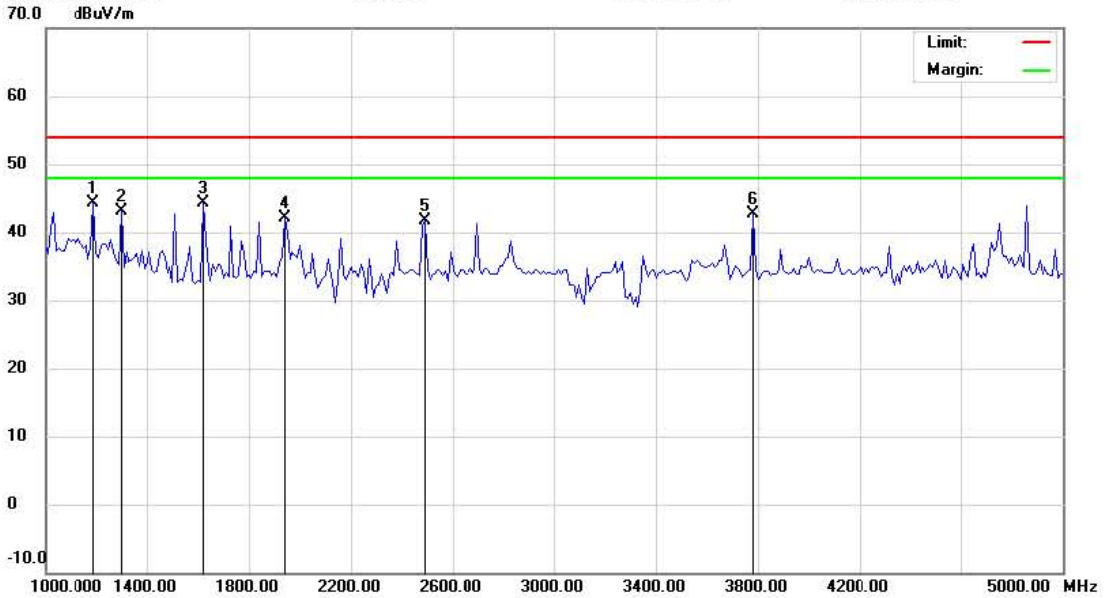

Site site #1 Polarization: **Horizontal** Temperature: 26
 Limit: FCC Part15 B 3M Radiation(1000M-5000M) Power: AC 120V/60Hz Humidity: 61 %
 EUT: LC D TV Distance:
 M/N: PDI-P26LCDE
 Mode: HDMI IN
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1	*	1190.000	62.22	-17.88	44.34	54.00	-9.66	AVG		
2		1300.000	60.86	-17.77	43.09	54.00	-10.91	AVG		
3		1620.000	59.87	-15.57	44.30	54.00	-9.70	AVG		
4		1940.000	56.76	-14.72	42.04	54.00	-11.96	AVG		
5		2490.000	55.08	-13.42	41.66	54.00	-12.34	AVG		
6		3780.000	53.08	-10.40	42.68	54.00	-11.32	AVG		

*:Maximum data x:Over limit l:over margin


Engineer Signature: Kavin



Address: No.5, Langshan 2nd Rd., North Hi-Tech Industrial park
 Guangdong, China
 Tel: 0755-86170306 Fax: 0755-86170310

Radiated Emission Measurement

File : PDI-P26LCDE Data : #57 Date : 2011-7-8 Time : 18:25:51

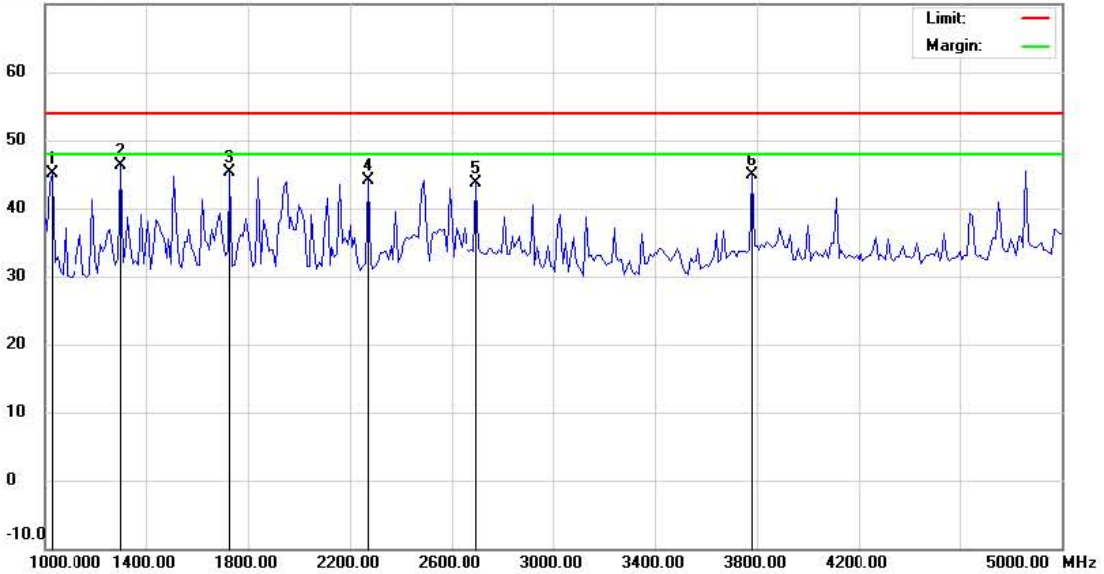

Site site #1 Polarization: **Vertical** Temperature: 26
 Limit: FCC Part15 B 3M Radiation(1000M-5000M) Power: AC 120V/60Hz Humidity: 61 %
 EUT: LC D TV Distance:
 M/N: PDI-P26LCDE
 Mode: HDMI IN
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Antenna Height cm	Table Degree degree	Comment
1		1030.000	64.23	-19.04	45.19	54.00	-8.81	AVG			
2	*	1300.000	64.15	-17.77	46.38	54.00	-7.62	AVG			
3		1730.000	60.16	-14.94	45.22	54.00	-8.78	AVG			
4		2270.000	58.76	-14.56	44.20	54.00	-9.80	AVG			
5		2700.000	56.99	-13.24	43.75	54.00	-10.25	AVG			
6		3780.000	55.33	-10.40	44.93	54.00	-9.07	AVG			

*:Maximum data x:Over limit l:over margin


Engineer Signature: Kavin



Address: No.5, Langshan 2nd Rd., North Hi-Tech Industrial park
 Guangdong, China
 Tel: 0755-86170306 Fax: 0755-86170310

Radiated Emission Measurement

File : PDI-P26LCDE Data : #31 Date : 2011-7-8 Time : 9:06:11
 70.0 dBuV/m

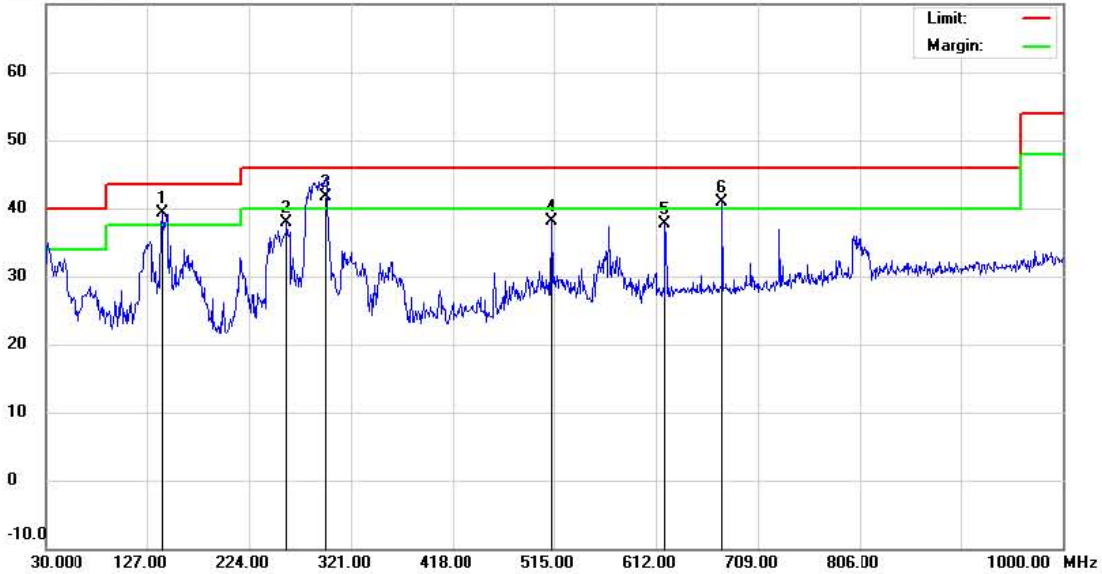

Site site MOST 3M Polarization: **Vertical** Temperature: 26
 Limit: FCC Part15 B 3M Radiation Power: AC 120V/60Hz Humidity: 61 %
 EUT: LCD TV Distance:
 M/N: PDI-P26LCDE
 Mode: AV IN
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Antenna Height cm	Table Degree degree	Comment
1	*	141.5500	22.28	17.11	39.39	43.50	-4.11	QP			
2		259.8899	20.26	17.60	37.86	46.00	-8.14	QP			
3	!	296.7500	22.50	19.30	41.80	46.00	-4.20	QP			
4		513.0599	16.47	21.56	38.03	46.00	-7.97	QP			
5		620.7300	14.23	23.51	37.74	46.00	-8.26	QP			
6	!	675.0499	16.29	24.55	40.84	46.00	-5.16	QP			

*:Maximum data x:Over limit !:over margin


Engineer Signature: Zero



Address: No.5, Langshan 2nd Rd., North Hi-Tech Industrial park
 Guangdong, China
 Tel: 0755-86170306 Fax: 0755-86170310

Radiated Emission Measurement

File : PDI-P26LCDE Data : #32 Date : 2011-7-8 Time : 9:13:28
 70.0 dBuV/m

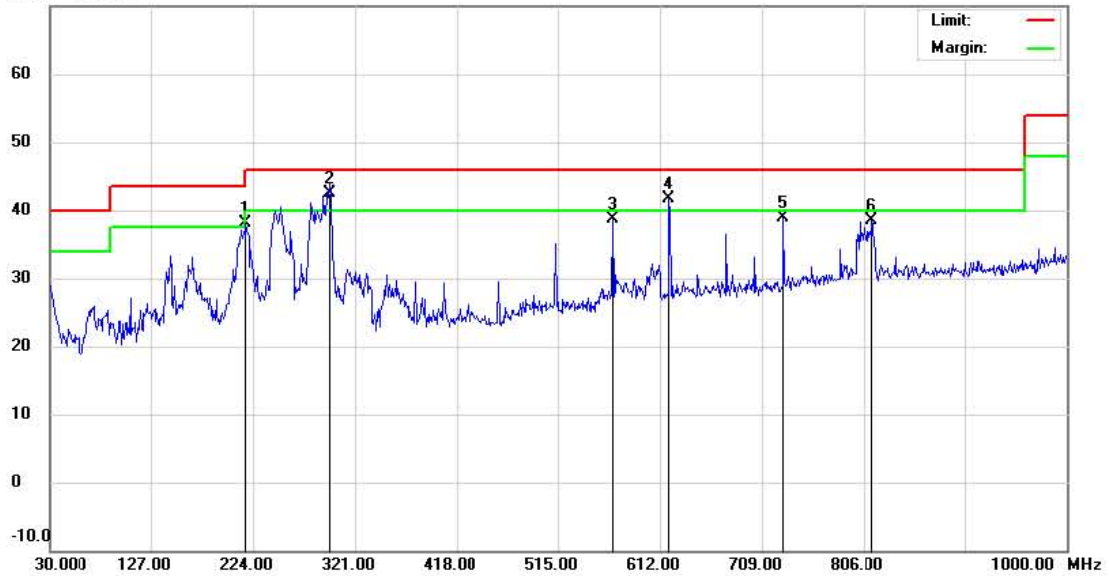

Site site MOST 3M Polarization: **Horizontal** Temperature: 26
 Limit: FCC Part15 B 3M Radiation Power: AC 120V/60Hz Humidity: 61 %
 EUT: LCD TV Distance:
 M/N: PDI-P26LCDE
 Mode: AV IN
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Antenna Height cm	Table Degree degree	Comment
1		217.2100	21.85	16.18	38.03	46.00	-7.97	QP			
2	*	296.7500	23.28	19.30	42.58	46.00	-3.42	QP			
3		567.3799	15.85	22.82	38.67	46.00	-7.33	QP			
4	l	620.7300	18.23	23.51	41.74	46.00	-4.26	QP			
5		729.3700	14.04	24.88	38.92	46.00	-7.08	QP			
6		814.7300	12.41	26.14	38.55	46.00	-7.45	QP			

*:Maximum data x:Over limit l:over margin

Engineer Signature: Zero




Address: No.5, Langshan 2nd Rd., North Hi-Tech Industrial park
 Guangdong, China
 Tel: 0755-86170306 Fax: 0755-86170310

Radiated Emission Measurement

File : PDI-P26LCDE Data : #66 Date : 2011-7-8 Time : 19:53:05

70.0 dBuV/m

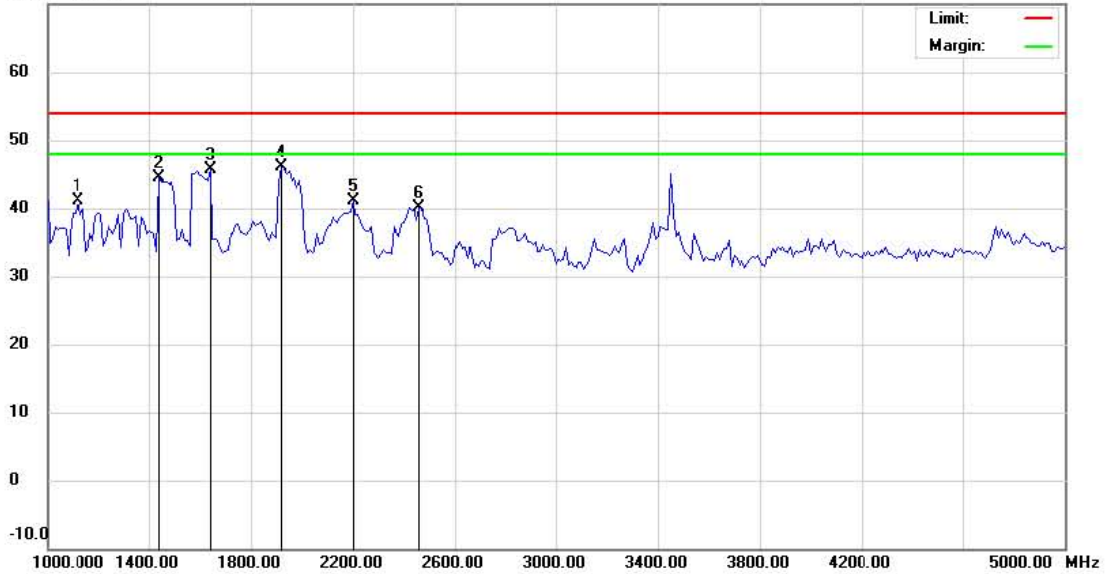

Site site #1 Polarization: **Vertical** Temperature: 26
 Limit: FCC Part15 B 3M Radiation(1000M-5000M) Power: AC 120V/60Hz Humidity: 61 %
 EUT: LC D TV Distance:
 M/N: PDI-P26LCDE
 Mode: AV IN
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Antenna Height cm	Table Degree	Comment
1		1120.000	59.30	-18.28	41.02	54.00	-12.98	AVG			
2		1440.000	61.44	-16.85	44.59	54.00	-9.41	AVG			
3		1640.000	61.23	-15.43	45.80	54.00	-8.20	AVG			
4	*	1920.000	60.71	-14.70	46.01	54.00	-7.99	AVG			
5		2200.000	56.00	-14.86	41.14	54.00	-12.86	AVG			
6		2460.000	53.63	-13.57	40.06	54.00	-13.94	AVG			

*:Maximum data x:Over limit l:over margin


Engineer Signature: Kavin



Address: No.5, Langshan 2nd Rd., North Hi-Tech Industrial park
 Guangdong, China
 Tel: 0755-86170306 Fax: 0755-86170310

Radiated Emission Measurement

File :PDI-P26LCDE Data :#67 Date: 2011-7-8 Time: 19:04:19

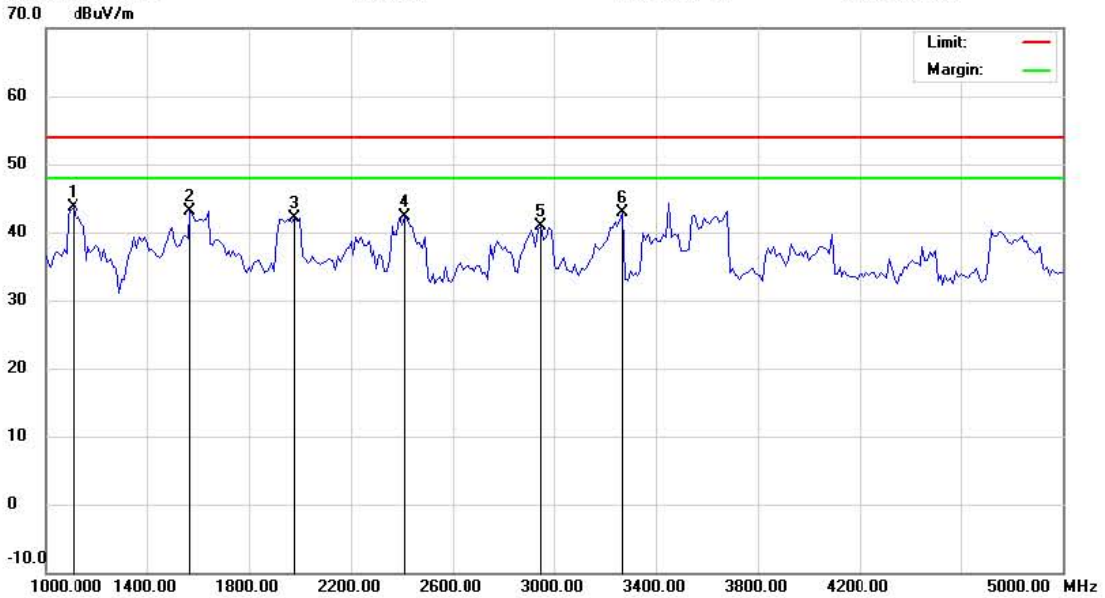

Site site #1 Polarization: **Horizontal** Temperature: 26
 Limit: FCC Part15 B 3M Radiation(1000M-5000M) Power: AC 120V/60Hz Humidity: 61 %
 EUT: LC D TV Distance:
 M/N: PDI-P26LCDE
 Mode: AV IN
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Antenna Height cm	Table Degree degree	Comment
1	*	1110.000	61.95	-18.34	43.61	54.00	-10.39	AVG			
2		1570.000	59.05	-15.90	43.15	54.00	-10.85	AVG			
3		1980.000	56.92	-14.75	42.17	54.00	-11.83	AVG			
4		2410.000	56.19	-13.81	42.38	54.00	-11.62	AVG			
5		2950.000	53.05	-12.23	40.82	54.00	-13.18	AVG			
6		3270.000	54.98	-12.03	42.95	54.00	-11.05	AVG			

*:Maximum data x:Over limit l:over margin

Engineer Signature: Kavin

7.ANTENNA CONDUCTED POWER

7.1: Test Method

- 1: The EUT was placed on a table, which is 0.8m above ground plane
- 2: Maximum procedure was performed to ensure EUT Compliance
- 3: A impedance matching pad(75ohm/50ohm) is used for the test from the tuner to the receiver
Input port
- 4: A EMI test receiver(R&S Test receiver ESCS30) is used to test the emissions from the antenna
Port through the impedance matching pad.

7.2: Limit

Frequency MHz	Power nW	Voltage dBuV	Detector
30-5000	2	51.8	PEAK

Remark: During the Antenna conducted power test, all the channels in TV mode, DTV mode and FM mode are applied, and the results are met the limit of requirement, the test data which listed in the report are the typical channels of High Middle and Low.

7.3: Test Result Of Antenna Conducted Power

Test Mode	TV(CH 02)-55.25MHz		Frequency range	30M-1000MHz	
Frequency(MHz)	Emission level(dBuV)	Reading level (dBuV)	Connection factor(dB)	Limit dBuV	Margin (dB)
689.50	34.4	23.5	10.5	51.8	17.4
784.48	33.3	22.6	10.7	51.8	18.5

Test Mode	TV (CH 14)-471.25MHz		Frequency range	30M-5000MHz	
Frequency(MHz)	Emission level(dBuV)	Reading level (dBuV)	Connection factor(dB)	Limit dBuV	Margin (dB)
682.43	33.9	22.4	10.5	51.8	17.9
750.57	32.6	22.5	10.6	51.8	19.2

Test Mode	TV (CH 69)-801.25MHz		Frequency range	30M-5000MHz	
Frequency(MHz)	Emission level(dBuV)	Reading level (dBuV)	Connection factor(dB)	Limit dBuV	Margin (dB)
179.62	33.8	25.6	8.2	51.8	18.0
617.31	32.9	22.7	10.2	51.8	18.9
702.11	33.1	22.6	10.5	51.8	18.7

Test Mode	DTV CH 02-1)-57MHz		Frequency range	30M-1000MHz	
Frequency(MHz)	Emission level(dBuV)	Reading level (dBuV)	Connection factor(dB)	Limit dBuV	Margin (dB)
363.25	33.0	23.8	9.2	51.8	18.8
555.12	33.7	23.8	9.9	51.8	18.1

Test Mode	DTV (CH 14-1)-473MHz		Frequency range	30M-5000MHz	
Frequency(MHz)	Emission level(dBuV)	Reading level (dBuV)	Connection factor(dB)	Limit dBuV	Margin (dB)
198.31	31.9	23.7	8.2	51.8	19.9
446.93	33.3	23.9	9.4	51.8	18.5

Test Mode	DTV (CH 69-1)-803MHz		Frequency range	30M-5000MHz	
Frequency(MHz)	Emission level(dBuV)	Reading level (dBuV)	Connection factor(dB)	Limit dBuV	Margin (dB)
214.55	32.6	24.2	8.4	51.8	19.2
385.43	32.6	23.4	9.2	51.8	19.2

Test Mode	FM 88.1MHz		Frequency range	30M-1000MHz	
Frequency(MHz)	Emission level(dBuV)	Reading level (dBuV)	Connection factor(dB)	Limit dBuV	Margin (dB)
703.93	36.3	25.8	10.5	51.8	15.5
952.68	37.1	25.9	11.2	51.8	14.7

Test Mode	FM 98.1MHz		Frequency range	30M-1000MHz	
Frequency(MHz)	Emission level(dBuV)	Reading level (dBuV)	Connection factor(dB)	Limit dBuV	Margin (dB)
783.06	36.4	25.7	10.7	51.8	15.4
953.45	37.9	26.7	11.2	51.8	13.9

Test Mode	FM 107.9MHz		Frequency range	30M-1000MHz	
Frequency(MHz)	Emission level(dBuV)	Reading level (dBuV)	Connection factor(dB)	Limit dBuV	Margin (dB)
935.61	38.3	27.2	11.1	51.8	13.5
953.65	36.1	24.5	11.2	51.8	15.7