

No. 1 Workshop, M-10, Middle section, Science & Technology Park, Shenzhen,

Guangdong, China 518057

Telephone: +86 (0) 755 2601 2053 Fax: +86 (0) 755 2671 0594

Email: sgs_internet_operations@sgs.com

Report No.: SZEM110600137101

Page: 1 of 69

FCC REPORT

Application No: SZEM1106001371RF

Applicant: PDi Communication Systems, Inc.

Product Name: WIRELESS TABLE RADIO

Operation Frequency: 2.402GHz to 2.480GHz

FCC ID: WQ5PDI-TR100

Standards: FCC CFR Title 47 Part 15 Subpart C

Date of Receipt: 2011-06-15

Date of Test: 2011-06-15 to 2011-08-15

Date of Issue: 2011-08-24

Test Result : PASS *

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:

Jack Zhang

EMC Laboratory Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. All test results in this report can be traceable to National or International Standards.



Report No.: SZEM110600137101

Page: 2 of 69

2 Contents

			Page
1	C	OVER PAGE	1
2	C	ONTENTS	2
3		EST SUMMARY	
4		ENERAL INFORMATION	
٠			
	4.1	CLIENT INFORMATION	
	4.2	GENERAL DESCRIPTION OF E.U.T.	
	4.3	E.U.T OPERATION MODE	
	4.4	DESCRIPTION OF SUPPORT UNITS	
	4.5	TEST FACILITY	
	4.6 4.7	TEST LOCATION OTHER INFORMATION REQUESTED BY THE CUSTOMER	
	4.7	TEST INSTRUMENTS LIST	
5	TE	EST RESULTS AND MEASUREMENT DATA	9
	5.1	Antenna requirement:	9
	5.2	CONDUCTED EMISSIONS	10
	5.3	CONDUCTED PEAK OUTPUT POWER	13
	5.4	20DB OCCUPY BANDWIDTH	19
	5.5	CARRIER FREQUENCIES SEPARATION	25
	5.6	HOPPING CHANNEL NUMBER	
	5.7	DWELL TIME	35
	5.8	BAND EDGE	41
	5.9	RF ANTENNA CONDUCTED SPURIOUS EMISSIONS	48
	5.10	PSEUDORANDOM FREQUENCY HOPPING SEQUENCE	54
	5.11	RADIATED EMISSION	
	5.	11.1 Radiated emission below 1GHz	
	•	11.2 Transmitter emission above 1GHz	
	5.	11.3 Band edge (Radiated Emission)	62-69



Report No.: SZEM110600137101

Page: 3 of 69

3 Test Summary

Test Item	Section in CFR 47	Result
Antenna Requirement	15.203/15.247 (c)	Pass
AC Power Line Conducted Emission	15.207	Pass
Conducted Peak Output Power	15.247 (b)(1)	Pass
20dB Occupied Bandwidth	15.247 (a)(1)	Pass
Carrier Frequencies Separation	15.247 (a)(1)	Pass
Hopping Channel Number	15.247 (b)	Pass
Dwell Time	15.247 (a)(1)	Pass
Pseudorandom Frequency Hopping Sequence	15.247(b)(4)&TCB Exclusion List (7 July 2002)	Pass
Radiated Emission	15.205/15.209	Pass
Band Edge	15.247(d)	Pass

Remark: Pass: The EUT complies with the essential requirements in the standard.

Fail: The EUT does not comply with the essential requirements in the standard.



Report No.: SZEM110600137101

Page: 4 of 69

4 General Information

4.1 Client Information

Applicant:	PDi Communication Systems, Inc.
Address of Applicant:	40 Greenwood Lane, Springboro, OH 45066 USA
Manufacturer:	kaito enterprises corp
Address of Manufacturer:	11/F, Electronics Science & Technology Building 2070 A Shennan Central Road, Shenzhen, China
Factory:	HUITAI (GUANGDONG) DIGITAL SCIENCE & TECHNOLOGY CO., LTD.
Address of Factory:	No.6th, Songbai Road, South Area, Huizhou Digital Industrial Park, Huiao Highway, Huizhou, Guangdong P.R.C

4.2 General Description of E.U.T.

Product Name:	WIRELESS TABLE RADIO
Model No.:	PDI-TR100
Operation Frequency:	2402MHz~2480MHz
Channel numbers:	79
Channel separation:	1MHz
Modulation type:	GFSK, π/4DQPSK, 8DPSK
Antenna Type:	PCB Antenna
Antenna gain:	-3.0dBi
Power supply:	Model:VA24A-150160
	Input:100-240V 50/60 Hz ~0.7A
	Output:15V === 1.6A
Clock Battery:	3.0V DC (1.5V x 2 "AAA" Size Batteries)



Report No.: SZEM110600137101

Page: 5 of 69

Operation F	Operation Frequency each of channel						
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2402MHz	21	2422MHz	41	2442MHz	61	2462MHz
2	2403MHz	22	2423MHz	42	2443MHz	62	2463MHz
3	2404MHz	23	2424MHz	43	2444MHz	63	2464MHz
4	2405MHz	24	2425MHz	44	2445MHz	64	2465MHz
5	2406MHz	25	2426MHz	45	2446MHz	65	2466MHz
6	2407MHz	26	2427MHz	46	2447MHz	66	2467MHz
7	2408MHz	27	2428MHz	47	2448MHz	67	2468MHz
8	2409MHz	28	2429MHz	48	2449MHz	68	2469MHz
9	2410MHz	29	2430MHz	49	2450MHz	69	2470MHz
10	2411MHz	30	2431MHz	50	2451MHz	70	2471MHz
11	2412MHz	31	2432MHz	51	2452MHz	71	2472MHz
12	2413MHz	32	2433MHz	52	2453MHz	72	2473MHz
13	2414MHz	33	2434MHz	53	2454MHz	73	2474MHz
14	2415MHz	34	2435MHz	54	2455MHz	74	2475MHz
15	2416MHz	35	2436MHz	55	2456MHz	75	2476MHz
16	2417MHz	36	2437MHz	56	2457MHz	76	2477MHz
17	2418MHz	37	2438MHz	57	2458MHz	77	2478MHz
18	2419MHz	38	2439MHz	58	2459MHz	78	2479MHz
19	2420MHz	39	2440MHz	59	2460MHz	79	2480MHz
20	2421MHz	40	2441MHz	60	2461MHz		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The lowest channel	2402MHz
The middle channel	2441MHz
The highest channel	2480MHz

SGS

SGS-CSTC Standards Technical Services Ltd.

Report No.: SZEM110600137101

Page: 6 of 69

4.3 E.U.T Operation mode

Operating Environment:	
Temperature:	24.0 °C
Humidity:	52 % RH
Atmospheric Pressure:	1004mbar
Test mode:	
Transmitting mode:	Keep the EUT in Transmitting mode at low channel, middle channel and high channel.
Bluetooth mode:	Keep the EUT communicating with other Bluetooth device.

4.4 Description of Support Units

The EUT has been tested as an independent unit.

4.5 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

• CNAS (No. CNAS L2929)

CNAS has accredited SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

VCCI

The 3m Semi-anechoic chamber and Shielded Room (7.5m x 4.0m x 3.0m) of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-2197 and C-2383 respectively.

Date of Registration: September 29, 2008. Valid until September 28, 2011.

• FCC – Registration No.: 556682

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 556682, March 16, 2011

• Industry Canada (IC)

The 3m Semi-anechoic chamber of SGS-CSTC Standards Technical Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 4620C-1.

4.6 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch E&E Lab No. 1 Workshop, M-10, Middle section, Science & Technology Park, Shenzhen, Guangdong, China 518057

Telephone: +86 (0) 755 2601 2053 Fax: +86 (0) 755 2671 0594

No tests were sub-contracted.

4.7 Other Information Requested by the Customer

None.

SGS

SGS-CSTC Standards Technical Services Ltd.

Report No.: SZEM110600137101

Page: 7 of 69

4.8 Test Instruments list

RE i	RE in Chamber					
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (yyyy-mm-dd)	Cal.Due date (yyyy-mm-dd)
1	3m Semi-Anechoic Chamber	ETS-LINDGREN	N/A	SEL0017	2011-06-10	2012-06-10
2	EMI Test Receiver	Rohde & Schwarz	ESIB26	SEL0023	2011-05-26	2012-05-26
3	EMI Test software	AUDIX	E3	SEL0050	N/A	N/A
4	Coaxial cable	SGS	N/A	SEL0028	2011-05-29	2012-05-29
5	BiConiLog Antenna (26-3000MHz)	ETS-LINDGREN	3142C	SEL0015	2010-11-09	2011-11-09
6	Double-ridged horn (1-18GHz)	ETS-LINDGREN	3117	SEL0006	2010-11-09	2011-11-09
7	Horn Antenna (18-26GHz)	ETS-LINDGREN	3160	SEL0076	2010-11-09	2011-11-09
8	Pre-amplifier (0.1-1300MHz)	Agilent Technologies	8447D	SEL0053	2011-05-26	2012-05-26
9	Pre-Amplifier (0.1-26.5GHz)	Compliance Directions Systems Inc.	PAP-0126	SEL0168	2010-10-27	2011-10-27
11	Band filter	Amindeon	82346	SEL0094	2011-05-26	2012-05-26

Con	Conducted Emission						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (yyyy-mm-dd)	Cal.Due date (yyyy-mm-dd)	
1	Shielding Room	ZhongYu Electron	GB-88	SEL0042	2011-06-10	2012-06-10	
2	LISN	Rohde & Schwarz	ENV216	SEL0152	2010-10-27	2011-10-26	
3	Two-Line V-Network	Rohde & Schwarz	ENV216	SEL0152	2010-10-27	2011-10-27	
4	EMI Test Receiver	Rohde & Schwarz	ESCI	SEL0022	2011-05-26	2012-05-26	
5	Coaxial Cable	SGS	N/A	SEL0024	2011-05-29	2012-05-29	



Report No.: SZEM110600137101

Page: 8 of 69

RF c	conducted					
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (yyyy-mm-dd)	Cal.Due date (yyyy-mm-dd)
1	Spectrum Analyzer	Rohde & Schwarz	FSP 30	SEL0154	2010-10-27	2011-10-27
2	Coaxial cable	SGS	N/A	SEL0028	2011-05-29	2012-05-29

General used equipment						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (yyyy-mm-dd)	Cal.Due date (yyyy-mm-dd)
1	Humidity/ Temperature Indicator	Shanghai	ZJ1-2B	SEL0102 to SEL0103	2010-11-04	2011-11-04
2	Humidity/ Temperature Indicator	Shanghai	ZJ1-2B	SEL0101	2011-03-10	2012-03-10
3	Barometer	ChangChun	DYM3	SEL0088	2011-05-18	2012-05-18



Report No.: SZEM110600137101

Page: 9 of 69

5 Test results and Measurement Data

5.1 Antenna requirement:

Standard requirement: FCC Part15 C Section 15.203 /247(c)

15.203 requirement:


An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

E.U.T Antenna:

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is -3.0dBi.

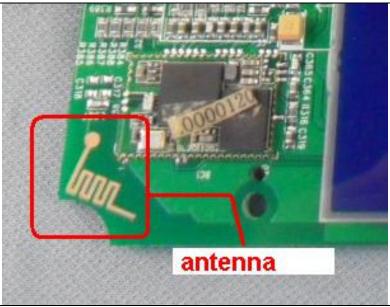



Report No.: SZEM110600137101

Page: 10 of 69

5.2 Conducted Emissions

Test Requirement:	FCC Part15 C Section 15 207			
Test Method:	FCC Part15 C Section 15.207 ANSI C63.10: 2009			
	ANSI C63.10: 2009 150kHz to 30MHz			
Test Frequency Range:				
Class / Severity:	Class B		,	
Limit:	Frequency range (MHz)	Limit (c		
	,	Quasi-peak	Average	
	0.15-0.5	66 to 56* 56	56 to 46*	
	0.5-5 5-30	60	46 50	
	* Decreases with the logarithm		30	
Test procedure	The E.U.T and simulators are impedance stabilization netwo coupling impedance for the main are also connected to the main 500hm/50uH coupling impedate to the block diagram of the test. A.C. line are checked for maxifind the maximum emission, the interface cables must be conducted measurement.	rk (L.I.S.N.).The provice asuring equipment. The power through a LISI name with 500hm terminates to setup and photograpmum conducted interface relative positions of	de a 500hm/50uH the peripheral devices In that provides a that	
Test setup:		nce Plane		
	LISN 40cm	80cm LISN		
	Test table/Insulation pla Remark E.U.T. Equipment Under Test LISN: Line Impedence Stabilizatio		er — AC power	
Test Instruments:	Test table/Insulation pla Remark E.U.T: Equipment Under Test	J.T EMI Receiver	er — AC power	
	Remark E.U.T. Equipment Under Test LISN: Line Impedence Stabilizatio Test table height=0.8m Refer to section 4.8 for details	J.T EMI Receiver	er — AC power	
Test Instruments: Test mode:	Remark E.U.T: Equipment Under Test LISN: Line Impedence Stabilization Test table height=0.8m	mode. e EUT in above mode	es to find the worse	

Measurement Data

An initial pre-scan was performed on the live and neutral lines with peak detector.


Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.



Report No.: SZEM110600137101

Page: 11 of 69

Live line:

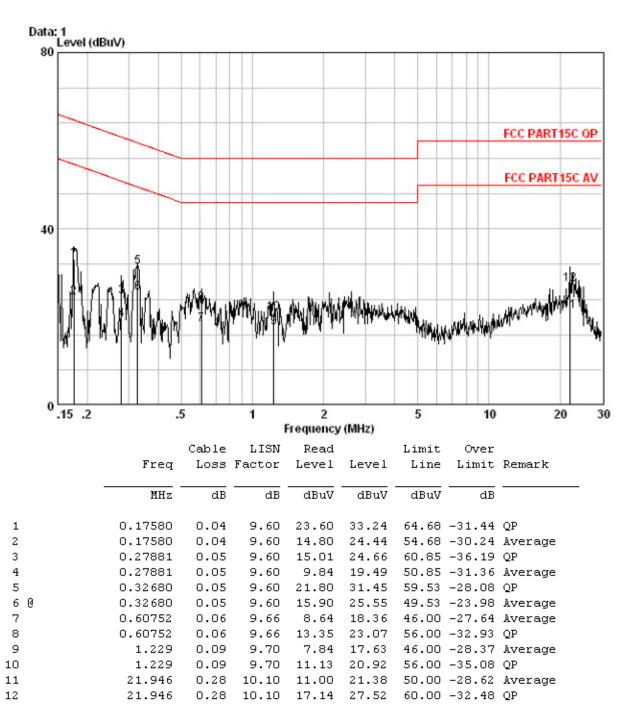

Notes:


- 1. The following Quasi-Peak and Average measurements were performed on the EUT:
- 2. Final Test Level =Receiver Reading + LISN Factor + Cable Loss.



Report No.: SZEM110600137101

Page: 12 of 69

Neutral line:

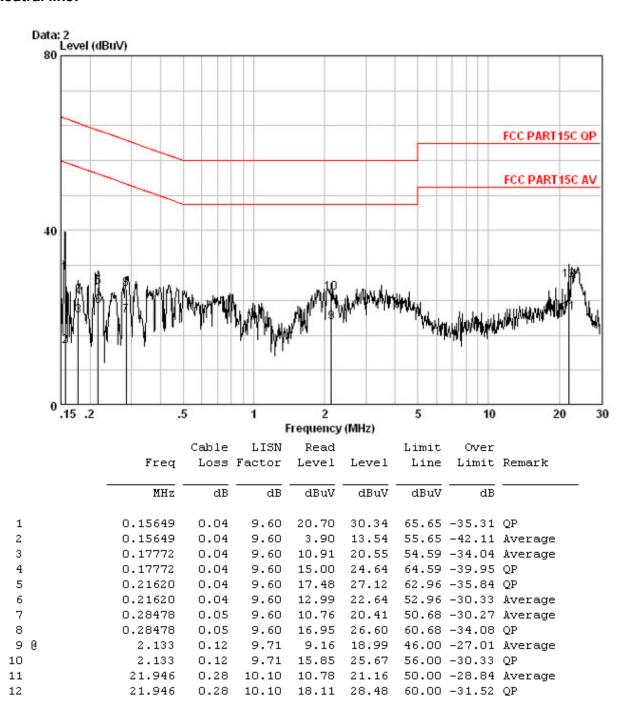

Notes:

- 1. The following Quasi-Peak and Average measurements were performed on the EUT:
- 2. Final Test Level = Receiver Reading + LISN Factor + Cable Loss.



Report No.: SZEM110600137101

Page: 13 of 69

5.3 Conducted Peak Output Power

Test Requirement:	FCC Part15 C Section 15.247 (b)(1)	
Test Method:	ANSI C63.10:2009	
Limit:	30dBm	
Test setup:	Spectrum Analyzer E.U.T Non-Conducted Table	
	Ground Reference Plane Remark:	
	Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.	
Test Instruments:	Refer to section 4.8 for details.	
Test state:	Non-hopping transmitting with all kinds of modulation.	
Test results:	Pass	

Measurement Data

GFSK mode				
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result	
Lowest	-5.80	30.00	Pass	
Middle	-4.40	30.00	Pass	
Highest	-3.86	30.00	Pass	
	π/4DQPSK mode			
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result	
Lowest	-7.36	30.00	Pass	
Middle	-6.26	30.00	Pass	
Highest	-5.66	30.00	Pass	
	8DPSK mode			
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result	
Lowest	-6.95	30.00	Pass	
Middle	-5.85	30.00	Pass	
Highest	-5.30	30.00	Pass	




Report No.: SZEM110600137101


Page: 14 of 69

Test plot as follows:

Toot mode:	GFSK	Toot oboppol:	Lowest
Lest mode:	GESK	l lest channel:	l Lowest

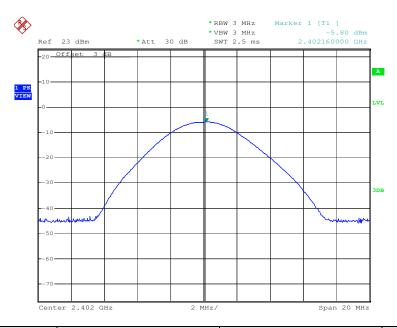

Test mode: GFSK Test channel: Middle

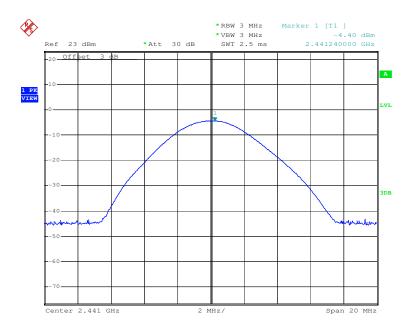





Report No.: SZEM110600137101

Page: 15 of 69

Test mode: GFSK Test channel: Highest

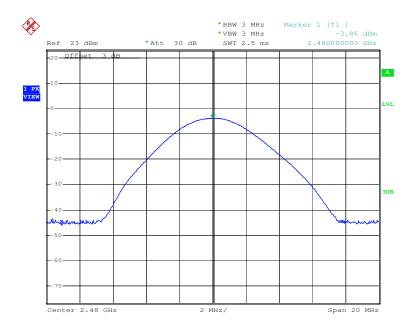

Test mode: π/4DQPSK Test channel: Lowest

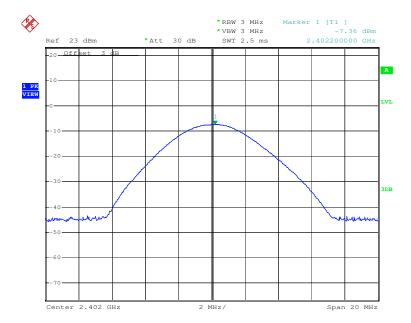





Report No.: SZEM110600137101

Page: 16 of 69

Test mode: π/4DQPSK Test channel: Middle

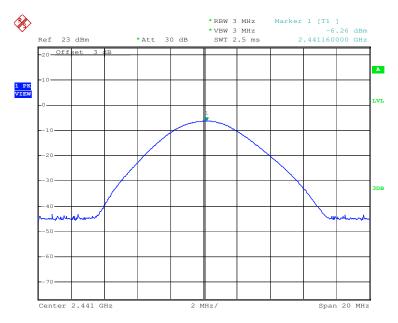

Test mode: π/4DQPSK Test channel: Highest

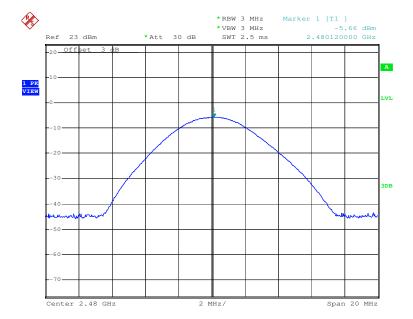





Report No.: SZEM110600137101

Page: 17 of 69

Test mode: 8DPSK Test channel: Lowest

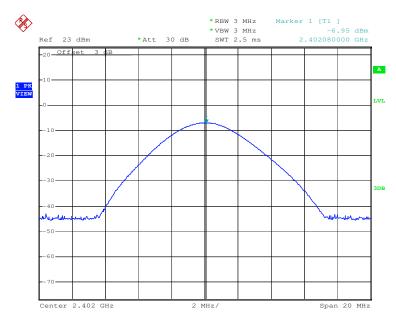

Test mode: 8DPSK Test channel: Middle

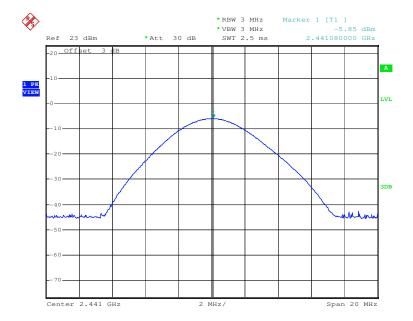




Report No.: SZEM110600137101

Page: 18 of 69

Test mode: 8DPSK Test channel: Highest

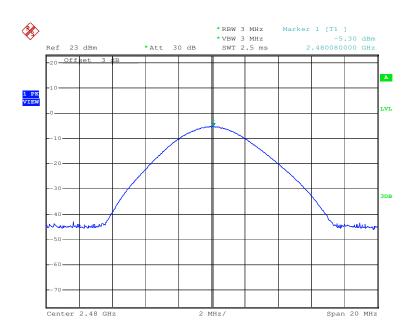



Report No.: SZEM110600137101

Page: 19 of 69

5.4 20dB Occupy Bandwidth

Test Requirement:	FCC Part15 C Section 15.247 (a)(1)	
Test Method:	ANSI C63.10:2009	
Limit:	NA	
Test setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane	
Test Instruments:	Refer to section 4.8 for details	
Test state:	Non-hopping transmitting with all kind of modulation.	
Test results:	Pass	

Measurement Data

-	20dB Occupy Bandwidth (kHz)		
Test channel	GFSK	π/4DQPSK	8DPSK
Lowest	1128	1368	1350
Middle	1146	1368	1344
Highest	1128	1362	1350




Report No.: SZEM110600137101


Page: 20 of 69

Test plot as follows:

Test mode: GFSK Test channel: Lowest

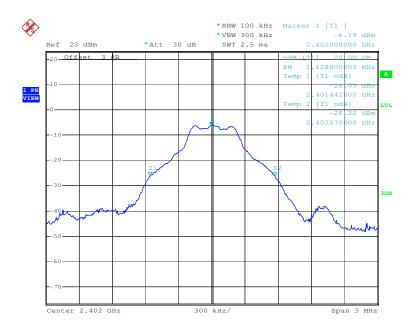

Test mode: GFSK Test channel: Middle

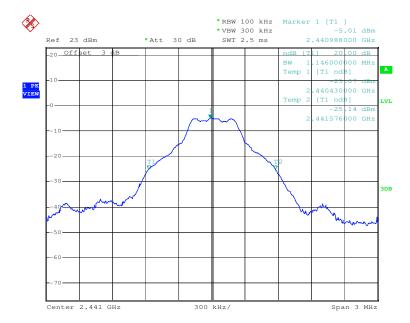





Report No.: SZEM110600137101

Page: 21 of 69

Test mode: GFSK Test channel: Highest

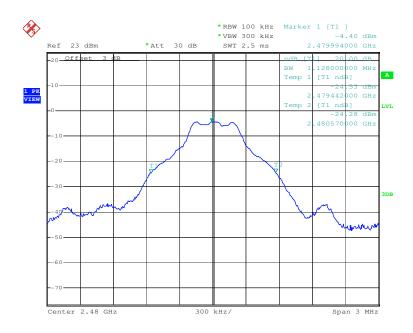

Test mode: π/4DQPSK Test channel: Lowest

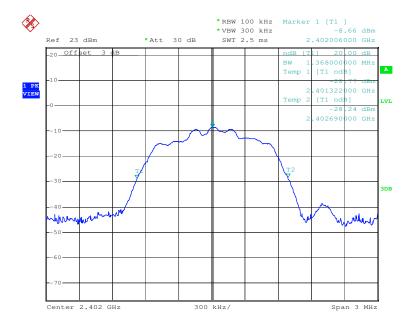





Report No.: SZEM110600137101

Page: 22 of 69

Test mode: π/4DQPSK Test channel: Middle

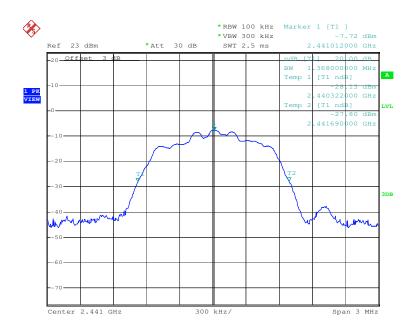

Test mode: π/4DQPSK Test channel: Highest

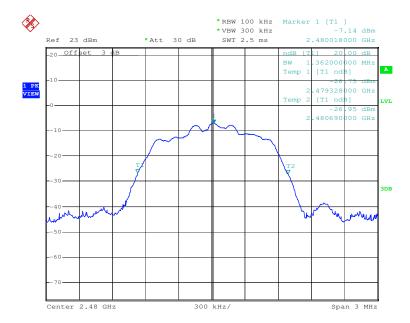





Report No.: SZEM110600137101

Page: 23 of 69

Test mode: 8DPSK Test channel: Lowest

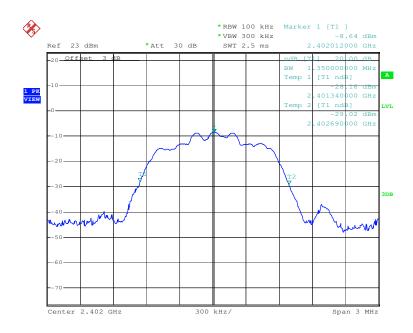

Test mode: 8DPSK Test channel: Middle

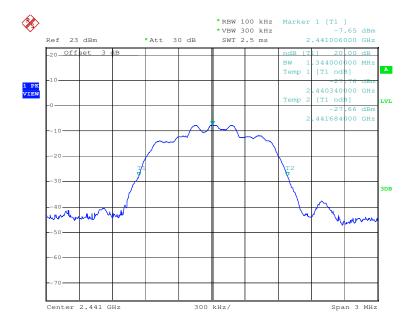




Report No.: SZEM110600137101

Page: 24 of 69

Test mode: 8DPSK Test channel: Highest

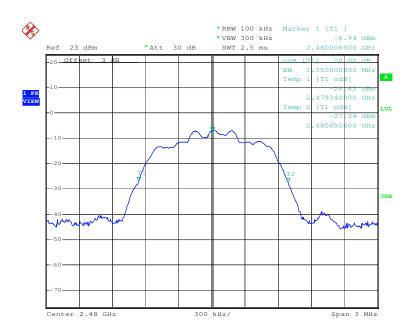



Report No.: SZEM110600137101

Page: 25 of 69

5.5 Carrier Frequencies Separation

Test Requirement:	FCC Part15 C Section 15.247 (a)(1)	
Test Method:	ANSI C63.10:2009	
Test state:	Hopping transmitting with all kind of modulation.	
Test setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane	
Test Instruments:	Refer to section 4.8 for details	
Limit:	0.025MHz or 2/3 of the 20dB bandwidth (whichever is greater)	
Test results:	Pass	



Report No.: SZEM110600137101

Page: 26 of 69

Measurement Data

GFSK mode			
Test channel	Carrier Frequencies Separation (kHz)	Limit (kHz)	Result
Lowest	1000	≥912	Pass
Middle	1000	≥912	Pass
Highest	1000	≥912	Pass
	π/4DQPSK m	node	
Test channel	Carrier Frequencies Separation (kHz)	Limit (kHz)	Result
Lowest	1000	≥912	Pass
Middle	1000	≥912	Pass
Highest	1000	≥912	Pass
8DPSK mode			
Test channel	Carrier Frequencies Separation (kHz)	Limit (kHz)	Result
Lowest	1000	≥912	Pass
Middle	1005	≥912	Pass
Highest	1005	≥912	Pass

Note: According to section 5.4,

Mode	20dB bandwidth (kHz) (worse case)	Limit (kHz) (Carrier Frequencies Separation)
GFSK	1146	764
π/4DQPSK	1368	912
8DPSK	1350	900




Report No.: SZEM110600137101


Page: 27 of 69

Test plot as follows:

Test mode: GFSK Test channel: Lowest

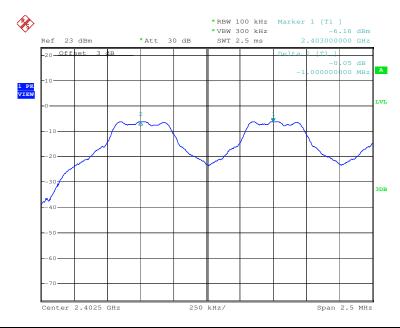

Test mode: GFSK Test channel: Middle

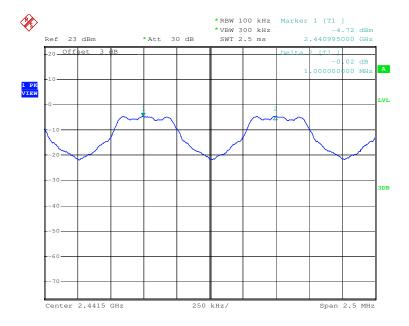





Report No.: SZEM110600137101

Page: 28 of 69

Test mode: GFSK Test channel: Highest

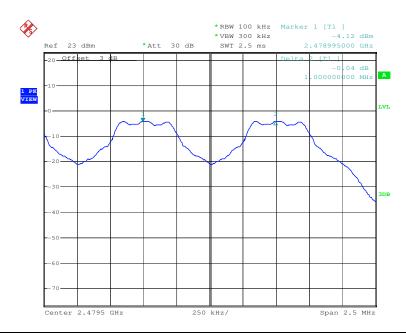

Test mode: π/4DQPSK Test channel: Lowest

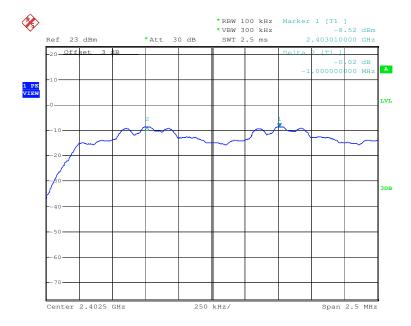





Report No.: SZEM110600137101

Page: 29 of 69

Test mode: π/4DQPSK Test channel: Middle

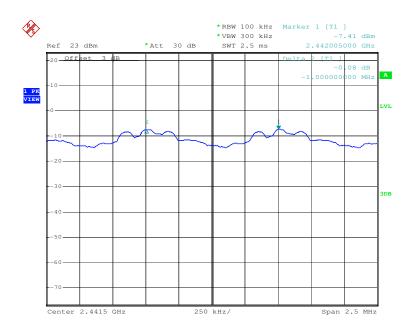

Test mode: π/4DQPSK Test channel: Highest

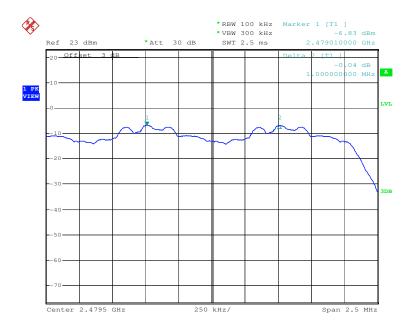





Report No.: SZEM110600137101

Page: 30 of 69

Test mode: 8DPSK Test channel: Lowest

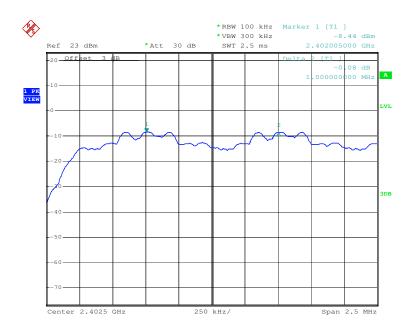

Test mode: 8DPSK Test channel: Middle

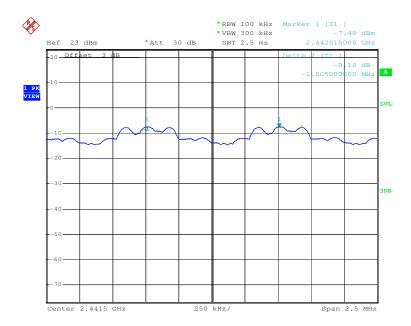


[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms-e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM110600137101

Page: 31 of 69

Test mode: 8DPSK Test channel: Highest

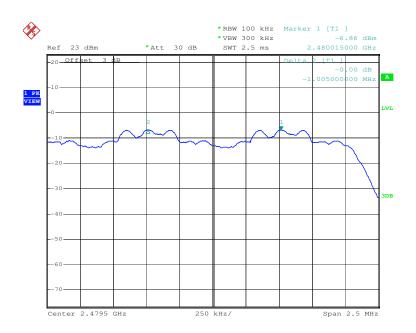



Report No.: SZEM110600137101

Page: 32 of 69

5.6 Hopping Channel Number

Test Requirement:	FCC Part15 C Section 15.247 (b)	
Test Method:	ANSI C63.10:2009	
Limit:	75channels	
Test setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane	
Test Instruments:	Refer to section 4.8 for details	
Test state:	Hopping transmitting with all kind of modulation.	
Test results:	Pass	

Measurement Data

Mode	Hopping channel numbers	Limit
GFSK	79	≥75
π/4DQPSK	79	≥75
8DPSK	79	≥75




Report No.: SZEM110600137101


Page: 33 of 69

Test plot as follows

	OFOI	
Loct modo:		
	I GESN	
i est illoue.		

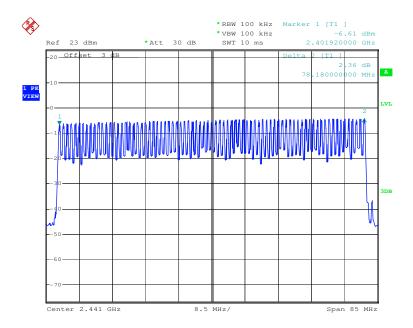



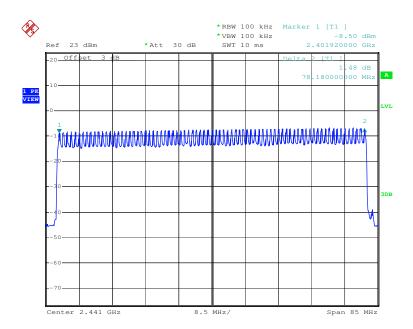




Report No.: SZEM110600137101

Page: 34 of 69

Test mode: 8DPSK

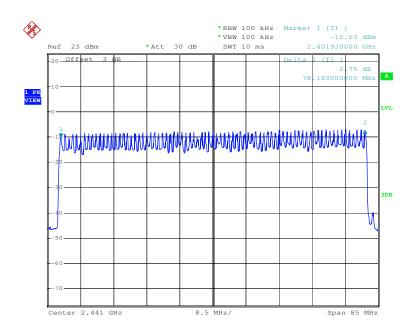



Report No.: SZEM110600137101

Page: 35 of 69

5.7 Dwell Time

Test Requirement:	FCC Part15 C Section 15.247 (a)(1)	
Test Method:	ANSI C63.10:2009 and KDB DA00-705	
Limit:	0.4 Second	
Test setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane	
Test Instruments:	Refer to section 4.8 for details.	
Test state:	Hopping transmitting with all kind of modulation.	
Test results:	Pass	

Measurement Data

Mode	Packet	Dwell time (second)	Limit (second)
GFSK	DH1	0.1344	0.4
	DH3	0.2704	0.4
	DH5	0.3147	0.4
π/4DQPSK	2-DH1	0.1392	0.4
	2-DH3	0.2696	0.4
	2-DH5	0.1851	0.4
8DPSK	3-DH1	0.1376	0.4
	3-DH3	0.2688	0.4
	3-DH5	0.3136	0.4

The test period: T= 0.4 Second/Channel x 79 Channel = 31.6 s

The lowest channel (2402MHz), middle channel (2441MHz), highest channel (2480MHz) as blow

DH1 time slot=0.420(ms)*(1600/ (2*79))*31.6=0.1344ms

DH3 time slot=1.690(ms)*(1600/(4*79))*31.6=0.2704ms

DH5 time slot=2.950(ms)*(1600/ (6*79))*31.6=0.3147ms





Report No.: SZEM110600137101


Page: 36 of 69

Test plot as follows

Test mode:	GFSK	Test Packet:	DH1

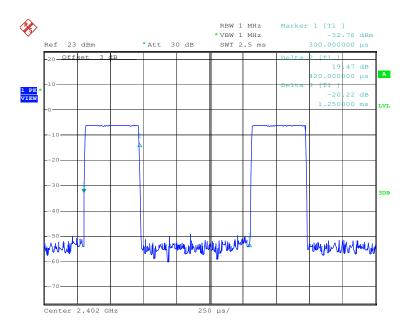



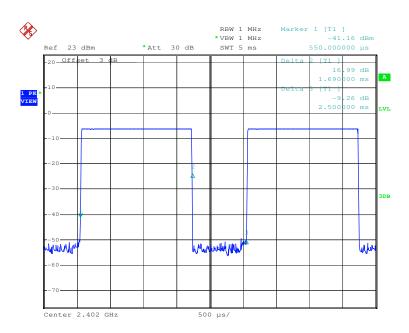






Report No.: SZEM110600137101

Page: 37 of 69

Test mode: GFSK Test Packet: DH5

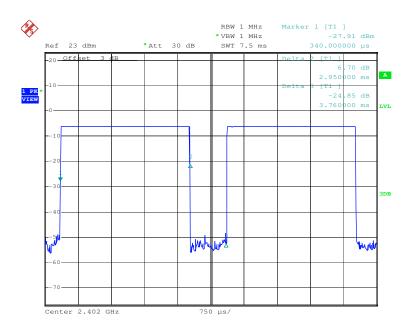



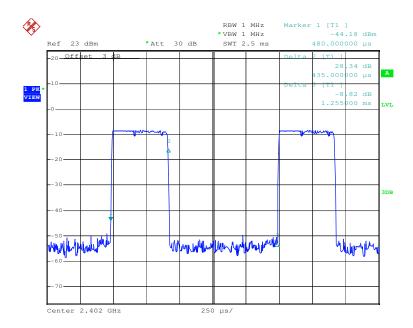





Report No.: SZEM110600137101

Page: 38 of 69

Test mode: π/4DQPSK Test Packet: 2-DH3

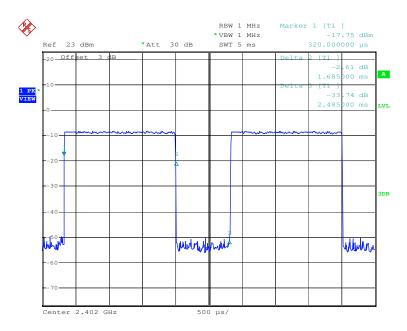

Test mode: π/4DQPSK Test Packet: 2-DH5

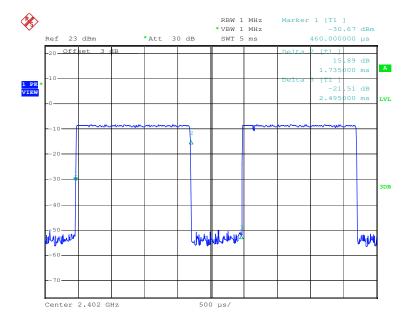


[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms-e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."





Report No.: SZEM110600137101

Page: 39 of 69

Test mode: 8DPSK Test Packet: 3-DH1

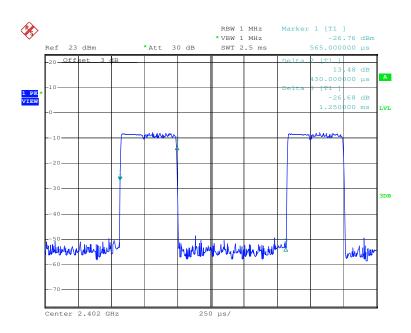



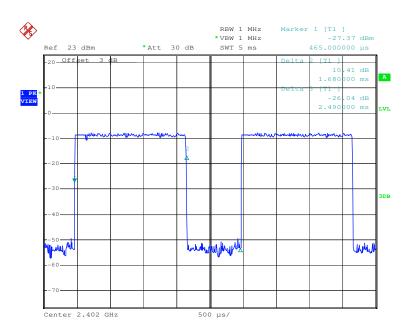




Report No.: SZEM110600137101

Page: 40 of 69

Test mode: 8DPSK Test Packet: 3-DH5

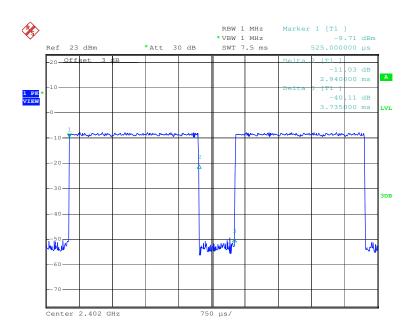

Date: 21.JUN.2011 15:12:40



Report No.: SZEM110600137101

Page: 41 of 69

5.8 Band Edge

Test Requirement:	FCC Part15 C Section 15.247 (d)						
Test Method:	ANSI C63.10:2009						
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.						
Test setup:							
	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane Remark: Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.						
Test Instruments:	Refer to section 4.8 for details.						
Test state:	Non hopping transmitting and Hopping transmitting with all kinds of modulation.						
Test results:	Pass						





Report No.: SZEM110600137101

Page: 42 of 69

Test plot as follows:

Test mode: GFSK Test channel: Lowest

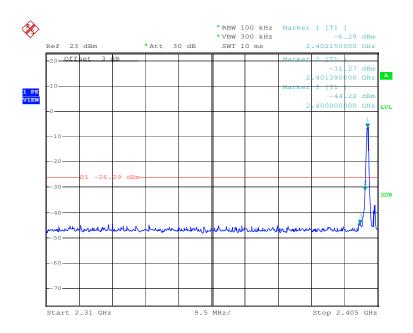

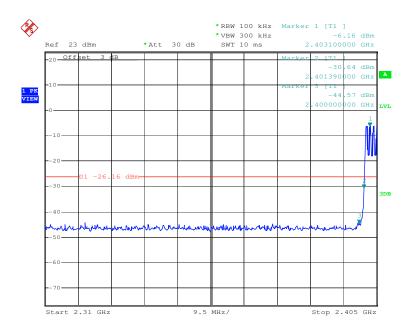





Report No.: SZEM110600137101

Page: 43 of 69

Test mode: GFSK Test channel: Highest

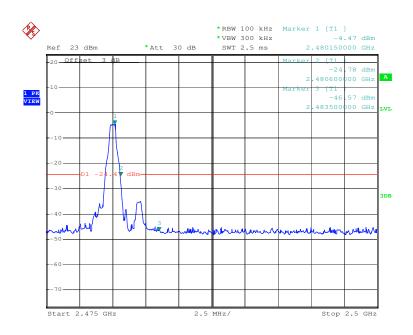

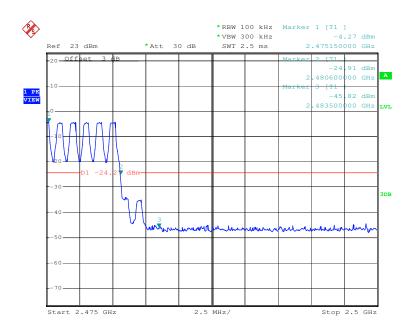





Report No.: SZEM110600137101

Page: 44 of 69

Test mode: π/4DQPSK Test channel: Lowest

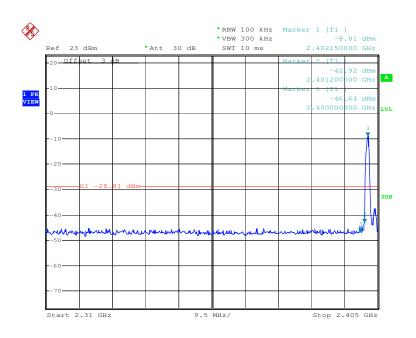

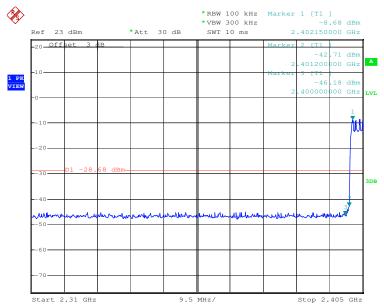





Report No.: SZEM110600137101

Page: 45 of 69

Test mode: π/4DQPSK Test channel: Highest

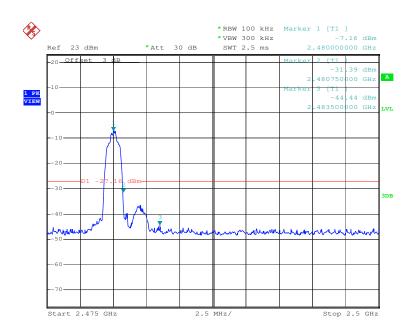

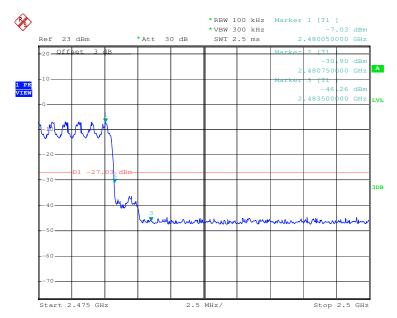





Report No.: SZEM110600137101

Page: 46 of 69

Test mode: 8DPSK Test channel: Lowest

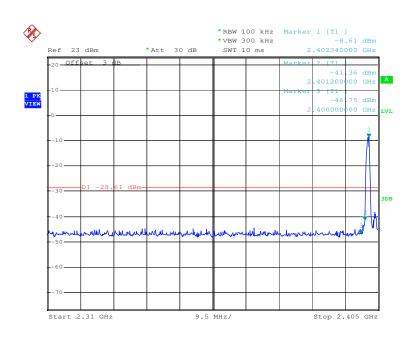

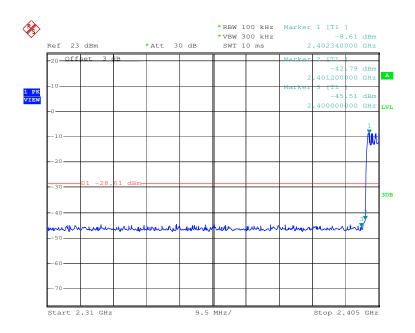





Report No.: SZEM110600137101

Page: 47 of 69

Test mode: 8DPSK Test channel: Highest

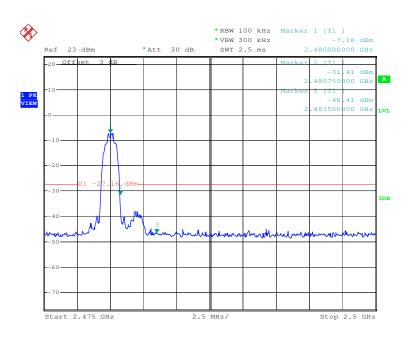

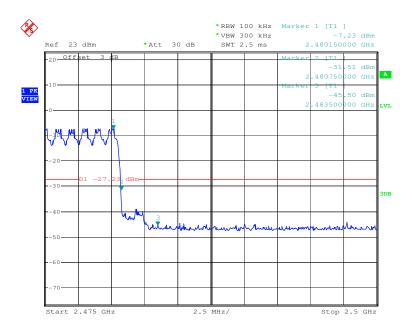



Report No.: SZEM110600137101

Page: 48 of 69

5.9 RF Antenna Conducted spurious emissions


Test Requirement:	FCC Part15 C Section 15.247 (d)						
Test Method:	ANSI C63.10:2009						
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.						
Test setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane Remark: Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.						
Test Instruments:	Refer to section 4.8 for details.						
Test results:	Pass						




Report No.: SZEM110600137101

Page: 49 of 69

Test mode: GFSK Test channel: Lowest

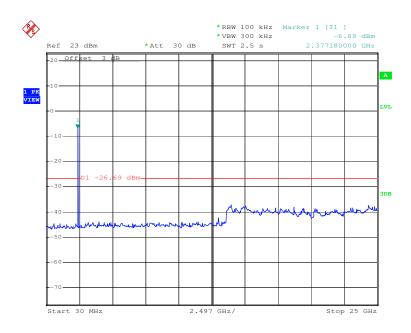

Test mode: GFSK Test channel: Middle

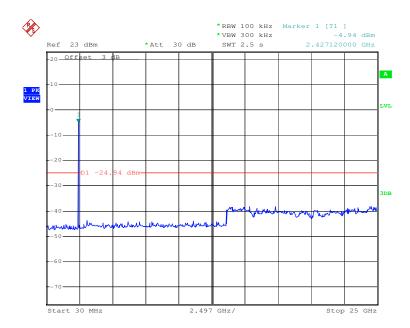





Report No.: SZEM110600137101

Page: 50 of 69

Test mode: GFSK Test channel: Highest

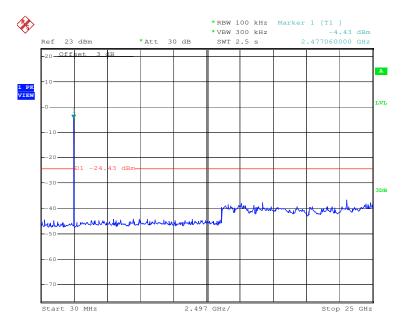

Test mode: π/4DQPSK Test channel: Lowest

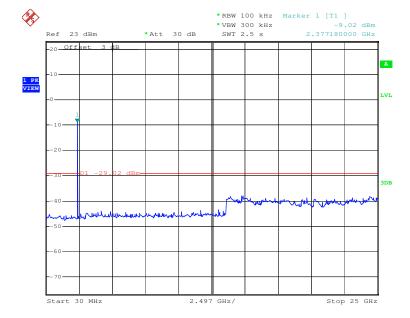





Report No.: SZEM110600137101

Page: 51 of 69

Test mode: π/4DQPSK Test channel: Middle

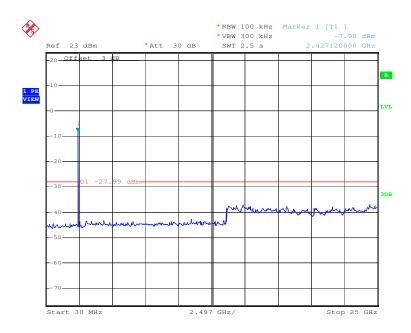



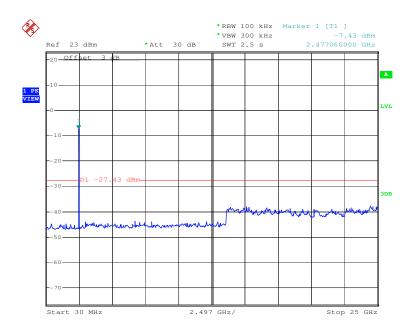





Report No.: SZEM110600137101

Page: 52 of 69

Test mode: 8DPSK Test channel: Lowest

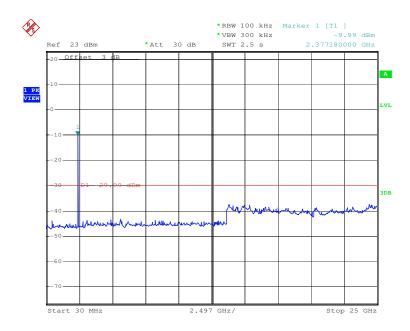

Test mode: 8DPSK Test channel: Middle

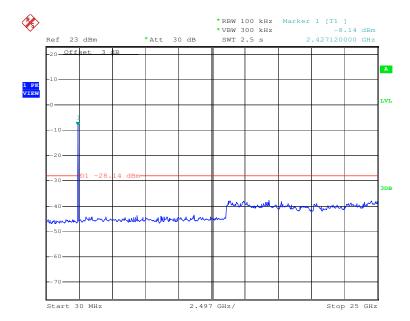




Report No.: SZEM110600137101

Page: 53 of 69

Test mode: 8DPSK Test channel: Highest

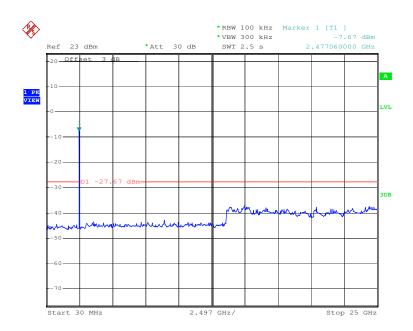



Report No.: SZEM110600137101

Page: 54 of 69

5.10Pseudorandom Frequency Hopping Sequence

Test Requirement: FCC Part15 C Section 15.247 (a)(1) requirement:


Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

Alternatively. Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

EUT Pseudorandom Frequency Hopping Sequence


The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONEs; i.e. the shift register is initialized with nine ones.

- Number of shift register stages: 9
- Length of pseudo-random sequence: 29 -1 = 511 bits
- Longest sequence of zeros: 8 (non-inverted signal)



Linear Feedback Shift Register for Generation of the PRBS sequence

An example of Pseudorandom Frequency Hopping Sequence as follow:



Each frequency used equally on the average by each transmitter.

The system receivers have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shift frequencies in synchronization with the transmitted signals.



Report No.: SZEM110600137101

Page: 55 of 69


5.11 Radiated Emission

Test Method: Test Frequency Range: 30MHz to 25GHz Test site: Measurement Distance: 3m (Semi-Anechoic Chamber) Receiver setup: Frequency 30MHz-1GHz Above 1GHz Peak 1MHz 300kHz 10Hz Peak 1MHz 10Hz Average Value BaMHz-28MHz 40.0 Quasi-peak Value BaMHz-28MHz 43.5 Quasi-peak Value BaMHz-280MHz 43.5 Quasi-peak Value BaMHz-260MHz 43.5 Quasi-peak Value BaMHz-260MHz 43.5 Quasi-peak Value BaMHz-21GHz 54.0 Average Value Peak 1MHz 54.0 Average Value BaMHz-260MHz 46.0 Quasi-peak Value BaMHz-260MHz 54.0 Average Value Above 1GHz 74.0 Peak Value Above 1GHz 74.0 Peak Value Test Procedure: Test Procedure: a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation. b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.	Test Requirement:	FCC Part15 C Section 15.209 and 15.205							
Test site: Measurement Distance: 3m (Semi-Anechoic Chamber)	Test Method:	ANSI C63.10: 2009							
Frequency Detector RBW VBW Remark 30MHz-1GHz Quasi-peak 100kHz 300kHz Quasi-peak Value Above 1GHz Peak 1MHz 30MHz Peak Value Peak 1MHz 10Hz Average Value Peak 1MHz 10Hz Average Value Remark 30MHz-88MHz 40.0 Quasi-peak Value 88MHz-216MHz 43.5 Quasi-peak Value 216MHz-960MHz 46.0 Quasi-peak Value 960MHz-1GHz 54.0 Quasi-peak Value 46.0 Quasi-peak Value Above 1GHz 54.0 Average Value Above 1GHz 54.0 Average Value According to the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.	Test Frequency Range:	30MHz to 25GH	lz						
Frequency Detector RBW VBW Remark 30MHz-1GHz Quasi-peak Value Peak 1MHz 300kHz Quasi-peak Value Peak MMHz 10Hz Peak Value Peak MMHz 10Hz Peak Value Peak MMHz 10Hz Average Value	Test site:	Measurement D	istance: 3m (Semi-Anecho	ic Chambei	1)			
Frequency Detector RBW VBW Remark 30MHz-1GHz Quasi-peak Value Peak 1MHz 300kHz Quasi-peak Value Peak MMHz 10Hz Peak Value Peak MMHz 10Hz Peak Value Peak MMHz 10Hz Average Value	Receiver setup:		<u> </u>			,			
Limit: Frequency		Frequency	Detector	RBW	VBW	Remark			
Limit: Frequency		30MHz-1GHz	Quasi-peak	100kHz	300kHz	Quasi-peak Value			
Limit: Frequency Limit (dBuV/m @3m) Remark		Ahove 1GHz							
Frequency Limit (dBuV/m @3m) Remark 30MHz-88MHz 40.0 Quasi-peak Value 88MHz-216MHz 43.5 Quasi-peak Value 216MHz-960MHz 46.0 Quasi-peak Value 960MHz-1GHz 54.0 Quasi-peak Value Above 1GHz 74.0 Peak Value Test Procedure: a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation. b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.		Above Tariz	Peak	1MHz	10Hz	Average Value			
30MHz-88MHz	Limit:		1						
B8MHz-216MHz				,					
### Test Procedure: Test Procedure: Above 1GHz						•			
Second Head of the procedure Second Head of the procedure									
Test Procedure: a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation. b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasipeak or average method as specified and then reported in a data sheet.						•			
Test Procedure: a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation. b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasipeak or average method as specified and then reported in a data sheet.									
Test Procedure: a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation. b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasipeak or average method as specified and then reported in a data sheet.		Above 1	GHz						
5.7.50	Test Procedure:	Above 1GHz Above 1GHz The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. To reach suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not							
1 to to to obtain the for detailer	Test Instruments:	000	4.8 for details).					



Report No.: SZEM110600137101

Page: 56 of 69

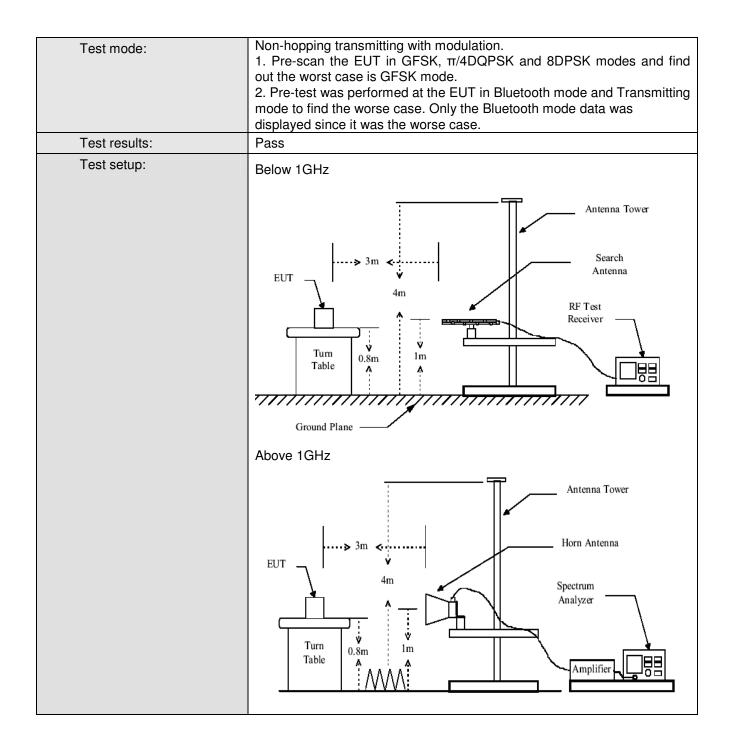

Note:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level =Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor




Report No.: SZEM110600137101

Page: 57 of 69

5.11.1 Radiated emission below 1GHz

Horizontal:

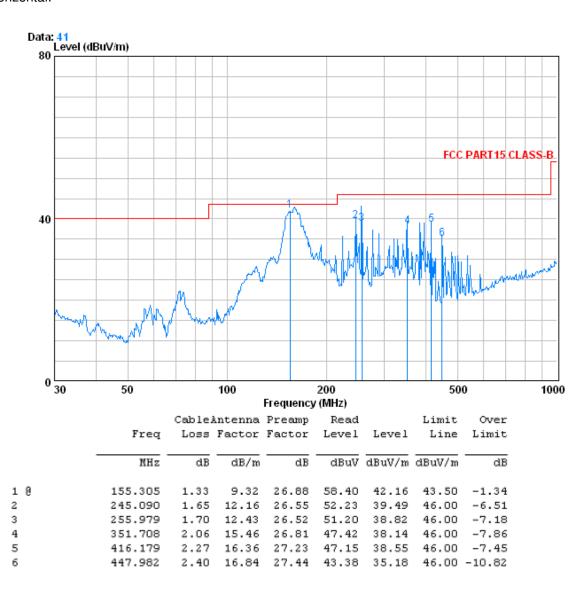


[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sqs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM110600137101

Page: 58 of 69

Vertical:

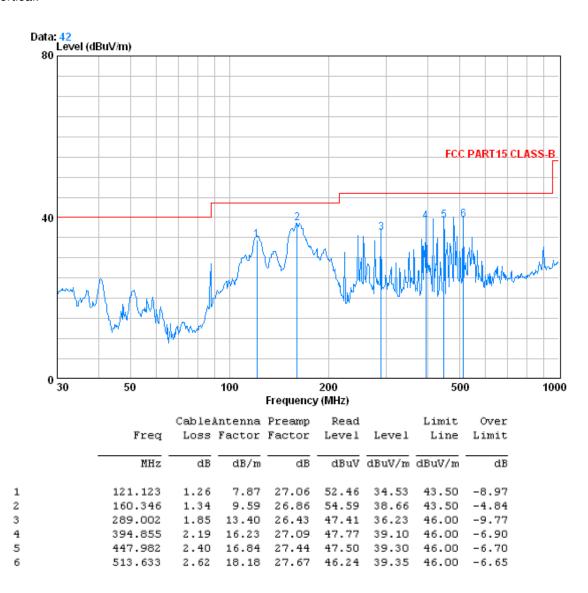

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sqs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Worse case mode:

SGS-CSTC Standards Technical Services Ltd.

Report No.: SZEM110600137101

Remark:

Average

Page: 59 of 69

5.11.2 Transmitter emission above 1GHz

GFSK

Worse case mode: GFSK		Test	Test channel: Lowest		Rema	Remark:		
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
1602.020	2.58	28.84	39.40	57.74	49.76	74.00	-24.24	Vertical
4803.950	4.69	34.70	41.63	54.61	52.37	74.00	-21.63	Vertical
6252.250	5.19	36.00	40.71	50.30	50.78	74.00	-23.22	Vertical
7756.250	6.22	36.00	39.39	49.07	51.90	74.00	-22.10	Vertical
10247.250	6.03	38.00	37.55	46.54	53.02	74.00	-20.98	Vertical
12456.250	6.59	39.37	38.47	47.27	54.76	74.00	-19.24	Vertical
1602.070	2.58	28.84	39.40	57.35	49.37	74.00	-24.63	Horizontal
4804.030	4.69	34.70	41.63	57.59	55.35	74.00	-18.65	Horizontal
6475.500	5.25	36.26	40.51	51.57	52.57	74.00	-21.43	Horizontal
7556.500	6.19	36.00	39.57	50.22	52.84	74.00	-21.16	Horizontal
9542.250	6.00	37.23	37.85	47.51	52.89	74.00	-21.11	Horizontal
11798.250	6.42	38.69	38.19	47.45	54.37	74.00	-19.63	Horizontal

Frequency (MHz)	Cable loss (dB)	Antenna factors (dB/m)	Preamp factor (dB)	Reading Level (dBµV)	Emission Level (dBµV/m)	Limit (dBμV/m)	Over limit	polarization
1602.020	2.58	28.84	39.40	54.01	46.03	54.00	-7.97	Vertical
4803.950	4.69	34.70	41.63	48.08	45.84	54.00	-8.16	Vertical
6252.250	5.19	36.00	40.71	35.44	35.92	54.00	-18.08	Vertical
7756.250	6.22	36.00	39.39	35.16	37.99	54.00	-16.01	Vertical
10247.250	6.03	38.00	37.55	31.56	38.04	54.00	-15.96	Vertical
12456.250	6.59	39.37	38.47	33.64	41.13	54.00	-12.87	Vertical
1602.070	2.58	28.84	39.40	52.56	44.58	54.00	-9.42	Horizontal
4804.030	4.69	34.70	41.63	52.05	49.81	54.00	-4.19	Horizontal
6475.500	5.25	36.26	40.51	35.84	36.84	54.00	-17.16	Horizontal
7556.500	6.19	36.00	39.57	35.27	37.89	54.00	-16.11	Horizontal
9542.250	6.00	37.23	37.85	32.89	38.27	54.00	-15.73	Horizontal
11798.250	6.42	38.69	38.19	33.12	40.04	54.00	-13.96	Horizontal

Lowest

Test channel:



Report No.: SZEM110600137101

Page: 60 of 69

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
1628.060	2.59	29.09	39.41	56.88	49.15	74.00	-24.85	Vertical
4882.080	4.72	34.59	41.68	53.63	51.26	74.00	-22.74	Vertical
6957.250	5.50	35.85	40.08	50.49	51.76	74.00	-22.24	Vertical
7791.500	6.22	36.00	39.38	49.09	51.93	74.00	-22.07	Vertical
10564.500	6.11	38.33	37.68	47.37	54.13	74.00	-19.87	Vertical
12456.250	6.59	39.37	38.47	47.46	54.95	74.00	-19.05	Vertical
1628.060	2.59	29.09	39.41	56.79	49.06	74.00	-24.94	Horizontal
4877.500	4.72	34.59	41.68	55.65	53.28	74.00	-20.72	Horizontal
6475.500	5.25	36.26	40.51	50.90	51.90	74.00	-22.10	Horizontal
7556.500	6.19	36.00	39.57	49.54	52.16	74.00	-21.84	Horizontal
10376.500	6.06	38.16	37.61	46.31	52.92	74.00	-21.08	Horizontal
11786.500	6.42	38.68	38.19	48.11	55.02	74.00	-18.98	Horizontal

Worse case mode:	GFSK	Test channel:	Middle	Remark:	Average
------------------	------	---------------	--------	---------	---------

Frequency (MHz)	Cable	Antenna factors	Preamp factor	Reading Level	Emission Level	Limit (dBµV/m)	Over limit	polarization
1628.060	(dB) 2.59	(dB/m) 29.09	(dB) 39.41	(dBμV) 53.67	(dBμV/m) 45.94	54.00	-8.06	Vertical
4882.080	4.72	34.59	41.68	47.19	44.82	54.00	-9.18	Vertical
6957.250	5.50	35.85	40.08	35.06	36.33	54.00	-17.67	Vertical
7791.500	6.22	36.00	39.38	34.61	37.45	54.00	-16.55	Vertical
10564.500	6.11	38.33	37.68	31.94	38.70	54.00	-15.30	Vertical
12456.250	6.59	39.37	38.47	33.66	41.15	54.00	-12.85	Vertical
1628.060	2.59	29.09	39.41	51.78	44.05	54.00	-9.95	Horizontal
4877.500	4.72	34.59	41.68	48.38	46.01	54.00	-7.99	Horizontal
6475.500	5.25	36.26	40.51	35.73	36.73	54.00	-17.27	Horizontal
7556.500	6.19	36.00	39.57	35.17	37.79	54.00	-16.21	Horizontal
10376.500	6.06	38.16	37.61	31.54	38.15	54.00	-15.85	Horizontal
11786.500	6.42	38.68	38.19	32.40	39.31	54.00	-14.69	Horizontal



Report No.: SZEM110600137101

Page: 61 of 69

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
1654.055	2.62	29.21	39.42	57.43	49.84	74.00	-24.16	Vertical
4960.230	4.76	34.46	41.74	51.36	48.84	74.00	-25.16	Vertical
6522.500	5.26	36.28	40.46	50.24	51.32	74.00	-22.68	Vertical
8355.500	6.19	36.14	38.88	48.63	52.08	74.00	-21.92	Vertical
10141.500	6.01	37.88	37.51	46.25	52.63	74.00	-21.37	Vertical
12221.250	6.53	39.12	38.37	46.72	54.00	74.00	-20.00	Vertical
1654.082	2.62	29.21	39.42	56.00	48.41	74.00	-25.59	Horizontal
4960.140	4.76	34.46	41.74	51.51	48.99	74.00	-25.01	Horizontal
6675.250	5.30	36.13	40.33	49.76	50.86	74.00	-23.14	Horizontal
7744.500	6.22	36.00	39.41	49.08	51.89	74.00	-22.11	Horizontal
10611.500	6.13	38.34	37.70	46.20	52.97	74.00	-21.03	Horizontal
12644.250	6.63	39.46	38.54	47.26	54.81	74.00	-19.19	Horizontal

Worse case mode: GFSK	
-------------------------	--

Frequency (MHz)	Cable loss (dB)	Antenna factors (dB/m)	Preamp factor (dB)	Reading Level (dBµV)	Emission Level (dBµV/m)	Limit (dBμV/m)	Over limit	polarization
1654.055	2.62	29.21	39.42	56.77	49.18	54.00	-4.82	Vertical
4960.230	4.76	34.46	41.74	51.05	48.53	54.00	-5.47	Vertical
6522.500	5.26	36.28	40.46	35.10	36.18	54.00	-17.82	Vertical
8355.500	6.19	36.14	38.88	34.92	38.37	54.00	-15.63	Vertical
10141.500	6.01	37.88	37.51	31.76	38.14	54.00	-15.86	Vertical
12221.250	6.53	39.12	38.37	32.84	40.12	54.00	-13.88	Vertical
1654.082	2.62	29.21	39.42	54.72	47.13	54.00	-6.87	Horizontal
4960.140	4.76	34.46	41.74	48.82	46.30	54.00	-7.70	Horizontal
6675.250	5.30	36.13	40.33	35.38	36.48	54.00	-17.52	Horizontal
7744.500	6.22	36.00	39.41	34.33	37.14	54.00	-16.86	Horizontal
10611.500	6.13	38.34	37.70	32.26	39.03	54.00	-14.97	Horizontal
12644.250	6.63	39.46	38.54	32.53	40.08	54.00	-13.92	Horizontal

Remark: The disturbance above 13GHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed.




Report No.: SZEM110600137101

Page: 62 of 69

5.11.3 Band edge (Radiated Emission)

Test mode:	Transmitting	Test channel:	Lowest	Remark:	Peak
------------	--------------	---------------	--------	---------	------

Vertical:

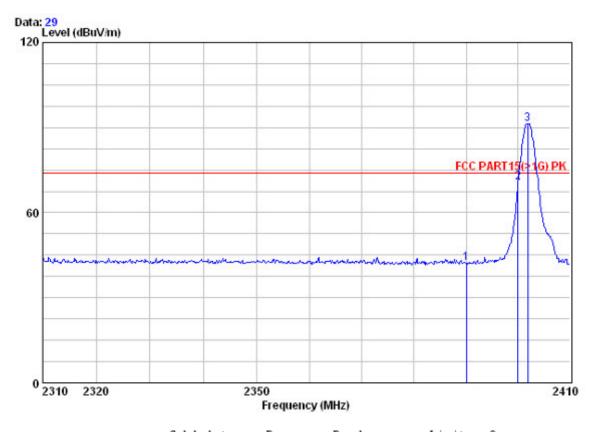


	Freq			Preamp Factor			Limit Line	Over Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 2 3 X	2390.000 2400.000 2401.900	2.98	32.51	39.85 39.86 39.86	74.99	70.62	74.00	-3.38



Report No.: SZEM110600137101

Page: 63 of 69

Horizontal:

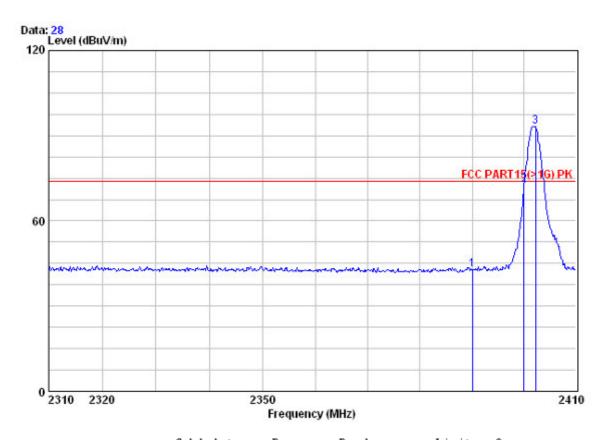

		Cablei	lntenna	Preamp	Read		Limit	Over
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
	******	u.D	GD, 10	u.	abar	GD GT / III	ar ar, m	0.0
1	2200 000	2 00	22 51	20 05	47 27	42 02	74 00	21 00
1	2390.000	2.90	32.31	39.85	47.27	42.92	74.00	-31.00
2	2400.000	2.98	32.51	39.86	77.02	72.65	74.00	-1.35
3 X	2402.200	2.98	32.51	39.86	97.67	93.30	74.00	19.30




Report No.: SZEM110600137101

Page: 64 of 69

Test mode: Transmitting	Test channel:	Lowest	Remark:	Average
-------------------------	---------------	--------	---------	---------

Vertical:

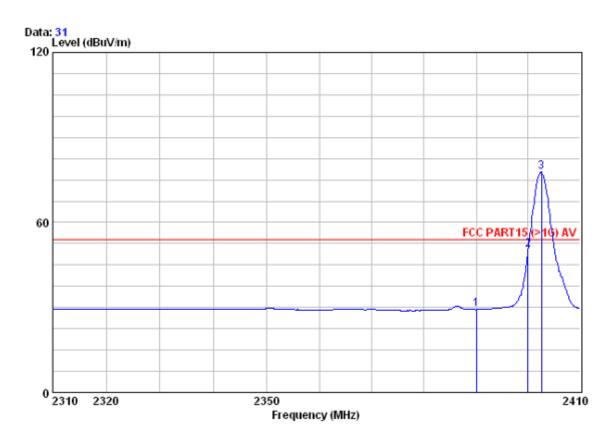


	Freq			Preamp Factor			Limit Line	
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 2 3 X	2390.000 2400.000 2402.600	2.98	32.51	39.85 39.86 39.86	54.67	50.31	54.00	-3.69



Report No.: SZEM110600137101

Page: 65 of 69

Horizontal:

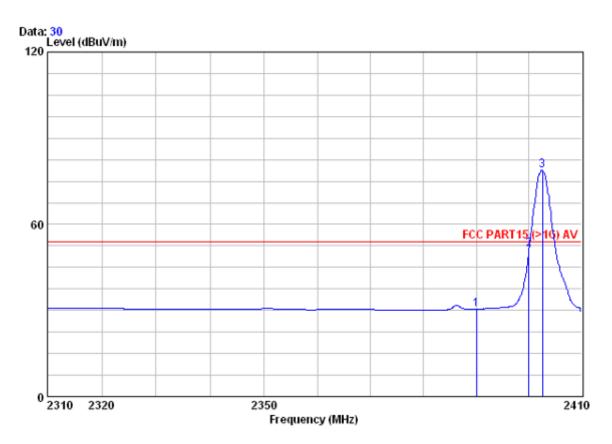

			Cable	Antenna	Preamp	Read		Limit	Over
		Freq	Loss	Factor	Factor	Level	Level	Line	Limit
		_							
		MHz	dB	dB/m	dB	dBuV	dBu77/m	dBuV/m	dB
		11112	a.D	GD/III	ab	abav	abav, m	abav, m	ab
1		2390.000	2.98	32.51	39.85	34.78	30.43	54.00	-23.57
2		2400.000	2.98	32.51	39.86	55.66	51.29	54.00	-2.71
3	X	2402.600	2.98	32.54	39.86	83.17	78.83	54.00	24.83




Report No.: SZEM110600137101

Page: 66 of 69

Test mode: Transmitting Test channel: Highest Remark: Peak
--

Vertical:

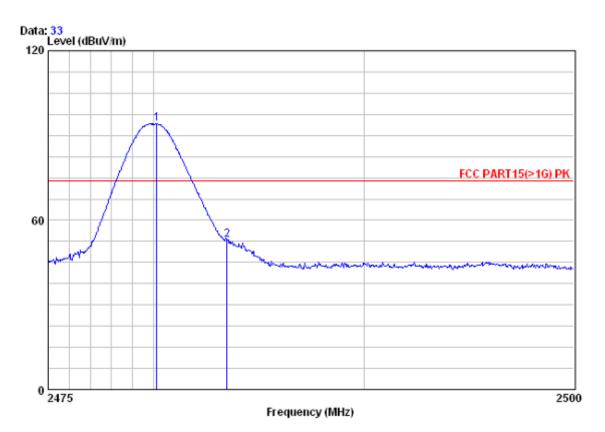


		Cable	Antenna	Preamp	Read		Limit	Over
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 X 2	2480.150 2483.500			39.92 39.92				



Report No.: SZEM110600137101

Page: 67 of 69

Horizontal:

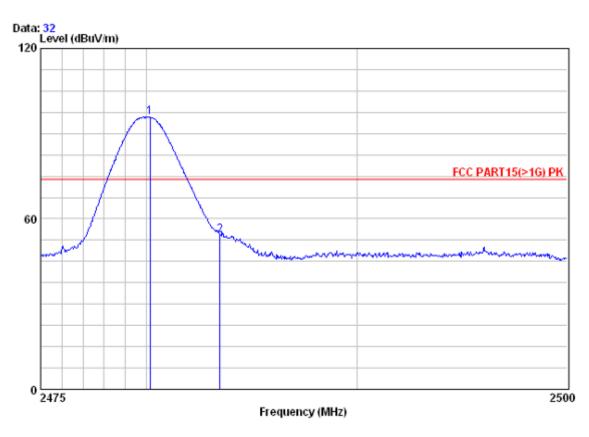

			Cable.	Antenna	Preamp	Read		Limit	Over
		Freq	Loss	Factor	Factor	Level	Level	Line	Limit
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
							,	,	
1	¥	2480.175	3.03	32.67	39.92	99.91	95.69	74.00	21.69
_	-								
2		2483.500	3.03	32.67	39.92	58.64	54.42	74.00	-19.58




Report No.: SZEM110600137101

Page: 68 of 69

Tool mode. Transmitting Tool onarmon. Trightoot Tromain.	Test mode:	Transmitting	Test channel:	Highest	Remark:	Average
--	------------	--------------	---------------	---------	---------	---------

Vertical:

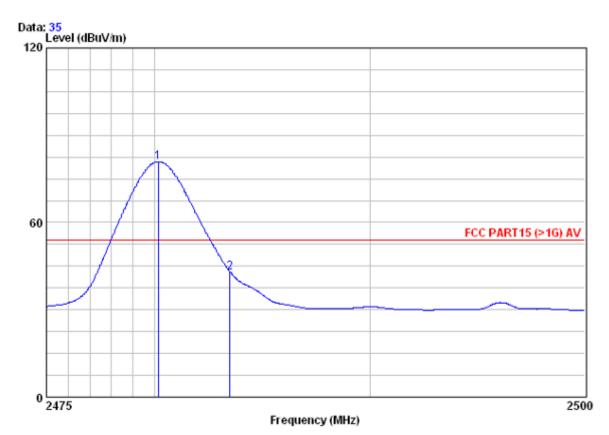


	Freq			Preamp Factor	Read Level		Limit Line	
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 @ 2	2480.175 2483.500			39.92 39.92				



Report No.: SZEM110600137101

Page: 69 of 69

Horizontal:

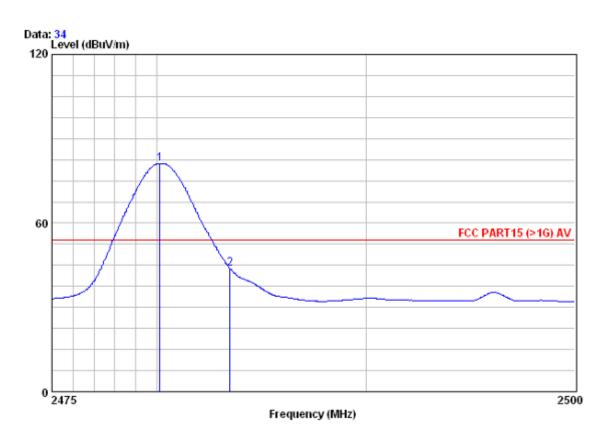

		Freq		Antenna Factor		Read Level		Limit Line	
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	-	2480.150 2483.500			39.92 39.92				