





Product Number: WL-4GE242

Product Name: LTE Antenna

Index:

- 1. Mechanical and Packing Drawing / Page 2**
- 2. Revision History / Page 3**
- 3. Specification / Page 4**
- 4. Characteristics and Reliability Test / Page 5**
- 5. Antenna - S Parameter Test Data / Page 6**
- 6. Antenna - Radiation Pattern Test Data / Page 7-8**

REV	DATE	DESCRIPTION
X1		

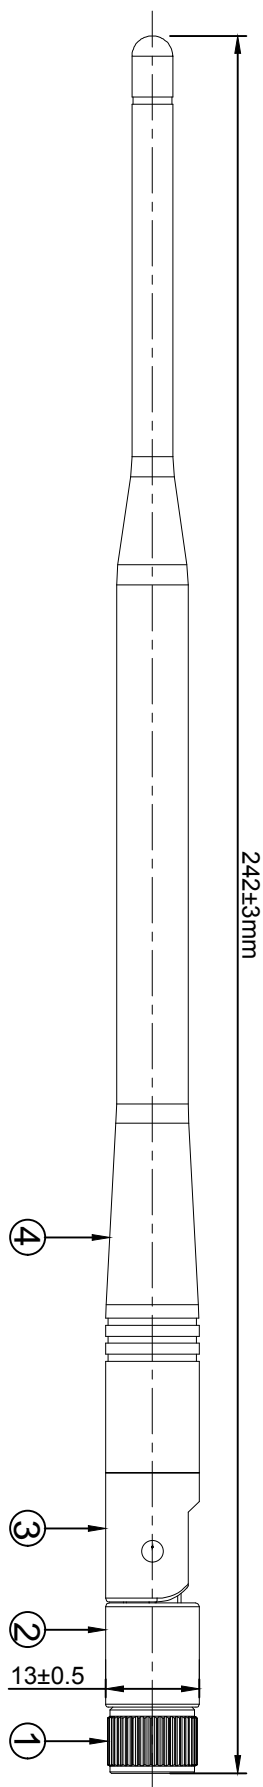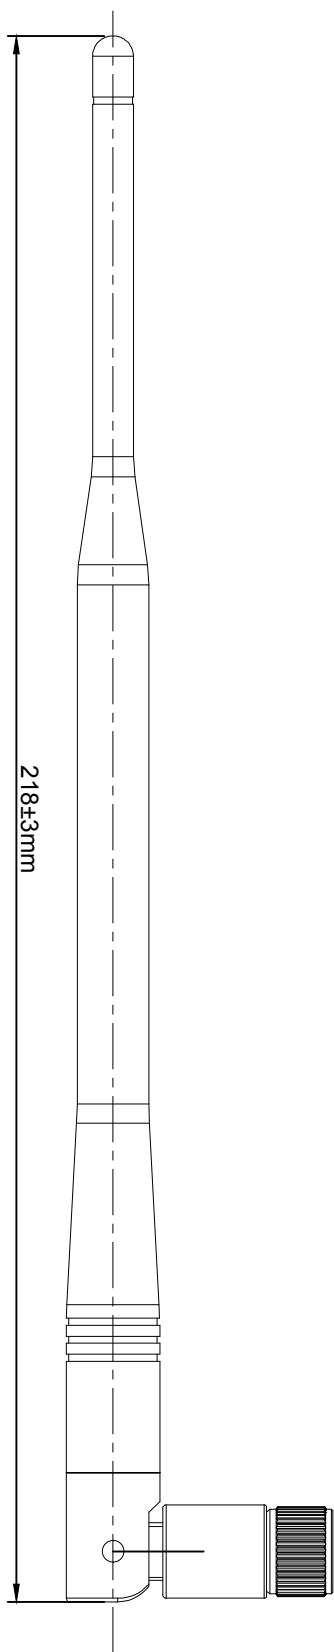

Specification:

Frequency Range: 700-960/1710-2700MHz
 Impedance: 50Ω
 VSWR: 2.0 max
 Gain: 3 dBi

NO	DESCRIPTION	QTY	REMARK
4	Antenna Body	1	
3	Connecting cylinder	1	
2	Antenna Base	1	
1	CONN	1	

CUSTOMER: _____

PART NO. : _____

PARTNAME: Antenna Assembly

WAVELINK P/NO. : WL-4GE242

REV	UNIT	FILE
X1	m/m	1/1

APPROVED

CHECKED

X ± 3.0

X ± 2.0

X ± 1.0

.XX ± 0.5

.XXX ± 0.1

DRAWING

Caichien

CUSTOMERS SIGNATURE

昆山市海宣电子有限公司
 Kunshan Wavelink Electronic Co.,Ltd.



2. Revision History

Revision	Date	Change Notification	Description
1.0	2017.11.7		

3. Specification



A. Electrical Characteristics

Frequency	700 ~ 960 MHz 1710 ~ 2700 MHz
S.W.R.	<= 5.0 @ 700 ~ 960 MHz <= 4.0 @ 1710 ~ 2700 MHz
Antenna Gain	1.5 ± 0.5dBi @ 700 ~ 960 MHz 3.0 ± 0.7dBi @ 1710 ~ 2700 MHz
Efficiency (%)	40 % @ 700 ~ 960 MHz 76% @ 1710 ~ 2700 MHz
Polarization	Linear
Impedance	50 Ohm

B. Material & Mechanical Characteristics

Material of Radiator	CU
Material of Plastic	ABS
Cable Type	RG-178U-03
Connector Type	SMA Male


C. Environmental

Operation Temperature	- 40 °C ~ + 85 °C
Storage Temperature	- 40 °C ~ + 85 °C
Antenna Color Storage life	< 2 year


4. Characteristics and Reliability Test

Test Items		Test Condition and Procedure	Requirements
C1	S.W.R.	Set DUT on Network Analyzer; make individual calibration to test	Directive DUT specification
C2	Antenna Gain	Set DUT on Antenna Chamber; make individual calibration to test	Directive DUT specification
M1	Vibration	GB / T2423 . 48-1997 Amplitude: 0.03 inch (1.5mm); Freq: 20 to 80 to 20 Hz 3 directions; 2 hours for each direction	1. No Visual Damage 2. Frequency Tol.<= 5%
M2	Random Drop	GB / T2423.8-1995 Height: 1.0 Meter; 3 directions; 1 time for each direction	1. No parts separated 2. Frequency Tol.<= 5%
M3	Solderability	GB 2423 . 28- 82 Solder iron: 260±5°C; Duration: 5 seconds	1. Mounted on PCB 2. No Visual Damage
M4	Terminal-Pull Test	Holding with individual specification; force applied to axis of terminal	1. Directive DUT specification 2. Frequency Tol.<= 5%
M5	Terminal-Torque Test	Holding with individual specification; applied clockwise and counterclockwise to the axis of terminal	1. Directive DUT specification 2. Frequency Tol.<= 5%
M6	Dimension	Inspection of dimension, color, material, package, surface process	Directive DUT specification
E1	Salt Spray	GB / T 2423 . 17- 93 Temp: 35°C; RH: >= 95%; NaCl solution: >= 5%; Time: 24 hours	After 2 Hours Recovery 1. No Visual Damage 2. Frequency Tol.<= 5%
E2	Humidity	GB / T 2423 . 4 - 93 Temp: 80°C / 12 H; -40°C / 12H RH: >= 90%; Time: 24 hours	After 2 Hours Recovery 1. No Visual Damage 2. Frequency Tol.<= 5%
E3	Thermal Shock	GB / T 2423 . 22 - 87 1 Cycle: - 40°C (30 minutes) to + 80°C (30 minutes) Cycles: 24	After 2 Hours Recovery 1. No Visual Damage 2. Frequency Tol.<= 5%
E4	Life (High Temp.)	GB / T 2423 . 2 - 89 Temp: 80°C; Time: 24 hours	After 2 Hours Recovery 1. No Visual Damage 2. Frequency Tol.<= 5%
R1	RoHS	With Reference to IEC 62321:2008 with flow chart	Directive RoHS 2011/65/EU
R2	PFOS	With Reference to USA EPA 3540C:1996 by LC/MS	Directive RoHS 2006/122/EC
R3	PFOA	With Reference to USA EPA 3540C:1996 by LC/MS	Directive RoHS 2006/122/EC


5. Antenna - S Parameter Test Data

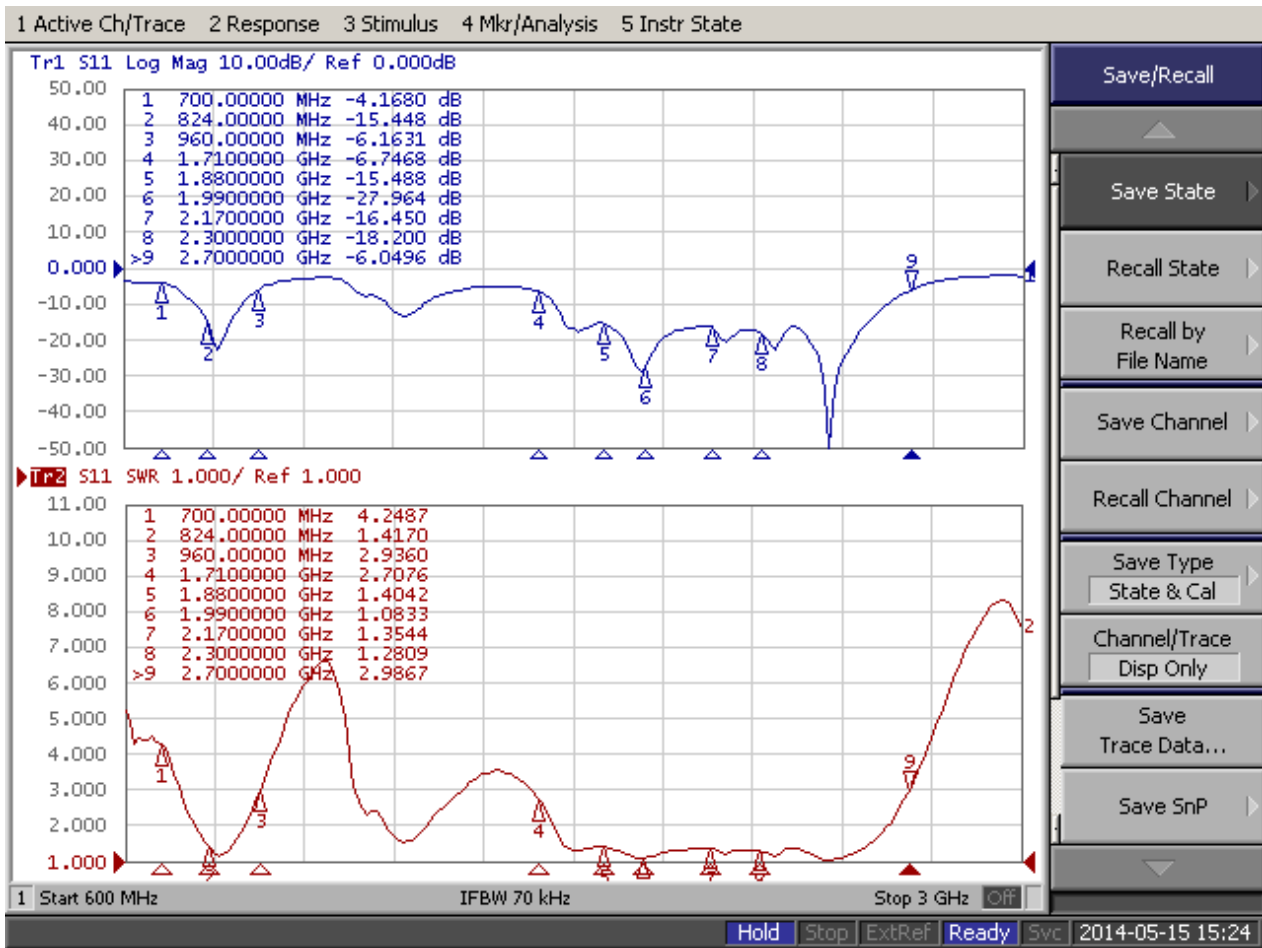

6. Antenna - Radiation Pattern Test Data

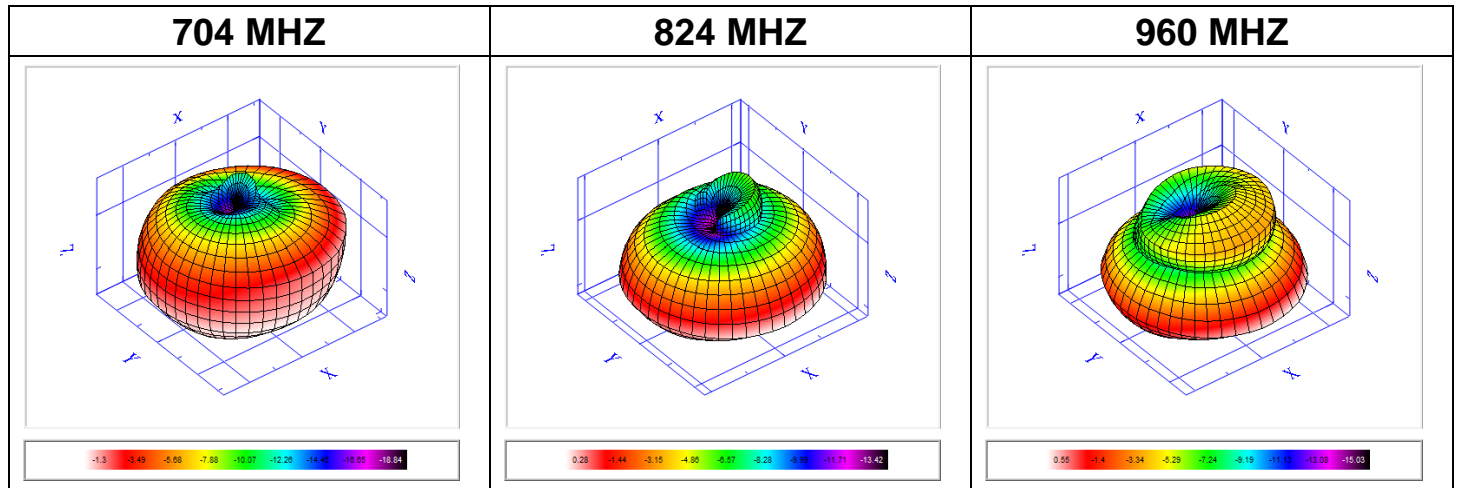

Frequency	704	824	880	960
TRP (dBm)	-4.86	-3.74	-3.45	-3.65
Peak EIRP (dBm)	-1.3	0.28	0.71	0.55
NHPRP +/- 45 (degree)	-4.57	-3.5	-3.23	-3.41
NHPRP +/- 30 (degree)	-5.58	-4.79	-4.53	-4.97
E-Theta Peak Gain (dBi)	-7.42	-6.32	-5.78	-5.7
E-Phi Peak Gain (dBi)	-1.73	0.01	0.51	0.34
E-Total Peak Gain (dBi)	-1.3	0.28	0.71	0.55
Directivity (dBi)	3.56	4.02	4.16	4.2
Efficiency (%)	32.69	42.28	45.19	43.14

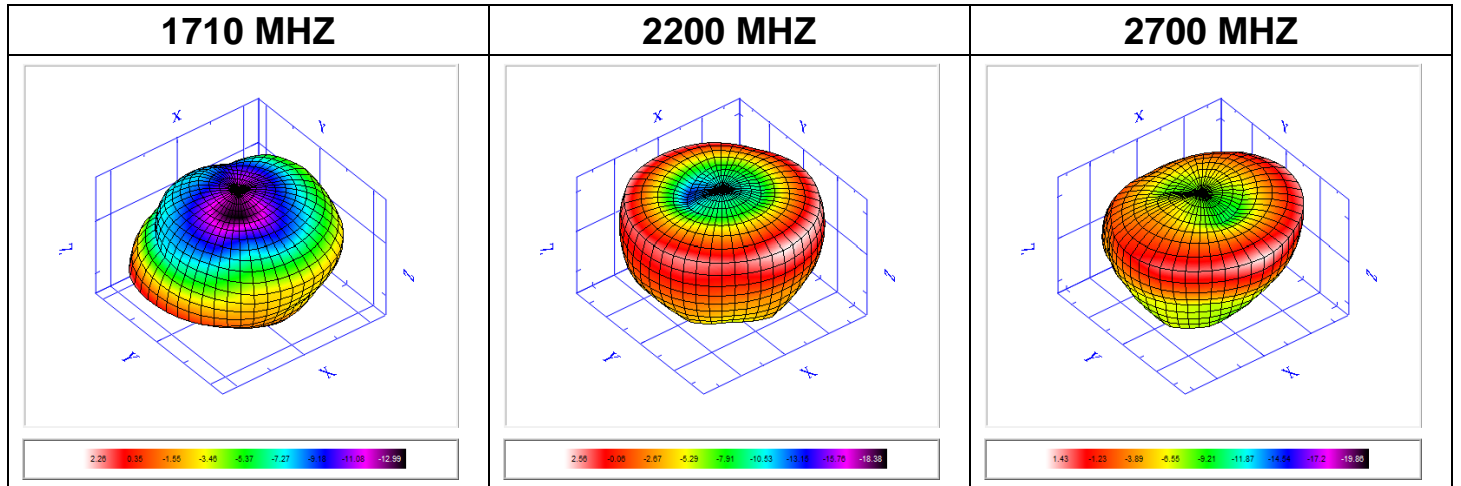

Frequency	1710	1880	1990	2000	2100	2200	2300	2400	2500	2600	2700
TRP (dBm)	-1.35	-1.09	-0.64	-0.63	-0.55	-0.63	-1.49	-1.76	-0.79	-1.33	-3.33
Peak EIRP (dBm)	2.26	0.64	1.38	1.52	2.32	2.56	1.22	2.38	3.7	3	1.43
NHPRP +/- 45 (degree)	-1.22	-1.36	-1	-1	-0.93	-1.08	-1.81	-2.06	-1.07	-1.73	-4.09
NHPRP +/- 30 (degree)	-2.77	-1.87	-1.22	-1.21	-1.08	-1.2	-2.48	-2.37	-1.13	-1.68	-3.98
E-Theta Peak Gain (dBi)	-7.6	-11.2	-13.9	-14.1	-12.8	-10.3	-9.71	-8.94	-8.18	-11.3	-13.4
E-Phi Peak Gain (dBi)	2.25	0.62	1.36	1.51	2.29	2.55	1.17	2.34	3.68	3	1.42
E-Total Peak Gain (dBi)	2.26	0.64	1.38	1.52	2.32	2.56	1.22	2.38	3.7	3	1.43
Directivity (dBi)	3.61	1.73	2.02	2.16	2.88	3.19	2.7	4.14	4.49	4.33	4.77
Efficiency (%)	73.24	77.8	86.31	86.43	88.07	86.49	71.01	66.74	83.37	73.7	46.43