

Appendix B:SAR Measurement results Plots

| |
|--------------------------|
| Table of contents |
| 2.4G WiFi Ant1 |
| 2.4G WiFi Ant2 |
| 5.2G WiFi Ant1 |
| 5.2G WiFi Ant2 |
| 5.8G WiFi Ant1 |
| 5.8G WiFi Ant2 |

Test Laboratory: CTI SAR Lab

WiFi 802.11b 11CH Front Side 0mm Ant1**DUT: ADVANCED DIAGNOSTICIS & ANALYSIS SYSTEM; Type: NA; Serial: NA**

Communication System: UID 0, WiFi 802.11 a/b/g/n/ac (0); Communication System Band: WiFi; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2462$ MHz; $\sigma = 1.795$ S/m; $\epsilon_r = 37.329$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7591; ConvF(7.35, 7.35, 7.35); Calibrated: 8/12/2021;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1458; Calibrated: 1/4/2022
- Phantom: ELI v6.0; Type: QDOVA003AA; Serial: 2024
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (12x9x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.378 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 3.888 V/m; Power Drift = 0.59 dB

Peak SAR (extrapolated) = 0.514 W/kg

SAR(1 g) = 0.261 W/kg; SAR(10 g) = 0.137 W/kg

Maximum value of SAR (measured) = 0.416 W/kg

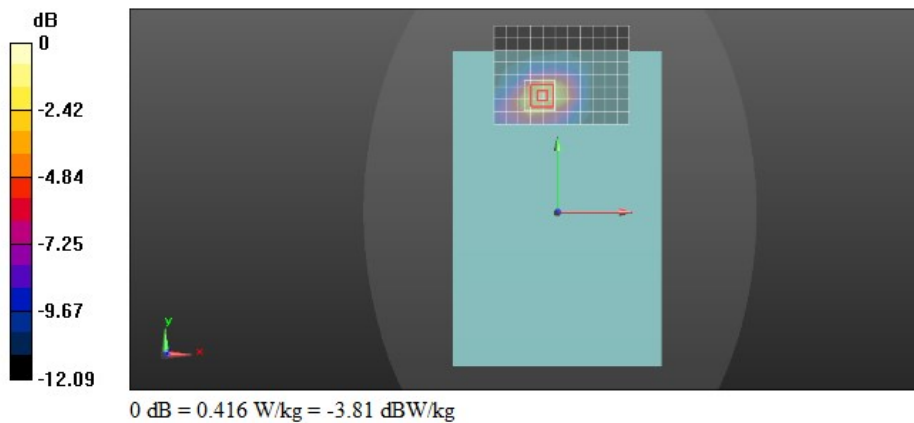

Test Laboratory: CTI SAR Lab

WiFi 802.11b 1CH Back Side 0mm Ant2**DUT: ADVANCED DIAGNOSTICIS & ANALYSIS SYSTEM; Type: NA; Serial: NA**

Communication System: UID 0, WiFi 802.11 a/b/g/n/ac (0); Communication System Band: WiFi; Frequency: 2412 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2412$ MHz; $\sigma = 1.755$ S/m; $\epsilon_r = 37.64$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7591; ConvF(7.35, 7.35, 7.35); Calibrated: 8/12/2021;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1458; Calibrated: 1/4/2022
- Phantom: ELI v6.0; Type: QDOVA003AA; Serial: 2024
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (11x8x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.769 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 3.289 V/m; Power Drift = -0.88 dB

Peak SAR (extrapolated) = 1.11 W/kg

SAR(1 g) = 0.564 W/kg; SAR(10 g) = 0.277 W/kg

Maximum value of SAR (measured) = 0.905 W/kg

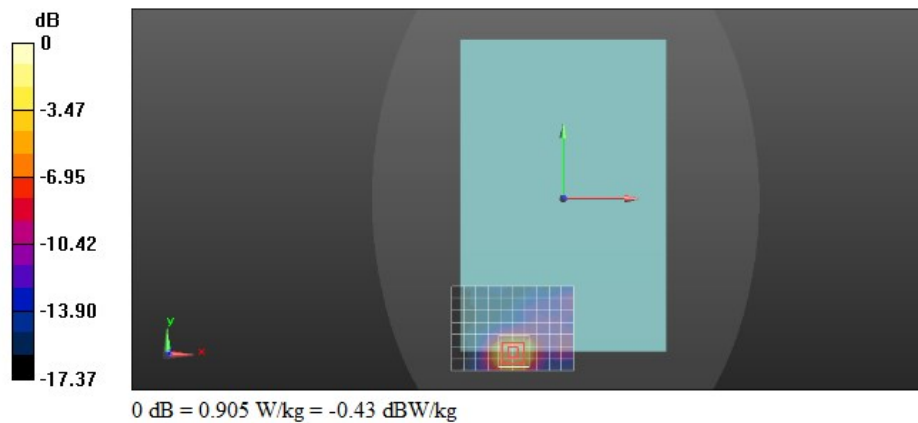

Test Laboratory: CTI SAR Lab

WiFi 802.11a 40CH Back Side 0mm Ant1

DUT: ADVANCED DIAGNOSTICIS & ANALYSIS SYSTEM; Type: NA; Serial: NA

Communication System: UID 0, WiFi 802.11 a/b/g/n/ac (0); Communication System Band: WiFi 5.2G; Frequency: 5200 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5200$ MHz; $\sigma = 4.52$ S/m; $\epsilon_r = 36.092$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7591; ConvF(5.25, 5.25, 5.25); Calibrated: 8/12/2021;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1458; Calibrated: 1/4/2022
- Phantom: ELI v6.0; Type: QDOVA003AA; Serial: 2024
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (13x10x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 0.576 W/kg


Configuration/Body/Zoom Scan (11x11x16)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 7.497 V/m; Power Drift = 0.83 dB

Peak SAR (extrapolated) = 0.951 W/kg

SAR(1 g) = 0.551 W/kg; SAR(10 g) = 0.516 W/kg

Maximum value of SAR (measured) = 0.951 W/kg

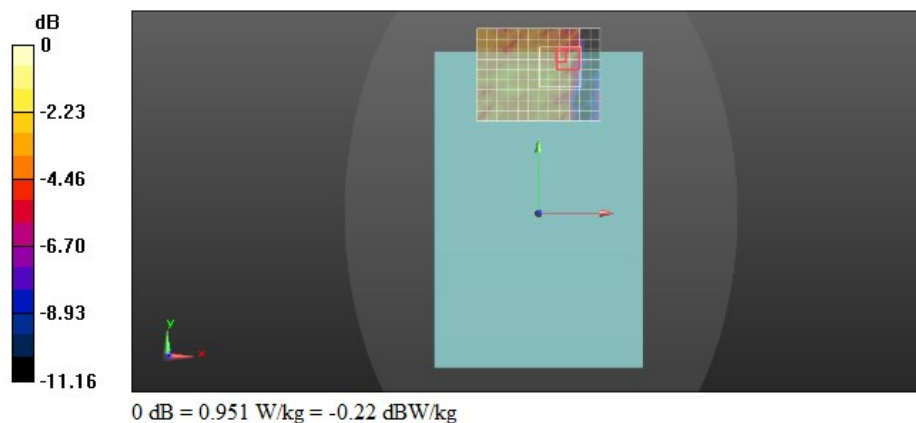

Test Laboratory: CTI SAR Lab

WiFi 802.11a 36CH Back Side 0mm Ant2**DUT: ADVANCED DIAGNOSTICIS & ANALYSIS SYSTEM; Type: NA; Serial: NA**

Communication System: UID 0, WiFi 802.11 a/b/g/n/ac (0); Communication System Band: WiFi 5.2G; Frequency: 5180 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5180$ MHz; $\sigma = 4.59$ S/m; $\epsilon_r = 36.271$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7591; ConvF(5.25, 5.25, 5.25); Calibrated: 8/12/2021;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1458; Calibrated: 1/4/2022
- Phantom: ELI v6.0; Type: QDOVA003AA; Serial: 2024
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (13x10x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 0.645 W/kg


Configuration/Body/Zoom Scan (9x9x16)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 7.439 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 0.953 W/kg

SAR(1 g) = 0.418 W/kg; SAR(10 g) = 0.278 W/kg

Maximum value of SAR (measured) = 0.875 W/kg

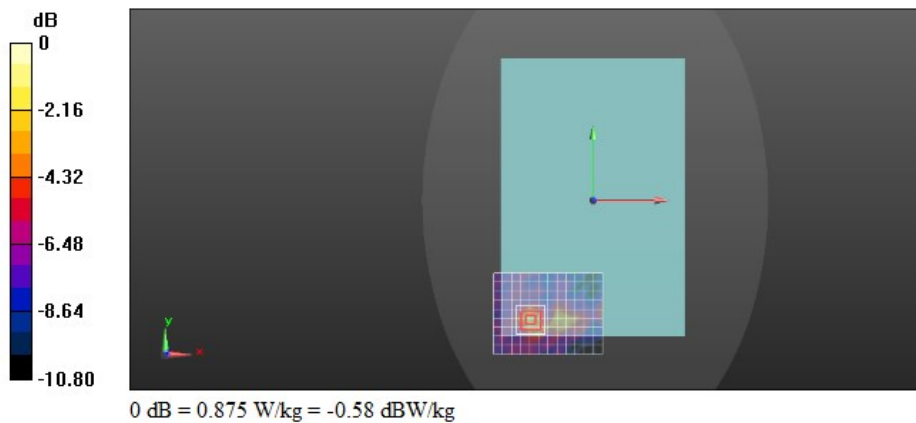

Test Laboratory: CTI SAR Lab

WiFi 802.11a 149CH Back Side 0mm Ant1

DUT: ADVANCED DIAGNOSTICIS & ANALYSIS SYSTEM; Type: NA; Serial: NA

Communication System: UID 0, WiFi 802.11 a/b/g/n/ac (0); Communication System Band: WiFi 5.8G; Frequency: 5745 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5745$ MHz; $\sigma = 5.43$ S/m; $\epsilon_r = 36.228$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7328; ConvF(4.95, 4.95, 4.95); Calibrated: 2/27/2022;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1458; Calibrated: 1/4/2022
- Phantom: ELI v6.0; Type: QDOVA003AA; Serial: 2024
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (13x10x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 0.184 W/kg


Configuration/Body/Zoom Scan (9x9x16)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 0 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.341 W/kg

SAR(1 g) = 0.079 W/kg; SAR(10 g) = 0.030 W/kg

Maximum value of SAR (measured) = 0.192 W/kg

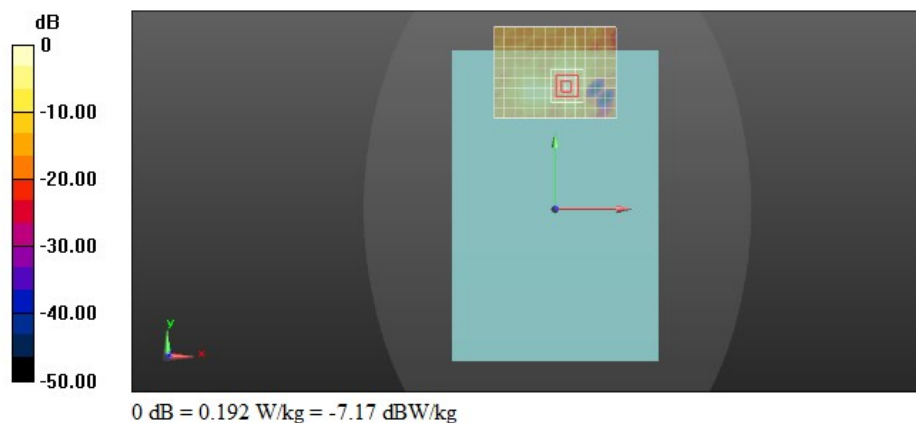

Test Laboratory: CTI SAR Lab

WiFi 802.11a 165CH Back Side 0mm Ant2**DUT: ADVANCED DIAGNOSTICIS & ANALYSIS SYSTEM; Type: NA; Serial: NA**

Communication System: UID 0, WiFi 802.11 a/b/g/n/ac (0); Communication System Band: WiFi 5.8G; Frequency: 5825 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5825$ MHz; $\sigma = 5.423$ S/m; $\epsilon_r = 35.093$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7328; ConvF(4.95, 4.95, 4.95); Calibrated: 2/27/2022;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1458; Calibrated: 1/4/2022
- Phantom: ELI v6.0; Type: QDOVA003AA; Serial: 2024
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (13x10x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 0.562 W/kg

Configuration/Body/Zoom Scan (9x9x16)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 0 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.921 W/kg

SAR(1 g) = 0.226 W/kg; SAR(10 g) = 0.068 W/kg

Maximum value of SAR (measured) = 0.559 W/kg

