



TEST REPORT

FCC ID: WQ8-DV2221

Report Number..... : ZKT-230619L4592E4
 Date of Test..... Jun. 15, 2023 – Jun. 28, 2023
 Date of issue : Jul. 13, 2023
 Total number of pages 113
 Test Result : PASS

Testing Laboratory..... : Shenzhen ZKT Technology Co., Ltd.
 Address : 1/F, No. 101, Building B, No. 6, Tangwei Community Industrial Avenue, Fuhai Street, Bao'an District, Shenzhen, China

Applicant's name : Autel Intelligent Technology Corp., Ltd.
 Address : Floor 2, Caihong Keji Building, 36 Hi-tech North Six Road, Songpingshan Community, Xili Sub-district, Nanshan District, Shenzhen City, China

Manufacturer's name : Autel Intelligent Technology Corp., Ltd.
 Address : Floor 2, Caihong Keji Building, 36 Hi-tech North Six Road, Songpingshan Community, Xili Sub-district, Nanshan District, Shenzhen City, China

Test specification:
 Standard : FCC CFR Title 47 Part 15 Subpart C Section 15.407
 ANSI C63.10:2013
 KDB 789033 D02 v01r02
 Test procedure..... : /
 Non-standard test method : N/A

Test Report Form No. : TRF-EL-113_V0
Test Report Form(s) Originator : ZKT Testing
Master TRF : Dated: 2020-01-06

This device described above has been tested by ZKT, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.
 This report shall not be reproduced except in full, without the written approval of ZKT, this document may be altered or revised by ZKT, personal only, and shall be noted in the revision of the document.

Product name : ADVANCED DIAGNOSTICS & INFORMATION SYSTEM
 Trademark : AUTEL
 Model/Type reference : MaxiSys MS908S3
 Ratings..... : Input: 12V--- 3A
 Battery: 3.85V--- 11600mAh, 44.66Wh



Testing procedure and testing location:

Testing Laboratory: Shenzhen ZKT Technology Co., Ltd.
Address.....: 1/F, No. 101, Building B, No. 6, Tangwei Community
Industrial Avenue, Fuhai Street, Bao'an District,
Shenzhen, China

Tested by (name + signature): Alen He

Reviewer (name + signature).....: Joe Liu

Approved (name + signature): Lake Xie



Table of Contents	Page
1. VERSION	5
2.SUMMARY OF TEST RESULTS	6
2.1 TEST FACILITY	7
2.2 MEASUREMENT UNCERTAINTY	7
3. GENERAL INFORMATION	8
3.1 GENERAL DESCRIPTION OF EUT	8
3.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	10
3.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)	10
3.5 EQUIPMENTS LIST FOR ALL TEST ITEMS	11
4.EMC EMISSION TEST	13
4.1 CONDUCTED EMISSION MEASUREMENT	13
4.1.1 POWER LINE CONDUCTED EMISSION LIMITS	13
4.1.2 TEST PROCEDURE	13
4.1.3 DEVIATION FROM TEST STANDARD	13
4.1.4 TEST SETUP	14
4.1.5 EUT OPERATING CONDITIONS	14
4.2 RADIATED EMISSION MEASUREMENT	17
4.2.1 APPLICABLE STANDARD	17
4.2.2 CONFORMANCE LIMIT	17
4.2.3 MEASURING INSTRUMENTS	17
4.2.4 TEST CONFIGURATION	18
4.2.5 TEST PROCEDURE	19
4.2.6 TEST RESULT	20
5.POWER SPECTRAL DENSITY TEST	24
5.1 APPLIED PROCEDURES / LIMIT	24
5.2 TEST PROCEDURE	25
5.3 DEVIATION FROM STANDARD	25
5.4 TEST SETUP	25
5.5 EUT OPERATION CONDITIONS	25
5.6 TEST RESULTS	26
6. 26DB & 6DB & 99% EMISSION BANDWIDTH	42
6.1 APPLIED PROCEDURES / LIMIT	42
6.2 TEST PROCEDURE	42
6.3 EUT OPERATION CONDITIONS	43
6.4 TEST RESULTS	43
7.MAXIMUM CONDUCTED OUTPUT POWER	75
7.1 PPLIED PROCEDURES / LIMIT	75



Table of Contents		Page
7.2 TEST PROCEDURE		75
7.3 DEVIATION FROM STANDARD		76
7.4 TEST SETUP		76
7.5 EUT OPERATION CONDITIONS		76
7.6 TEST RESULTS		77
8.OUT OF BAND EMISSIONS		92
8.1 APPLICABLE STANDARD		92
8.2 TEST PROCEDURE		92
8.3 DEVIATION FROM STANDARD		92
8.4 TEST SETUP		92
8.5 EUT OPERATION CONDITIONS		93
8.6 TEST RESULTS		93
9.SPURIOUS RF CONDUCTED EMISSIONS		100
9.1 CONFORMANCE LIMIT		100
9.2 MEASURING INSTRUMENTS		100
9.3 TEST SETUP		100
9.4 TEST PROCEDURE		100
9.5 TEST RESULTS		100
10.FREQUENCY STABILITY MEASUREMENT		104
10.1 LIMIT		104
10.2 TEST PROCEDURES		104
10.3 TEST SETUP LAYOUT		104
10.4 EUT OPERATION DURING TEST		104
10.5 TEST RESULTS		104
11.ANTENNA REQUIREMENT		114
12. TEST SETUP PHOTO		115
13. EUT CONSTRUCTIONAL DETAILS		115



1. VERSION

Report No.	Version	Description	Approved
ZKT-230619L4591E4	Rev.01	Initial issue of report	Jul. 13, 2023



2.SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15 (15.407) , Subpart E RSS-247 Issue 2			
Standard Section	Test Item	Judgment	Remark
FCC part 15.209(a), FCC part 15.407 (b)(1) FCC part 15.407 (b)(4) FCC part 15.407 (b)(8)	Spurious Radiated Emissions	PASS	
FCC part 15.207	Conducted Emission	PASS	
FCC part 15.407 (a)(12) 15.1049	99% Emission Bandwidth	PASS	
FCC part 15.407(e)	6 dB bandwidth	PASS	
FCC part 15.407 (a)(1) FCC part 15.407 (a)(3)	Maximum Conducted Output Power	PASS	
2.1051, FCC part 15.407(b)(1) FCC part 15.407(b)(4)	Band Edge	PASS	
FCC part 15.407 (a)(1) FCC part 15.407 (a)(3)	Power Spectral Density	PASS	
2.1051, FCC part 15.407(b)	Spurious Emissions at Antenna Terminals	PASS	
FCC part 15.203	Antenna Requirement	PASS	

NOTE:

(1) "N/A" denotes test is not applicable in this Test Report



2.1 TEST FACILITY

Shenzhen ZKT Technology Co., Ltd.
Add. : 1/F, No. 101, Building B, No. 6, Tangwei Community Industrial Avenue, Fuhai Street, Bao'an District, Shenzhen, China

FCC Test Firm Registration Number: 692225
Designation Number: CN1299
IC Registered No.: 27033
Designation Number: CN0110

2.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$ · where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$ · providing a level of confidence of approximately 95 % ·

No.	Item	Uncertainty
1	3m chamber Radiated spurious emission(30MHz-1GHz)	U=4.3dB
2	3m chamber Radiated spurious emission(1GHz-18GHz)	U=4.5dB
3	3m chamber Radiated spurious emission(18GHz-40GHz)	U=3.34dB
4	Conducted Adjacent channel power	U=1.38dB
5	Conducted output power uncertainty Above 1G	U=1.576dB
6	Conducted output power uncertainty below 1G	U=1.28dB
7	humidity uncertainty	U=5.3%
8	Temperature uncertainty	U=0.59°C
9	Radiated disturbance(30MHz-1000MHz)	U=4.8dB
10	Radiated disturbance(1GHz-6GHz)	U=4.9dB
11	Radiated disturbance(1GHz-18GHz)	U=5.0dB



3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Product Name:	ADVANCED DIAGNOSTICS & INFORMATION SYSTEM	
Model No.:	MaxiSys MS908S3	
Model Different.:	N/A	
Serial No.:	N/A	
Hardware Version:	DV2221_MAIN_V2	
Software Version:	V01.01.00	
Sample ID	ZKT-230619L4592E-1	
Sample(s) Status:	Engineer sample	
Product Description	IEEE 802.11 WLAN Mode Supported	<input checked="" type="checkbox"/> 802.11a/n (20MHz channel bandwidth) <input checked="" type="checkbox"/> 802.11n (40MHz channel bandwidth) <input checked="" type="checkbox"/> 802.11ac(80MHz channel bandwidth)
	Data Rate	802.11a: 54/ 48/ 36/ 24/ 18/ 12/ 9/ 6 Mbps 802.11n: up to 150 Mbps 802.11ac: up to VHT-MCS9
	Modulation	256QAM, 64QAM, 16QAM, BPSK, QPSK
	Operating Frequency Range	U-NII-1: 5150 MHz to 5250 MHz U-NII-3: 5725 MHz to 5850 MHz
	Number of Channels	802.11a: 20 MHz 802.11n: 20 MHz, 40 MHz 802.11ac: 20 MHz, 40 MHz, 80 MHz
Channel List	Please refer to the Note 2.	
Antenna Type:	PIFA Antenna	
Antenna gain:	2.7dBi	
Power supply:	AC 120V, 60Hz/AC 240V, 60Hz DC 3.85V via Battery	
Switching power adapter:	AC 100-240V, 50/60Hz	

Note:

For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.



802.11a/n/ac(20MHz) Frequency Channel			
Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	149	5745
44	5220	157	5785
48	5240	165	5825

802.11n(40MHz) Frequency Channel			
802.11n /ac(40MHz) Frequency Channel			
Channel	Frequency (MHz)	Channel	Frequency (MHz)
38	5190	151	5755
46	5230	159	5795

802.11ac (80MHz) Frequency Channel	
Channel	Frequency (MHz)
42	5210
155	5775

3.2 DESCRIPTION OF TEST MODES

Transmitting mode	Keep the EUT in continuously transmitting mode
Remark: During the test, the duty cycle >98%, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.	

Pretest Mode	Description
Mode 1	802.11a / n 20 CH36/ CH44/ CH48/ CH149/ CH157/ CH165
Mode 2	802.11n 40 CH38/ CH46/ CH151/ CH159
Mode 3	802.11 ac80 CH42/ CH155
Mode 4	Link Mode

Conducted Emission	
Final Test Mode	Description
Mode 4	Link Mode

For Radiated Emission	
Final Test Mode	Description
Mode 1	802.11a / n 20 CH36/ CH44/ CH48/ CH149/ CH157/ CH165
Mode 2	802.11n 40 CH38/ CH46/ CH151/ CH159
Mode 3	802.11 ac80 CH42/ CH155

Note:


(1) The measurements are performed at all Bit Rate of Transmitter, the worst data was reported.



Test Software	Realtek Test Tool
Power level setup	<8dBm

3.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Conducted Emission



Radiated Emission



Conducted Spurious



3.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
E-1	ADVANCED DIAGNOSTICS & INFORMATION SYSTEM	AUTEL	MaxiSys MS908S3	N/A	EUT
A-1	MaxiFlash LVCI	AUTEL	MaxiFlash LVCI	N/A	Auxiliary
A-2	Adapter	AUTEL	N/A	N/A	Auxiliary

Item	Shielded Type	Ferrite Core	Length	Note

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.



3.5 EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation emissions& Radio Test equipment

Item	Equipment	Manufacturer	Type No.	Serial No.	Firmware Version	Last calibration	Calibrated until
1	Spectrum Analyzer (9kHz-26.5GHz)	KEYSIGHT	9020A	MY55370835	A.17.05	Oct. 28, 2022	Oct. 27, 2023
2	Spectrum Analyzer (10kHz-39.9GHz)	R&S	FSV40-N	100363	1.71 SP2	Oct. 28, 2022	Oct. 27, 2023
3	EMI Test Receiver (9kHz-7GHz)	R&S	ESCI7	101169	4.32	Oct. 28, 2022	Oct. 27, 2023
4	Bilog Antenna (30MHz-1500MHz)	Schwarzbeck	VULB9168	N/A	N/A	Nov. 02, 2022	Nov. 01, 2023
5	Horn Antenna (1GHz-18GHz)	Agilent	AH-118	071145	N/A	Nov. 01, 2022	Oct. 31, 2023
6	Horn Antenna (15GHz-40GHz)	A.H.System	SAS-574	588	N/A	Oct. 28, 2022	Oct. 27, 2023
7	Loop Antenna	TESEQ	HLA6121	58357	N/A	Nov. 01, 2022	Oct. 31, 2023
8	Amplifier (30-1000MHz)	EM Electronics	EM330 Amplifier	060747	N/A	Nov. 15, 2022	Nov. 14, 2023
9	Amplifier (1GHz-26.5GHz)	Agilent	8449B	3008A00315	N/A	Oct. 28, 2022	Oct. 27, 2023
10	Amplifier (500MHz-40GHz)	QuanJuDa	DLE-161	097	N/A	Oct. 28, 2022	Oct. 27, 2023
11	Test Cable	N/A	R-01	N/A	N/A	Oct. 28, 2022	Oct. 27, 2023
12	Test Cable	N/A	R-02	N/A	N/A	Oct. 28, 2022	Oct. 27, 2023
13	Test Cable	N/A	R-03	N/A	N/A	Oct. 28, 2022	Oct. 27, 2023
14	Test Cable	N/A	RF-01	N/A	N/A	Oct. 28, 2022	Oct. 27, 2023
15	Test Cable	N/A	RF-02	N/A	N/A	Oct. 28, 2022	Oct. 27, 2023
16	Test Cable	N/A	RF-03	N/A	N/A	Oct. 28, 2022	Oct. 27, 2023
17	ESG Signal Generator	Agilent	E4421B	N/A	B.03.84	Oct. 21, 2022	Oct. 20, 2023
18	Signal Generator	Agilent	N5182A	N/A	A.01.87	Oct. 21, 2022	Oct. 20, 2023
19	Magnetic Field Probe Tester	Narda	ELT-400	0-0344	N/A	Nov. 15, 2022	Nov. 14, 2023
20	Wideband Radio Communication Test	R&S	CMW500	106504	V 3.7.22	Oct. 28, 2022	Oct. 27, 2023
21	MWRF Power Meter Test system	MW	MW100-RF CB	N/A	N/A	Oct. 21, 2022	Oct. 20, 2023
22	D.C. Power Supply	LongWei	TPR-6405D	N/A	N/A	\	\
23	EMC Software	Frad	EZ-EMC	Ver.EMC-CO N 3A1.1	N/A	\	\
24	RF Software	MW	MTS8310	V2.0.0.0	N/A	\	\
25	Turntable	MF	MF-7802BS	N/A	N/A	\	\
26	Antenna tower	MF	MF-7802BS	N/A	N/A	\	\



Conducted emissions Test

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Firmware Version	Last calibration	Calibrated until
1	LISN	R&S	ENV216	101471	N/A	Oct. 21, 2022	Oct. 20, 2023
2	LISN	CYBERTEK	EM5040A	E185040014 9	N/A	Oct. 21, 2022	Oct. 20, 2023
3	Test Cable	N/A	C-01	N/A	N/A	Oct. 21, 2022	Oct. 20, 2023
4	Test Cable	N/A	C-02	N/A	N/A	Oct. 21, 2022	Oct. 20, 2023
5	Test Cable	N/A	C-03	N/A	N/A	Oct. 21, 2022	Oct. 20, 2023
6	EMI Test Receiver	R&S	ESCI3	101393	4.42 SP3	Oct. 28, 2022	Oct. 27, 2023
7	Triple-Loop Antenna	N/A	RF300	N/A	N/A	Oct. 28, 2022	Oct. 27, 2023
8	Absorbing Clamp	DZ	ZN23201	15034	N/A	Oct. 31, 2022	Oct. 30, 2023
9	EMC Software	Frad	EZ-EMC	Ver.EMC-CO N 3A1.1	N/A	\	\



4.EMC EMISSION TEST

4.1 CONDUCTED EMISSION MEASUREMENT

Test Requirement:	FCC Part15 C Section 15.207
Test Method:	ANSI C63.10:2013
Test Frequency Range:	150KHz to 30MHz
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto

4.1.1 POWER LINE CONDUCTED EMISSION Limits

FREQUENCY (MHz)	Limit (dBuV)		Standard
	Quasi-peak	Average	
0.15 -0.5	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	56.00	46.00	FCC
5.0 -30.0	60.00	50.00	FCC

Note:

(1) *Decreases with the logarithm of the frequency.

4.1.2 TEST PROCEDURE


- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.1.3 DEVIATION FROM TEST STANDARD

No deviation



4.1.4 TEST SETUP

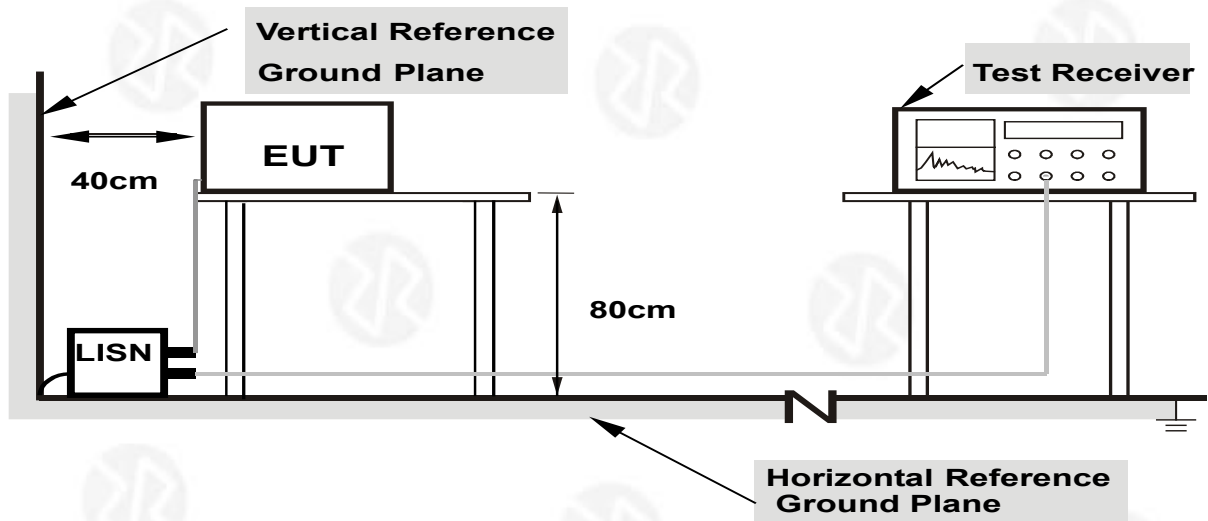

- Note: 1.Support units were connected to second LISN.
2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes**

4.1.5 EUT OPERATING CONDITIONS


The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

We pretest AC 120V and AC 230V, the worst voltage was AC 120V and the data recording in the report. During the test, pre-scan all modes, and found the 802.11n(HT40) CH38 which is the worst case, only the worst case is recorded in the report.



4.1.6 Test Result


Temperature:	26°C	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	L
Test Voltage:	AC 120V/60Hz		

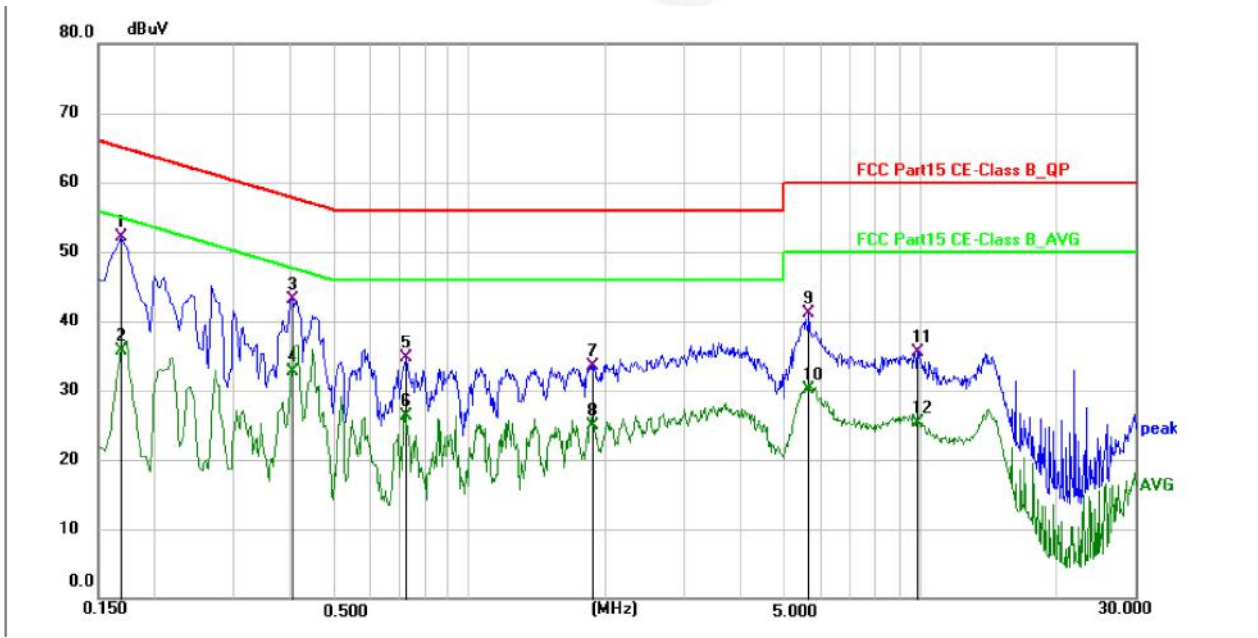

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1 *	0.1680	42.10	9.91	52.01	65.06	-13.05	QP	P	
2	0.1680	25.83	9.91	35.74	55.06	-19.32	AVG	P	
3	0.4020	33.08	9.96	43.04	57.81	-14.77	QP	P	
4	0.4020	22.73	9.96	32.69	47.81	-15.12	AVG	P	
5	0.7260	24.70	9.99	34.69	56.00	-21.31	QP	P	
6	0.7260	16.34	9.99	26.33	46.00	-19.67	AVG	P	
7	1.8780	23.60	9.99	33.59	56.00	-22.41	QP	P	
8	1.8780	15.00	9.99	24.99	46.00	-21.01	AVG	P	
9	5.6715	31.08	10.00	41.08	60.00	-18.92	QP	P	
10	5.6715	20.01	10.00	30.01	50.00	-19.99	AVG	P	
11	9.8655	25.52	10.01	35.53	60.00	-24.47	QP	P	
12	9.8655	15.23	10.01	25.24	50.00	-24.76	AVG	P	



Temperature:	26°C	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	N
Test Voltage:	AC 120V/60Hz		

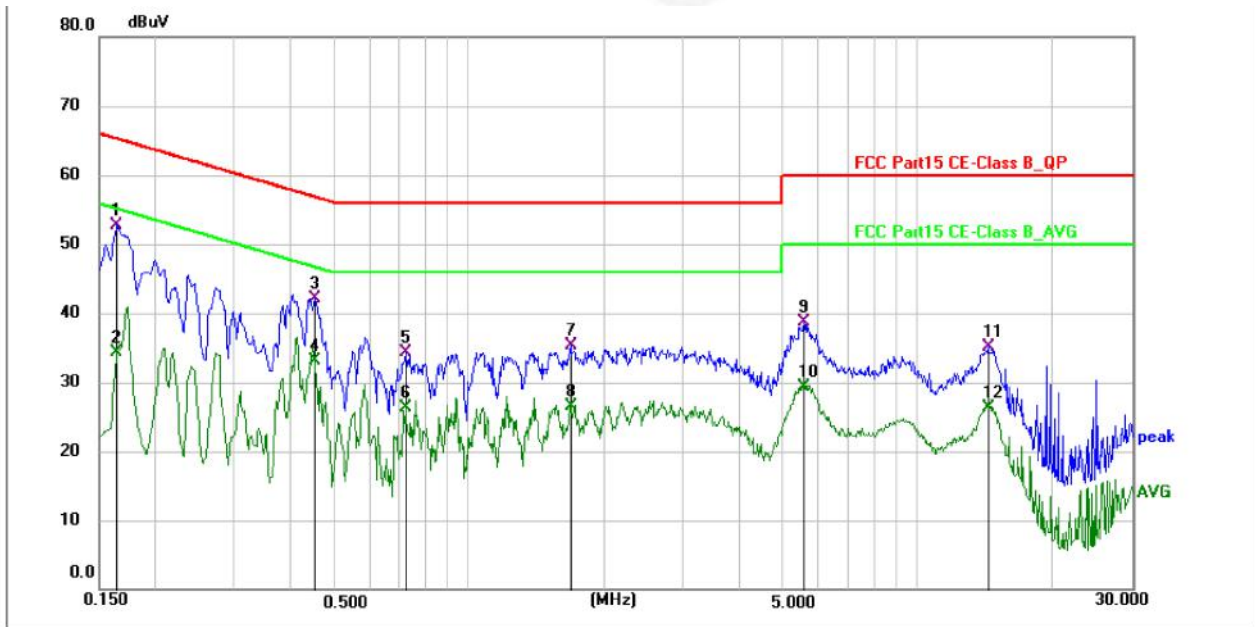

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1 *	0.1635	42.87	9.93	52.80	65.28	-12.48	QP	P	
2	0.1635	24.44	9.93	34.37	55.28	-20.91	AVG	P	
3	0.4515	32.15	9.99	42.14	56.85	-14.71	QP	P	
4	0.4515	23.21	9.99	33.20	46.85	-13.65	AVG	P	
5	0.7215	24.31	10.01	34.32	56.00	-21.68	QP	P	
6	0.7215	16.33	10.01	26.34	46.00	-19.66	AVG	P	
7	1.6890	25.20	10.04	35.24	56.00	-20.76	QP	P	
8	1.6890	16.45	10.04	26.49	46.00	-19.51	AVG	P	
9	5.5860	28.74	10.01	38.75	60.00	-21.25	QP	P	
10	5.5860	19.32	10.01	29.33	50.00	-20.67	AVG	P	
11	14.3565	24.97	10.04	35.01	60.00	-24.99	QP	P	
12	14.3565	16.32	10.04	26.36	50.00	-23.64	AVG	P	



4.2 RADIATED EMISSION MEASUREMENT

4.2.1 APPLICABLE STANDARD

According to FCC Part 15.407(d) and 15.209

4.2.2 CONFORMANCE LIMIT

According to FCC Part 15.407(b)(7): radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

According to FCC Part 15.205, Restricted bands

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
10.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(2)
13.36-13.41			

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Restricted Frequency(MHz)	Field Strength (μV/m)	Field Strength (dBμV/m)	Measurement Distance
0.009~0.490	2400/F(KHz)	20 log (uV/m)	300
0.490~1.705	2400/F(KHz)	20 log (uV/m)	30
1.705~30.0	30	29.5	30
30-88	100	40	3
88-216	150	43.5	3
216-960	200	46	3
Above 960	500	54	3

Limits of Radiated Emission Measurement(Above 1000MHz)

Frequency(MHz)	Class B (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Remark :1. Emission level in dBuV/m=20 log (uV/m)

2. Measurement was performed at an antenna to the closed point of EUT distance of meters.

3. Distance extrapolation factor =40log(Specific distance/ test distance)(dB);

Limit line=Specific limits(dBuV) + distance extrapolation factor.


4.2.3 MEASURING INSTRUMENTS

The Measuring equipment is listed in the section 6.3 of this test report.




4.2.4 TEST CONFIGURATION


1. For radiated emissions below 30MHz

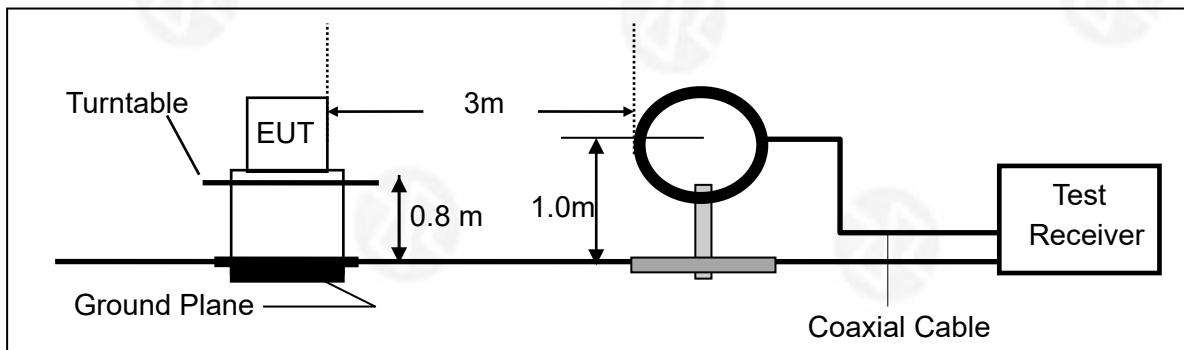

2. For radiated emissions from 30MHz to 1000MHz

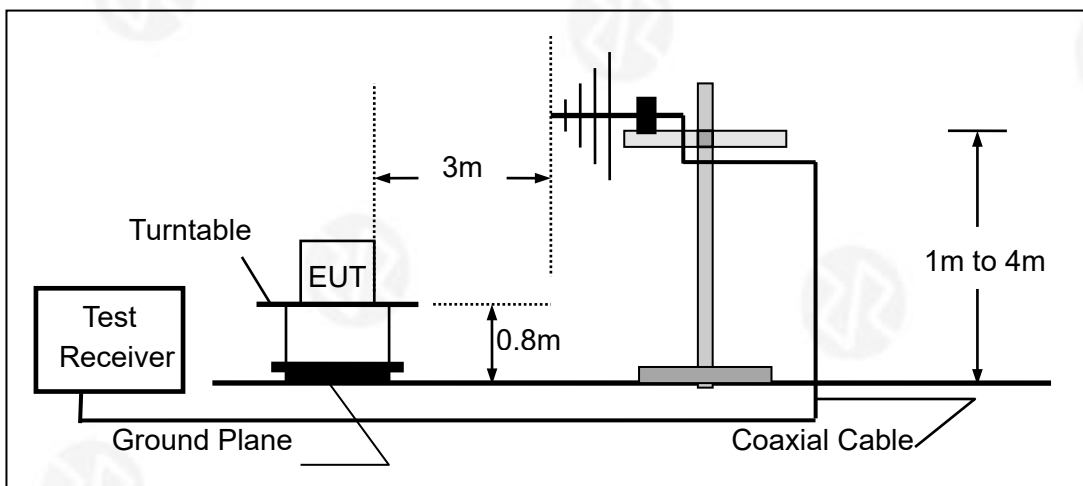

3. Radiated Emission Test-Up Frequency Above 1GHz

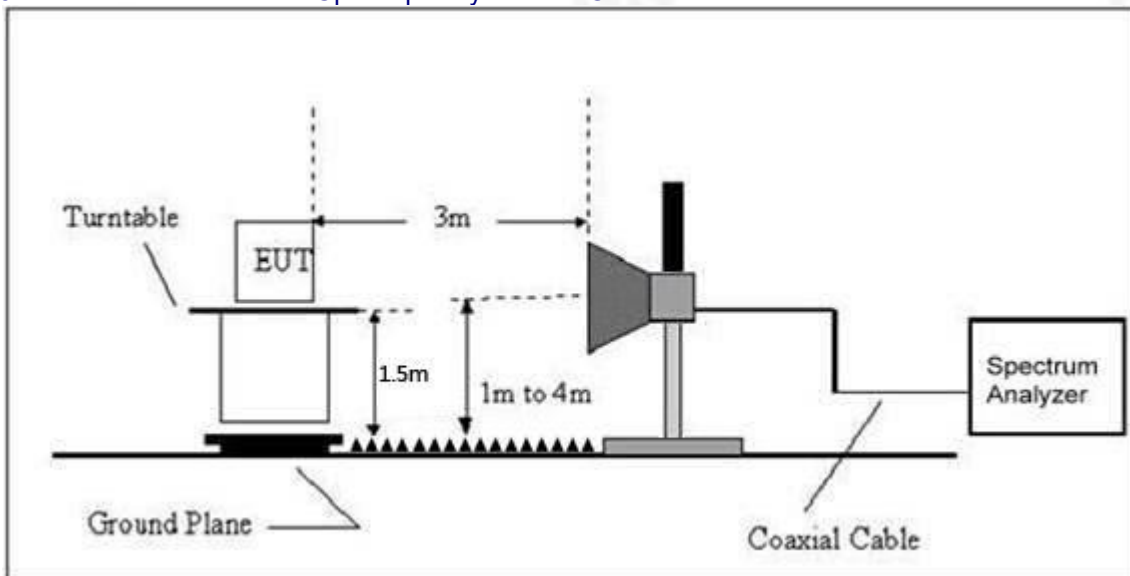



4.2.5 TEST PROCEDURE

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4 dB according to the standards: ANSI C63.10-2013. The test distance is 3m. The setup is according to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 and CAN/CSA-CEI/IEC CISPR 22.

This test is required for any spurious emission that falls in a Restricted Band, as defined in Section 15.205. It must be performed with the highest gain of each type of antenna proposed for use with the EUT.

Use the following spectrum analyzer settings:

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

- The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- The EUT was placed on the top of a rotating table 0.8 m for below 1GHz and 1.5m for above 1GHz the ground at a 3 meter. The table was rotated 360 degrees to determine the position of the highest radiation.
- The height of the equipment or of the substitution antenna shall be 0.8 m for below 1GHz and 1.5m for above 1GHz; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

During the radiated emission test, the Spectrum Analyzer was set with the following configurations:

Frequency Band (MHz)	Function	Resolution bandwidth	Video Bandwidth
30 to 1000	QP	120 kHz	300 kHz
Above 1000	Peak	1 MHz	1 MHz
	Average	1 MHz	10 Hz

Note: for the frequency ranges below 30 MHz, a narrower RBW is used for these ranges but the measured value should add a RBW correction factor (RBWCF) where $RBWCF [dB] = 10 \cdot \lg(100 [kHz]/\text{narrower RBW [kHz]})$. , the narrower RBW is 1 kHz and RBWCF is 20 dB for the frequency 9 kHz to 150 kHz, and the narrower RBW is 10 kHz and RBWCF is 10 dB for the frequency 150 kHz to 30 MHz.



4.2.6 TEST RESULT

Between 9KHz – 30MHz

The emission from 9 kHz to 30MHz was pre-tested and found the result was 20dB lower than the limit, and according to 15.31(o), the test result no need to reported.



Between 30MHz – 1GHz


Temperature:	26°C	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	Horizontal
Test Voltage:	DC 3.85V		



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1 *	32.5198	53.61	-16.41	37.20	40.00	-2.80	QP	P	
2 !	38.7518	51.79	-15.09	36.70	40.00	-3.30	QP	P	
3	89.2764	50.69	-17.24	33.45	43.50	-10.05	QP	P	
4	116.1321	46.07	-16.21	29.86	43.50	-13.64	QP	P	
5	285.9778	35.21	-12.08	23.13	46.00	-22.87	QP	P	
6	497.6765	33.57	-8.29	25.28	46.00	-20.72	QP	P	



Temperature:	26°C	Relative Humidity:	54%
Pressure:	101kPa	Polarization:	Vertical
Test Voltage:	DC 3.85V		

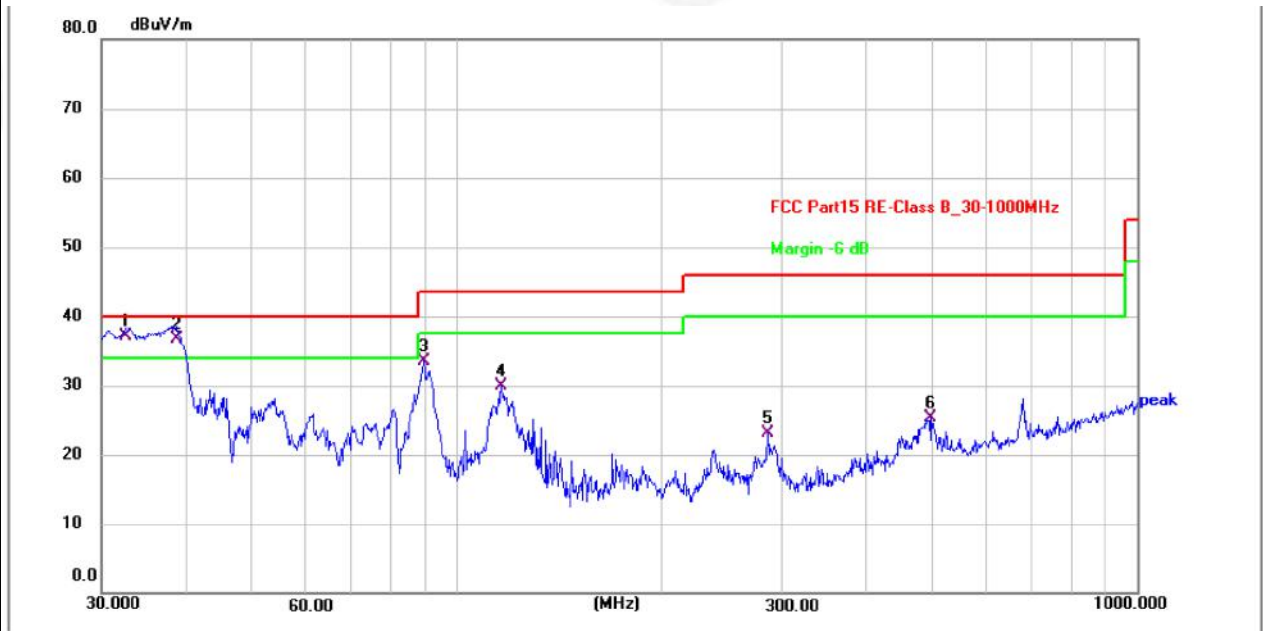

No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	P/F	Remark
1 *	32.5198	53.61	-16.41	37.20	40.00	-2.80	QP	P	
2 !	38.7518	51.79	-15.09	36.70	40.00	-3.30	QP	P	
3	89.2764	50.69	-17.24	33.45	43.50	-10.05	QP	P	
4	116.1321	46.07	-16.21	29.86	43.50	-13.64	QP	P	
5	285.9778	35.21	-12.08	23.13	46.00	-22.87	QP	P	
6	497.6765	33.57	-8.29	25.28	46.00	-20.72	QP	P	

Remarks:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.
3. The test data shows only the worst case U-NII-1 band 802.11a high channel mode.



Between 1GHz – 40GHz

Temperature :	26°C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Voltage :	DC 3.85V
Test Mode :	U-NII-1: 802.11n(HT40)		

Test mode:	IEEE 802.11n(HT40)	Test channel:	Low CH
------------	--------------------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
10380.00	40.46	31.98	17.08	33.91	55.61	68.20	-12.59	V
15570.00	40.53	32.65	20.03	34.85	58.36	68.20	-9.84	V
10380.00	41.39	31.98	17.08	33.91	56.54	68.20	-11.66	H
15570.00	39.89	32.65	20.03	34.85	57.72	68.20	-10.48	H

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
10380.00	28.62	31.98	17.08	33.91	43.77	54.00	-10.23	V
15570.00	27.04	32.65	20.03	34.85	44.87	54.00	-9.13	V
10380.00	28.97	31.98	17.08	33.91	44.12	54.00	-9.88	H
15570.00	29.07	32.65	20.03	34.85	46.90	54.00	-7.10	H

Test mode:	IEEE 802.11n(HT40)	Test channel:	High CH
------------	--------------------	---------------	---------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
10460.00	40.64	32.59	18.02	33.92	57.33	68.20	-10.87	V
15690.00	40.43	32.87	20.15	34.88	58.57	68.20	-9.63	V
10460.00	40.29	32.59	18.02	33.92	56.98	68.20	-11.22	H
15690.00	41.63	32.87	20.15	34.88	59.77	68.20	-8.43	H

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
10460.00	27.81	32.59	18.02	33.92	44.50	54.00	-9.50	V
15690.00	27.66	32.87	20.15	34.88	45.80	54.00	-8.20	V
10460.00	28.64	32.59	18.02	33.92	45.33	54.00	-8.67	H
15690.00	29.39	32.78	20.12	34.86	47.43	54.00	-6.57	H

Remark:

1. During the test, pre-scan the 802.11a,n(HT20),ac(HT20),n(HT40),ac(HT40),ac(HT80) mode, and found the U-NII-1 band 802.11n(HT40) mode is worse case , the report only record this mode.
2. Final Level =Receiver Read level + Antenna Factor + Cable Loss–Preamplifier Factor



5. POWER SPECTRAL DENSITY TEST

5.1 APPLIED PROCEDURES / LIMIT

According to FCC §15.407(3)

Power limits:

(1) For the band 5.15-5.25 GHz.

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For client devices in the 5.15-5.25 GHz band, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.



5.2 TEST PROCEDURE

For devices operating in the bands 5.15-5.25 GHz, 5.25-5.35 GHz, and 5.47-5.725 GHz, the above procedures make use of 1 MHz RBW to satisfy directly the 1 MHz reference bandwidth specified in § 15.407(a)(5). For devices operating in the band 5.725-5.85 GHz, the rules specify a measurement bandwidth of 500 kHz. Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of a RBWs less than 1 MHz, or 500 kHz, “provided that the measured power is integrated over the full reference bandwidth” to show the total power over the specified measurement bandwidth (i.e., 1 MHz, or 500 kHz). If measurements are performed using a reduced resolution bandwidth (< 1 MHz, or < 500 kHz) and integrated over 1 MHz, or 500 KHz bandwidth, the following adjustments to the procedures apply:

- a) Set $RBW \geq 1/T$, where T is defined in section II.B.I.a).
- b) Set $VBW \geq 3 RBW$.
- c) If measurement bandwidth of Maximum PSD is specified in 500 kHz, add $10\log(500\text{kHz}/RBW)$ to the measured result, whereas $RBW (< 500 \text{ KHz})$ is the reduced resolution bandwidth of the spectrum analyzer set during measurement.
- d) If measurement bandwidth of Maximum PSD is specified in 1 MHz, add $10\log(1\text{MHz}/RBW)$ to the measured result, whereas $RBW (< 1 \text{ MHz})$ is the reduced resolution bandwidth of spectrum analyzer set during measurement.
- e) Care must be taken to ensure that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.

Note: As a practical matter, it is recommended to use reduced RBW of 100 KHz for the sections 5.c) and 5.d) above, since $RBW=100 \text{ KHz}$ is available on nearly all spectrum analyzers.

5.3 DEVIATION FROM STANDARD

No deviation.

5.4 TEST SETUP



5.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.1 Unless otherwise a special operating condition is specified in the follows during the testing.



5.6 TEST RESULTS

Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1015 hPa	Test Voltage :	DC 3.85V
Test Mode :	TX		

U-NII-1:

Mode	TX Type	Frequency (MHz)	Maximum PSD (dBm/MHz)		Verdict
			ANT1	Limit	
802.11a	SISO	5180	2.60	<=11	Pass
		5200	2.04	<=11	Pass
		5240	1.16	<=11	Pass
802.11n (HT20)	SISO	5180	1.83	<=11	Pass
		5200	1.25	<=11	Pass
		5240	0.78	<=11	Pass
802.11n (HT40)	SISO	5190	0.08	<=11	Pass
		5230	-1.04	<=11	Pass
802.11ac (VHT20)	SISO	5180	1.69	<=11	Pass
		5200	1.41	<=11	Pass
		5240	0.84	<=11	Pass
802.11ac (VHT40)	SISO	5190	-0.10	<=11	Pass
		5230	-0.95	<=11	Pass
802.11ac (VHT80)	SISO	5210	-3.85	<=11	Pass





U-NII-3

Mode	TX Type	Frequency (MHz)	Maximum PSD (dBm/500kHz)		Verdict
			ANT1	Limit	
802.11a	SISO	5745	-4.75	<=30	Pass
		5785	-4.52	<=30	Pass
		5825	-3.53	<=30	Pass
802.11n (HT20)	SISO	5745	-5.18	<=30	Pass
		5785	-5.02	<=30	Pass
		5825	-3.97	<=30	Pass
802.11n (HT40)	SISO	5755	-7.57	<=30	Pass
		5795	-6.77	<=30	Pass
802.11ac (VHT20)	SISO	5745	-5.33	<=30	Pass
		5785	-4.95	<=30	Pass
		5825	-3.70	<=30	Pass
802.11ac (VHT40)	SISO	5755	-7.46	<=30	Pass
		5795	-6.76	<=30	Pass
802.11ac (VHT80)	SISO	5775	-10.63	<=30	Pass




Test Graph

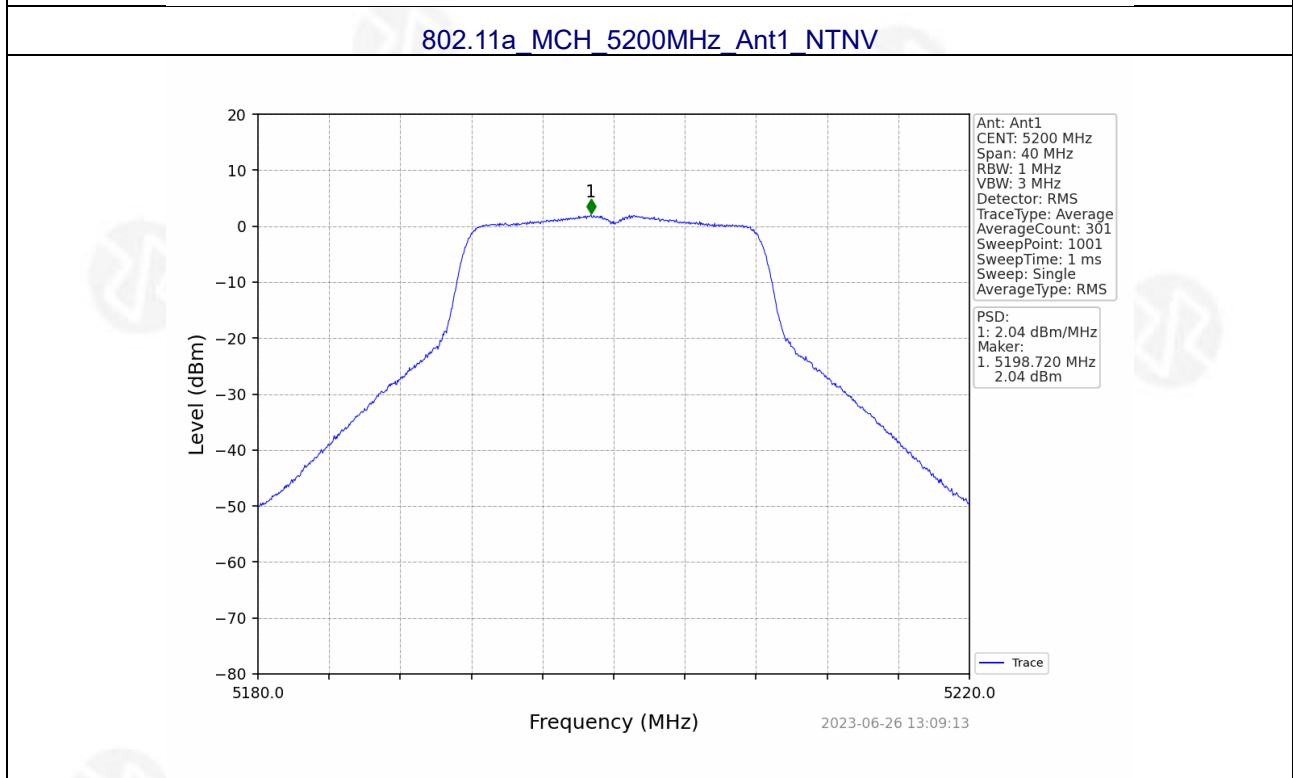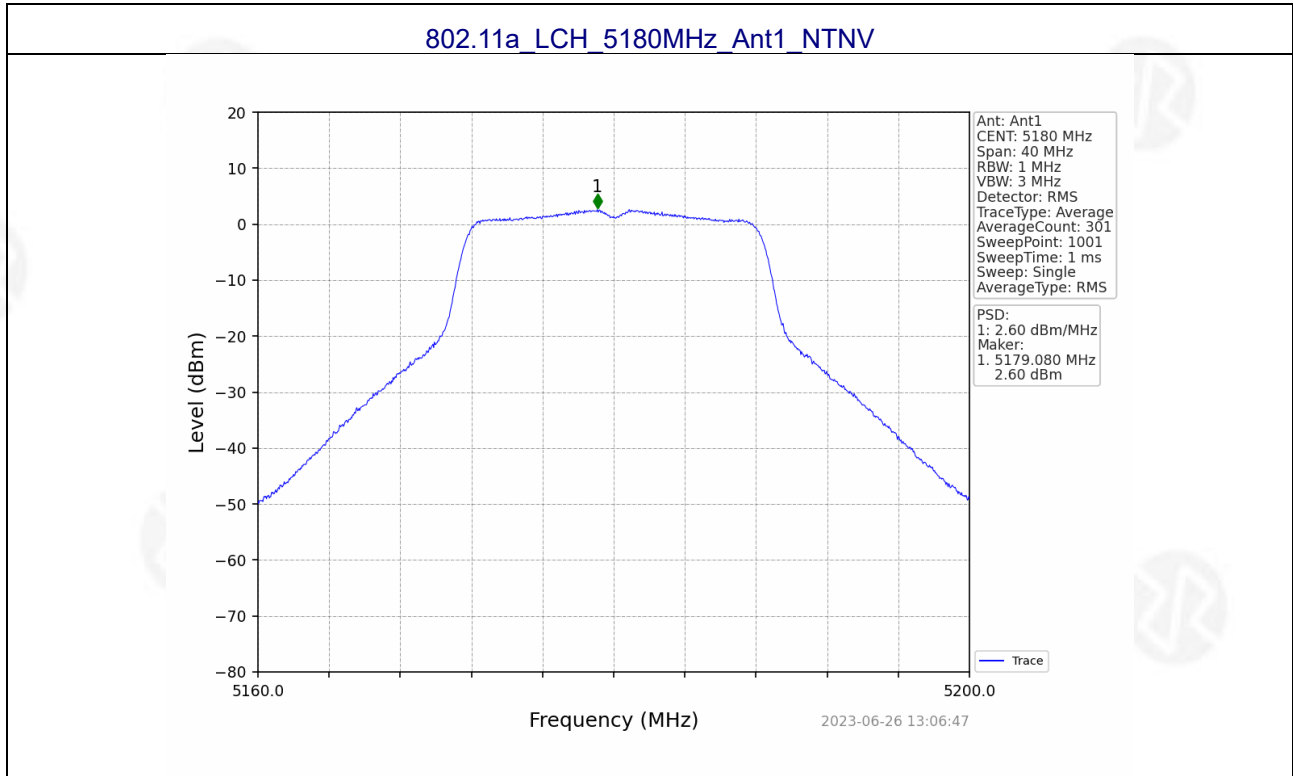




802.11a HCH 5240MHz Ant1 NTN

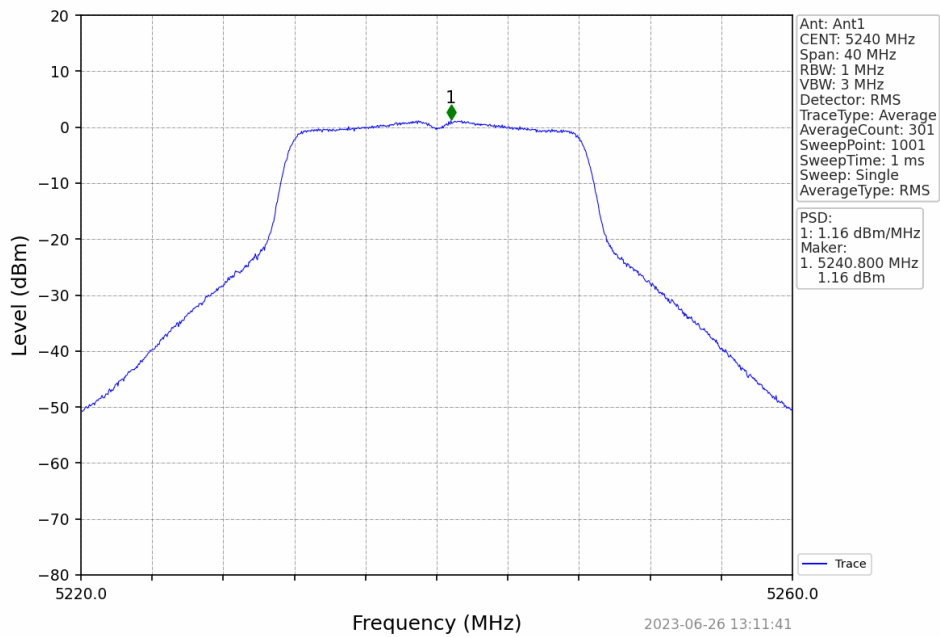


802.11n(HT20) LCH 5180MHz Ant1 NTN

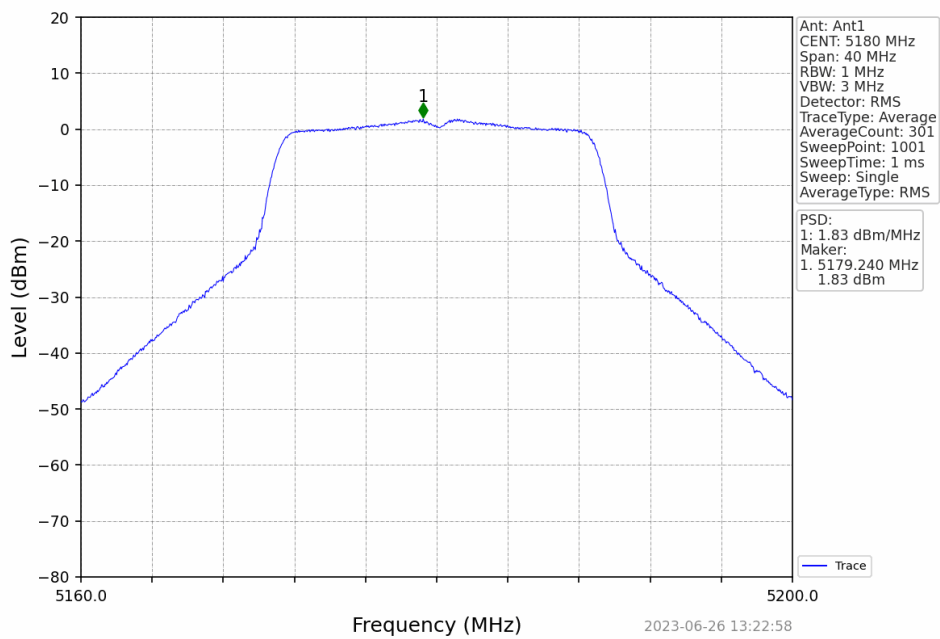




802.11n(HT20) MCH 5200MHz Ant1 NTV

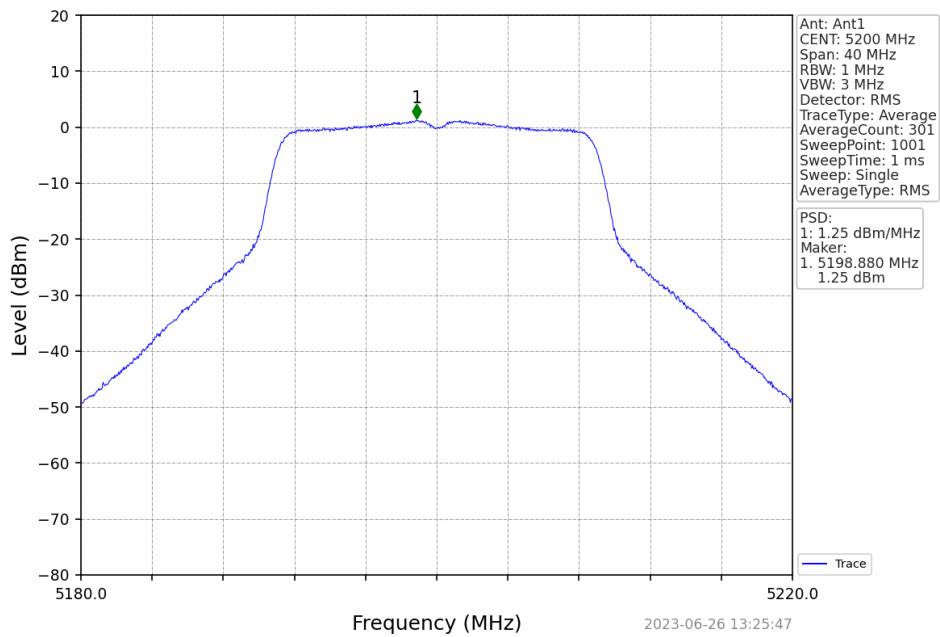


802.11n(HT20) HCH 5240MHz Ant1 NTV

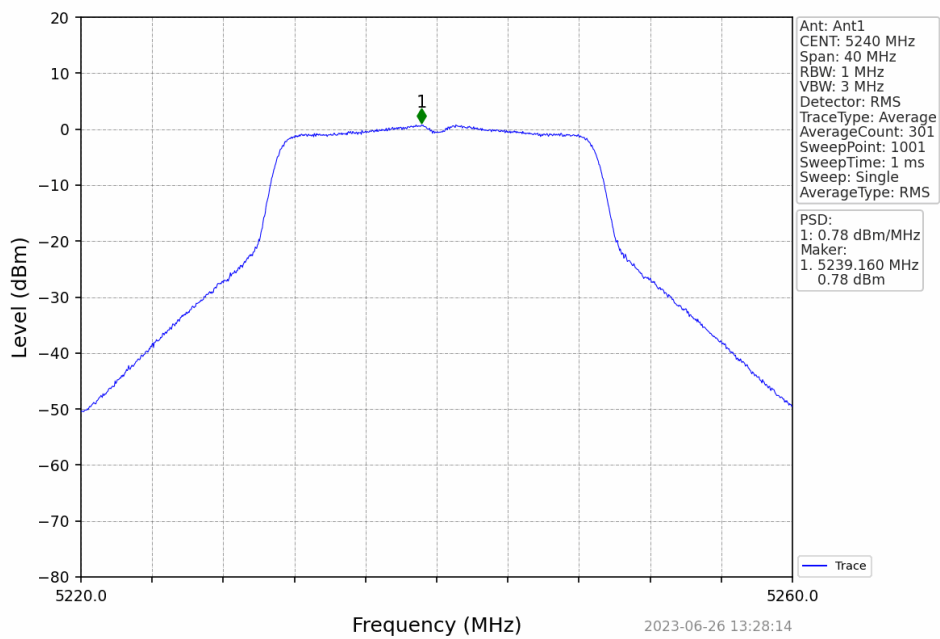




802.11n(HT40) LCH 5190MHz Ant1 NTV

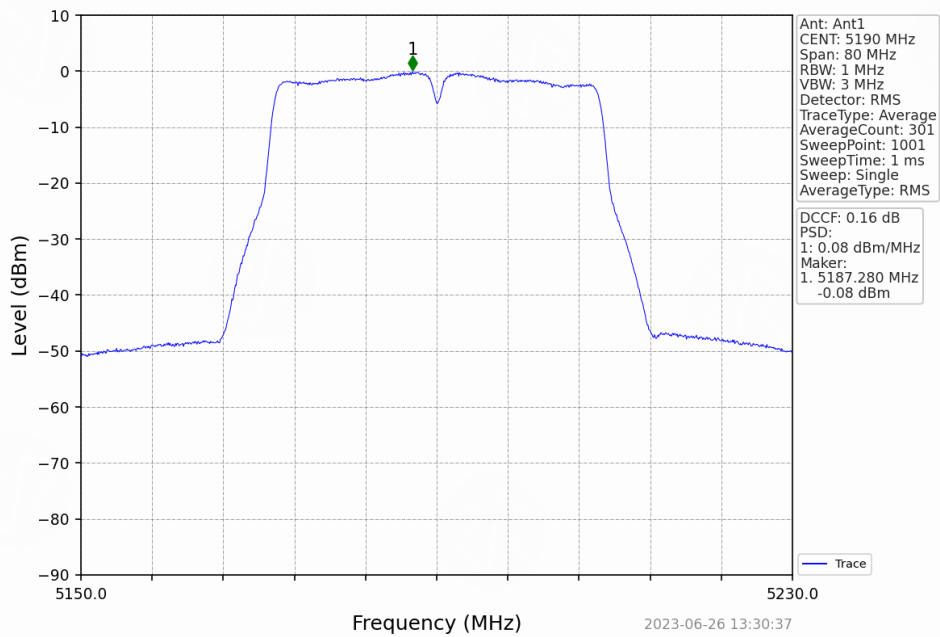


802.11n(HT40) HCH 5230MHz Ant1 NTV

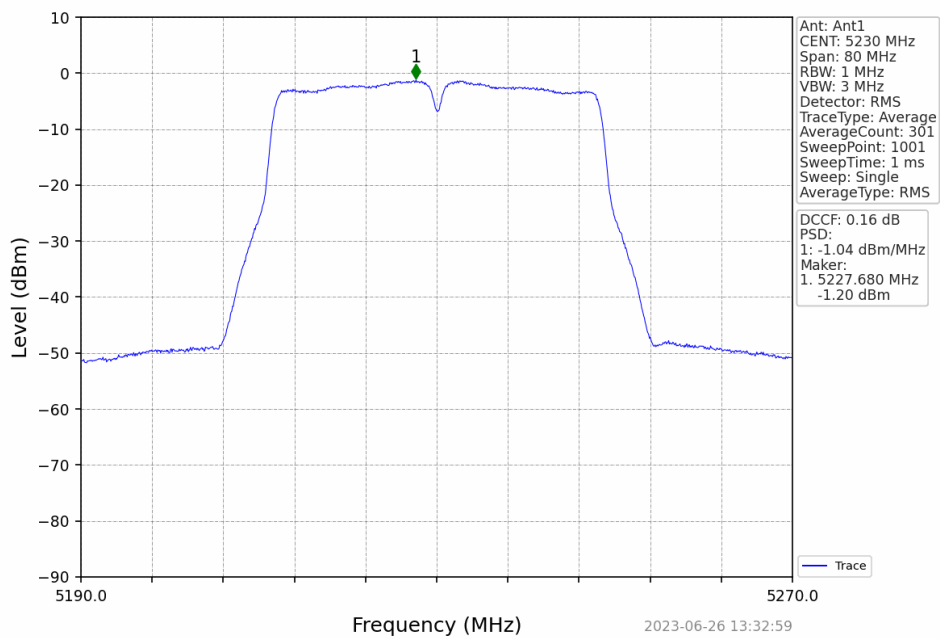




802.11ac(VHT20) LCH 5180MHz Ant1 NTN

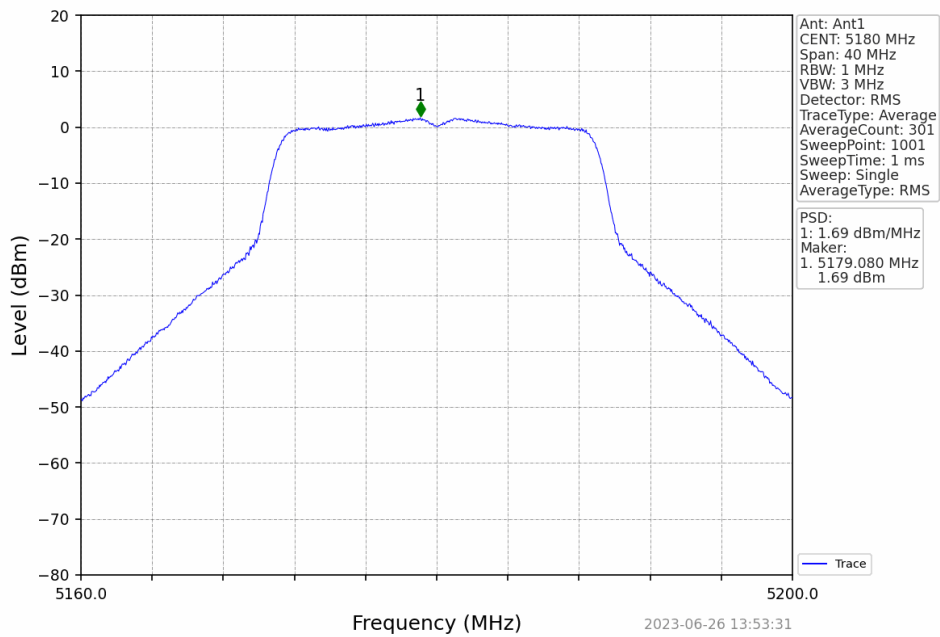


802.11ac(VHT20) MCH 5200MHz Ant1 NTN

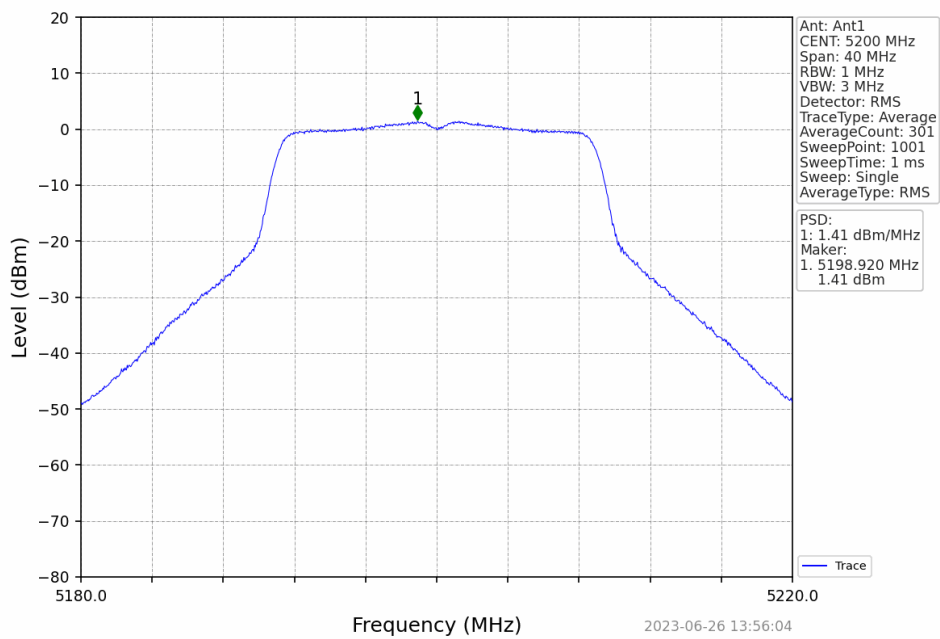




802.11ac(VHT20) HCH 5240MHz Ant1 NTN

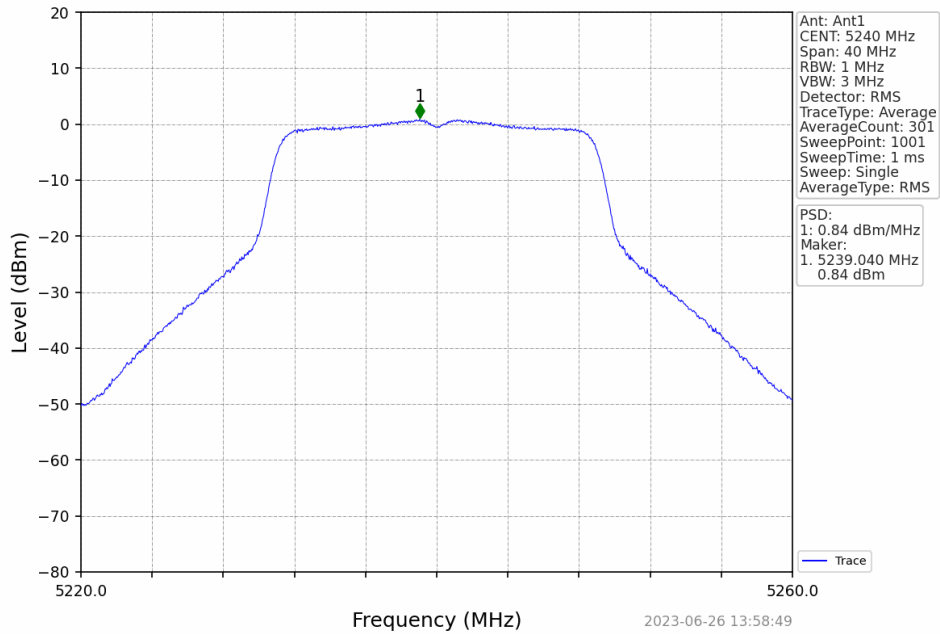


802.11ac(VHT40) LCH 5190MHz Ant1 NTN

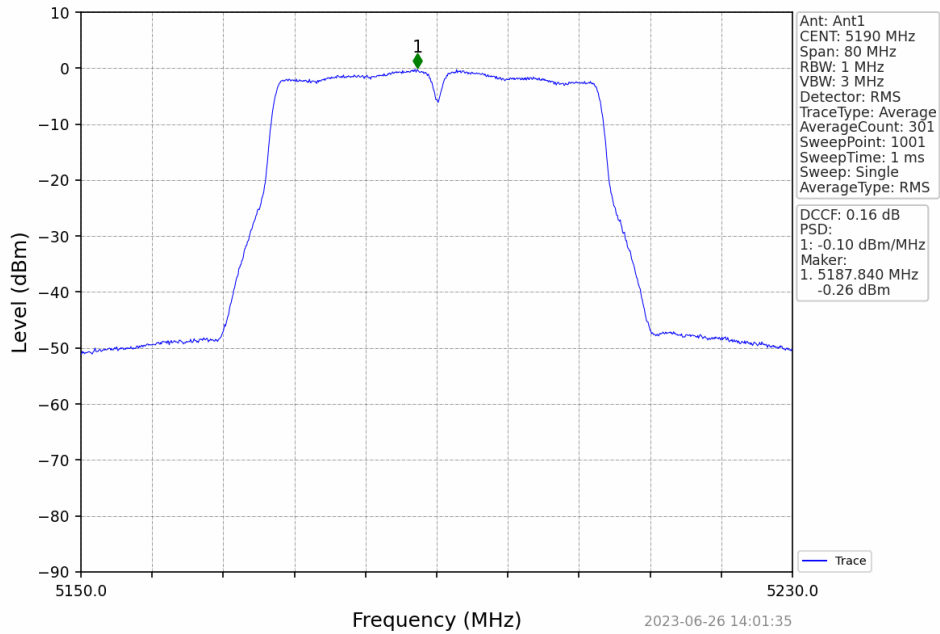




802.11ac(VHT40) HCH 5230MHz Ant1 NTN


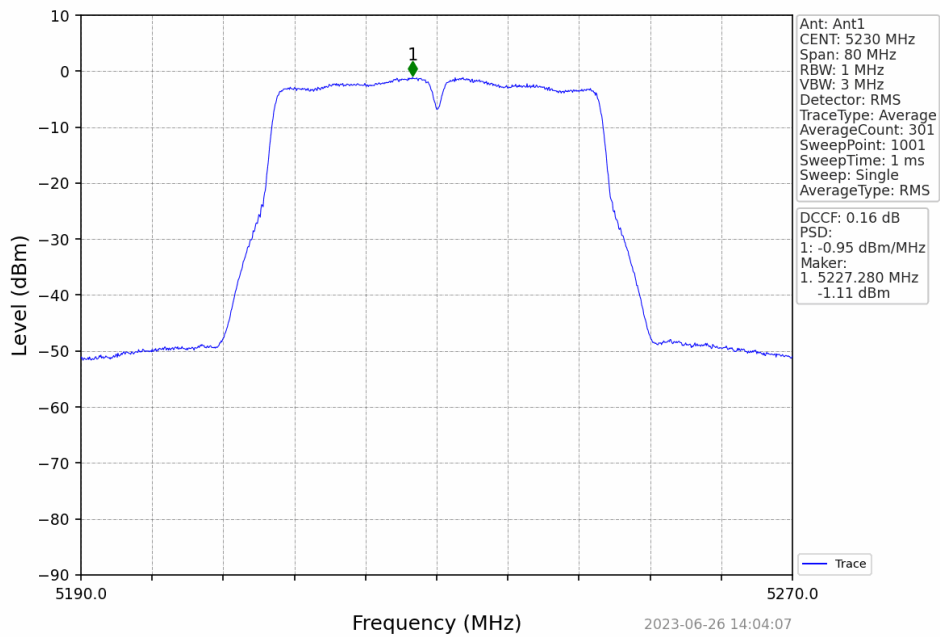


802.11ac(VHT80) MCH 5210MHz Ant1 NTN

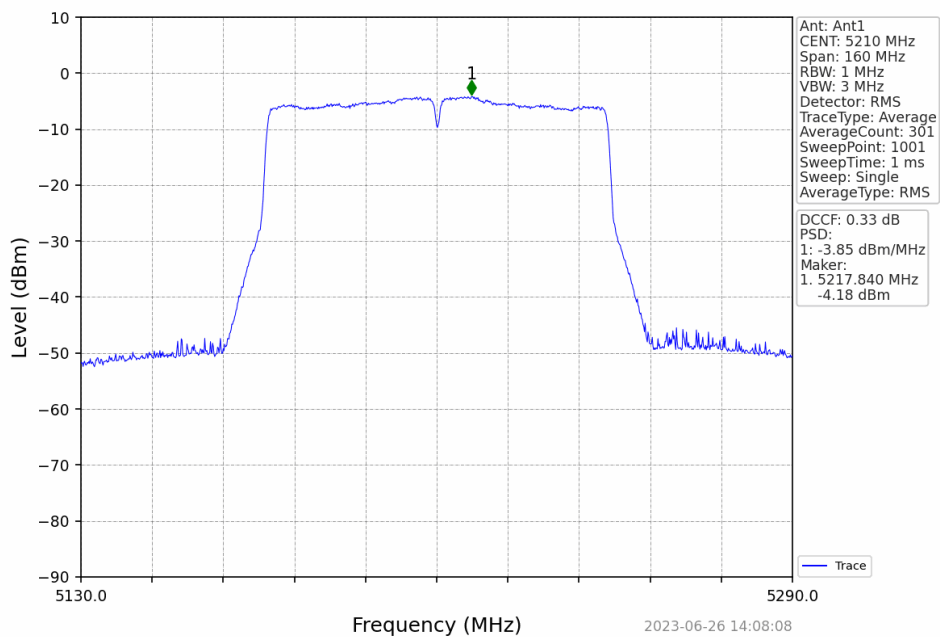




U-NII-3

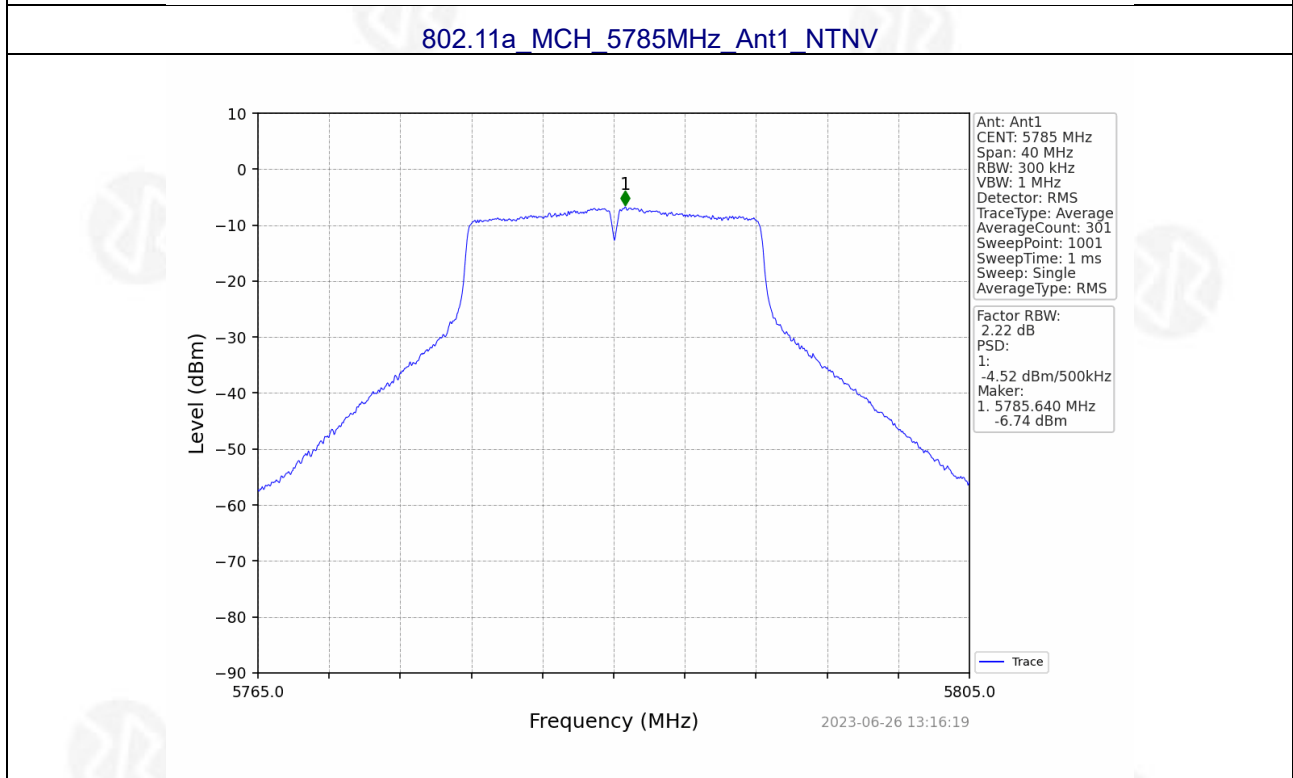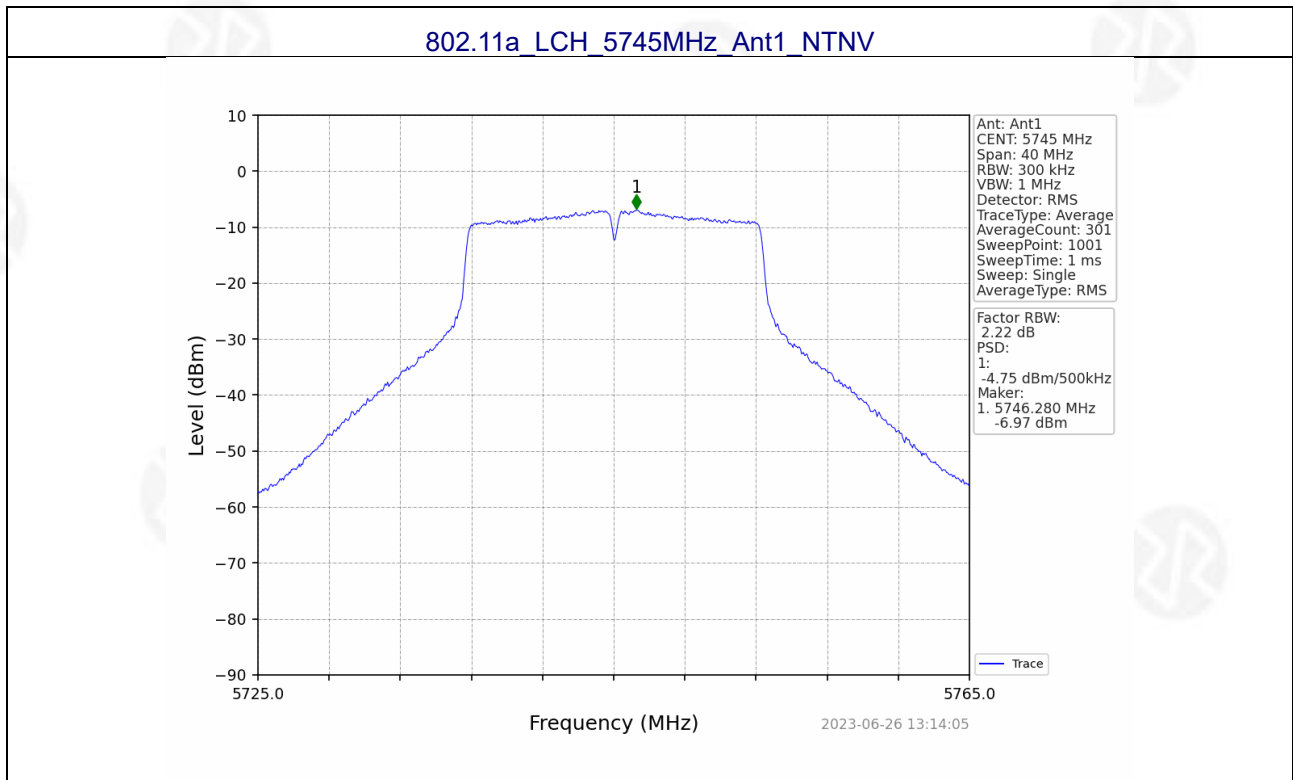




802.11a HCH 5825MHz Ant1 NTN

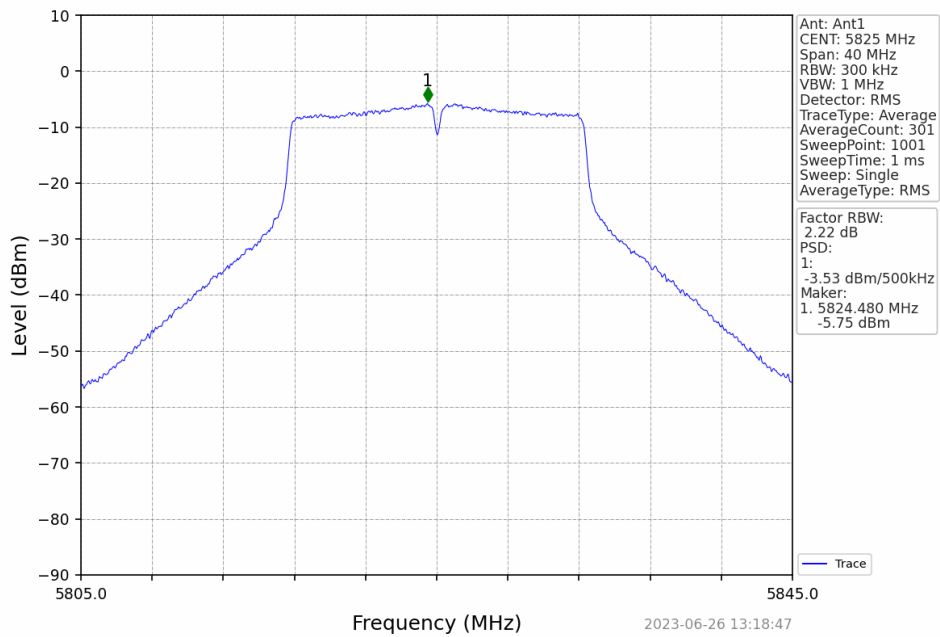


802.11n(HT20) LCH 5745MHz Ant1 NTN

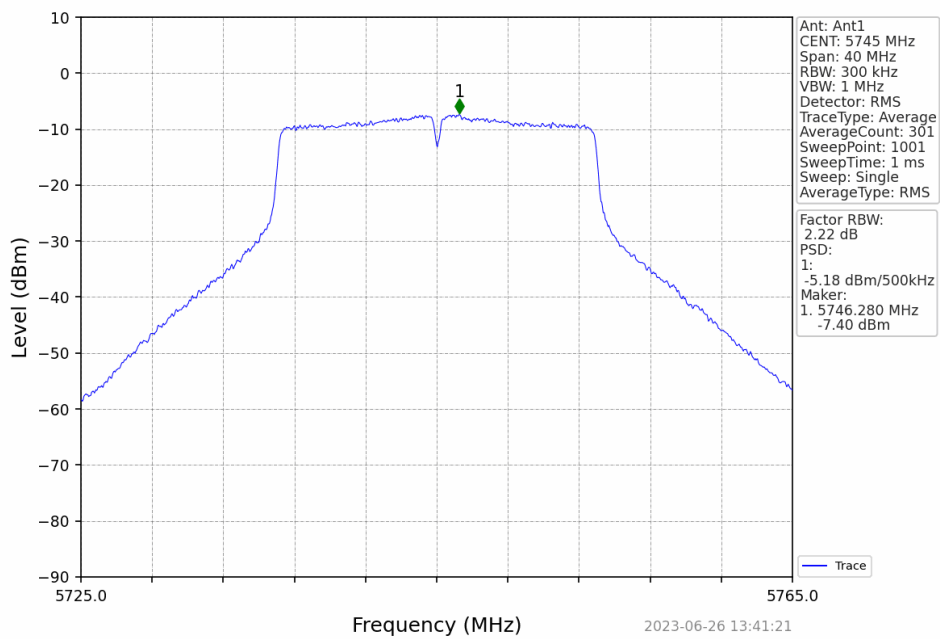




802.11n(HT20) MCH 5785MHz Ant1 NTV

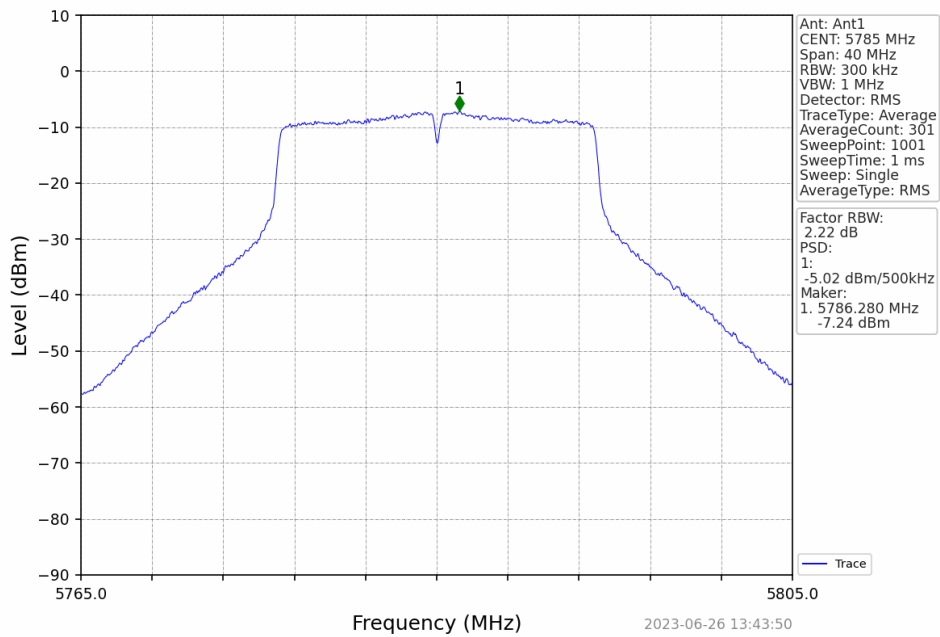


802.11n(HT20) HCH 5825MHz Ant1 NTV

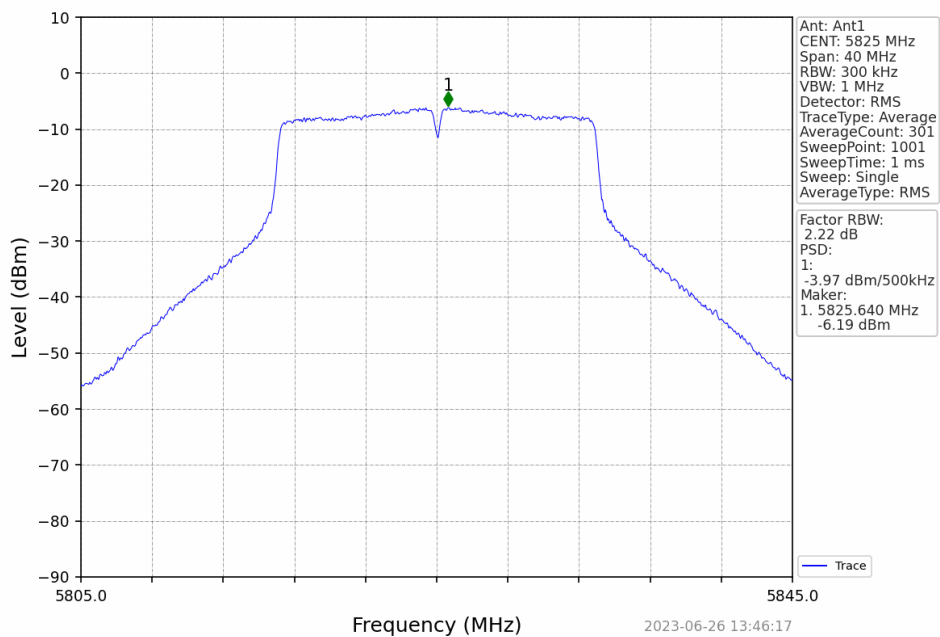




802.11n(HT40) LCH 5755MHz Ant1 NTV

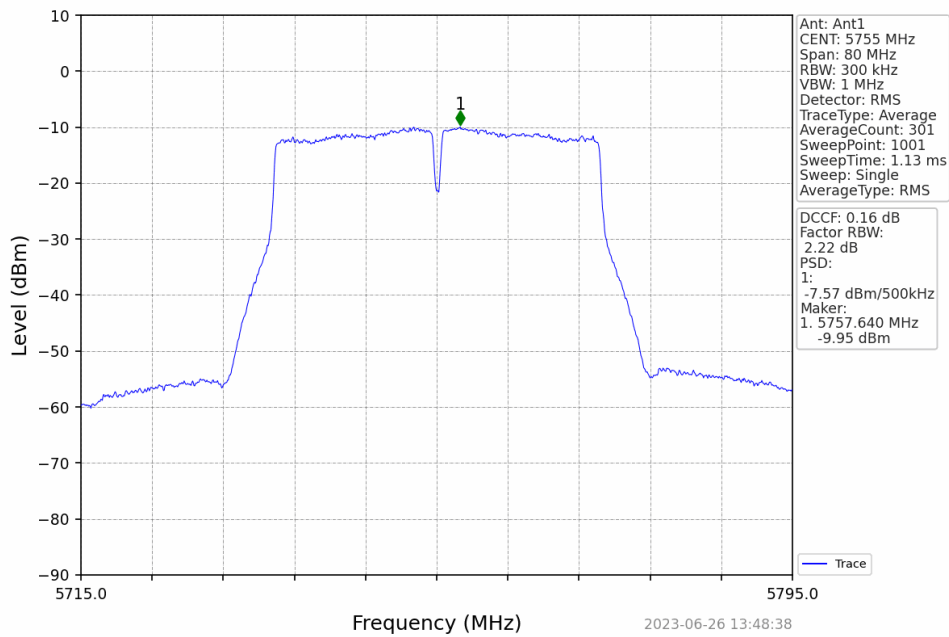


802.11n(HT40) HCH 5795MHz Ant1 NTV

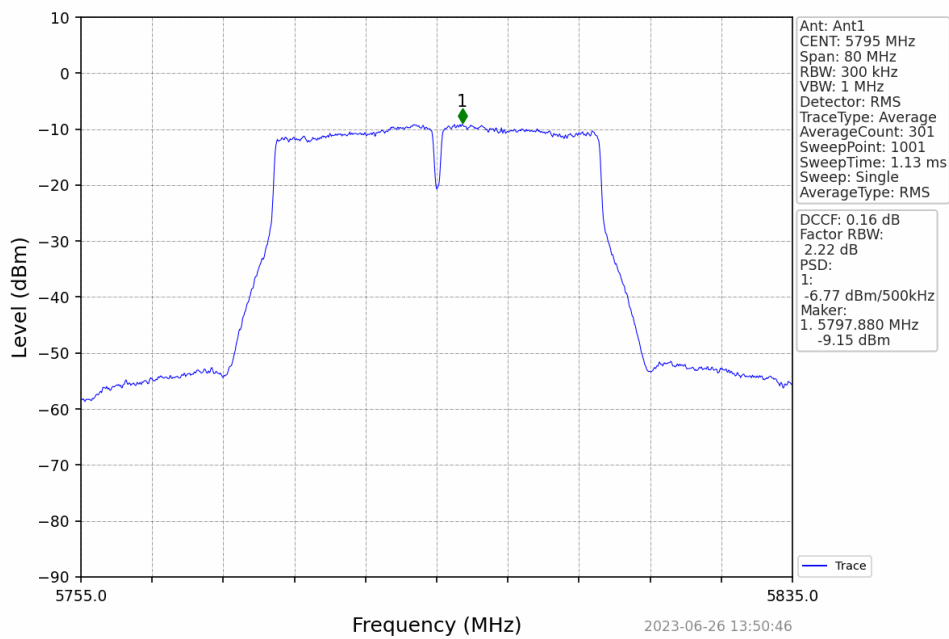




802.11ac(VHT20) LCH 5745MHz Ant1_NTNV

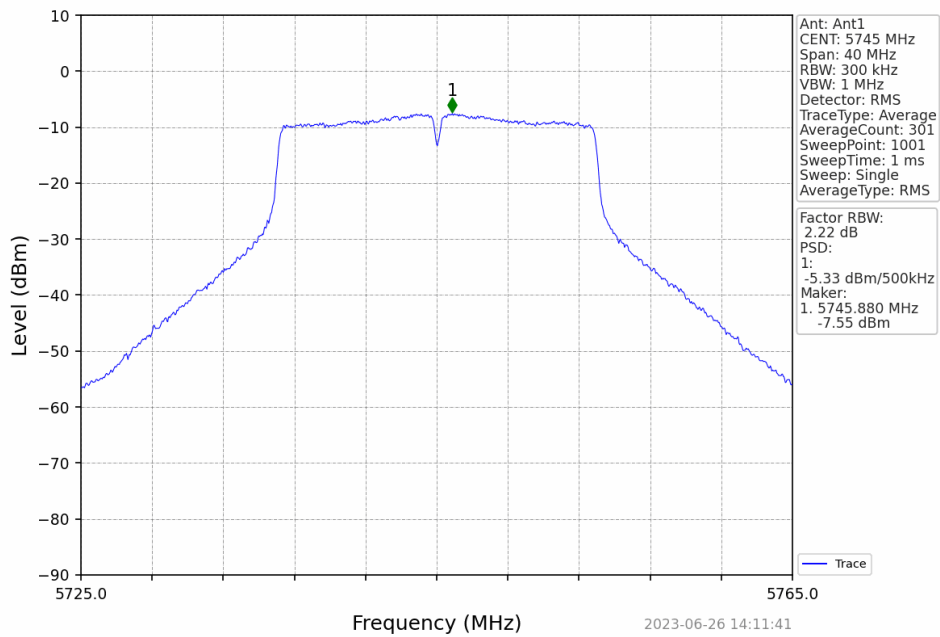


802.11ac(VHT20) MCH 5785MHz Ant1_NTNV

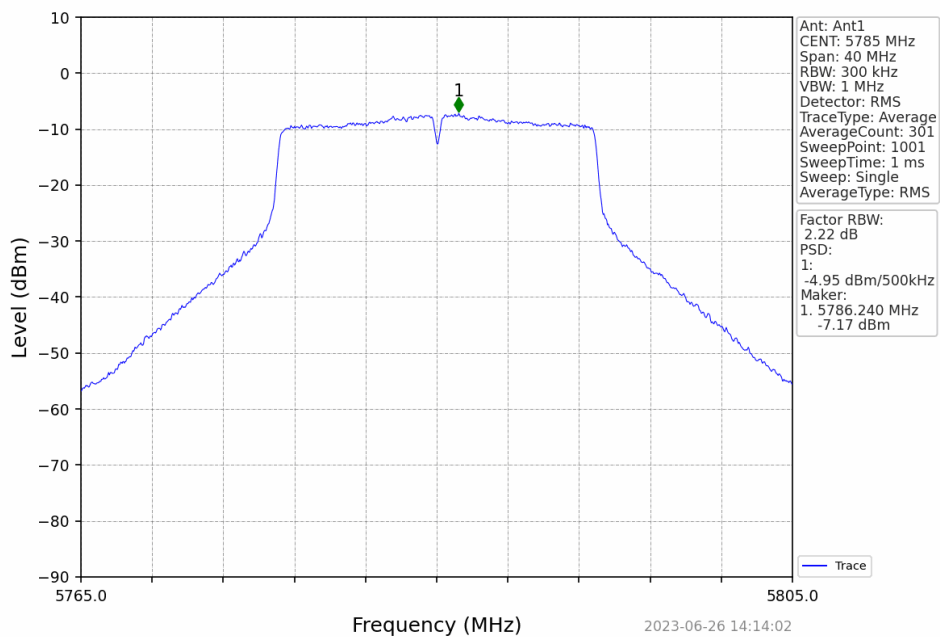




802.11ac(VHT20) HCH 5825MHz Ant1 NTNV

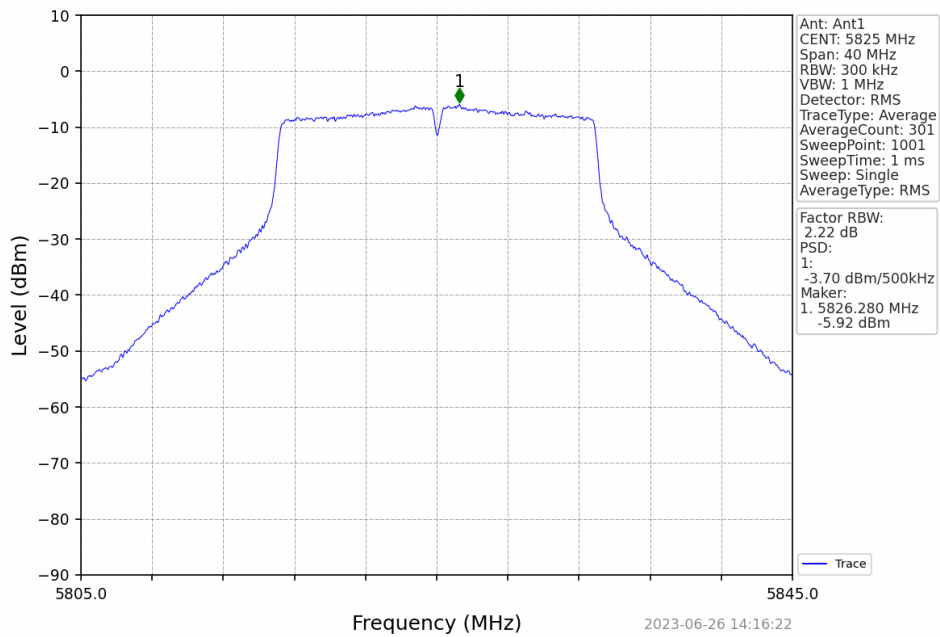


802.11ac(VHT40) LCH 5755MHz Ant1 NTNV

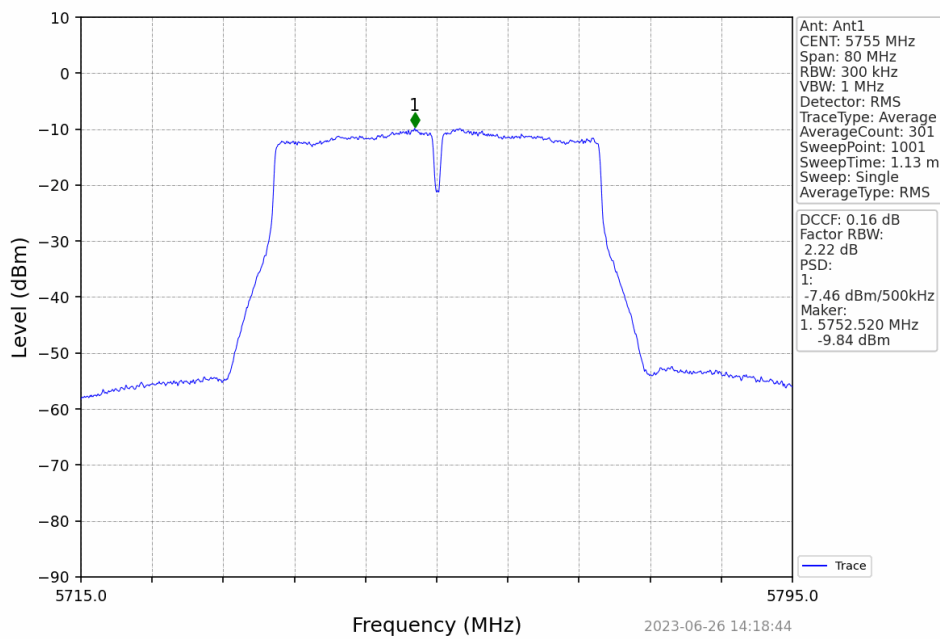




802.11ac(VHT40) HCH 5795MHz Ant1 NTN

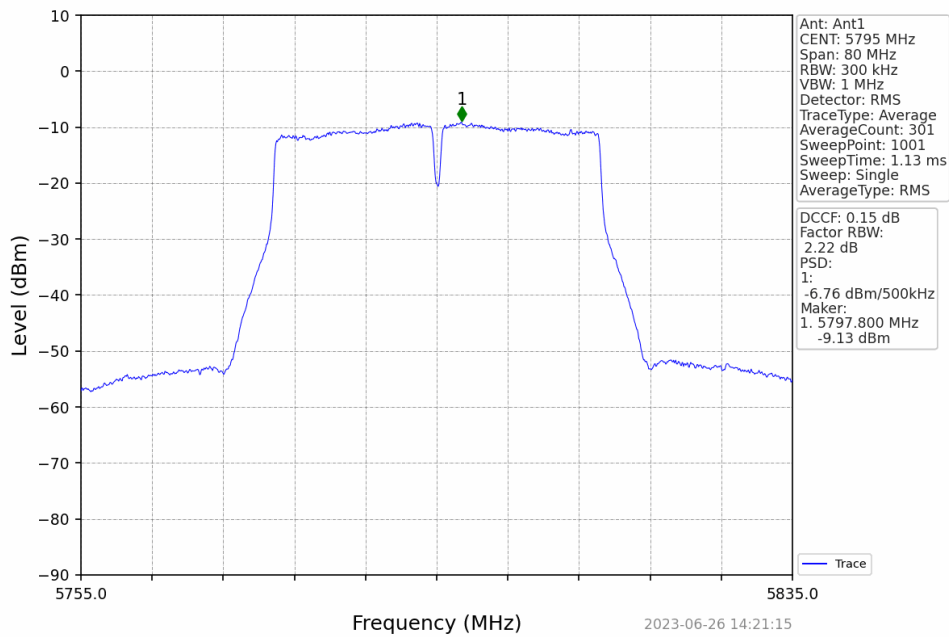

802.11ac(VHT80) MCH 5775MHz Ant1 NTN

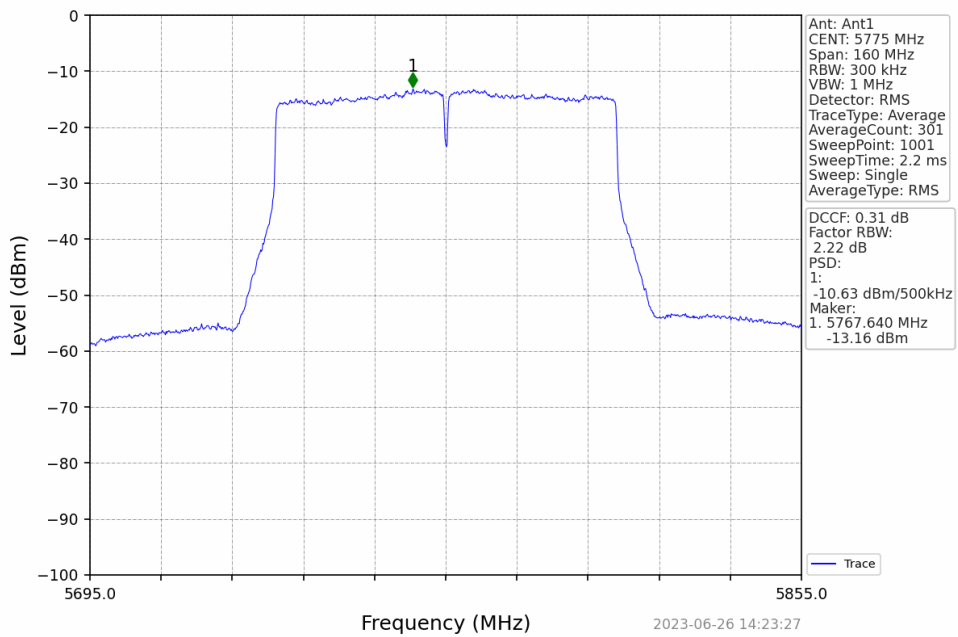



6. 26DB & 6DB & 99% EMISSION BANDWIDTH

6.1 APPLIED PROCEDURES / LIMIT


The maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test. If the device cannot be connected directly, alternative techniques acceptable to the Commission may be used. Measurements in the 5.725-5.85 GHz band, the minimum bandwidth 6 dB bandwidth of U-NII devices shall be at least 500KHz. Measurements in the 5.15-5.25 GHz, 5.25-5.35 GHz, and the 5.47-5.725 GHz bands are made over a bandwidth of 1 MHz or the 26 dB emission bandwidth of the device, whichever is less. A narrower resolution bandwidth can be used, provided that the measured power is integrated over the full reference bandwidth.

6.2 TEST PROCEDURE

- a) Set RBW = 100KHz.
- b) Set the VBW > RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

The following procedure shall be used for measuring (99 %) power bandwidth:

1. Set center frequency to the nominal EUT channel center frequency.
2. Set span = 1.5 times to 5.0 times the OBW.
3. Set RBW = 1 % to 5 % of the OBW
4. Set VBW $\geq 3 \cdot$ RBW
5. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
6. Use the 99 % power bandwidth function of the instrument (if available).
7. If the instrument does not have a 99 % power bandwidth function, the trace data points are recovered and directly summed in power units. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 % of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5 % of the total is reached; that frequency is recorded as the upper frequency. The 99% occupied bandwidth is the difference between these two frequencies.

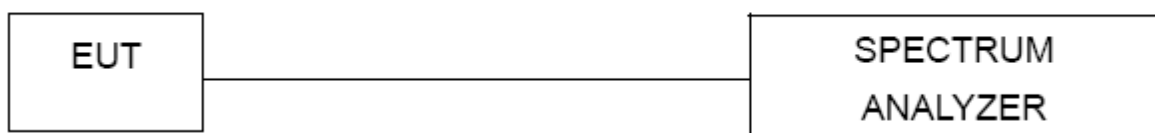



6.3 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

6.4 TEST RESULTS

Temperature :	26 °C	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	DC 3.85V
Test Mode :	TX		



99% Occupy Bandwidth (MHz)

Mode	TX Type	Frequency (MHz)	ANT	99% Occupied Bandwidth (MHz)	Verdict
				Result	
802.11a	SISO	5180	1	17.368	Pass
		5200	1	17.341	Pass
		5240	1	17.379	Pass
		5745	1	17.484	Pass
		5785	1	17.416	Pass
		5825	1	17.398	Pass
802.11n (HT20)	SISO	5180	1	18.441	Pass
		5200	1	18.525	Pass
		5240	1	18.518	Pass
		5745	1	18.522	Pass
		5785	1	18.516	Pass
		5825	1	18.567	Pass
802.11n (HT40)	SISO	5190	1	36.594	Pass
		5230	1	36.667	Pass
		5755	1	36.669	Pass
		5795	1	36.609	Pass
802.11ac (VHT20)	SISO	5180	1	18.496	Pass
		5200	1	18.480	Pass
		5240	1	18.479	Pass
		5745	1	18.489	Pass
		5785	1	18.445	Pass
		5825	1	18.511	Pass
802.11ac (VHT40)	SISO	5190	1	36.651	Pass
		5230	1	36.629	Pass
		5755	1	36.624	Pass
		5795	1	36.601	Pass
802.11ac (VHT80)	SISO	5210	1	76.986	Pass
		5775	1	76.478	Pass



-26dB Channel Bandwidth (MHz)

Mode	TX Type	Frequency (MHz)	ANT	26dB Bandwidth (MHz)	Verdict
				Result	
802.11a	SISO	5180	1	23.113	Pass
		5200	1	23.484	Pass
		5240	1	23.965	Pass
802.11n (HT20)	SISO	5180	1	23.728	Pass
		5200	1	23.273	Pass
		5240	1	23.004	Pass
802.11n (HT40)	SISO	5190	1	41.453	Pass
		5230	1	41.524	Pass
802.11ac (VHT20)	SISO	5180	1	24.382	Pass
		5200	1	23.633	Pass
		5240	1	23.562	Pass
802.11ac (VHT40)	SISO	5190	1	41.109	Pass
		5230	1	41.606	Pass
802.11ac (VHT80)	SISO	5210	1	97.925	Pass





6dB Channel Bandwidth (MHz)

Mode	TX Type	Frequency (MHz)	ANT	6dB Bandwidth (MHz)		Verdict
				Result	Limit	
802.11a	SISO	5745	1	15.673	≥ 0.5	Pass
		5785	1	15.714	≥ 0.5	Pass
		5825	1	15.786	≥ 0.5	Pass
802.11n (HT20)	SISO	5745	1	15.425	≥ 0.5	Pass
		5785	1	15.754	≥ 0.5	Pass
		5825	1	15.723	≥ 0.5	Pass
802.11n (HT40)	SISO	5755	1	36.072	≥ 0.5	Pass
		5795	1	35.757	≥ 0.5	Pass
802.11ac (VHT20)	SISO	5745	1	16.804	≥ 0.5	Pass
		5785	1	16.316	≥ 0.5	Pass
		5825	1	15.191	≥ 0.5	Pass
802.11ac (VHT40)	SISO	5755	1	35.885	≥ 0.5	Pass
		5795	1	35.559	≥ 0.5	Pass
802.11ac (VHT80)	SISO	5775	1	75.182	≥ 0.5	Pass




Test Result

99% Occupy Bandwidth (MHz)

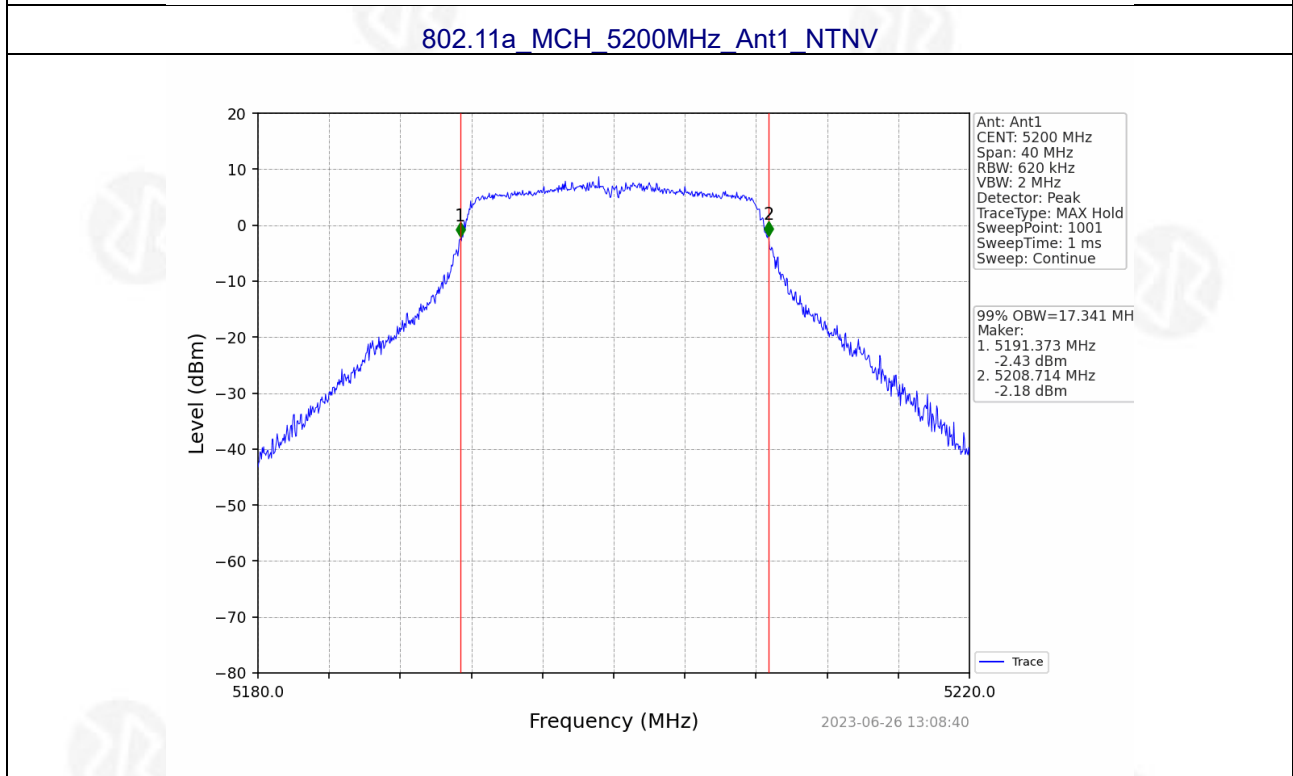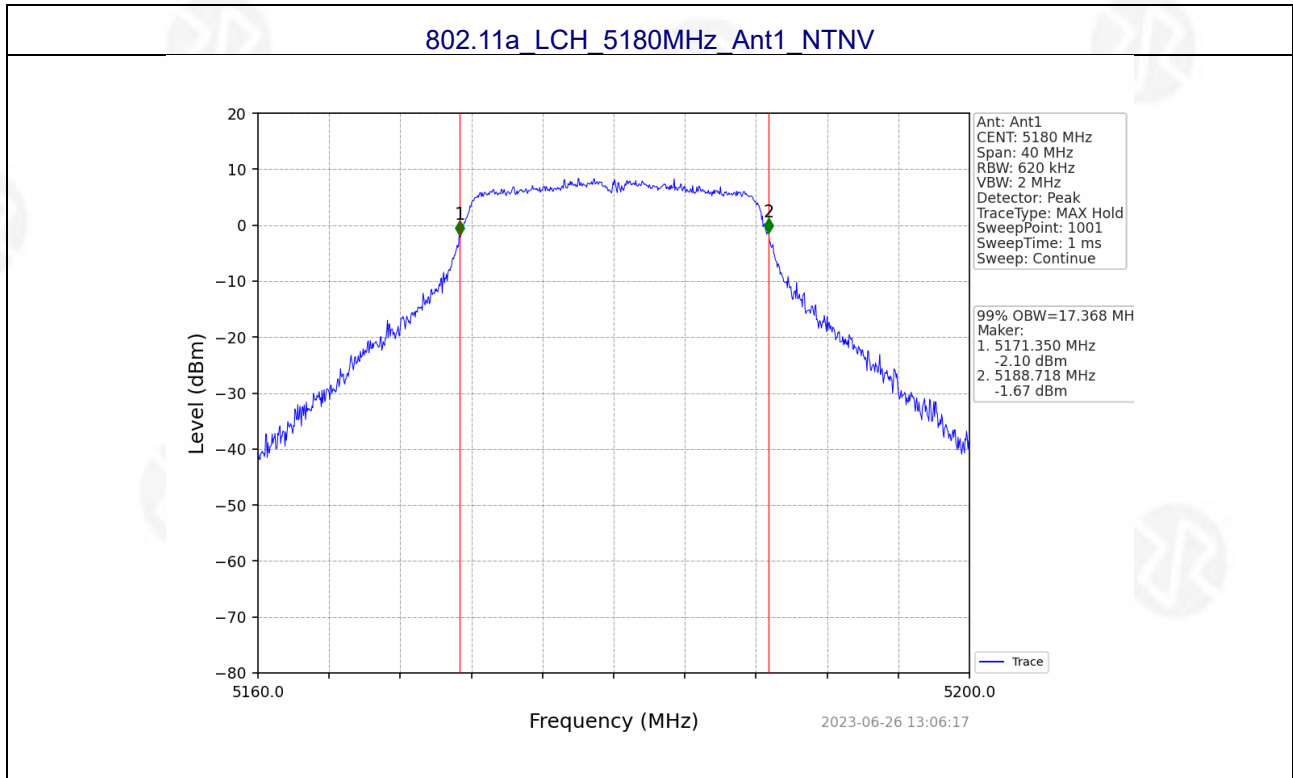




802.11a HCH 5240MHz Ant1 NTN

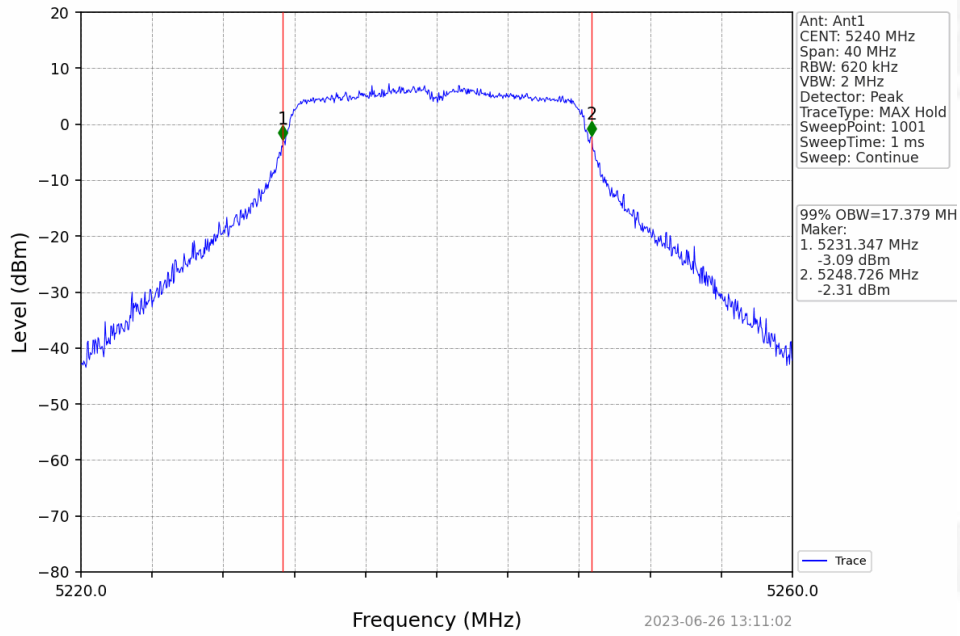


802.11a LCH 5745MHz Ant1 NTN

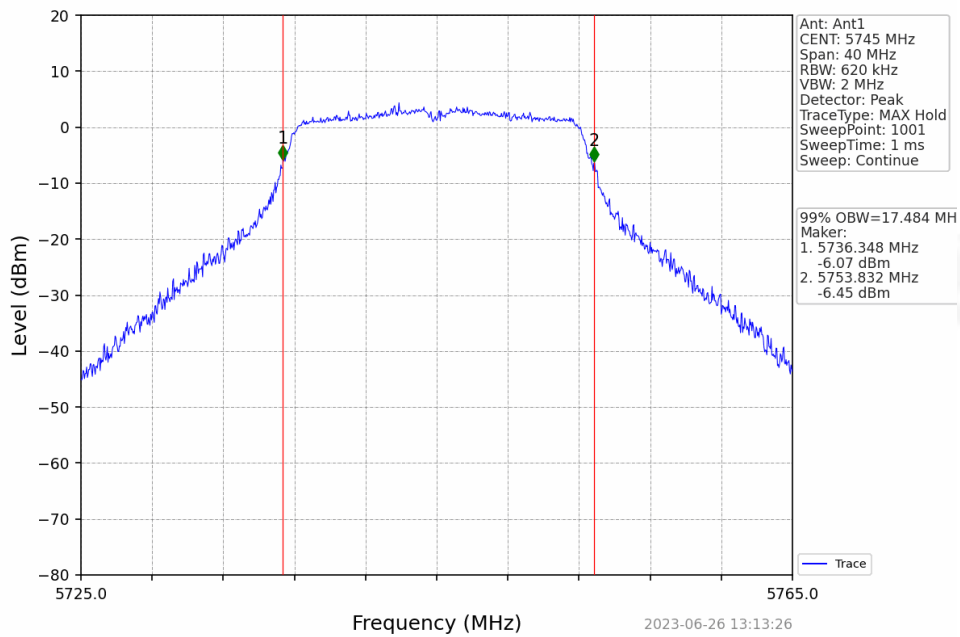




802.11a MCH 5785MHz Ant1 NTN

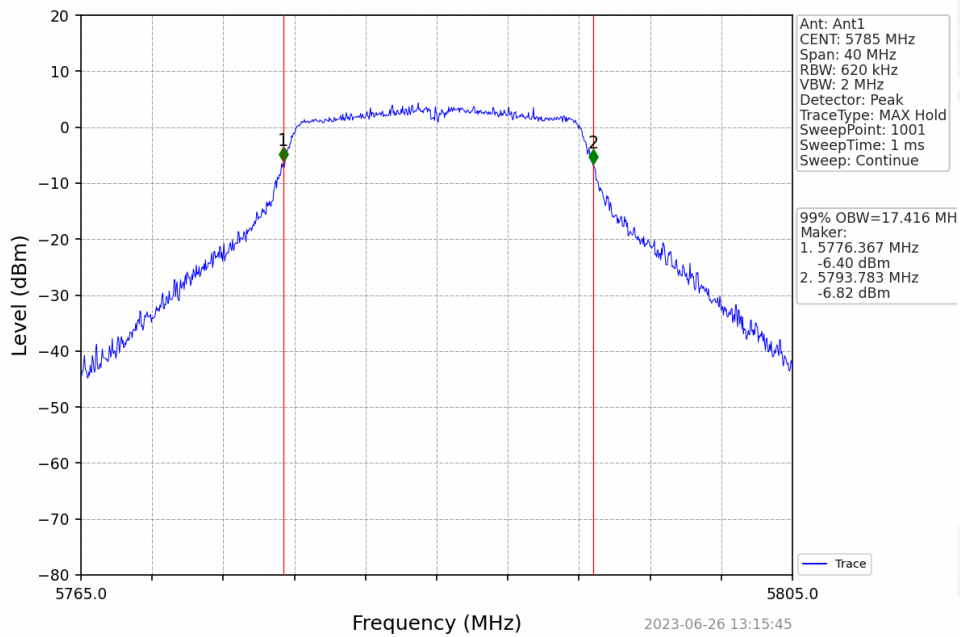


802.11a HCH 5825MHz Ant1 NTN

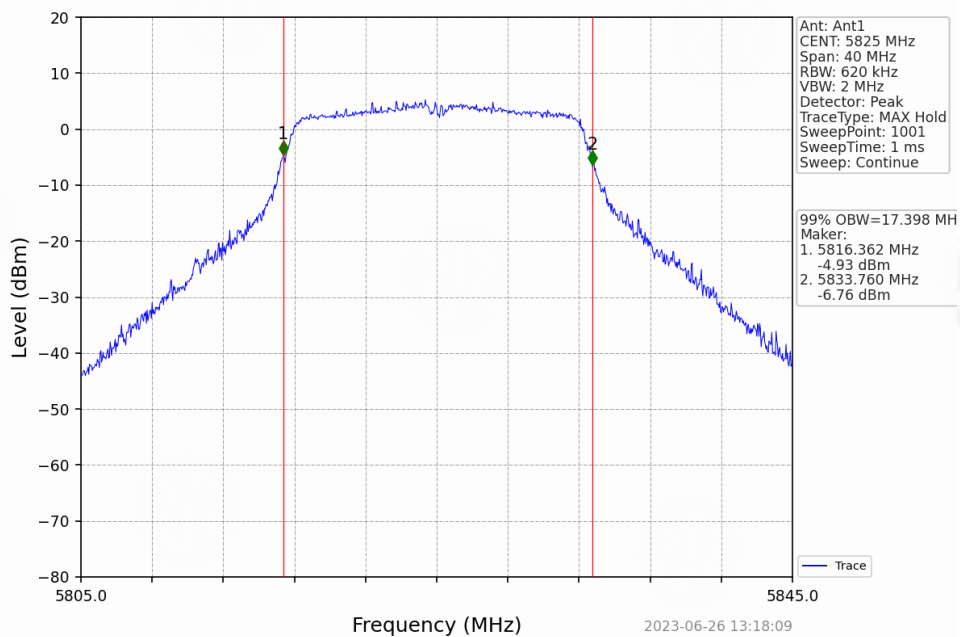




802.11n(HT20) LCH 5180MHz Ant1_NTNV

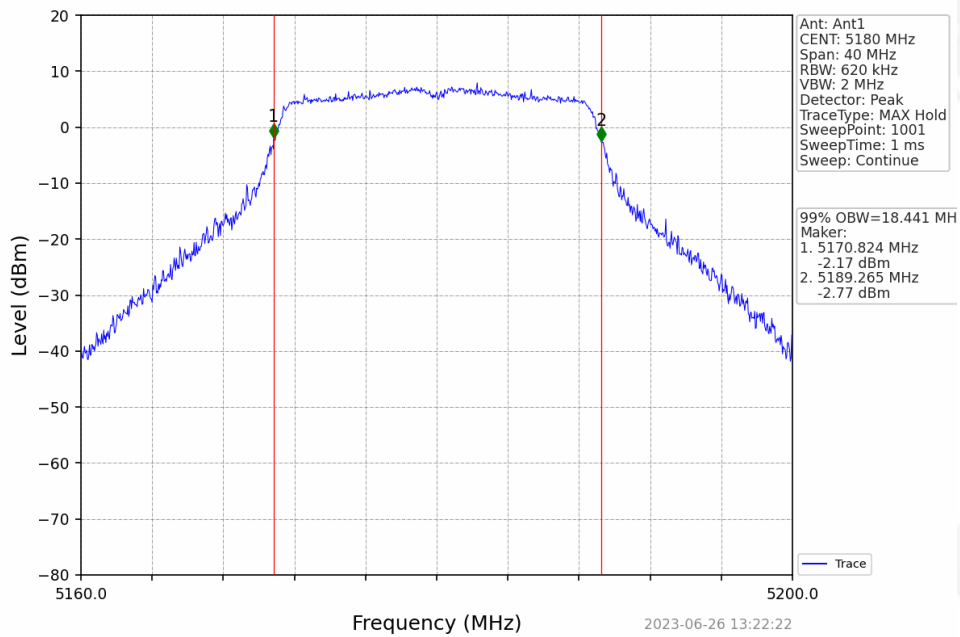


802.11n(HT20) MCH 5200MHz Ant1_NTNV

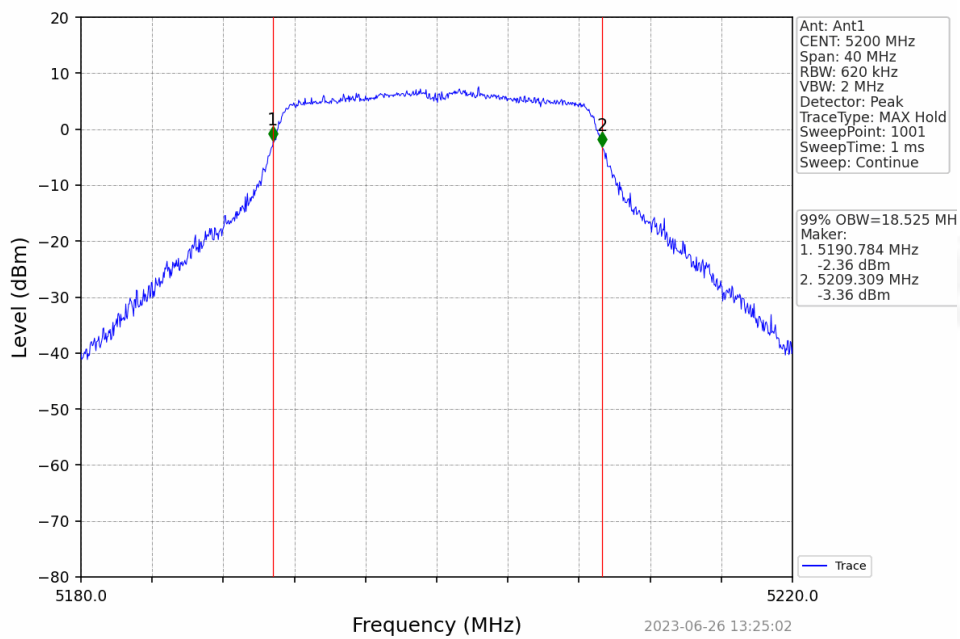




802.11n(HT20) HCH 5240MHz Ant1 NTV

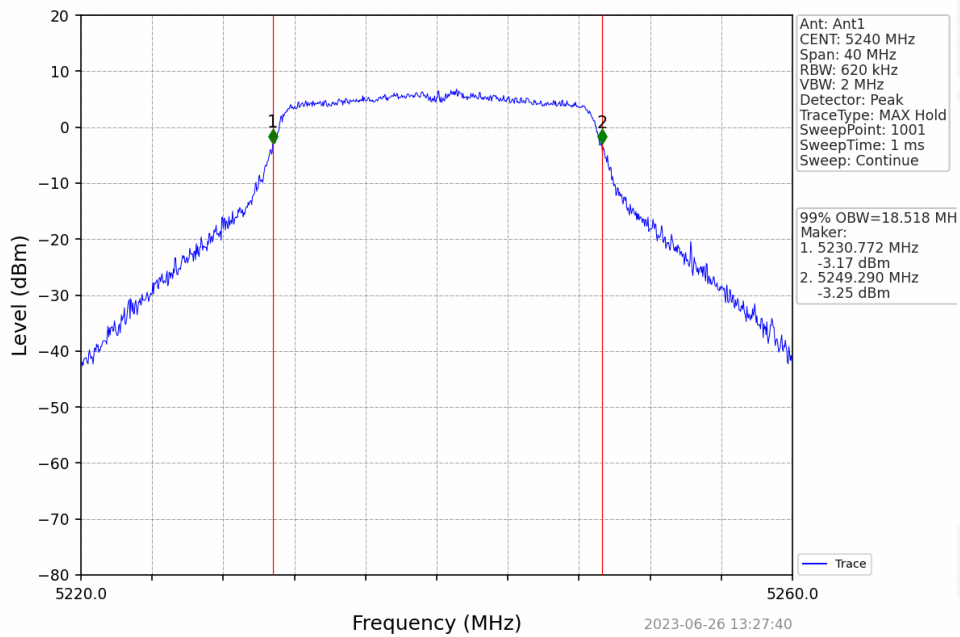


802.11n(HT20) LCH 5745MHz Ant1 NTV

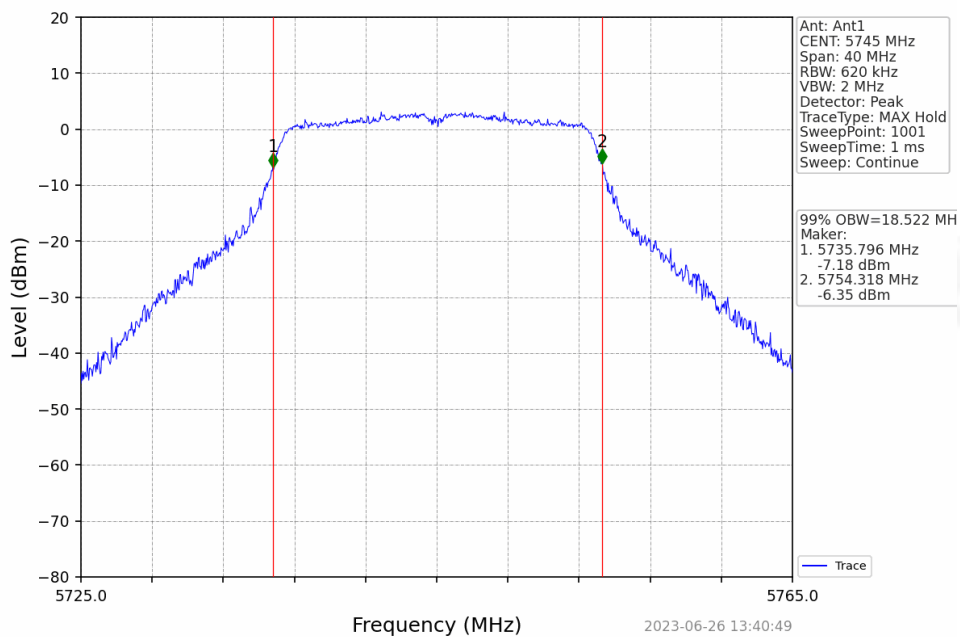




802.11n(HT20) MCH 5785MHz Ant1 NTV

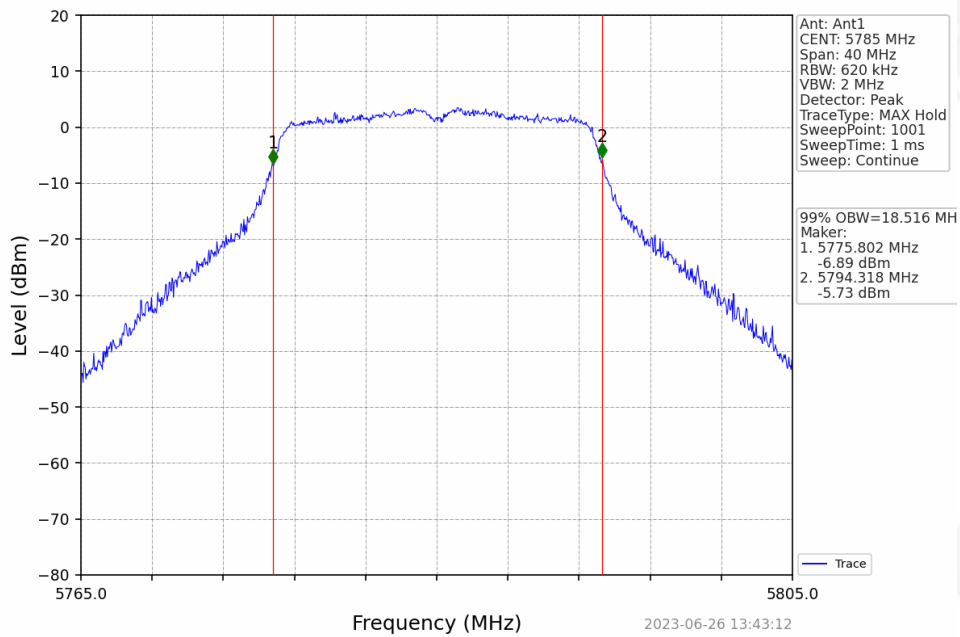


802.11n(HT20) HCH 5825MHz Ant1 NTV

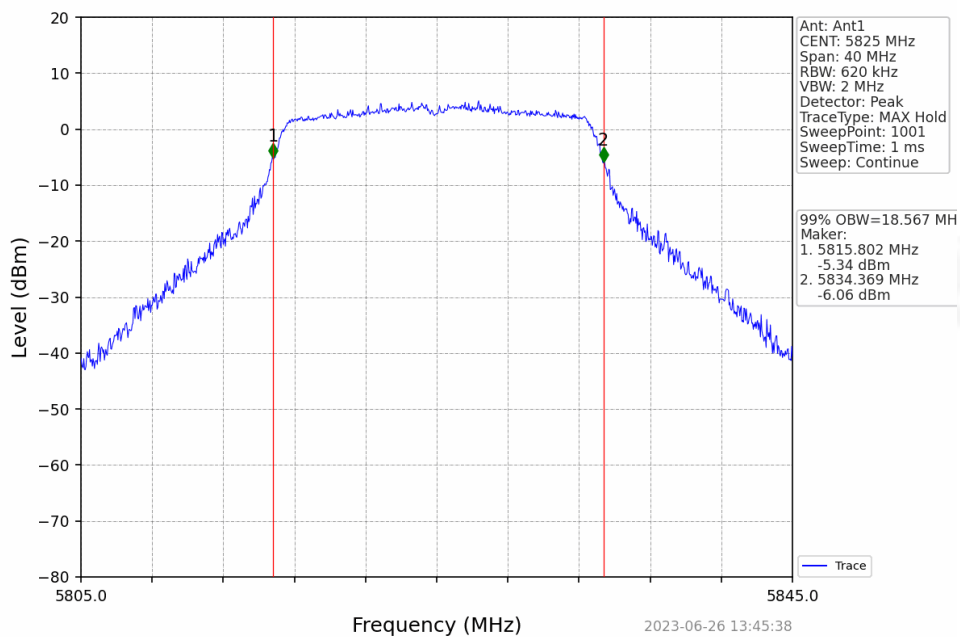




802.11n(HT40) LCH 5190MHz Ant1_NTNV

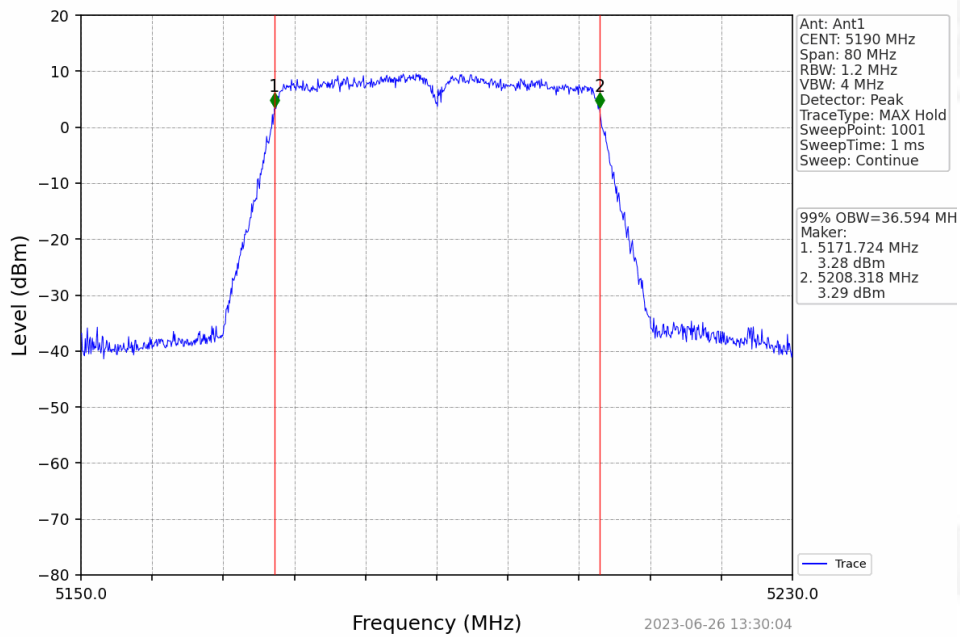


802.11n(HT40) HCH 5230MHz Ant1_NTNV

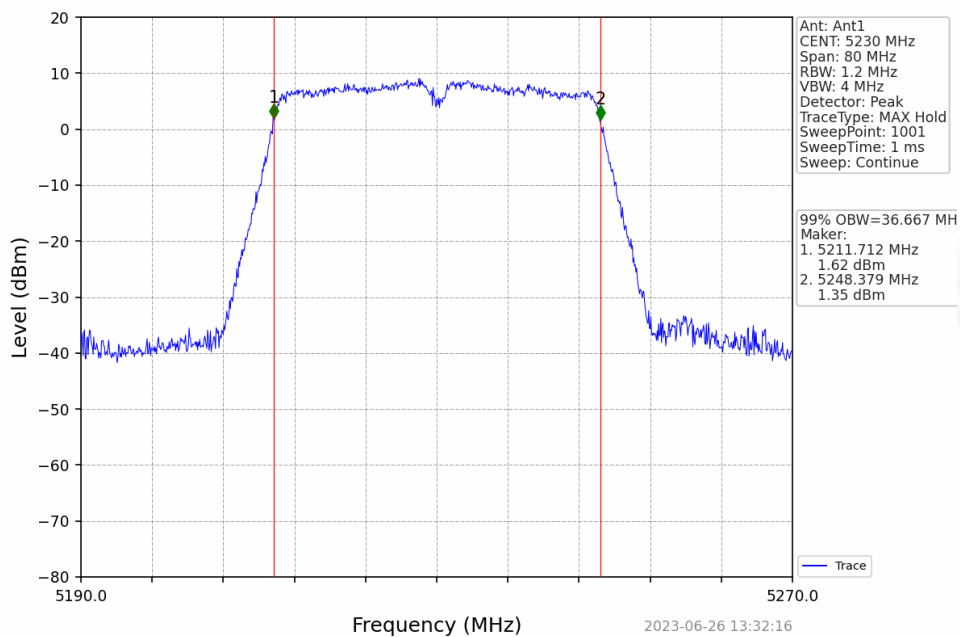




802.11n(HT40) LCH 5755MHz Ant1 NTV

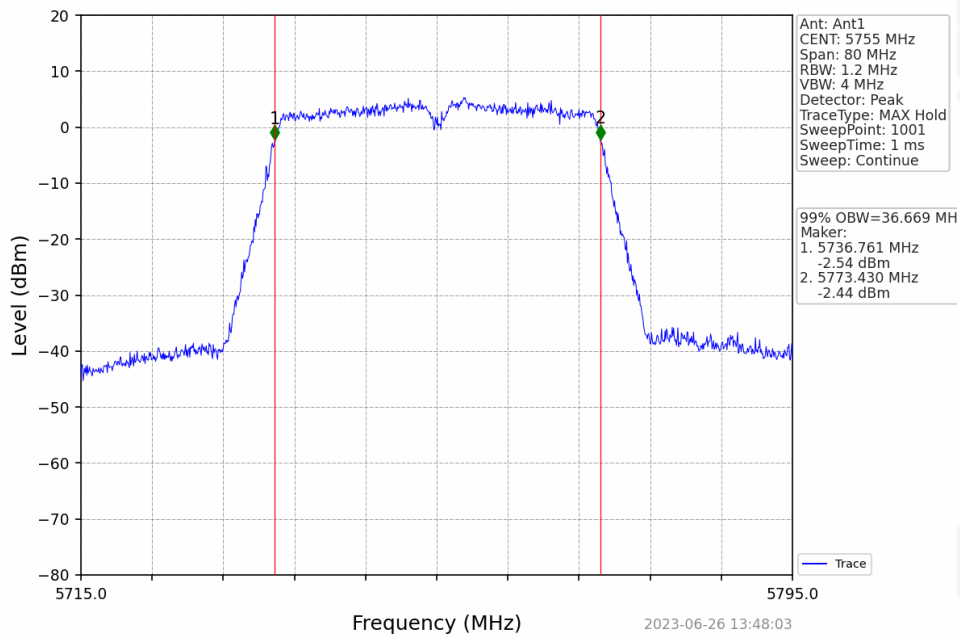


802.11n(HT40) HCH 5795MHz Ant1 NTV

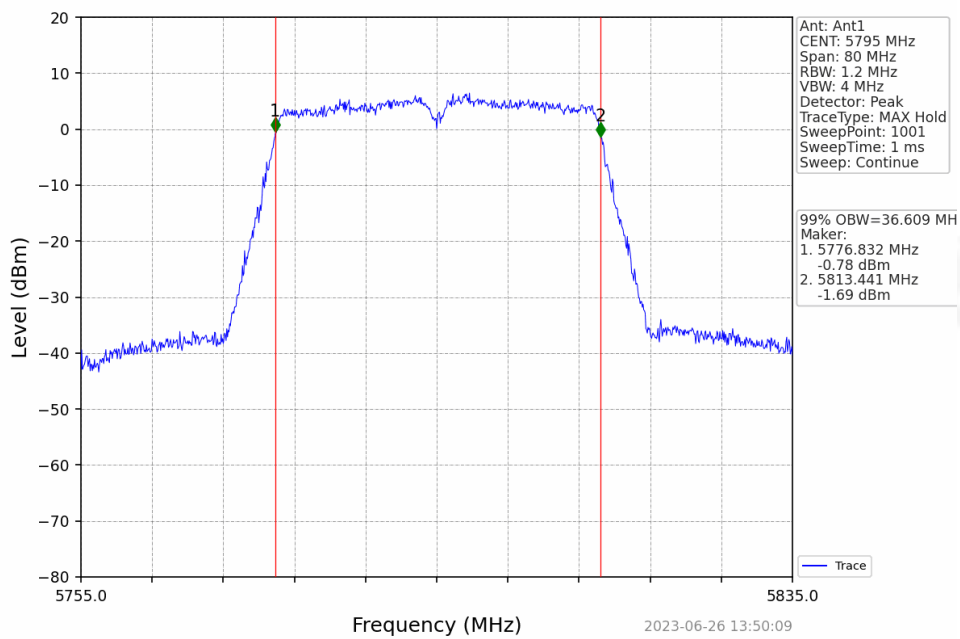




802.11ac(VHT20) LCH 5180MHz Ant1_NTNV

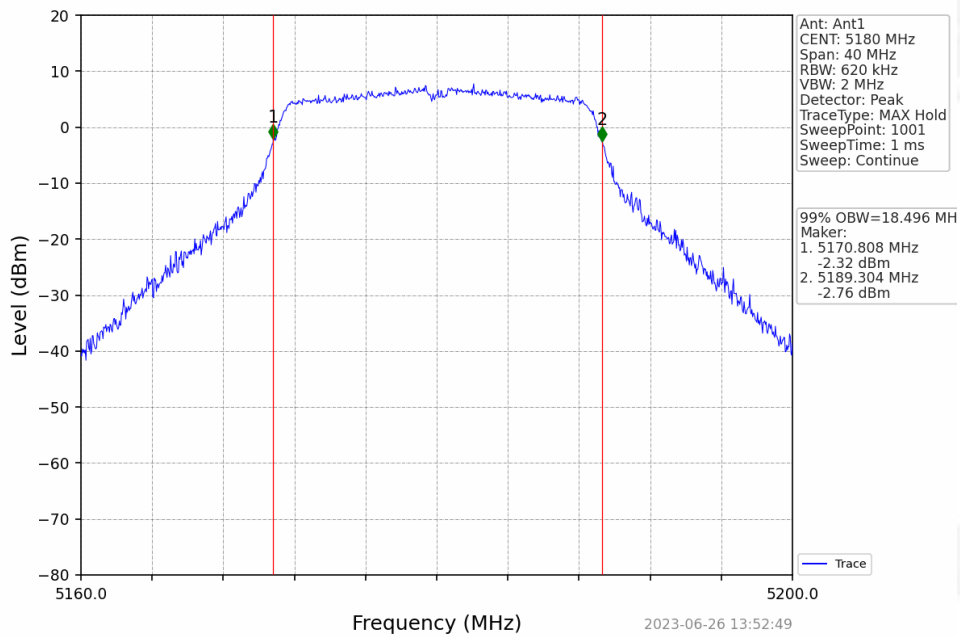


802.11ac(VHT20) MCH 5200MHz Ant1_NTNV

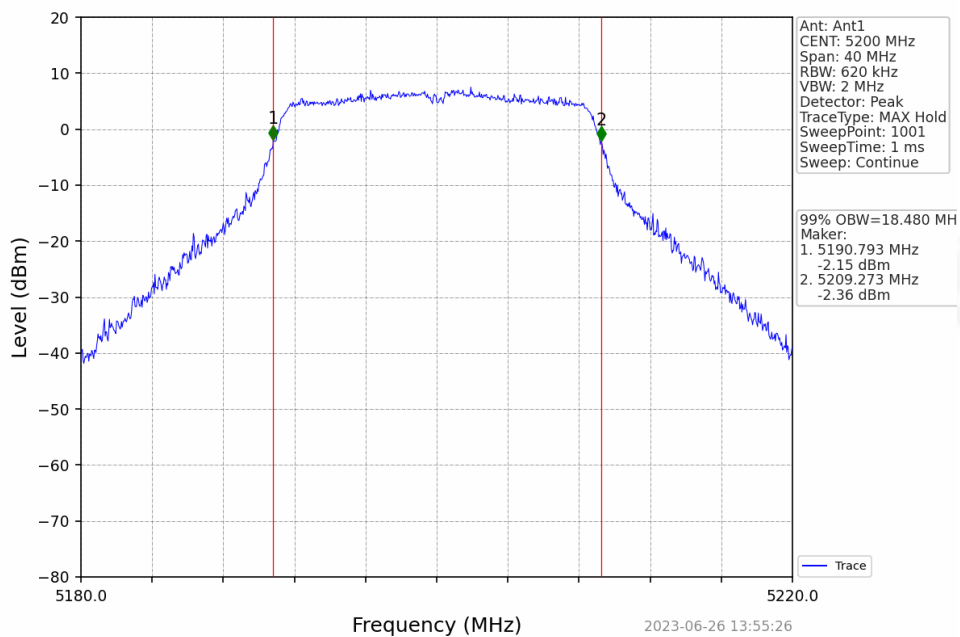




802.11ac(VHT20) HCH 5240MHz Ant1 NTN

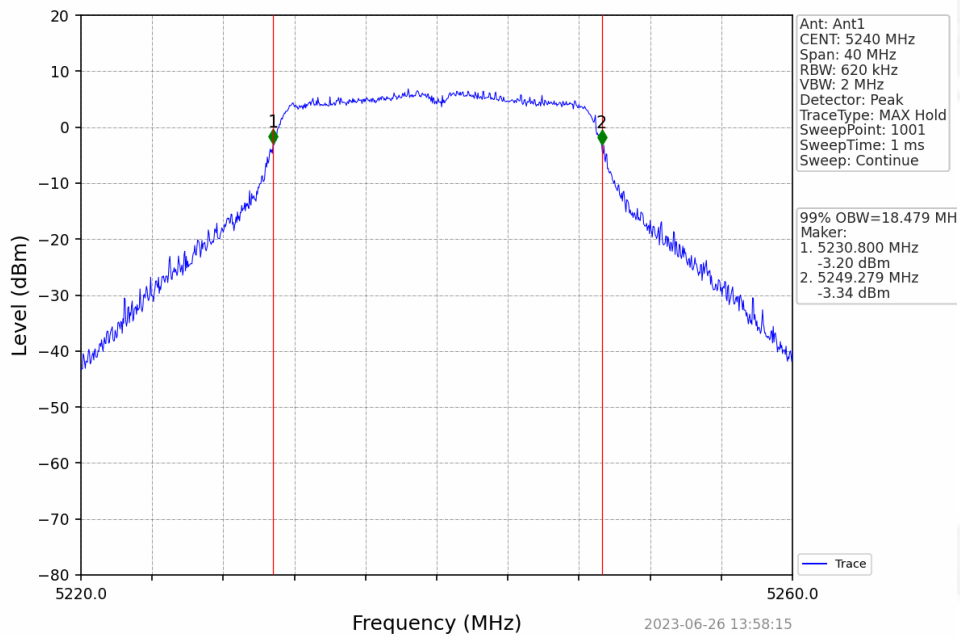


802.11ac(VHT20) LCH 5745MHz Ant1 NTN

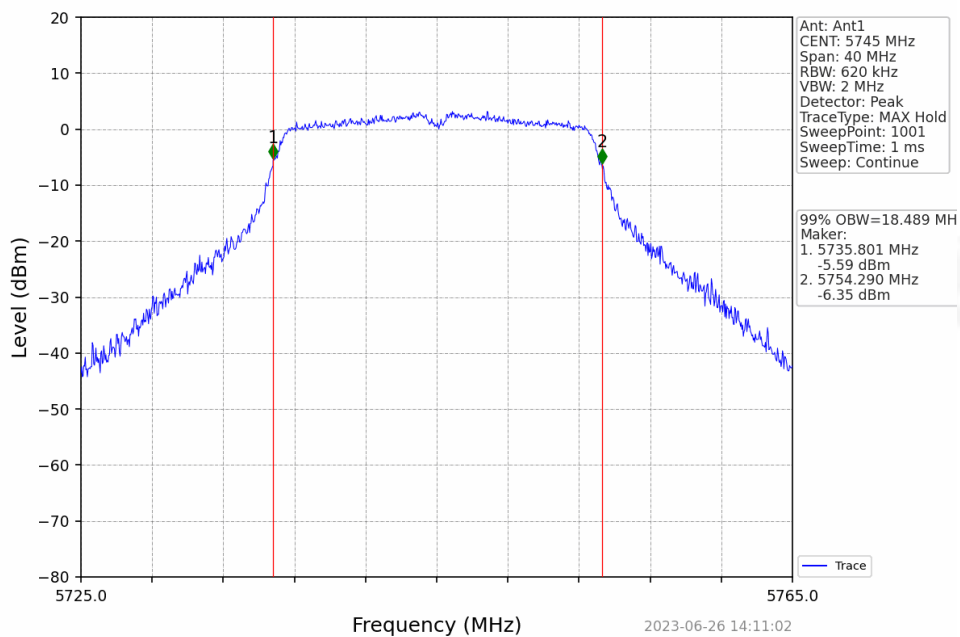




802.11ac(VHT20) MCH 5785MHz Ant1 NTN

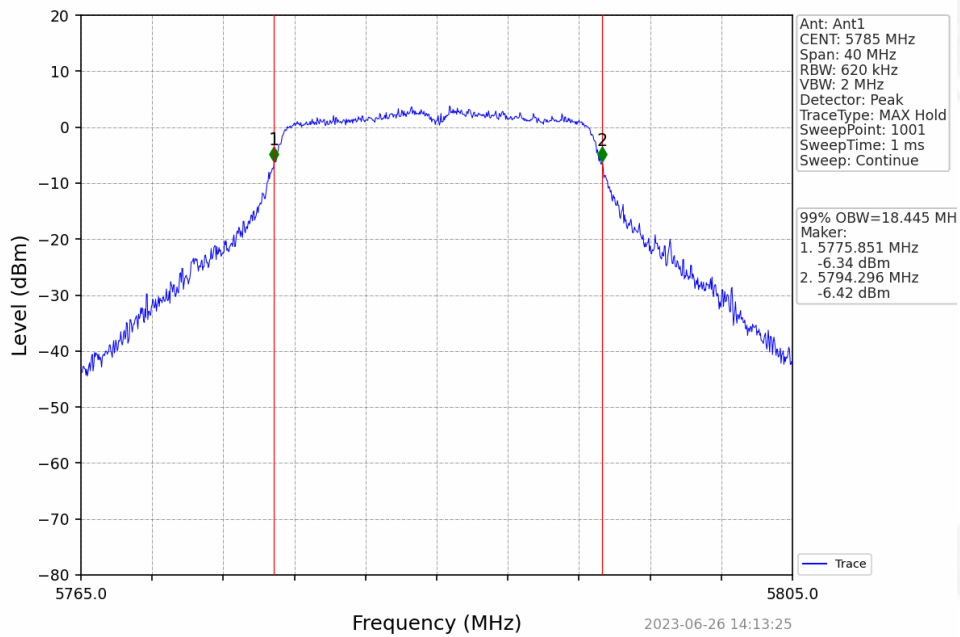


802.11ac(VHT20) HCH 5825MHz Ant1 NTN

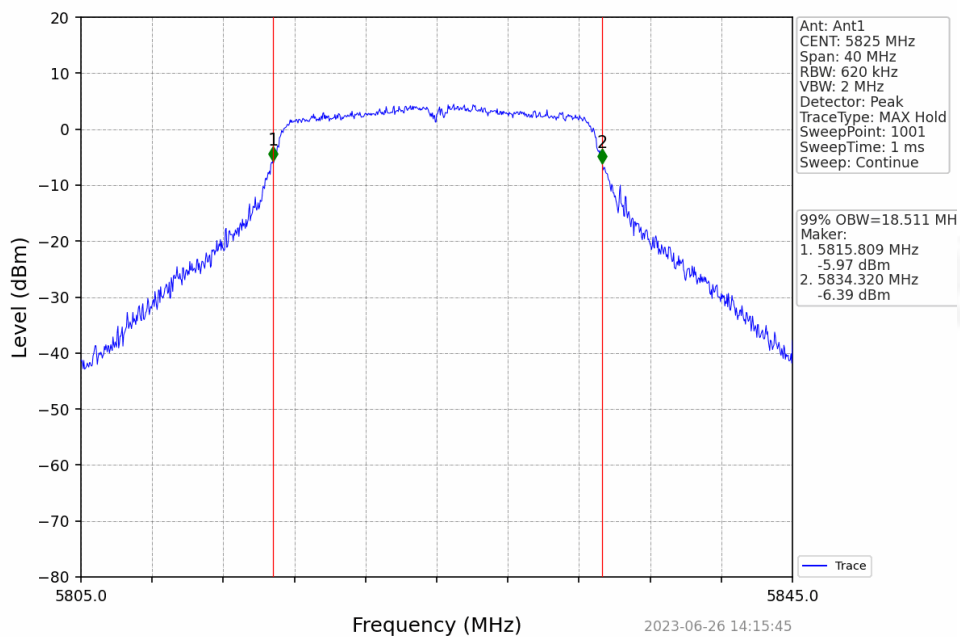




802.11ac(VHT40) LCH 5190MHz Ant1_NTNV

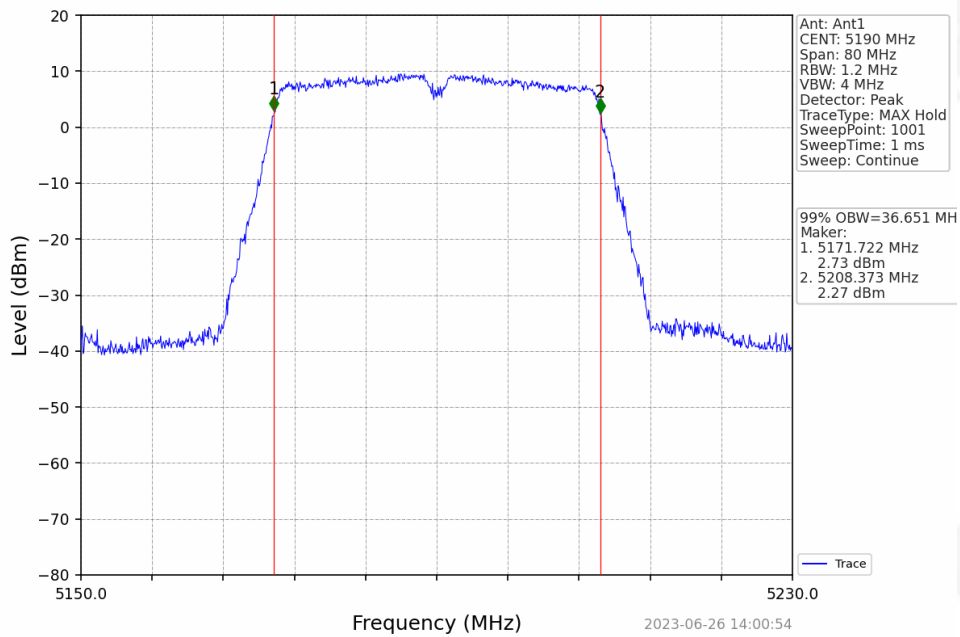


802.11ac(VHT40) HCH 5230MHz Ant1_NTNV

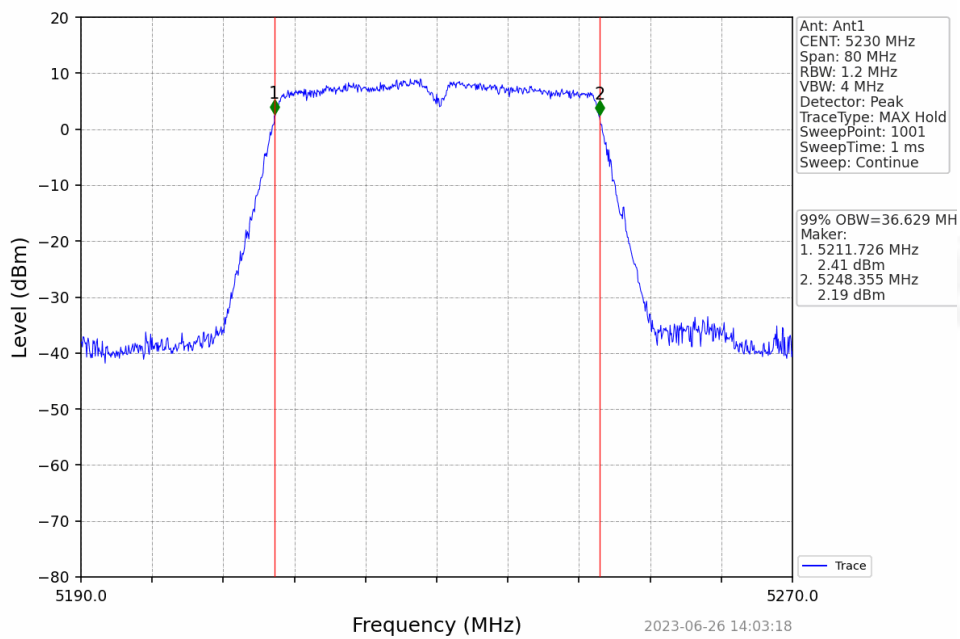




802.11ac(VHT40) LCH 5755MHz Ant1_NTNV

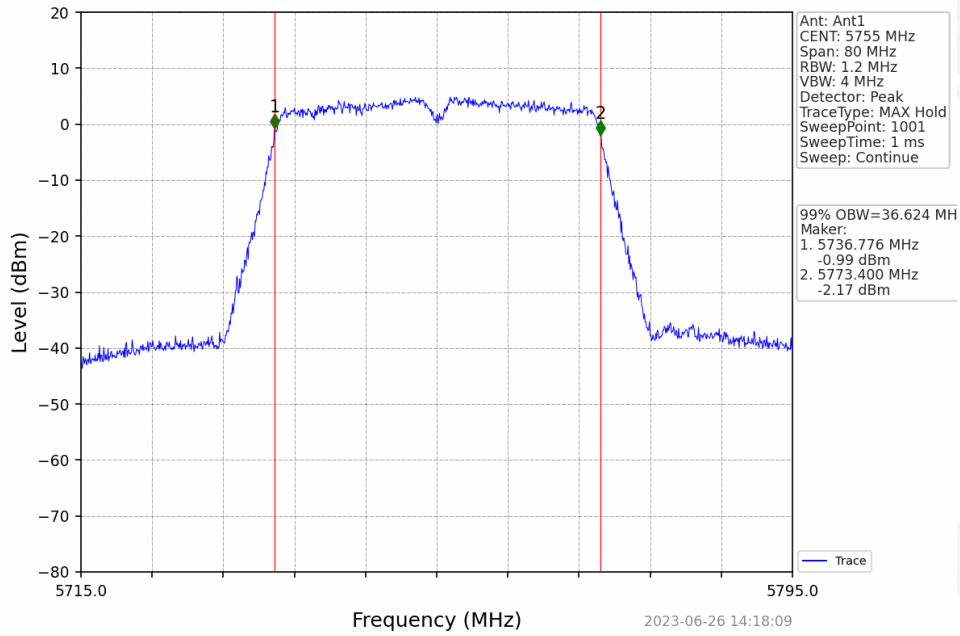


802.11ac(VHT40) HCH 5795MHz Ant1_NTNV

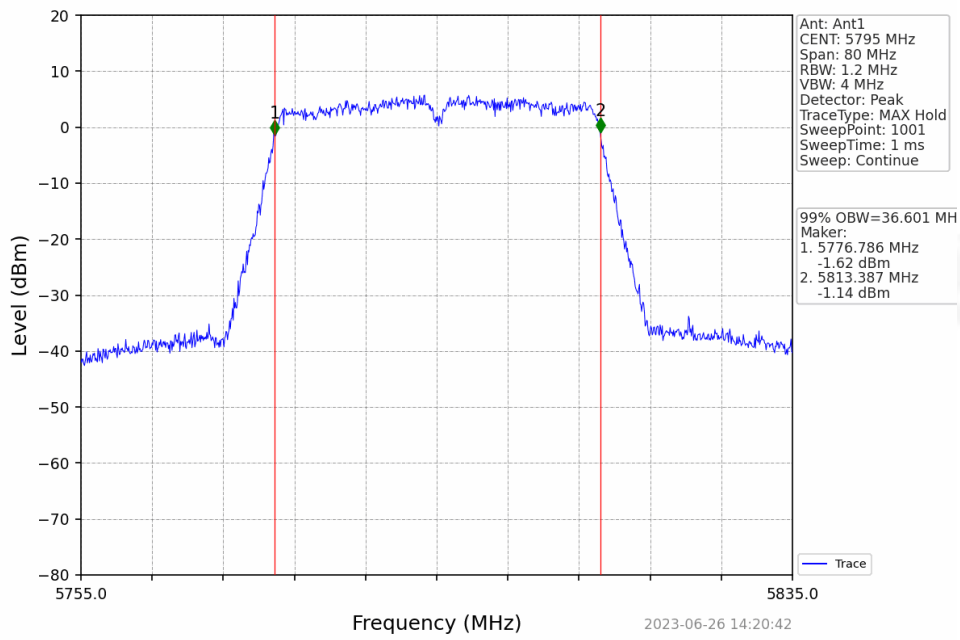




802.11ac(VHT80) MCH 5210MHz Ant1_NTNV


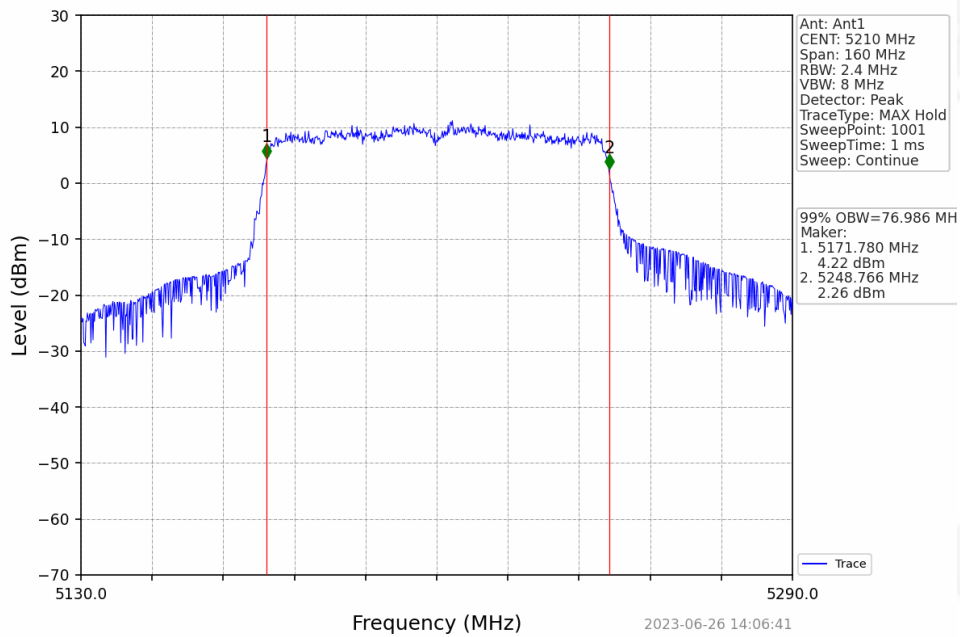


802.11ac(VHT80) MCH 5775MHz Ant1_NTNV

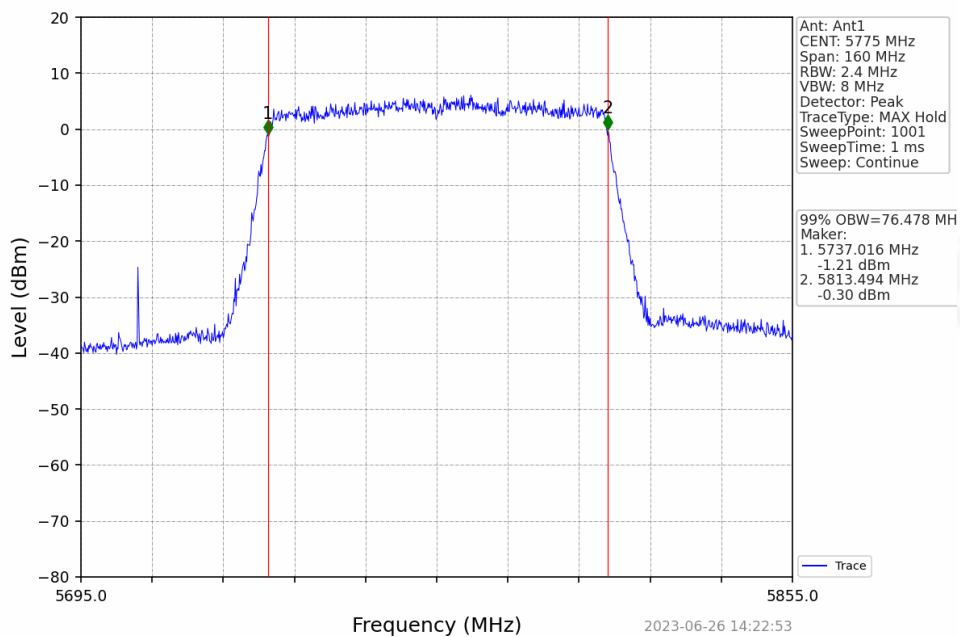




6dB Channel Bandwidth (MHz)

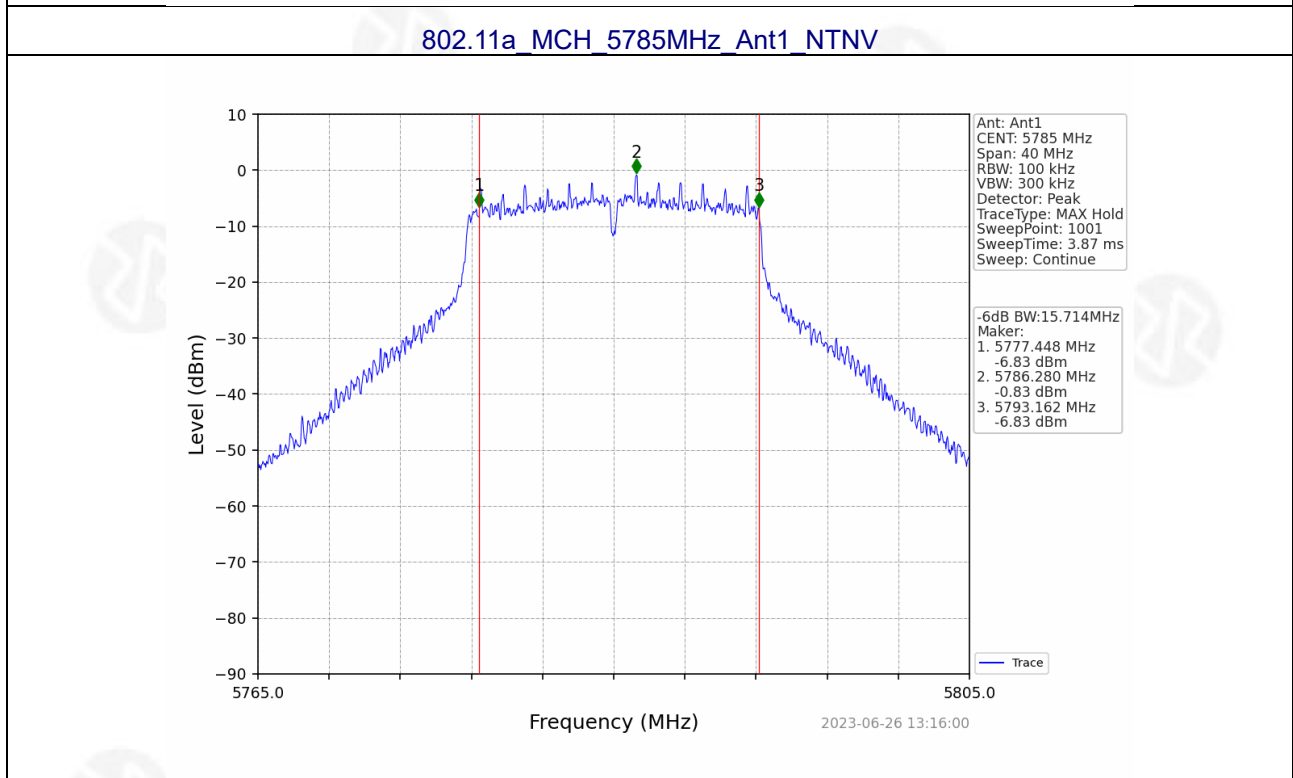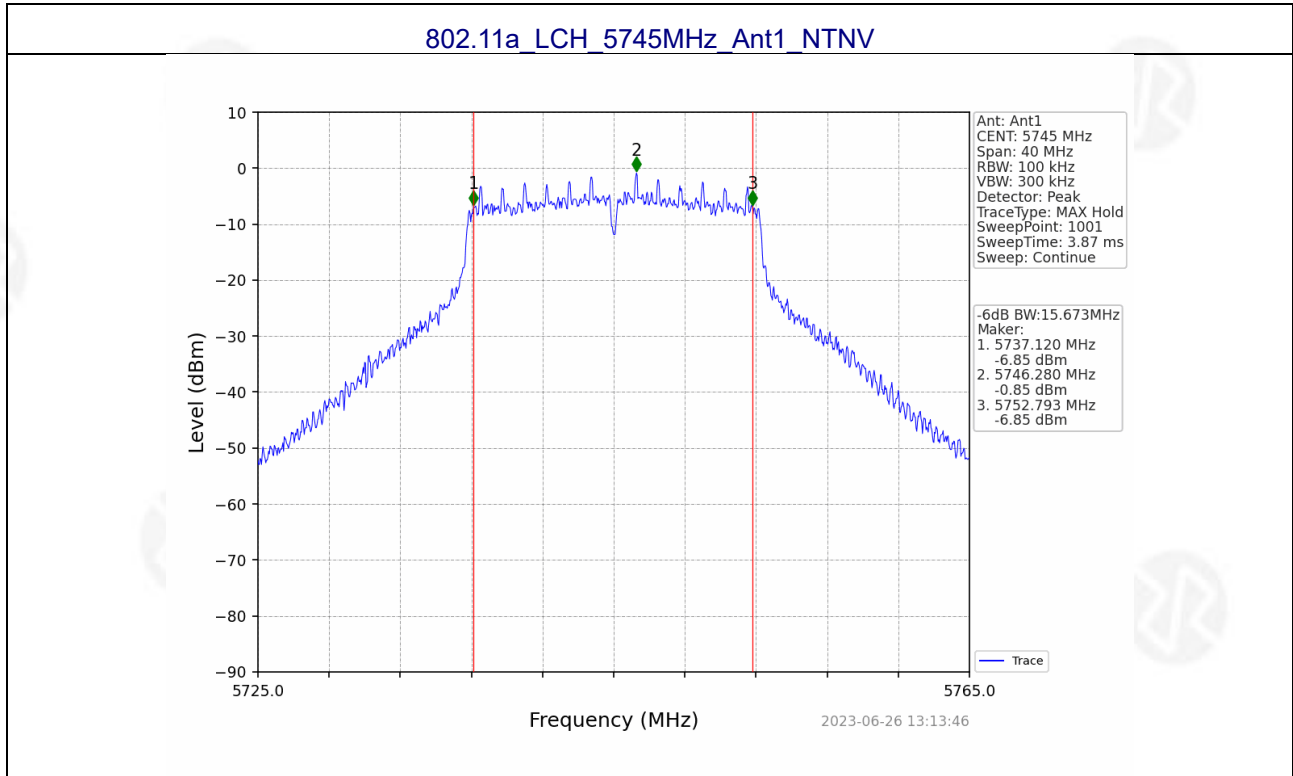




802.11a HCH 5825MHz Ant1 NTN

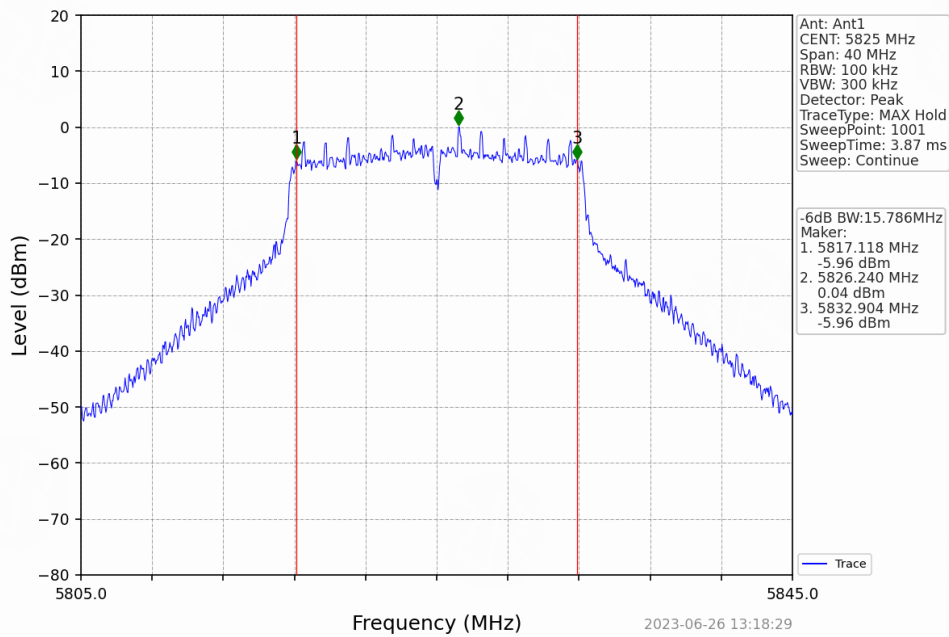


802.11n(HT20) LCH 5745MHz Ant1 NTN

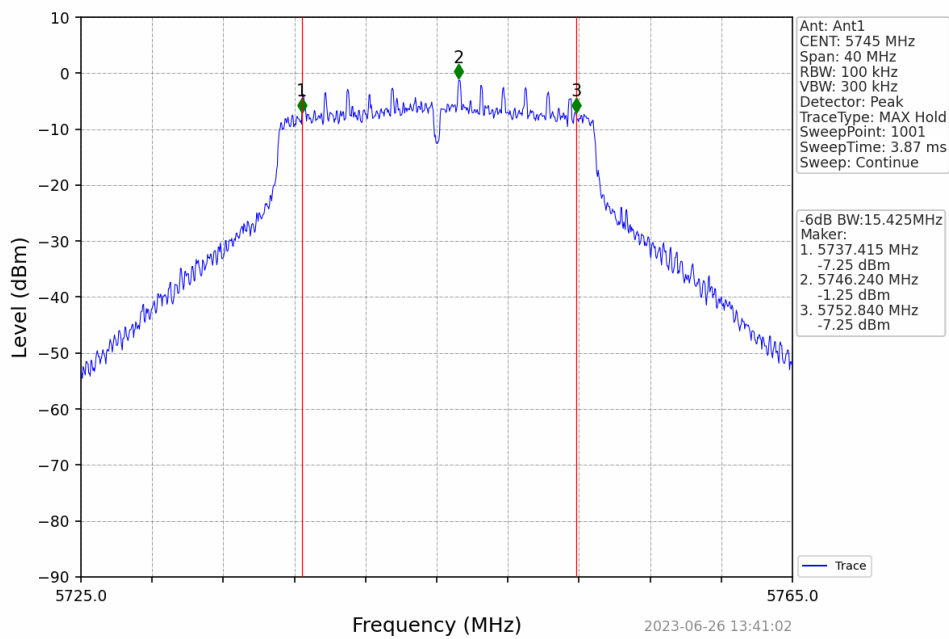




802.11n(HT20) MCH 5785MHz Ant1 NTV

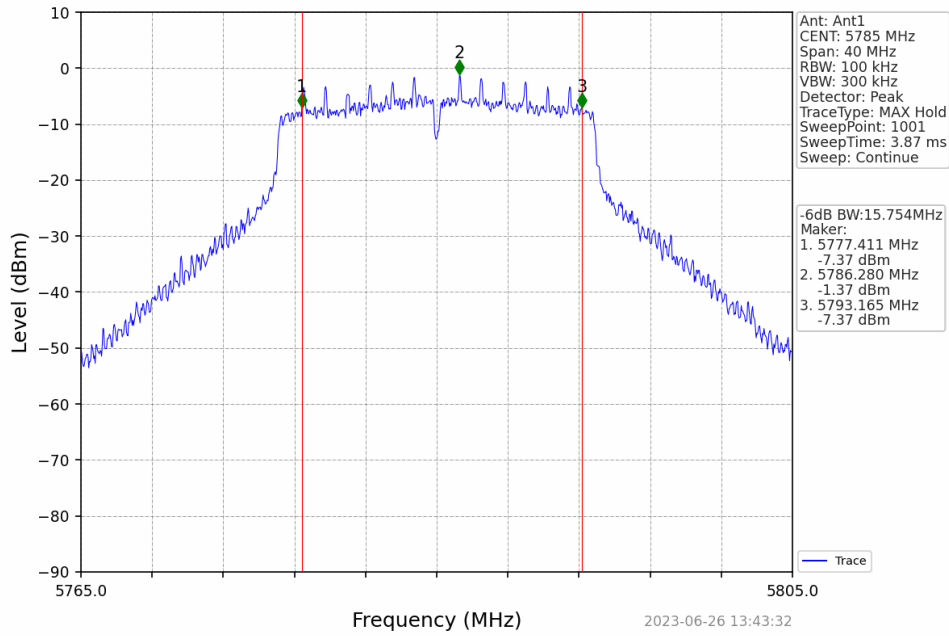


802.11n(HT20) HCH 5825MHz Ant1 NTV

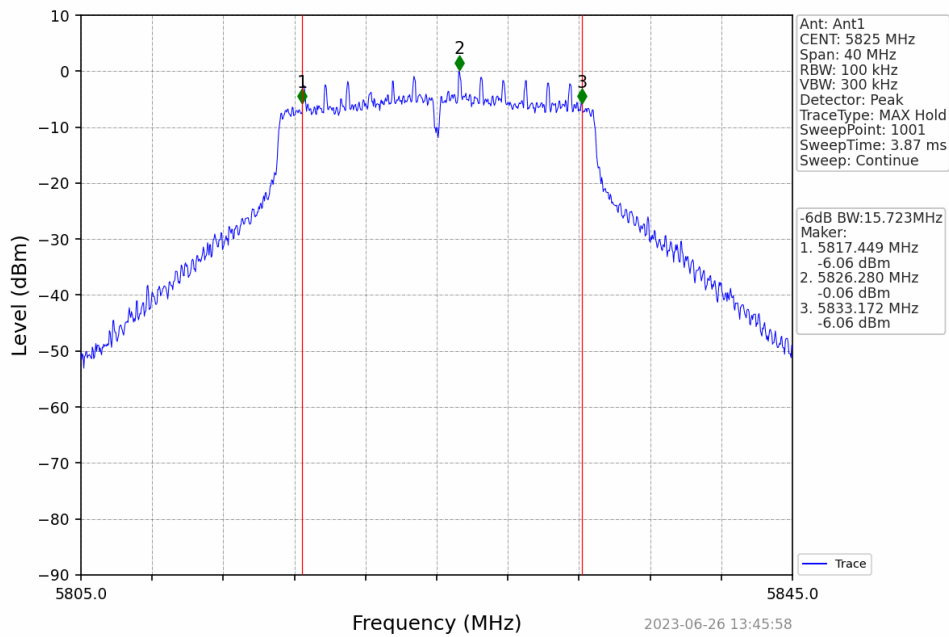




802.11n(HT40) LCH 5755MHz Ant1_NTNV

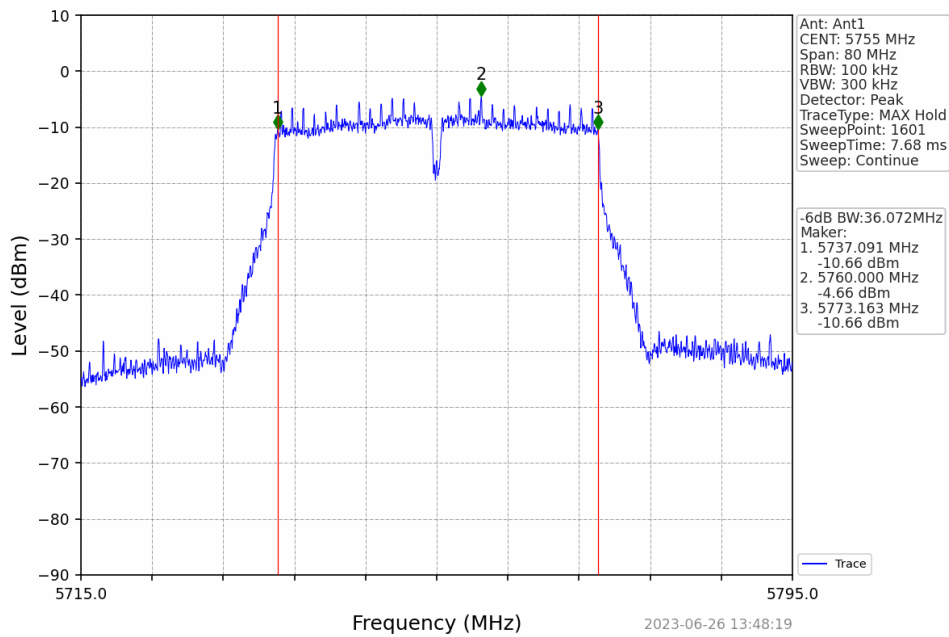


802.11n(HT40) HCH 5795MHz Ant1_NTNV

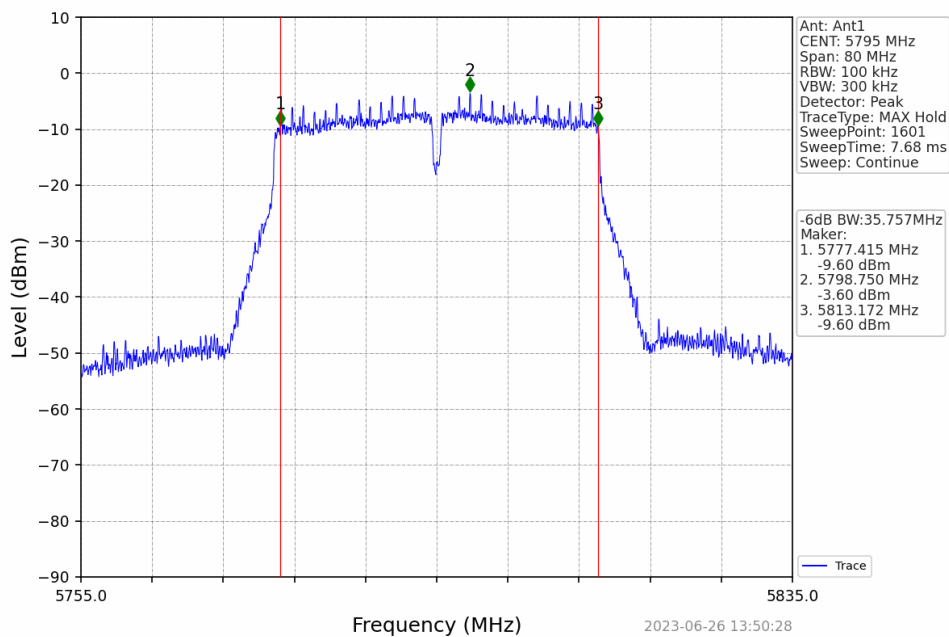




802.11ac(VHT20) LCH 5745MHz Ant1_NTNV

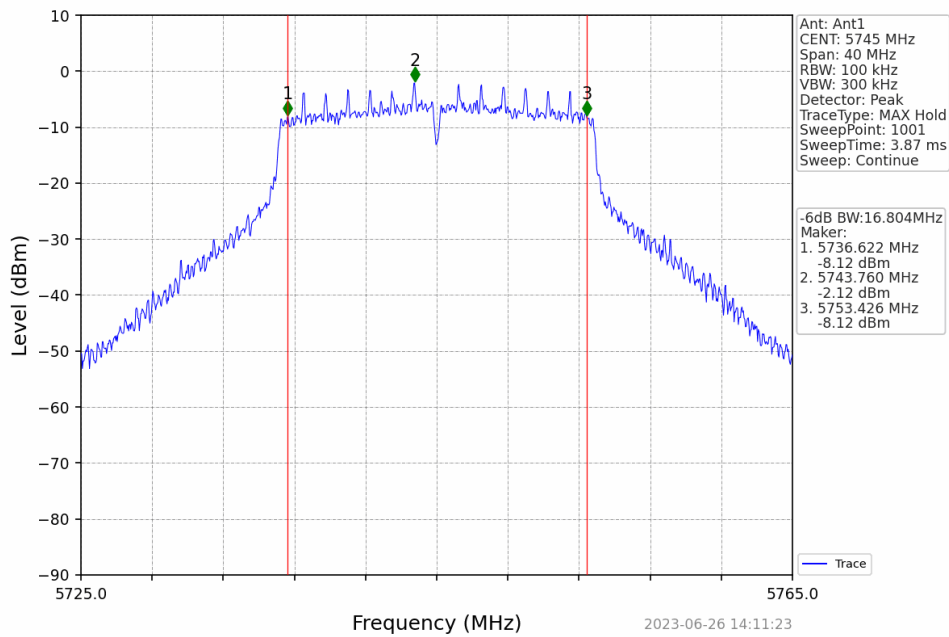


802.11ac(VHT20) MCH 5785MHz Ant1_NTNV

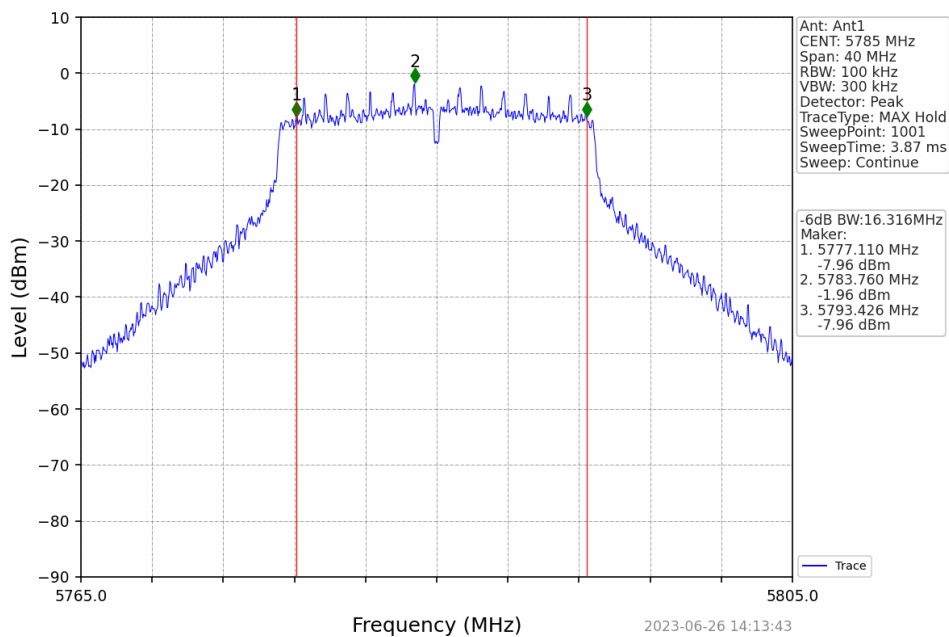




802.11ac(VHT20) HCH 5825MHz Ant1 NTN

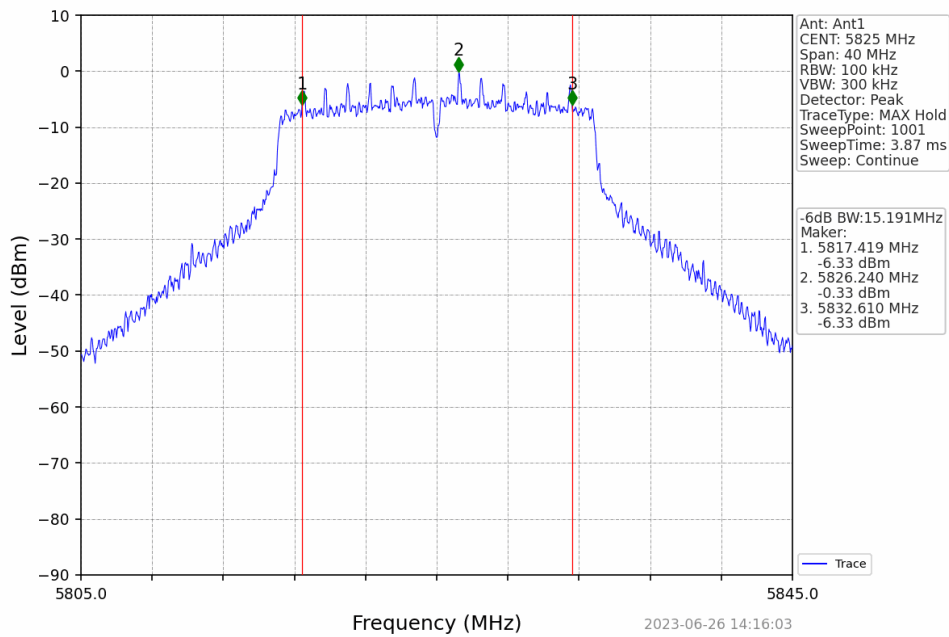


802.11ac(VHT40) LCH 5755MHz Ant1 NTN

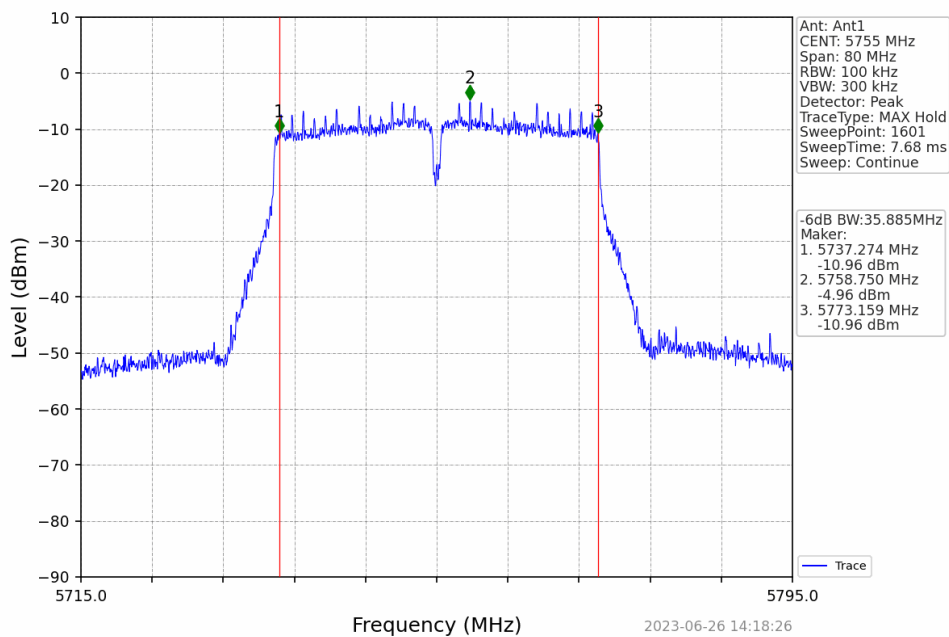




802.11ac(VHT40) HCH 5795MHz Ant1_NTNV


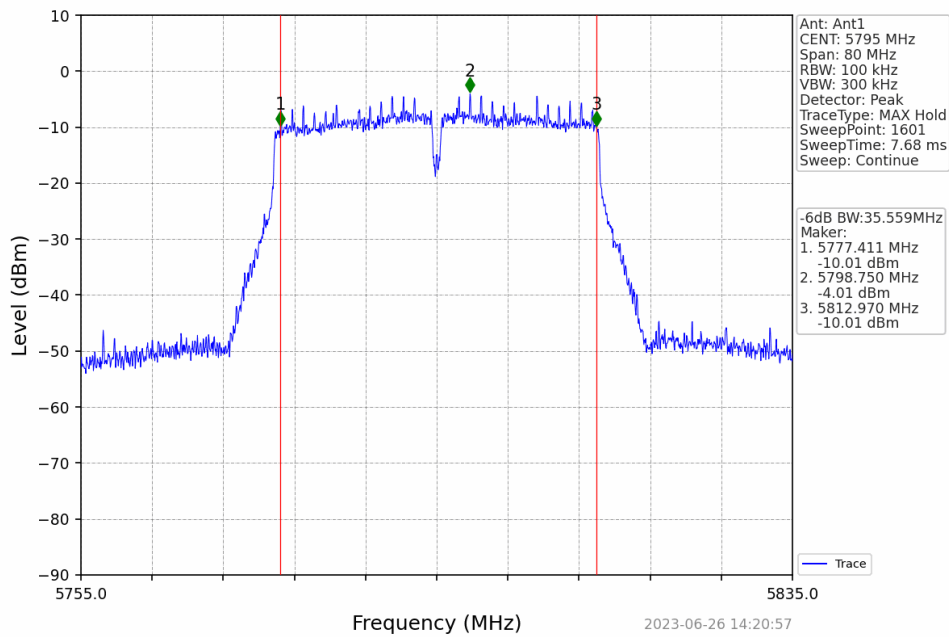


802.11ac(VHT80) MCH 5775MHz Ant1_NTNV

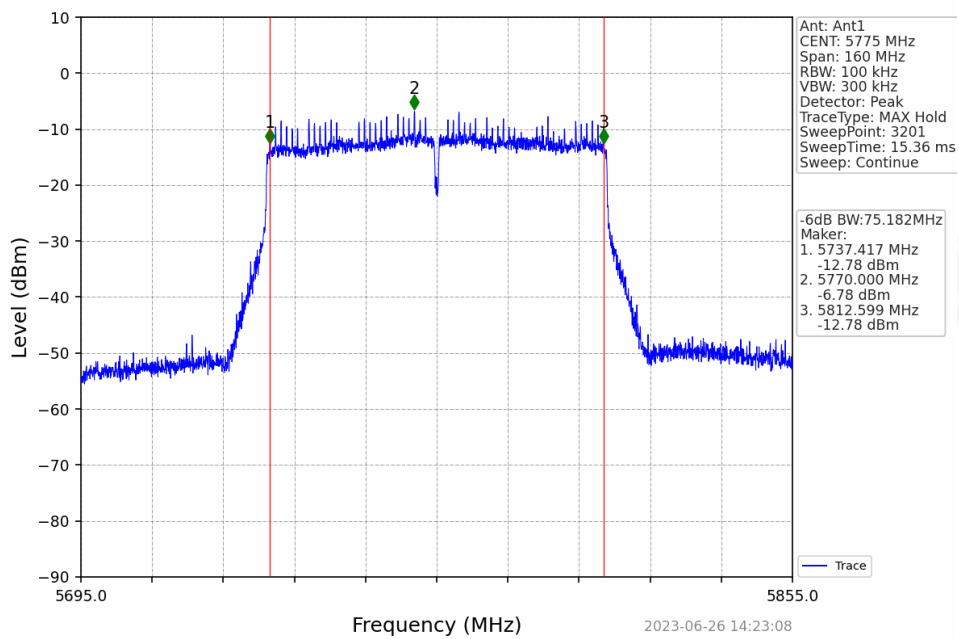




26dB Channel Bandwidth (MHz)

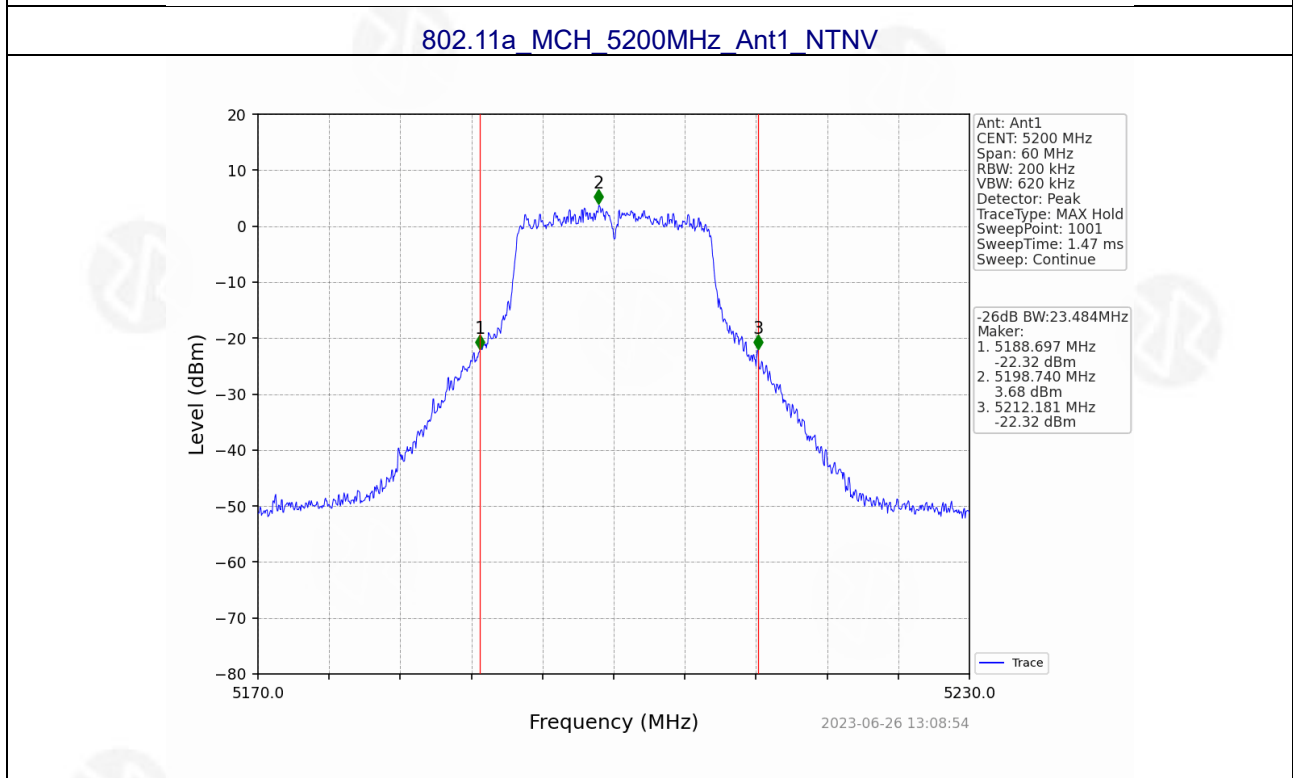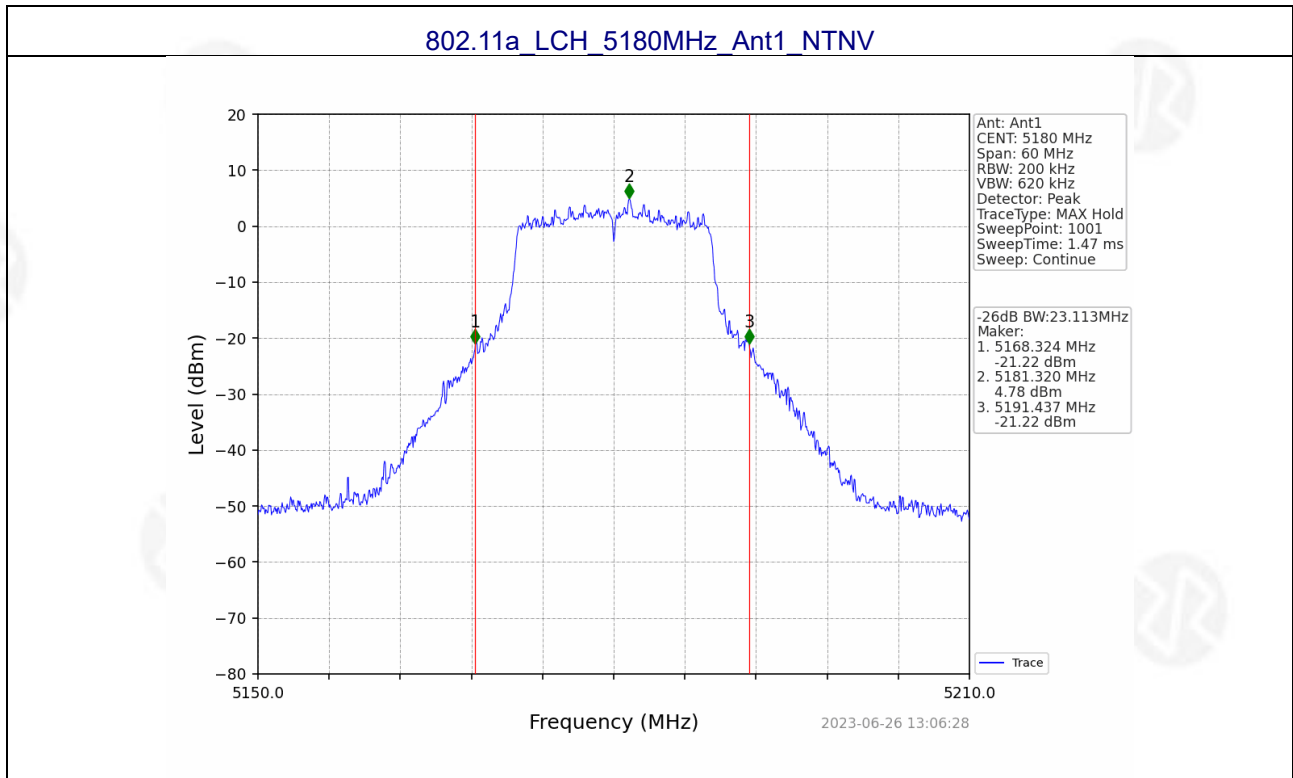




802.11a HCH 5240MHz Ant1 NTN

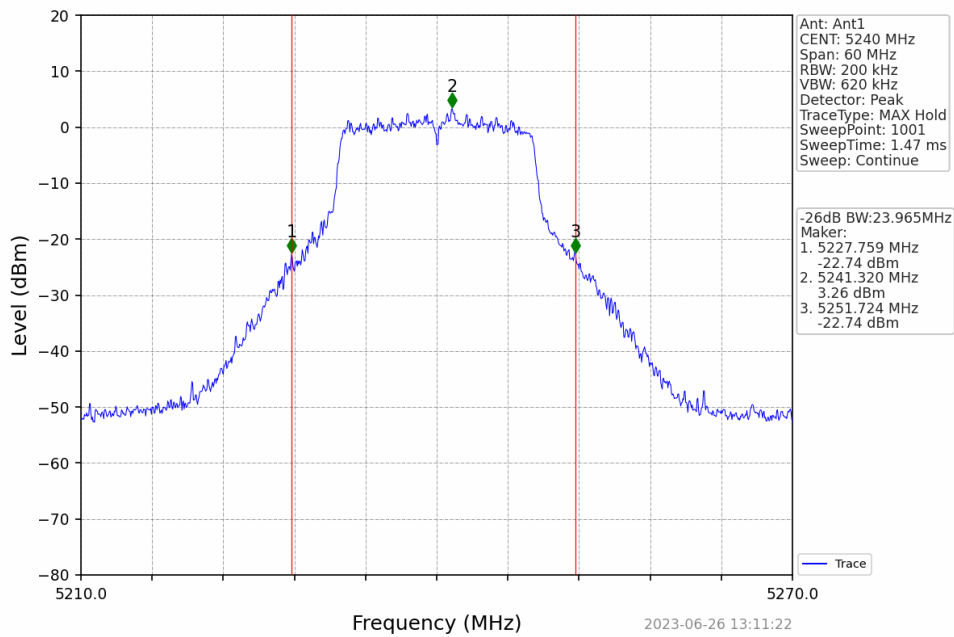


802.11n(HT20) LCH 5180MHz Ant1 NTN

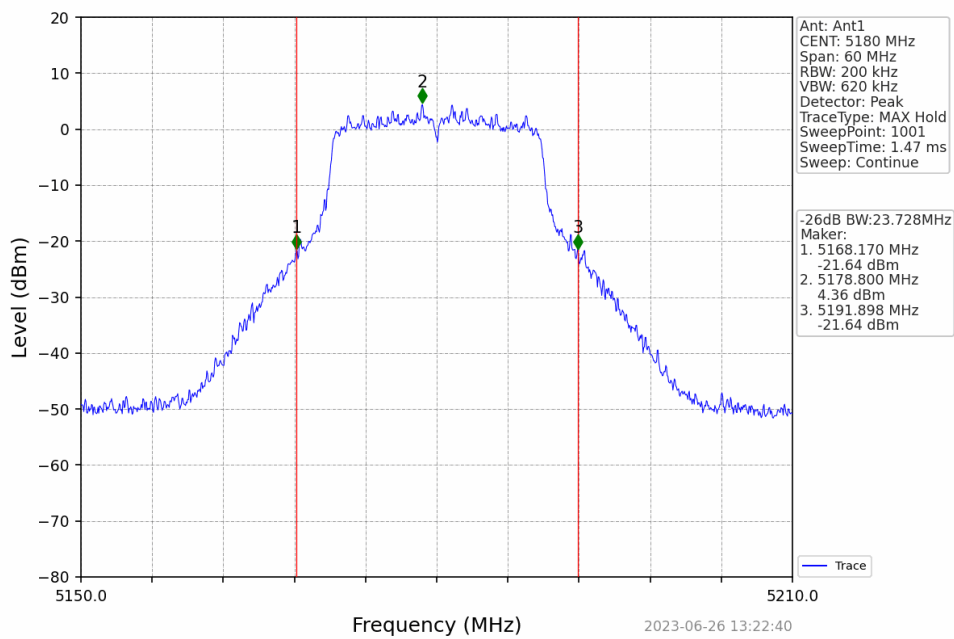




802.11n(HT20) MCH 5200MHz Ant1 NTV

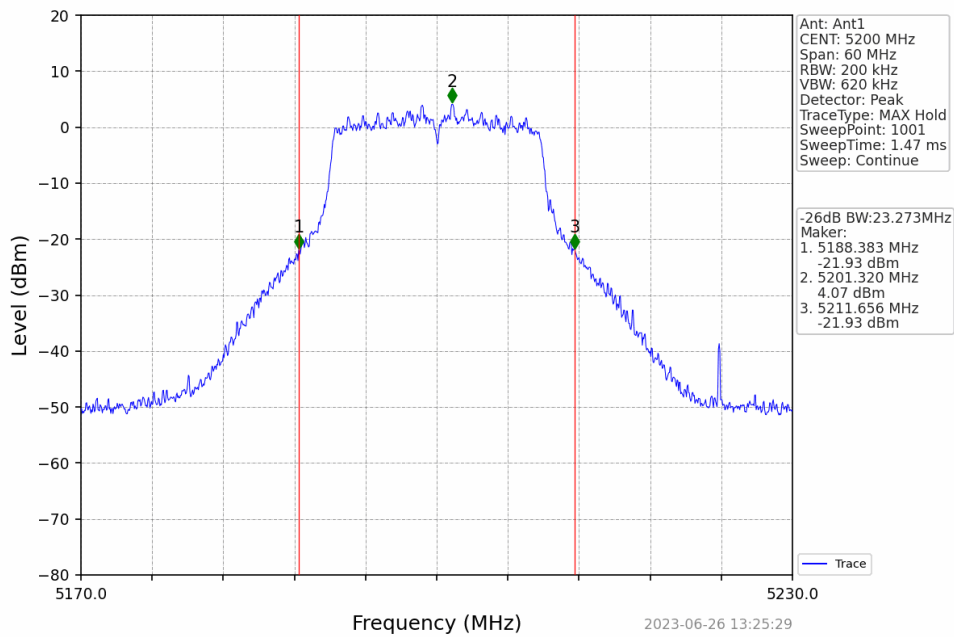


802.11n(HT20) HCH 5240MHz Ant1 NTV

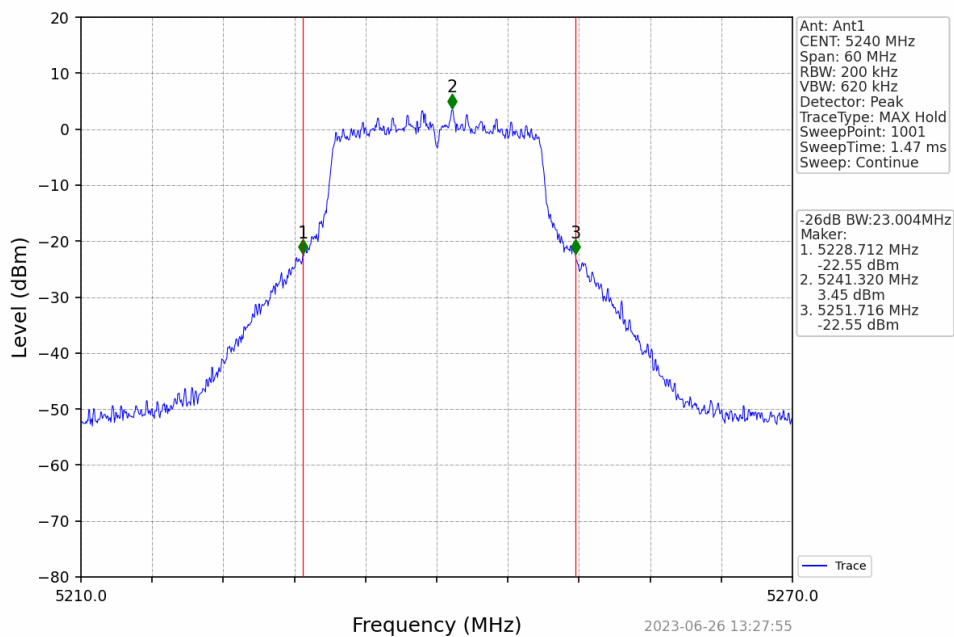




802.11n(HT40) LCH 5190MHz Ant1 NTV

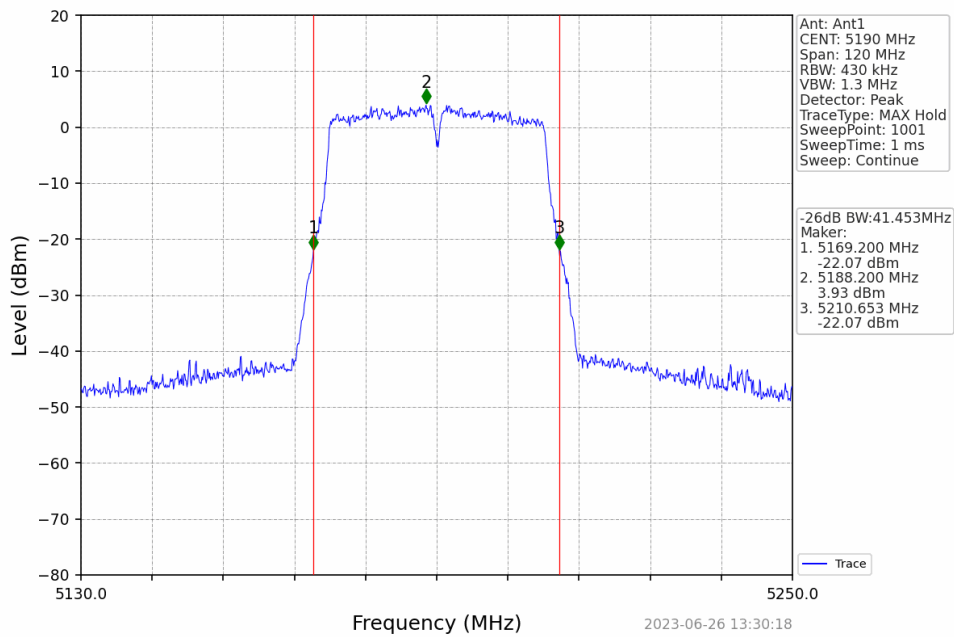


802.11n(HT40) HCH 5230MHz Ant1 NTV

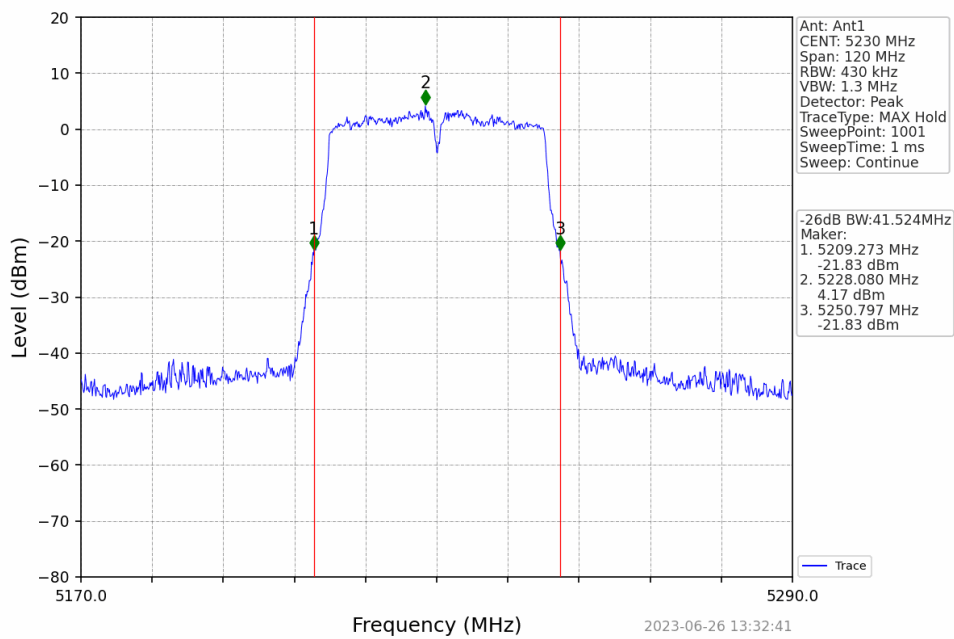




802.11ac(VHT20) LCH 5180MHz Ant1 NTN

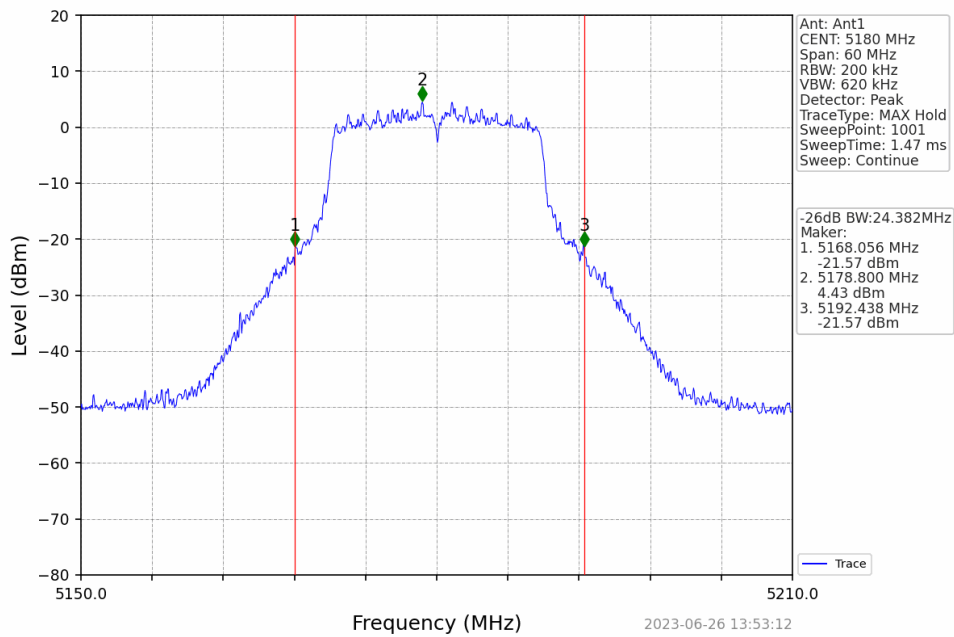


802.11ac(VHT20) MCH 5200MHz Ant1 NTN

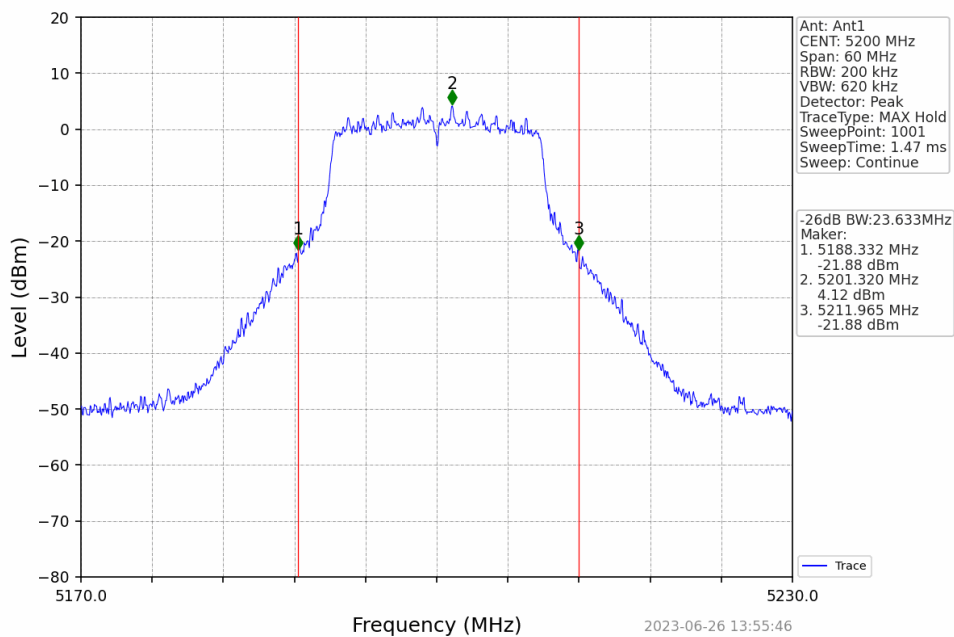




802.11ac(VHT20) HCH 5240MHz Ant1 NTN

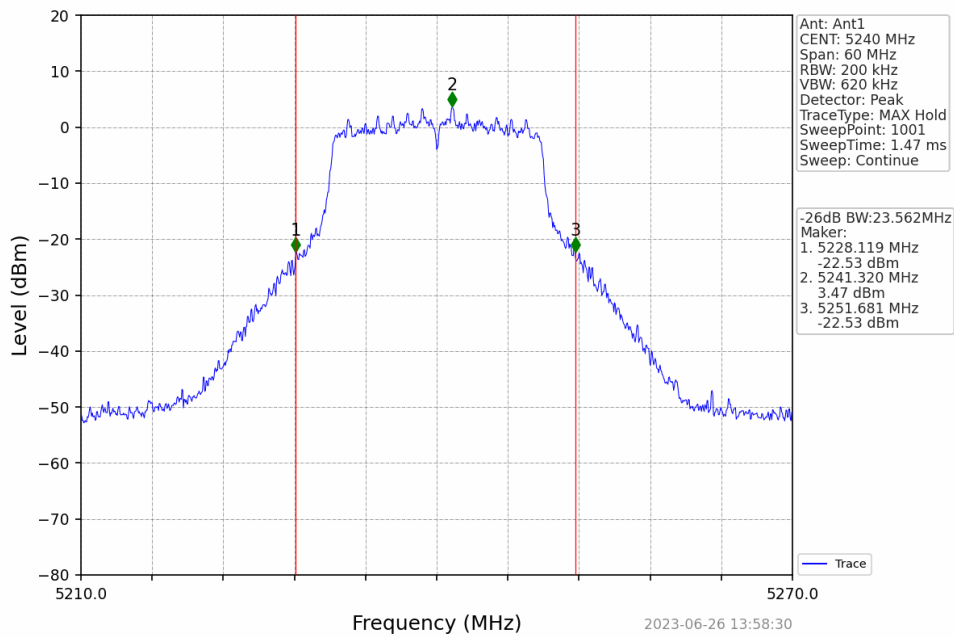


802.11ac(VHT40) LCH 5190MHz Ant1 NTN

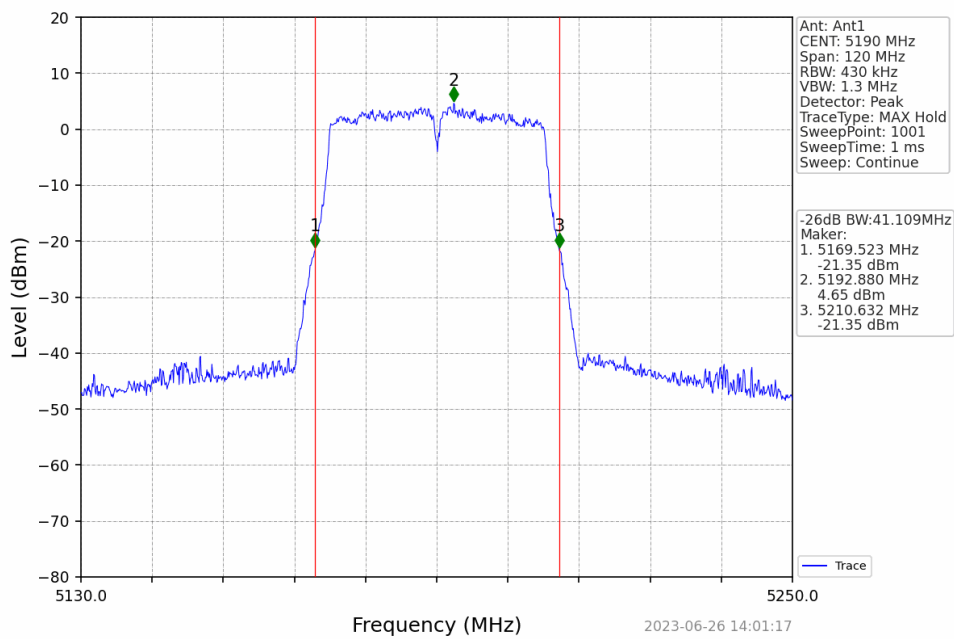




802.11ac(VHT40) HCH 5230MHz Ant1 NTN

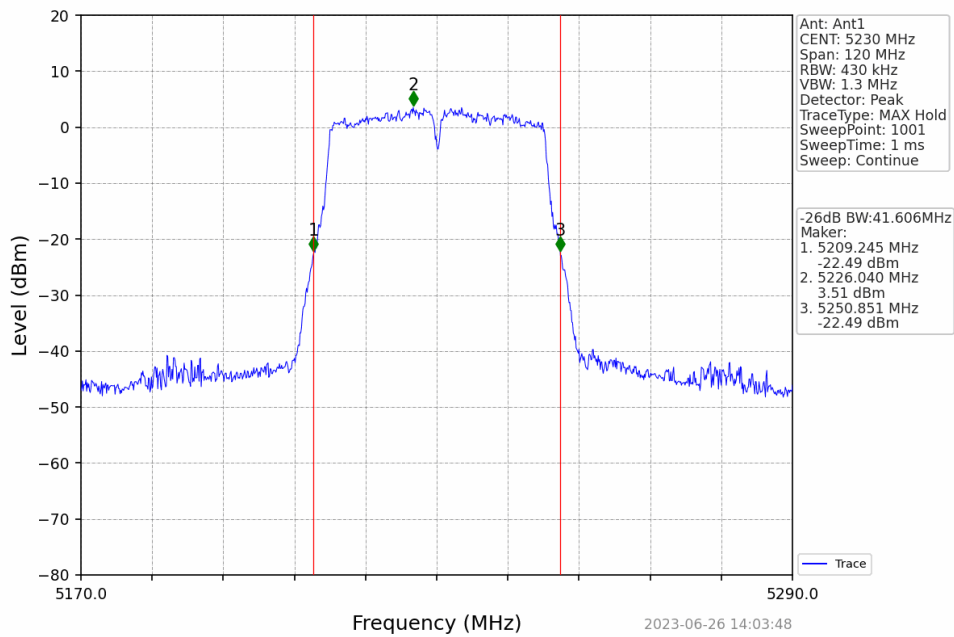

802.11ac(VHT80) MCH 5210MHz Ant1 NTN

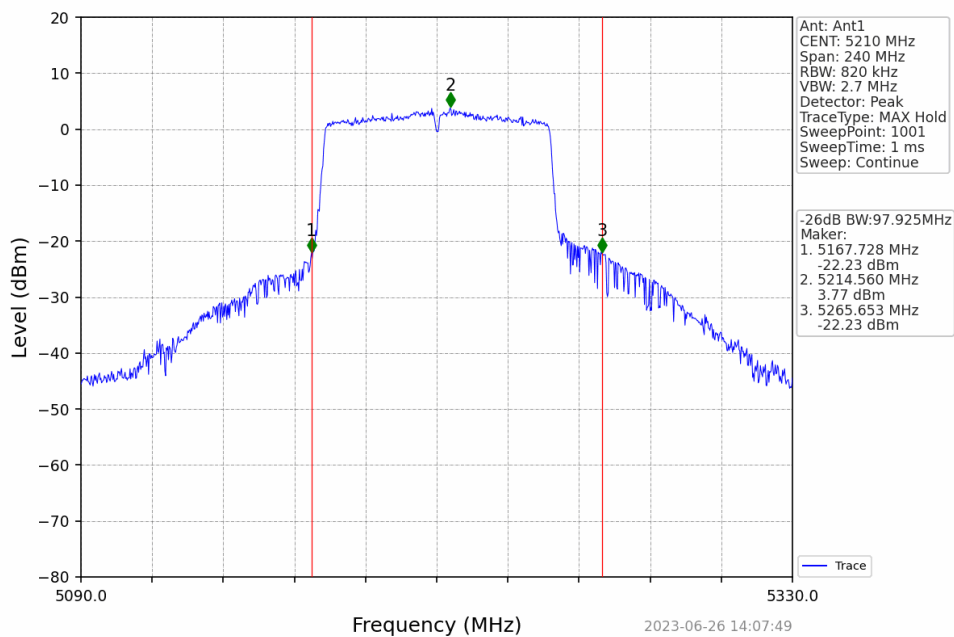



7. MAXIMUM CONDUCTED OUTPUT POWER

7.1 PPLIED PROCEDURES / LIMIT

According to FCC §15.407

The maximum conducted output power should not exceed:

Frequency Band(MHz)	Limit
5150~5250	250mW
5725~5850	1W

7.2 TEST PROCEDURE

The EUT was directly connected to the Power meter

1. Device Configuration

If possible, configure or modify the operation of the EUT so that it transmits continuously at its maximum power control level (see section II.B.).

a) The intent is to test at 100 percent duty cycle; however a small reduction in duty cycle (to no lower than 98 percent) is permitted if required by the EUT for amplitude control purposes. Manufacturers are expected to provide software to the test lab to permit such continuous operation.

b) If continuous transmission (or at least 98 percent duty cycle) cannot be achieved due to hardware limitations (e.g., overheating), the EUT shall be operated at its maximum power control level with the transmit duration as long as possible and the duty cycle as high as possible.

2. Measurement using a Spectrum Analyzer or EMI Receiver (SA)

Measurement of maximum conducted output power using a spectrum analyzer requires integrating the spectrum across a frequency span that encompasses, at a minimum, either the EBW or the 99-percent occupied bandwidth of the signal. However, the EBW must be used to determine bandwidth dependent limits on maximum conducted output power in accordance with § 15.407(a).

a) The test method shall be selected as follows: (i) Method SA-1 or SA-1 Alternative (averaging with the EUT transmitting at full power throughout each sweep) shall be applied if either of the following conditions can be satisfied:

- The EUT transmits continuously (or with a duty cycle ≥ 98 percent).
- Sweep triggering or gating can be implemented in a way that the device transmits at the maximum power control level throughout the duration of each of the instrument sweeps to be averaged. This condition can generally be achieved by triggering the instrument's sweep if the duration of the sweep (with the analyzer configured as in Method SA-1, below) is equal to or shorter than the duration T of each transmission from the EUT and if those transmissions exhibit full power throughout their durations.

(ii) Method SA-2 or SA-2 Alternative (averaging across on and off times of the EUT transmissions, followed by duty cycle correction) shall be applied if the conditions of (i) cannot be achieved and the transmissions exhibit a constant duty cycle during the measurement duration. Duty cycle will be considered to be constant if variations are less than ± 2 percent.

(iii) Method SA-3 (RMS detection with max hold) or SA-3 Alternative (reduced VBW with max hold) shall be applied if the conditions of (i) and (ii) cannot be achieved.

b) Method SA-1 (trace averaging with the EUT transmitting at full power throughout each sweep): (i) Set span to encompass the entire emission bandwidth (EBW) (or, alternatively, the entire 99% occupied bandwidth) of the signal.

(ii) Set RBW = 1 MHz.

(iii) Set VBW ≥ 3 MHz.

(iv) Number of points in sweep ≥ 2 Span / RBW. (This ensures that bin-to-bin spacing is \leq RBW/2, so that narrowband signals are not lost between frequency bins.)

(v) Sweep time = auto.

(vi) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.

(vii) If transmit duty cycle < 98 percent, use a video trigger with the trigger level set to enable triggering only on full power pulses. Transmitter must operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle ≥ 98 percent, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to "free run".

(viii) Trace average at least 100 traces in power averaging (i.e., RMS) mode.



(ix) Compute power by integrating the spectrum across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal using the instrument's band power measurement function with band limits set equal to the EBW (or occupied bandwidth) band edges. If the instrument does not have a band power function, sum the spectrum

7.3 DEVIATION FROM STANDARD

No deviation.

7.4 TEST SETUP



7.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.





7.6 TEST RESULTS

Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1012 hPa	Test Voltage :	DC 3.85V
Test Mode :	TX		

Mode	TX Type	Frequency (MHz)	Maximum Average Conducted Output Power (dBm)		Verdict
			ANT1	Limit	
802.11a	SISO	5180	13.19	<=23.98	Pass
		5200	12.67	<=23.98	Pass
		5240	11.85	<=23.98	Pass
		5745	8.68	<=30	Pass
		5785	8.87	<=30	Pass
		5825	9.80	<=30	Pass
802.11n (HT20)	SISO	5180	12.60	<=23.98	Pass
		5200	12.19	<=23.98	Pass
		5240	11.70	<=23.98	Pass
		5745	8.48	<=30	Pass
		5785	8.71	<=30	Pass
		5825	9.87	<=30	Pass
802.11n (HT40)	SISO	5190	13.87	<=23.98	Pass
		5230	12.83	<=23.98	Pass
		5755	9.14	<=30	Pass
		5795	10.13	<=30	Pass
802.11ac (VHT20)	SISO	5180	12.51	<=23.98	Pass
		5200	12.32	<=23.98	Pass
		5240	11.81	<=23.98	Pass
		5745	8.44	<=30	Pass
		5785	8.62	<=30	Pass
		5825	9.70	<=30	Pass
802.11ac (VHT40)	SISO	5190	13.75	<=23.98	Pass
		5230	12.89	<=23.98	Pass
		5755	9.14	<=30	Pass
		5795	10.00	<=30	Pass
802.11ac (VHT80)	SISO	5210	13.29	<=23.98	Pass
		5775	9.21	<=30	Pass




Test Graph

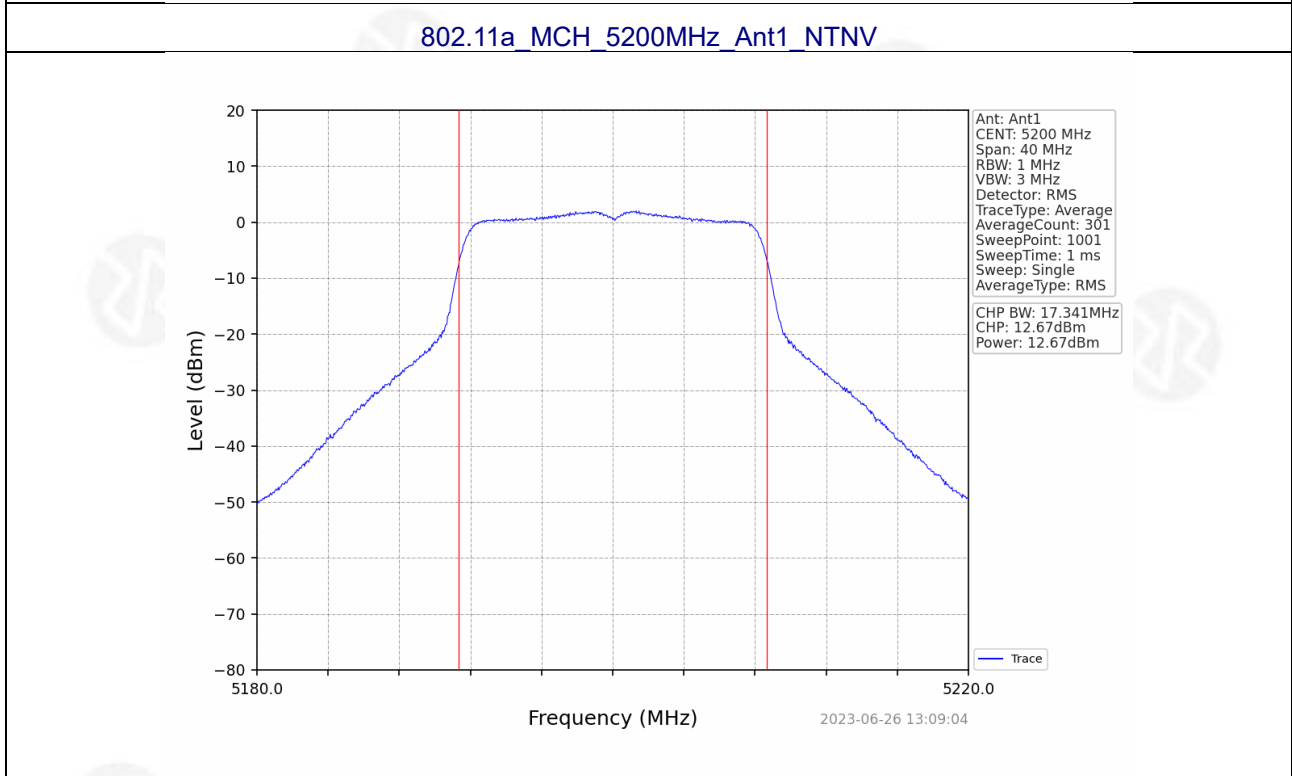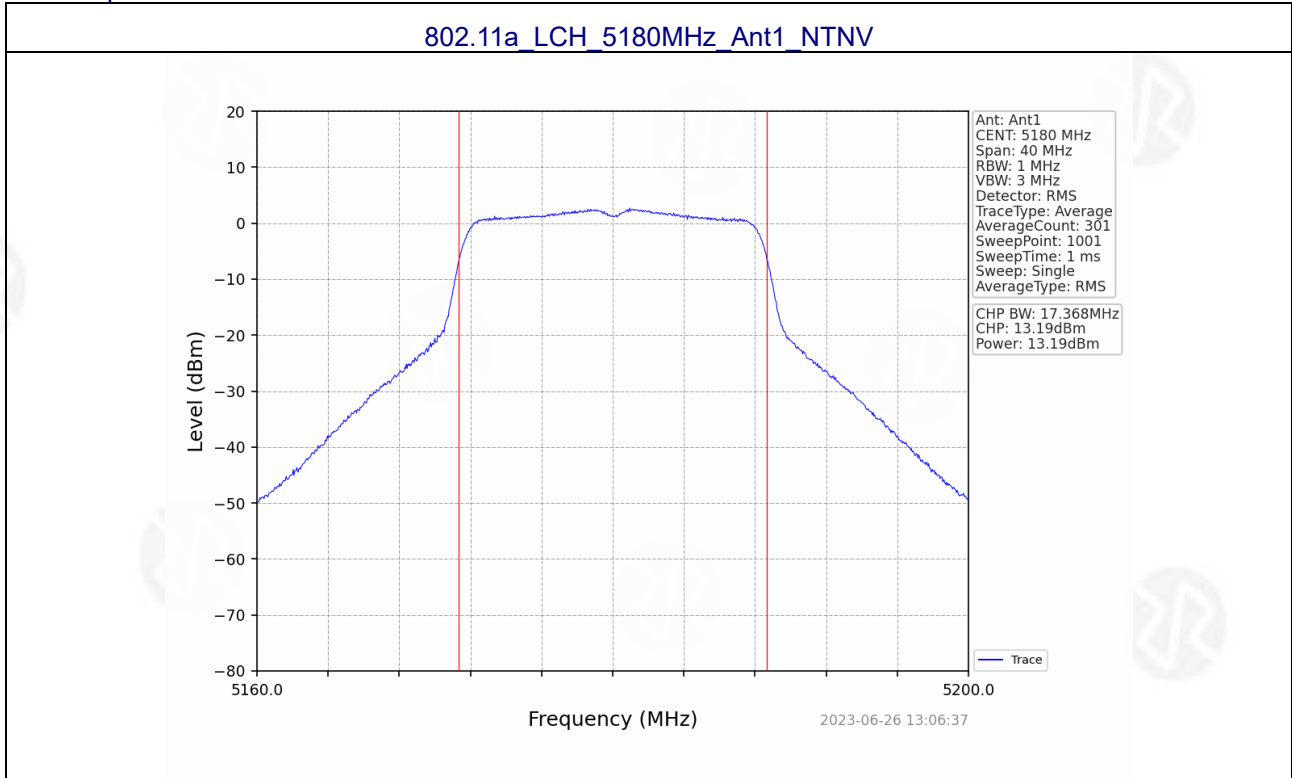




802.11a HCH 5240MHz Ant1 NTN

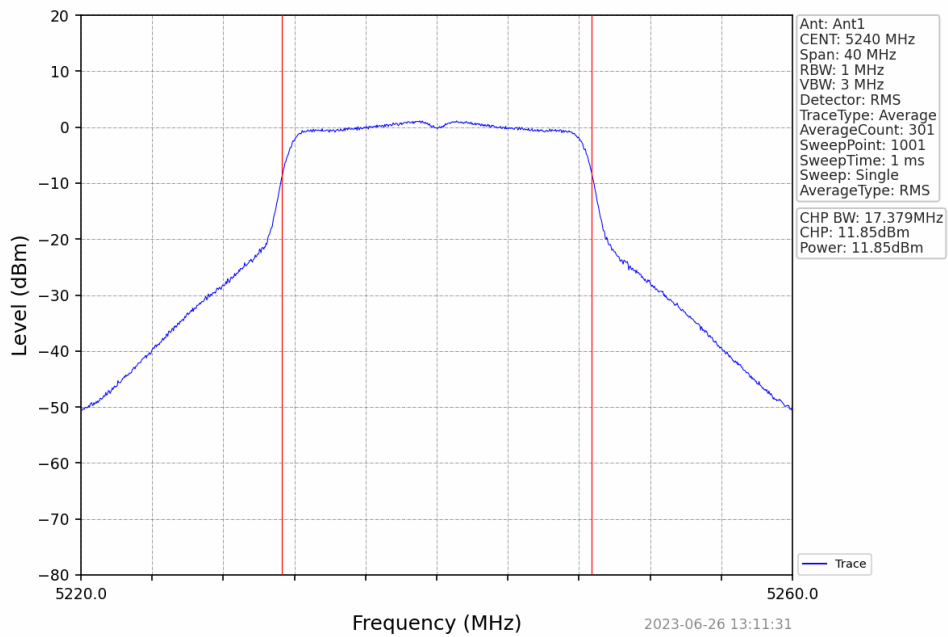


802.11a LCH 5745MHz Ant1 NTN

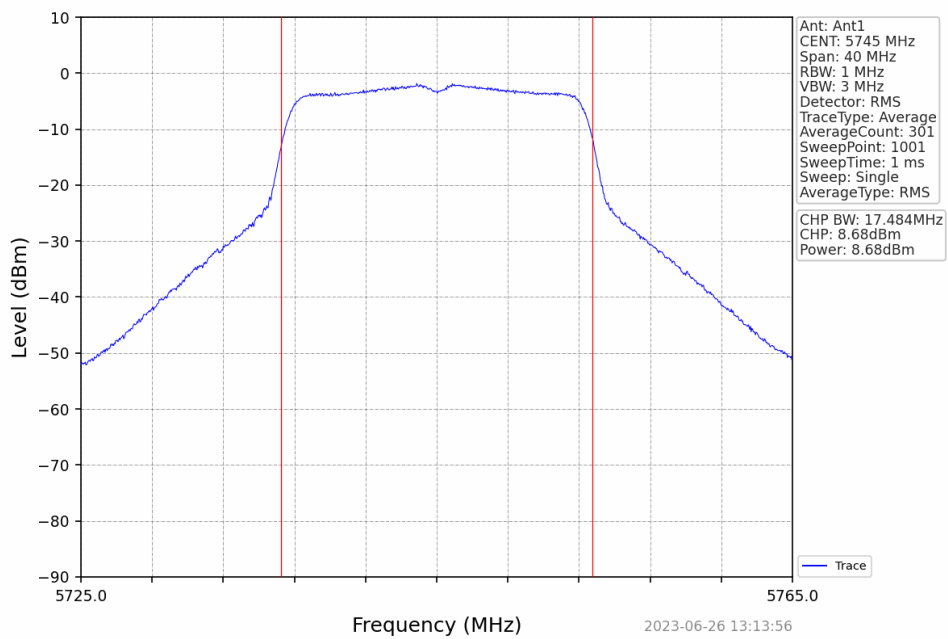




802.11a MCH 5785MHz Ant1 NTN

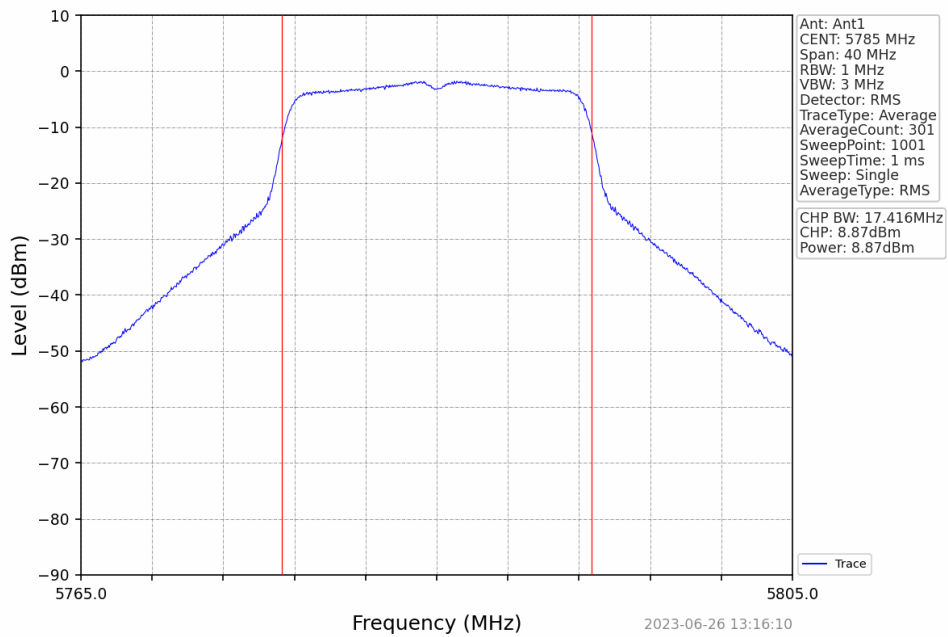


802.11a HCH 5825MHz Ant1 NTN

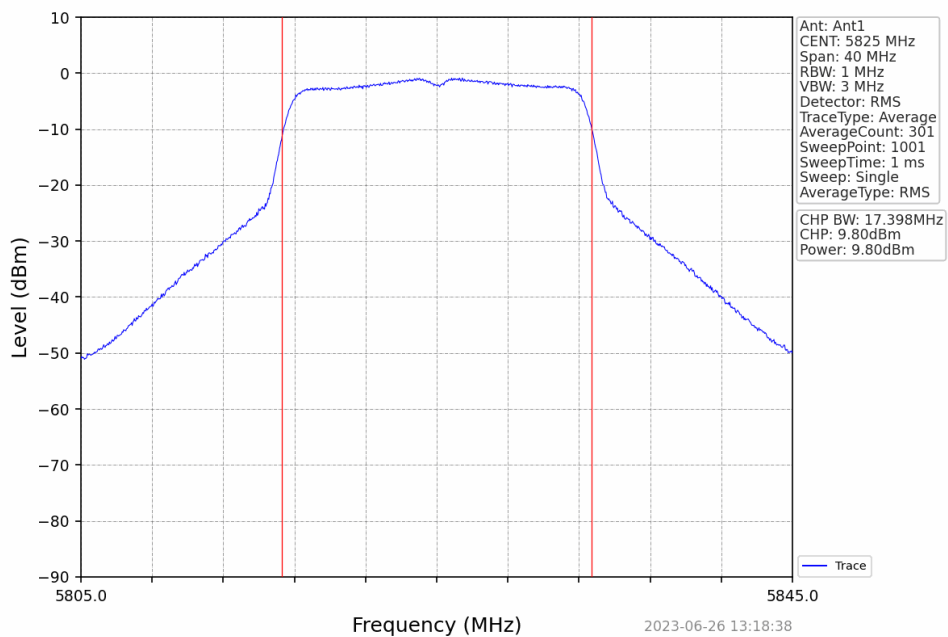




802.11n(HT20) LCH 5180MHz Ant1 NTV

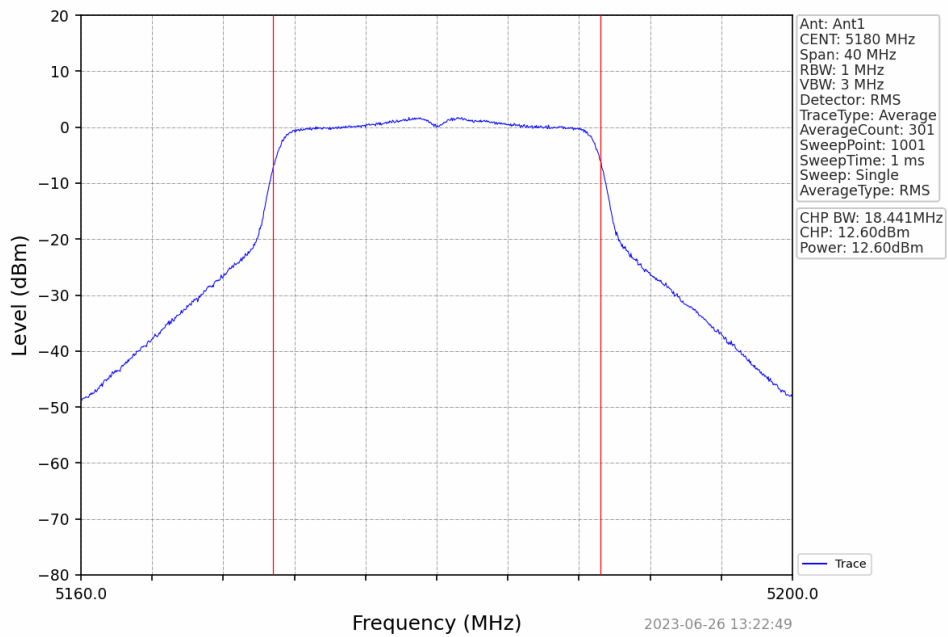


802.11n(HT20) MCH 5200MHz Ant1 NTV

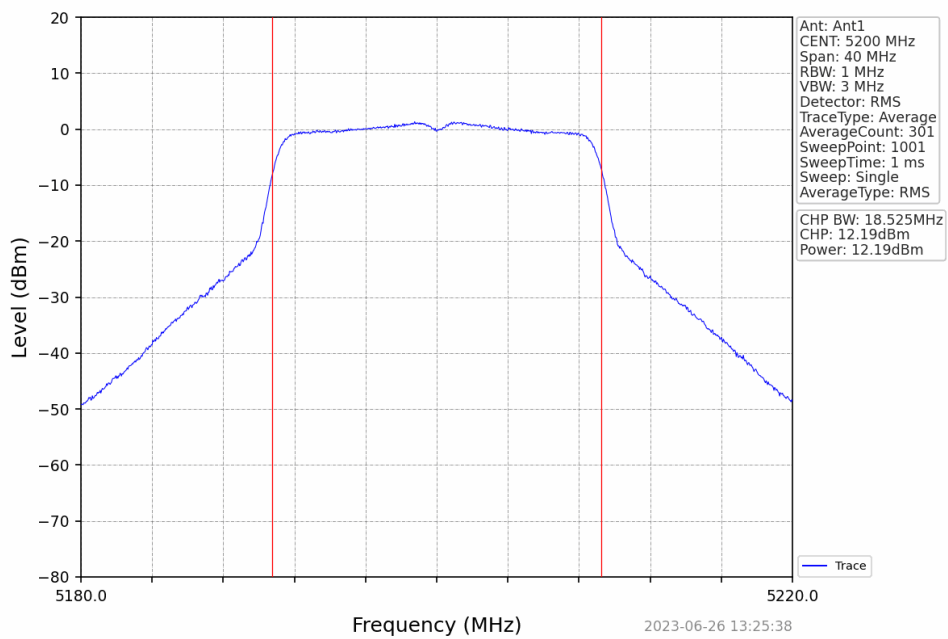




802.11n(HT20) HCH 5240MHz Ant1 NTV

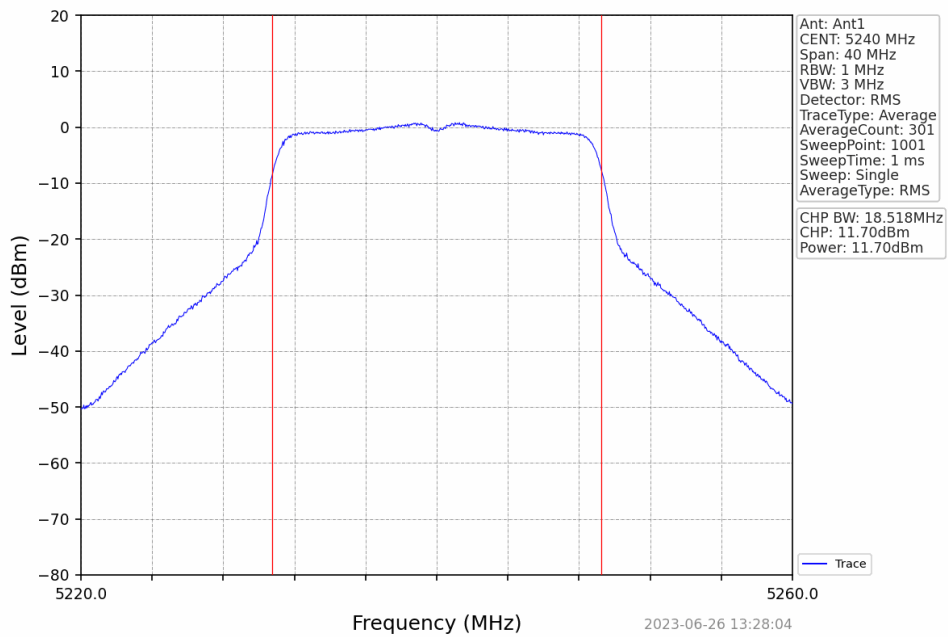


802.11n(HT20) LCH 5745MHz Ant1 NTV

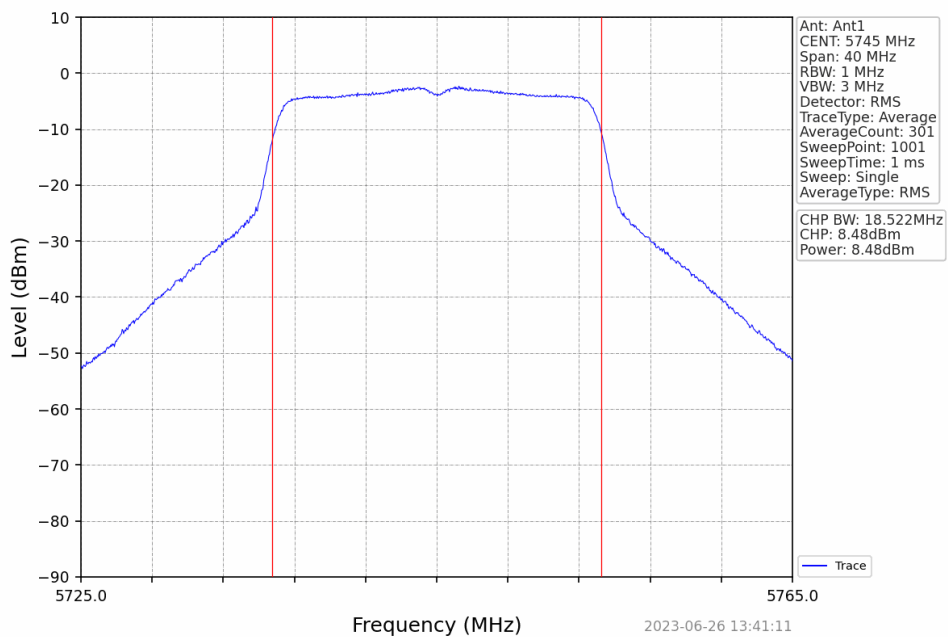




802.11n(HT20) MCH 5785MHz Ant1 NTV

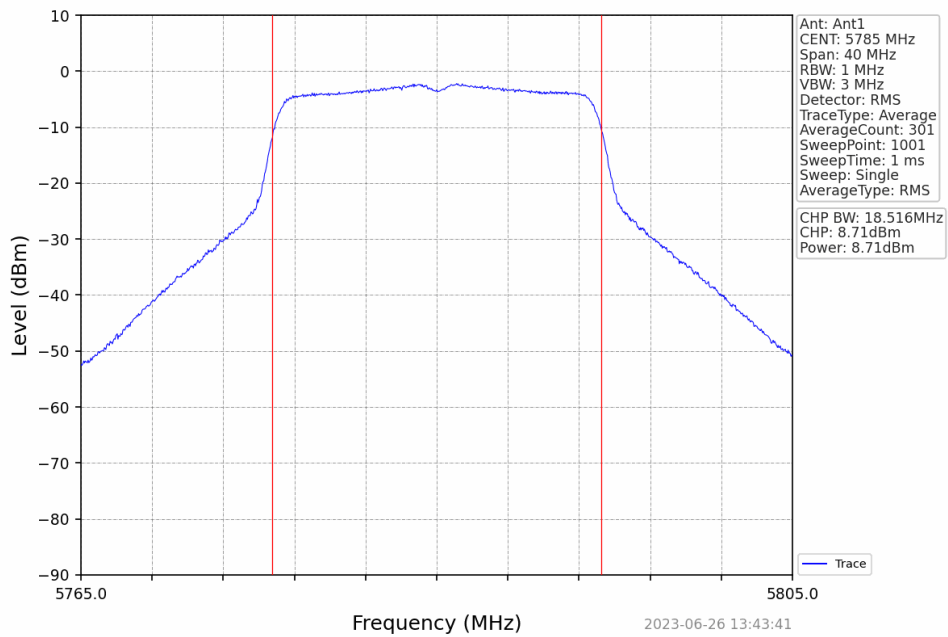


802.11n(HT20) HCH 5825MHz Ant1 NTV

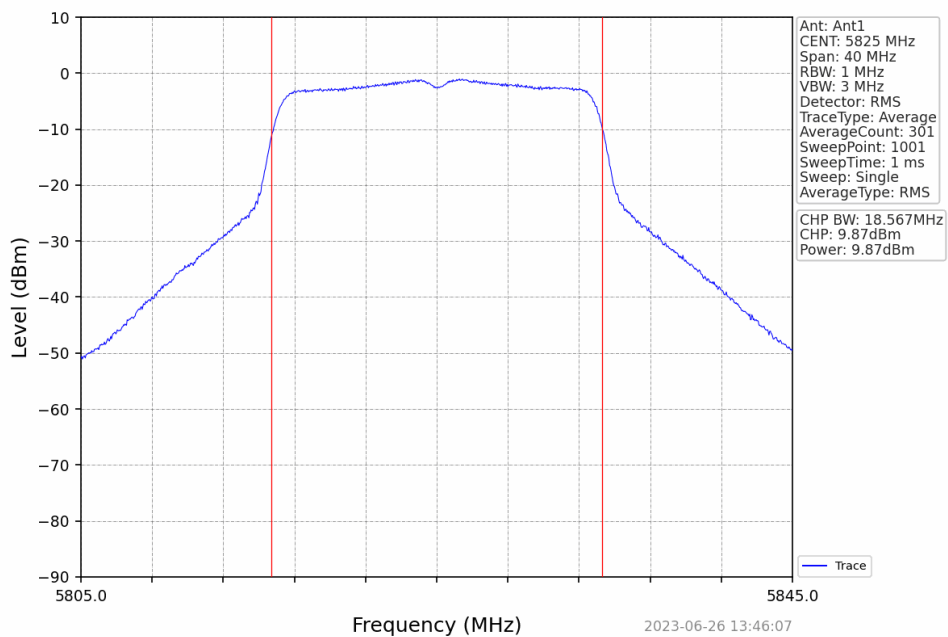




802.11n(HT40) LCH 5190MHz Ant1 NTV

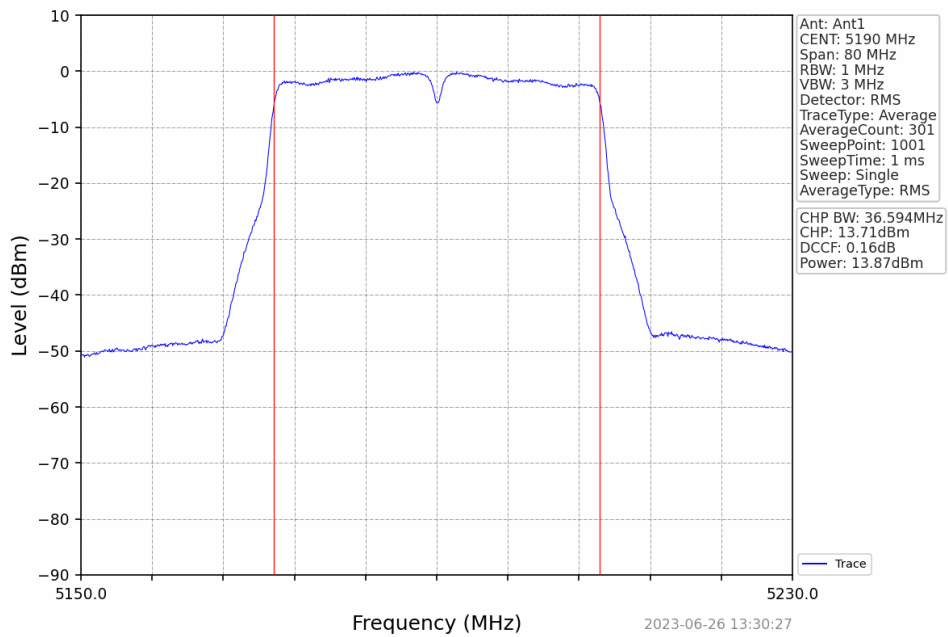


802.11n(HT40) HCH 5230MHz Ant1 NTV

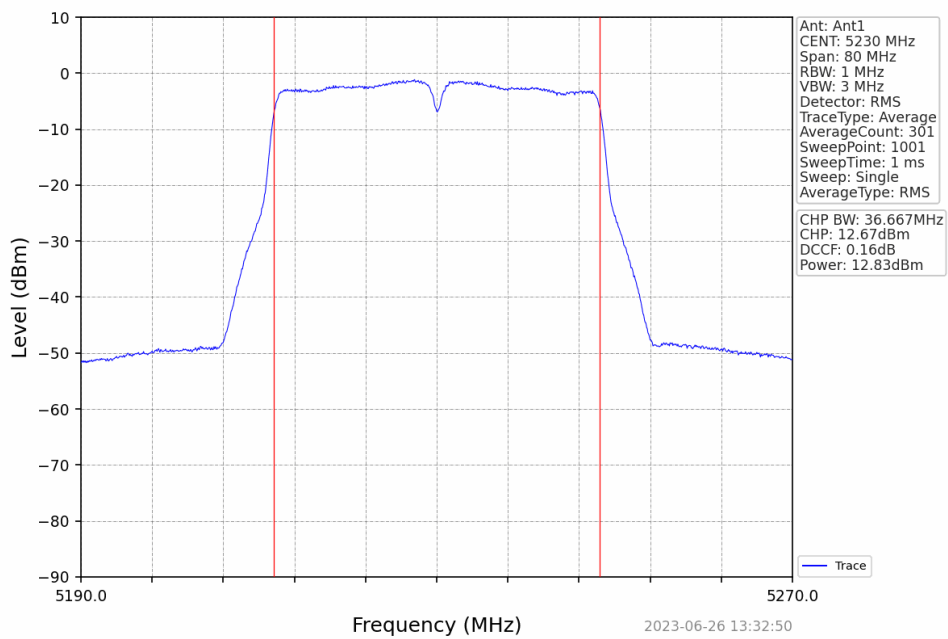




802.11n(HT40) LCH 5755MHz Ant1 NTV

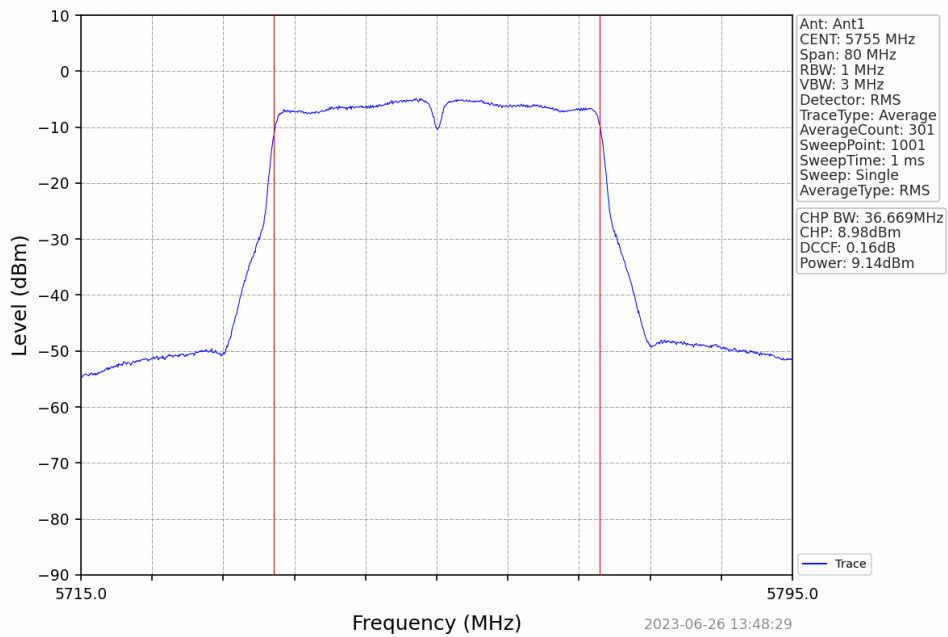


802.11n(HT40) HCH 5795MHz Ant1 NTV

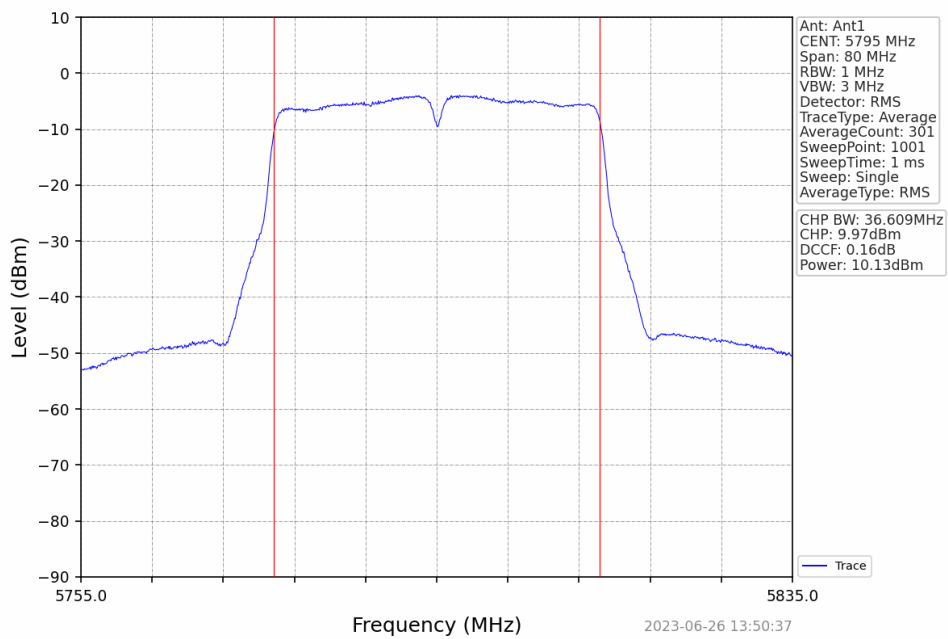




802.11ac(VHT20) LCH 5180MHz Ant1 NTN

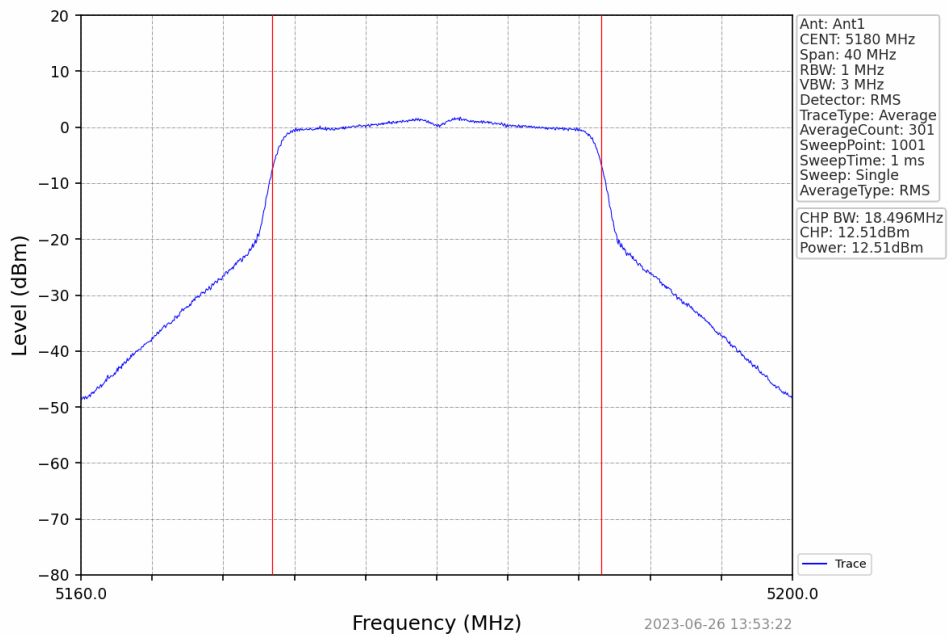


802.11ac(VHT20) MCH 5200MHz Ant1 NTN

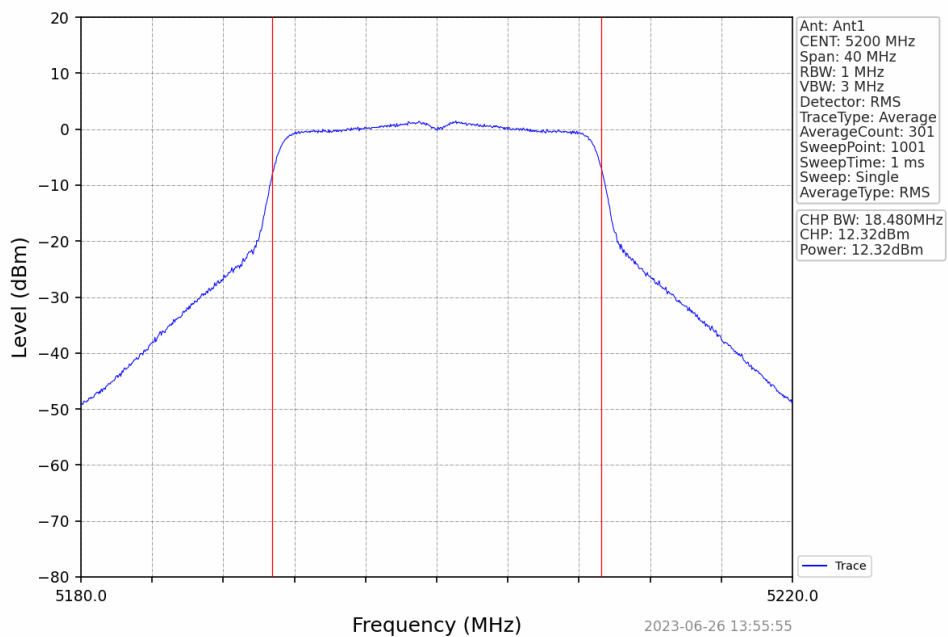




802.11ac(VHT20) HCH 5240MHz Ant1 NTN

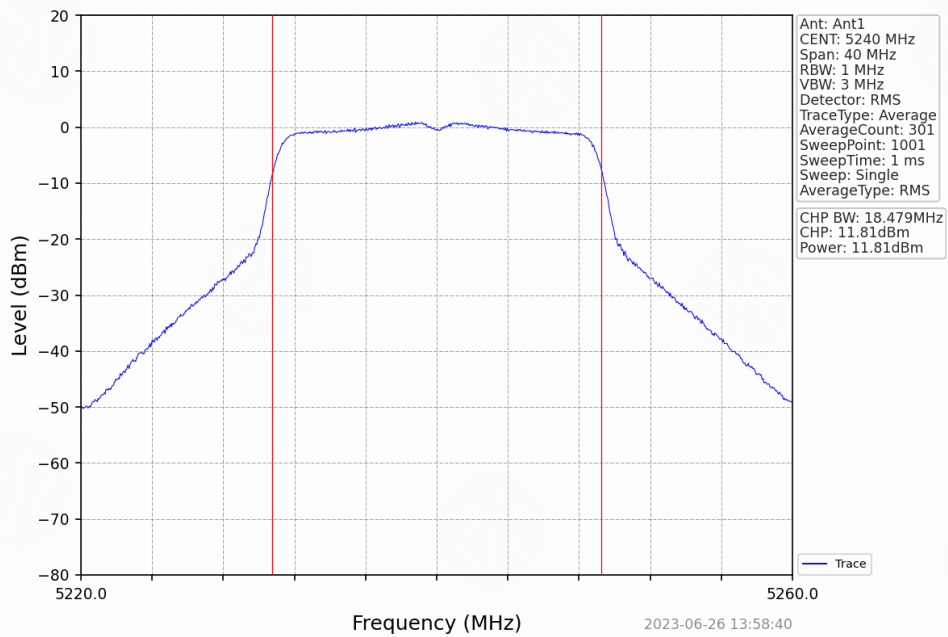


802.11ac(VHT20) LCH 5745MHz Ant1 NTN

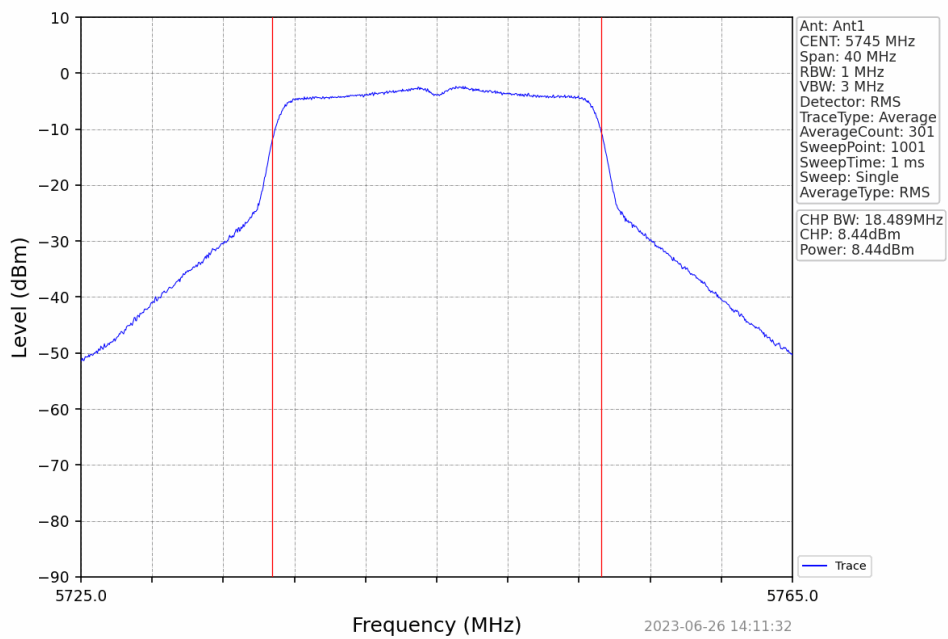




802.11ac(VHT20) MCH 5785MHz Ant1_NTNV

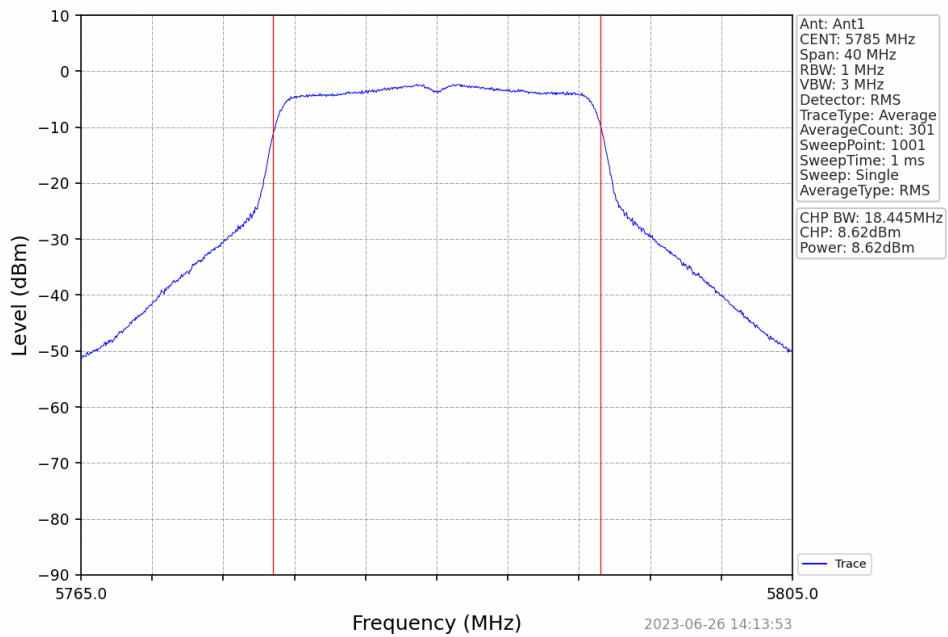


802.11ac(VHT20) HCH 5825MHz Ant1_NTNV

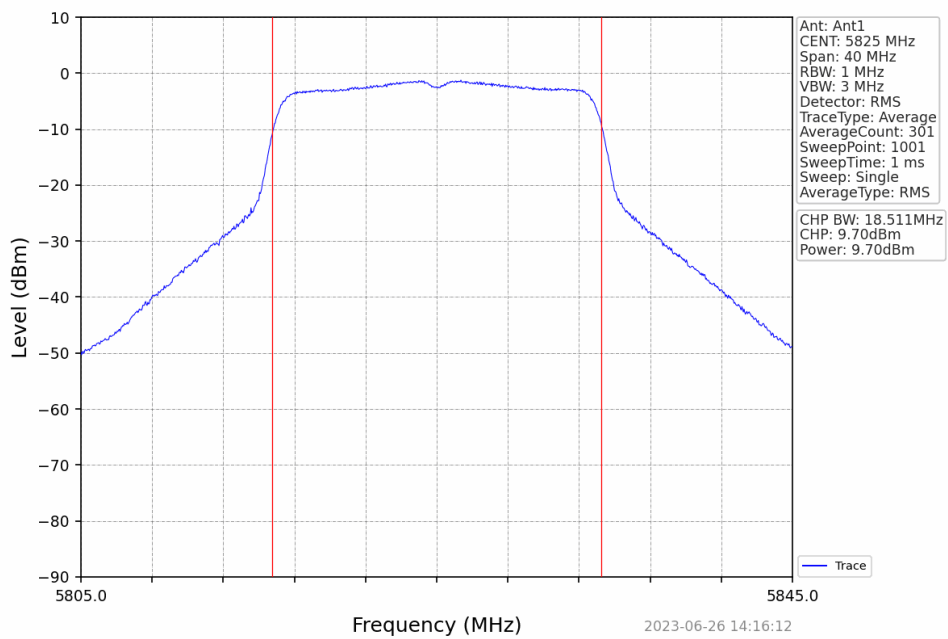




802.11ac(VHT40) LCH 5190MHz Ant1 NTN

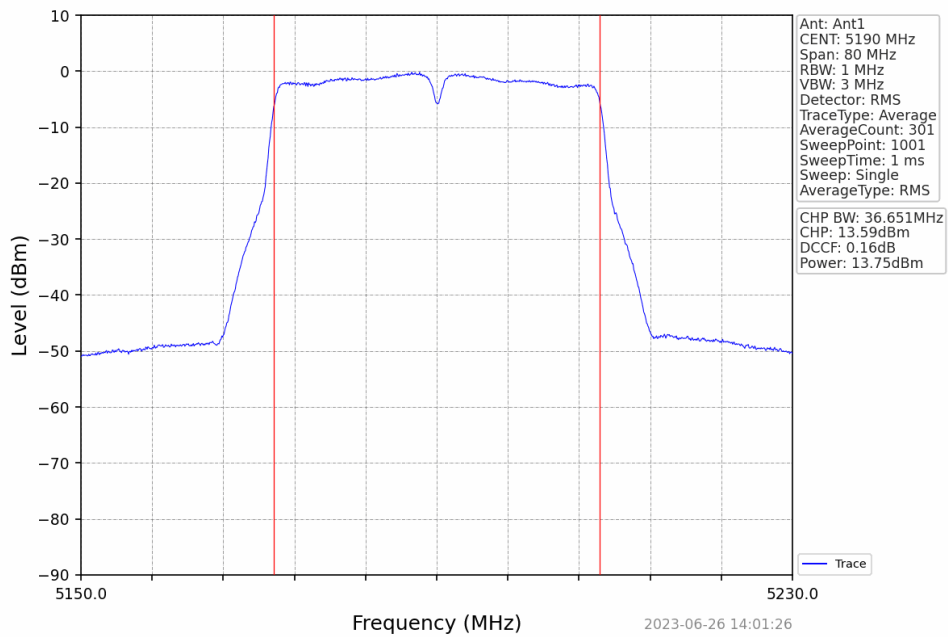


802.11ac(VHT40) HCH 5230MHz Ant1 NTN

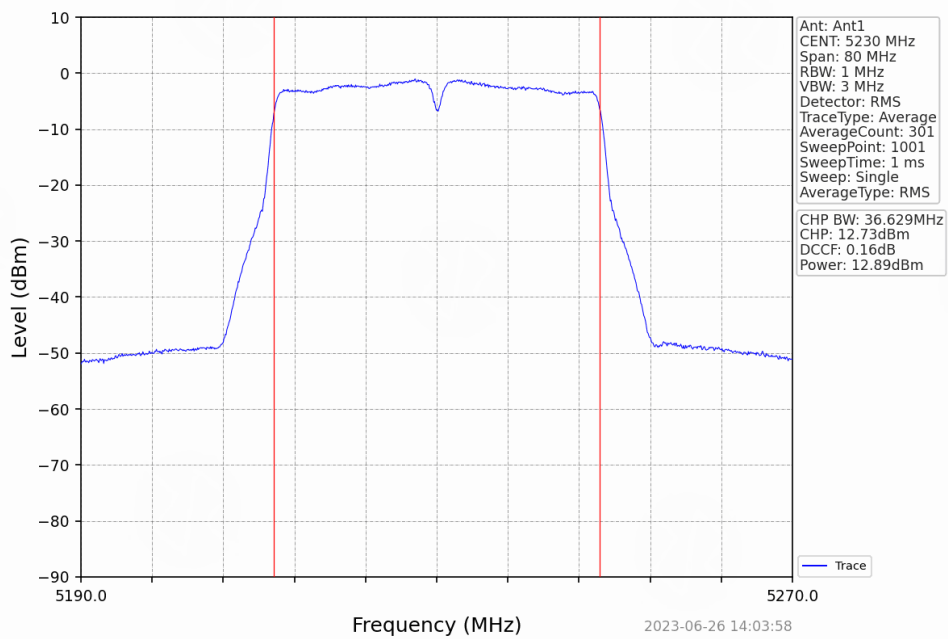




802.11ac(VHT40) LCH 5755MHz Ant1 NTN

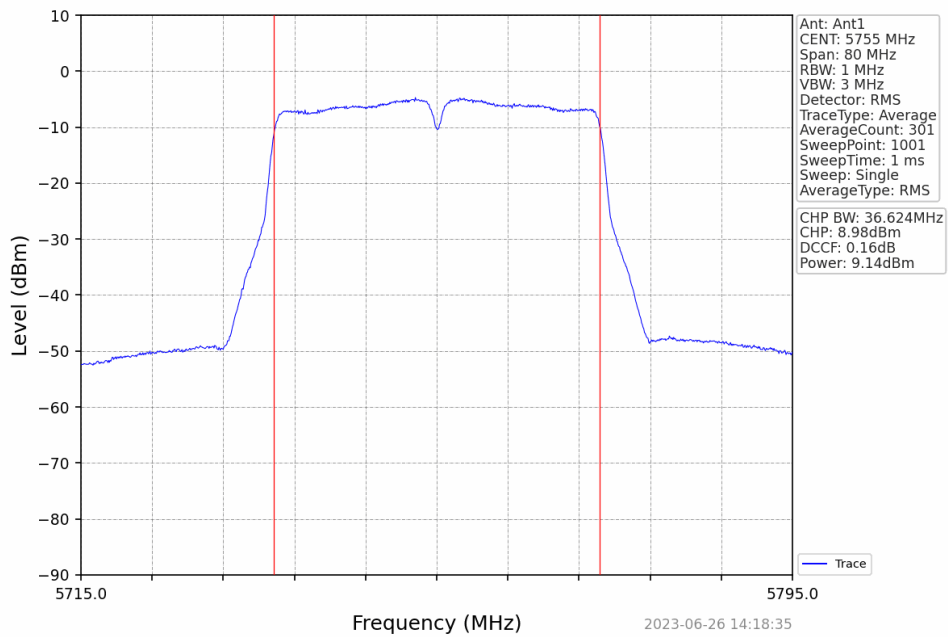


802.11ac(VHT40) HCH 5795MHz Ant1 NTN

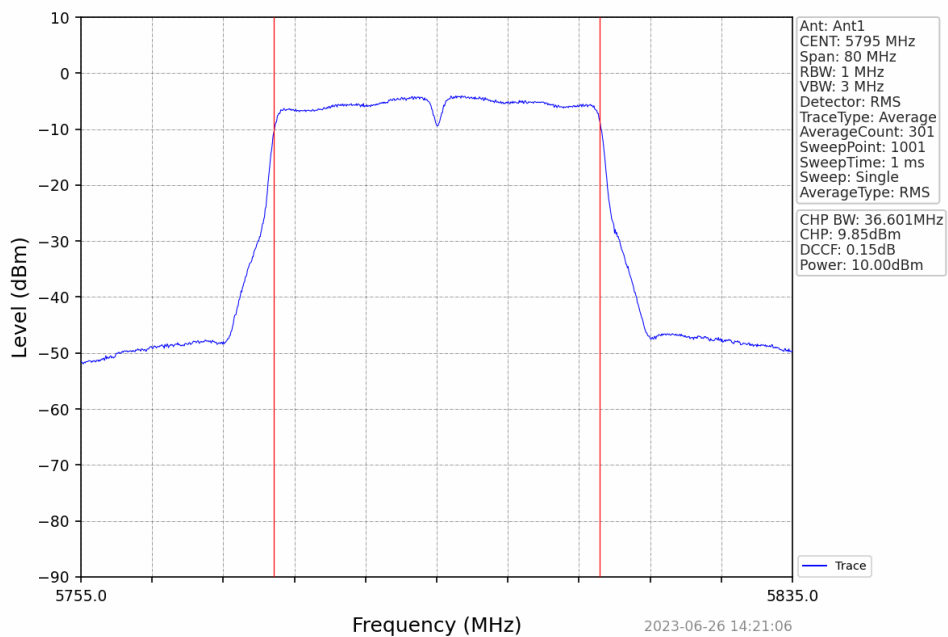




802.11ac(VHT80) MCH 5210MHz Ant1 NTN

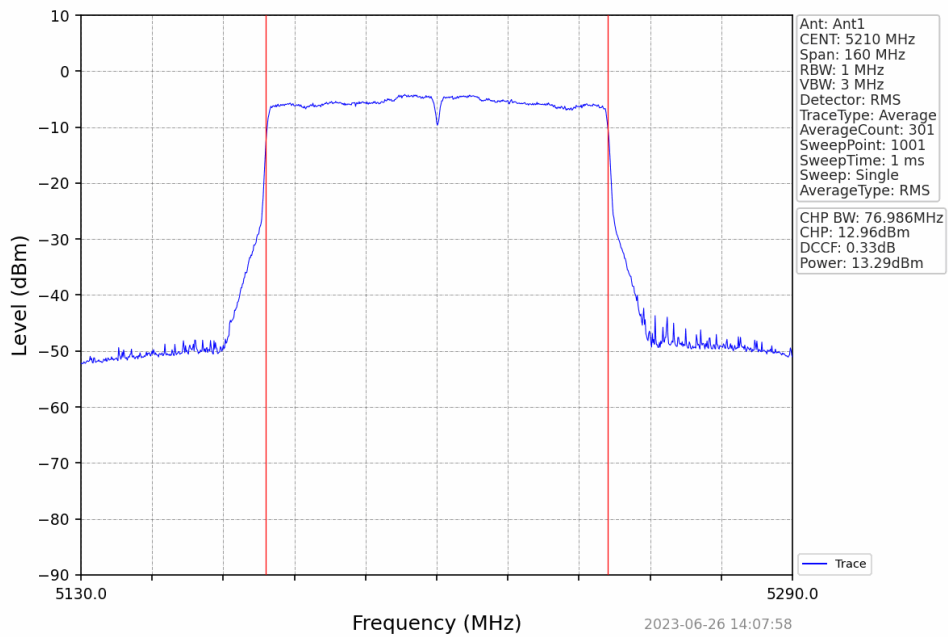

802.11ac(VHT80) MCH 5775MHz Ant1 NTN

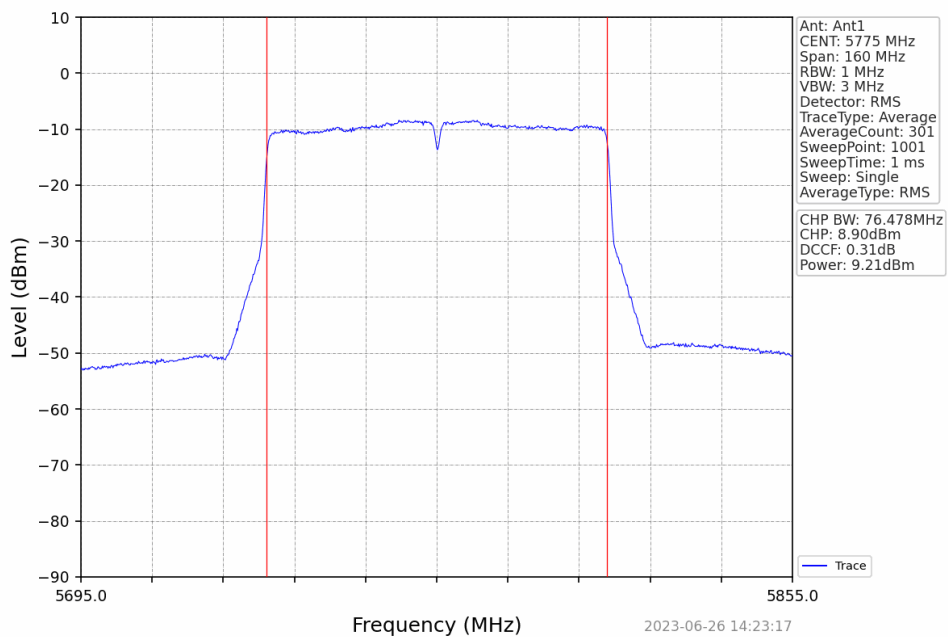



8. OUT OF BAND EMISSIONS

8.1 APPLICABLE STANDARD

According to FCC §15.407(b)

Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(2) For transmitters operating in the 5.725-5.85 GHz band: All emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an e.i.r.p. of -17 dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an e.i.r.p. of -27 dBm/MHz.

8.2 TEST PROCEDURE

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 1 MHz with a convenient frequency span.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

8.3 DEVIATION FROM STANDARD

No deviation.

8.4 TEST SETUP





8.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

8.6 TEST RESULTS

Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1012 hPa	Test Voltage :	DC 3.85V



Radiated Band Edge:

Test Mode: 802.11a								
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
5150.00	46.46	28.65	13.58	31.04	57.65	74.00	-16.35	H
5350.00	45.83	29.16	14.68	31.96	57.71	74.00	-16.29	H
5150.00	46.69	28.65	13.58	31.04	57.88	74.00	-16.12	V
5350.00	48.86	29.16	14.68	31.96	60.74	74.00	-13.26	V
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
5150.00	33.53	28.65	13.58	31.04	44.72	54.00	-9.28	H
5350.00	34.30	29.16	14.68	31.96	46.18	54.00	-7.82	H
5150.00	34.44	28.65	13.58	31.04	45.63	54.00	-8.37	V
5350.00	33.45	29.16	14.68	31.96	45.33	54.00	-8.67	V

Test Mode: 802.11n20								
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
5150.00	48.72	28.65	13.58	31.04	59.91	74.00	-14.09	H
5350.00	46.95	29.16	14.68	31.96	58.83	74.00	-15.17	H
5150.00	46.00	28.65	13.58	31.04	57.19	74.00	-16.81	V
5350.00	47.94	29.16	14.68	31.96	59.82	74.00	-14.18	V
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
5150.00	34.40	28.65	13.58	31.04	45.59	54.00	-8.41	H
5350.00	33.82	29.16	14.68	31.96	45.70	54.00	-8.30	H
5150.00	34.74	28.65	13.58	31.04	45.93	54.00	-8.07	V
5350.00	34.64	29.16	14.68	31.96	46.52	54.00	-7.48	V



Test Mode: 802.11ac20								
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
5150.00	45.36	28.65	13.58	31.04	56.55	74.00	-17.45	H
5350.00	48.98	29.16	14.68	31.96	60.86	74.00	-13.14	H
5150.00	45.18	28.65	13.58	31.04	56.37	74.00	-17.63	V
5350.00	47.73	29.16	14.68	31.96	59.61	74.00	-14.39	V
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
5150.00	34.42	28.65	13.58	31.04	45.61	54.00	-8.39	H
5350.00	33.00	29.16	14.68	31.96	44.88	54.00	-9.12	H
5150.00	34.36	28.65	13.58	31.04	45.55	54.00	-8.45	V
5350.00	34.92	29.16	14.68	31.96	46.80	54.00	-7.20	V

Test Mode: 802.11n40								
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
5150.00	47.19	28.65	13.58	31.04	58.38	74.00	-15.62	H
5350.00	46.45	29.16	14.68	31.96	58.33	74.00	-15.67	H
5150.00	46.22	28.65	13.58	31.04	57.41	74.00	-16.59	V
5350.00	47.12	29.16	14.68	31.96	59.00	74.00	-15.00	V
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
5150.00	32.32	28.65	13.58	31.04	43.51	54.00	-10.49	H
5350.00	34.45	29.16	14.68	31.96	46.33	54.00	-7.67	H
5150.00	32.86	28.65	13.58	31.04	44.05	54.00	-9.95	V
5350.00	33.81	29.16	14.68	31.96	45.69	54.00	-8.31	V



Test Mode: 802.11ac40								
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
5150.00	48.63	28.65	13.58	31.04	59.82	74.00	-14.18	H
5350.00	47.53	29.16	14.68	31.96	59.41	74.00	-14.59	H
5150.00	48.76	28.65	13.58	31.04	59.95	74.00	-14.05	V
5350.00	45.58	29.16	14.68	31.96	57.46	74.00	-16.54	V
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
5150.00	33.62	28.65	13.58	31.04	44.81	54.00	-9.19	H
5350.00	32.00	29.16	14.68	31.96	43.88	54.00	-10.12	H
5150.00	32.15	28.65	13.58	31.04	43.34	54.00	-10.66	V
5350.00	32.73	29.16	14.68	31.96	44.61	54.00	-9.39	V

Test Mode: 802.11ac80								
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
5150.00	48.69	28.65	13.58	31.04	59.88	74.00	-14.12	H
5350.00	48.07	29.16	14.68	31.96	59.95	74.00	-14.05	H
5150.00	46.68	28.65	13.58	31.04	57.87	74.00	-16.13	V
5350.00	46.98	29.16	14.68	31.96	58.86	74.00	-15.14	V
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
5150.00	33.21	28.65	13.58	31.04	44.40	54.00	-9.60	H
5350.00	34.65	29.16	14.68	31.96	46.53	54.00	-7.47	H
5150.00	34.69	28.65	13.58	31.04	45.88	54.00	-8.12	V
5350.00	34.46	29.16	14.68	31.96	46.34	54.00	-7.66	V



Test Mode: 802.11a								
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
5725.00	45.12	28.65	13.58	31.04	56.31	68.20	-11.89	H
5850.00	46.87	29.16	14.68	31.96	58.75	68.20	-9.45	H
5725.00	45.51	28.65	13.58	31.04	56.70	68.20	-11.50	V
5850.00	45.51	29.16	14.68	31.96	57.39	68.20	-10.81	V
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
5725.00	34.21	28.65	13.58	31.04	45.40	54.00	-8.60	H
5850.00	32.61	29.16	14.68	31.96	44.49	54.00	-9.51	H
5725.00	32.95	28.65	13.58	31.04	44.14	54.00	-9.86	V
5850.00	32.68	29.16	14.68	31.96	44.56	54.00	-9.44	V

Test Mode: 802.11n20								
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
5725.00	47.19	28.65	13.58	31.04	58.38	68.20	-9.82	H
5850.00	48.99	29.16	14.68	31.96	60.87	68.20	-7.33	H
5725.00	48.37	28.65	13.58	31.04	59.56	68.20	-8.64	V
5850.00	45.27	29.16	14.68	31.96	57.15	68.20	-11.05	V
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
5725.00	32.84	28.65	13.58	31.04	44.03	54.00	-9.97	H
5850.00	33.09	29.16	14.68	31.96	44.97	54.00	-9.03	H
5725.00	32.78	28.65	13.58	31.04	43.97	54.00	-10.03	V
5850.00	32.93	29.16	14.68	31.96	44.81	54.00	-9.19	V



Test Mode: 802.11ac20								
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
5725.00	45.02	28.65	13.58	31.04	56.21	68.20	-11.99	H
5850.00	46.38	29.16	14.68	31.96	58.26	68.20	-9.94	H
5725.00	46.63	28.65	13.58	31.04	57.82	68.20	-10.38	V
5850.00	46.26	29.16	14.68	31.96	58.14	68.20	-10.06	V
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
5725.00	34.89	28.65	13.58	31.04	46.08	54.00	-7.92	H
5850.00	32.91	29.16	14.68	31.96	44.79	54.00	-9.21	H
5725.00	32.91	28.65	13.58	31.04	44.10	54.00	-9.90	V
5850.00	33.11	29.16	14.68	31.96	44.99	54.00	-9.01	V

Test Mode: 802.11n40								
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
5725.00	48.95	28.65	13.58	31.04	60.14	68.20	-8.06	H
5850.00	46.80	29.16	14.68	31.96	58.68	68.20	-9.52	H
5725.00	46.51	28.65	13.58	31.04	57.70	68.20	-10.50	V
5850.00	47.77	29.16	14.68	31.96	59.65	68.20	-8.55	V
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
5725.00	33.09	28.65	13.58	31.04	44.28	54.00	-9.72	H
5850.00	34.57	29.16	14.68	31.96	46.45	54.00	-7.55	H
5725.00	34.14	28.65	13.58	31.04	45.33	54.00	-8.67	V
5850.00	33.72	29.16	14.68	31.96	45.60	54.00	-8.40	V



Test Mode: 802.11ac40								
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
5725.00	45.76	28.65	13.58	31.04	56.95	68.20	-11.25	H
5850.00	46.87	29.16	14.68	31.96	58.75	68.20	-9.45	H
5725.00	45.43	28.65	13.58	31.04	56.62	68.20	-11.58	V
5850.00	47.10	29.16	14.68	31.96	58.98	68.20	-9.22	V
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
5725.00	33.02	28.65	13.58	31.04	44.21	54.00	-9.79	H
5850.00	34.39	29.16	14.68	31.96	46.27	54.00	-7.73	H
5725.00	33.75	28.65	13.58	31.04	44.94	54.00	-9.06	V
5850.00	33.55	29.16	14.68	31.96	45.43	54.00	-8.57	V

Test Mode: 802.11ac80								
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
5725.00	46.25	28.65	13.58	31.04	57.44	68.20	-10.76	H
5850.00	47.99	29.16	14.68	31.96	59.87	68.20	-8.33	H
5725.00	45.11	28.65	13.58	31.04	56.30	68.20	-11.90	V
5850.00	48.27	29.16	14.68	31.96	60.15	68.20	-8.05	V
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
5725.00	34.82	28.65	13.58	31.04	46.01	54.00	-7.99	H
5850.00	34.92	29.16	14.68	31.96	46.80	54.00	-7.20	H
5725.00	32.76	28.65	13.58	31.04	43.95	54.00	-10.05	V
5850.00	33.38	29.16	14.68	31.96	45.26	54.00	-8.74	V



9.SPURIOUS RF CONDUCTED EMISSIONS


9.1 CONFORMANCE LIMIT

1. Below -20dB of the highest emission level in operating band.
2. Fall in the restricted bands listed in section 15.205. The maximum permitted average field strength is listed in section 15.209.

9.2 MEASURING INSTRUMENTS

The Measuring equipment is listed in the section 6.3 of this test report.

9.3 TEST SETUP

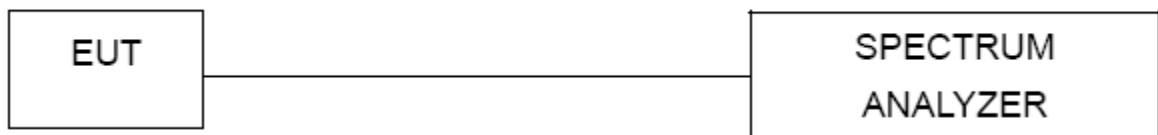

9.4 TEST PROCEDURE

The Spurious RF conducted emissions compliance of RF radiated emission should be measured by following the guidance in ANSI C63.10-2013 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization etc. Set RBW=100kHz and VBW= 300KHz to measure the peak field strength, and measure frequency range from 30MHz to 26.5GHz.


9.5 TEST RESULTS

Remark: The measurement frequency range is from 30MHz to the 5th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions and band edge measurement data.




Test Plot


802.11a on channel 36

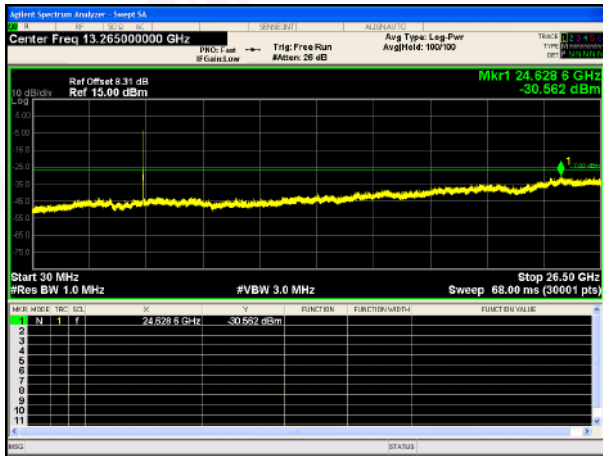

802.11a on channel 40

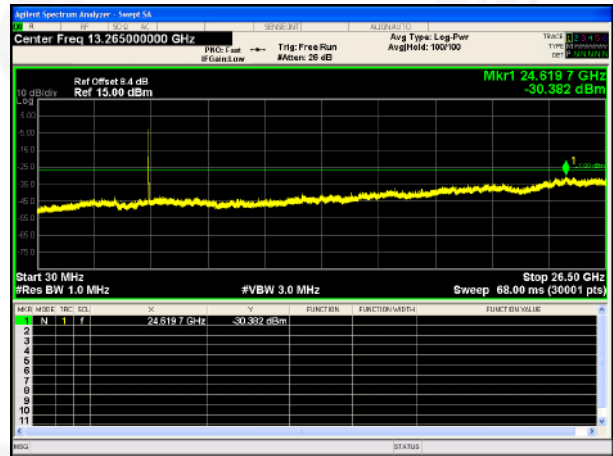


802.11a on channel 48

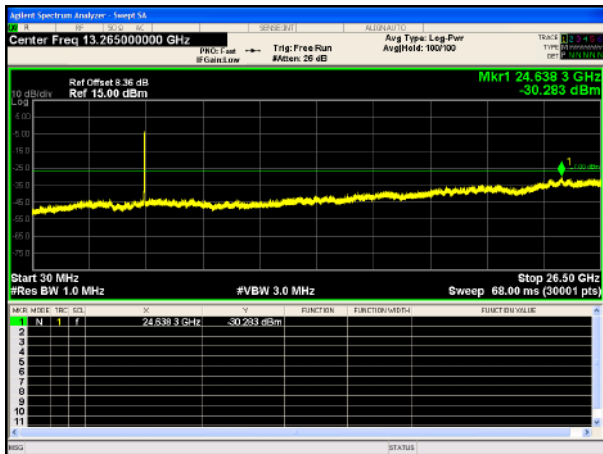




Test Plot


802.11n20 on channel 36

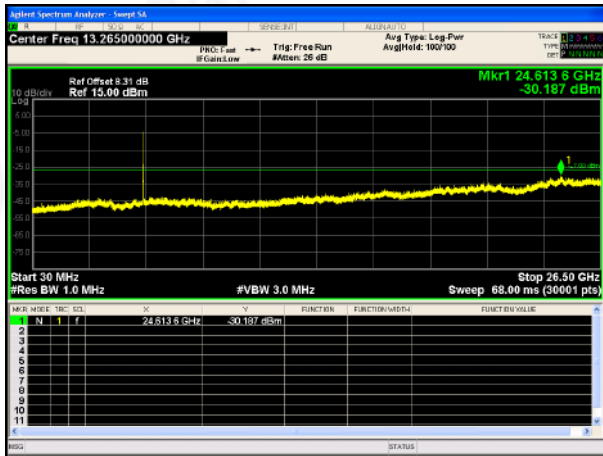

802.11n20 on channel 40

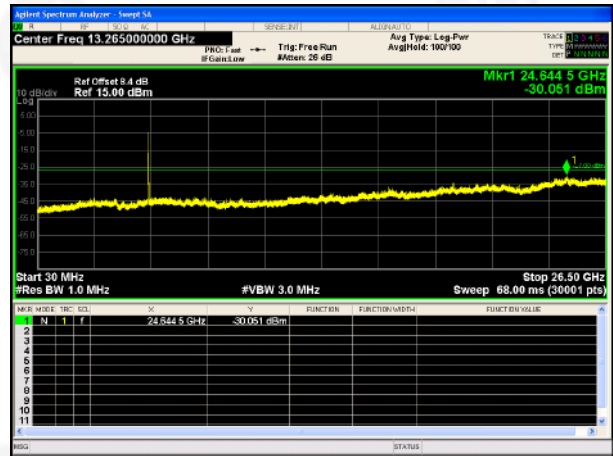


802.11n20 on channel 48

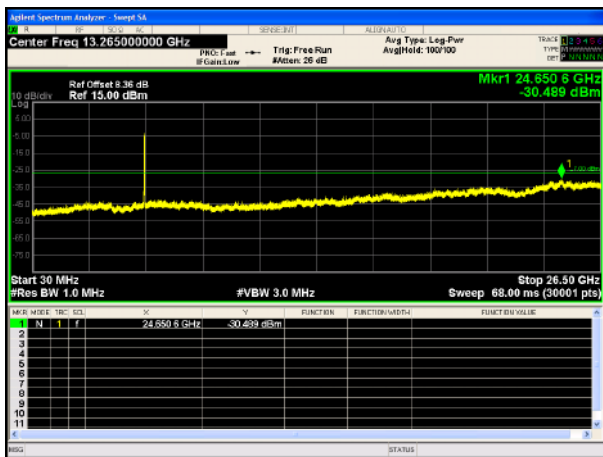




Test Plot

802.11n40 on channel 38

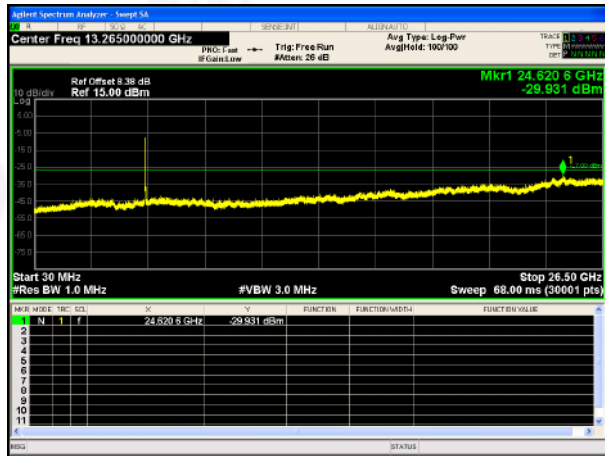


802.11n40 on channel 46

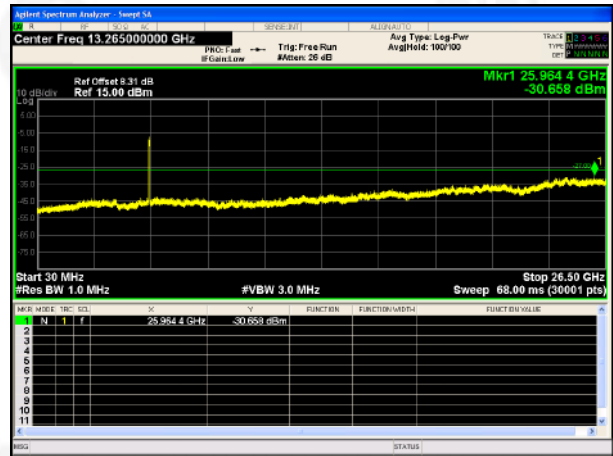

Test Plot

802.11ac80 on channel 42

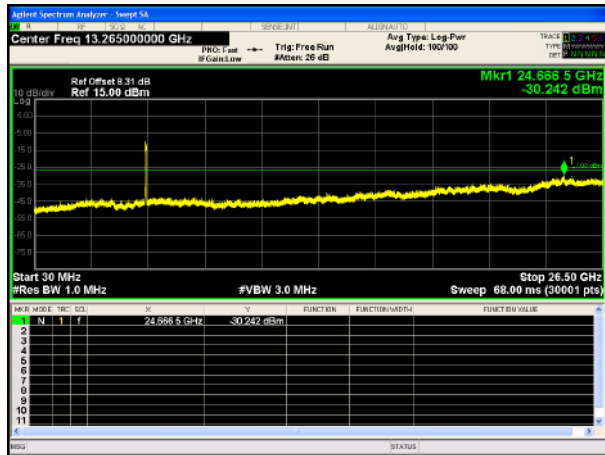



10. Frequency Stability Measurement

10.1 LIMIT

Manufactures of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

The transmitter center frequency tolerance shall be ± 20 ppm maximum for the 5 GHz band (IEEE 802.11n specification).

10.2 TEST PROCEDURES

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. EUT have transmitted absence of modulation signal and fixed channelize.
3. Set the spectrum analyzer span to view the entire absence of modulation emissions bandwidth.
4. Set RBW = 10 kHz, VBW = 10 kHz with peak detector and maxhold settings.
5. fc is declaring of channel frequency. Then the frequency error formula is $(f_c - f) / f_c \times 10^6$ ppm and the limit is less than ± 20 ppm (IEEE 802.11n specification).
6. The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value
7. Extreme temperature is $-20^{\circ}\text{C} \sim 70^{\circ}\text{C}$.

10.3 TEST SETUP LAYOUT



10.4 EUT OPERATION DURING TEST

The EUT was programmed to be in continuously un-modulation transmitting mode.

10.5 TEST RESULTS

Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1012 hPa	Test Voltage :	DC 3.85V
Test Mode :	TX		



Mode	TX Type	Frequency (MHz)	Temperature (°C)	Voltage (VAC)	Measured Frequency (MHz)	Limit (MHz)	Verdict
802.11a	SISO	5180	20	102	5180.020	5150 to 5250	Pass
				120	5180.020	5150 to 5250	Pass
				138	5180.020	5150 to 5250	Pass
			-30	120	5180.060	5150 to 5250	Pass
			-20	120	5180.040	5150 to 5250	Pass
			-10	120	5180.000	5150 to 5250	Pass
			0	120	5180.020	5150 to 5250	Pass
			10	120	5180.020	5150 to 5250	Pass
			30	120	5180.100	5150 to 5250	Pass
			40	120	5180.040	5150 to 5250	Pass
			50	120	5180.040	5150 to 5250	Pass
			5200	20	102	5200.060	5150 to 5250
		120			5200.020	5150 to 5250	Pass
		138			5200.000	5150 to 5250	Pass
		-30		120	5200.040	5150 to 5250	Pass
		-20		120	5200.040	5150 to 5250	Pass
		-10		120	5200.100	5150 to 5250	Pass
		0		120	5200.040	5150 to 5250	Pass
		10		120	5200.060	5150 to 5250	Pass
		30		120	5200.000	5150 to 5250	Pass
		40		120	5200.020	5150 to 5250	Pass
		50		120	5200.000	5150 to 5250	Pass
		5240		20	102	5240.040	5150 to 5250
			120		5240.020	5150 to 5250	Pass
			138		5240.000	5150 to 5250	Pass
			-30	120	5240.040	5150 to 5250	Pass
			-20	120	5240.000	5150 to 5250	Pass
			-10	120	5240.060	5150 to 5250	Pass
			0	120	5240.040	5150 to 5250	Pass
			10	120	5240.080	5150 to 5250	Pass
			30	120	5240.060	5150 to 5250	Pass
			40	120	5240.020	5150 to 5250	Pass
			50	120	5240.060	5150 to 5250	Pass
			5745	20	102	5745.020	5725 to 5850
		120			5745.020	5725 to 5850	Pass
		138			5745.040	5725 to 5850	Pass



			-30	120	5745.080	5725 to 5850	Pass		
			-20	120	5745.040	5725 to 5850	Pass		
			-10	120	5745.120	5725 to 5850	Pass		
			0	120	5745.040	5725 to 5850	Pass		
			10	120	5745.020	5725 to 5850	Pass		
			30	120	5745.060	5725 to 5850	Pass		
			40	120	5745.080	5725 to 5850	Pass		
			50	120	5745.060	5725 to 5850	Pass		
		5785	20	102	5785.020	5725 to 5850	Pass		
				120	5785.060	5725 to 5850	Pass		
				138	5785.040	5725 to 5850	Pass		
			-30	120	5785.060	5725 to 5850	Pass		
			-20	120	5785.040	5725 to 5850	Pass		
			-10	120	5785.080	5725 to 5850	Pass		
			0	120	5785.080	5725 to 5850	Pass		
			10	120	5785.100	5725 to 5850	Pass		
			30	120	5785.080	5725 to 5850	Pass		
			40	120	5785.100	5725 to 5850	Pass		
			50	120	5785.040	5725 to 5850	Pass		
			5825	20	102	5825.100	5725 to 5850	Pass	
		120			5825.120	5725 to 5850	Pass		
		138			5825.020	5725 to 5850	Pass		
		-30		120	5825.040	5725 to 5850	Pass		
		-20		120	5825.040	5725 to 5850	Pass		
		-10		120	5825.040	5725 to 5850	Pass		
		0		120	5825.080	5725 to 5850	Pass		
		10		120	5825.100	5725 to 5850	Pass		
		30		120	5825.100	5725 to 5850	Pass		
		40		120	5825.100	5725 to 5850	Pass		
		50		120	5825.080	5725 to 5850	Pass		
		802.11n (HT20)		SISO	5180	20	102	5180.060	5150 to 5250
			120				5180.000	5150 to 5250	Pass
			138				5180.080	5150 to 5250	Pass
-30	120		5180.060			5150 to 5250	Pass		
-20	120		5180.100			5150 to 5250	Pass		
-10	120		5180.020			5150 to 5250	Pass		
0	120		5180.080			5150 to 5250	Pass		
10	120		5180.040			5150 to 5250	Pass		



			30	120	5180.100	5150 to 5250	Pass	
			40	120	5180.040	5150 to 5250	Pass	
			50	120	5180.060	5150 to 5250	Pass	
		5200	20	102	5200.100	5150 to 5250	Pass	
				120	5200.060	5150 to 5250	Pass	
				138	5200.060	5150 to 5250	Pass	
			-30	120	5200.060	5150 to 5250	Pass	
			-20	120	5200.020	5150 to 5250	Pass	
			-10	120	5200.040	5150 to 5250	Pass	
			0	120	5200.020	5150 to 5250	Pass	
			10	120	5200.080	5150 to 5250	Pass	
			30	120	5199.980	5150 to 5250	Pass	
			40	120	5200.040	5150 to 5250	Pass	
			50	120	5200.000	5150 to 5250	Pass	
			5240	20	102	5240.100	5150 to 5250	Pass
					120	5239.980	5150 to 5250	Pass
					138	5240.040	5150 to 5250	Pass
		-30		120	5239.980	5150 to 5250	Pass	
		-20		120	5240.060	5150 to 5250	Pass	
		-10		120	5240.040	5150 to 5250	Pass	
		0		120	5240.040	5150 to 5250	Pass	
		10		120	5240.000	5150 to 5250	Pass	
		30		120	5240.000	5150 to 5250	Pass	
		40		120	5240.120	5150 to 5250	Pass	
		50		120	5240.080	5150 to 5250	Pass	
		5745	20	102	5745.100	5725 to 5850	Pass	
				120	5745.100	5725 to 5850	Pass	
				138	5745.060	5725 to 5850	Pass	
			-30	120	5745.100	5725 to 5850	Pass	
			-20	120	5745.100	5725 to 5850	Pass	
			-10	120	5745.020	5725 to 5850	Pass	
			0	120	5745.040	5725 to 5850	Pass	
			10	120	5745.020	5725 to 5850	Pass	
			30	120	5745.100	5725 to 5850	Pass	
			40	120	5745.060	5725 to 5850	Pass	
			50	120	5745.040	5725 to 5850	Pass	
		5785	20	102	5785.040	5725 to 5850	Pass	
				120	5785.040	5725 to 5850	Pass	



				138	5785.040	5725 to 5850	Pass
			-30	120	5785.080	5725 to 5850	Pass
			-20	120	5785.100	5725 to 5850	Pass
			-10	120	5785.080	5725 to 5850	Pass
			0	120	5785.080	5725 to 5850	Pass
			10	120	5785.060	5725 to 5850	Pass
			30	120	5785.120	5725 to 5850	Pass
			40	120	5785.060	5725 to 5850	Pass
			50	120	5785.000	5725 to 5850	Pass
		5825	20	102	5825.040	5725 to 5850	Pass
				120	5825.040	5725 to 5850	Pass
				138	5825.060	5725 to 5850	Pass
			-30	120	5825.060	5725 to 5850	Pass
			-20	120	5825.060	5725 to 5850	Pass
			-10	120	5825.080	5725 to 5850	Pass
			0	120	5825.100	5725 to 5850	Pass
			10	120	5825.040	5725 to 5850	Pass
			30	120	5825.060	5725 to 5850	Pass
			40	120	5825.100	5725 to 5850	Pass
			50	120	5825.080	5725 to 5850	Pass
802.11n (HT40)	SISO	5190	20	102	5190.160	5150 to 5250	Pass
				120	5190.120	5150 to 5250	Pass
				138	5190.080	5150 to 5250	Pass
			-30	120	5190.080	5150 to 5250	Pass
			-20	120	5190.040	5150 to 5250	Pass
			-10	120	5190.080	5150 to 5250	Pass
			0	120	5190.080	5150 to 5250	Pass
			10	120	5190.080	5150 to 5250	Pass
			30	120	5190.040	5150 to 5250	Pass
			40	120	5190.080	5150 to 5250	Pass
			50	120	5190.120	5150 to 5250	Pass
		5230	20	102	5230.080	5150 to 5250	Pass
				120	5230.080	5150 to 5250	Pass
				138	5230.040	5150 to 5250	Pass
			-30	120	5230.080	5150 to 5250	Pass
			-20	120	5230.080	5150 to 5250	Pass
			-10	120	5230.080	5150 to 5250	Pass
			0	120	5230.080	5150 to 5250	Pass



			10	120	5230.000	5150 to 5250	Pass		
			30	120	5230.080	5150 to 5250	Pass		
			40	120	5230.040	5150 to 5250	Pass		
			50	120	5230.040	5150 to 5250	Pass		
		5755	20	102	5755.080	5725 to 5850	Pass		
				120	5755.120	5725 to 5850	Pass		
				138	5755.160	5725 to 5850	Pass		
			-30	120	5755.120	5725 to 5850	Pass		
			-20	120	5755.040	5725 to 5850	Pass		
			-10	120	5755.160	5725 to 5850	Pass		
			0	120	5755.040	5725 to 5850	Pass		
			10	120	5755.040	5725 to 5850	Pass		
			30	120	5755.160	5725 to 5850	Pass		
			40	120	5755.160	5725 to 5850	Pass		
			50	120	5755.120	5725 to 5850	Pass		
			5795	20	102	5795.120	5725 to 5850	Pass	
		120			5795.080	5725 to 5850	Pass		
		138			5795.120	5725 to 5850	Pass		
		-30		120	5795.120	5725 to 5850	Pass		
		-20		120	5795.120	5725 to 5850	Pass		
		-10		120	5795.080	5725 to 5850	Pass		
		0		120	5795.120	5725 to 5850	Pass		
		10		120	5795.080	5725 to 5850	Pass		
		30		120	5795.160	5725 to 5850	Pass		
		40		120	5795.120	5725 to 5850	Pass		
		50		120	5795.120	5725 to 5850	Pass		
		802.11ac (VHT20)		SISO	5180	20	102	5180.040	5150 to 5250
			120				5180.080	5150 to 5250	Pass
			138				5180.040	5150 to 5250	Pass
			-30			120	5180.020	5150 to 5250	Pass
			-20			120	5180.020	5150 to 5250	Pass
			-10			120	5180.020	5150 to 5250	Pass
0	120		5180.020			5150 to 5250	Pass		
10	120		5180.060			5150 to 5250	Pass		
30	120		5180.080			5150 to 5250	Pass		
40	120		5180.060			5150 to 5250	Pass		
50	120		5180.080		5150 to 5250	Pass			
5200	20		102		5200.080	5150 to 5250	Pass		



			120	5200.040	5150 to 5250	Pass	
			138	5200.000	5150 to 5250	Pass	
		-30	120	5199.980	5150 to 5250	Pass	
		-20	120	5200.040	5150 to 5250	Pass	
		-10	120	5200.020	5150 to 5250	Pass	
		0	120	5200.040	5150 to 5250	Pass	
		10	120	5200.020	5150 to 5250	Pass	
		30	120	5200.000	5150 to 5250	Pass	
		40	120	5200.020	5150 to 5250	Pass	
		50	120	5200.040	5150 to 5250	Pass	
	5240	20	102	5240.020	5150 to 5250	Pass	
			120	5240.020	5150 to 5250	Pass	
			138	5240.100	5150 to 5250	Pass	
			-30	120	5240.040	5150 to 5250	Pass
			-20	120	5240.080	5150 to 5250	Pass
			-10	120	5240.020	5150 to 5250	Pass
			0	120	5240.060	5150 to 5250	Pass
			10	120	5240.000	5150 to 5250	Pass
			30	120	5239.980	5150 to 5250	Pass
			40	120	5240.020	5150 to 5250	Pass
			50	120	5239.980	5150 to 5250	Pass
		5745	20	102	5745.040	5725 to 5850	Pass
	120			5745.000	5725 to 5850	Pass	
	138			5745.040	5725 to 5850	Pass	
			-30	120	5745.060	5725 to 5850	Pass
			-20	120	5745.080	5725 to 5850	Pass
			-10	120	5745.060	5725 to 5850	Pass
			0	120	5745.060	5725 to 5850	Pass
			10	120	5745.020	5725 to 5850	Pass
			30	120	5745.020	5725 to 5850	Pass
			40	120	5745.060	5725 to 5850	Pass
			50	120	5745.040	5725 to 5850	Pass
	5785		20	102	5785.080	5725 to 5850	Pass
		120		5785.040	5725 to 5850	Pass	
		138		5785.060	5725 to 5850	Pass	
			-30	120	5785.040	5725 to 5850	Pass
			-20	120	5785.080	5725 to 5850	Pass
			-10	120	5785.080	5725 to 5850	Pass



		5825	0	120	5785.080	5725 to 5850	Pass			
			10	120	5785.100	5725 to 5850	Pass			
			30	120	5785.000	5725 to 5850	Pass			
			40	120	5785.060	5725 to 5850	Pass			
			50	120	5785.080	5725 to 5850	Pass			
		5825	20	102	5825.040	5725 to 5850	Pass			
				120	5824.980	5725 to 5850	Pass			
				138	5825.120	5725 to 5850	Pass			
			-30	120	5825.100	5725 to 5850	Pass			
			-20	120	5825.040	5725 to 5850	Pass			
			-10	120	5825.060	5725 to 5850	Pass			
			0	120	5825.120	5725 to 5850	Pass			
			10	120	5825.060	5725 to 5850	Pass			
			30	120	5825.040	5725 to 5850	Pass			
			40	120	5825.060	5725 to 5850	Pass			
			50	120	5825.040	5725 to 5850	Pass			
			802.11ac (VHT40)	SISO	5190	20	102	5190.000	5150 to 5250	Pass
							120	5190.040	5150 to 5250	Pass
		138					5190.040	5150 to 5250	Pass	
		-30				120	5190.120	5150 to 5250	Pass	
		-20				120	5190.160	5150 to 5250	Pass	
		-10				120	5190.080	5150 to 5250	Pass	
		0				120	5190.120	5150 to 5250	Pass	
10	120	5190.080				5150 to 5250	Pass			
30	120	5190.120				5150 to 5250	Pass			
40	120	5190.080				5150 to 5250	Pass			
50	120	5190.040			5150 to 5250	Pass				
5230	20	102			5230.040	5150 to 5250	Pass			
		120			5230.080	5150 to 5250	Pass			
		138			5230.040	5150 to 5250	Pass			
	-30	120			5230.080	5150 to 5250	Pass			
	-20	120			5230.040	5150 to 5250	Pass			
	-10	120			5230.040	5150 to 5250	Pass			
	0	120			5230.040	5150 to 5250	Pass			
	10	120			5230.040	5150 to 5250	Pass			
	30	120			5230.040	5150 to 5250	Pass			
	40	120	5230.040	5150 to 5250	Pass					
50	120	5230.080	5150 to 5250	Pass						



		5755	20	102	5755.080	5725 to 5850	Pass
				120	5755.120	5725 to 5850	Pass
				138	5755.080	5725 to 5850	Pass
			-30	120	5755.120	5725 to 5850	Pass
			-20	120	5755.160	5725 to 5850	Pass
			-10	120	5755.080	5725 to 5850	Pass
			0	120	5755.080	5725 to 5850	Pass
			10	120	5755.120	5725 to 5850	Pass
			30	120	5755.160	5725 to 5850	Pass
			40	120	5755.080	5725 to 5850	Pass
			50	120	5755.120	5725 to 5850	Pass
		5795	20	102	5795.040	5725 to 5850	Pass
				120	5795.120	5725 to 5850	Pass
				138	5795.080	5725 to 5850	Pass
			-30	120	5795.040	5725 to 5850	Pass
			-20	120	5795.080	5725 to 5850	Pass
			-10	120	5795.120	5725 to 5850	Pass
			0	120	5795.120	5725 to 5850	Pass
			10	120	5795.080	5725 to 5850	Pass
			30	120	5795.120	5725 to 5850	Pass
			40	120	5795.120	5725 to 5850	Pass
50	120	5795.080	5725 to 5850	Pass			
802.11ac (VHT80)	SISO	5210	20	102	5210.075	5150 to 5250	Pass
				120	5210.150	5150 to 5250	Pass
				138	5210.075	5150 to 5250	Pass
			-30	120	5210.150	5150 to 5250	Pass
			-20	120	5210.075	5150 to 5250	Pass
			-10	120	5210.150	5150 to 5250	Pass
			0	120	5210.075	5150 to 5250	Pass
			10	120	5210.000	5150 to 5250	Pass
			30	120	5210.150	5150 to 5250	Pass
			40	120	5210.075	5150 to 5250	Pass
		50	120	5210.075	5150 to 5250	Pass	
		5775	20	102	5775.150	5725 to 5850	Pass
				120	5775.150	5725 to 5850	Pass
				138	5775.150	5725 to 5850	Pass
			-30	120	5775.150	5725 to 5850	Pass
			-20	120	5775.075	5725 to 5850	Pass



			-10	120	5775.150	5725 to 5850	Pass
			0	120	5775.075	5725 to 5850	Pass
			10	120	5775.150	5725 to 5850	Pass
			30	120	5775.075	5725 to 5850	Pass
			40	120	5775.150	5725 to 5850	Pass
			50	120	5775.150	5725 to 5850	Pass



11.ANTENNA REQUIREMENT

Standard requirement:	FCC Part15 C Section 15.203
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.	
EUT Antenna:	
The antenna is PIFA Antenna, the best case gain of the antenna is 2.7dBi, reference to the appendix II for details	



12. TEST SETUP PHOTO

Reference to the appendix I for details.

13. EUT CONSTRUCTIONAL DETAILS

Reference to the appendix II for details.

***** END OF REPORT *****