

		NV	30	0.00	0.000000	20	PASS
		NV	40	0.00	0.000000	20	PASS
		NV	50	0.00	0.000000	20	PASS
11AC80S ISO	5210	NV	-30	0.00	0.000000	20	PASS
		NV	-20	0.00	0.000000	20	PASS
		NV	-10	0.00	0.000000	20	PASS
		NV	0	-80000.00	-15.355086	20	PASS
		NV	10	0.00	0.000000	20	PASS
		NV	20	0.00	0.000000	20	PASS
		NV	30	0.00	0.000000	20	PASS
		NV	40	0.00	0.000000	20	PASS
		NV	50	0.00	0.000000	20	PASS
	5775	NV	-30	0.00	0.000000	20	PASS
		NV	-20	0.00	0.000000	20	PASS
		NV	-10	-80000.00	-13.852814	20	PASS
		NV	0	0.00	0.000000	20	PASS
		NV	10	0.00	0.000000	20	PASS
		NV	20	0.00	0.000000	20	PASS
		NV	30	-80000.00	-13.852814	20	PASS
		NV	40	0.00	0.000000	20	PASS
		NV	50	0.00	0.000000	20	PASS

8.5 UNDESIRABLE RADIATED SPURIOUS EMISSION

8.5.1 Applicable Standard

According to FCC Part 15.407 (b)
According to 789033 D02 Section II(G)

8.5.2 Conformance Limit

For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.725-5.85 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

The emission measurements shall be performed using a minimum resolution bandwidth of 1 MHz. A lower resolution bandwidth may be employed near the band edge, when necessary, provided the measured energy is integrated to show the total power over 1 MHz.

Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209 The emissions from an intentional radiator shall not exceed the field strength levels specified in the following table 15.209(a):

Restricted Frequency(MHz)	Field Strength ($\mu\text{V/m}$)	Field Strength (dB $\mu\text{V/m}$)	Measurement Distance
0.009-0.490	2400/F(KHz)	20 log (uV/m)	300
0.490-1.705	2400/F(KHz)	20 log (uV/m)	30
1.705-30	30	29.5	30
30-88	100	40	3
88-216	150	43.5	3
216-960	200	46	3
Above 960	500	54	3

The provisions of §15.205 apply to intentional radiators operating under this section, 15.205 Restricted bands of operation

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
10.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(2)
13.36-13.41			

- Remark:
1. Emission level in $\text{dBuV/m} = 20 \log(\mu\text{V/m})$
 2. Measurement was performed at an antenna to the closed point of EUT distance of meters.
 3. Only spurious frequency is permitted to locate within the Restricted Bands specified in provision of ξ 15.205, and the emissions located in restricted bands also comply with 15.209 limit.

8.5.3 Test Configuration

Test according to clause 6.2 radio frequency test setup

8.5.4 Test Procedure

■ Unwanted Emissions Measurements below 1000 MHz

Compliance shall be demonstrated using CISPR quasi-peak detection; however, peak detection is permitted as an alternative to quasi-peak detection.

The EUT was placed on a turn table which is 0.8m above ground plane.

And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.

Repeat above procedures until all frequency measured was complete.

We use software control the EUT, Let EUT hopping on and transmit with highest power, All the modes have been tested and the worst result was reported.

Use the following spectrum analyzer settings:

Set RBW=120kHz for $f < 1 \text{ GHz}$ (30MHz to 1GHz), 200Hz for $f < 150\text{kHz}$ (9kHz to 150kHz), 9kHz for $< 30\text{MHz}$

(150kHz to 30kHz).

Set the VBW > RBW.

Detector = Peak.

Trace mode = max hold.

Follow the guidelines in ANSI C63.10-2013 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization, etc. A pre-amp and a high pass filter are required for this test, in order to provide the measuring system with sufficient sensitivity. Allow the trace to stabilize. The peak reading of the emission, after being corrected by the antenna factor, cable loss, pre-amp gain, etc., is the peak field strength, which must comply with the limit specified in Section 15.35(b). Submit this data.

Repeat above procedures until all frequency measured was complete.

■ Unwanted Maximum peak Emissions Measurements above 1000 MHz

Maximum emission levels are measured by setting the analyzer as follows:

RBW = 1 MHz.

VBW \geq 3 MHz.

Detector = Peak.

Sweep time = auto.

Trace mode = max hold.

Allow sweeps to continue until the trace stabilizes. Note that if the transmission is not continuous, the time required for the trace to stabilize will increase by a factor of approximately $1/x$, where x is the duty cycle. For example, at 50 percent duty cycle, the measurement time will increase by a factor of two relative to measurement time for continuous transmission.

■ Unwanted Average Emissions Measurements above 1000 MHz

Method VB (Averaging using reduced video bandwidth): Alternative method.

RBW = 1 MHz.

Video bandwidth. • If the EUT is configured to transmit with duty cycle \geq 98 percent, set $\text{VBW} \leq \text{RBW}/100$ (i.e., 10 kHz) but not less than 10 Hz.

• If the EUT duty cycle is $<$ 98 percent, set $\text{VBW} \geq 1/T$, where T is defined in section II.B.1.a).

Video bandwidth mode or display mode • The instrument shall be set to ensure that video filtering is applied in the power domain. Typically, this requires setting the detector mode to RMS and setting the Average-VBW Type to Power (RMS).

• As an alternative, the analyzer may be set to linear detector mode. Ensure that video filtering is applied in linear voltage domain (rather than in a log or dB domain). Some analyzers require linear display mode in order to accomplish this. Others have a setting for Average-VBW Type, which can be set to "Voltage"

regardless of the display mode.

Detector = Peak.

Sweep time = auto.

Trace mode = max hold.

Allow max hold to run for at least 50 traces if the transmitted signal is continuous or has at least 98 percent duty cycle. For lower duty cycles, increase the minimum number of traces by a factor of $1/x$, where x is the duty cycle. For example, use at least 200 traces if the duty cycle is 25 percent. (If a specific emission is demonstrated to be continuous—i.e., 100 percent duty cycle—rather than turning on and off with the transmit cycle, at least 50 traces shall be averaged.)

■ Band edge measurements.

Unwanted band-edge emissions may be measured using either of the special band-edge measurement techniques (the marker-delta or integration methods) described below. Note that the marker-delta method is primarily a radiated measurement technique that requires the 99% occupied bandwidth edge to be within 2 MHz of the authorized band edge, whereas the integration method can be used in either a radiated or conducted measurement without any special requirement with regards to the displacement of the unwanted emission(s) relative to the authorized bandwidth.

Marker-Delta Method.

The marker-delta method, as described in ANSI C63.10, can be used to perform measurements of the radiated unwanted emissions level of emissions provided that the 99% occupied bandwidth of the fundamental is within 2 MHz of the authorized band-edge.

8.5.5 Test Results

The voltage 120V & 240V and the modes 802.11a/n/ac has been tested and the worst result recorded as below:

- For Undesirable radiated Spurious Emission in U-NII – 1
 All the modes 802.11a/n/ac has been tested and the worst result 802.11a recorded as below:
 - Undesirable radiated Spurious Emission Above 1GHz (1GHz to 40GHz)

Temperature :	28°C	Test By:	HYD
Humidity :	65 %	Frequency(MHz):	5180
Test mode:	802.11a		

Freq. (MHz)	Ant.Pol. H/V	Field Strength (dBuV/m)	E.I.R.P (dBm)	Limit (dBm)	Over(dB)
11786.23	V	56.3	-38.93	-27.00	-11.93
14414.67	V	58.19	-37.04	-27.00	-10.04
17826.55	V	66.35	-28.88	-27.00	-1.88
11834.02	H	56.18	-39.05	-27.00	-12.05
15224.02	H	58.38	-36.85	-27.00	-9.85
17992.19	H	49.3	-45.93	-27.00	-18.93

Temperature :	28°C	Test By:	HYD
Humidity :	65 %	Frequency(MHz):	5220
Test mode:	802.11a		

Freq. (MHz)	Ant.Pol. H/V	Field Strength (dBuV/m)	E.I.R.P (dBm)	Limit (dBm)	Over(dB)
12121.35	V	57.59	-37.64	-27.00	-10.64
15110.04	V	57.67	-37.56	-27.00	-10.56
17834.28	V	66.08	-29.15	-27.00	-2.15
12182.82	H	56.93	-38.30	-27.00	-11.30
14671.07	H	57.81	-37.42	-27.00	-10.42
17834.28	H	49.8	-45.43	-27.00	-18.43

Temperature :	28°C	Test By:	HYD
Humidity :	65 %	Frequency(MHz):	5240
Test mode:	802.11a		

Freq. (MHz)	Ant.Pol. H/V	Field Strength (dBuV/m)	E.I.R.P (dBm)	Limit (dBm)	Over(dB)
12095.1	V	56.56	-38.67	-27.00	-11.67
14408.42	V	57.82	-37.41	-27.00	-10.41
17865.23	V	65.44	-29.79	-27.00	-2.79
11894.03	H	57.02	-38.21	-27.00	-11.21
14205.8	H	57.93	-37.30	-27.00	-10.30
18000	H	47.8	-47.43	-27.00	-20.43

- Note:** (1) All Readings are Peak Value (VBW=3MHz) and AV Value (VBW=10Hz).
 (2) Emission Level= Reading Level+Probe Factor +Cable Loss.
 (3)EIRP[dBm] = E[dBuV/m] + 20 log(d[meters]) - 104.77
 d is the measurement distance in 3 meters

Frequency: 5180					
Freq. (MHz)	Ant.Pol.	Emission Level(dBuV/m)	Limit 3m(dBuV/m)	Over(dB)	Detector
11786.23	V	56.30	74.00	-17.70	peak
11786.23	V	40.20	54.00	-13.80	AVG
14414.67	V	58.19	74.00	-15.81	peak
14414.67	V	41.70	54.00	-12.30	AVG
17826.55	V	66.35	74.00	-7.65	peak
17826.55	V	50.20	54.00	-3.80	AVG
11834.02	H	56.18	74.00	-17.82	peak
11834.02	H	40.20	54.00	-13.80	AVG
15224.02	H	58.38	74.00	-15.62	peak
15224.02	H	41.50	54.00	-12.50	AVG
17992.19	H	65.87	74.00	-8.13	peak
17992.19	H	49.30	54.00	-4.70	AVG

Frequency: 5220					
Freq. (MHz)	Ant.Pol.	Emission Level(dBuV/m)	Limit 3m(dBuV/m)	Over(dB)	Detector
12121.35	V	57.59	74.00	-16.41	peak
12121.35	V	41.70	54.00	-12.30	AVG
15110.04	V	57.67	74.00	-16.33	peak
15110.04	V	41.30	54.00	-12.70	AVG
17834.28	V	66.08	74.00	-7.92	peak
17834.28	V	50.10	54.00	-3.90	AVG
12182.82	H	56.93	74.00	-17.07	peak
12182.82	H	40.70	54.00	-13.30	AVG
14671.07	H	57.81	74.00	-16.19	peak
14671.07	H	41.60	54.00	-12.40	AVG
17834.28	H	66.12	74.00	-7.88	peak
17834.28	H	49.80	54.00	-4.20	AVG

Frequency: 5240					
Freq. (MHz)	Ant.Pol.	Emission Level(dBuV/m)	Limit 3m(dBuV/m)	Over(dB)	Detector
12095.10	V	56.56	74.00	-17.44	peak
12095.10	V	40.30	54.00	-13.70	AVG
14408.42	V	57.82	74.00	-16.18	peak
14408.42	V	41.70	54.00	-12.30	AVG
17865.23	V	65.44	74.00	-8.56	peak
17865.23	V	49.30	54.00	-4.70	AVG
11894.03	H	57.02	74.00	-16.98	peak
11894.03	H	41.20	54.00	-12.80	AVG
14205.80	H	57.93	74.00	-16.07	peak
14205.80	H	41.80	54.00	-12.20	AVG
18000.00	H	65.59	74.00	-8.41	peak
18000	H	47.80	54.00	-6.20	AVG

- Note:** (1) All Readings are Peak Value (VBW=3MHz) and Peak Value (VBW=10Hz).
 (2) Emission Level= Reading Level+Correct Factor +Cable Loss.
 (3) Correct Factor= Ant_F + Cab_L - Preamp
 (4)Data of measurement within this frequency range shown "--" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

● Undesirable radiated Undesirable radiated Spurious Emission in Band Edge

Temperature :	28°C	Test By:	HYD
Humidity :	65 %	Frequency(MHz):	5180
Test mode:	802.11a		

Freq. (MHz)	Ant.Pol. H/V	Field Strength (RBW=100KHz) (dBuV/m)	E.I.R.P (dBm)	Limit (dBm)	Verdict
5123.935	H	58.66	-36.57	-27.00	Pass
5137.227	V	58.69	-36.54	-27.00	Pass

Temperature :	28°C	Test By:	HYD
Humidity :	65 %	Frequency(MHz):	5240
Test mode:	802.11a		

Freq. (MHz)	Ant.Pol. H/V	Field Strength (RBW=100KHz) (dBuV/m)	E.I.R.P (dBm)	Limit (dBm)	Verdict
5357.513	H	59.93	-35.30	-27.00	Pass
5351.826	V	59.8	-35.43	-27.00	Pass


Note: (1) All Readings are Peak Value (VBW=300kHz)
 (2) Emission Level= Reading Level+Probe Factor +Cable Loss.
 (3) $EIRP[dBm] = E[dB\mu V/m] + 20 \log(d[meters]) - 104.77$
 d is the measurement distance in 3 meters

UNII Band I

Test Model Undesirable radiated Spurious Emission in Restricted Band (5100-5150MHz)

802.11a
 802.11n(HT20)
 802.11n(HT40)

5180
 5220
 5240
Ant.Pol H

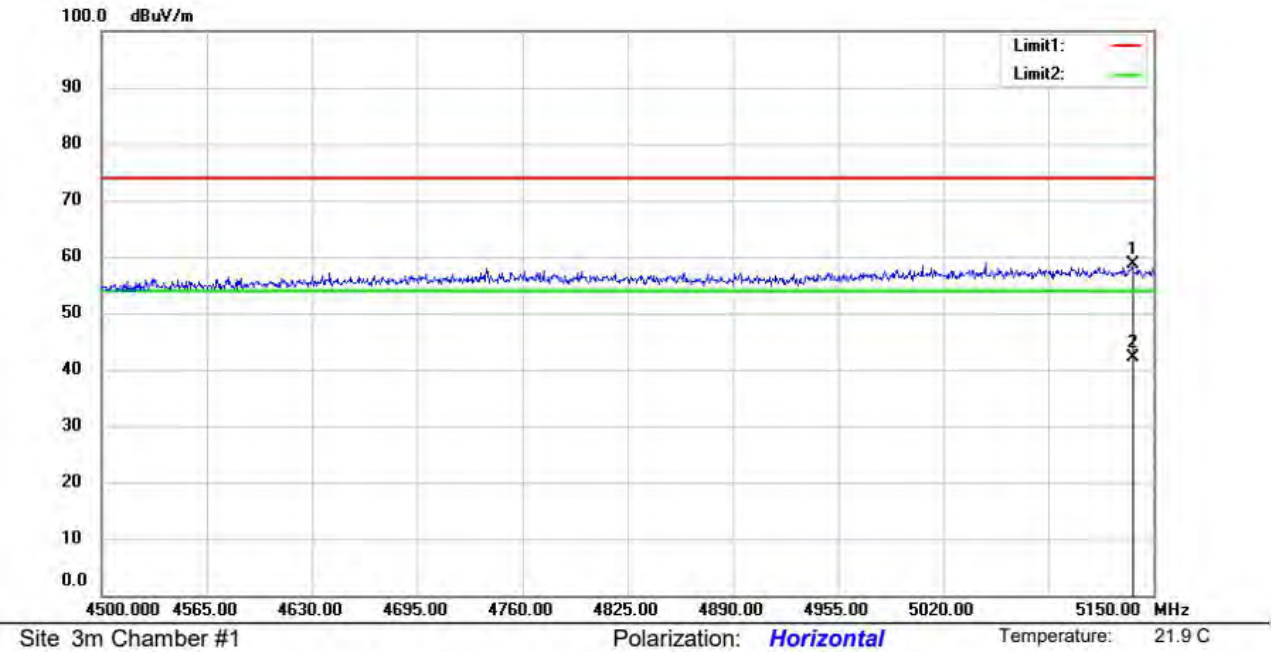


UNII Band I

Test Model Undesirable radiated Spurious Emission in Restricted Band (5100-5150MHz)

802.11a
 802.11n(HT20)
 802.11n(HT40)

5180
 5220
 5240
Ant.Pol V

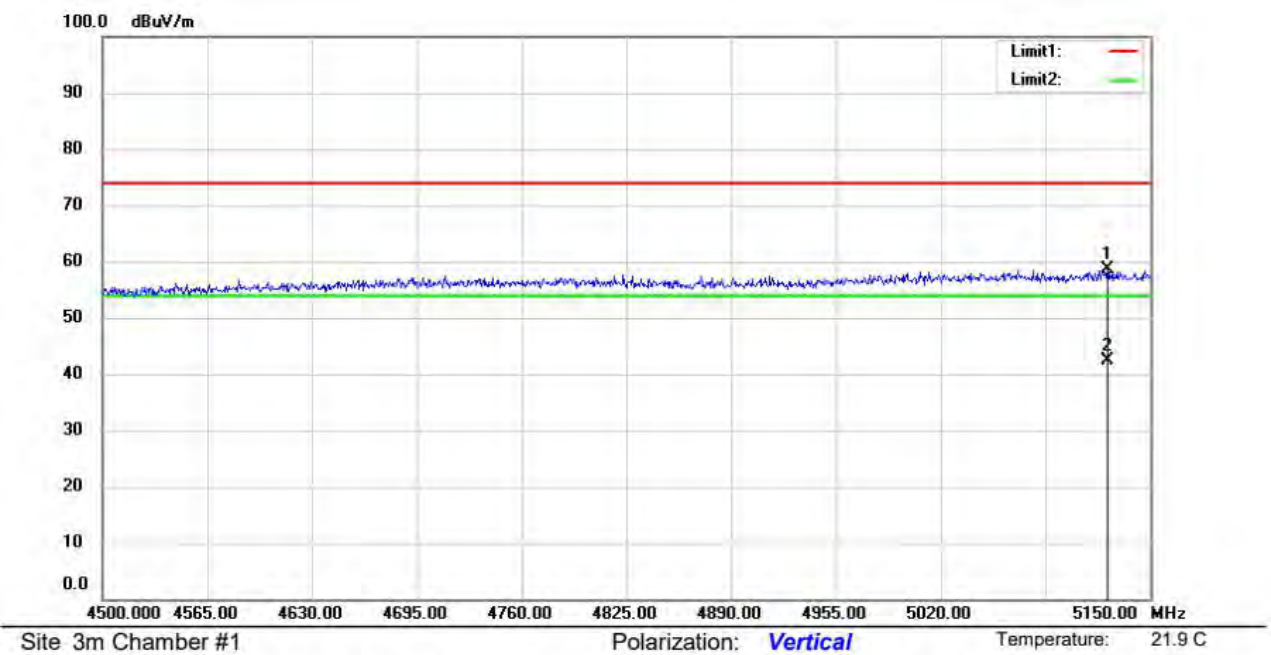


UNII Band I

Test Model Undesirable radiated Spurious Emission in Restricted Band (5350-5400MHz)

5180 802.11a 802.11n(HT20) 802.11n(HT40)

5220 5240 Ant.Pol H

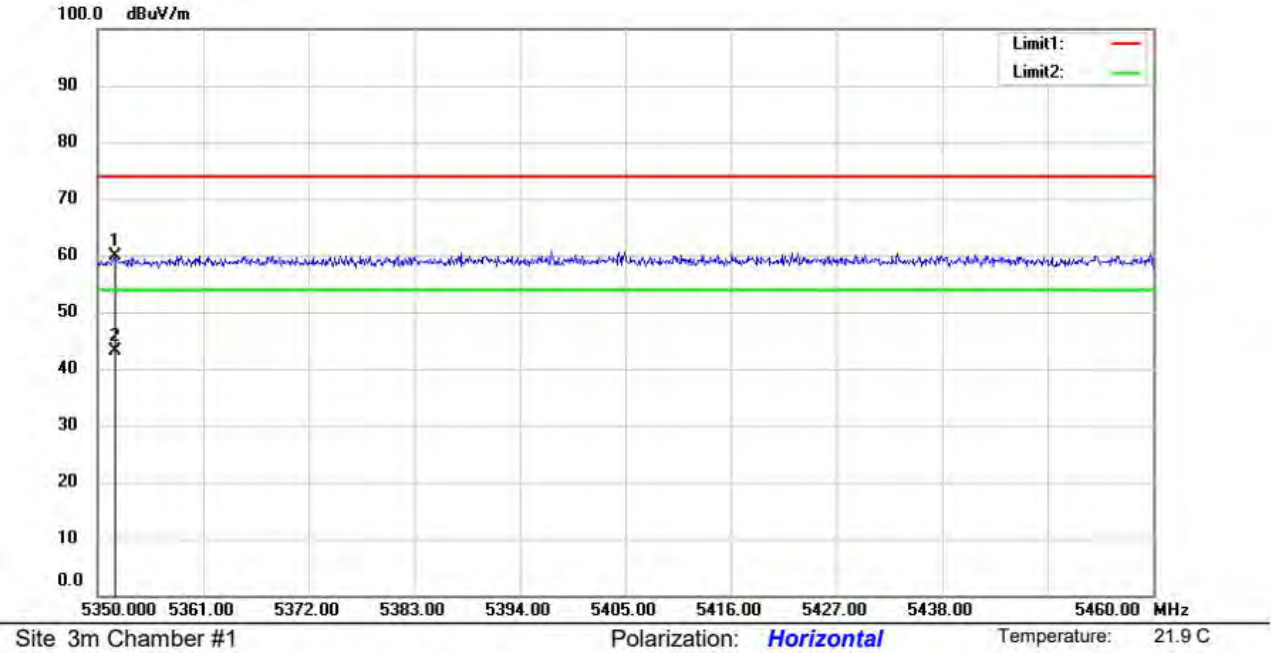


UNII Band I

Test Model Undesirable radiated Spurious Emission in Restricted Band (5350-5400MHz)

5180 802.11a 802.11n(HT20) 802.11n(HT40)

5220 5240 Ant.Pol V

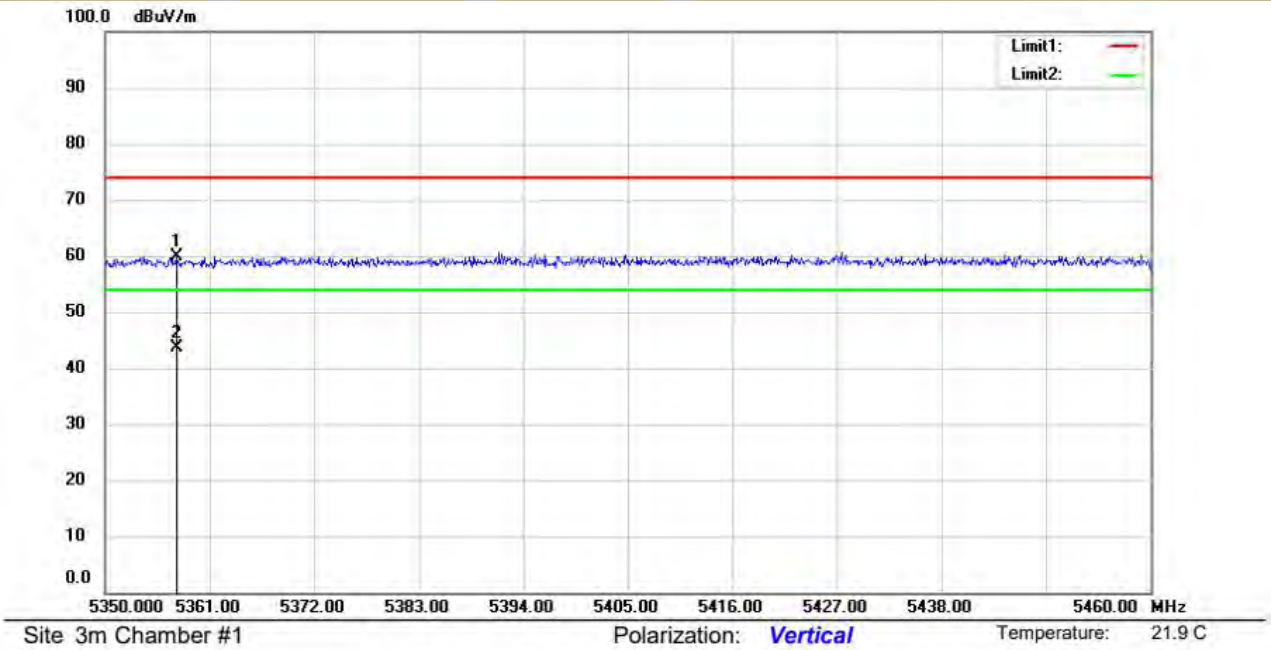

- For Undesirable radiated Spurious Emission in UNII Band III
All the modes 802.11a/n/ac has been tested and the worst result 802.11a recorded as below:
- Undesirable radiated Spurious Emission Above 1GHz (1GHz to 40GHz)

Temperature :	28°C	Test By:	HYD
Humidity :	65 %	Frequency(MHz):	5745
Test mode:	802.11a		

Freq. (MHz)	Ant.Pol. H/V	Field Strength (dBuV/m)	E.I.R.P (dBm)	Limit (dBm)	Over(dB)
11138.7	V	56.35	-38.88	-27.00	-11.88
15114.41	V	57.62	-37.61	-27.00	-10.61
17818.82	V	65.7	-29.53	-27.00	-2.53
12011.49	H	57	-38.23	-27.00	-11.23
15101.31	H	57.4	-37.83	-27.00	-10.83
17816.25	H	50.3	-44.93	-27.00	-17.93

Temperature :	28°C	Test By:	HYD
Humidity :	65 %	Frequency(MHz):	5785
Test mode:	802.11a		

Freq. (MHz)	Ant.Pol. H/V	Field Strength (dBuV/m)	E.I.R.P (dBm)	Limit (dBm)	Over(dB)
11863.13	V	57.37	-37.86	-27.00	-10.86
14835.24	V	57.66	-37.57	-27.00	-10.57
17852.33	V	65.65	-29.58	-27.00	-2.58
11130.65	H	57.41	-37.82	-27.00	-10.82
15276.92	H	58.12	-37.11	-27.00	-10.11
17989.59	H	49.3	-45.93	-27.00	-18.93

Temperature :	28°C	Test By:	HYD
Humidity :	65 %	Frequency(MHz):	5825
Test mode:	802.11a		

Freq. (MHz)	Ant.Pol. H/V	Field Strength (dBuV/m)	E.I.R.P (dBm)	Limit (dBm)	Over(dB)
11149.97	V	56.03	-39.20	-27.00	-12.20
14003.99	V	57.72	-37.51	-27.00	-10.51
17862.65	V	65.92	-29.31	-27.00	-2.31
11840.86	H	56.64	-38.59	-27.00	-11.59
14692.29	H	58	-37.23	-27.00	-10.23
17852.33	H	48.4	-46.83	-27.00	-19.83

- Note:** (1) All Readings are Peak Value(VBW=300kHz)
 (2) Emission Level= Reading Level+Probe Factor +Cable Loss.
 (3)EIRP[dBm] = E[dBμV/m] + 20 log(d[meters]) - 104.77
 d is the measurement distance in 3 meters

Frequency: 802.11a		Frequency(MHz): 5745			
Freq. (MHz)	Ant.Pol.	Emission Level(dBuV/m)	Limit 3m(dBuV/m)	Over(dB)	Detector
11138.70	V	56.35	74.00	-17.65	peak
11138.70	V	40.10	54.00	-13.90	AVG
15114.41	V	57.62	74.00	-16.38	peak
15114.41	V	41.30	54.00	-12.70	AVG
17818.82	V	65.70	74.00	-8.30	peak
17818.82	V	48.60	54.00	-5.40	AVG
12011.49	H	57.00	74.00	-17.00	peak
12011.49	H	41.30	54.00	-12.70	AVG
15101.31	H	57.40	74.00	-16.60	peak
15101.31	H	41.50	54.00	-12.50	AVG
17816.25	H	66.68	74.00	-7.32	peak
17816.25	H	50.30	54.00	-3.70	AVG

Frequency: 802.11a		Frequency(MHz): 5785			
Freq. (MHz)	Ant.Pol.	Emission Level(dBuV/m)	Limit 3m(dBuV/m)	Over(dB)	Detector
11863.13	V	57.37	74.00	-16.63	peak
11863.13	V	41.40	54.00	-12.60	AVG
14835.24	V	57.66	74.00	-16.34	peak
14835.24	V	40.80	54.00	-13.20	AVG
17852.33	V	65.65	74.00	-8.35	peak
17852.33	V	48.80	54.00	-5.20	AVG
11130.65	H	57.41	74.00	-16.59	peak
11130.65	H	40.80	54.00	-13.20	AVG
15276.92	H	58.12	74.00	-15.88	peak
15276.92	H	41.70	54.00	-12.30	AVG
17989.59	H	65.49	74.00	-8.51	peak
17989.59	H	49.30	54.00	-4.70	AVG

Frequency: 802.11a		Frequency(MHz): 5825			
Freq. (MHz)	Ant.Pol.	Emission Level(dBuV/m)	Limit 3m(dBuV/m)	Over(dB)	Detector
11149.97	V	56.03	74.00	-17.97	peak
11149.97	V	40.10	54.00	-13.90	AVG
14003.99	V	57.72	74.00	-16.28	peak
14003.99	V	41.30	54.00	-12.70	AVG
17862.65	V	65.92	74.00	-8.08	peak
17862.65	V	48.60	54.00	-5.40	AVG
11840.86	H	56.64	74.00	-17.36	peak
11840.86	H	40.30	54.00	-13.70	AVG
14692.29	H	58.00	74.00	-16.00	peak
14692.29	H	41.60	54.00	-12.40	AVG
17852.33	H	65.29	74.00	-8.71	peak
17852.33	H	48.40	54.00	-5.60	AVG

- Note:**
- (1) All Readings are Peak Value (VBW=3MHz) and Peak Value (VBW=10Hz).
 - (2) Emission Level= Reading Level+Correct Factor +Cable Loss.
 - (3) Correct Factor= Ant_F + Cab_L - Preamp
 - (4)Data of measurement within this frequency range shown "--" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

● Undesirable radiated Spurious Emission in band edge

Temperature :	28°C	Test By:	HYD
Humidity :	65 %	Frequency:	5745
Test mode:	802.11a		

Freq. (MHz)	Ant.Pol. H/V	Field Strength (RBW=100KHz) (dBuV/m)	E.I.R.P (dBm)	Limit (dBm)	Verdict
5716.031	H	59.29	-35.94	27.0	PASS
5713.675	V	59.36	-35.87	27.0	PASS


Temperature :	28°C	Test By:	HYD
Humidity :	65 %	Frequency:	5825
Test mode:	802.11a		

Freq. (MHz)	Ant.Pol. H/V	Field Strength (RBW=100KHz) (dBuV/m)	E.I.R.P (dBm)	Limit (dBm)	Verdict
5852.762	H	59.66	-35.57	27.0	PASS
5853.944	V	60.28	-34.95	27.0	PASS

Note: (1) All Readings are Peak Value (VBW=3MHz)
 (2) Emission Level= Reading Level+Probe Factor +Cable Loss.
 (3) EIRP[dBm] = E[dBμV/m] + 20 log(d[meters]) - 104.77
 d is the measurement distance in 3 meters


UNII Band III

Test Model	Undesirable radiated		Undesirable radiated		Spurious Emission in Band Edge	
	<input checked="" type="checkbox"/> 802.11a	<input checked="" type="checkbox"/> 5745	<input type="checkbox"/> 802.11n(HT20)	<input type="checkbox"/> 802.11n(HT40)	Ant. Pol: H	

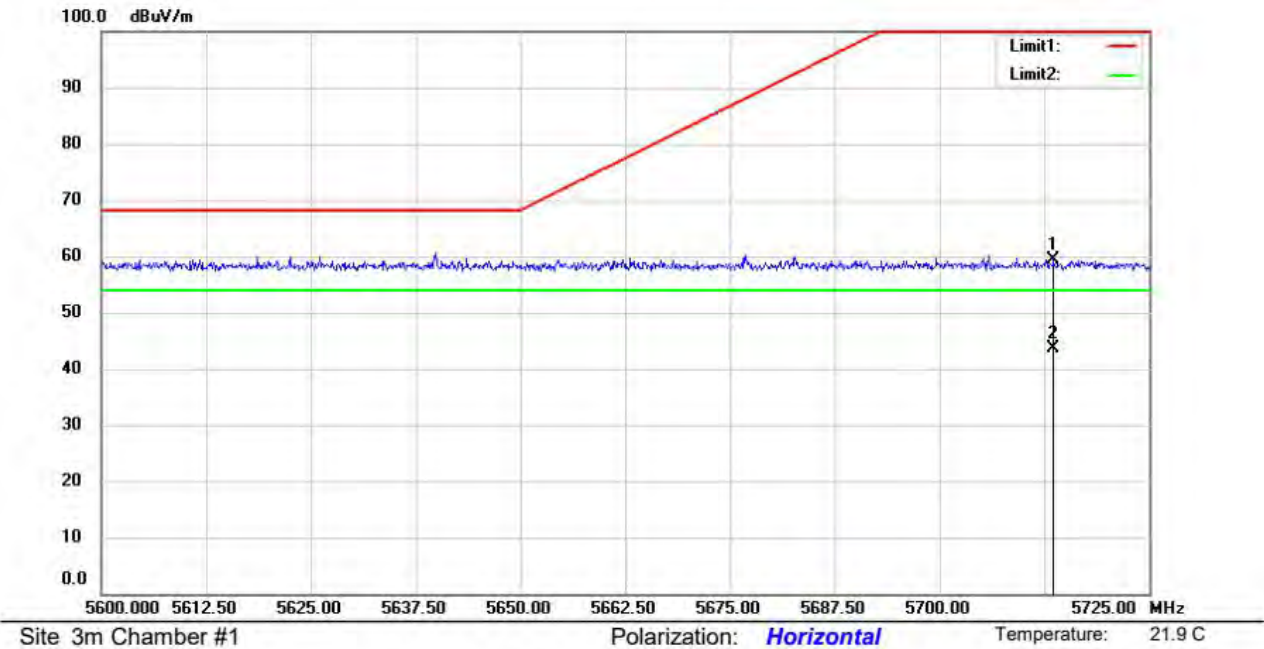


UNII Band III

Test Model	Undesirable radiated		Undesirable radiated		Spurious Emission in Band Edge	
	<input checked="" type="checkbox"/> 802.11a	<input checked="" type="checkbox"/> 5745	<input type="checkbox"/> 802.11n(HT20)	<input type="checkbox"/> 802.11n(HT40)	Ant. Pol: V	

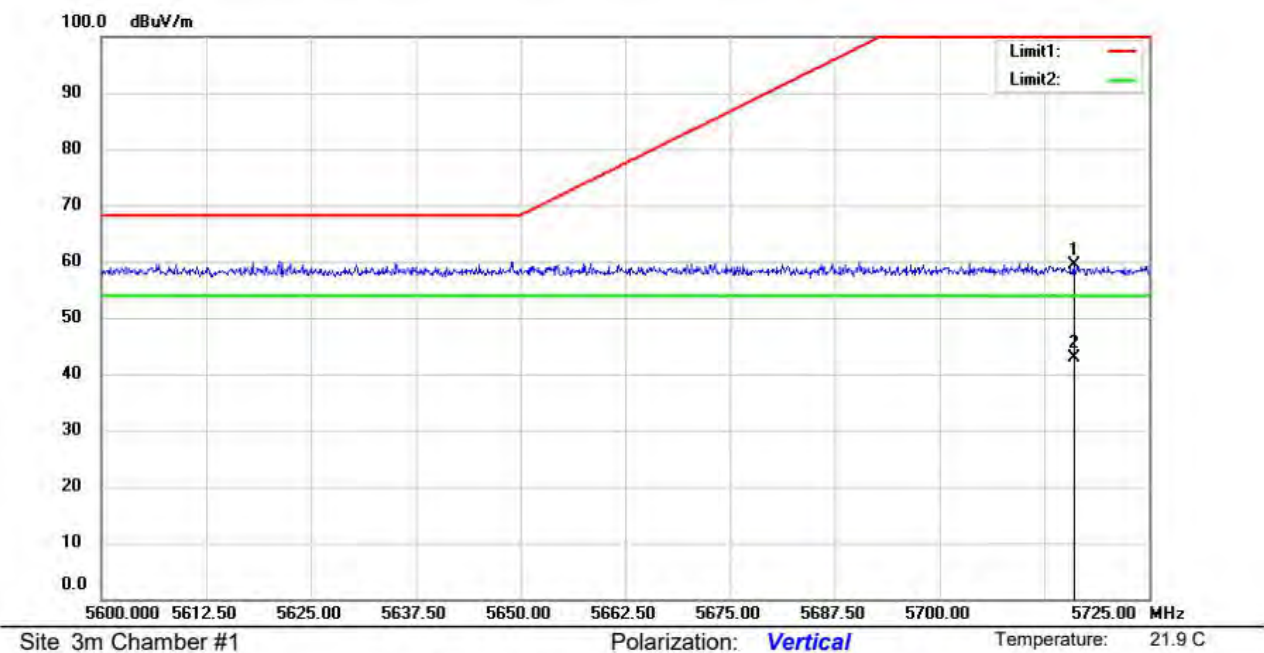

UNII Band III
Test Model Undesirable radiated Undesirable radiated Spurious Emission in Band Edge
☒ 802.11a ☐ 802.11n(HT20) ☐ 802.11n(HT40)
☒ 5825 Ant.Pol H

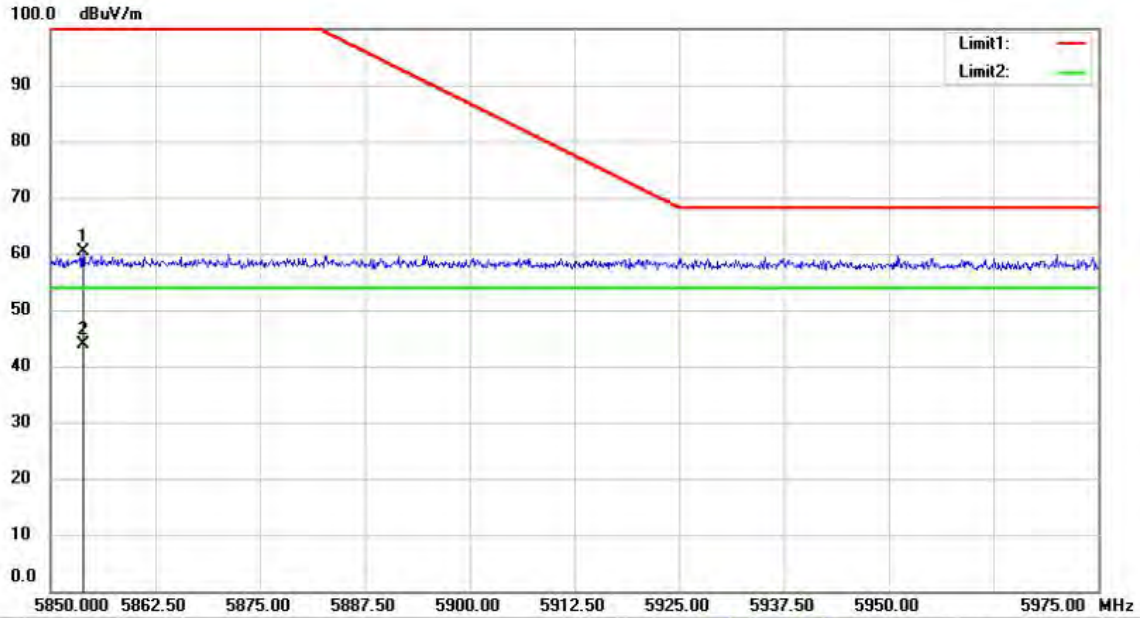


Site 3m Chamber #1

Polarization: **Horizontal**

Temperature: 21.9 C

UNII Band III
Test Model Undesirable radiated Undesirable radiated Spurious Emission in Band Edge
☒ 802.11a ☐ 802.11n(HT20) ☐ 802.11n(HT40)
☒ 5825 Ant.Pol V

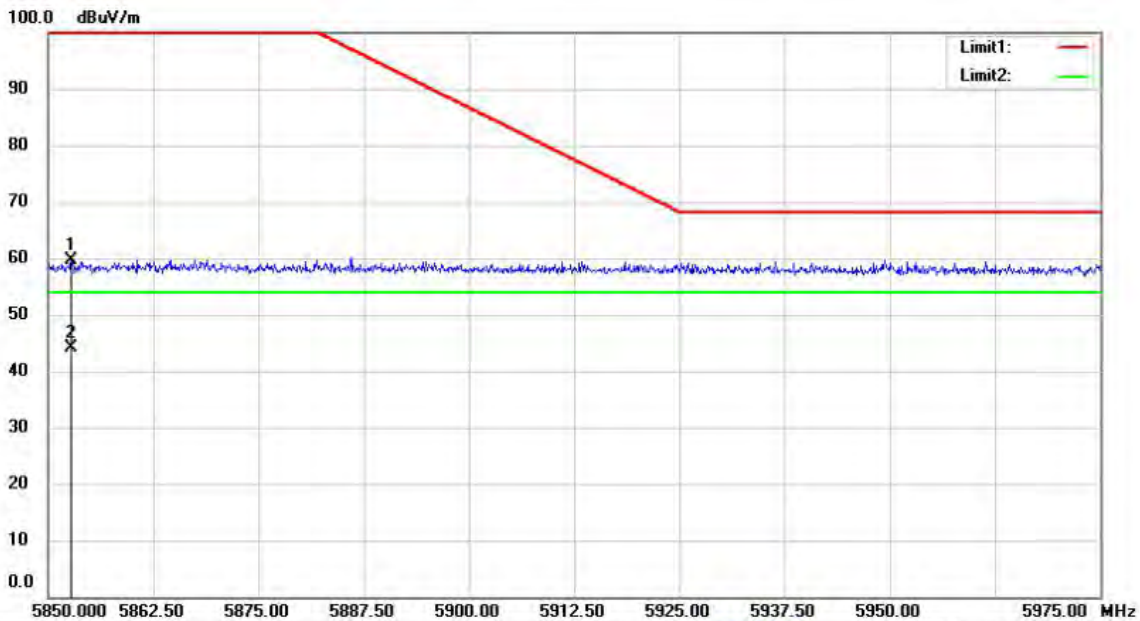

Site 3m Chamber #1

Polarization: **Vertical**

Temperature: 21.9 C


- Undesirable radiated Spurious Emission below 1GHz (30MHz to 1GHz)
All modes have been tested, and the worst result recorded was report as below:

Test mode: 802.11a Frequency: 5180



Site 3m Chamber #1 Polarization: **Horizontal** Temperature: 21.9 C

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		33.3864	35.40	-14.24	21.16	40.00	-18.84	QP		
2		101.1554	35.04	-14.67	20.37	43.50	-23.13	QP		
3	*	180.2534	50.56	-14.05	36.51	43.50	-6.99	QP		
4		264.0504	40.89	-10.82	30.07	46.00	-15.93	QP		
5		451.1350	38.14	-5.76	32.38	46.00	-13.62	QP		
6		832.5870	30.84	2.54	33.38	46.00	-12.62	QP		

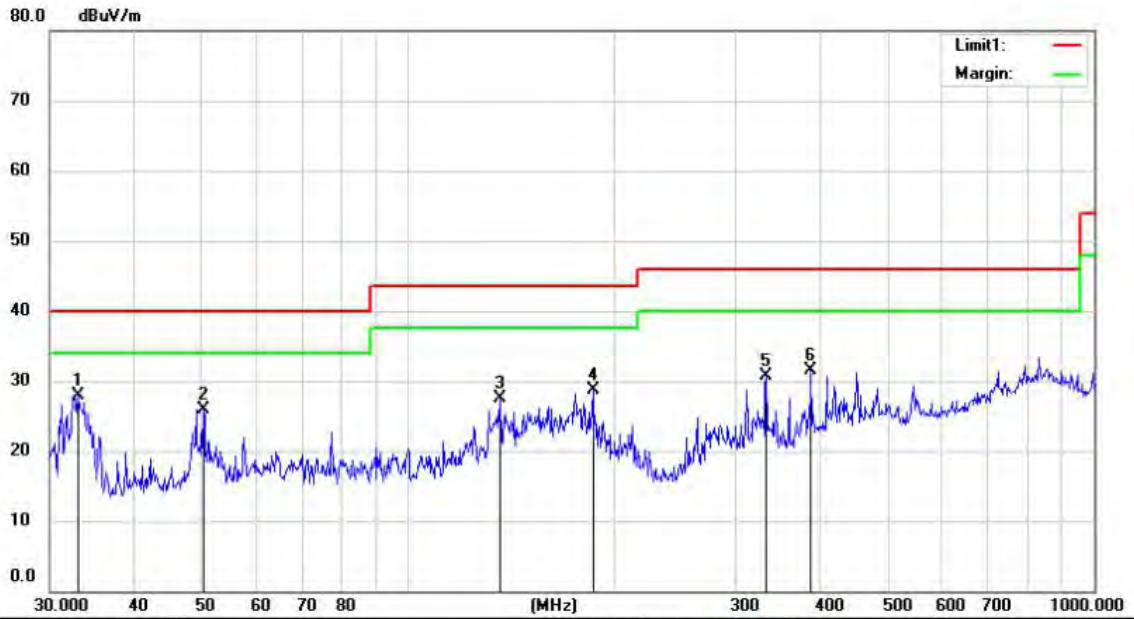


Site 3m Chamber #1

Polarization: **Vertical**

Temperature: 21.9 C

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1	*	33.0515	42.16	-14.29	27.87	40.00	-12.13	QP		
2		50.3647	37.95	-11.96	25.99	40.00	-14.01	QP		
3		136.4000	41.75	-14.26	27.49	43.50	-16.01	QP		
4		186.0327	42.34	-13.69	28.65	43.50	-14.85	QP		
5		333.3943	38.78	-8.10	30.68	46.00	-15.32	QP		
6		386.8032	38.28	-6.86	31.42	46.00	-14.58	QP		

Test mode: 802.11a Frequency: 5220

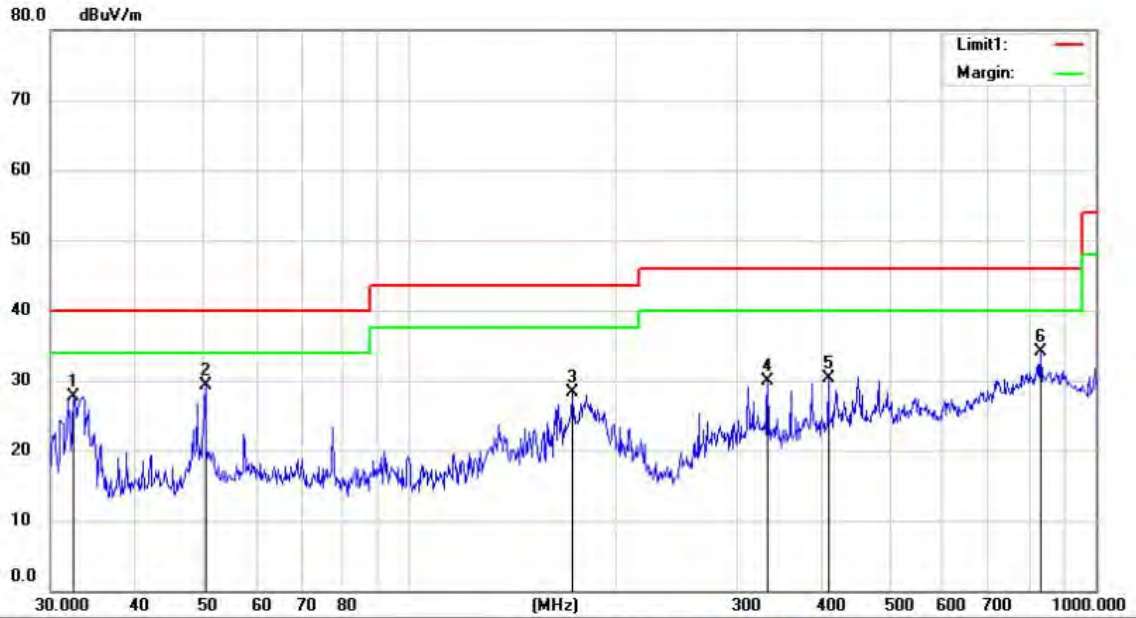

Site 3m Chamber #1

Polarization: **Vertical**

Temperature: 21.9 C


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		32.4201	42.01	-14.40	27.61	40.00	-12.39	QP		
2	*	50.4090	41.19	-11.96	29.23	40.00	-10.77	QP		
3		172.9774	42.28	-13.88	28.40	43.50	-15.10	QP		
4		332.5187	38.01	-8.14	29.87	46.00	-16.13	QP		
5		408.0507	36.60	-6.24	30.36	46.00	-15.64	QP		
6		832.5870	31.53	2.54	34.07	46.00	-11.93	QP		



Site 3m Chamber #1 Polarization: **Horizontal** Temperature: 21.9 C


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1		80.9275	38.13	-15.03	23.10	40.00	-16.90	QP		
2		116.4890	40.71	-14.25	26.46	43.50	-17.04	QP		
3	*	182.0796	51.02	-13.88	37.14	43.50	-6.36	QP		
4		312.0426	41.81	-9.11	32.70	46.00	-13.30	QP		
5		450.7397	38.10	-5.76	32.34	46.00	-13.66	QP		
6		723.6265	33.88	-0.32	33.56	46.00	-12.44	QP		

Test mode: 802.11a Frequency: 5240

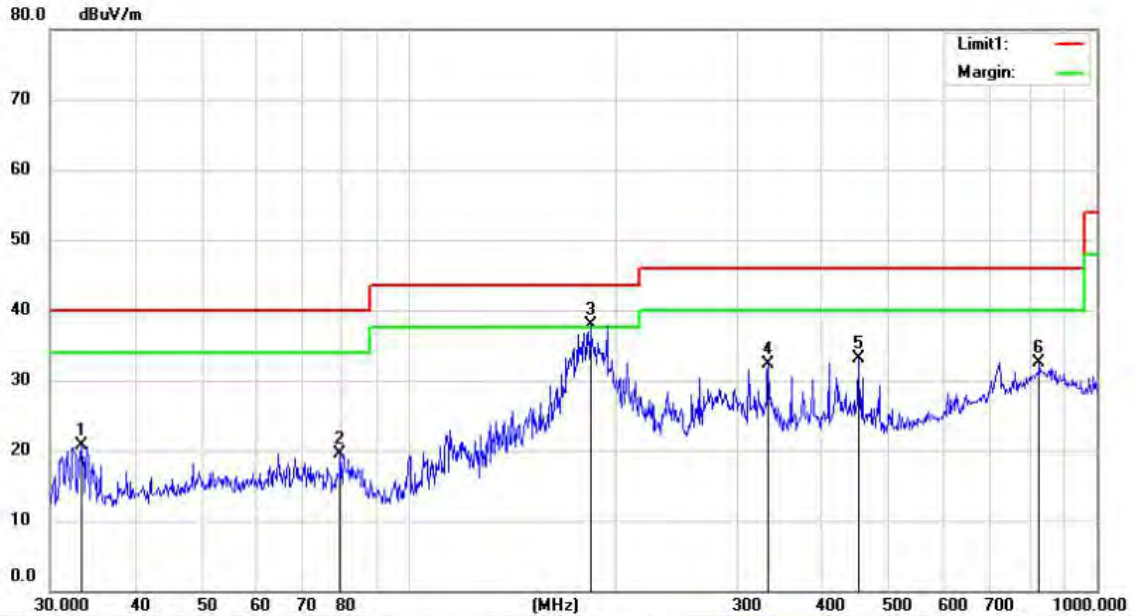

Site 3m Chamber #1 Polarization: **Horizontal** Temperature: 21.9 C

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		33.3571	34.86	-14.25	20.61	40.00	-19.39	QP		
2		79.4513	34.27	-14.84	19.43	40.00	-20.57	QP		
3	*	183.5220	51.67	-13.77	37.90	43.50	-5.60	QP		
4		332.6645	40.50	-8.14	32.36	46.00	-13.64	QP		
5		450.3447	38.89	-5.75	33.14	46.00	-12.86	QP		
6		824.9583	30.29	2.21	32.50	46.00	-13.50	QP		

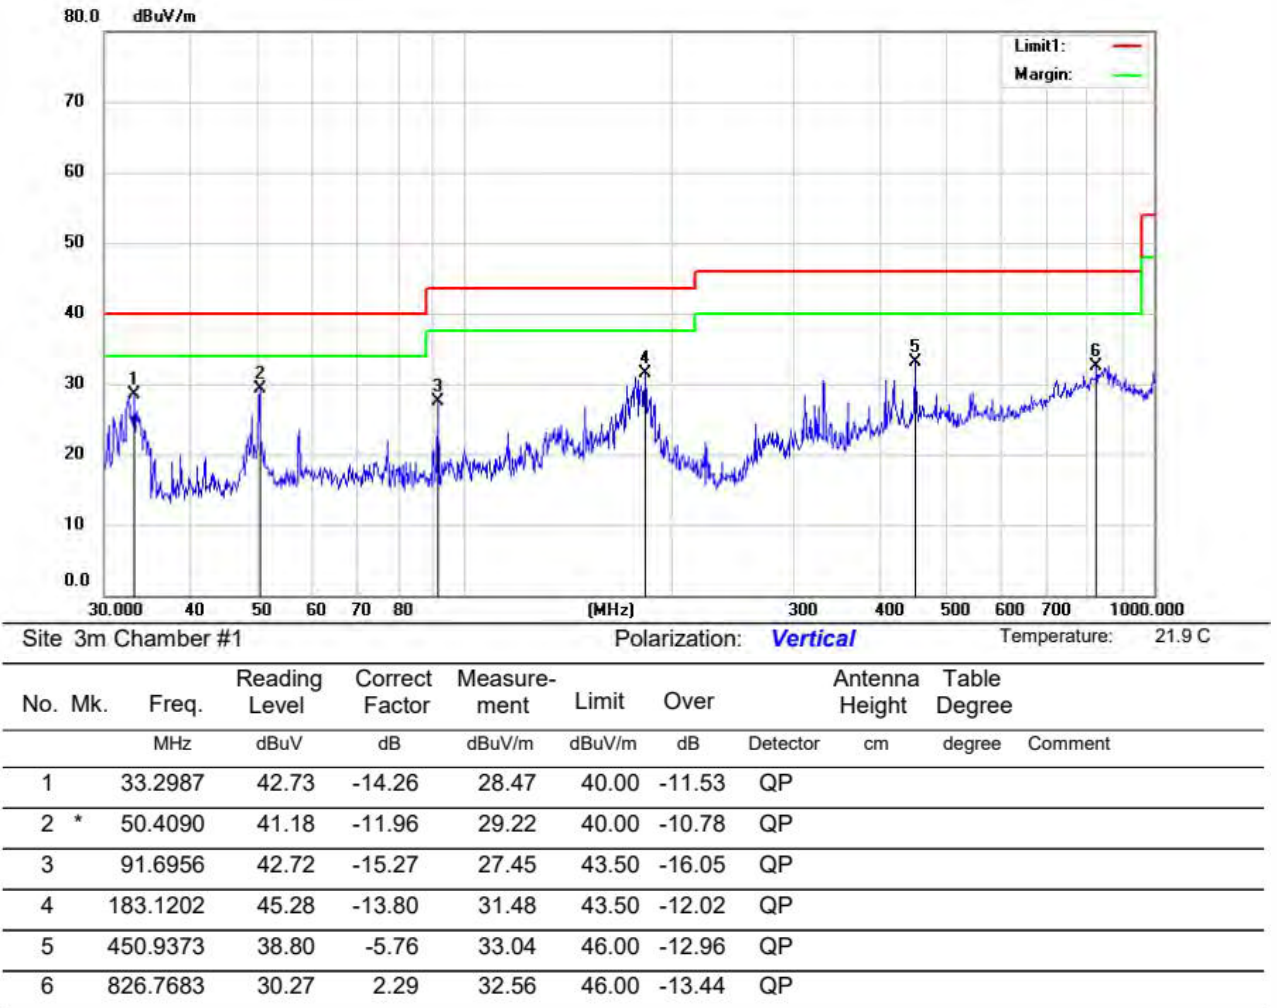

Site 3m Chamber #1

Polarization: **Vertical**

Temperature: 21.9 C

8.6 POWER LINE CONDUCTED EMISSIONS

8.6.1 Applicable Standard

According to FCC Part 15.207(a)

8.6.2 Conformance Limit

Frequency(MHz)	Conducted Emission Limit	
	Quasi-peak	Average
0.15-0.5	66-56	56-46
0.5-5.0	56	46
5.0-30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

8.6.3 Test Configuration

Test according to clause 6.3 conducted emission test setup


8.6.4 Test Procedure

The EUT was placed on a table which is 0.8m above ground plane.
 Maximum procedure was performed on the highest emissions to ensure EUT compliance.
 Repeat above procedures until all frequency measured were complete.

8.6.5 Test Results


Pass

The 120V &240V voltage have been tested, and the worst result recorded was report as below:

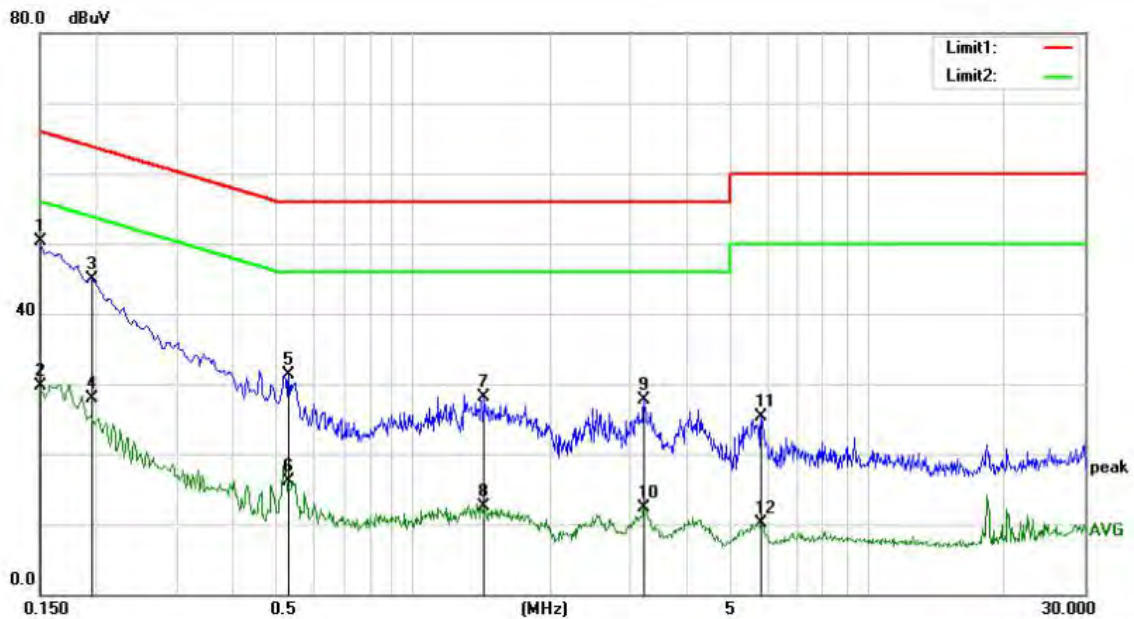

Site Conduction #2 Phase: **N** Temperature: 25.1

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	*	0.1500	39.91	10.48	50.39	66.00	-15.61	QP	
2		0.1500	19.15	10.48	29.63	56.00	-26.37	AVG	
3		0.1955	34.48	10.43	44.91	63.80	-18.89	QP	
4		0.1955	17.46	10.43	27.89	53.80	-25.91	AVG	
5		0.5300	20.96	10.35	31.31	56.00	-24.69	QP	
6		0.5300	5.71	10.35	16.06	46.00	-29.94	AVG	
7		1.4300	17.76	10.37	28.13	56.00	-27.87	QP	
8		1.4300	2.13	10.37	12.50	46.00	-33.50	AVG	
9		3.2140	17.28	10.39	27.67	56.00	-28.33	QP	
10		3.2140	1.89	10.39	12.28	46.00	-33.72	AVG	
11		5.8180	14.72	10.55	25.27	60.00	-34.73	QP	
12		5.8180	-0.47	10.55	10.08	50.00	-39.92	AVG	

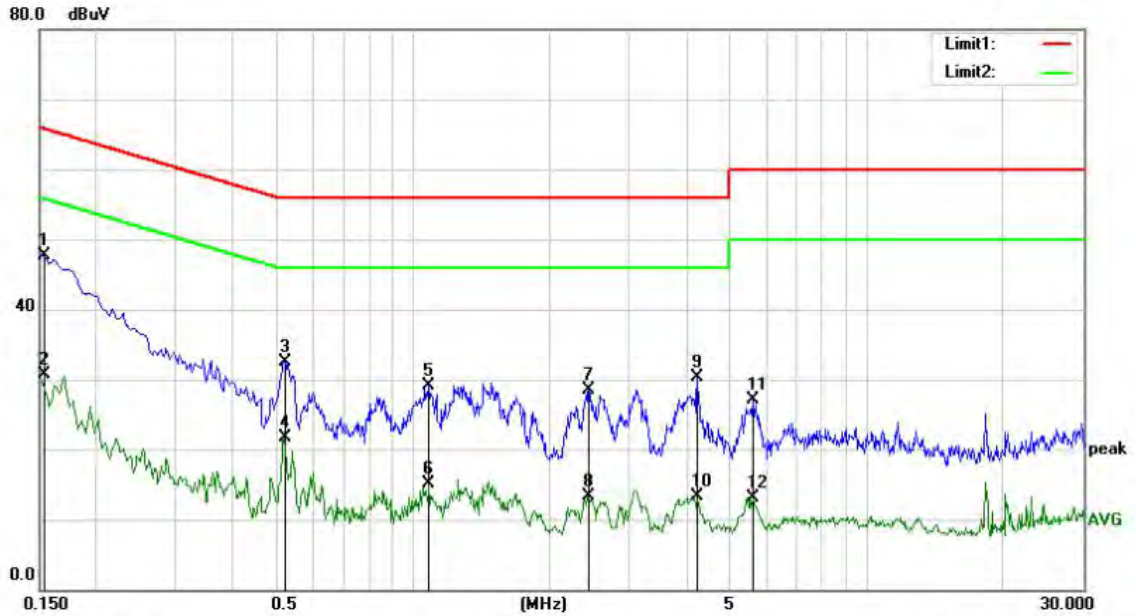

Site Conduction #2

Phase: **L1**

Temperature: 25.1

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	*	0.1540	37.20	10.48	47.68	65.78	-18.10	QP	
2		0.1540	20.29	10.48	30.77	55.78	-25.01	AVG	
3		0.5220	22.20	10.35	32.55	56.00	-23.45	QP	
4		0.5220	11.40	10.35	21.75	46.00	-24.25	AVG	
5		1.0860	18.66	10.41	29.07	56.00	-26.93	QP	
6		1.0860	4.61	10.41	15.02	46.00	-30.98	AVG	
7		2.4460	18.24	10.35	28.59	56.00	-27.41	QP	
8		2.4460	2.91	10.35	13.26	46.00	-32.74	AVG	
9		4.2420	19.86	10.46	30.32	56.00	-25.68	QP	
10		4.2420	2.75	10.46	13.21	46.00	-32.79	AVG	
11		5.6100	16.56	10.54	27.10	60.00	-32.90	QP	
12		5.6100	2.52	10.54	13.06	50.00	-36.94	AVG	

8.7 ANTENNA APPLICATION

8.7.1 Antenna Requirement

Standard	Requirement
FCC CRF Part 15.203	An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.407 (a), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

8.7.2 Result

PASS

The EUT is integrated antenna, the antenna gain as below:

5150-5250: 3.7dBi

5725-5850: 3.7dBi

- Antennas use a permanently attached antenna which is not replaceable.
- Not using a standard antenna jack or electrical connector for antenna replacement
- The antenna has to be professionally installed (please provide method of installation)

Which in accordance to section 15.203, please refer to the internal photos.

Detail of factor for radiated emission

Frequency(MHz)	Ant_F(dB)	Cab_L(dB)	Preamp(dB)	Correct Factor(dB)
0.009	20.6	0.03	\	20.63
0.15	20.7	0.1	\	20.8
1	20.9	0.15	\	21.05
10	20.1	0.28	\	20.38
30	18.8	0.45	\	19.25
30	11.7	0.62	27.9	-15.58
100	12.5	1.02	27.8	-14.28
300	12.9	1.91	27.5	-12.69
600	19.2	2.92	27	-4.88
800	21.1	3.54	26.6	-1.96
1000	22.3	4.17	26.2	0.27
1000	25.6	1.76	41.4	-14.04
3000	28.9	3.27	43.2	-11.03
5000	31.1	4.2	44.6	-9.3
8000	36.2	5.95	44.7	-2.55
10000	38.4	6.3	43.9	0.8
12000	38.5	7.14	42.3	3.34
15000	40.2	8.15	41.4	6.95
18000	45.4	9.02	41.3	13.12
18000	37.9	1.81	47.9	-8.19
21000	37.9	1.95	48.7	-8.85
25000	39.3	2.01	42.8	-1.49
28000	39.6	2.16	46.0	-4.24
31000	41.2	2.24	44.5	-1.06
34000	41.5	2.29	46.6	-2.81
37000	43.8	2.30	46.4	-0.3
40000	43.2	2.50	42.2	3.5

--- End of Report ---