

TEST REPORT

Product Name : **AUTOMOTIVE DIAGNOSIS & ANALYSIS SYSTEM**
Model Number : **MaxiCheck MX808S, MaxiPRO MP808S, MaxiIM**
FCC ID : **WQ8-MX808S2151**

Prepared for : Autel Intelligent Technology Corp.,Ltd.
Address : 7th-8th,10th Floor, Building B1, Zhiyuan, Xueyuan Rd, Xili,
Nanshan, Shenzhen,518055 China

Prepared by : EMTEK (SHENZHEN) CO., LTD.
Address : Bldg 69, Majialong Industry Zone, Nanshan District,
Shenzhen, Guangdong, China

Tel: (0755) 26954280
Fax: (0755) 26954282

Report Number : ENS2202170083W01102R
Date(s) of Tests : February 22, 2022 to March 14, 2022
Date of issue : May 26, 2022

1 TEST RESULT CERTIFICATION

Applicant : Autel Intelligent Technology Corp.,Ltd.
 Address : 7th-8th,10th Floor, Building B1, Zhiyuan, Xueyuan Rd, Xili, Nanshan, Shenzhen,518055 China
 Manufacturer : Autel Intelligent Technology Corp.,Ltd.
 Address : 7th-8th,10th Floor, Building B1, Zhiyuan, Xueyuan Rd, Xili, Nanshan, Shenzhen,518055 China
 EUT : AUTOMOTIVE DIAGNOSIS & ANALYSIS SYSTEM
 Model Name : MaxiCheck MX808S, MaxiPRO MP808S, MaxiIM IM508S, MaxiDAS DS808S, MaxiCOM MK808S
 (Note: all models are different for model name, the others are the same.)
 Trademark : AUTEL

Measurement Procedure Used:

APPLICABLE STANDARDS	
STANDARD	TEST RESULT
FCC 47 CFR Part 2, Subpart J FCC 47 CFR Part 15, Subpart E	PASS

The above equipment was tested by EMTEK (SHENZHEN) CO., LTD. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10 (2013) and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part 2 and Part 15.407


The test results of this report relate only to the tested sample identified in this report.

Date of Test : February 22, 2022 to March 14, 2022

Prepared by : Una Yu
Una Yu/Editor

Reviewer : Joe Xia
Joe Xia/Supervisor

Approved & Authorized Signer : Lisa Wang
Lisa Wang/Manager



Modified Information

Version	Report No.	Revision Date	Summary
Ver.1.0	ENS2202170083W01102R	/	Original Report
Ver.2.0	ENS2202170083W01102R	May 26, 2022	Update Models

TABLE OF CONTENTS

1 TEST RESULT CERTIFICATION	2
2 EUT TECHNICAL DESCRIPTION	5
3 SUMMARY OF TEST RESULT	6
4 TEST METHODOLOGY	7
4.1 GENERAL DESCRIPTION OF APPLIED STANDARDS.....	7
4.2 MEASUREMENT EQUIPMENT USED.....	7
4.3 DESCRIPTION OF TEST MODES.....	8
5 FACILITIES AND ACCREDITATIONS	10
5.1 FACILITIES.....	10
5.2 LABORATORY ACCREDITATIONS AND LISTINGS.....	10
6 TEST SYSTEM UNCERTAINTY	11
7 SETUP OF EQUIPMENT UNDER TEST	12
7.1 RADIO FREQUENCY TEST SETUP.....	12
7.2 RADIO FREQUENCY TEST SETUP.....	12
7.3 CONDUCTED EMISSION TEST SETUP.....	14
7.4 BLOCK DIAGRAM CONFIGURATION OF TEST SYSTEM.....	15
7.5 SUPPORT EQUIPMENT.....	15
8 TEST REQUIREMENTS	16
8.1 BANDWIDTH MEASUREMENT.....	16
8.2 MAXIMUM CONDUCTED OUTPUT POWER.....	34
8.3 MAXIMUM PEAK POWER DENSITY.....	39
8.4 FREQUENCY STABILITY.....	56
8.5 UNDESIRABLE RADIATED SPURIOUS EMISSION.....	63
8.6 POWER LINE CONDUCTED EMISSIONS.....	83
8.7 ANTENNA APPLICATION.....	86

2 EUT TECHNICAL DESCRIPTION

Characteristics	Description
Product	AUTOMOTIVE DIAGNOSIS & ANALYSIS SYSTEM
Model Number	MaxiCheck MX808S, MaxiPRO MP808S, MaxiIM IM508S, MaxiDAS DS808S, MaxiCOM MK808S (Note: all models are different for model name, the others are the same.)
Wifi Type	<input checked="" type="checkbox"/> UNII-1: 5150MHz-5250MHz Band <input checked="" type="checkbox"/> UNII-3 with 5725MHz-5850MHz Band
WLAN Supported	<input checked="" type="checkbox"/> 802.11a <input checked="" type="checkbox"/> 802.11n(20MHz channel bandwidth) <input checked="" type="checkbox"/> 802.11n(40MHz channel bandwidth) <input checked="" type="checkbox"/> 802.11ac(20MHz channel bandwidth) <input checked="" type="checkbox"/> 802.11ac(40MHz channel bandwidth) <input checked="" type="checkbox"/> 802.11ac(80MHz channel bandwidth)
Data Rate	802.11a:54/48/36/24/18/12/9/6Mbps 802.11n:up to 600 Mbps 802.11ac:up to 1.733Gbps
Modulation	<input checked="" type="checkbox"/> OFDM with BPSK/QPSK/16QAM/64QAM for 802.11a/n <input checked="" type="checkbox"/> OFDM with BPSK/QPSK/16QAM/64QAM/256QAM for 802.11ac
Frequency Range	<input checked="" type="checkbox"/> UNII-1: 5150MHz-5250MHz Band
	<input checked="" type="checkbox"/> 5180-5240MHz for 802.11a <input checked="" type="checkbox"/> 5180-5240MHz for 802.11n(HT20) <input checked="" type="checkbox"/> 5180-5240MHz for 802.11ac(HT20)
	<input checked="" type="checkbox"/> 5190-5230MHz for 802.11n(HT40) <input checked="" type="checkbox"/> 5190-5230MHz for 802.11ac(HT40) <input checked="" type="checkbox"/> 5210MHz for 802.11ac(HT80)
	<input checked="" type="checkbox"/> UNII-3 with 5725MHz-5850MHz Band
Frequency Range	<input checked="" type="checkbox"/> 5745-5825MHz for 802.11a <input checked="" type="checkbox"/> 5745-5825MHz for 802.11n(HT20) <input checked="" type="checkbox"/> 5745-5825MHz for 802.11ac(HT20)
	<input checked="" type="checkbox"/> 5755-5795MHz for 802.11n(HT40) <input checked="" type="checkbox"/> 5755-5795MHz for 802.11ac(HT40) <input checked="" type="checkbox"/> 5775MHz for 802.11ac(HT80)
TPC Function	<input checked="" type="checkbox"/> Applicable <input type="checkbox"/> Not Applicable
Antenna Type	Integrated Antenna
Antenna Gain	3.7dBi
Power Supply	Battery 3.7V, 5000mAh, 18.5Wh Adapter: Model: GME10C-050200FUu Input: 100~240V, 50/60Hz, 0.28A Output: 5V, 2A

Note: for more details, please refer to the user's manual of the EUT.

3 SUMMARY OF TEST RESULT

FCC Part Clause	Test Parameter	Verdict	Remark
15.407 (a) 15.407 (e)	99% , 6dB and 26dB Bandwidth	PASS	
15.407 (a)	Maximum Conducted Output Power	PASS	
15.407 (a)	Peak Power Spectral Density	PASS	
15.407 (b)	Radiated Spurious Emission	PASS	
15.407(g)	Frequency Stability	PASS	
15.407 (b)(6) 15.207	Power Line Conducted Emission	PASS	
15.407(a) 15.203	Antenna Application	PASS	

NOTE1: N/A (Not Applicable).

NOTE2: According to FCC OET KDB 789033 D2 General UNII Test Procedures New Rules v02r01, In addition, the radiated test is also performed to ensure the emissions emanating from the device cabinet also comply with the applicable limits.

NOTE3: Since all models are different for model name, the others are the same, only MaxiCheck MX808S is chosen for testing.

RELATED SUBMITTAL(S) / GRANT(S):

This submittal(s) (test report) is intended for FCC ID: WQ8-MX808S2151 filing to comply with Section 15.247 of the FCC Part 15, Subpart E Rules.

4 TEST METHODOLOGY

4.1 GENERAL DESCRIPTION OF APPLIED STANDARDS

According to its specifications, the EUT must comply with the requirements of the following standards:

FCC 47 CFR Part 2, Subpart J

FCC 47 CFR Part 15, Subpart E

FCC KDB 789033 D2 General UNII Test Procedures New Rules v02r01

4.2 MEASUREMENT EQUIPMENT USED

For Conducted Emission Test Equipment

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
EMI Test Receiver	Rohde & Schwarz	ESCI	101045	2021/5/15	1Year
PULSE LIMTER	Rohde & Schwarz	ESH3-Z2	100107	2021/5/15	1Year
AMN	Rohde & Schwarz	ESH3-Z5	100191	2021/5/15	1Year
AMN	Schwarzbeck	NNLK 8129	8129203	2021/5/15	1Year
V-Network	Rohde & Schwarz	ESH3-Z6	100011	2021/5/15	1Year
V-Network	Rohde & Schwarz	ESH3-Z6	100253	2021/5/16	1Year

For Spurious Emissions Test

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
Pre-Amplifier	HP	8447F	2944A07999	2021/5/15	1Year
EMI Test Receiver	Rohde & Schwarz	ESCI	101414	2021/5/15	1Year
Bilog Antenna	Schwarzbeck	VULB9163	712	2021/7/5	2 Year
Horn antenna	Schwarzbeck	BBHA9120D	9120D-1178	2020/7/4	2 Year
Pre-Amplifie	Lunar EM	LNA1G18-48	J1011131010 001	2021/5/15	1Year
Spectrum Analyzer	Rohde & Schwarz	FSV40	100967	2021/5/15	1Year
Horn antenna	Schwarzbeck	BBHA9170	9170-399	2021/6/12	2 Year
Loop Antenna	Schwarzbeck	FMZB1519	1519-012	2021/6/12	2 Year

For other test items:

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
Signal Analyzer	Agilent	N9010A	MY53470879	2021/5/16	1Year
Spectrum Analyzer	Rohde & Schwarz	FSV40	100967	2021/5/15	1Year
Power Meter	\	PS-X10-100	\	2021/5/15	1Year
Temp/ Humidity Chamber	ESPEC	EL-02KA	12107166	2021/7/3	1Year

4.3 DESCRIPTION OF TEST MODES

The EUT has been tested under its typical operating condition.

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

Test of channel included the lowest and middle and highest frequency to perform the test, then record on this report.

Pre-defined engineering program for regulatory testing used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

Wifi 5G with UNII Band I

Frequency and Channel list for 802.11a/n (HT20)/802.11ac (HT20):

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	44	5220		
40	5220	48	5240		

Frequency and Channel list for 802.11n (HT40)/ 802.11ac (HT40):

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
38	5190				
46	5230				

Frequency and Channel list for 802.11ac Wave2 (HT80):

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
42	5210				

Test Frequency and Channel for 802.11a/n (HT20)/802.11ac (HT20):

Lowest Frequency		Middle Frequency		Highest Frequency	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	40	5220	48	5240

Test Frequency and channel for 802.11n (HT40)/ 802.11ac (HT40):

Lowest Frequency		Middle Frequency		Highest Frequency	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
38	5190	N/A	N/A	46	5230

Test Frequency and channel for 802.11ac Wave2 (HT80):

Lowest Frequency		Middle Frequency		Highest Frequency	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
42	5210	N/A	N/A	N/A	N/A

Wifi 5G with UNII Band III

Frequency and Channel list for 802.11a/n (HT20)/802.11ac (HT20):

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	157	5785	165	5825
153	5765	161	5805		

Frequency and Channel list for 802.11n (HT40)/ 802.11ac (HT40):

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
151	5755				
159	5795				

Frequency and Channel list for 802.11ac (HT80):

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
155	5775				

Test Frequency and Channel for 802.11a/n (HT20)/802.11ac (HT20):

Lowest Frequency		Middle Frequency		Highest Frequency	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	157	5785	165	5825

Test Frequency and channel for 802.11n (HT40)/ 802.11ac (HT40):

Lowest Frequency		Middle Frequency		Highest Frequency	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
151	5755	N/A	N/A	159	5795

Test Frequency and channel for 802.11ac (HT80):

Lowest Frequency		Middle Frequency		Highest Frequency	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
155	5775				

5 FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

All measurement facilities used to collect the measurement data are located at

Bldg 69, Majialong Industry Zone District, Nanshan District, Shenzhen, China

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.10 and CISPR Publication 22.

5.2 LABORATORY ACCREDITATIONS AND LISTINGS

Site Description

EMC Lab.

: **Accredited by CNAS**

The Certificate Registration Number is L2291

The Laboratory has been assessed and proved to be in compliance with CNAS-CL01 (identical to ISO/IEC 17025:2017)

Accredited by FCC

Designation Number: CN1204

Test Firm Registration Number: 882943

Accredited by A2LA

The Certificate Number is 4321.01

Accredited by Industry Canada

The Conformity Assessment Body Identifier is CN0008

Name of Firm

: EMTEK (SHENZHEN) CO., LTD.

Site Location


: Building 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, China

6 TEST SYSTEM UNCERTAINTY

The following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-5}$
Maximum Peak Output Power Test	$\pm 1.0\text{dB}$
Conducted Emissions Test	$\pm 2.0\text{dB}$
Radiated Emission Test	$\pm 2.0\text{dB}$
Power Density	$\pm 2.0\text{dB}$
Occupied Bandwidth Test	$\pm 1.0\text{dB}$
Band Edge Test	$\pm 3\text{dB}$
All emission, radiated	$\pm 3\text{dB}$
Antenna Port Emission	$\pm 3\text{dB}$
Temperature	$\pm 0.5^\circ\text{C}$
Humidity	$\pm 3\%$


Measurement Uncertainty for a level of Confidence of 95%

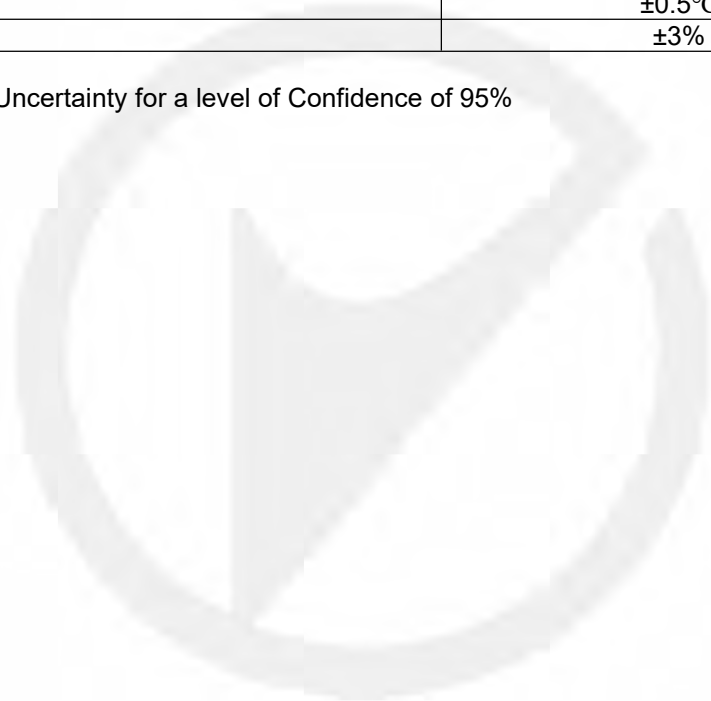

7 SETUP OF EQUIPMENT UNDER TEST

7.1 RADIO FREQUENCY TEST SETUP

The WLAN component's antenna ports(s) of the EUT are connected to the measurement instrument per an appropriate attenuator. The EUT is controlled by PC/software to emit the specified signals for the purpose of measurements.



7.2 RADIO FREQUENCY TEST SETUP

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4 dB according to the standards: ANSI C63.10. The test distance is 3m. The setup is according to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 and CAN/CSA-CEI/IEC CISPR 22.

Below 30MHz:

The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 3 meter away from the antenna (loop antenna). The Antenna should be positioned with its plane vertical at the specified distance from the EUT and rotated about its vertical axis for maximum response at each azimuth about the EUT. The center of the loop shall be 1 m above the ground. For certain applications, the loop antenna plane may also need to be positioned horizontally at the specified distance from the EUT.

Above 30MHz:


The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).

Above 1GHz:


(Note: the FCC's permission to use 1.5m as an alternative per TCBC Conf call of Dec. 2, 2014.)

The EUT is placed on a turntable 1.5 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).


(a) Radiated Emission Test Set-Up, Frequency Below 30MHz

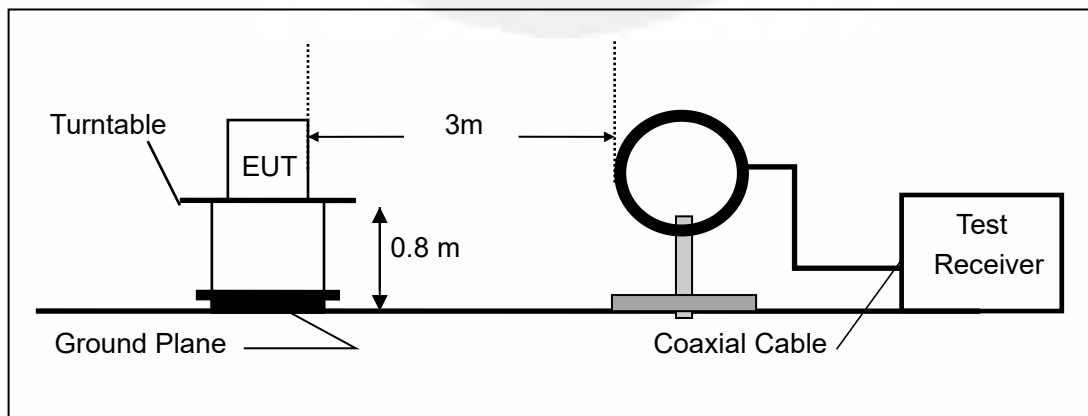

(b) Radiated Emission Test Set-Up, Frequency Below 1000MHz

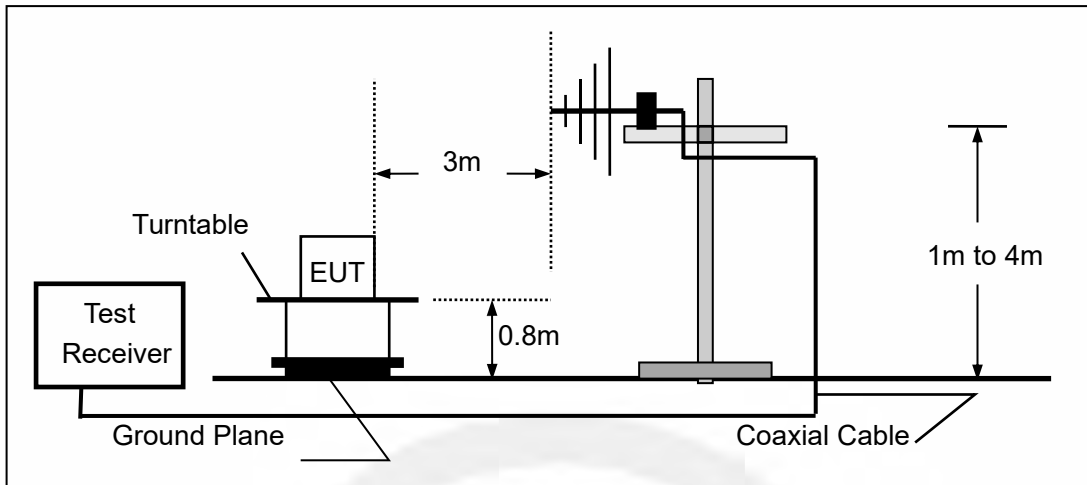

(c) Radiated Emission Test Set-Up, Frequency above 1000MHz

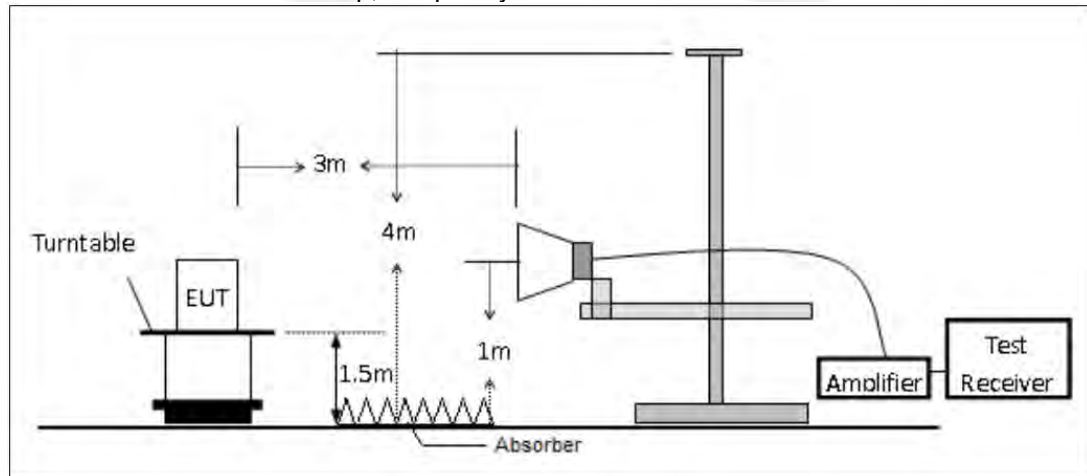


7.3 CONDUCTED EMISSION TEST SETUP


The mains cable of the EUT (maybe per AC/DC Adapter) must be connected to LISN. The LISN shall be placed 0.8 m from the boundary of EUT and bonded to a ground reference plane for LISN mounted on top of the ground reference plane. This distance is between the closest points of the LISN and the EUT. All other units of the EUT and associated equipment shall be at least 0.8m from the LISN.

Ground connections, where required for safety purposes, shall be connected to the reference ground point of the LISN and, where not otherwise provided or specified by the manufacturer, shall be of same length as the mains cable and run parallel to the mains connection at a separation distance of not more than 0.1 m.

According to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode.

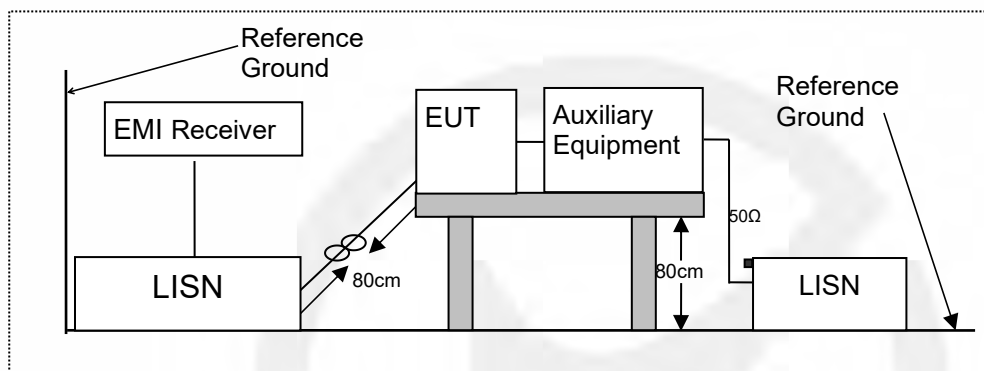

7.4 BLOCK DIAGRAM CONFIGURATION OF TEST SYSTEM

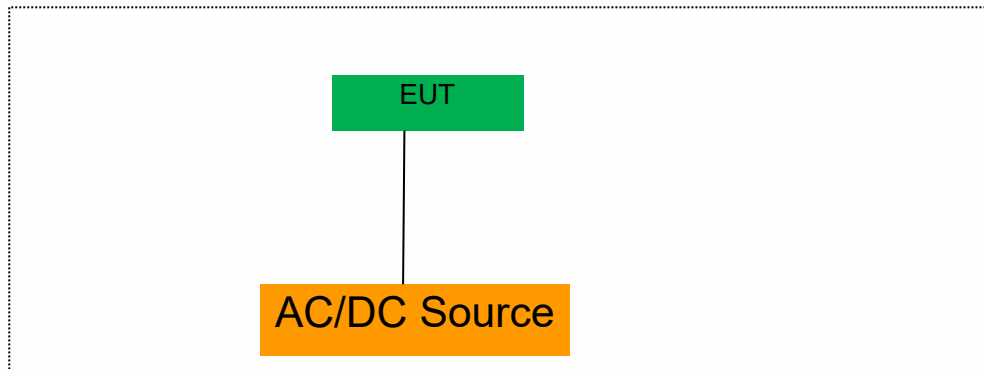

7.5 SUPPORT EQUIPMENT

EUT Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite

Auxiliary Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

8 TEST REQUIREMENTS

8.1 BANDWIDTH MEASUREMENT

8.1.1 Applicable Standard

According to FCC Part 15.407(a)(1) for UNII Band I
According to FCC Part 15.407(a)(2) for UNII Band II-A and UNII Band II-C
According to FCC Part 15.407(a)(3) for UNII Band III
According to FCC Part 15.407(e) for UNII Band III
According to 789033 D02 Section II(C)
According to 789033 D02 Section II(D)

8.1.2 Conformance Limit

(1) For the band 5.15-5.25 GHz.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(e) Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

8.1.3 Test Configuration

Test according to clause 6.1 radio frequency test setup

8.1.4 Test Procedure

According to 789033 D02 v02r01 section C&D, the following is the measurement procedure.

1. Emission Bandwidth (EBW)

- a) Set RBW = approximately 1% of the emission bandwidth.
- b) Set the VBW > RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Measure the maximum width of the emission that is 26 dB down from the maximum of the emission.

Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

2. Minimum Emission Bandwidth for the band 5.725-5.85 GHz

Section 15.407(e) specifies the minimum 6 dB emission bandwidth of at least 500 KHz for the band 5.715-5.85 GHz. The following procedure shall be used for measuring this bandwidth:

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Note: The automatic bandwidth measurement capability of a spectrum analyzer or EMI receiver may be employed if it implements the functionality described above.

D. 99 Percent Occupied Bandwidth

The 99-percent occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5 % of the total mean power of the given emission. Measurement of the 99-percent occupied bandwidth is required only as a condition for using the optional band-edge measurement techniques described in section II.G.3.d). Measurements of 99-percent occupied bandwidth may also optionally be used in lieu of the EBW to 789033 D02 v01r02 General UNII Test Procedures New Rules v01 define the minimum frequency range over which the spectrum is integrated when measuring maximum conducted output power as described in section II.E. However, the EBW must be measured to determine bandwidth dependent limits on maximum conducted output power in accordance with 15.407(a).

The following procedure shall be used for measuring (99 %) power bandwidth:

1. Set center frequency to the nominal EUT channel center frequency.
2. Set span = 1.5 times to 5.0 times the OBW.
3. Set RBW = 1 % to 5 % of the OBW
4. Set VBW $\geq 3 \cdot$ RBW
5. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
6. Use the 99 % power bandwidth function of the instrument (if available).
7. If the instrument does not have a 99 % power bandwidth function, the trace data points are recovered and directly summed in power units. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 % of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5 % of the total is reached; that frequency is recorded as the upper frequency. The 99% occupied bandwidth is the difference between these two frequencies.

8.1.5 Test Results

UNII Band I: 5150-5250MHz

Test Mode	Test Channel MHz		26 dB Bandwidth MHz	99% Bandwidth MHz	Verdict
802.11a	CH36	5180	21.24	16.866	Pass
	CH40	5220	21.26	16.866	Pass
	CH48	5240	21.20	16.909	Pass
802.11n-HT20	CH36	5180	21.16	17.942	Pass
	CH40	5220	21.25	17.908	Pass
	CH48	5240	21.43	17.899	Pass
802.11ac(HT20)	CH36	5180	21.54	17.959	Pass
	CH40	5220	21.50	17.931	Pass
	CH48	5240	21.46	17.936	Pass
802.11n-HT40	CH38	5190	39.87	36.278	Pass
	CH46	5230	39.85	36.325	Pass
802.11ac(HT40)	CH38	5190	39.71	36.136	Pass
	CH46	5230	40.04	36.244	Pass
802.11ac(HT80)	CH42	5210	80.94	75.592	Pass

Emission Bandwidth&99% Occupied Bandwidth UNII Band I
 Test Model 802.11a Frequency(MHz) 5180




Emission Bandwidth&99% Occupied Bandwidth UNII Band I
 Test Model 802.11a Frequency(MHz) 5220




Emission Bandwidth&99% Occupied Bandwidth UNII Band I
 Test Model 802.11a Frequency(MHz) 5240




Emission Bandwidth&99% Occupied Bandwidth UNII Band I
 Test Model 802.11n-HT20 Frequency(MHz) 5180

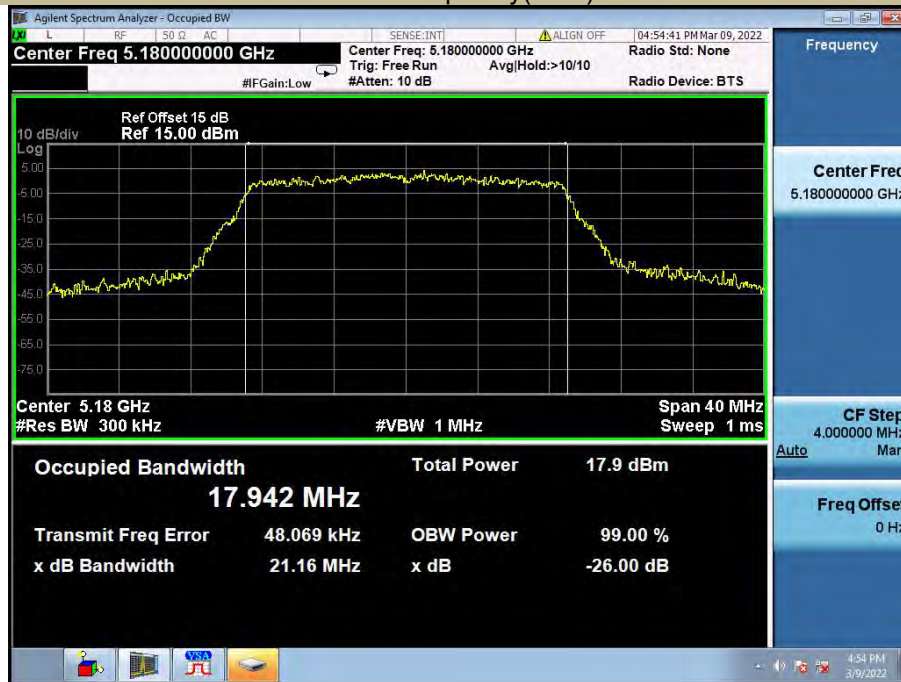


Emission Bandwidth&99% Occupied Bandwidth UNII Band I
 Test Model 802.11n-HT20 Frequency(MHz) 5220

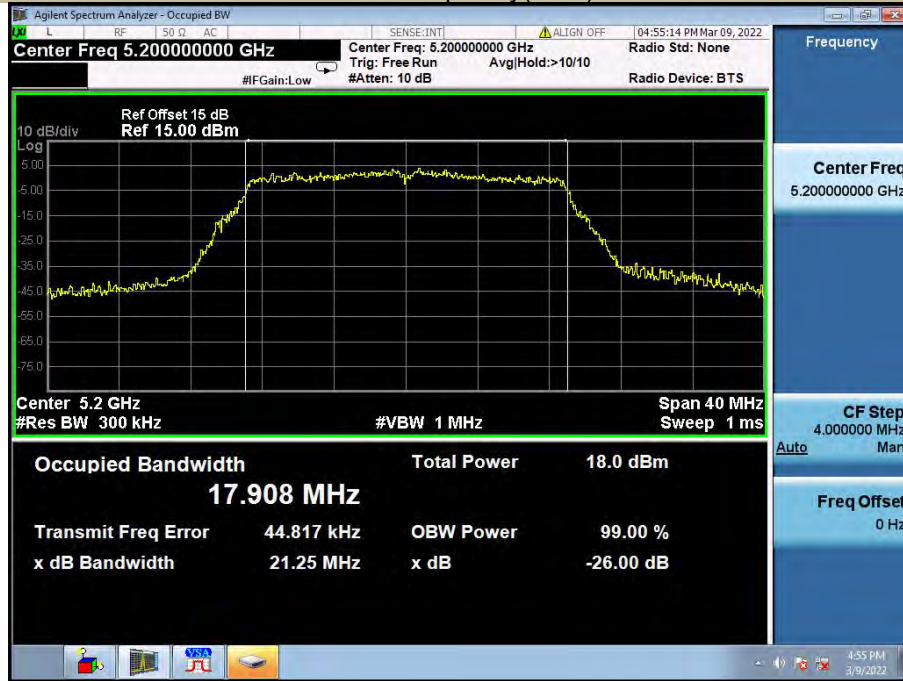


Emission Bandwidth&99% Occupied Bandwidth UNII Band I
 Test Model 802.11n-HT20 Frequency(MHz) 5240

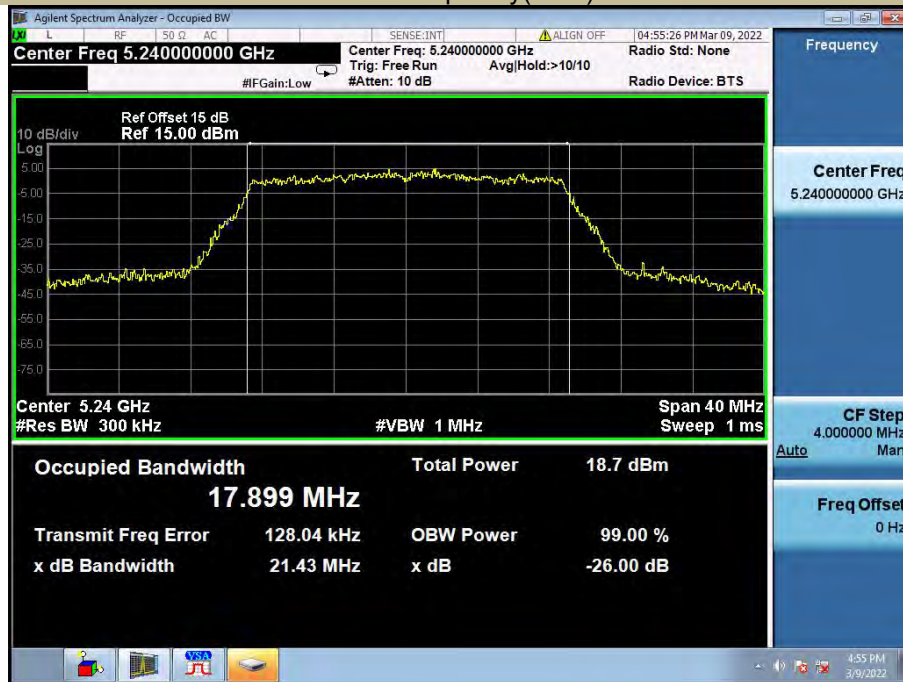


Emission Bandwidth&99% Occupied Bandwidth UNII Band I
 Test Model 802.11ac(HT20) Frequency(MHz) 5180

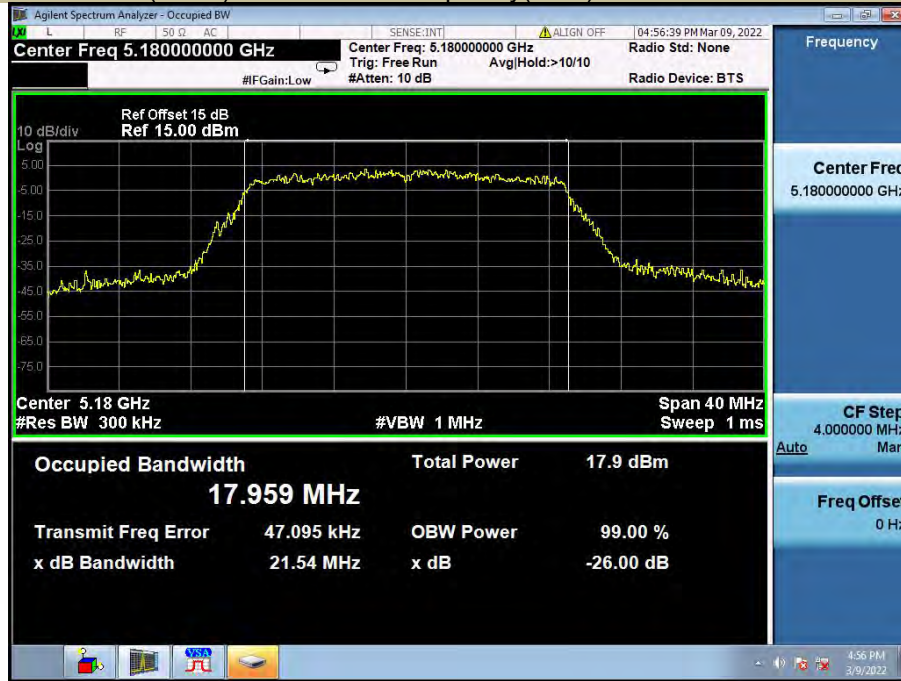


Emission Bandwidth&99% Occupied Bandwidth UNII Band I
 Test Model 802.11ac(HT20) Frequency(MHz) 5220

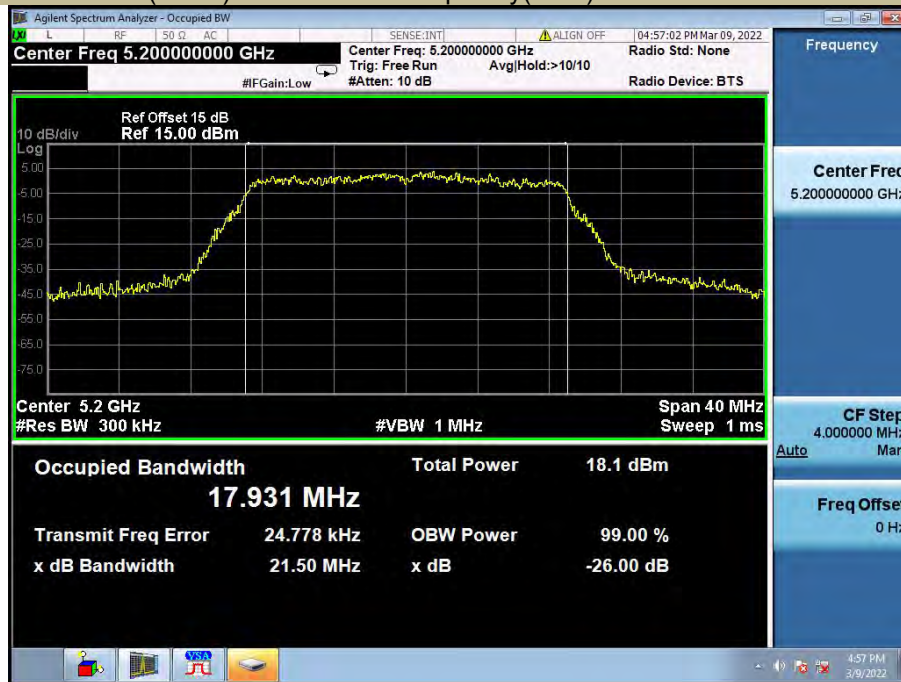


Emission Bandwidth&99% Occupied Bandwidth UNII Band I
 Test Model 802.11ac(HT20) Frequency(MHz) 5240

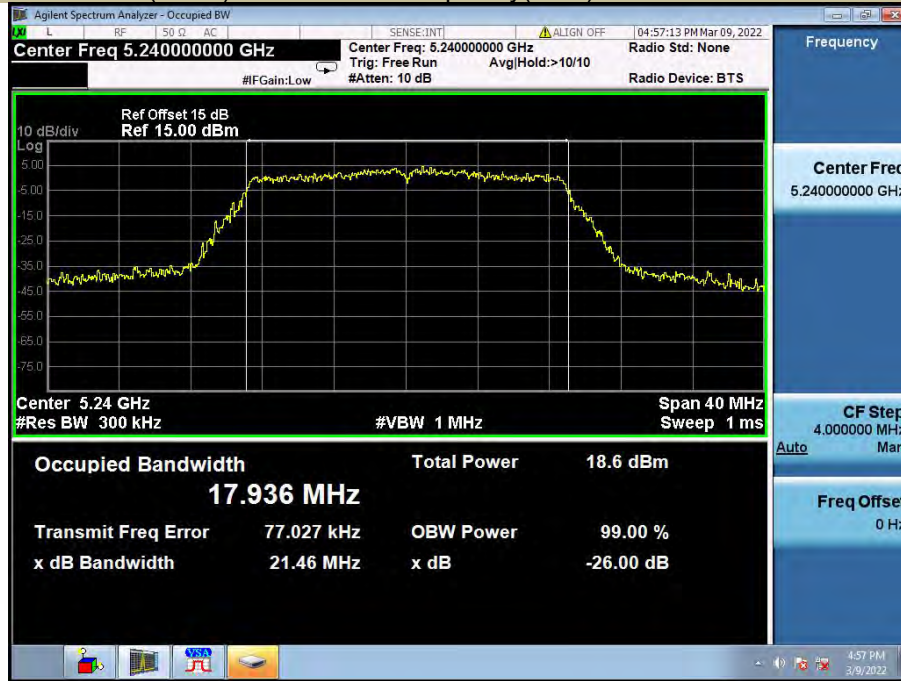


Emission Bandwidth&99% Occupied Bandwidth UNII Band I
 Test Model 802.11n-HT40 Frequency(MHz) 5190

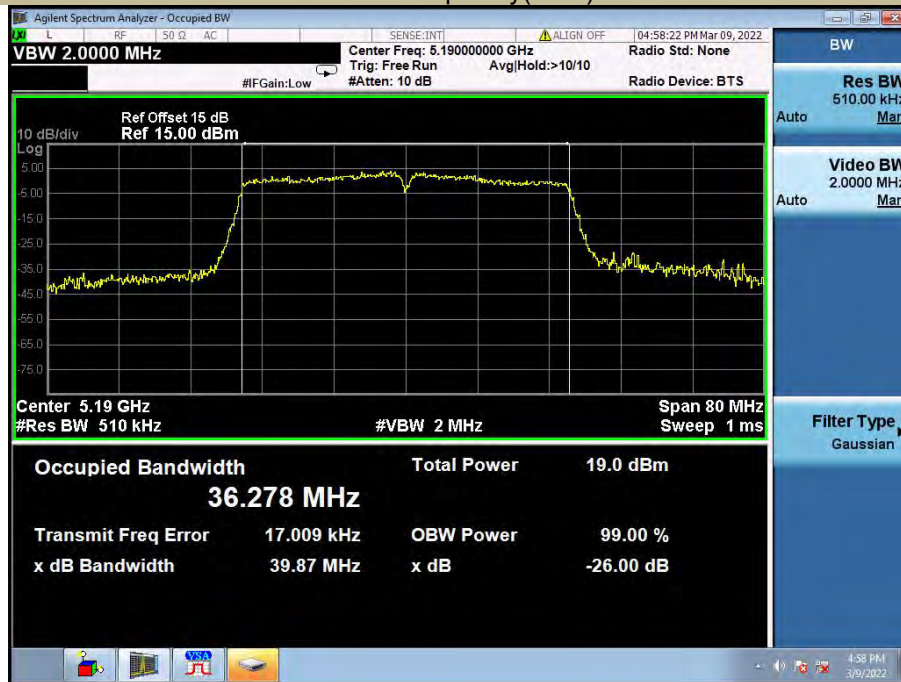


Emission Bandwidth&99% Occupied Bandwidth UNII Band I
 Test Model 802.11n-HT40 Frequency(MHz) 5230

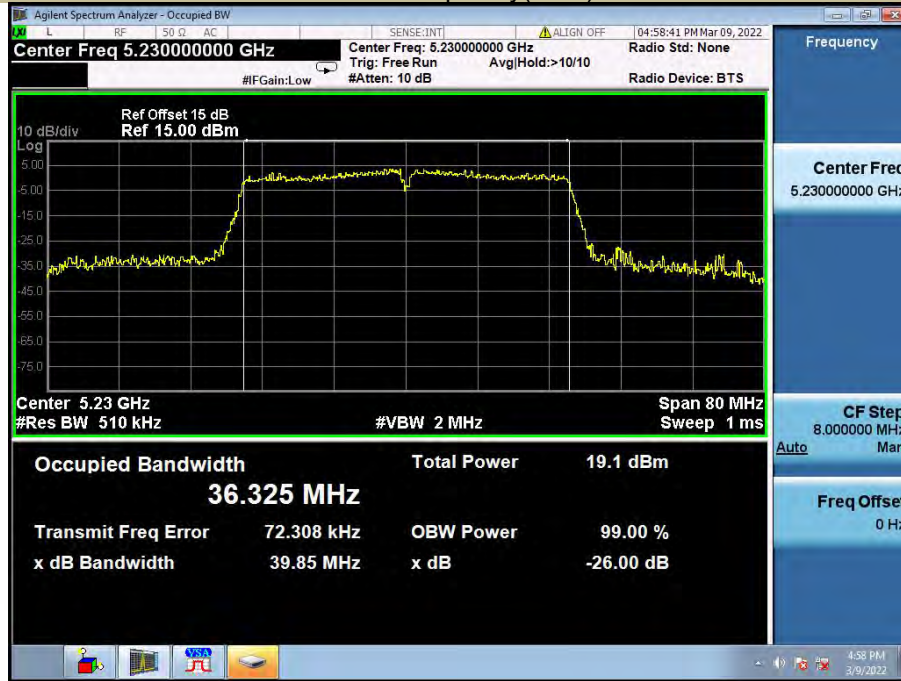


Emission Bandwidth&99% Occupied Bandwidth UNII Band I
 Test Model 802.11ac(HT40) Frequency(MHz) 5190

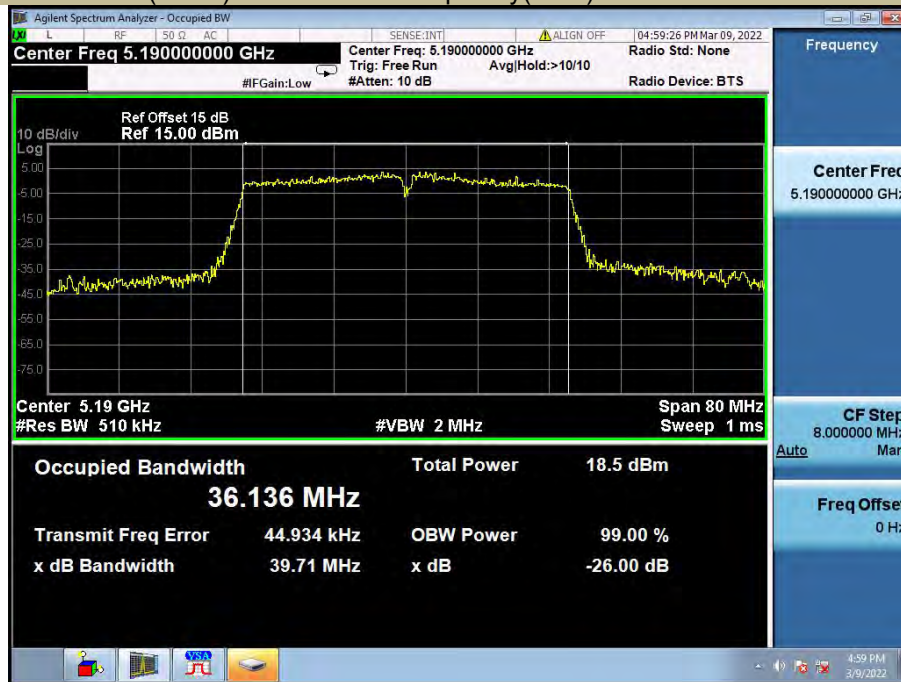

Emission Bandwidth&99% Occupied Bandwidth UNII Band I
 Test Model 802.11ac(HT40) Frequency(MHz) 5230

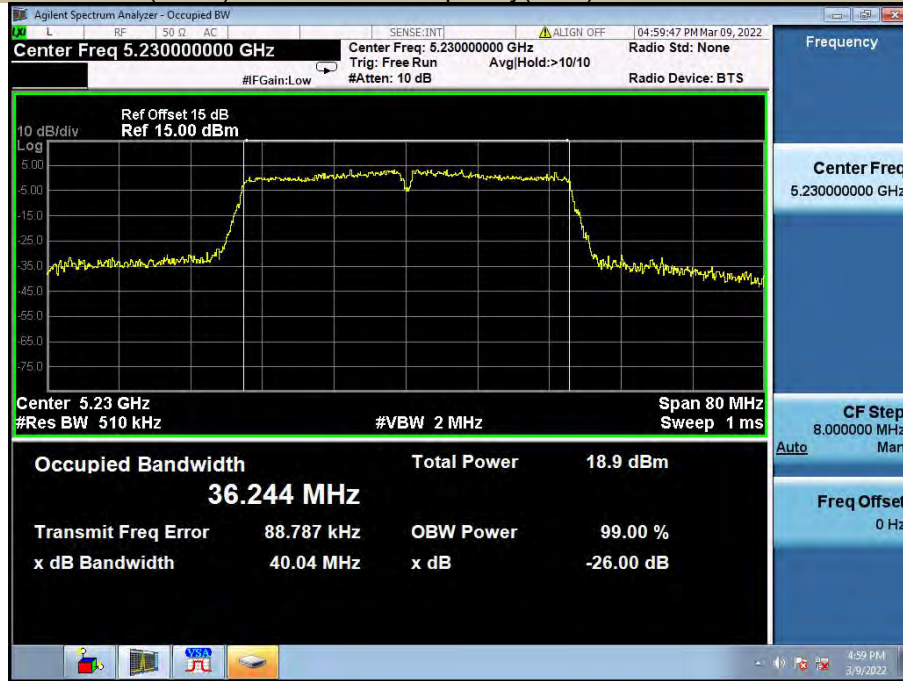


Emission Bandwidth&99% Occupied Bandwidth UNII Band I
 Test Model 802.11ac 80 Frequency(MHz) 5210

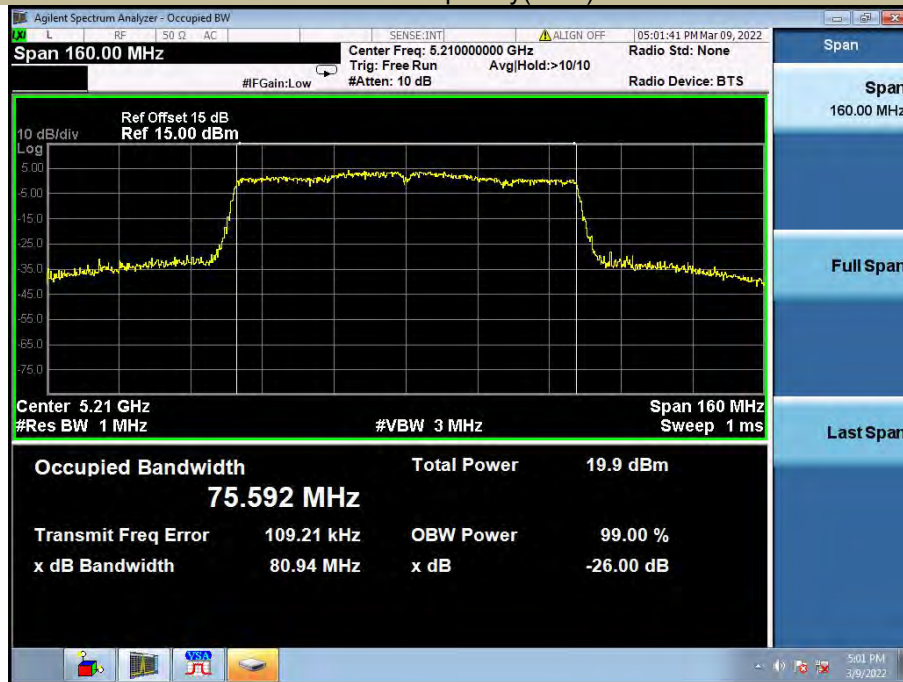


UNII Band III: 5725-5850MHz

Test Mode	Test Channel MHz		6 dB Bandwidth MHz	99% Bandwidth MHz	Limit kHz
802.11a	CH149	5745	16.36	16.456	≥500
	CH157	5785	16.33	16.441	≥500
	CH165	5825	16.35	16.464	≥500
802.11n-HT20	CH149	5745	16.01	17.657	≥500
	CH157	5785	17.28	17.646	≥500
	CH165	5825	16.68	17.667	≥500
802.11ac(HT20)	CH149	5745	16.94	17.652	≥500
	CH157	5785	16.94	17.636	≥500
	CH165	5825	17.35	17.644	≥500
802.11n-HT40	CH151	5755	35.42	36.025	≥500
	CH159	5795	36.06	36.072	≥500
802.11ac(HT40)	CH151	5755	35.60	36.002	≥500
	CH159	5795	36.07	36.075	≥500
802.11ac(HT80)	CH155	5775	75.32	75.228	≥500


6db Emission Bandwidth UNII Band III
 Test Model 802.11a Frequency(MHz) 5745

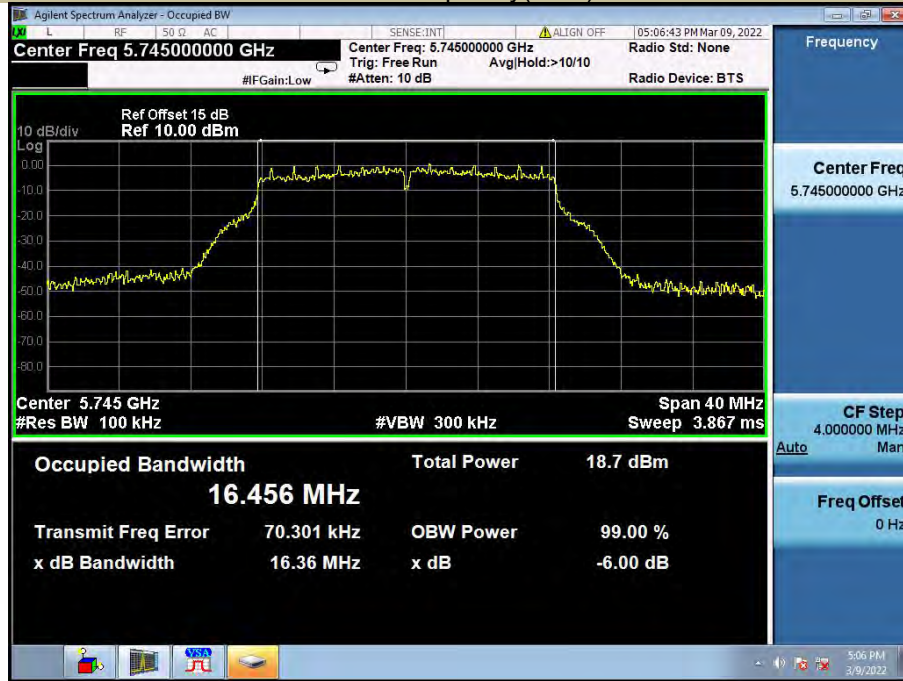


6db Emission Bandwidth UNII Band III
 Test Model 802.11a Frequency(MHz) 5785

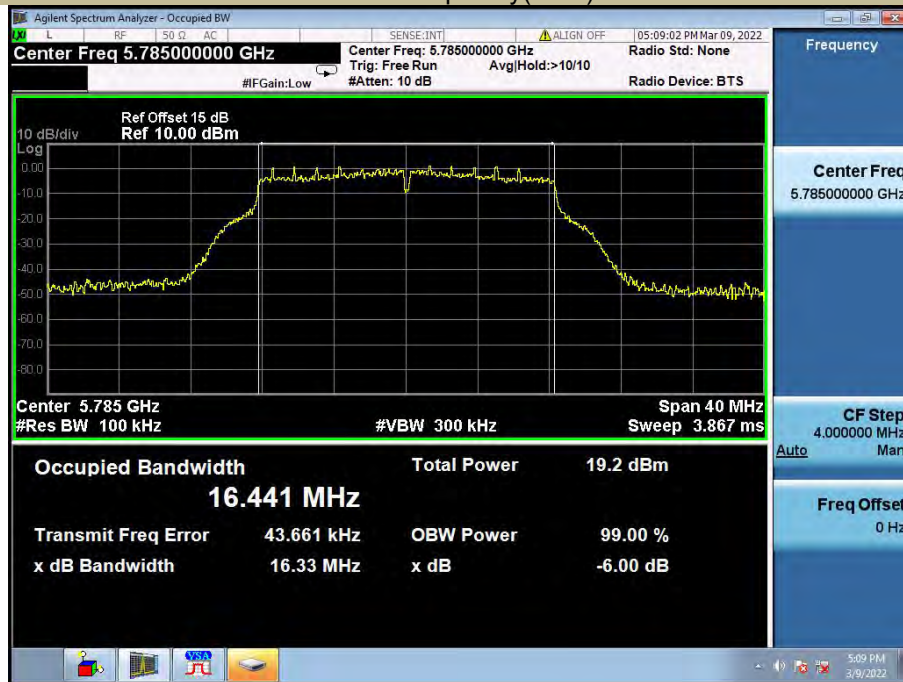


6db Emission Bandwidth UNII Band III
 Test Model 802.11n-HT20 Frequency(MHz) 5785

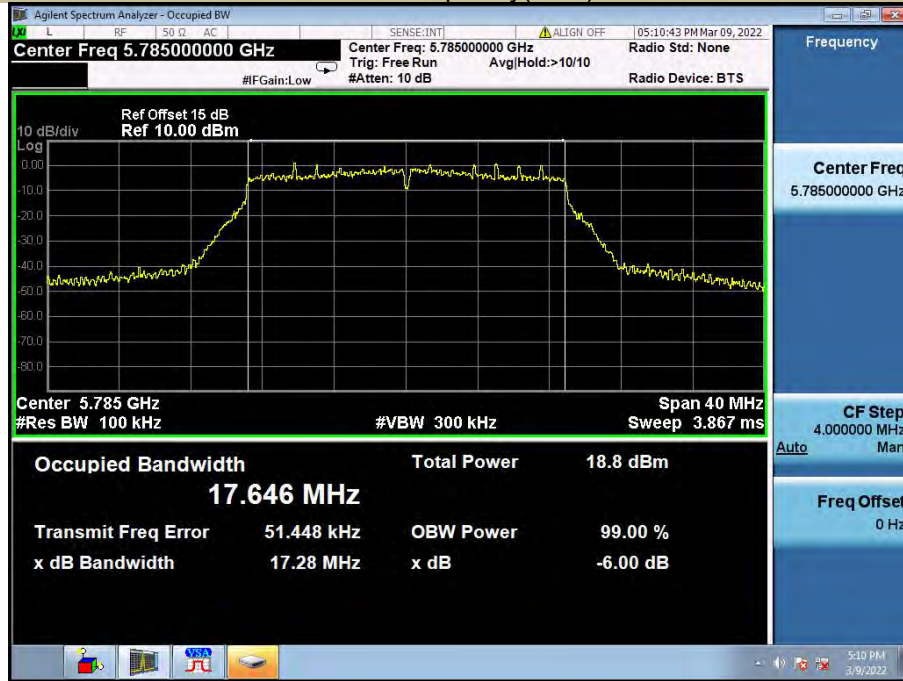


6db Emission Bandwidth UNII Band III
 Test Model 802.11n-HT20 Frequency(MHz) 5825

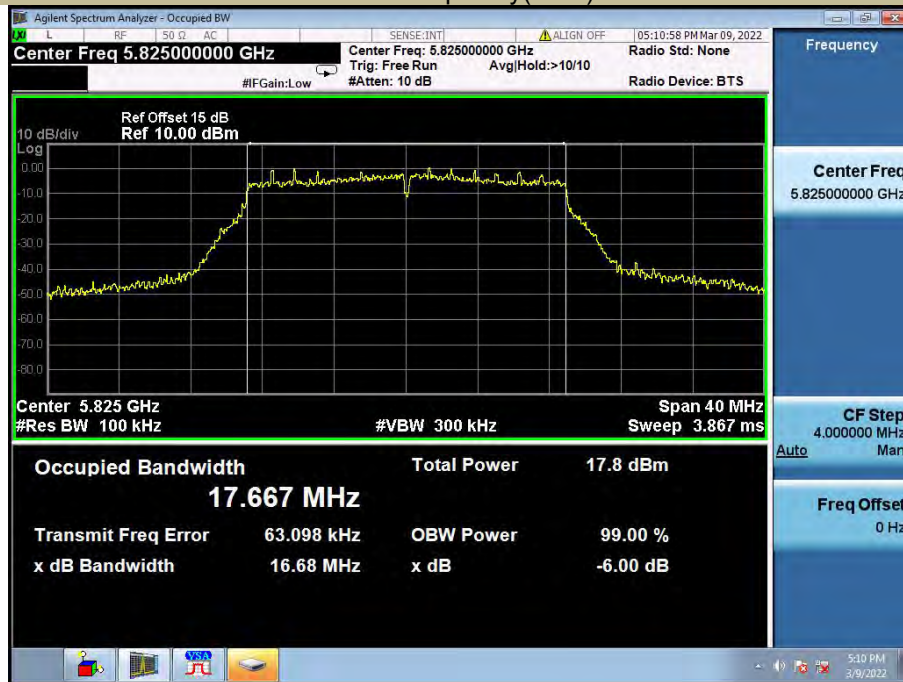


6db Emission Bandwidth UNII Band III
 Test Model 802.11ac(HT20) Frequency(MHz) 5745

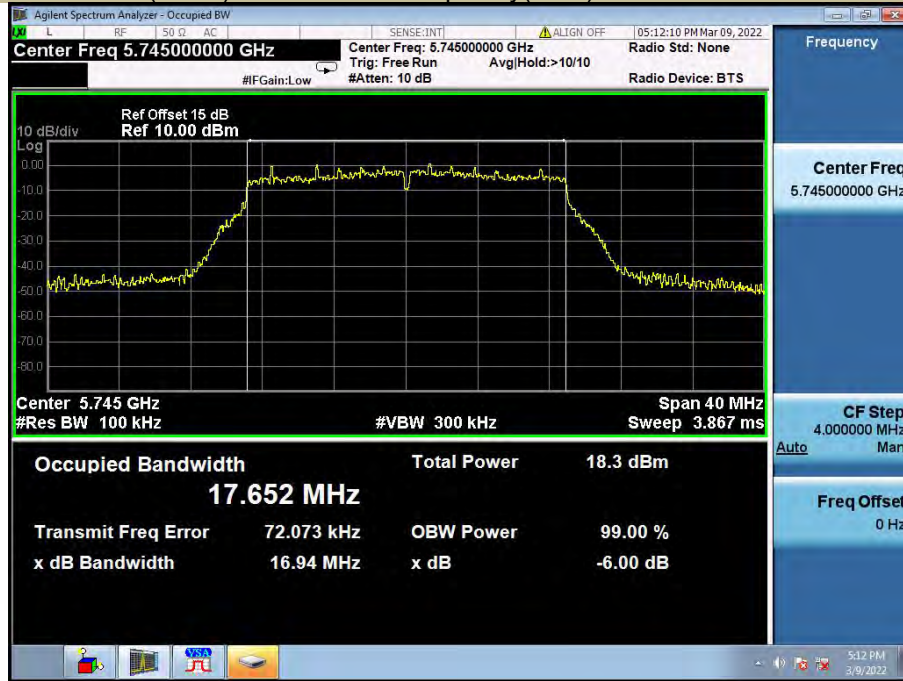


6db Emission Bandwidth UNII Band III
 Test Model 802.11ac(HT20) Frequency(MHz) 5785

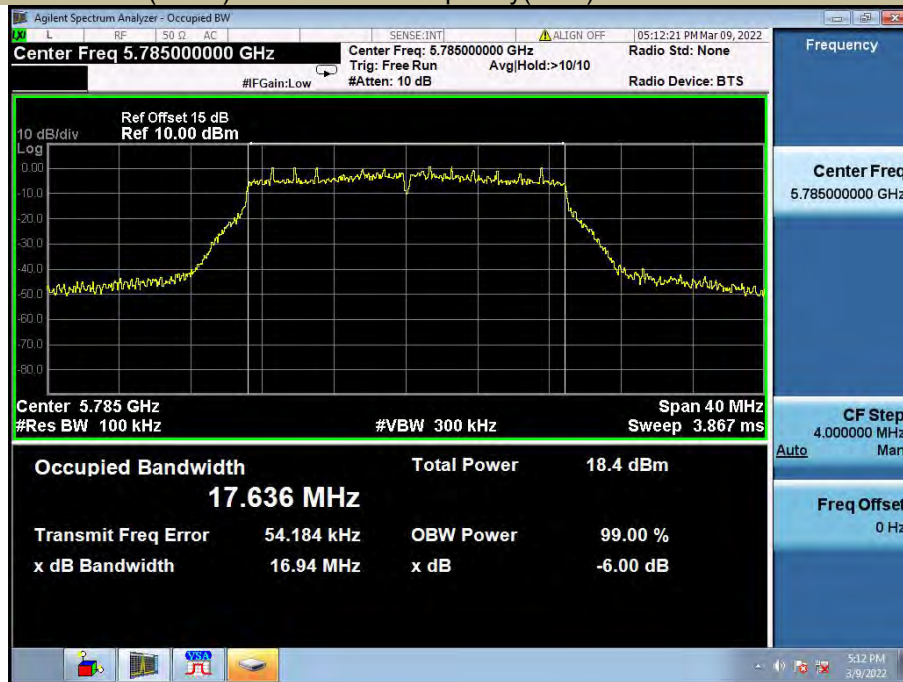

6db Emission Bandwidth UNII Band III
 Test Model 802.11ac(HT20) Frequency(MHz) 5825

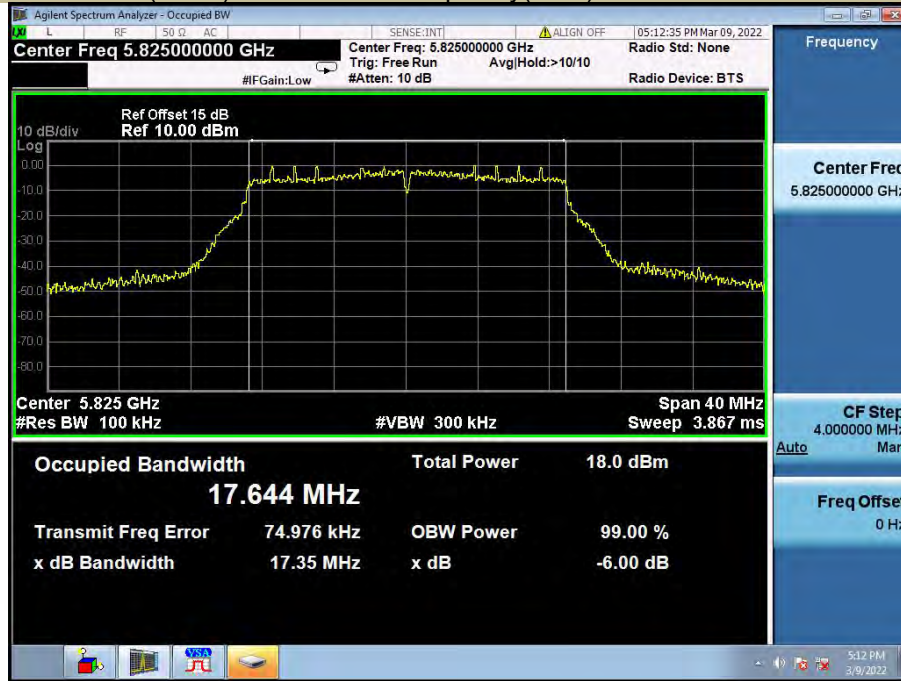


6db Emission Bandwidth UNII Band III
 Test Model 802.11n-HT40 Frequency(MHz) 5755

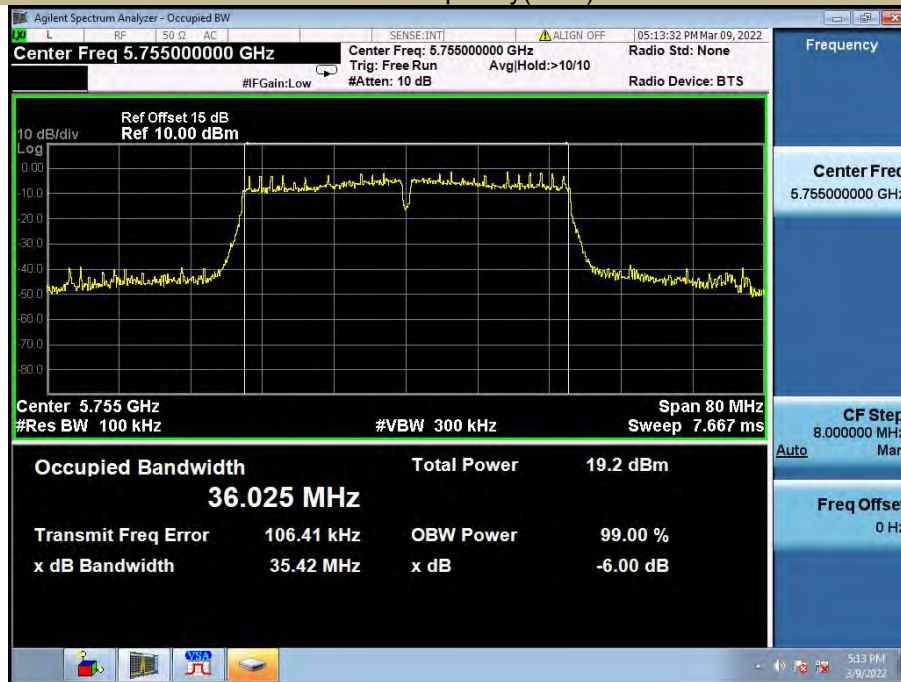

6db Emission Bandwidth UNII Band III
 Test Model **802.11n-HT40** Frequency(MHz) **5795**



6db Emission Bandwidth UNII Band III
 Test Model **802.11ac(HT40)** Frequency(MHz) **5755**

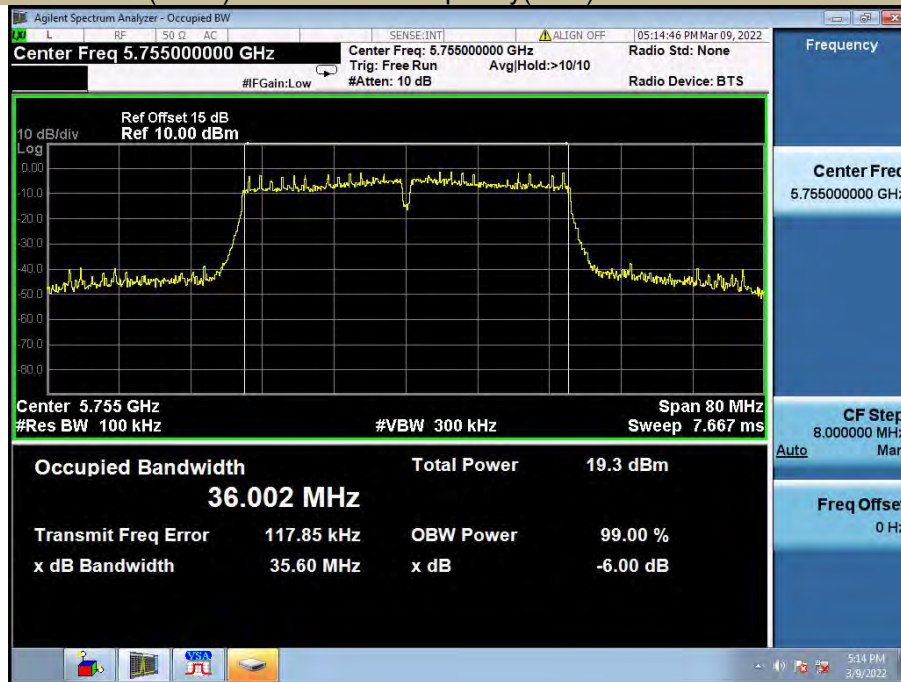

8.2 MAXIMUM CONDUCTED OUTPUT POWER

8.2.1 Applicable Standard

According to FCC Part 15.407(a)(1) for UNII Band I
According to FCC Part 15.407(a)(2) for UNII Band II-A and UNII Band II-C
According to FCC Part 15.407(a)(3) for UNII Band III
According to 789033 D02 Section II(E)

8.2.2 Conformance Limit

■ For the band 5.15-5.25 GHz,

(a) (1) (i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(a) (1) (ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(a) (1) (iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(a) (1) (iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

■ For the 5.25-5.35 GHz and 5.47-5.725 GHz bands

(a) (2) the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

■ For the band 5.725-5.85 GHz

(a) (3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

8.2.3 Test Configuration

Test according to clause 6.1 radio frequency test setup

8.2.4 Test Procedure

The maximum average conducted output power can be measured using Method PM-G (Measurement using a gated RF average power meter):

Measurements may be performed using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

- a. The Transmitter output (antenna port) was connected to the power meter.
- b. Turn on the EUT and power meter and then record the power value.
- c. Repeat above procedures on all channels needed to be tested.


8.2.5 Test Results

Temperature : 28°C		Test By: HYD					
Humidity : 65 %							
Band	Channel Number	Channel Freq. (MHz)	Conducted Power dBm	Antenna Gain dBi	EIRP dBm	Limit (dBm)	Verdict
802.11a	CH36	5180	12.42	3.70	16.12	23	Pass
	CH40	5220	12.13	3.70	15.83	23	Pass
	CH48	5240	12.86	3.70	16.56	23	Pass
	CH149	5745	11.73	3.70	15.43	30	Pass
	CH157	5785	11.89	3.70	15.59	30	Pass
	CH165	5825	11.13	3.70	14.83	30	Pass
802.11n (VHT20)	CH36	5180	12.08	3.70	15.78	23	Pass
	CH40	5220	12.00	3.70	15.70	23	Pass
	CH48	5240	12.39	3.70	16.09	23	Pass
	CH149	5745	11.24	3.70	14.94	30	Pass
	CH157	5785	11.58	3.70	15.28	30	Pass
	CH165	5825	10.74	3.70	14.44	30	Pass
802.11n (VHT40)	CH38	5190	12.30	3.70	16.00	23	Pass
	CH46	5230	12.51	3.70	16.21	23	Pass
	CH151	5755	11.85	3.70	15.55	30	Pass
	CH159	5795	11.90	3.70	15.60	30	Pass
802.11AC (VHT20)	CH36	5180	12.06	3.70	15.76	23	Pass
	CH40	5220	11.95	3.70	15.65	23	Pass
	CH48	5240	12.55	3.70	16.25	23	Pass
	CH149	5745	11.29	3.70	14.99	30	Pass
	CH157	5785	11.50	3.70	15.20	30	Pass
	CH165	5825	10.81	3.70	14.51	30	Pass
802.11AC (VHT40)	CH38	5190	11.99	3.70	15.69	23	Pass
	CH46	5230	12.54	3.70	16.24	23	Pass
	CH151	5755	11.49	3.70	15.19	30	Pass
	CH159	5795	11.56	3.70	15.26	30	Pass
802.11AC (VHT80)	CH42	5210	11.36	3.70	15.06	23	Pass
	CH155	5775	10.98	3.70	14.68	30	Pass


Note: The limit (dBm) = min(10log200, 10+10logB)=23dBm

For 802.11ac (VHT40) Test Plots see the follow pages.


MAXIMUM CONDUCTED OUTPUT POWER **UNII Band I**
 Test Model 802.11a(VHT20) mode Frequency(MHz) 5180

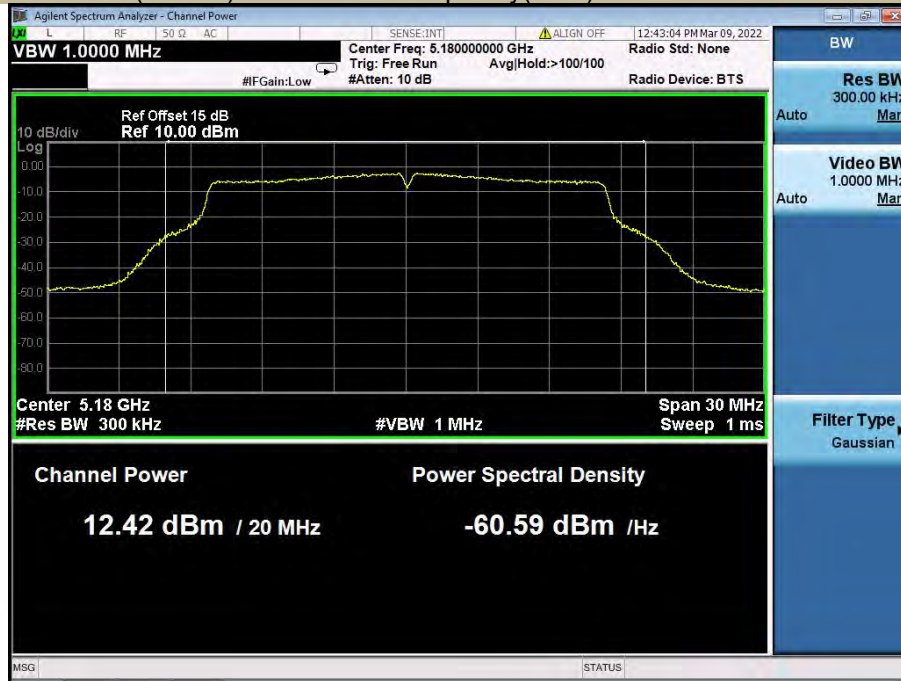


MAXIMUM CONDUCTED OUTPUT POWER **UNII Band I**
 Test Model 802.11a(VHT20) mode Frequency(MHz) 5220

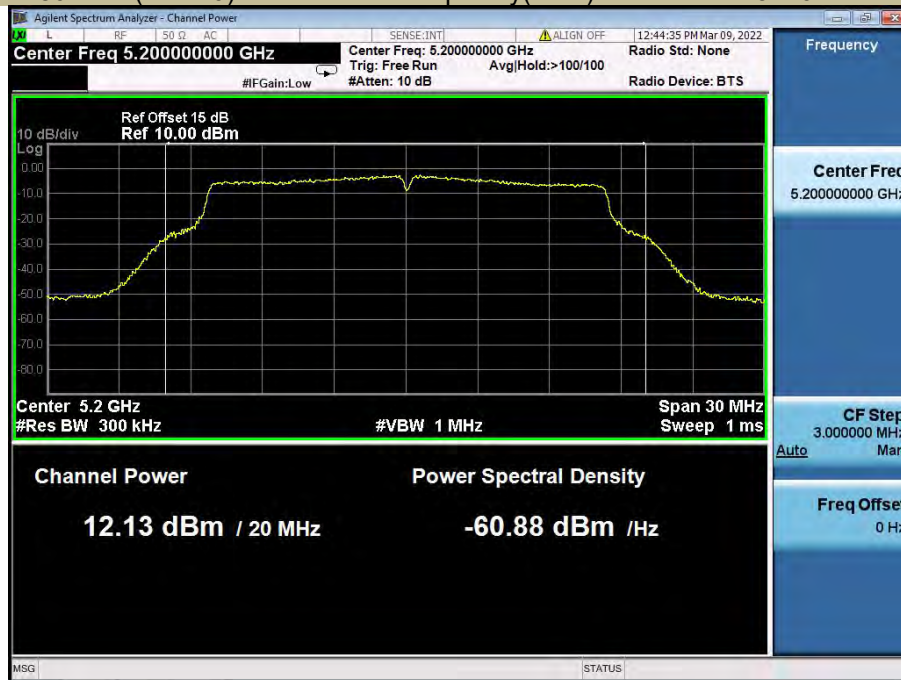


MAXIMUM CONDUCTED OUTPUT POWER **UNII Band I**
 Test Model 802.11a(VHT20) mode Frequency(MHz) 5240

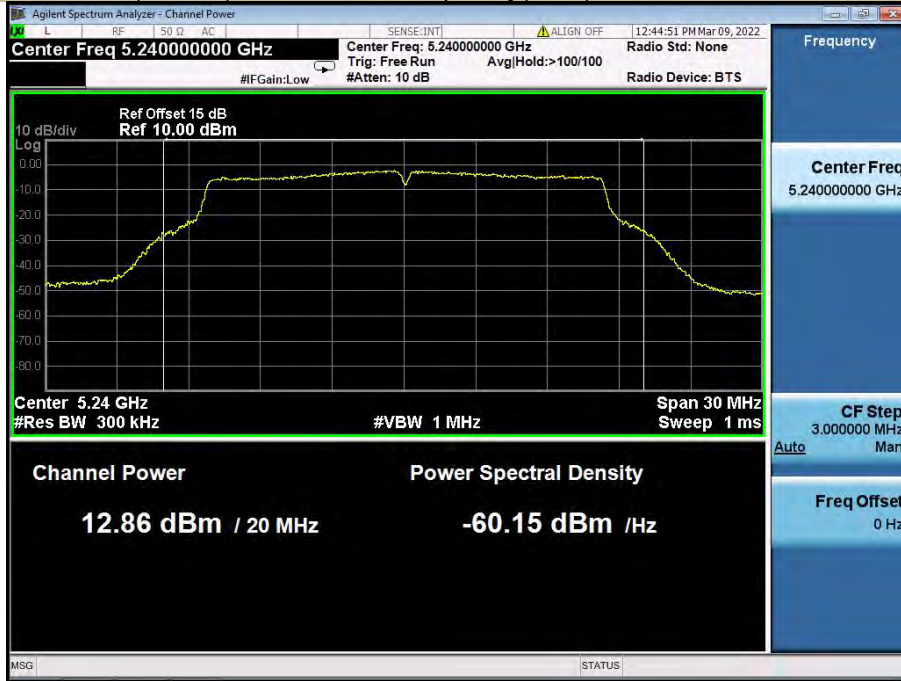


MAXIMUM CONDUCTED OUTPUT POWER **UNII Band III**
 Test Model 802.11a(VHT20) mode Frequency(MHz) 5745

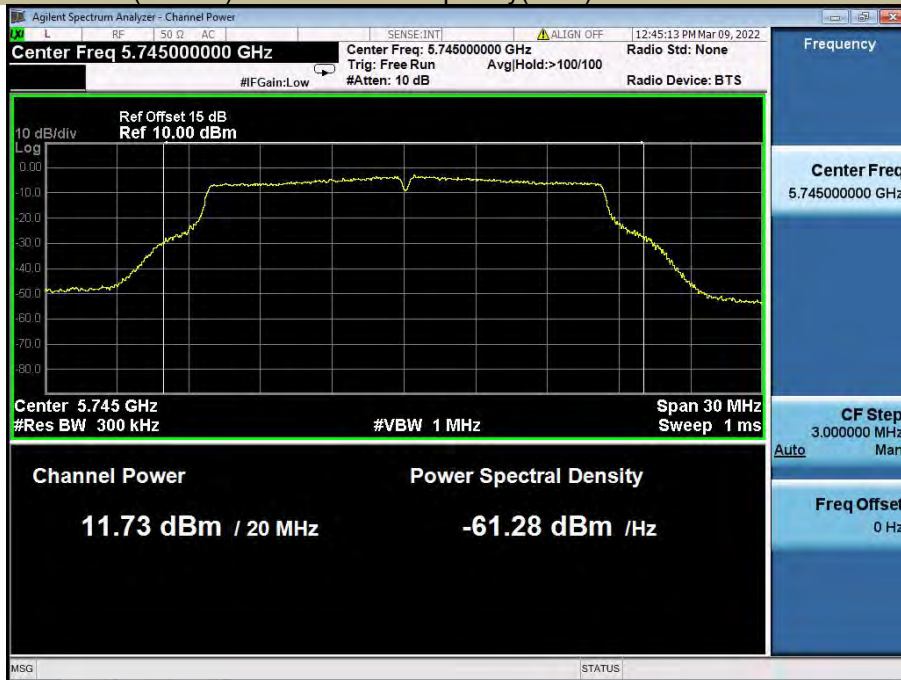

MAXIMUM CONDUCTED OUTPUT POWER **UNII Band III**
 Test Model 802.11a(VHT20) mode Frequency(MHz) 5785

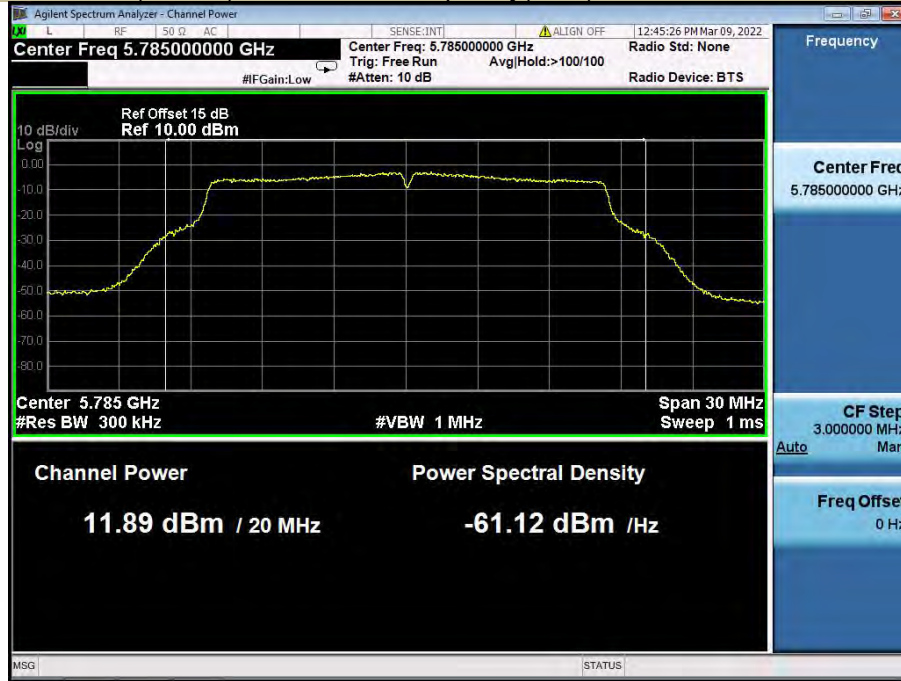

MAXIMUM CONDUCTED OUTPUT POWER **UNII Band III**
 Test Model 802.11a(VHT20) mode Frequency(MHz) 5825

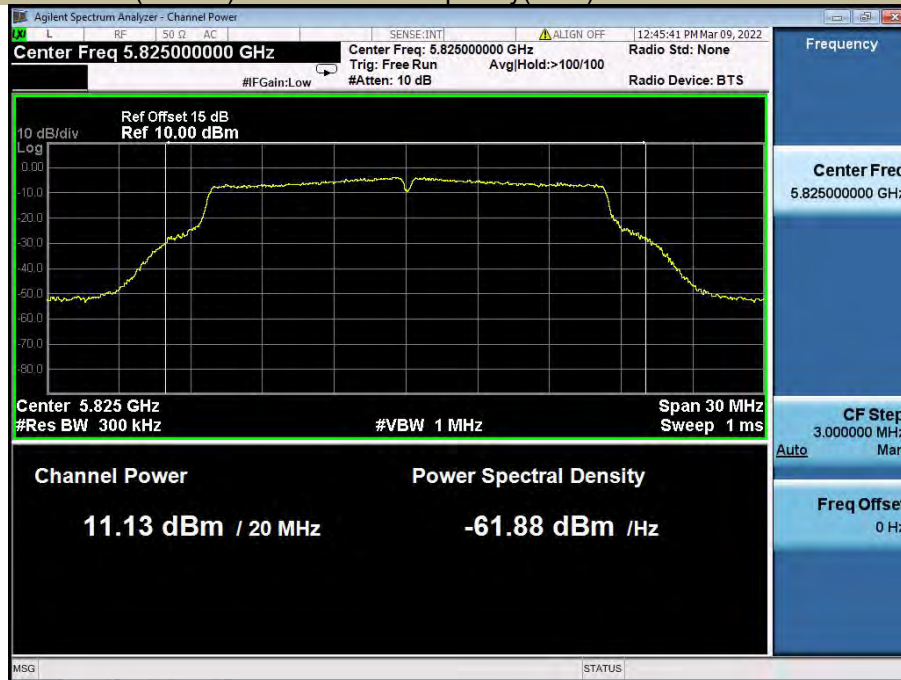

8.3 MAXIMUM PEAK POWER DENSITY

8.3.1 Applicable Standard

According to FCC Part 15.407(a)(1) for UNII Band I
According to FCC Part 15.407(a)(2) for UNII Band II-A and UNII Band II-C
According to FCC Part 15.407(a)(3) for UNII Band III
According to 789033 D02 Section II(F)

8.3.2 Conformance Limit

■ For the band 5.15-5.25 GHz,

(a) (1) (i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(a) (1) (ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(a) (1) (iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(a) (1) (iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

■ For the 5.25-5.35 GHz and 5.47-5.725 GHz bands

(b) (2) the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

■ For the band 5.725-5.85 GHz

(a) (3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

8.3.3 Test Configuration

Test according to clause 6.1 radio frequency test setup

8.3.4 Test Procedure

Methods refer to FCC KDB 789033

For devices operating in the bands 5.15-5.25 GHz, 5.25-5.35 GHz, and 5.47-5.725 GHz, the above procedures make use of 1 MHz RBW to satisfy directly the 1 MHz reference bandwidth specified in § 15.407(a)(5). For devices operating in the band 5.725-5.85 GHz, the rules specify a measurement bandwidth of 500 kHz. Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of a RBWs less than 1 MHz, or 500 kHz, “provided that the measured power is integrated over the full reference bandwidth” to show the total power over the specified measurement bandwidth (i.e., 1 MHz, or 500 kHz). If measurements are performed using a reduced resolution bandwidth (< 1 MHz, or < 500 kHz) and integrated over 1 MHz, or 500 kHz bandwidth, the following adjustments to the procedures apply:

- a) Set $RBW \geq 1/T$, where T is defined in section II.B.I.a).
- b) Set $VBW \geq 3 RBW$.
- c) If measurement bandwidth of Maximum PSD is specified in 500 kHz, add $10\log(500\text{kHz}/RBW)$ to the measured result, whereas $RBW (< 500 \text{ KHz})$ is the reduced resolution bandwidth of the spectrum analyzer set during measurement.
- d) If measurement bandwidth of Maximum PSD is specified in 1 MHz, add $10\log(1\text{MHz}/RBW)$ to the measured result, whereas $RBW (< 1 \text{ MHz})$ is the reduced resolution bandwidth of spectrum analyzer set during measurement.
- e) Care must be taken to ensure that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.

Note: As a practical matter, it is recommended to use reduced RBW of 100 KHz for the sections 5.c) and 5.d) above, since $RBW=100 \text{ KHz}$ is available on nearly all spectrum analyzers.


8.3.5 Test Results

Temperature :	28℃	Test By:	HYD
Humidity :	65 %		


TestMode	Frequency[MHz]	Result [dBm/MHz]	Limit[dBm/MHz]	Verdict
11A	5180	2.431	≤11.00	PASS
	5220	2.545	≤11.00	PASS
	5240	2.635	≤11.00	PASS
	5745	-1.302	≤30.00	PASS
	5785	-0.485	≤30.00	PASS
	5825	-1.354	≤30.00	PASS
11N20SISO	5180	2.196	≤11.00	PASS
	5220	1.504	≤11.00	PASS
	5240	2.143	≤11.00	PASS
	5745	-1.914	≤30.00	PASS
	5785	-1.567	≤30.00	PASS
11N40SISO	5180	2.196	≤11.00	PASS
	5220	1.504	≤11.00	PASS
	5240	2.143	≤11.00	PASS
	5745	-1.914	≤30.00	PASS
	5785	-1.567	≤30.00	PASS
11AC20SISO	5180	1.891	≤11.00	PASS
	5220	1.494	≤11.00	PASS
	5240	2.147	≤11.00	PASS
	5745	-1.543	≤30.00	PASS
11AC40SISO	5180	1.891	≤11.00	PASS
	5220	1.494	≤11.00	PASS
	5240	2.147	≤11.00	PASS
	5745	-1.543	≤30.00	PASS
11AC80SISO	5180	1.891	≤11.00	PASS
	5220	1.494	≤11.00	PASS
	5240	2.147	≤11.00	PASS
	5745	-1.543	≤30.00	PASS
11AC20SISO	5190	-0.878	≤11.00	PASS
	5230	-0.831	≤11.00	PASS
	5755	-4.374	≤30.00	PASS
	5795	-4.265	≤30.00	PASS
11AC40SISO	5190	-0.599	≤11.00	PASS
	5230	-0.852	≤11.00	PASS
	5755	-4.137	≤30.00	PASS
	5795	-4.430	≤30.00	PASS
11AC80SISO	5210	-4.996	≤11.00	PASS
	5775	-7.785	≤30.00	PASS

Note:
 UNII Band I limit: EIRP-PSD ≤10dBm/1MHz
 UNII Band III Limit: Conducted-PSD ≤30dBm /500KHz

Power Spectral Density UNII Band I
 Test Model 802.11a Frequency(MHz) 5180

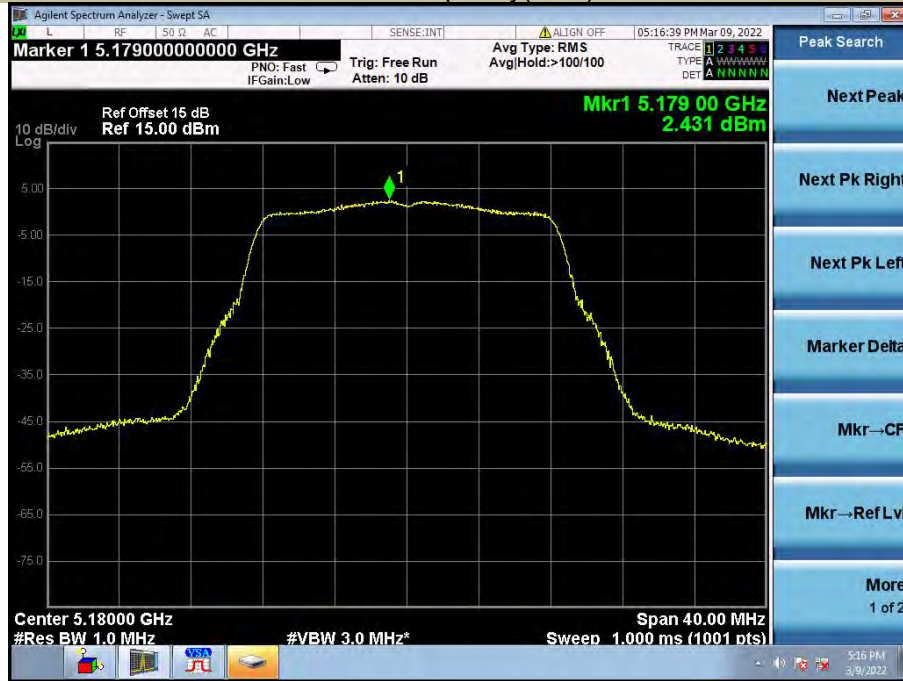

Power Spectral Density UNII Band I
 Test Model 802.11a Frequency(MHz) 5220

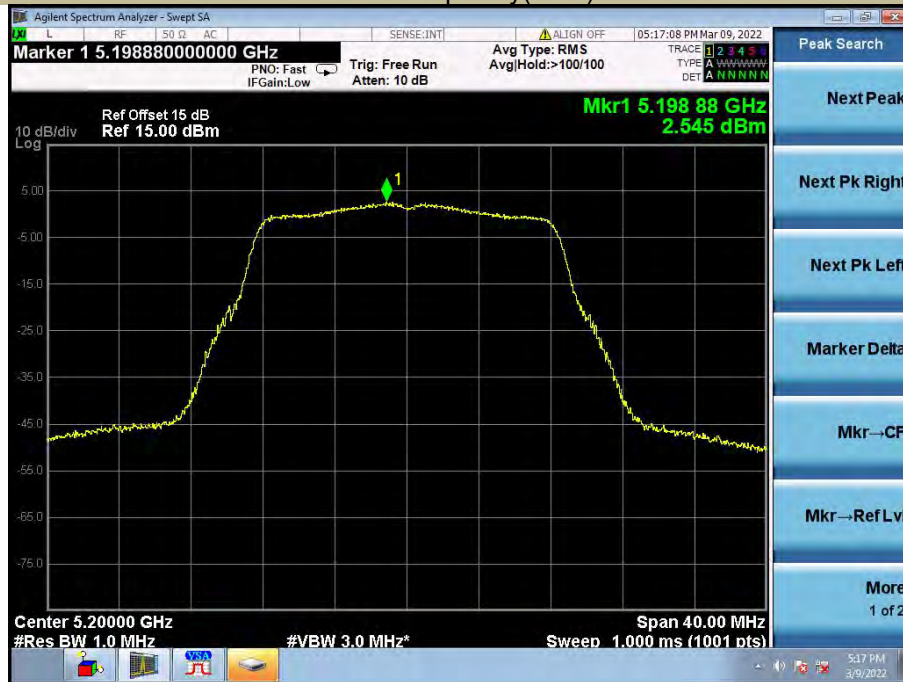


Power Spectral Density	UNII Band I
Test Model 802.11a	Frequency(MHz) 5240




Power Spectral Density	UNII Band III
Test Model 802.11a	Frequency(MHz) 5745




Power Spectral Density UNII Band III
 Test Model 802.11a Frequency(MHz) 5785

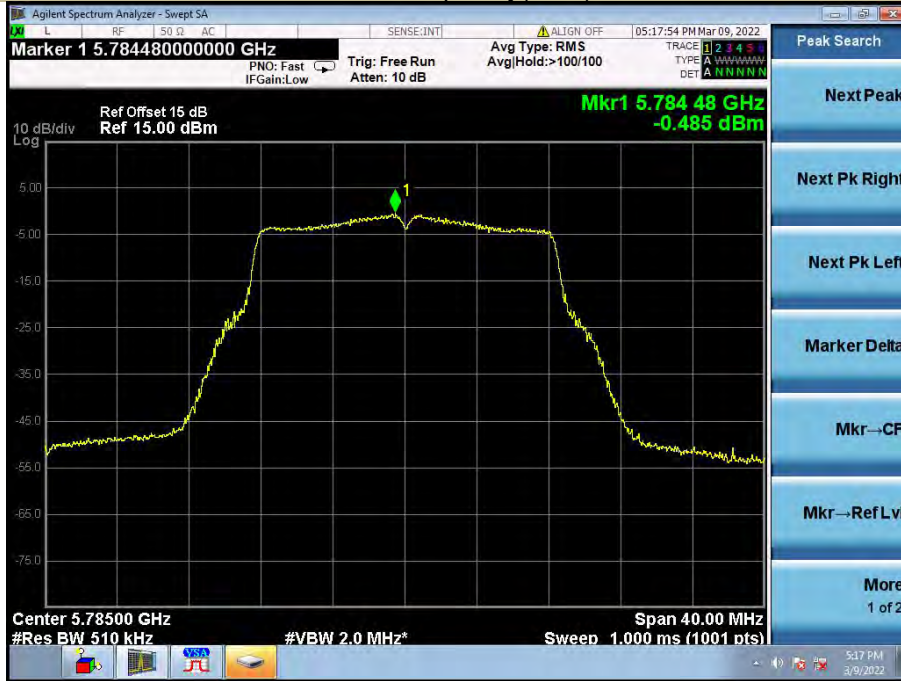


Power Spectral Density UNII Band III
 Test Model 802.11a Frequency(MHz) 5825

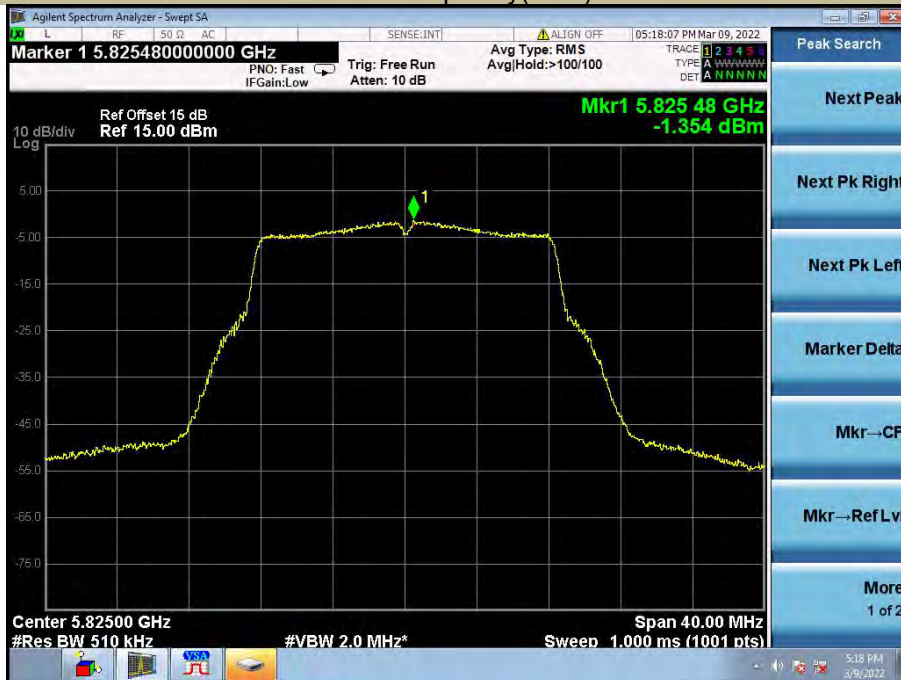


Power Spectral Density UNII Band I
 Test Model 802.11n(HT20) mode Frequency(MHz) 5180

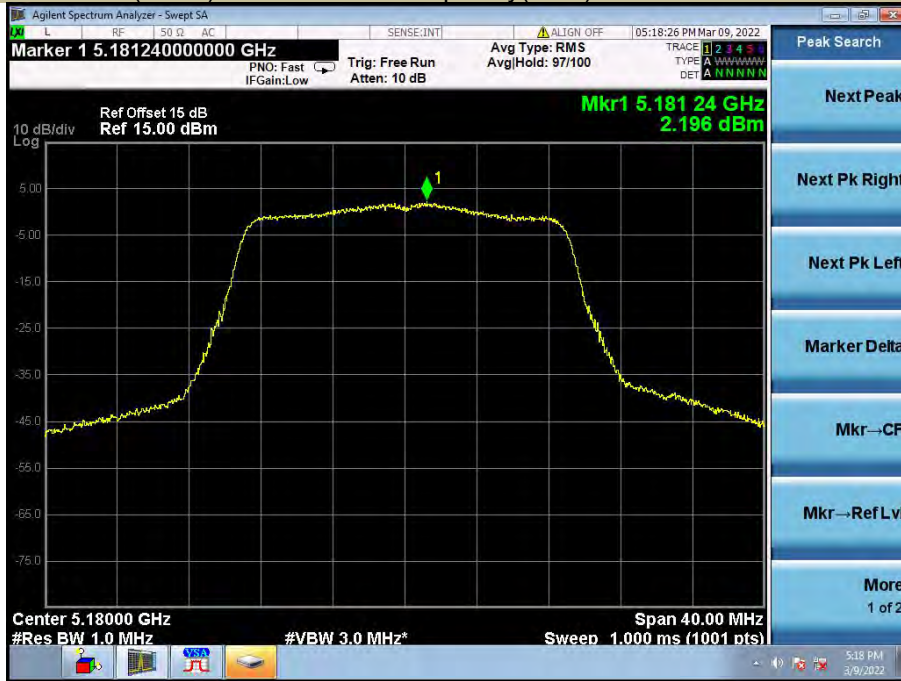


Power Spectral Density UNII Band I
 Test Model 802.11n(HT20) mode Frequency(MHz) 5220

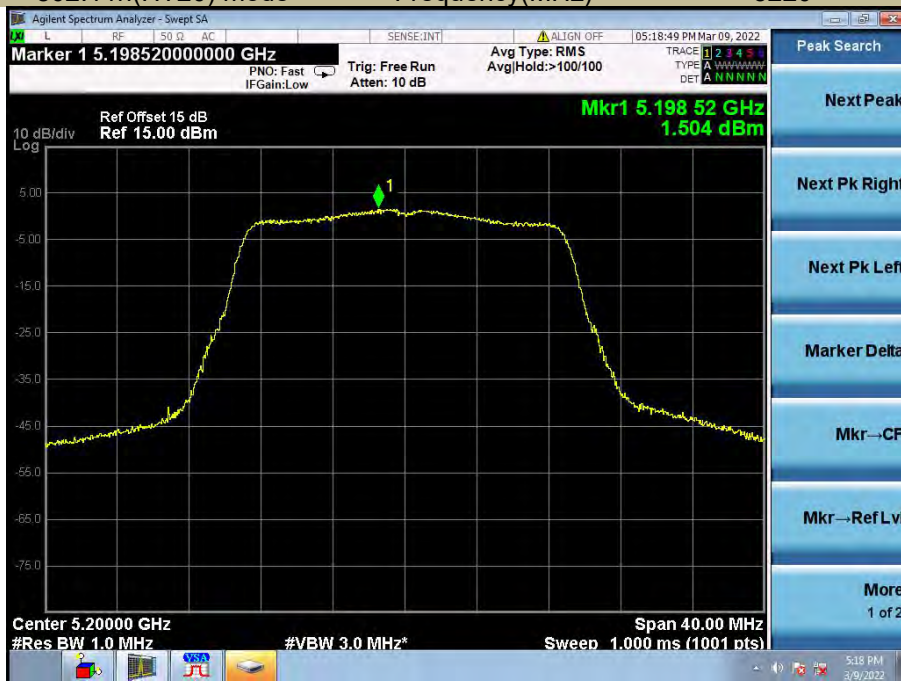


Power Spectral Density UNII Band I
 Test Model 802.11n(HT20) mode Frequency(MHz) 5240

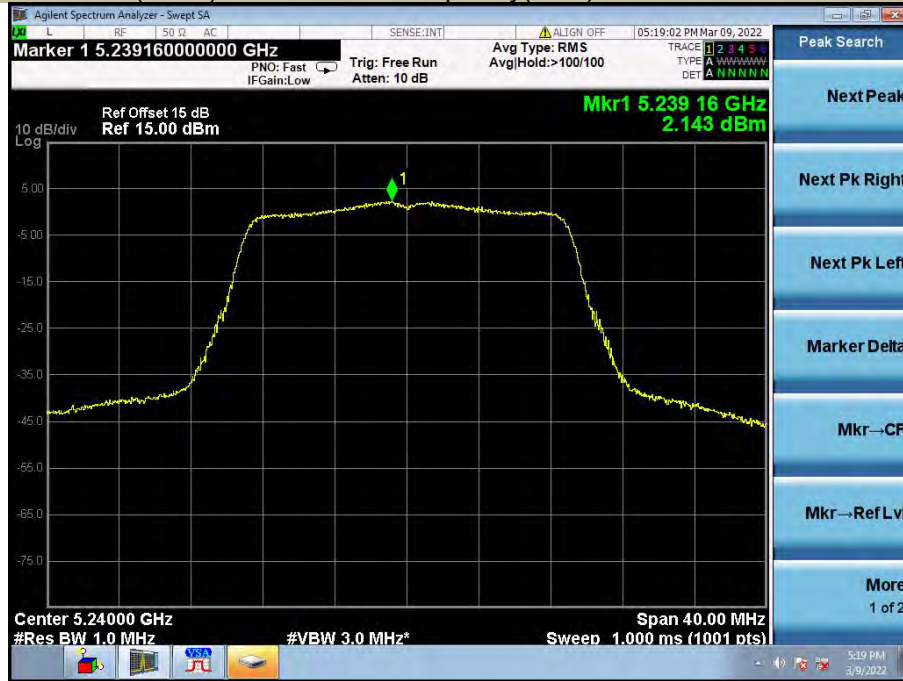


Power Spectral Density UNII Band III
 Test Model 802.11n(HT20) mode Frequency(MHz) 5745

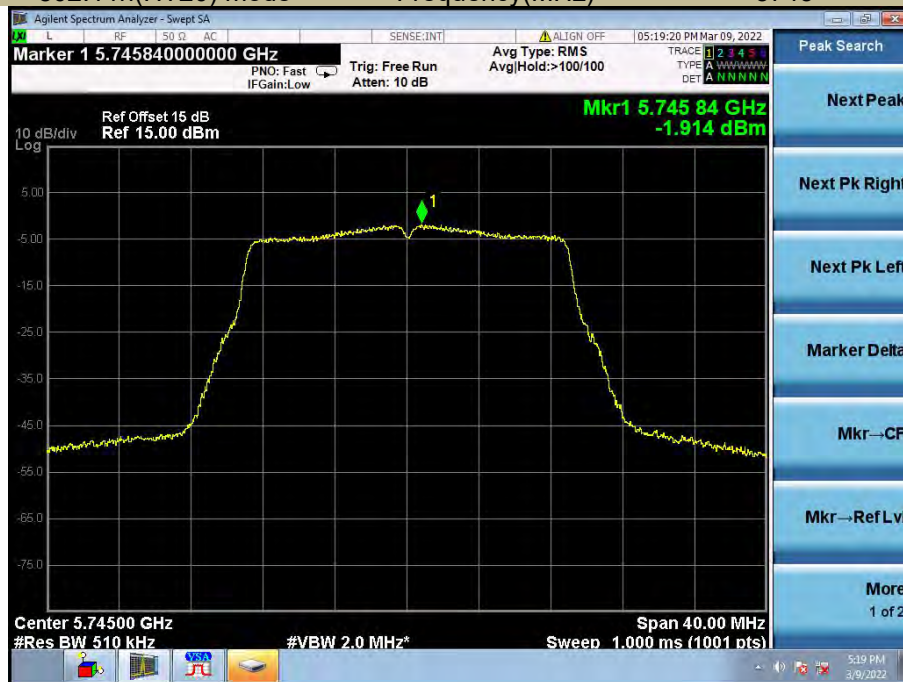


Power Spectral Density UNII Band III
 Test Model 802.11n(HT20) mode Frequency(MHz) 5785

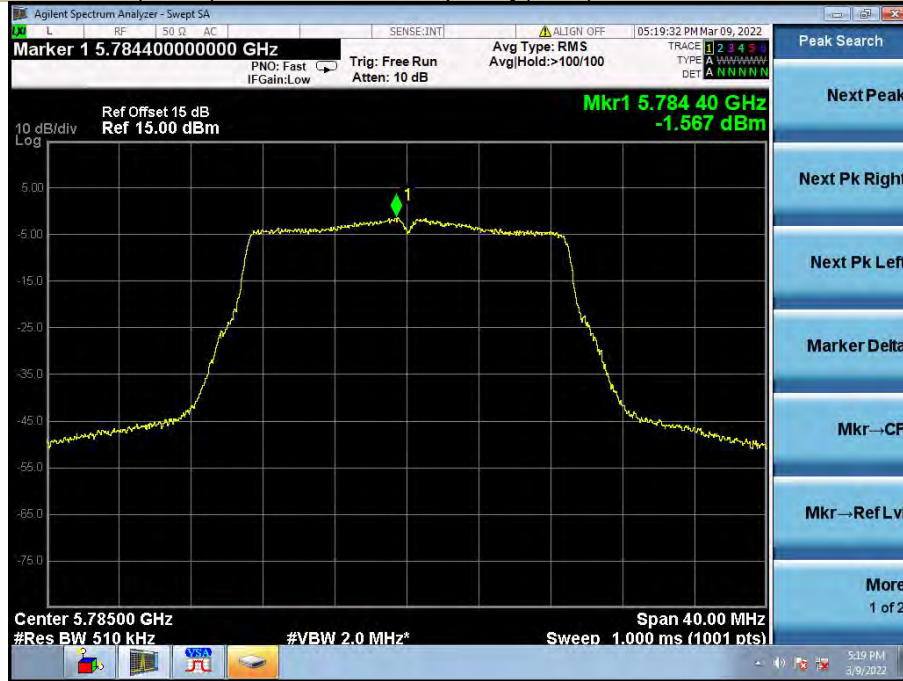


Power Spectral Density UNII Band III
 Test Model 802.11n(HT20) mode Frequency(MHz) 5825

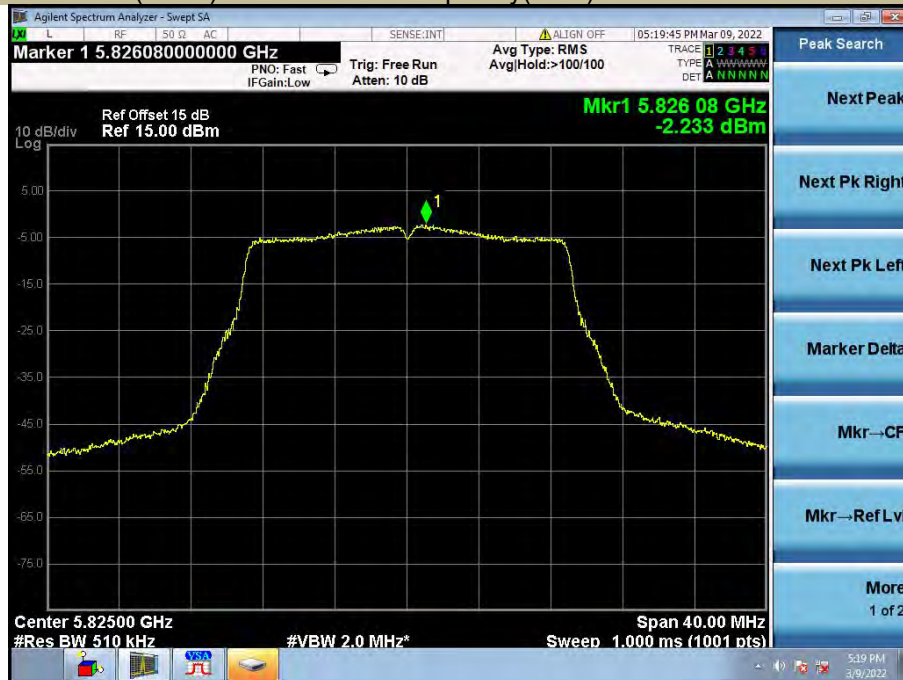

Power Spectral Density UNII Band I
 Test Model 802.11ac(VHT20) mode Frequency(MHz) 5180

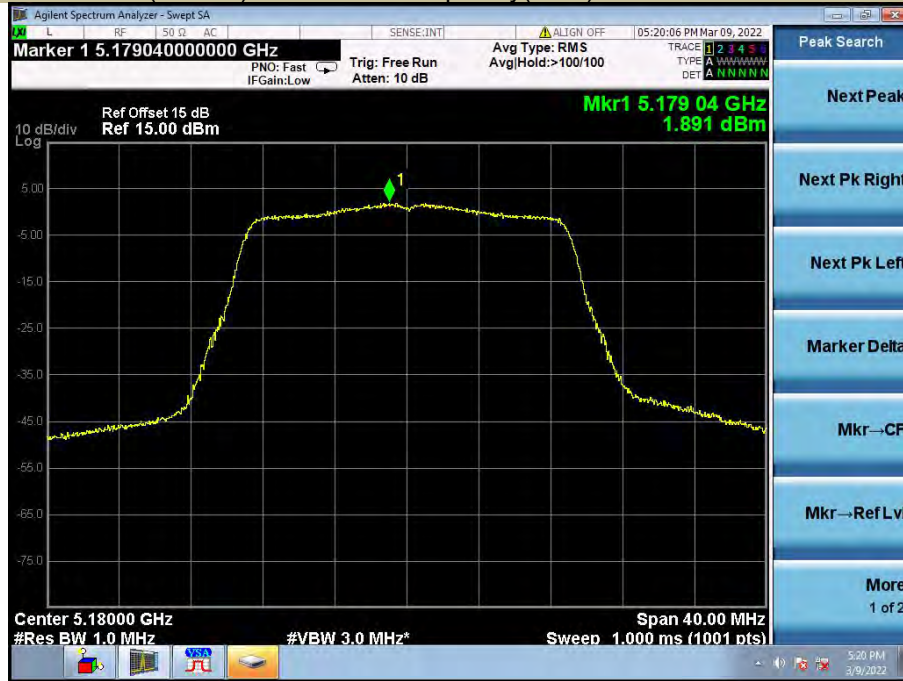


Power Spectral Density UNII Band I
 Test Model 802.11ac(VHT20) mode Frequency(MHz) 5220

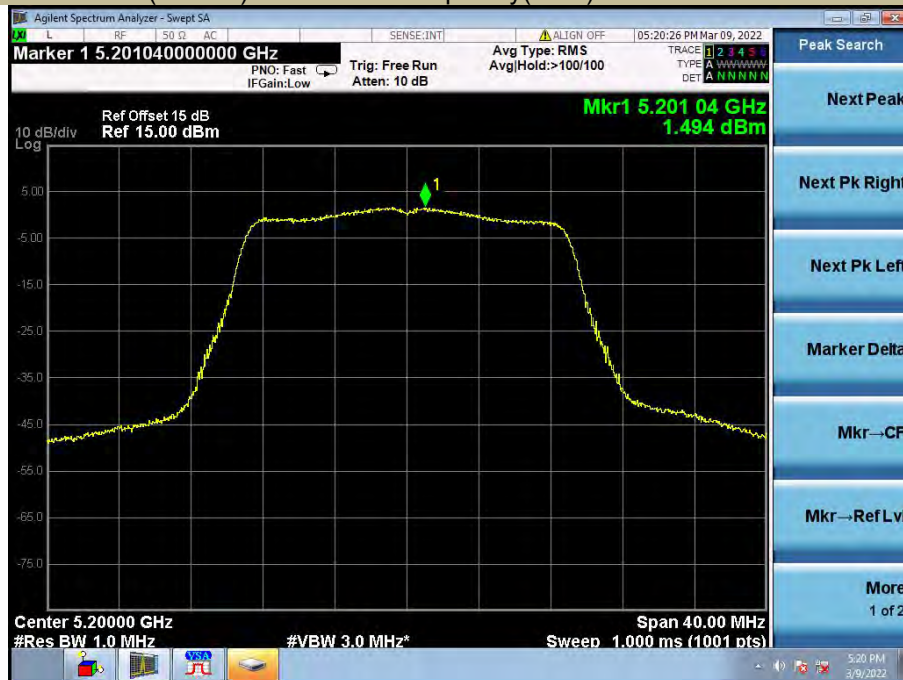


Power Spectral Density UNII Band I
 Test Model 802.11ac(VHT20) mode Frequency(MHz) 5240




Power Spectral Density UNII Band III
 Test Model 802.11ac(VHT20) mode Frequency(MHz) 5745

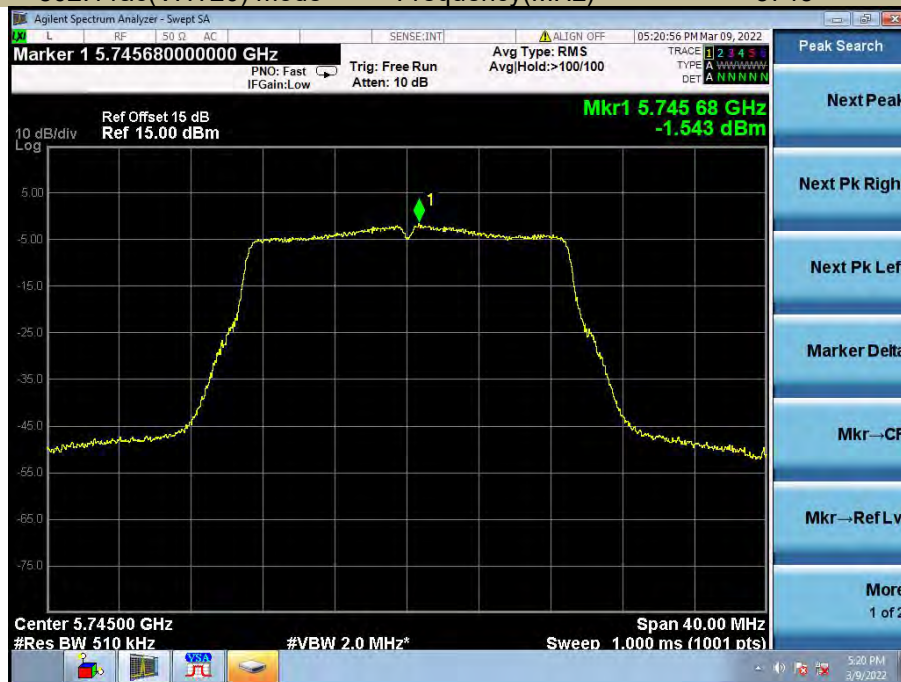


Power Spectral Density UNII Band III
 Test Model 802.11ac(VHT20) mode Frequency(MHz) 5785

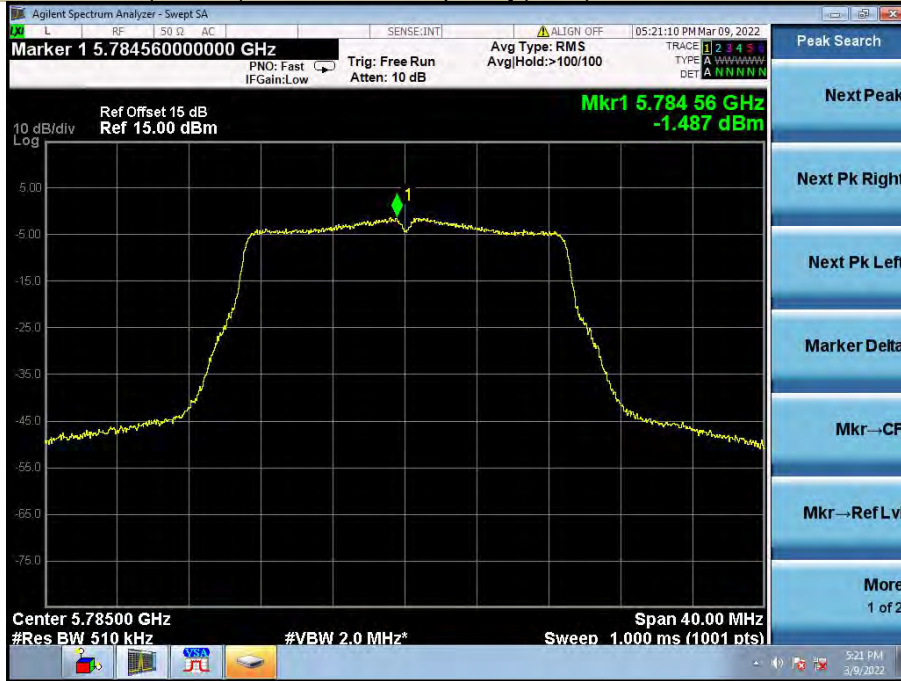

Power Spectral Density UNII Band III
 Test Model 802.11ac(VHT20) mode Frequency(MHz) 5825

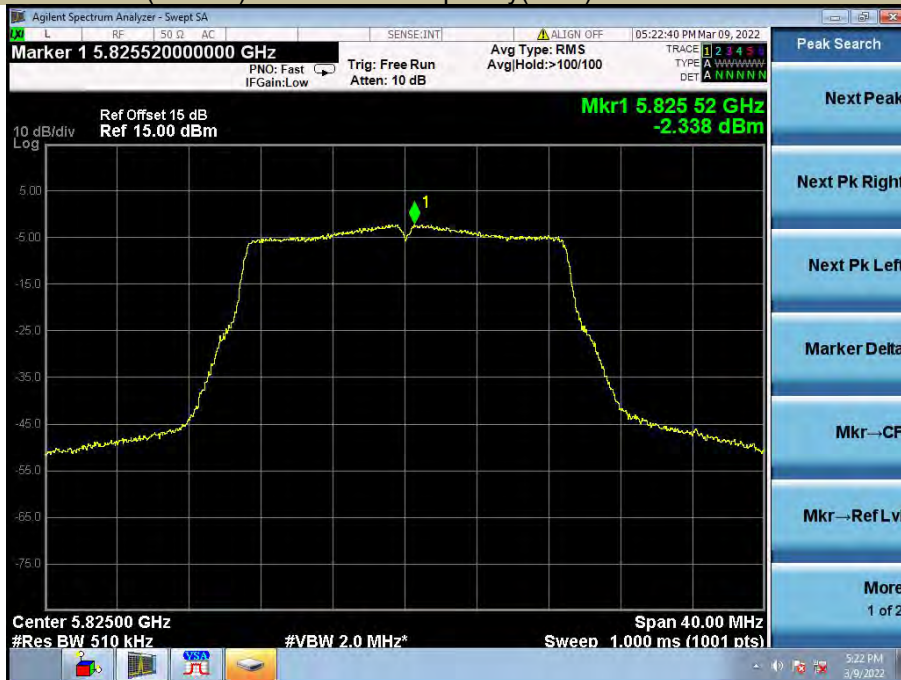


Power Spectral Density UNII Band I
 Test Model 802.11n(HT40) mode Frequency(MHz) 5190

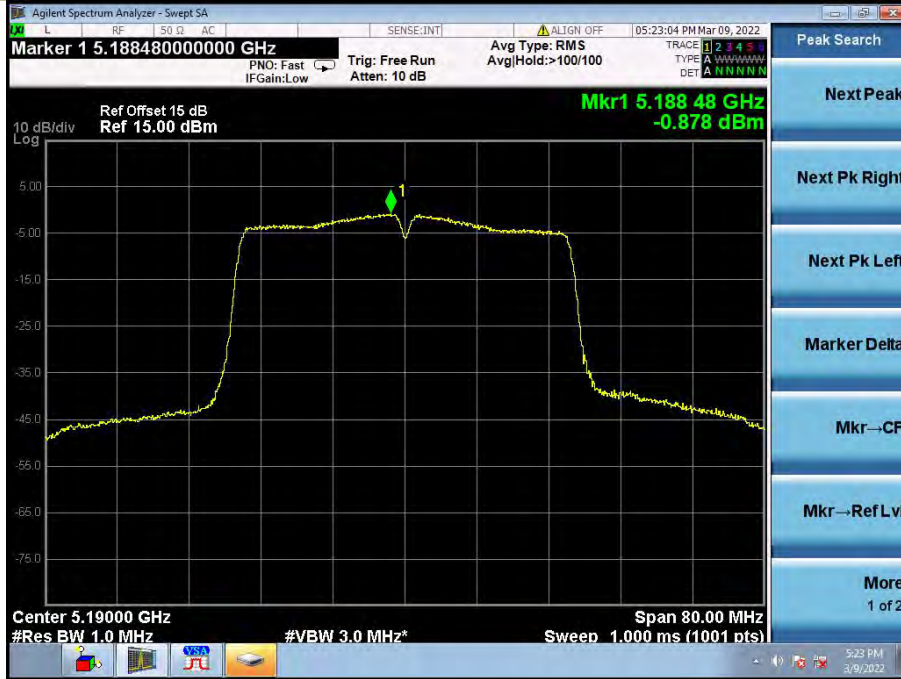


Power Spectral Density UNII Band I
 Test Model 802.11n(HT40) mode Frequency(MHz) 5230




Power Spectral Density UNII Band III
 Test Model 802.11n(HT40) mode Frequency(MHz) 5755

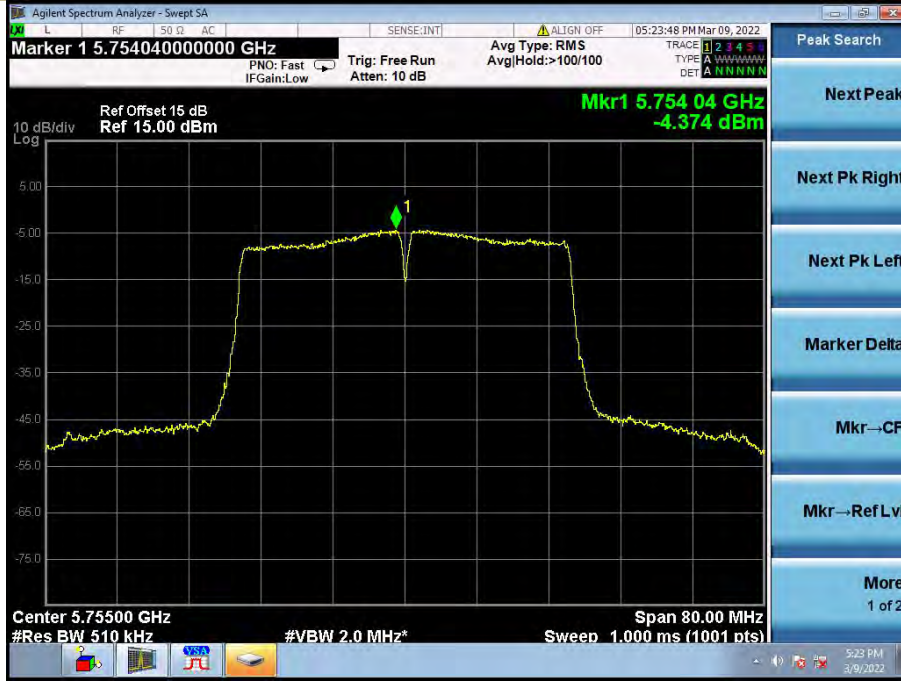


Power Spectral Density UNII Band III
 Test Model 802.11n(HT40) mode Frequency(MHz) 5795

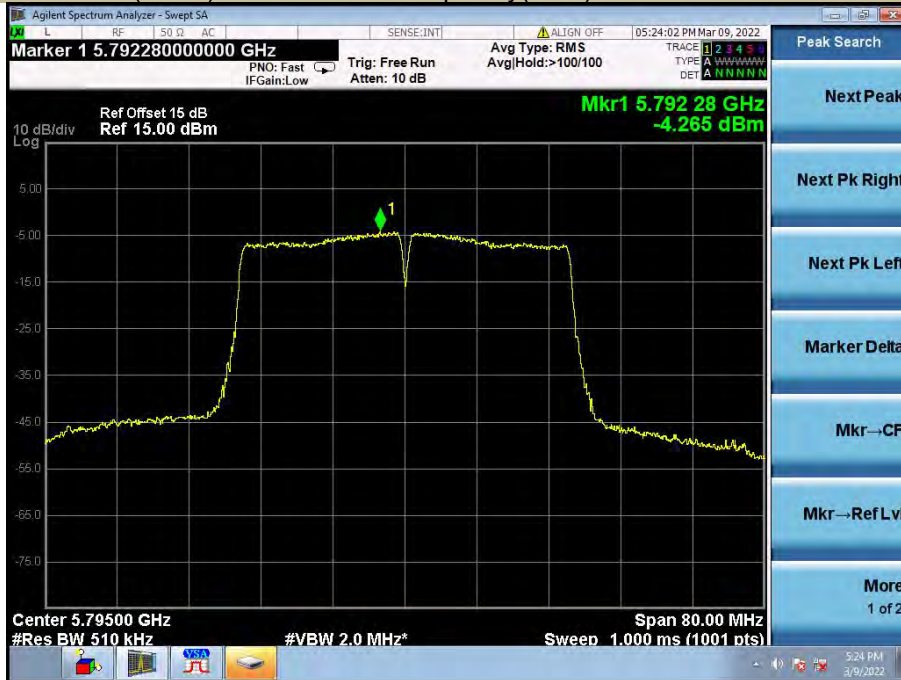


Power Spectral Density UNII Band I
 Test Model 802.11ac(VHT40) mode Frequency(MHz) 5190

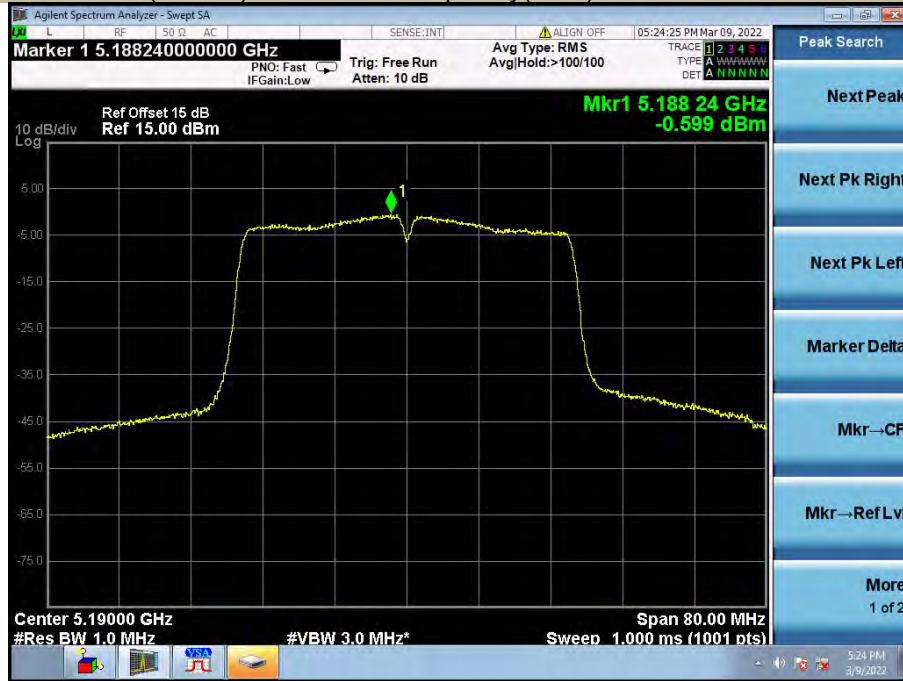


Power Spectral Density UNII Band I
 Test Model 802.11ac(VHT40) mode Frequency(MHz) 5230

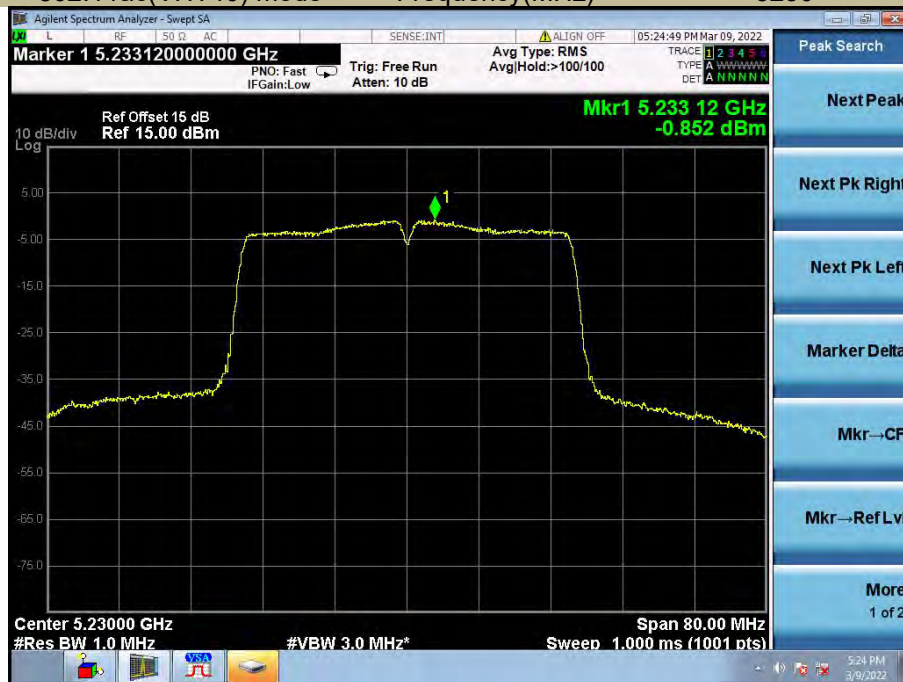

Power Spectral Density UNII Band III
 Test Model 802.11ac(VHT40) mode Frequency(MHz) 5755

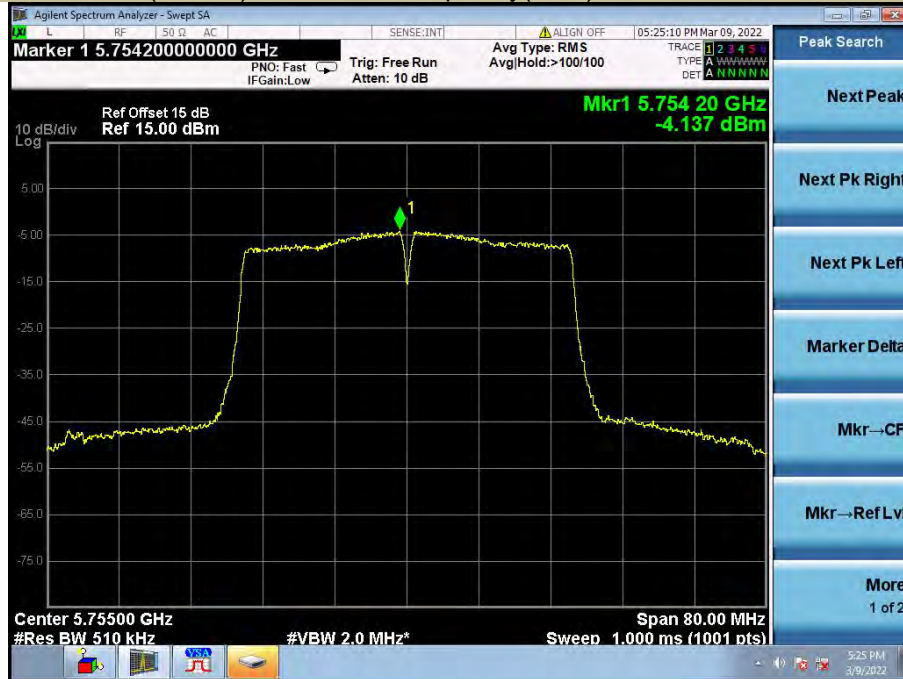


Power Spectral Density UNII Band III
 Test Model 802.11ac(VHT40) mode Frequency(MHz) 5795

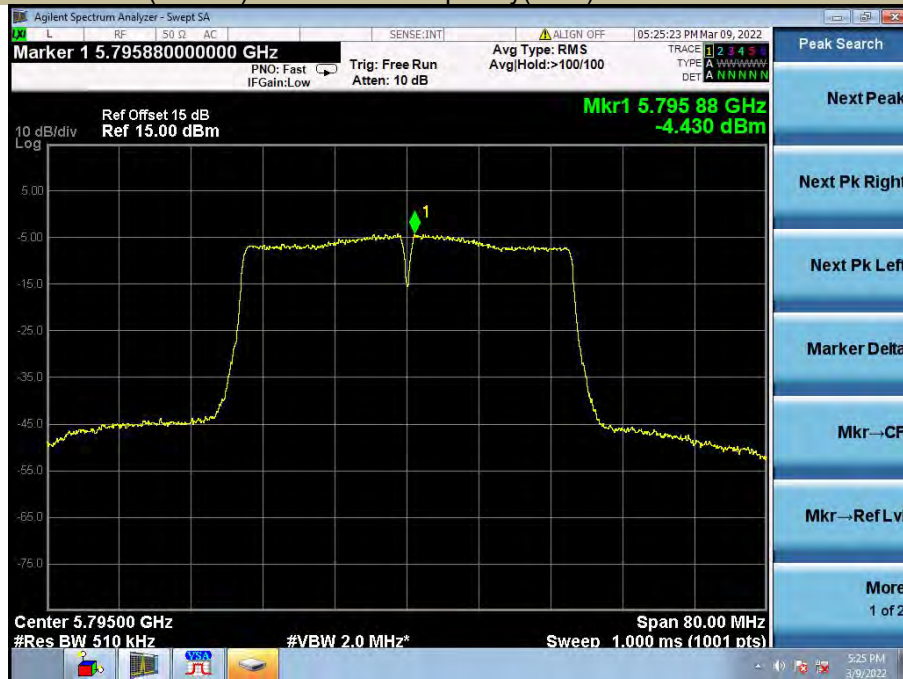

Power Spectral Density UNII Band I
 Test Model 802.11ac(VHT80) mode Frequency(MHz) 5210



Power Spectral Density UNII Band III
 Test Model 802.11ac(VHT80) mode Frequency(MHz) 5775

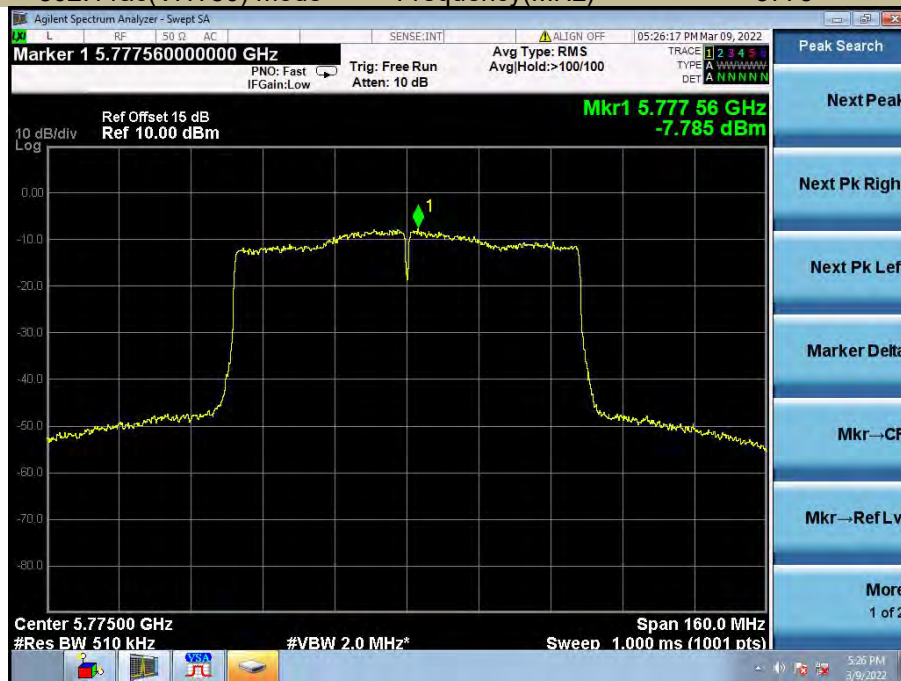

8.4 FREQUENCY STABILITY

8.4.1 Applicable Standard

According to FCC Part 15.407(g)
ANSI C63.10 Section 6.8

8.4.2 Conformance Limit

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the users manual.

8.4.3 Test Configuration

Test according to clause 6.1 radio frequency test setup

8.4.4 Test Procedure

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.

Set to the maximum power setting and enable the EUT transmit continuously

Set RBW = 10 kHz.

Set Span= Entire absence of modulation emissions band

Set the video bandwidth (VBW) =30 kHz. width

Set Detector = Peak.

Set Trace mode = max hold.

Set Sweep = auto couple.

Allow the trace to stabilize.

The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value.

Beginning at each temperature level specified in user manual , the frequency shall be measured within one minute after application of primary power to the transmitter and at intervals of no more than one minute thereafter until ten minutes have elapsed or until sufficient measurements are obtained to indicate clearly that the frequency has stabilized within the applicable tolerance, whichever time period is greater. During each test, the ambient temperature shall not be allowed to rise more than 10° centigrade above the respective beginning ambient temperature level

Measure and record the results in the test report.

8.4.5 Test Results

TestMode	Frequency[MHz]	Voltage			Deviation (Hz)	Deviation (ppm)	Limit (ppm)	Verdict	
		Voltage [Vdc]	Temperature (°C)						
11A	5180	NV	NT		20000.00	3.861004	20	PASS	
		LV	NT		20000.00	3.861004	20	PASS	
		HV	NT		0.00	0.000000	20	PASS	
	5220	NV	NT		0.00	0.000000	20	PASS	
		LV	NT		0.00	0.000000	20	PASS	
		HV	NT		0.00	0.000000	20	PASS	
	5240	NV	NT		0.00	0.000000	20	PASS	
		LV	NT		-20000.00	-3.816794	20	PASS	
		HV	NT		0.00	0.000000	20	PASS	
	5745	NV	NT		0.00	0.000000	20	PASS	
		LV	NT		0.00	0.000000	20	PASS	
		HV	NT		-20000.00	-3.481288	20	PASS	
	5785	NV	NT		0.00	0.000000	20	PASS	
		LV	NT		-20000.00	-3.457217	20	PASS	
		HV	NT		0.00	0.000000	20	PASS	
	5825	NV	NT		-20000.00	-3.433476	20	PASS	
		LV	NT		0.00	0.000000	20	PASS	
		HV	NT		0.00	0.000000	20	PASS	
	11N20SI SO	5180	NV	NT		0.00	0.000000	20	PASS
			LV	NT		20000.00	3.861004	20	PASS
			HV	NT		0.00	0.000000	20	PASS
		5220	NV	NT		0.00	0.000000	20	PASS
			LV	NT		0.00	0.000000	20	PASS
			HV	NT		0.00	0.000000	20	PASS
5240		NV	NT		0.00	0.000000	20	PASS	
		LV	NT		-20000.00	-3.816794	20	PASS	
		HV	NT		0.00	0.000000	20	PASS	
5745		NV	NT		0.00	0.000000	20	PASS	
		LV	NT		0.00	0.000000	20	PASS	
		HV	NT		0.00	0.000000	20	PASS	
5785		NV	NT		0.00	0.000000	20	PASS	
		LV	NT		0.00	0.000000	20	PASS	
		HV	NT		0.00	0.000000	20	PASS	
5825		NV	NT		0.00	0.000000	20	PASS	
		LV	NT		0.00	0.000000	20	PASS	
		HV	NT		0.00	0.000000	20	PASS	
11N40SI SO		5190	NV	NT		0.00	0.000000	20	PASS
			LV	NT		0.00	0.000000	20	PASS
			HV	NT		0.00	0.000000	20	PASS
		5230	NV	NT		0.00	0.000000	20	PASS
			LV	NT		0.00	0.000000	20	PASS
			HV	NT		0.00	0.000000	20	PASS
	5755	NV	NT		0.00	0.000000	20	PASS	
		LV	NT		0.00	0.000000	20	PASS	
		HV	NT		0.00	0.000000	20	PASS	
	5795	NV	NT		0.00	0.000000	20	PASS	
		LV	NT		0.00	0.000000	20	PASS	
		HV	NT		0.00	0.000000	20	PASS	

11AC20S ISO	5180	NV	NT	0.00	0.000000	20	PASS
		LV	NT	0.00	0.000000	20	PASS
		HV	NT	0.00	0.000000	20	PASS
	5220	NV	NT	0.00	0.000000	20	PASS
		LV	NT	-20000.00	-3.831418	20	PASS
		HV	NT	0.00	0.000000	20	PASS
	5240	NV	NT	0.00	0.000000	20	PASS
		LV	NT	-20000.00	-3.816794	20	PASS
		HV	NT	0.00	0.000000	20	PASS
	5745	NV	NT	0.00	0.000000	20	PASS
		LV	NT	0.00	0.000000	20	PASS
		HV	NT	0.00	0.000000	20	PASS
5785	NV	NT	0.00	0.000000	20	PASS	
	LV	NT	0.00	0.000000	20	PASS	
	HV	NT	0.00	0.000000	20	PASS	
5825	NV	NT	0.00	0.000000	20	PASS	
	LV	NT	0.00	0.000000	20	PASS	
	HV	NT	0.00	0.000000	20	PASS	
11AC40S ISO	5190	NV	NT	0.00	0.000000	20	PASS
		LV	NT	0.00	0.000000	20	PASS
		HV	NT	0.00	0.000000	20	PASS
	5230	NV	NT	0.00	0.000000	20	PASS
		LV	NT	0.00	0.000000	20	PASS
		HV	NT	0.00	0.000000	20	PASS
	5755	NV	NT	0.00	0.000000	20	PASS
		LV	NT	0.00	0.000000	20	PASS
		HV	NT	0.00	0.000000	20	PASS
	5795	NV	NT	0.00	0.000000	20	PASS
		LV	NT	0.00	0.000000	20	PASS
		HV	NT	0.00	0.000000	20	PASS
11AC80S ISO	5210	NV	NT	0.00	0.000000	20	PASS
		LV	NT	0.00	0.000000	20	PASS
		HV	NT	0.00	0.000000	20	PASS
	5775	NV	NT	0.00	0.000000	20	PASS
		LV	NT	0.00	0.000000	20	PASS
		HV	NT	0.00	0.000000	20	PASS

Temperature							
TestMode	Frequen cy[MHz]	Voltage [Vdc]	Temper ature (°C)	Deviation (Hz)	Deviation (ppm)	Limit (ppm)	Verdict
11A	5180	NV	-30	20000.00	3.861004	20	PASS
		NV	-20	20000.00	3.861004	20	PASS
		NV	-10	0.00	0.000000	20	PASS
		NV	0	0.00	0.000000	20	PASS
		NV	10	0.00	0.000000	20	PASS
		NV	20	0.00	0.000000	20	PASS
		NV	30	20000.00	3.861004	20	PASS
		NV	40	0.00	0.000000	20	PASS
	5220	NV	50	20000.00	3.861004	20	PASS
		NV	-30	0.00	0.000000	20	PASS
		NV	-20	0.00	0.000000	20	PASS
		NV	-10	-20000.00	-3.831418	20	PASS
		NV	0	0.00	0.000000	20	PASS
		NV	10	0.00	0.000000	20	PASS
		NV	20	0.00	0.000000	20	PASS
		NV	30	0.00	0.000000	20	PASS
	5240	NV	40	0.00	0.000000	20	PASS
		NV	50	-20000.00	-3.831418	20	PASS
		NV	-30	20000.00	3.816794	20	PASS

		NV	-20	-20000.00	-3.816794	20	PASS	
		NV	-10	-20000.00	-3.816794	20	PASS	
		NV	0	-20000.00	-3.816794	20	PASS	
		NV	10	-20000.00	-3.816794	20	PASS	
		NV	20	-20000.00	-3.816794	20	PASS	
		NV	30	20000.00	3.816794	20	PASS	
		NV	40	-20000.00	-3.816794	20	PASS	
		NV	50	0.00	0.000000	20	PASS	
	5745	NV	-30	0.00	0.000000	20	PASS	
		NV	-20	0.00	0.000000	20	PASS	
		NV	-10	-20000.00	-3.481288	20	PASS	
		NV	0	-20000.00	-3.481288	20	PASS	
		NV	10	-20000.00	-3.481288	20	PASS	
		NV	20	0.00	0.000000	20	PASS	
		NV	30	-20000.00	-3.481288	20	PASS	
		NV	40	-20000.00	-3.481288	20	PASS	
	5785	NV	50	-20000.00	-3.481288	20	PASS	
		NV	-30	0.00	0.000000	20	PASS	
		NV	-20	-20000.00	-3.457217	20	PASS	
		NV	-10	-20000.00	-3.457217	20	PASS	
		NV	0	0.00	0.000000	20	PASS	
		NV	10	0.00	0.000000	20	PASS	
		NV	20	-20000.00	-3.457217	20	PASS	
		NV	30	0.00	0.000000	20	PASS	
	5825	NV	40	-20000.00	-3.457217	20	PASS	
		NV	50	0.00	0.000000	20	PASS	
		NV	-30	0.00	0.000000	20	PASS	
		NV	-20	0.00	0.000000	20	PASS	
		NV	-10	-20000.00	-3.433476	20	PASS	
		NV	0	0.00	0.000000	20	PASS	
		NV	10	-20000.00	-3.433476	20	PASS	
		NV	20	0.00	0.000000	20	PASS	
	11N20SI SO	5180	NV	30	-20000.00	-3.433476	20	PASS
			NV	40	0.00	0.000000	20	PASS
			NV	50	0.00	0.000000	20	PASS
			NV	-30	0.00	0.000000	20	PASS
			NV	-20	0.00	0.000000	20	PASS
			NV	-10	0.00	0.000000	20	PASS
			NV	0	0.00	0.000000	20	PASS
			NV	10	0.00	0.000000	20	PASS
5220		NV	20	0.00	0.000000	20	PASS	
		NV	30	-20000.00	-3.861004	20	PASS	
		NV	40	0.00	0.000000	20	PASS	
		NV	50	0.00	0.000000	20	PASS	
		NV	-30	-20000.00	-3.831418	20	PASS	
		NV	-20	0.00	0.000000	20	PASS	
		NV	-10	0.00	0.000000	20	PASS	
		NV	0	0.00	0.000000	20	PASS	
5240	NV	10	20000.00	3.831418	20	PASS		
	NV	20	0.00	0.000000	20	PASS		
	NV	30	0.00	0.000000	20	PASS		
	NV	40	0.00	0.000000	20	PASS		
	NV	50	0.00	0.000000	20	PASS		
	NV	-30	0.00	0.000000	20	PASS		
	NV	-20	0.00	0.000000	20	PASS		
	NV	-10	0.00	0.000000	20	PASS		
	NV	0	0.00	0.000000	20	PASS		
	NV	10	-20000.00	-3.816794	20	PASS		
	NV	20	0.00	0.000000	20	PASS		
	NV	30	-20000.00	-3.816794	20	PASS		
	NV	40	-20000.00	-3.816794	20	PASS		
	NV	40	-20000.00	-3.816794	20	PASS		

11N40SI SO	5745	NV	50	-20000.00	-3.816794	20	PASS
		NV	-30	0.00	0.000000	20	PASS
		NV	-20	0.00	0.000000	20	PASS
		NV	-10	0.00	0.000000	20	PASS
		NV	0	0.00	0.000000	20	PASS
		NV	10	0.00	0.000000	20	PASS
		NV	20	0.00	0.000000	20	PASS
		NV	30	0.00	0.000000	20	PASS
		NV	40	0.00	0.000000	20	PASS
	5785	NV	50	0.00	0.000000	20	PASS
		NV	-30	0.00	0.000000	20	PASS
		NV	-20	0.00	0.000000	20	PASS
		NV	-10	0.00	0.000000	20	PASS
		NV	0	0.00	0.000000	20	PASS
		NV	10	0.00	0.000000	20	PASS
		NV	20	0.00	0.000000	20	PASS
		NV	30	0.00	0.000000	20	PASS
		NV	40	0.00	0.000000	20	PASS
	5825	NV	50	0.00	0.000000	20	PASS
		NV	-30	0.00	0.000000	20	PASS
		NV	-20	0.00	0.000000	20	PASS
		NV	-10	0.00	0.000000	20	PASS
		NV	0	0.00	0.000000	20	PASS
		NV	10	0.00	0.000000	20	PASS
		NV	20	0.00	0.000000	20	PASS
		NV	30	0.00	0.000000	20	PASS
		NV	40	0.00	0.000000	20	PASS
	5190	NV	50	-20000.00	-3.433476	20	PASS
		NV	-30	0.00	0.000000	20	PASS
		NV	-20	0.00	0.000000	20	PASS
		NV	-10	0.00	0.000000	20	PASS
		NV	0	0.00	0.000000	20	PASS
		NV	10	0.00	0.000000	20	PASS
		NV	20	0.00	0.000000	20	PASS
		NV	30	0.00	0.000000	20	PASS
		NV	40	0.00	0.000000	20	PASS
	5230	NV	50	0.00	0.000000	20	PASS
		NV	-30	0.00	0.000000	20	PASS
		NV	-20	0.00	0.000000	20	PASS
		NV	-10	0.00	0.000000	20	PASS
		NV	0	-40000.00	-7.648184	20	PASS
		NV	10	0.00	0.000000	20	PASS
NV		20	0.00	0.000000	20	PASS	
NV		30	0.00	0.000000	20	PASS	
NV		40	0.00	0.000000	20	PASS	
5755	NV	50	0.00	0.000000	20	PASS	
	NV	-30	0.00	0.000000	20	PASS	
	NV	-20	0.00	0.000000	20	PASS	
	NV	-10	0.00	0.000000	20	PASS	
	NV	0	0.00	0.000000	20	PASS	
	NV	10	0.00	0.000000	20	PASS	
	NV	20	0.00	0.000000	20	PASS	
	NV	30	0.00	0.000000	20	PASS	
	NV	40	0.00	0.000000	20	PASS	
5795	NV	50	0.00	0.000000	20	PASS	
	NV	-30	0.00	0.000000	20	PASS	
	NV	-20	0.00	0.000000	20	PASS	
	NV	-10	0.00	0.000000	20	PASS	
	NV	0	0.00	0.000000	20	PASS	
	NV	10	0.00	0.000000	20	PASS	
		NV	20	0.00	0.000000	20	PASS

11AC20S ISO		NV	30	0.00	0.000000	20	PASS		
		NV	40	0.00	0.000000	20	PASS		
		NV	50	0.00	0.000000	20	PASS		
	5180	NV	-30	0.00	0.000000	20	PASS		
		NV	-20	0.00	0.000000	20	PASS		
		NV	-10	0.00	0.000000	20	PASS		
		NV	0	0.00	0.000000	20	PASS		
		NV	10	-20000.00	-3.861004	20	PASS		
		NV	20	0.00	0.000000	20	PASS		
		NV	30	0.00	0.000000	20	PASS		
		NV	40	0.00	0.000000	20	PASS		
		NV	50	0.00	0.000000	20	PASS		
		5220	NV	-30	0.00	0.000000	20	PASS	
			NV	-20	0.00	0.000000	20	PASS	
			NV	-10	0.00	0.000000	20	PASS	
	NV		0	0.00	0.000000	20	PASS		
	NV		10	0.00	0.000000	20	PASS		
	NV		20	0.00	0.000000	20	PASS		
	NV		30	0.00	0.000000	20	PASS		
	NV		40	-20000.00	-3.831418	20	PASS		
	NV		50	0.00	0.000000	20	PASS		
	5240		NV	-30	0.00	0.000000	20	PASS	
			NV	-20	0.00	0.000000	20	PASS	
			NV	-10	0.00	0.000000	20	PASS	
		NV	0	0.00	0.000000	20	PASS		
		NV	10	0.00	0.000000	20	PASS		
		NV	20	0.00	0.000000	20	PASS		
		NV	30	0.00	0.000000	20	PASS		
		NV	40	0.00	0.000000	20	PASS		
		NV	50	0.00	0.000000	20	PASS		
		5745	NV	-30	0.00	0.000000	20	PASS	
			NV	-20	-20000.00	-3.481288	20	PASS	
			NV	-10	0.00	0.000000	20	PASS	
	NV		0	-20000.00	-3.481288	20	PASS		
	NV		10	0.00	0.000000	20	PASS		
	NV		20	0.00	0.000000	20	PASS		
	NV		30	0.00	0.000000	20	PASS		
	NV		40	0.00	0.000000	20	PASS		
	NV		50	0.00	0.000000	20	PASS		
	5785		NV	-30	0.00	0.000000	20	PASS	
			NV	-20	0.00	0.000000	20	PASS	
			NV	-10	0.00	0.000000	20	PASS	
		NV	0	0.00	0.000000	20	PASS		
		NV	10	0.00	0.000000	20	PASS		
		NV	20	0.00	0.000000	20	PASS		
		NV	30	0.00	0.000000	20	PASS		
		NV	40	0.00	0.000000	20	PASS		
		NV	50	-20000.00	-3.457217	20	PASS		
		5825	NV	-30	0.00	0.000000	20	PASS	
			NV	-20	0.00	0.000000	20	PASS	
			NV	-10	0.00	0.000000	20	PASS	
	NV		0	0.00	0.000000	20	PASS		
	NV		10	0.00	0.000000	20	PASS		
	NV		20	0.00	0.000000	20	PASS		
	NV		30	0.00	0.000000	20	PASS		
	NV		40	0.00	0.000000	20	PASS		
	NV		50	0.00	0.000000	20	PASS		
	11AC40S ISO		5190	NV	-30	0.00	0.000000	20	PASS
				NV	-20	0.00	0.000000	20	PASS
				NV	-10	0.00	0.000000	20	PASS
		NV		0	0.00	0.000000	20	PASS	

		NV	10	0.00	0.000000	20	PASS	
		NV	20	0.00	0.000000	20	PASS	
		NV	30	0.00	0.000000	20	PASS	
		NV	40	0.00	0.000000	20	PASS	
		NV	50	0.00	0.000000	20	PASS	
	5230	NV	-30	0.00	0.000000	20	PASS	
		NV	-20	0.00	0.000000	20	PASS	
		NV	-10	0.00	0.000000	20	PASS	
		NV	0	0.00	0.000000	20	PASS	
		NV	10	0.00	0.000000	20	PASS	
		NV	20	0.00	0.000000	20	PASS	
		NV	30	0.00	0.000000	20	PASS	
		NV	40	0.00	0.000000	20	PASS	
		NV	50	0.00	0.000000	20	PASS	
		5755	NV	-30	0.00	0.000000	20	PASS
	NV		-20	0.00	0.000000	20	PASS	
	NV		-10	0.00	0.000000	20	PASS	
	NV		0	-40000.00	-6.950478	20	PASS	
	NV		10	0.00	0.000000	20	PASS	
	NV		20	0.00	0.000000	20	PASS	
	NV		30	0.00	0.000000	20	PASS	
	NV		40	0.00	0.000000	20	PASS	
	NV		50	0.00	0.000000	20	PASS	
	5795		NV	-30	0.00	0.000000	20	PASS
		NV	-20	0.00	0.000000	20	PASS	
		NV	-10	0.00	0.000000	20	PASS	
		NV	0	0.00	0.000000	20	PASS	
		NV	10	0.00	0.000000	20	PASS	
		NV	20	-40000.00	-6.902502	20	PASS	
		NV	30	0.00	0.000000	20	PASS	
		NV	40	0.00	0.000000	20	PASS	
		NV	50	0.00	0.000000	20	PASS	
		11AC80S ISO	5210	NV	-30	0.00	0.000000	20
	NV			-20	0.00	0.000000	20	PASS
	NV			-10	0.00	0.000000	20	PASS
NV	0			-80000.00	-15.355086	20	PASS	
NV	10			0.00	0.000000	20	PASS	
NV	20			0.00	0.000000	20	PASS	
NV	30			0.00	0.000000	20	PASS	
NV	40			0.00	0.000000	20	PASS	
NV	50			0.00	0.000000	20	PASS	
5775	NV			-30	0.00	0.000000	20	PASS
	NV		-20	0.00	0.000000	20	PASS	
	NV		-10	0.00	0.000000	20	PASS	
	NV		0	0.00	0.000000	20	PASS	
	NV		10	0.00	0.000000	20	PASS	
	NV		20	0.00	0.000000	20	PASS	
	NV		30	0.00	0.000000	20	PASS	
	NV		40	0.00	0.000000	20	PASS	
	NV		50	0.00	0.000000	20	PASS	

8.5 UNDESIRABLE RADIATED SPURIOUS EMISSION

8.5.1 Applicable Standard

According to FCC Part 15.407 (b)
According to 789033 D02 Section II(G)

8.5.2 Conformance Limit

For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.725-5.85 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

The emission measurements shall be performed using a minimum resolution bandwidth of 1 MHz. A lower resolution bandwidth may be employed near the band edge, when necessary, provided the measured energy is integrated to show the total power over 1 MHz.

Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209 The emissions from an intentional radiator shall not exceed the field strength levels specified in the following table 15.209(a):

Restricted Frequency(MHz)	Field Strength ($\mu\text{V}/\text{m}$)	Field Strength (dB $\mu\text{V}/\text{m}$)	Measurement Distance
0.009-0.490	2400/F(KHz)	20 log (uV/m)	300
0.490-1.705	2400/F(KHz)	20 log (uV/m)	30
1.705-30	30	29.5	30
30-88	100	40	3
88-216	150	43.5	3
216-960	200	46	3
Above 960	500	54	3

The provisions of §15.205 apply to intentional radiators operating under this section, 15.205 Restricted bands of operation

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
10.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(2)
13.36-13.41			

- Remark:
1. Emission level in $\text{dBuV/m} = 20 \log(\mu\text{V/m})$
 2. Measurement was performed at an antenna to the closed point of EUT distance of meters.
 3. Only spurious frequency is permitted to locate within the Restricted Bands specified in provision of ξ 15.205, and the emissions located in restricted bands also comply with 15.209 limit.

8.5.3 Test Configuration

Test according to clause 6.2 radio frequency test setup

8.5.4 Test Procedure

■ Unwanted Emissions Measurements below 1000 MHz

Compliance shall be demonstrated using CISPR quasi-peak detection; however, peak detection is permitted as an alternative to quasi-peak detection.

The EUT was placed on a turn table which is 0.8m above ground plane.

And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.

Repeat above procedures until all frequency measured was complete.

We use software control the EUT, Let EUT hopping on and transmit with highest power, All the modes have been tested and the worst result was reported.

Use the following spectrum analyzer settings:

Set RBW=120kHz for $f < 1 \text{ GHz}$ (30MHz to 1GHz), 200Hz for $f < 150\text{kHz}$ (9kHz to 150kHz), 9kHz for $< 30\text{MHz}$

(150kHz to 30kHz).

Set the VBW > RBW.

Detector = Peak.

Trace mode = max hold.

Follow the guidelines in ANSI C63.10-2013 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization, etc. A pre-amp and a high pass filter are required for this test, in order to provide the measuring system with sufficient sensitivity. Allow the trace to stabilize. The peak reading of the emission, after being corrected by the antenna factor, cable loss, pre-amp gain, etc., is the peak field strength, which must comply with the limit specified in Section 15.35(b). Submit this data.

Repeat above procedures until all frequency measured was complete.

■ Unwanted Maximum peak Emissions Measurements above 1000 MHz

Maximum emission levels are measured by setting the analyzer as follows:

RBW = 1 MHz.

VBW \geq 3 MHz.

Detector = Peak.

Sweep time = auto.

Trace mode = max hold.

Allow sweeps to continue until the trace stabilizes. Note that if the transmission is not continuous, the time required for the trace to stabilize will increase by a factor of approximately $1/x$, where x is the duty cycle. For example, at 50 percent duty cycle, the measurement time will increase by a factor of two relative to measurement time for continuous transmission.

■ Unwanted Average Emissions Measurements above 1000 MHz

Method VB (Averaging using reduced video bandwidth): Alternative method.

RBW = 1 MHz.

Video bandwidth. • If the EUT is configured to transmit with duty cycle \geq 98 percent, set $\text{VBW} \leq \text{RBW}/100$ (i.e., 10 kHz) but not less than 10 Hz.

• If the EUT duty cycle is $<$ 98 percent, set $\text{VBW} \geq 1/T$, where T is defined in section II.B.1.a).

Video bandwidth mode or display mode • The instrument shall be set to ensure that video filtering is applied in the power domain. Typically, this requires setting the detector mode to RMS and setting the Average-VBW Type to Power (RMS).

• As an alternative, the analyzer may be set to linear detector mode. Ensure that video filtering is applied in linear voltage domain (rather than in a log or dB domain). Some analyzers require linear display mode in order to accomplish this. Others have a setting for Average-VBW Type, which can be set to "Voltage"

regardless of the display mode.

Detector = Peak.

Sweep time = auto.

Trace mode = max hold.

Allow max hold to run for at least 50 traces if the transmitted signal is continuous or has at least 98 percent duty cycle. For lower duty cycles, increase the minimum number of traces by a factor of $1/x$, where x is the duty cycle. For example, use at least 200 traces if the duty cycle is 25 percent. (If a specific emission is demonstrated to be continuous—i.e., 100 percent duty cycle—rather than turning on and off with the transmit cycle, at least 50 traces shall be averaged.)

■ Band edge measurements.

Unwanted band-edge emissions may be measured using either of the special band-edge measurement techniques (the marker-delta or integration methods) described below. Note that the marker-delta method is primarily a radiated measurement technique that requires the 99% occupied bandwidth edge to be within 2 MHz of the authorized band edge, whereas the integration method can be used in either a radiated or conducted measurement without any special requirement with regards to the displacement of the unwanted emission(s) relative to the authorized bandwidth.

Marker-Delta Method.

The marker-delta method, as described in ANSI C63.10, can be used to perform measurements of the radiated unwanted emissions level of emissions provided that the 99% occupied bandwidth of the fundamental is within 2 MHz of the authorized band-edge.

8.5.5 Test Results

The voltage 120V & 240V and the modes 802.11a/n/ac has been tested and the worst result recorded as below:

- For Undesirable radiated Spurious Emission in U-NII – 1
 All the modes 802.11a/n/ac has been tested and the worst result 802.11a recorded as below:
 - Undesirable radiated Spurious Emission Above 1GHz (1GHz to 40GHz)

Temperature :	28℃	Test By:	HYD
Humidity :	65 %	Frequency(MHz):	5180
Test mode:	802.11a		

Freq. (MHz)	Ant.Pol. H/V	Field Strength (dBuV/m)	E.I.R.P (dBm)	Limit (dBm)	Over(dB)
10982.05	V	55.25	-39.98	-27.00	-12.98
14404.26	V	56.44	-38.79	-27.00	-11.79
17916.94	V	63.82	-31.41	-27.00	-4.41
11885.44	H	54.72	-40.51	-27.00	-13.51
14445.95	H	56.75	-38.48	-27.00	-11.48
17989.59	H	48.1	-47.13	-27.00	-20.13

Temperature :	28℃	Test By:	HYD
Humidity :	65 %	Frequency(MHz):	5220
Test mode:	802.11a		

Freq. (MHz)	Ant.Pol. H/V	Field Strength (dBuV/m)	E.I.R.P (dBm)	Limit (dBm)	Over(dB)
12181.06	V	54.93	-40.30	-27.00	-13.30
14448.04	V	56.83	-38.40	-27.00	-11.40
17992.19	V	63.65	-31.58	-27.00	-4.58
12168.74	H	54.64	-40.59	-27.00	-13.59
15103.49	H	55.98	-39.25	-27.00	-12.25
17979.2	H	46.9	-48.33	-27.00	-21.33

Temperature :	28℃	Test By:	HYD
Humidity :	65 %	Frequency(MHz):	5240
Test mode:	802.11a		

Freq. (MHz)	Ant.Pol. H/V	Field Strength (dBuV/m)	E.I.R.P (dBm)	Limit (dBm)	Over(dB)
10888.81	V	54.55	-40.68	-27.00	-13.68
15224.02	V	55.97	-39.26	-27.00	-12.26
17986.99	V	63.54	-31.69	-27.00	-4.69
12156.44	H	55.32	-39.91	-27.00	-12.91
14364.76	H	55.89	-39.34	-27.00	-12.34
17992.19	H	47.8	-47.43	-27.00	-20.43

- Note:** (1) All Readings are Peak Value (VBW=3MHz) and AV Value (VBW=10Hz).
 (2) Emission Level= Reading Level+Probe Factor +Cable Loss.
 (3)EIRP[dBm] = E[dBμV/m] + 20 log(d[meters]) - 104.77
 d is the measurement distance in 3 meters

Frequency: 5180					
Freq. (MHz)	Ant.Pol.	Emission Level(dBuV/m)	Limit 3m(dBuV/m)	Over(dB)	Detector
10982.05	V	55.25	74.00	-18.75	peak
10982.05	V	38.60	54.00	-15.40	AVG
14404.26	V	56.44	74.00	-17.56	peak
14404.26	V	40.10	54.00	-13.90	AVG
17916.94	V	63.82	74.00	-10.18	peak
17916.94	V	46.30	54.00	-7.70	AVG
11885.44	H	54.72	74.00	-19.28	peak
11885.44	H	37.60	54.00	-16.40	AVG
14445.95	H	56.75	74.00	-17.25	peak
14445.95	H	40.50	54.00	-13.50	AVG
17989.59	H	64.21	74.00	-9.79	peak
17989.59	H	48.10	54.00	-5.90	AVG

Frequency: 5220					
Freq. (MHz)	Ant.Pol.	Emission Level(dBuV/m)	Limit 3m(dBuV/m)	Over(dB)	Detector
12181.06	V	54.93	74.00	-19.07	peak
12181.06	V	37.50	54.00	-16.50	AVG
14448.04	V	56.83	74.00	-17.17	peak
14448.04	V	40.20	54.00	-13.80	AVG
17992.19	V	63.65	74.00	-10.35	peak
17992.19	V	46.20	54.00	-7.80	AVG
12168.74	H	54.64	74.00	-19.36	peak
12168.74	H	37.50	54.00	-16.50	AVG
15103.49	H	55.98	74.00	-18.02	peak
15103.49	H	39.50	54.00	-14.50	AVG
17979.20	H	64.39	74.00	-9.61	peak
17979.2	H	46.90	54.00	-7.10	AVG

Frequency: 5240					
Freq. (MHz)	Ant.Pol.	Emission Level(dBuV/m)	Limit 3m(dBuV/m)	Over(dB)	Detector
10888.81	V	54.55	74.00	-19.45	peak
10888.81	V	37.50	54.00	-16.50	AVG
15224.02	V	55.97	74.00	-18.03	peak
15224.02	V	39.20	54.00	-14.80	AVG
17986.99	V	63.54	74.00	-10.46	peak
17986.99	V	46.70	54.00	-7.30	AVG
12156.44	H	55.32	74.00	-18.68	peak
12156.44	H	39.40	54.00	-14.60	AVG
14364.76	H	55.89	74.00	-18.11	peak
14364.76	H	39.60	54.00	-14.40	AVG
17992.19	H	64.01	74.00	-9.99	peak
17992.19	H	47.80	54.00	-6.20	AVG

- Note:**
- (1) All Readings are Peak Value (VBW=3MHz) and Peak Value (VBW=10Hz).
 - (2) Emission Level= Reading Level+Correct Factor +Cable Loss.
 - (3) Correct Factor= Ant_F + Cab_L - Preamp
 - (4)Data of measurement within this frequency range shown "--" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

● Undesirable radiated Undesirable radiated Spurious Emission in Band Edge

Temperature :	28°C	Test By:	HYD
Humidity :	65 %	Frequency(MHz):	5180
Test mode:	802.11a		

Freq. (MHz)	Ant.Pol. H/V	Field Strength (RBW=100KHz) (dBuV/m)	E.I.R.P (dBm)	Limit (dBm)	Verdict
5146.035	H	58.49	-36.74	-27.00	Pass
5147.14	V	57.78	-37.45	-27.00	Pass

Temperature :	28°C	Test By:	HYD
Humidity :	65 %	Frequency(MHz):	5240
Test mode:	802.11a		

Freq. (MHz)	Ant.Pol. H/V	Field Strength (RBW=100KHz) (dBuV/m)	E.I.R.P (dBm)	Limit (dBm)	Verdict
5351.342	H	58.39	-36.84	-27.00	Pass
5356.309	V	59.35	-35.88	-27.00	Pass


Note: (1) All Readings are Peak Value (VBW=300kHz)
 (2) Emission Level= Reading Level+Probe Factor +Cable Loss.
 (3) $EIRP[dBm] = E[dB\mu V/m] + 20 \log(d[meters]) - 104.77$
 d is the measurement distance in 3 meters



UNII Band I

Test Model Undesirable radiated Spurious Emission in Restricted Band (5100-5150MHz)


802.11a 802.11n(HT20) 802.11n(HT40)
 5180 5220 5240 Ant.Pol H

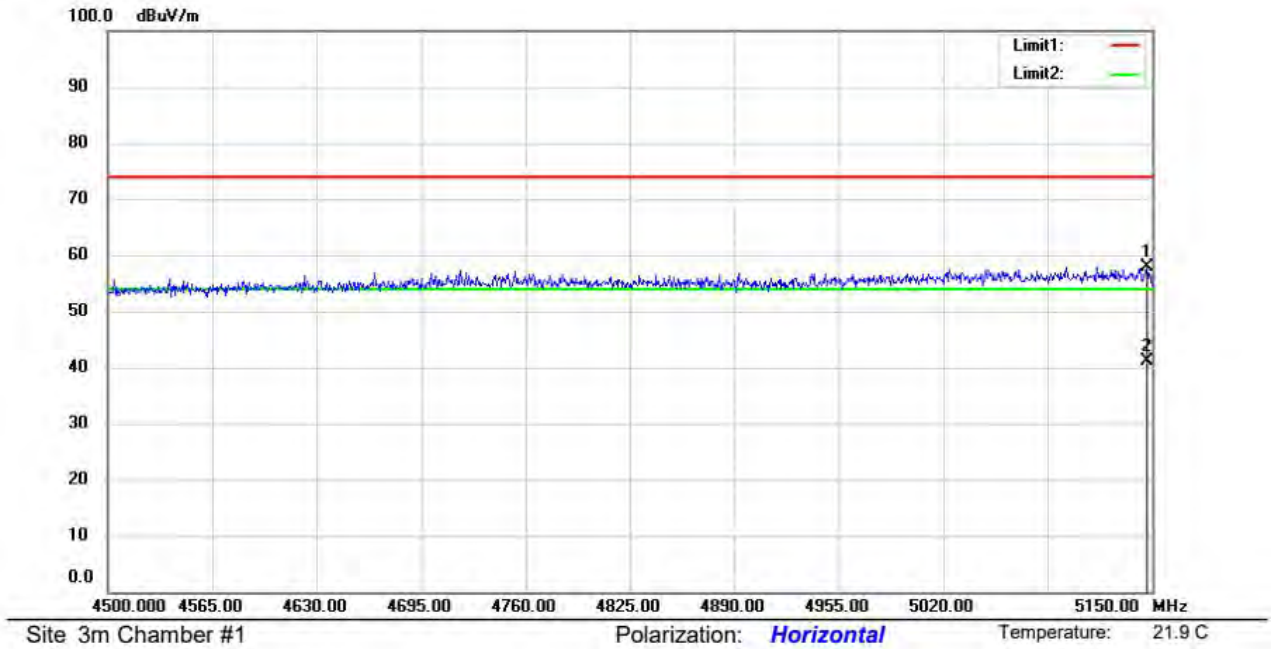

UNII Band I

Test Model Undesirable radiated Spurious Emission in Restricted Band (5100-5150MHz)

802.11a 802.11n(HT20) 802.11n(HT40)
 5180 5220 5240 Ant.Pol V

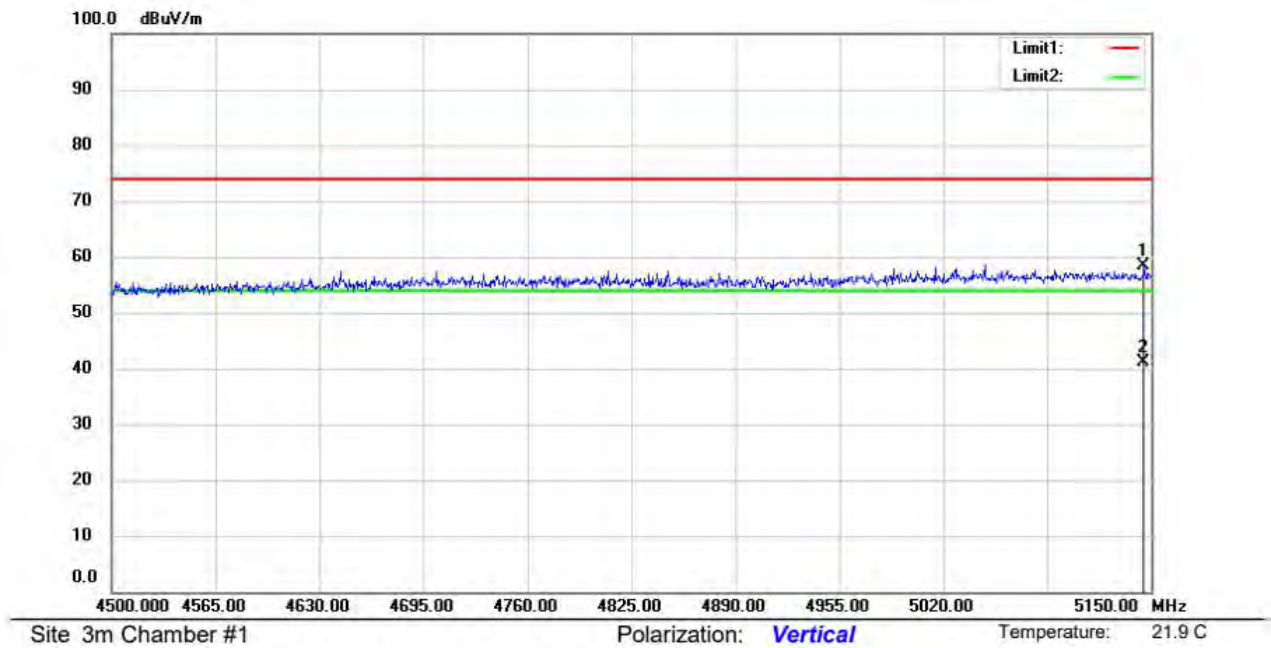


UNII Band I

Test Model Undesirable radiated Spurious Emission in Restricted Band (5350-5400MHz)

5180 802.11a 802.11n(HT20) 802.11n(HT40)

5220 5240 Ant.Pol H

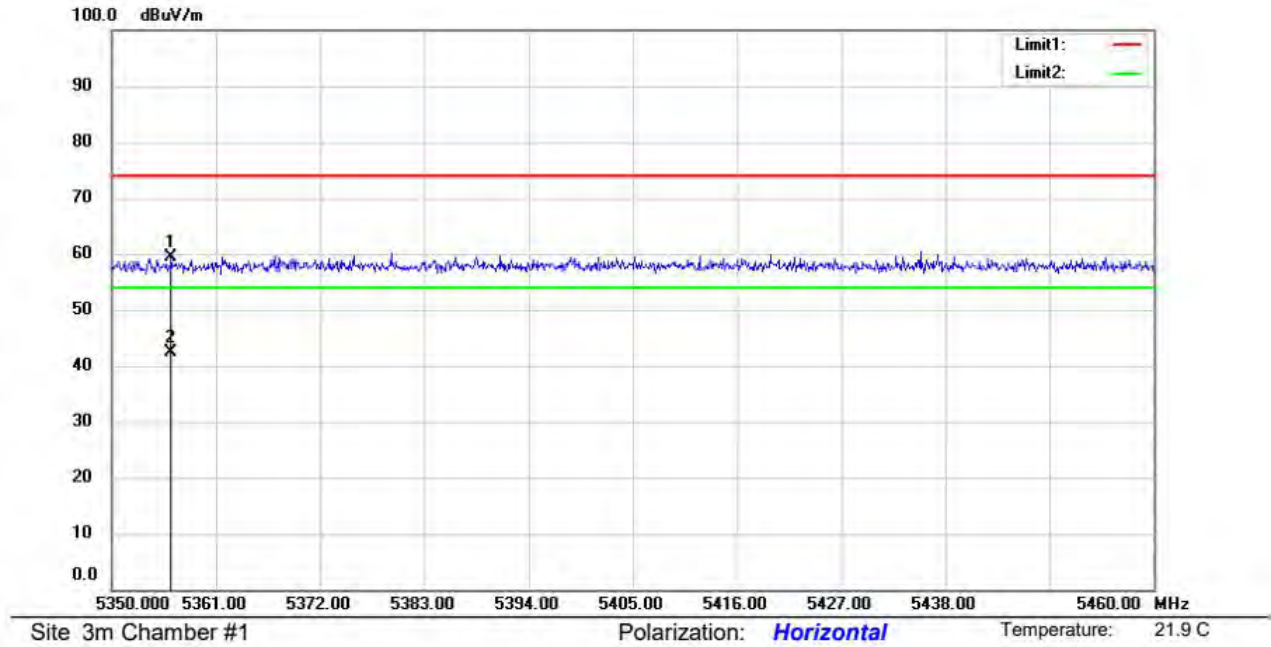


UNII Band I

Test Model Undesirable radiated Spurious Emission in Restricted Band (5350-5400MHz)

5180 802.11a 802.11n(HT20) 802.11n(HT40)

5220 5240 Ant.Pol V

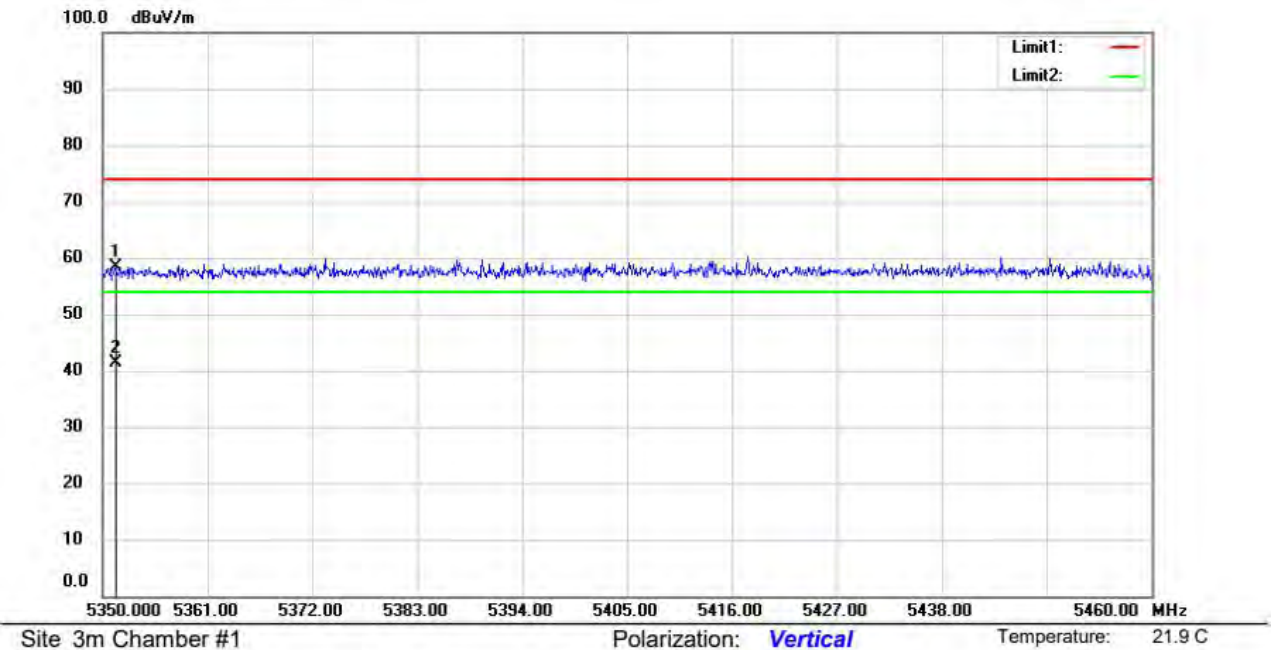

- For Undesirable radiated Spurious Emission in UNII Band III
All the modes 802.11a/n/ac has been tested and the worst result 802.11a recorded as below:
- Undesirable radiated Spurious Emission Above 1GHz (1GHz to 40GHz)

Temperature :	28°C	Test By:	HYD
Humidity :	65 %	Frequency(MHz):	5745
Test mode:	802.11a		

Freq. (MHz)	Ant.Pol. H/V	Field Strength (dBuV/m)	E.I.R.P (dBm)	Limit (dBm)	Over(dB)
11402.55	V	54.98	-40.25	-27.00	-13.25
14201.69	V	56.49	-38.74	-27.00	-11.74
17984.39	V	64.49	-30.74	-27.00	-3.74
11132.26	H	55.01	-40.22	-27.00	-13.22
15243.83	H	56.96	-38.27	-27.00	-11.27
17834.28	H	47.5	-47.73	-27.00	-20.73

Temperature :	28°C	Test By:	HYD
Humidity :	65 %	Frequency(MHz):	5785
Test mode:	802.11a		

Freq. (MHz)	Ant.Pol. H/V	Field Strength (dBuV/m)	E.I.R.P (dBm)	Limit (dBm)	Over(dB)
12116.1	V	54.63	-40.60	-27.00	-13.60
15321.13	V	56.57	-38.66	-27.00	-11.66
17798.23	V	64.47	-30.76	-27.00	-3.76
12403.11	H	54.79	-40.44	-27.00	-13.44
14195.53	H	56.54	-38.69	-27.00	-11.69
17986.99	H	47.5	-47.73	-27.00	-20.73

Temperature :	28°C	Test By:	HYD
Humidity :	65 %	Frequency(MHz):	5825
Test mode:	802.11a		

Freq. (MHz)	Ant.Pol. H/V	Field Strength (dBuV/m)	E.I.R.P (dBm)	Limit (dBm)	Over(dB)
12147.66	V	55.41	-39.82	-27.00	-12.82
14315.02	V	56.76	-38.47	-27.00	-11.47
17914.36	V	64.39	-30.84	-27.00	-3.84
12096.85	H	55.08	-40.15	-27.00	-13.15
14300.55	H	56.46	-38.77	-27.00	-11.77
18000	H	47.9	-47.33	-27.00	-20.33

- Note:** (1) All Readings are Peak Value(VBW=300kHz)
 (2) Emission Level= Reading Level+Probe Factor +Cable Loss.
 (3)EIRP[dBm] = E[dBμV/m] + 20 log(d[meters]) - 104.77
 d is the measurement distance in 3 meters

Frequency: 802.11a		Frequency(MHz): 5745			
Freq. (MHz)	Ant.Pol.	Emission Level(dBuV/m)	Limit 3m(dBuV/m)	Over(dB)	Detector
11402.55	V	54.98	74.00	-19.02	peak
11402.55	V	37.40	54.00	-16.60	AVG
14201.69	V	56.49	74.00	-17.51	peak
14201.69	V	40.30	54.00	-13.70	AVG
17984.39	V	64.49	74.00	-9.51	peak
17984.39	V	47.80	54.00	-6.20	AVG
11132.26	H	55.01	74.00	-18.99	peak
11132.26	H	38.10	54.00	-15.90	AVG
15243.83	H	56.96	74.00	-17.04	peak
15243.83	H	40.60	54.00	-13.40	AVG
17834.28	H	64.18	74.00	-9.82	peak
17834.28	H	47.50	54.00	-6.50	AVG

Frequency: 802.11a		Frequency(MHz): 5785			
Freq. (MHz)	Ant.Pol.	Emission Level(dBuV/m)	Limit 3m(dBuV/m)	Over(dB)	Detector
12116.10	V	54.63	74.00	-19.37	peak
12116.10	V	37.50	54.00	-16.50	AVG
15321.13	V	56.57	74.00	-17.43	peak
15321.13	V	40.20	54.00	-13.80	AVG
17798.23	V	64.47	74.00	-9.53	peak
17798.23	V	47.70	54.00	-6.30	AVG
12403.11	H	54.79	74.00	-19.21	peak
12403.11	H	38.10	54.00	-15.90	AVG
14195.53	H	56.54	74.00	-17.46	peak
14195.53	H	40.30	54.00	-13.70	AVG
17986.99	H	63.68	74.00	-10.32	peak
17986.99	H	47.50	54.00	-6.50	AVG

Frequency: 802.11a		Frequency(MHz): 5825			
Freq. (MHz)	Ant.Pol.	Emission Level(dBuV/m)	Limit 3m(dBuV/m)	Over(dB)	Detector
12147.66	V	55.41	74.00	-18.59	peak
12147.66	V	38.90	54.00	-15.10	AVG
14315.02	V	56.76	74.00	-17.24	peak
14315.02	V	40.60	54.00	-13.40	AVG
17914.36	V	64.39	74.00	-9.61	peak
17914.36	V	47.60	54.00	-6.40	AVG
12096.85	H	55.08	74.00	-18.92	peak
12096.85	H	38.60	54.00	-15.40	AVG
14300.55	H	56.46	74.00	-17.54	peak
14300.55	H	40.20	54.00	-13.80	AVG
18000.00	H	64.46	74.00	-9.54	peak
18000	H	47.90	54.00	-6.10	AVG

- Note:** (1) All Readings are Peak Value (VBW=3MHz) and Peak Value (VBW=10Hz).
 (2) Emission Level= Reading Level+Correct Factor +Cable Loss.
 (3) Correct Factor= Ant_F + Cab_L - Preamp
 (4)Data of measurement within this frequency range shown "--" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

● Undesirable radiated Spurious Emission in band edge

Temperature :	28°C	Test By:	HYD
Humidity :	65 %	Frequency:	5745
Test mode:	802.11a		


Freq. (MHz)	Ant.Pol. H/V	Field Strength (RBW=100KHz) (dBuV/m)	E.I.R.P (dBm)	Limit (dBm)	Verdict
5716.031	H	59.29	-35.94	27.0	PASS
5713.675	V	59.36	-35.87	27.0	PASS

Temperature :	28°C	Test By:	HYD
Humidity :	65 %	Frequency:	5825
Test mode:	802.11a		


Freq. (MHz)	Ant.Pol. H/V	Field Strength (RBW=100KHz) (dBuV/m)	E.I.R.P (dBm)	Limit (dBm)	Verdict
5852.762	H	59.66	-35.57	27.0	PASS
5853.944	V	60.28	-34.95	27.0	PASS

Note: (1) All Readings are Peak Value (VBW=3MHz)
 (2) Emission Level= Reading Level+Probe Factor +Cable Loss.
 (3) $EIRP[dBm] = E[dB\mu V/m] + 20 \log(d[meters]) - 104.77$
 d is the measurement distance in 3 meters

UNII Band III
 Test Model Undesirable radiated Undesirable radiated Spurious Emission in Band Edge
 ☒ 802.11a ☐ 802.11n(HT20) ☐ 802.11n(HT40)
 ☒ 5825 Ant. Pol H

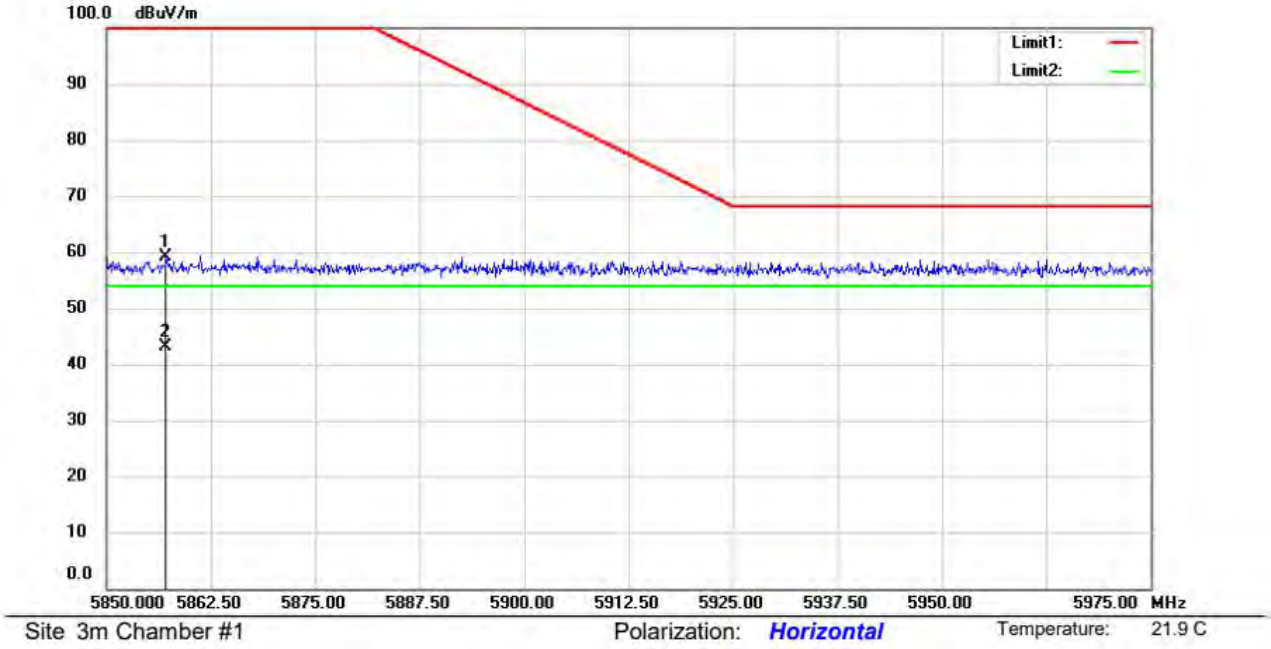


UNII Band III
 Test Model Undesirable radiated Undesirable radiated Spurious Emission in Band Edge
 ☒ 802.11a ☐ 802.11n(HT20) ☐ 802.11n(HT40)
 ☒ 5825 Ant. Pol V

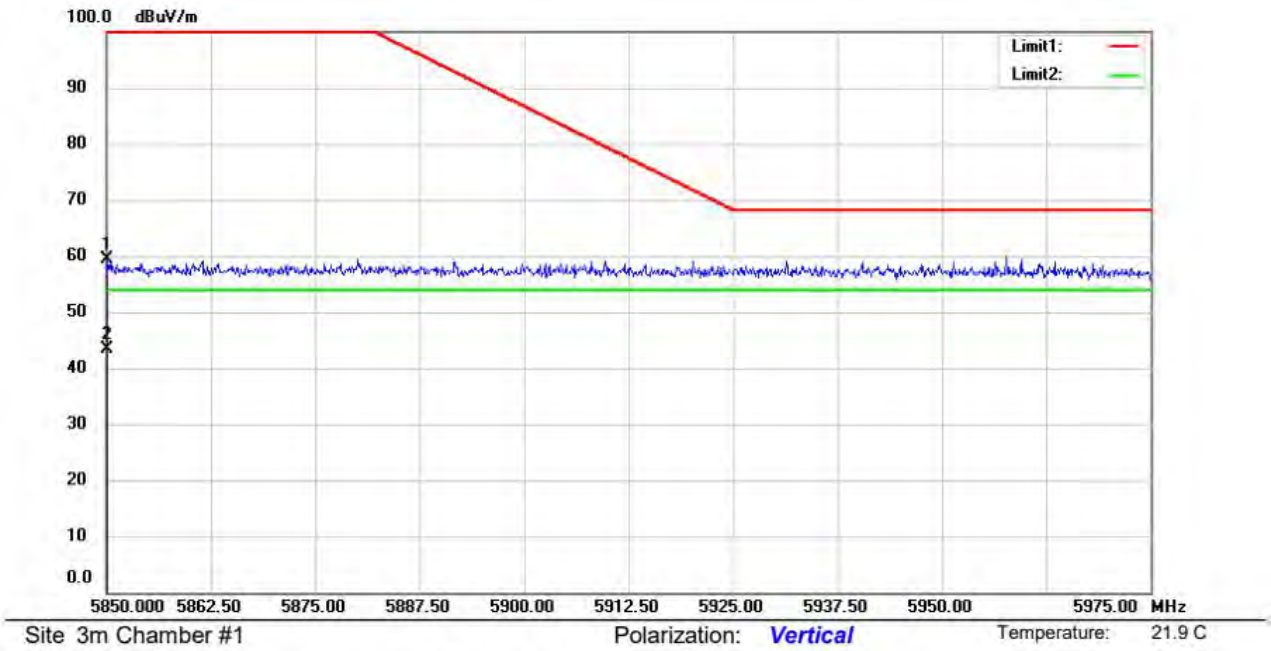


- Undesirable radiated Spurious Emission below 1GHz (30MHz to 1GHz)
All modes have been tested, and the worst result recorded was report as below:

Test mode: 802.11a Frequency: 5180

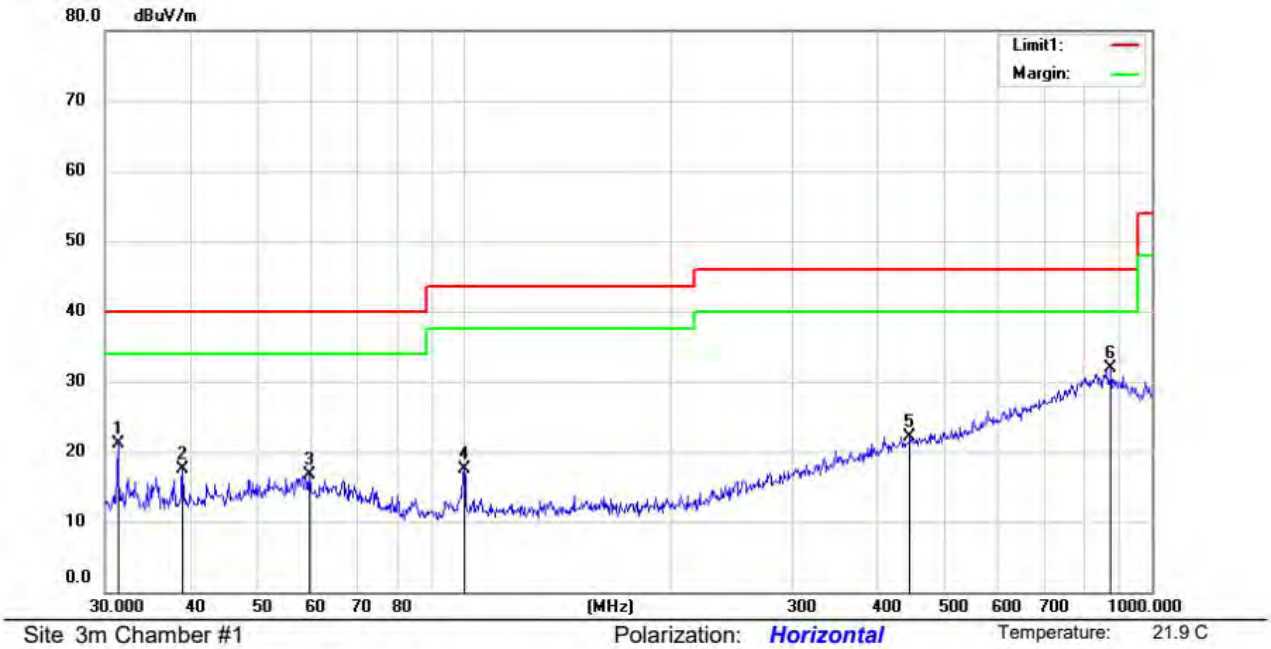

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		31.3442	35.54	-14.50	21.04	40.00	-18.96	QP		
2		38.9390	30.55	-13.11	17.44	40.00	-22.56	QP		
3		59.4665	28.76	-12.01	16.75	40.00	-23.25	QP		
4		99.9653	32.25	-14.77	17.48	43.50	-26.02	QP		
5		445.2415	28.01	-5.82	22.19	46.00	-23.81	QP		
6	*	872.9481	30.17	1.83	32.00	46.00	-14.00	QP		

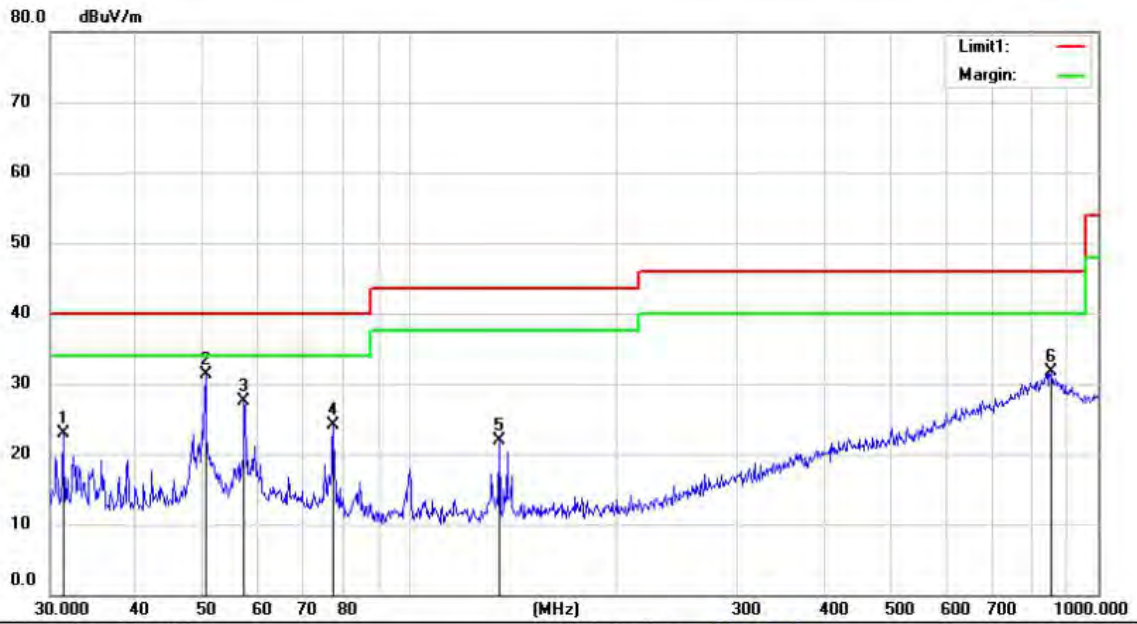


Site 3m Chamber #1

Polarization: **Vertical**

Temperature: 21.9 C


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		31.3580	37.44	-14.50	22.94	40.00	-17.06	QP		
2	*	50.4090	43.29	-11.96	31.33	40.00	-8.67	QP		
3		57.5686	39.51	-12.08	27.43	40.00	-12.57	QP		
4		77.4230	38.71	-14.55	24.16	40.00	-15.84	QP		
5		135.0318	36.15	-14.19	21.96	43.50	-21.54	QP		
6		855.5234	29.24	2.52	31.76	46.00	-14.24	QP		

Test mode: 802.11a Frequency: 5220

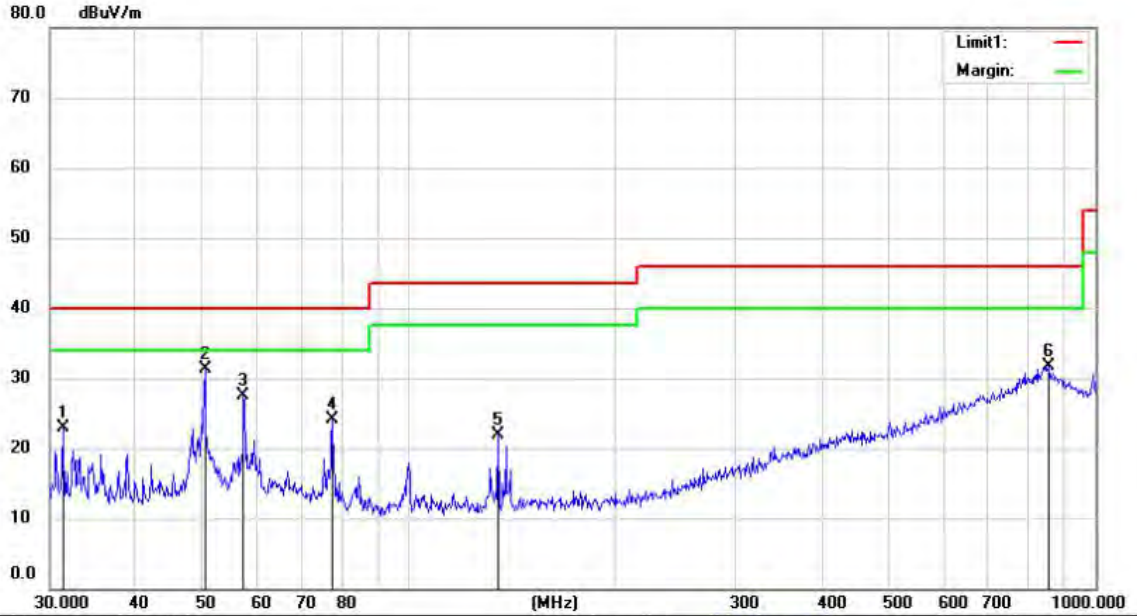

Site 3m Chamber #1 Polarization: **Horizontal** Temperature: 21.9 C


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
1		31.3580	37.44	-14.50	22.94	40.00	-17.06			QP
2	*	50.4090	43.29	-11.96	31.33	40.00	-8.67			QP
3		57.5686	39.51	-12.08	27.43	40.00	-12.57			QP
4		77.4230	38.71	-14.55	24.16	40.00	-15.84			QP
5		135.0318	36.15	-14.19	21.96	43.50	-21.54			QP
6		855.5234	29.24	2.52	31.76	46.00	-14.24			QP

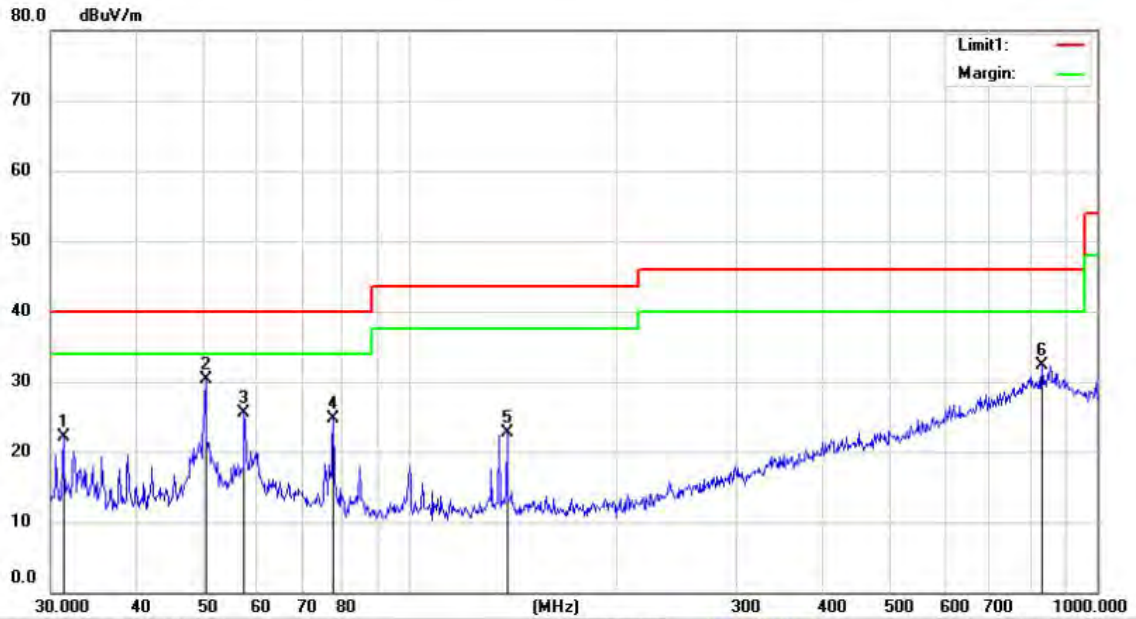

Site 3m Chamber #1 Polarization: **Vertical** Temperature: 21.9 C


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
1		31.3442	36.64	-14.50	22.14	40.00	-17.86	QP		
2	*	50.4090	42.23	-11.96	30.27	40.00	-9.73	QP		
3		57.5434	37.62	-12.08	25.54	40.00	-14.46	QP		
4		77.4230	39.19	-14.55	24.64	40.00	-15.36	QP		
5		138.6300	37.12	-14.37	22.75	43.50	-20.75	QP		
6		831.1284	29.91	2.49	32.40	46.00	-13.60	QP		

Test mode: 802.11a Frequency: 5240

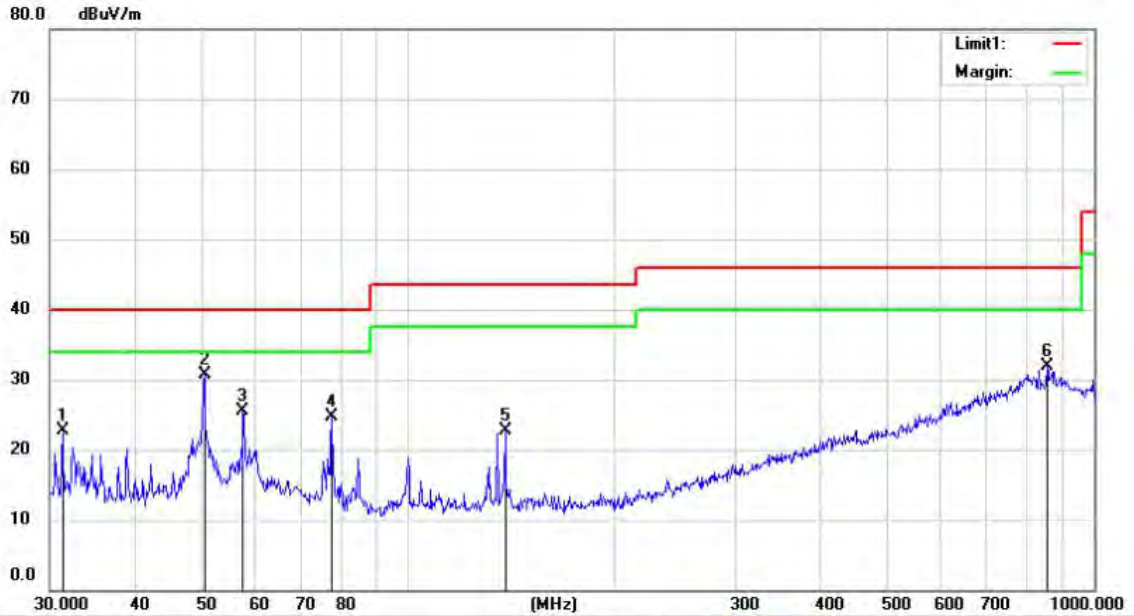

Site 3m Chamber #1 Polarization: Vertical Temperature: 21.9 C

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1		31.3442	37.14	-14.50	22.64	40.00	-17.36	QP		
2	*	50.4310	42.60	-11.96	30.64	40.00	-9.36	QP		
3		57.5434	37.62	-12.08	25.54	40.00	-14.46	QP		
4		77.4230	39.19	-14.55	24.64	40.00	-15.36	QP		
5		138.6300	37.12	-14.37	22.75	43.50	-20.75	QP		
6		855.1484	29.30	2.55	31.85	46.00	-14.15	QP		

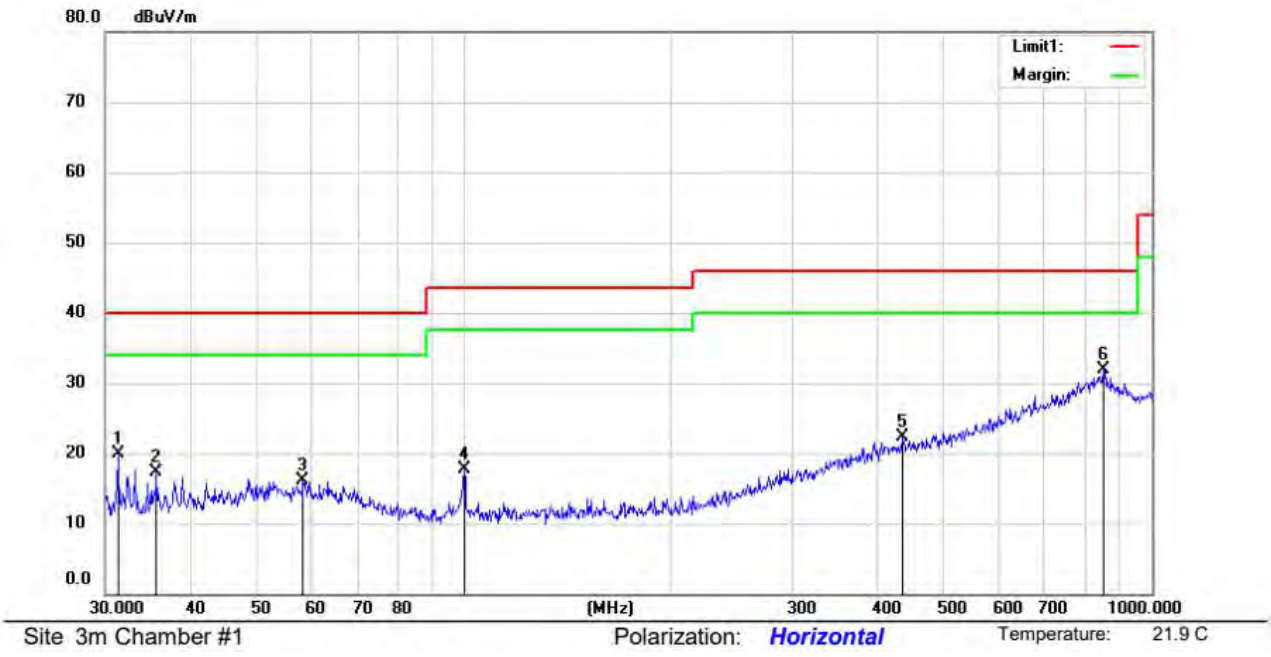

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1		31.3442	34.33	-14.50	19.83	40.00	-20.17	QP		
2		35.6864	30.90	-13.62	17.28	40.00	-22.72	QP		
3		58.3818	28.13	-12.07	16.06	40.00	-23.94	QP		
4		99.9215	32.50	-14.77	17.73	43.50	-25.77	QP		
5		434.2553	28.14	-5.75	22.39	46.00	-23.61	QP		
6	*	853.2764	29.23	2.68	31.91	46.00	-14.09	QP		

8.6 POWER LINE CONDUCTED EMISSIONS

8.6.1 Applicable Standard

According to FCC Part 15.207(a)

8.6.2 Conformance Limit

Frequency(MHz)	Conducted Emission Limit	
	Quasi-peak	Average
0.15-0.5	66-56	56-46
0.5-5.0	56	46
5.0-30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

8.6.3 Test Configuration

Test according to clause 6.3 conducted emission test setup


8.6.4 Test Procedure

The EUT was placed on a table which is 0.8m above ground plane.
 Maximum procedure was performed on the highest emissions to ensure EUT compliance.
 Repeat above procedures until all frequency measured were complete.

8.6.5 Test Results


Pass

The 120V &240V voltage have been tested, and the worst result recorded was report as below:

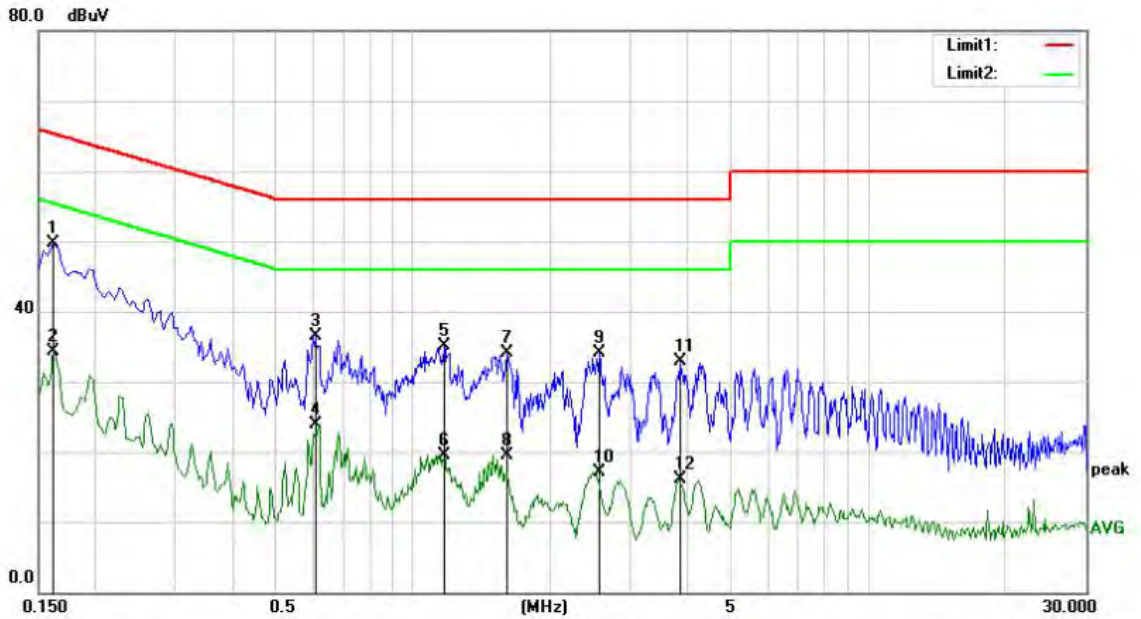

Site: Conduction #2 Phase: **N** Temperature: 25.1

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	*	0.1620	39.30	10.47	49.77	65.28	-15.51	QP	
2		0.1620	23.93	10.47	34.40	55.36	-20.96	AVG	
3		0.6100	26.10	10.35	36.45	56.00	-19.55	QP	
4		0.6100	13.63	10.35	23.98	46.00	-22.02	AVG	
5		1.1700	24.67	10.40	35.07	56.00	-20.93	QP	
6		1.1700	9.12	10.40	19.52	46.00	-26.48	AVG	
7		1.6060	23.65	10.36	34.01	56.00	-21.99	QP	
8		1.6060	9.06	10.36	19.42	46.00	-26.58	AVG	
9		2.5540	23.73	10.35	34.08	56.00	-21.92	QP	
10		2.5540	6.74	10.35	17.09	46.00	-28.91	AVG	
11		3.8580	22.37	10.44	32.81	56.00	-23.19	QP	
12		3.8580	5.72	10.44	16.16	46.00	-29.84	AVG	

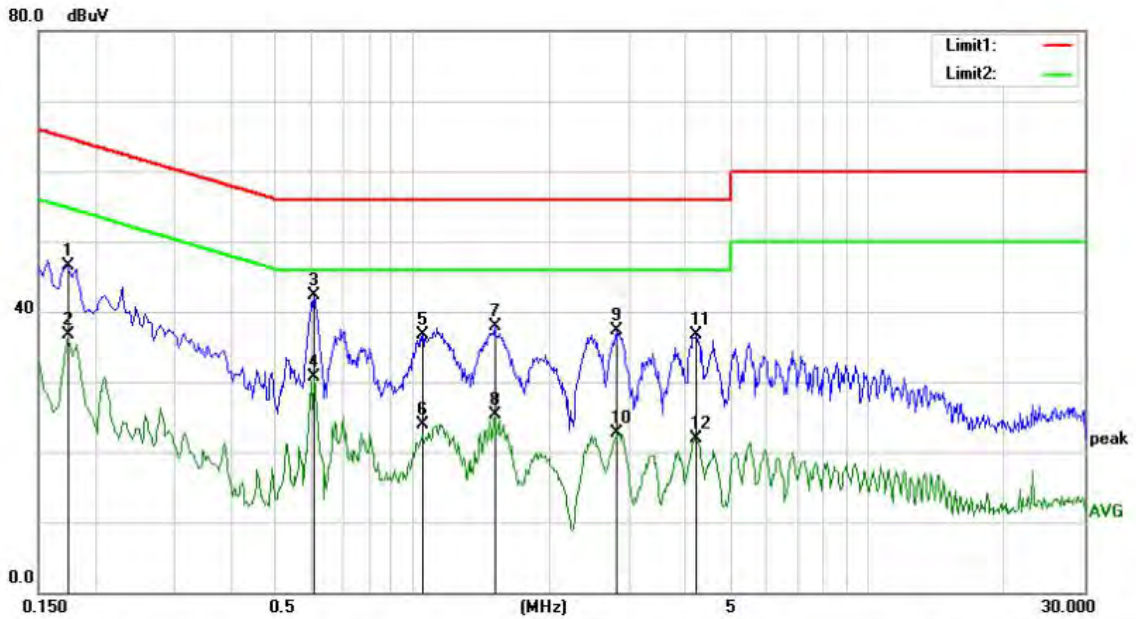

Site: Conduction #2 Phase: **L1** Temperature: 25.1

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1740	36.11	10.46	46.57	64.69	-18.12	QP	
2		0.1740	26.27	10.46	36.73	54.77	-18.04	AVG	
3	*	0.6060	32.00	10.35	42.35	56.00	-13.65	QP	
4		0.6060	20.29	10.35	30.64	46.00	-15.36	AVG	
5		1.0540	26.36	10.42	36.78	56.00	-19.22	QP	
6		1.0540	13.44	10.42	23.86	46.00	-22.14	AVG	
7		1.5140	27.58	10.37	37.95	56.00	-18.05	QP	
8		1.5140	14.93	10.37	25.30	46.00	-20.70	AVG	
9		2.8220	26.89	10.37	37.26	56.00	-18.74	QP	
10		2.8220	12.32	10.37	22.69	46.00	-23.31	AVG	
11		4.2180	26.29	10.46	36.75	56.00	-19.25	QP	
12		4.2180	11.37	10.46	21.83	46.00	-24.17	AVG	

8.7 ANTENNA APPLICATION

8.7.1 Antenna Requirement

Standard	Requirement
FCC CRF Part 15.203	An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.407 (a), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

8.7.2 Result

PASS

The EUT is integrated antenna, the antenna gain as below:

5150-5250: 3.7dBi

5725-5850: 3.7dBi

- Antennas use a permanently attached antenna which is not replaceable.
- Not using a standard antenna jack or electrical connector for antenna replacement
- The antenna has to be professionally installed (please provide method of installation)

Which in accordance to section 15.203, please refer to the internal photos.

Detail of factor for radiated emission

Frequency(MHz)	Ant_F(dB)	Cab_L(dB)	Preamp(dB)	Correct Factor(dB)
0.009	20.6	0.03	\	20.63
0.15	20.7	0.1	\	20.8
1	20.9	0.15	\	21.05
10	20.1	0.28	\	20.38
30	18.8	0.45	\	19.25
30	11.7	0.62	27.9	-15.58
100	12.5	1.02	27.8	-14.28
300	12.9	1.91	27.5	-12.69
600	19.2	2.92	27	-4.88
800	21.1	3.54	26.6	-1.96
1000	22.3	4.17	26.2	0.27
1000	25.6	1.76	41.4	-14.04
3000	28.9	3.27	43.2	-11.03
5000	31.1	4.2	44.6	-9.3
8000	36.2	5.95	44.7	-2.55
10000	38.4	6.3	43.9	0.8
12000	38.5	7.14	42.3	3.34
15000	40.2	8.15	41.4	6.95
18000	45.4	9.02	41.3	13.12
18000	37.9	1.81	47.9	-8.19
21000	37.9	1.95	48.7	-8.85
25000	39.3	2.01	42.8	-1.49
28000	39.6	2.16	46.0	-4.24
31000	41.2	2.24	44.5	-1.06
34000	41.5	2.29	46.6	-2.81
37000	43.8	2.30	46.4	-0.3
40000	43.2	2.50	42.2	3.5

--- End of Report ---