

TEST REPORT

Product : WIRELESS BATTERY DIAGNOSTICS
SYSTEM
Trade mark : AUTEL
Model/Type reference : MaxiBAS BT609
Serial Number : N/A
Report Number : EED32M00253902
FCC ID : WQ8MAXIBASBT609
Date of Issue : Jan. 04, 2021
Test Standards : 47 CFR Part 15 Subpart C
Test result : PASS

Prepared for:

Autel Intelligent Tech. Corp., Ltd.
7th-8th, 10th Floor, Bldg. B1, Zhiyuan,
Xueyuan Rd. Xili, Nanshan, Shenzhen, 518055, China

Prepared by:

Centre Testing International Group Co., Ltd.
Hongwei Industrial Zone, Bao'an 70 District,
Shenzhen, Guangdong, China
TEL: +86-755-3368 3668
FAX: +86-755-3368 3385



Compiled by:

Tom Chen

Tom Chen

Approved by:

David Wang

David Wang

Reviewed by:

Aaron Ma

Aaron Ma

Date:

Jan. 04, 2021

Check No.: 4762102967

2 Version

| Version No. | Date | Description |
|-------------|---------------|-------------|
| 00 | Jan. 04, 2021 | Original |
| | | |
| | | |

3 Test Summary

| Test Item | Test Requirement | Test method | Result |
|--|--|------------------|--------|
| Antenna Requirement | 47 CFR Part 15 Subpart C Section 15.203/15.247 (c) | ANSI C63.10-2013 | PASS |
| AC Power Line Conducted Emission | 47 CFR Part 15 Subpart C Section 15.207 | ANSI C63.10-2013 | PASS |
| Conducted Peak Output Power | 47 CFR Part 15 Subpart C Section 15.247 (b)(3) | ANSI C63.10-2013 | PASS |
| 6dB Occupied Bandwidth | 47 CFR Part 15 Subpart C Section 15.247 (a)(2) | ANSI C63.10-2013 | PASS |
| Power Spectral Density | 47 CFR Part 15 Subpart C Section 15.247 (e) | ANSI C63.10-2013 | PASS |
| Band-edge for RF Conducted Emissions | 47 CFR Part 15 Subpart C Section 15.247(d) | ANSI C63.10-2013 | PASS |
| RF Conducted Spurious Emissions | 47 CFR Part 15 Subpart C Section 15.247(d) | ANSI C63.10-2013 | PASS |
| Radiated Spurious Emissions | 47 CFR Part 15 Subpart C Section 15.205/15.209 | ANSI C63.10-2013 | PASS |
| Restricted bands around fundamental frequency (Radiated Emission) | 47 CFR Part 15 Subpart C Section 15.205/15.209 | ANSI C63.10-2013 | PASS |

Remark:

Test according to ANSI C63.4-2014 & ANSI C63.10-2013.

Company Name and Address shown on Report, the sample(s) and sample Information was/ were provided by the applicant who should be responsible for the authenticity which CTI hasn't verified.


4 Content

| | |
|---|-----------|
| 1 COVER PAGE | 1 |
| 2 VERSION | 2 |
| 3 TEST SUMMARY | 3 |
| 4 CONTENT | 4 |
| 5 TEST REQUIREMENT | 5 |
| 5.1 TEST SETUP | 5 |
| 5.1.1 For Conducted test setup | 5 |
| 5.1.2 For Radiated Emissions test setup | 5 |
| 5.1.3 For Conducted Emissions test setup | 6 |
| 5.2 TEST ENVIRONMENT | 6 |
| 5.3 TEST CONDITION | 6 |
| 6 GENERAL INFORMATION | 7 |
| 6.1 CLIENT INFORMATION | 7 |
| 6.2 GENERAL DESCRIPTION OF EUT | 7 |
| 6.3 DESCRIPTION OF SUPPORT UNITS | 9 |
| 6.4 TEST LOCATION | 9 |
| 6.5 DEVIATION FROM STANDARDS | 9 |
| 6.6 ABNORMALITIES FROM STANDARD CONDITIONS | 9 |
| 6.7 OTHER INFORMATION REQUESTED BY THE CUSTOMER | 9 |
| 6.8 MEASUREMENT UNCERTAINTY (95% CONFIDENCE LEVELS, $K=2$) | 9 |
| 7 EQUIPMENT LIST | 10 |
| 8 RADIO TECHNICAL REQUIREMENTS SPECIFICATION | 13 |
| Appendix A): 6dB Occupied Bandwidth | 16 |
| Appendix B): Conducted Peak Output Power | 20 |
| Appendix C): Band-edge for RF Conducted Emissions | 23 |
| Appendix D): RF Conducted Spurious Emissions | 25 |
| Appendix E): Power Spectral Density | 29 |
| Appendix F): Antenna Requirement | 32 |
| Appendix G): AC Power Line Conducted Emission | 33 |
| Appendix H): Restricted bands around fundamental frequency (Radiated) | 36 |
| Appendix I) Radiated Spurious Emissions | 45 |
| PHOTOGRAPHS OF TEST SETUP | 49 |
| PHOTOGRAPHS OF EUT CONSTRUCTIONAL DETAILS | 52 |

5 Test Requirement

5.1 Test setup

5.1.1 For Conducted test setup

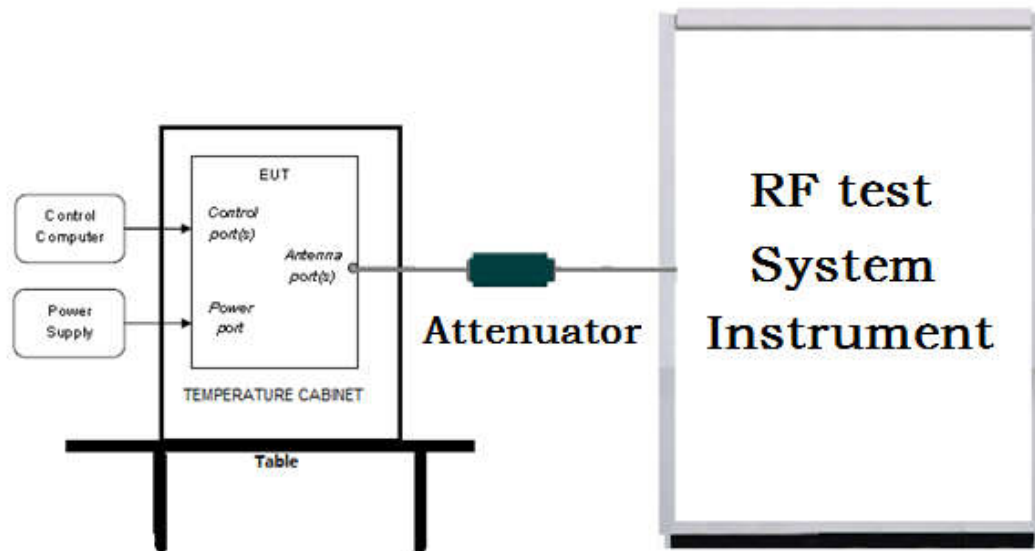

5.1.2 For Radiated Emissions test setup

Radiated Emissions setup:

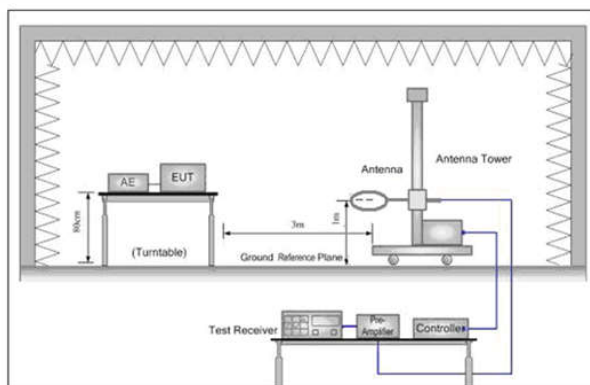


Figure 1. Below 30MHz

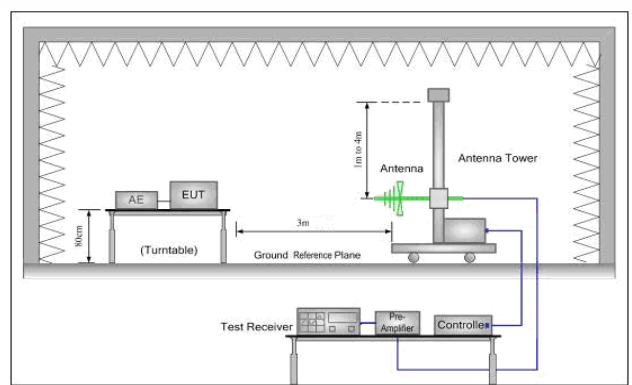


Figure 2. 30MHz to 1GHz


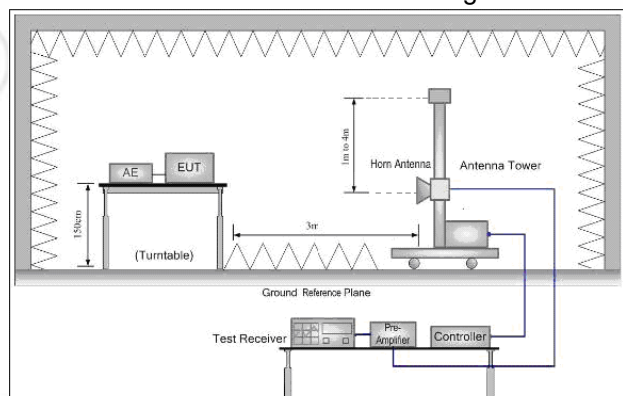


Figure 3. Above 1GHz

5.1.3 For Conducted Emissions test setup

Conducted Emissions setup

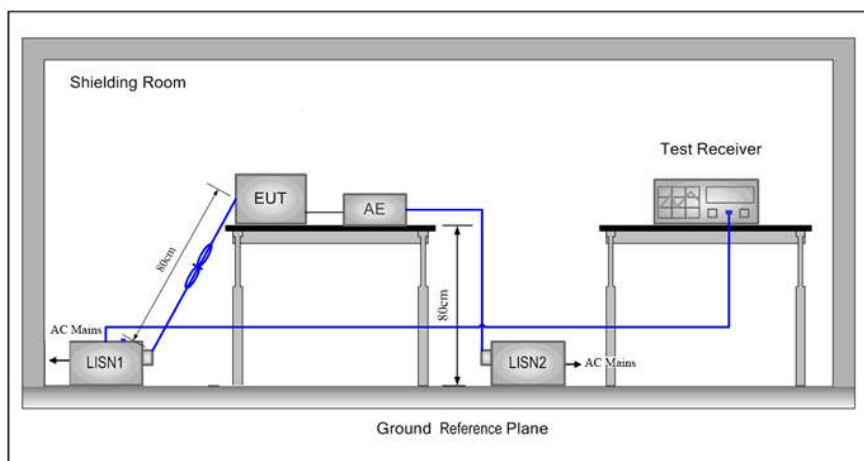

5.2 Test Environment

| Operating Environment: | |
|------------------------|----------|
| Temperature: | 24°C |
| Humidity: | 54 % RH |
| Atmospheric Pressure: | 1010mbar |

5.3 Test Condition

Test channel:

| Test Mode | Tx/Rx | RF Channel | | |
|--------------------|--|------------|------------|------------|
| | | Low(L) | Middle(M) | High(H) |
| GFSK | 2402MHz ~2480 MHz | Channel 0 | Channel 19 | Channel 39 |
| | | 2402MHz | 2440MHz | 2480MHz |
| Transmitting mode: | Keep the EUT in transmitting mode with all kind of modulation and all kind of data rate. | | | |

6 General Information

6.1 Client Information

| | |
|--------------------------|--|
| Applicant: | Autel Intelligent Tech. Corp., Ltd. |
| Address of Applicant: | 7th-8th, 10th Floor, Bldg. B1, Zhiyuan, Xueyuan Rd. Xili, Nanshan, Shenzhen, 518055, China |
| Manufacturer: | Autel Intelligent Tech. Corp., Ltd. |
| Address of Manufacturer: | 7th-8th, 10th Floor, Bldg. B1, Zhiyuan, Xueyuan Rd. Xili, Nanshan, Shenzhen, 518055, China |
| Factory 1: | Autel Intelligent Technology Corp., Ltd. Guangming Branch |
| Address of Factory 1: | 7F&6F, East Wing, Building 2, and 6F of Electronical Building, Yanxiang Industrial Zone, Gaoxin Rd, Dongzhou Community of Guangming New District, Shenzhen |
| Factory 2: | AUTEL VIETNAM COMPANY LIMITED |
| Address of Factory 2: | 4th Floor, Factory#6, Land#CN1, An Duong Industrial Zone, Hong Phong Township, An Duong County, Hai Phong, VietNam |

6.2 General Description of EUT

| | | |
|------------------------|-------------------------------------|--|
| Product Name: | WIRELESS BATTERY DIAGNOSTICS SYSTEM | |
| Model No.(EUT): | MaxiBAS BT609 | |
| Trade mark: | AUTEL | |
| Power Supply: | SWITCHING AC/DC Power Adapter | MODEL: GME10C-050200FUu INPUT: 100-240V~, 50/60Hz, 0.28A OUTPUT: 5V---2A |
| | Battery | Model: TB2021 Capacity: 5800mAh/22.33Wh Nominal Voltage: 3.85V |
| Operation Frequency: | 2402MHz~2480MHz | |
| Bluetooth Version: | 4.2 | |
| Modulation Technique: | DSSS | |
| Modulation Type: | GFSK | |
| Number of Channel: | 40 | |
| Test Power Grade: | default | |
| Test Software of EUT: | Blue Tool | |
| Antenna Type and Gain: | Type: FPC antenna Gain: 4.21dBi | |
| Test Voltage: | Battery 3.85V | |
| Sample Received Date: | Aug. 20, 2020 | |
| Sample tested Date: | Aug. 20, 2020 to Nov. 6, 2020 | |

| Operation Frequency each of channel | | | | | | | |
|-------------------------------------|-----------|---------|-----------|---------|-----------|---------|-----------|
| Channel | Frequency | Channel | Frequency | Channel | Frequency | Channel | Frequency |
| 0 | 2402MHz | 10 | 2422MHz | 20 | 2442MHz | 30 | 2462MHz |
| 1 | 2404MHz | 11 | 2424MHz | 21 | 2444MHz | 31 | 2464MHz |
| 2 | 2406MHz | 12 | 2426MHz | 22 | 2446MHz | 32 | 2466MHz |
| 3 | 2408MHz | 13 | 2428MHz | 23 | 2448MHz | 33 | 2468MHz |
| 4 | 2410MHz | 14 | 2430MHz | 24 | 2450MHz | 34 | 2470MHz |
| 5 | 2412MHz | 15 | 2432MHz | 25 | 2452MHz | 35 | 2472MHz |
| 6 | 2414MHz | 16 | 2434MHz | 26 | 2454MHz | 36 | 2474MHz |
| 7 | 2416MHz | 17 | 2436MHz | 27 | 2456MHz | 37 | 2476MHz |
| 8 | 2418MHz | 18 | 2438MHz | 28 | 2458MHz | 38 | 2478MHz |
| 9 | 2420MHz | 19 | 2440MHz | 29 | 2460MHz | 39 | 2480MHz |

6.3 Description of Support Units

The EUT has been tested with associated equipment below.

| Associated equipment name | | Manufacture | model | S/N serial number | Supplied by | Certification |
|---------------------------|----------|-------------|-----------|-------------------|-------------|---------------|
| AE | Notebook | DELL | DELL 3490 | D245DX2 | DELL | CE&FCC |

6.4 Test Location

All tests were performed at:

Centre Testing International Group Co., Ltd

Building C, Hongwei Industrial Park Block 70, Bao'an District, Shenzhen, China

Telephone: +86 (0) 755 33683668 Fax: +86 (0) 755 33683385

No tests were sub-contracted.

FCC Designation No.: CN1164

6.5 Deviation from Standards

None.

6.6 Abnormalities from Standard Conditions

None.

6.7 Other Information Requested by the Customer

None.

6.8 Measurement Uncertainty (95% confidence levels, k=2)

| No. | Item | Measurement Uncertainty |
|-----|---------------------------------|-------------------------|
| 1 | Radio Frequency | 7.9×10^{-8} |
| 2 | RF power, conducted | 0.46dB (30MHz-1GHz) |
| | | 0.55dB (1GHz-18GHz) |
| 3 | Radiated Spurious emission test | 4.3dB (30MHz-1GHz) |
| | | 4.5dB (1GHz-12.75GHz) |
| 4 | Conduction emission | 3.5dB (9kHz to 150kHz) |
| | | 3.1dB (150kHz to 30MHz) |
| 5 | Temperature test | 0.64°C |
| 6 | Humidity test | 3.8% |
| 7 | DC power voltages | 0.026% |

7 Equipment List

| RF test system | | | | | |
|--|-------------------|------------------------------|---------------|---------------------------|-------------------------------|
| Equipment | Manufacturer | Mode No. | Serial Number | Cal. Date (mm-dd-yyyy) | Cal. Due date (mm-dd-yyyy) |
| Spectrum Analyzer | Keysight | N9010A | MY54510339 | 02-17-2020 | 02-16-2021 |
| Signal Generator | Keysight | N5182B | MY53051549 | 02-17-2020 | 02-16-2021 |
| Temperature/ Humidity Indicator | biaozhi | HM10 | 1804186 | 06-29-2020 | 06-28-2021 |
| High-pass filter | Sinoscite | FL3CX03WG18NM 12-0398-002 | --- | --- | --- |
| High-pass filter | MICRO- TRONICS | SPA-F-63029-4 | --- | --- | --- |
| DC Power | Keysight | E3642A | MY56376072 | 02-17-2020 | 02-16-2021 |
| PC-1 | Lenovo | R4960d | --- | --- | --- |
| BT&WI-FI Automatic control | R&S | OSP120 | 101374 | 02-17-2020 | 02-16-2021 |
| RF control unit | JS Tonscend | JS0806-2 | 158060006 | 02-17-2020 | 02-16-2021 |
| BT&WI-FI Automatic test software | JS Tonscend | JS1120-3 | --- | --- | --- |

| Conducted disturbance Test | | | | | |
|------------------------------------|--------------|-----------|---------------|---------------------------|-------------------------------|
| Equipment | Manufacturer | Model No. | Serial Number | Cal. date (mm-dd-yyyy) | Cal. Due date (mm-dd-yyyy) |
| Receiver | R&S | ESCI | 100435 | 04-28-2020 | 04-27-2021 |
| Temperature/ Humidity Indicator | Defu | TH128 | / | --- | --- |
| LISN | R&S | ENV216 | 100098 | 03-05-2020 | 03-04-2021 |
| Barometer | changchun | DYM3 | 1188 | --- | --- |

| 3M full-anechoic Chamber | | | | | |
|--------------------------------|--------------|-------------------|---------------|---------------------------|-------------------------------|
| Equipment | Manufacturer | Model No. | Serial Number | Cal. date (mm-dd-yyyy) | Cal. Due date (mm-dd-yyyy) |
| RSE Automatic test software | JS Tonscend | JS36-RSE | 10166 | --- | --- |
| Receiver | Keysight | N9038A | MY57290136 | 03-05-2020 | 03-04-2021 |
| Spectrum Analyzer | Keysight | N9020B | MY57111112 | 03-05-2020 | 03-04-2021 |
| Spectrum Analyzer | Keysight | N9030B | MY57140871 | 03-05-2020 | 03-04-2021 |
| TRILOG Broadband Antenna | Schwarzbeck | VULB 9163 | 9163-1148 | 04-25-2018 | 04-24-2021 |
| Horn Antenna | Schwarzbeck | BBHA 9170 | 9170-832 | 04-25-2018 | 04-24-2021 |
| Horn Antenna | ETS-LINDGREN | 3117 | 00057407 | 07-10-2018 | 07-09-2021 |
| Preamplifier | EMCI | EMC184055SE | 980596 | 05-20-2020 | 05-19-2021 |
| Preamplifier | EMCI | EMC001330 | 980563 | 04-22-2020 | 04-21-2021 |
| Preamplifier | JS Tonscend | 980380 | EMC051845SE | 01-09-2020 | 01-08-2021 |
| Temperature/Humidity Indicator | biaozhi | GM1360 | EE1186631 | 04-27-2020 | 04-26-2021 |
| Fully Anechoic Chamber | TDK | FAC-3 | --- | 01-17-2018 | 01-16-2021 |
| Filter bank | JS Tonscend | JS0806-F | 188060094 | 04-10-2018 | 04-09-2021 |
| Cable line | Times | SFT205-NMSM-2.50M | 394812-0001 | --- | --- |
| Cable line | Times | SFT205-NMSM-2.50M | 394812-0002 | --- | --- |
| Cable line | Times | SFT205-NMSM-2.50M | 394812-0003 | --- | --- |
| Cable line | Times | SFT205-NMSM-2.50M | 393495-0001 | --- | --- |
| Cable line | Times | EMC104-NMNM-1000 | SN160710 | --- | --- |
| Cable line | Times | SFT205-NMSM-3.00M | 394813-0001 | --- | --- |
| Cable line | Times | SFT205-NMNM-1.50M | 381964-0001 | --- | --- |
| Cable line | Times | SFT205-NMSM-7.00M | 394815-0001 | --- | --- |
| Cable line | Times | HF160-KMKM-3.00M | 393493-0001 | --- | --- |

| 3M Semi/full-anechoic Chamber | | | | | |
|----------------------------------|------------------|----------------------|---------------|------------------------|----------------------------|
| Equipment | Manufacturer | Model No. | Serial Number | Cal. date (mm-dd-yyyy) | Cal. Due date (mm-dd-yyyy) |
| 3M Chamber & Accessory Equipment | TDK | SAC-3 | --- | 05-24-2019 | 05-23-2022 |
| TRILOG Broadband Antenna | Schwarzbeck | VULB9163 | 9163-618 | 05-16-2020 | 05-15-2021 |
| Loop Antenna | Schwarzbeck | FMZB 1519B | 1519B-076 | 04-25-2018 | 04-24-2021 |
| Receiver | R&S | ESCI7 | 100938-003 | 10-21-2019 | 10-20-2020 |
| Multi device Controller | maturo | NCD/070/10711 112 | --- | --- | --- |
| Temperature/ Humidity Indicator | Shanghai qixiang | HM10 | 1804298 | 06-29-2020 | 06-28-2021 |
| Cable line | Fulai(7M) | SF106 | 5219/6A | --- | --- |
| Cable line | Fulai(6M) | SF106 | 5220/6A | --- | --- |
| Cable line | Fulai(3M) | SF106 | 5216/6A | --- | --- |
| Cable line | Fulai(3M) | SF106 | 5217/6A | --- | --- |

8 Radio Technical Requirements Specification

Reference documents for testing:

| No. | Identity | Document Title |
|-----|------------------|--|
| 1 | FCC Part15C | Subpart C-Intentional Radiators |
| 2 | ANSI C63.10-2013 | American National Standard for Testing Unlicensed Wireless Devices |


Test Results List:

| Test Requirement | Test method | Test item | Verdict | Note |
|-----------------------------------|-------------|---|---------|-------------|
| Part15C Section 15.247 (a)(2) | ANSI C63.10 | 6dB Occupied Bandwidth | PASS | Appendix A) |
| Part15C Section 15.247 (b)(3) | ANSI C63.10 | Conducted Peak Output Power | PASS | Appendix B) |
| Part15C Section 15.247(d) | ANSI C63.10 | Band-edge for RF Conducted Emissions | PASS | Appendix C) |
| Part15C Section 15.247(d) | ANSI C63.10 | RF Conducted Spurious Emissions | PASS | Appendix D) |
| Part15C Section 15.247 (e) | ANSI C63.10 | Power Spectral Density | PASS | Appendix E) |
| Part15C Section 15.203/15.247 (c) | ANSI C63.10 | Antenna Requirement | PASS | Appendix F) |
| Part15C Section 15.207 | ANSI C63.10 | AC Power Line Conducted Emission | PASS | Appendix G) |
| Part15C Section 15.205/15.209 | ANSI C63.10 | Restricted bands around fundamental frequency (Radiated Emission) | PASS | Appendix H) |
| Part15C Section 15.205/15.209 | ANSI C63.10 | Radiated Spurious Emissions | PASS | Appendix I) |

Duty Cycle
Result Table

| Mode | Channel | Duty Cycle [%] | Limit | Verdict |
|------|---------|----------------|-------|---------|
| BLE | LCH | 61.79 | --- | PASS |
| BLE | MCH | 61.54 | --- | PASS |
| BLE | HCH | 61.54 | --- | PASS |

Test Graph

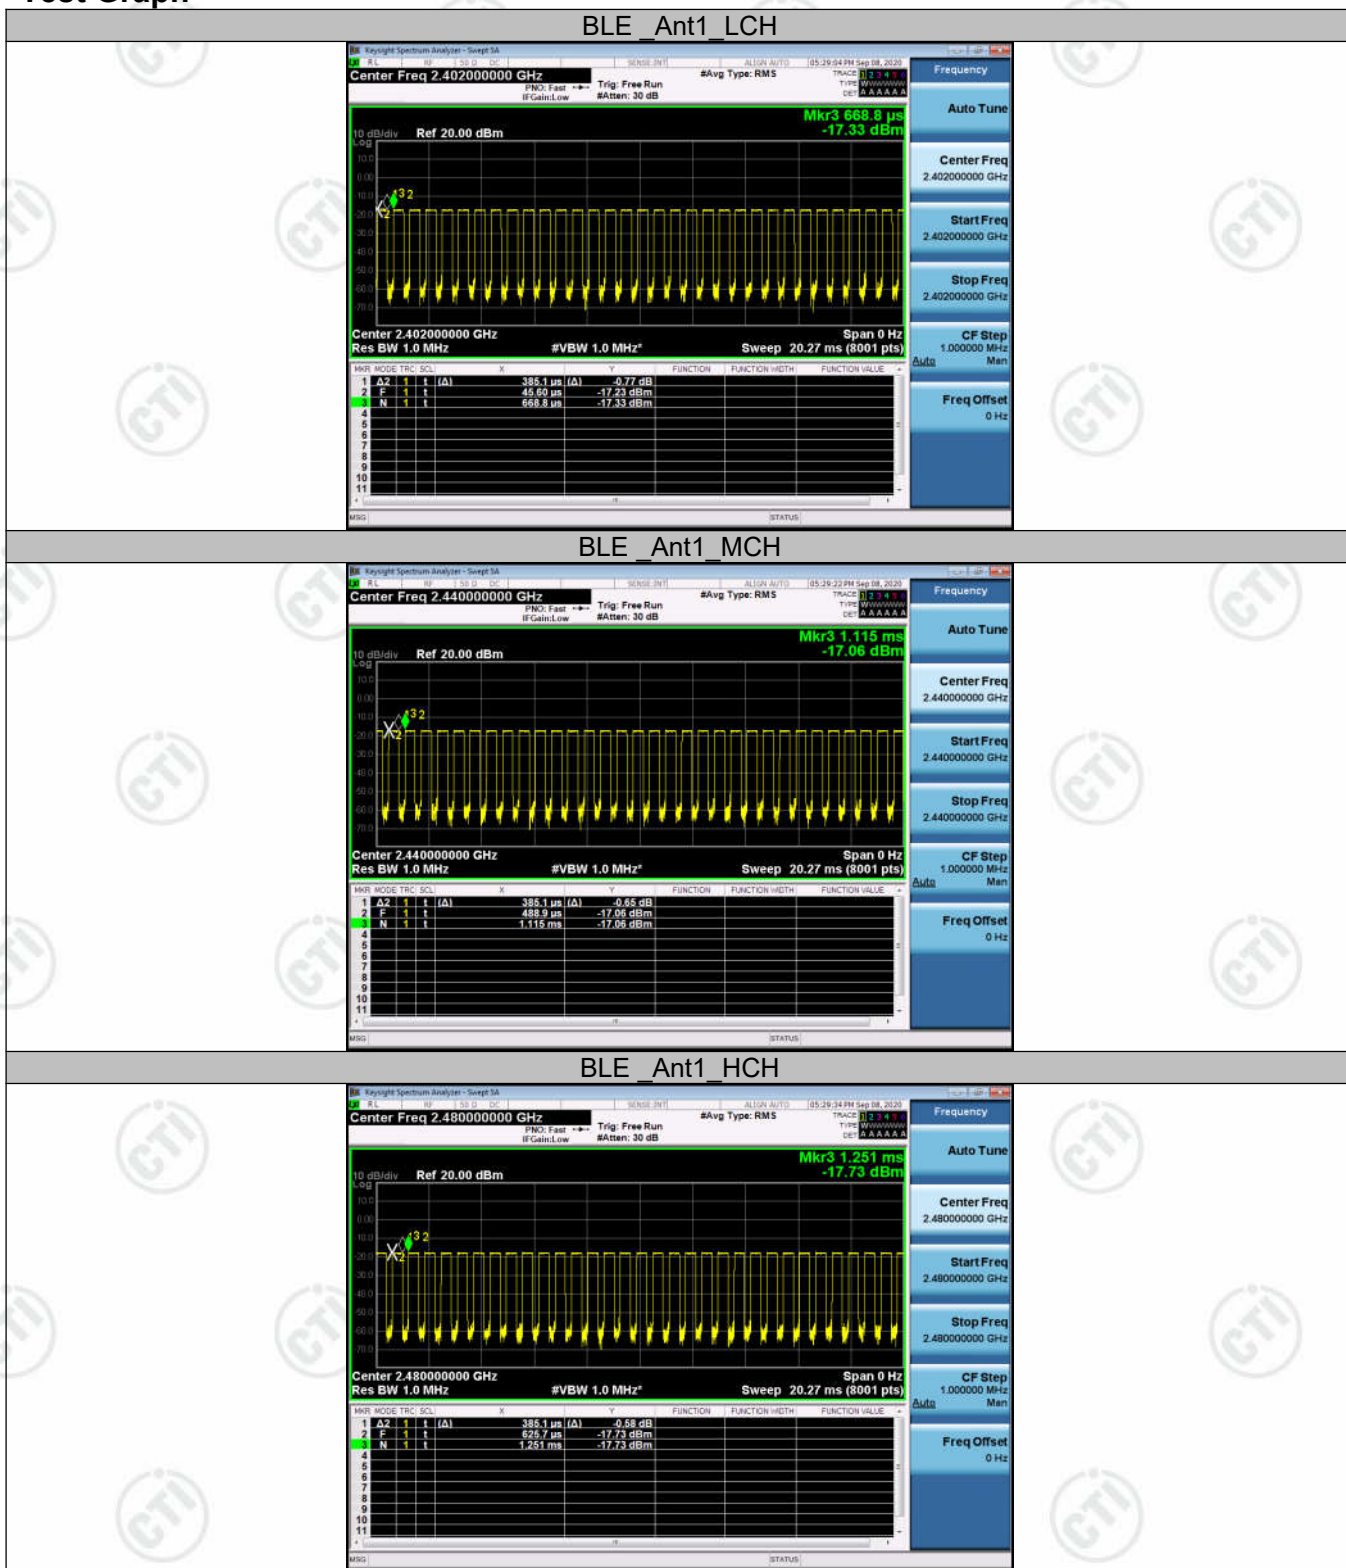

Appendix A): 6dB Occupied Bandwidth

Test Limit

According to §15.247(a)(2) and RSS-247 section 5.2(a)

6 dB Bandwidth :

| | |
|-------|--------------------------|
| Limit | Shall be at least 500kHz |
|-------|--------------------------|


Occupied Bandwidth(99%) : For reporting purposes only.

Test Procedure

Test method Refer as KDB 558074 D01 v04, section 8.1 and ANSI 63.10:2013 clause 6.9.2 & 6.9.3.

1. The EUT RF output connected to the spectrum analyzer by RF cable.
2. Setting maximum power transmit of EUT
3. SA set RBW = 100kHz, VBW = 300kHz and Detector = Peak, to measurement 6 dB Bandwidth and 99% Bandwidth.
4. Measure and record the result of 6 dB Bandwidth and 99% Bandwidth. in the test report.

Test Setup

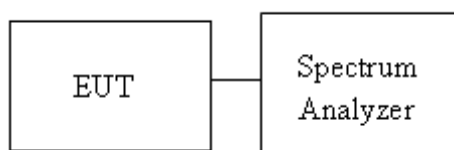

Test Result

| Mode | Channel | 6dB Bandwidth [MHz] | 99% OBW[MHz] | Verdict |
|------|---------|---------------------|--------------|---------|
| BLE | LCH | 0.7028 | 1.0424 | PASS |
| BLE | MCH | 0.7083 | 1.0434 | PASS |
| BLE | HCH | 0.7062 | 1.0449 | PASS |

Test Graphs
6 dB Bandwidth :



Occupied Bandwidth(99%) :

| Graphs | |
|--------|---|
| LCH | <p>Keygraph Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.402000000 GHz</p> <p>Ref Offset 19.6 dB Ref 20.00 dBm</p> <p>Center 2.402 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 3.2 ms</p> <p>Occupied Bandwidth 1.0424 MHz</p> <p>Total Power 9.17 dBm</p> <p>Transmit Freq Error -23.972 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 627.8 kHz</p> <p>x dB -6.00 dB</p> |
| MCH | <p>Keygraph Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.440000000 GHz</p> <p>Ref Offset 19.77 dB Ref 20.00 dBm</p> <p>Center 2.44 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 3.2 ms</p> <p>Occupied Bandwidth 1.0434 MHz</p> <p>Total Power 9.57 dBm</p> <p>Transmit Freq Error -22.504 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 628.7 kHz</p> <p>x dB -6.00 dB</p> |
| HCH | <p>Keygraph Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.480000000 GHz</p> <p>Ref Offset 19.77 dB Ref 20.00 dBm</p> <p>Center 2.48 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 3.2 ms</p> <p>Occupied Bandwidth 1.0449 MHz</p> <p>Total Power 8.90 dBm</p> <p>Transmit Freq Error -20.926 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 638.0 kHz</p> <p>x dB -6.00 dB</p> |

Appendix B): Conducted Peak Output Power

Test Limit

According to §15.247(b) and RSS-247 section 5.4(d)

Peak output power:

For systems using digital modulation in the 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt(30 dBm), base on the use of antennas with directional gain not exceed 6 dBi. If transmitting antennas of directional gain greater than 6dBi are used the peak output power the conducted output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.


| | |
|-------|--|
| Limit | <input checked="" type="checkbox"/> Antenna not exceed 6 dBi: 30dBm <input type="checkbox"/> Antenna with DG greater than 6 dBi [Limit = 30 – (DG – 6)] <input type="checkbox"/> Point-to-point operation |
|-------|--|

Test Procedure

Test method Refer as KDB 558074 D01 v04, section 9.1.2.

1. The EUT RF output connected to the power meter by RF cable.
2. Setting maximum power transmit of EUT.
3. The path loss was compensated to the results for each measurement.
4. Measure and record the result of Peak output power and Average output power. in the test report.

Test Setup

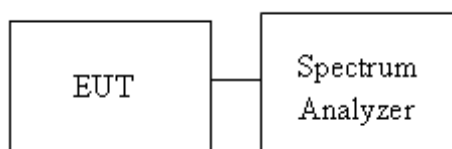

Test Result

| Mode | Channel | Conduct Peak Power[dBm] | Verdict |
|------|---------|-------------------------|---------|
| BLE | LCH | 2.891 | PASS |
| BLE | MCH | 3.265 | PASS |
| BLE | HCH | 2.606 | PASS |

Test Graphs

| Graphs | |
|--------|--|
| LCH | |
| MCH | |
| HCH | |

Appendix C): Band-edge for RF Conducted Emissions

Test Limit

According to §15.247(d) and RSS-247 section 5.5

In any 100 kHz bandwidth outside the authorized frequency band,

Non-restricted bands shall be attenuated at least 20 dB/30 dB relative to the maximum PSD level in 100 kHz by RF conducted or a radiated measurement which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

Test Procedure

Test method Refer as KDB 558074 D01 v04, Section 11.

1. EUT RF output port connected to the SA by RF cable, and the path loss was compensated to result.
2. SA setting, RBW=100kHz, VBW=300kHz, Detector=Peak, Trace mode = max hold, SWT = Auto.
3. In any 100 kHz bandwidth outside the authorized frequency band, shall be attenuated at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when conducted power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.


Test Setup



Result Table

| Mode | Channel | Carrier Power[dBm] | Max.Spurious Level [dBm] | Limit [dBm] | Verdict |
|------|---------|--------------------|--------------------------|-------------|---------|
| BLE | LCH | 2.326 | -54.503 | -17.67 | PASS |
| BLE | HCH | 2.031 | -55.649 | -17.97 | PASS |

Test Graphs

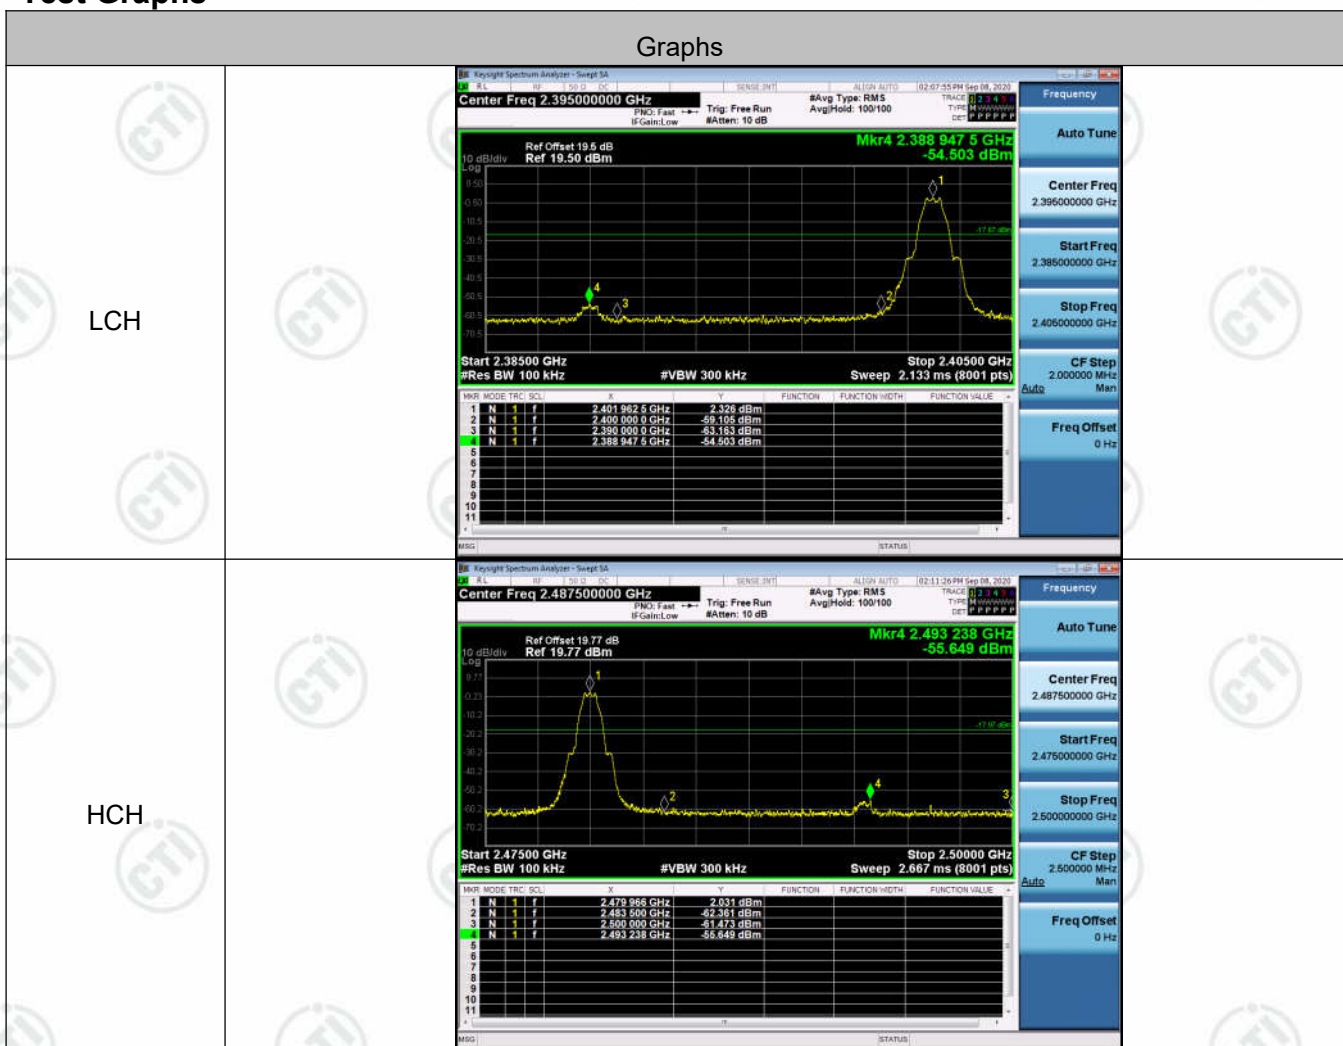

Appendix D): RF Conducted Spurious Emissions

Test Limit

According to §15.247(d) and RSS-247 section 5.5

In any 100 kHz bandwidth outside the authorized frequency band,


Non-restricted bands shall be attenuated at least 20 dB/30 dB relative to the maximum PSD level in 100 kHz by RF conducted or a radiated measurement which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

Test Procedure

Test method Refer as KDB 558074 D01 v04, Section 11.

1. EUT RF output port connected to the SA by RF cable, and the path loss was compensated to result.
2. SA setting, RBW=100kHz, VBW=300kHz, Detector=Peak, Trace mode = max hold, SWT = Auto.
3. In any 100 kHz bandwidth outside the authorized frequency band, shall be attenuated at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when conducted power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.


Test Setup

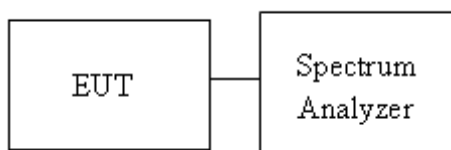



Result Table

| Mode | Channel | Pref [dBm] | Puw[dBm] | Verdict |
|------|---------|------------|----------|---------|
| BLE | LCH | 2.069 | <Limit | PASS |
| BLE | MCH | 2.46 | <Limit | PASS |
| BLE | HCH | 1.781 | <Limit | PASS |

Test Graphs

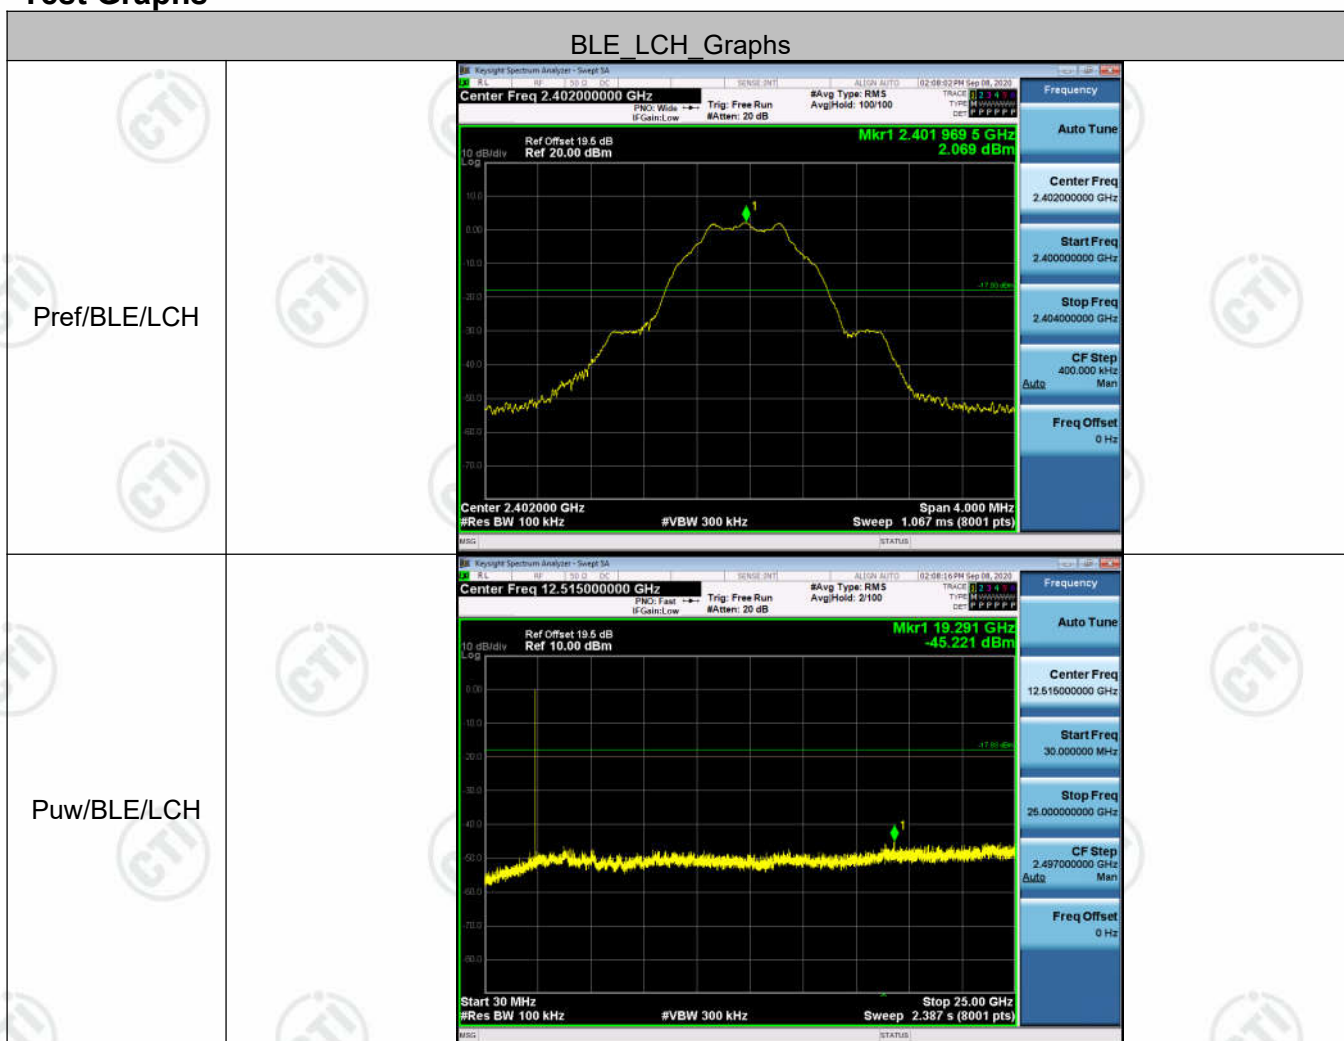

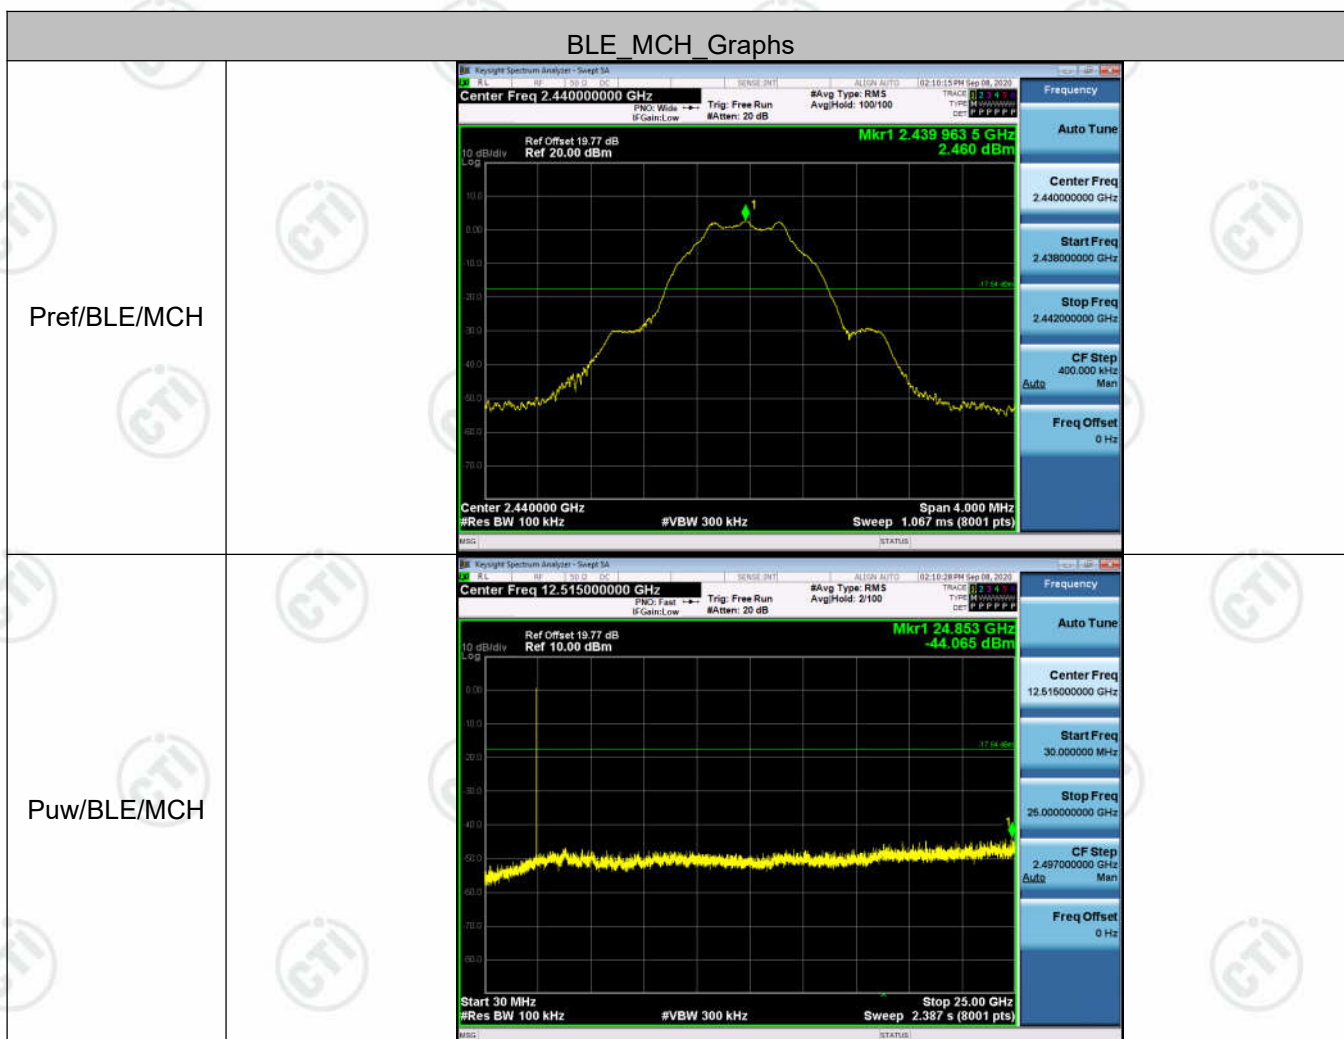

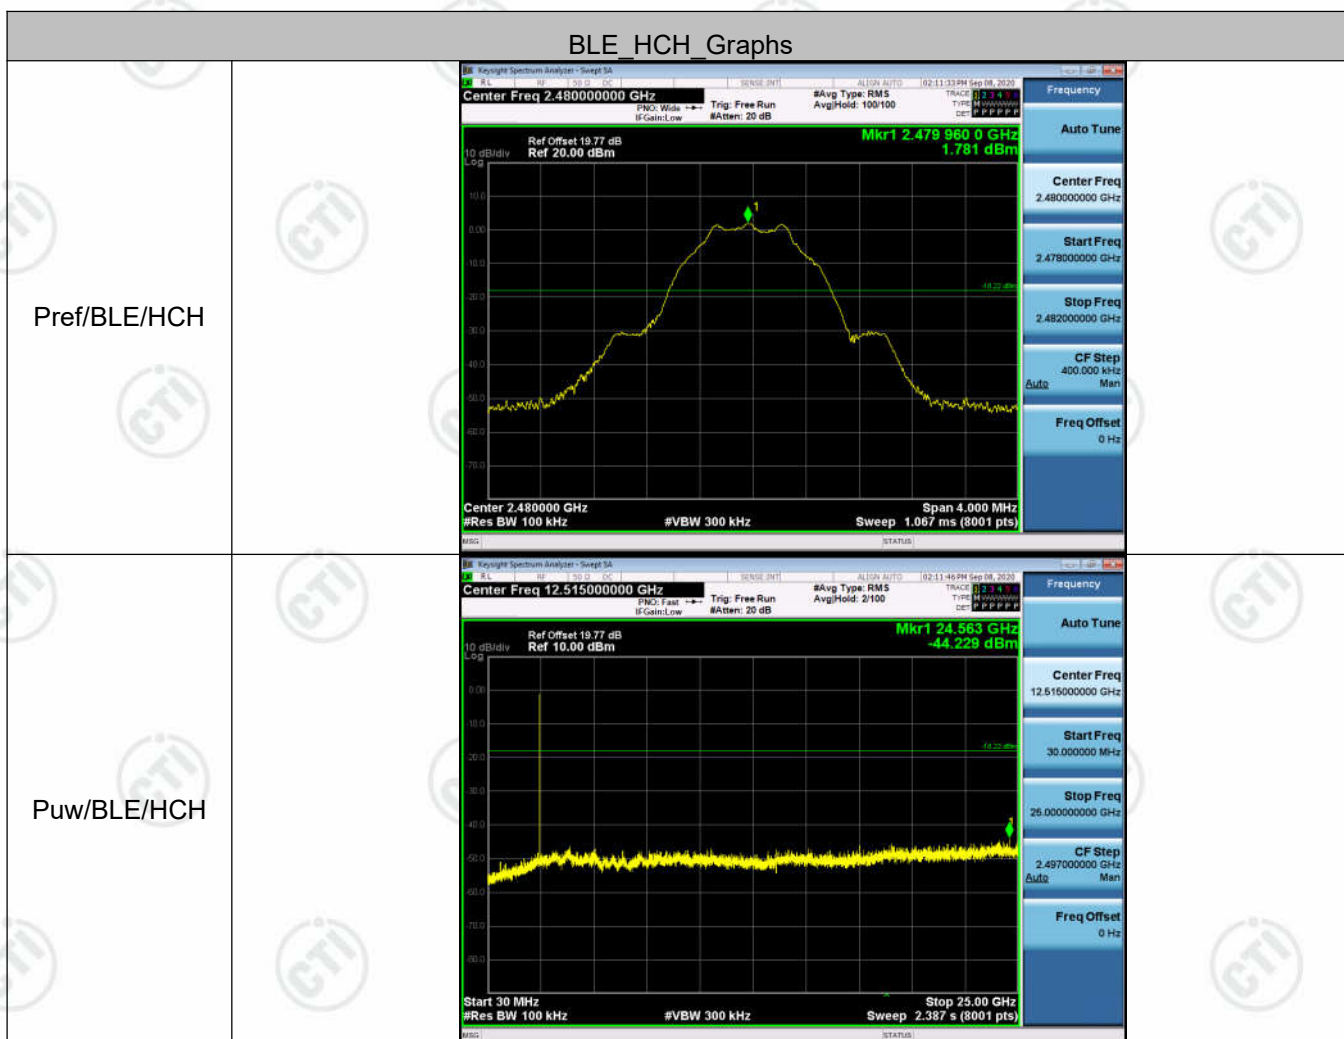

Appendix E): Power Spectral Density

Test Limit

According to §15.247(e) and RSS-247 section 5.2(b)

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

| | |
|-------|---|
| Limit | <input checked="" type="checkbox"/> Antenna not exceed 6 dBi: 8dBm <input type="checkbox"/> Antenna with DG greater than 6 dBi [Limit = 8 – (DG – 6)] <input type="checkbox"/> Point-to-point operation: |
|-------|---|


Test Procedure

Test method Refer as KDB 558074 D01 v04, Section 10.2

1. The EUT RF output connected to the spectrum analyzer by RF cable.
2. Setting maximum power transmit of EUT
3. SA set RBW = 3kHz, VBW = 30kHz, Span = 1.5 times DTS Bandwidth (6 dB BW), Detector = Peak, Sweep Time = Auto and Trace = Max hold.
4. The path loss and Duty Factor were compensated to the results for each measurement by SA.
5. Mark the maximum level.

Measure and record the result of power spectral density. in the test report.




Test Setup



Result Table

| Mode | Channel | PSD [dBm] | Verdict |
|------|---------|-----------|---------|
| BLE | LCH | -11.310 | PASS |
| BLE | MCH | -10.946 | PASS |
| BLE | HCH | -11.668 | PASS |

Test Graphs
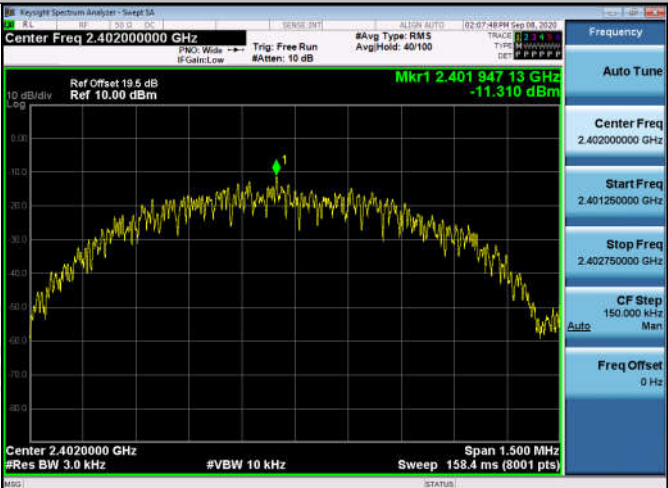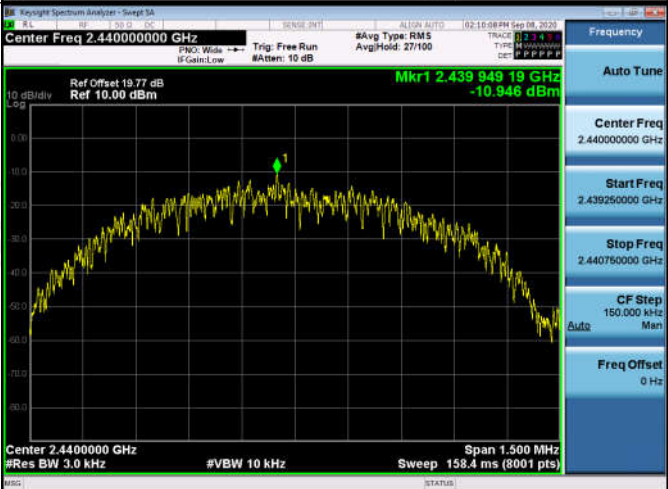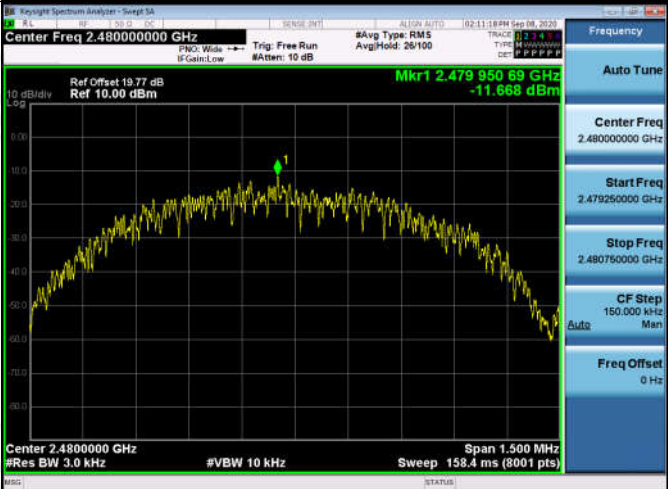
| Graphs | |
|--------|---|
| LCH |  <p>Center Freq 2.40200000 GHz #Res BW 3.0 kHz #VBW 10 kHz Sweep 158.4 ms (8001 pts) Span 1.500 MHz</p> <p>Mkr1 2.401 947 13 GHz -11.310 dBm</p> <p>Ref Offset 19.6 dB Ref 10.00 dBm</p> <p>Frequency Auto Tune Center Freq 2.40200000 GHz Start Freq 2.401250000 GHz Stop Freq 2.402750000 GHz CF Step 150.000 kHz Man Freq Offset 0 Hz</p> |
| MCH |  <p>Center Freq 2.44000000 GHz #Res BW 3.0 kHz #VBW 10 kHz Sweep 158.4 ms (8001 pts) Span 1.500 MHz</p> <p>Mkr1 2.439 949 19 GHz -10.946 dBm</p> <p>Ref Offset 19.77 dB Ref 10.00 dBm</p> <p>Frequency Auto Tune Center Freq 2.44000000 GHz Start Freq 2.439250000 GHz Stop Freq 2.440750000 GHz CF Step 150.000 kHz Man Freq Offset 0 Hz</p> |
| HCH |  <p>Center Freq 2.48000000 GHz #Res BW 3.0 kHz #VBW 10 kHz Sweep 158.4 ms (8001 pts) Span 1.500 MHz</p> <p>Mkr1 2.479 950 69 GHz -11.668 dBm</p> <p>Ref Offset 19.77 dB Ref 10.00 dBm</p> <p>Frequency Auto Tune Center Freq 2.48000000 GHz Start Freq 2.479250000 GHz Stop Freq 2.480750000 GHz CF Step 150.000 kHz Man Freq Offset 0 Hz</p> |

Appendix F): Antenna Requirement


15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

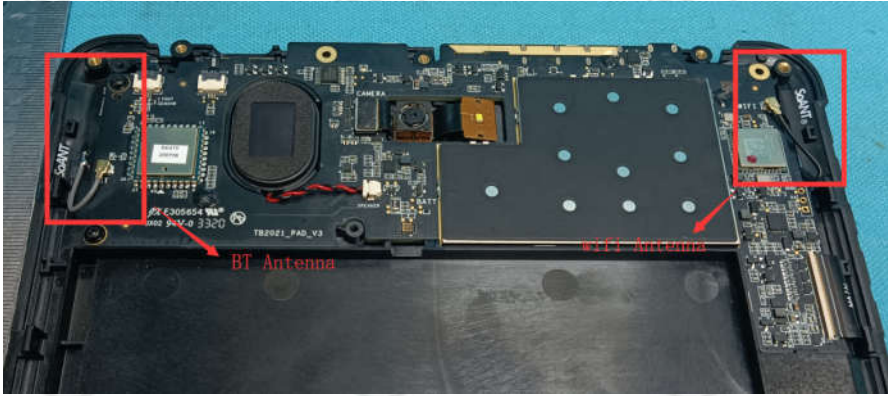

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 4.21dBi.

Appendix G): AC Power Line Conducted Emission


| Test Procedure: | <p>Test frequency range :150KHz-30MHz</p> <ol style="list-style-type: none"> 1)The mains terminal disturbance voltage test was conducted in a shielded room. 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a $50\Omega/50\mu\text{H} + 5\Omega$ linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded. 3)The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane, 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2. 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement. | | | | | | | | | | | | | | | |
|-----------------------|---|-----------|-----------------------|--------------------|--|------------|---------|----------|-----------|-----------|-------|----|----|------|----|----|
| Limit: | <table border="1"> <thead> <tr> <th rowspan="2">Frequency range (MHz)</th><th colspan="2">Limit (dBμV)</th></tr> <tr> <th>Quasi-peak</th><th>Average</th></tr> </thead> <tbody> <tr> <td>0.15-0.5</td><td>66 to 56*</td><td>56 to 46*</td></tr> <tr> <td>0.5-5</td><td>56</td><td>46</td></tr> <tr> <td>5-30</td><td>60</td><td>50</td></tr> </tbody> </table> <p>* The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz. NOTE : The lower limit is applicable at the transition frequency</p> | | Frequency range (MHz) | Limit (dB μ V) | | Quasi-peak | Average | 0.15-0.5 | 66 to 56* | 56 to 46* | 0.5-5 | 56 | 46 | 5-30 | 60 | 50 |
| Frequency range (MHz) | Limit (dB μ V) | | | | | | | | | | | | | | | |
| | Quasi-peak | Average | | | | | | | | | | | | | | |
| 0.15-0.5 | 66 to 56* | 56 to 46* | | | | | | | | | | | | | | |
| 0.5-5 | 56 | 46 | | | | | | | | | | | | | | |
| 5-30 | 60 | 50 | | | | | | | | | | | | | | |

Measurement Data

An initial pre-scan was performed on the live and neutral lines with peak detector.


Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.

Live line:

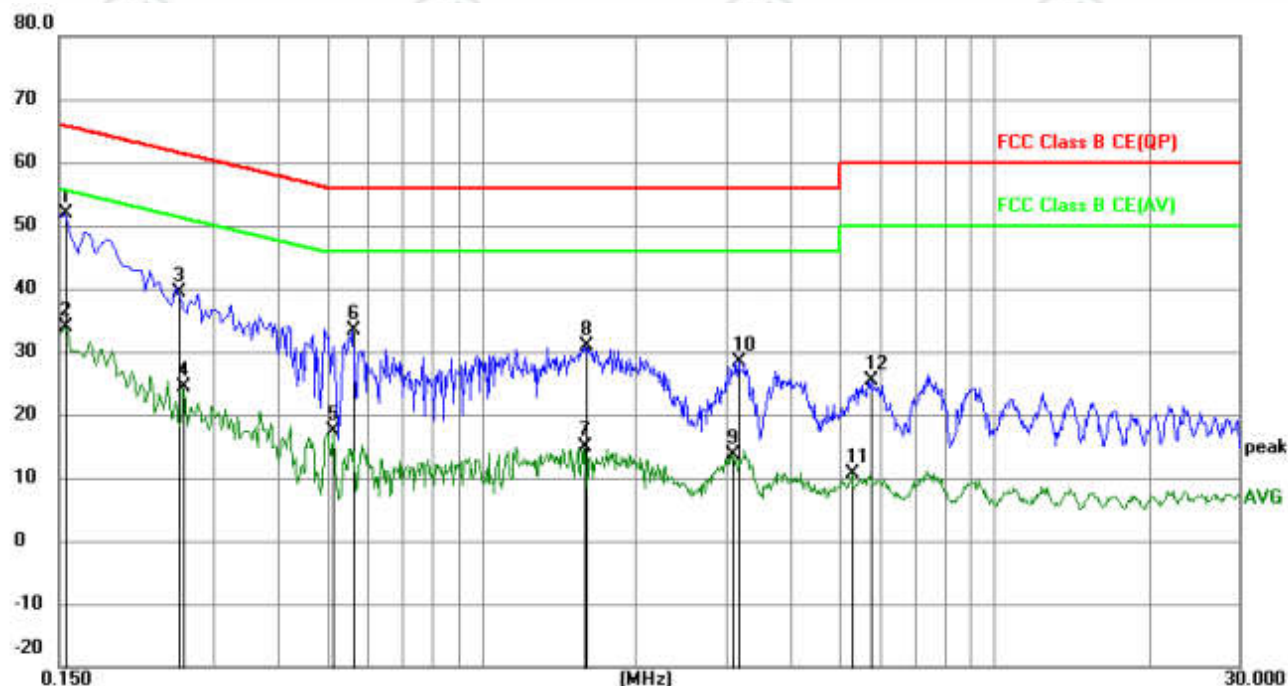

| No. | Mk. | Freq. MHz | Reading Level dBuV | Correct Factor dB | Measure- ment dBuV | Limit dBuV | Margin dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|--------------------------|---------------|--------------|----------|---------|
| 1 | * | 0.1545 | 41.95 | 9.87 | 51.82 | 65.75 | -13.93 | QP | |
| 2 | | 0.1545 | 23.95 | 9.87 | 33.82 | 55.75 | -21.93 | AVG | |
| 3 | | 0.2562 | 29.42 | 9.98 | 39.40 | 61.55 | -22.15 | QP | |
| 4 | | 0.2625 | 14.27 | 10.00 | 24.27 | 51.35 | -27.08 | AVG | |
| 5 | | 0.5144 | 7.50 | 9.97 | 17.47 | 46.00 | -28.53 | AVG | |
| 6 | | 0.5639 | 23.40 | 10.03 | 33.43 | 56.00 | -22.57 | QP | |
| 7 | | 1.5900 | 5.17 | 9.81 | 14.98 | 46.00 | -31.02 | AVG | |
| 8 | | 1.5945 | 21.07 | 9.81 | 30.88 | 56.00 | -25.12 | QP | |
| 9 | | 3.0885 | 3.86 | 9.79 | 13.65 | 46.00 | -32.35 | AVG | |
| 10 | | 3.1829 | 18.68 | 9.79 | 28.47 | 56.00 | -27.53 | QP | |
| 11 | | 5.2980 | 0.76 | 9.78 | 10.54 | 50.00 | -39.46 | AVG | |
| 12 | | 5.7614 | 15.67 | 9.78 | 25.45 | 60.00 | -34.55 | QP | |

Neutral line:

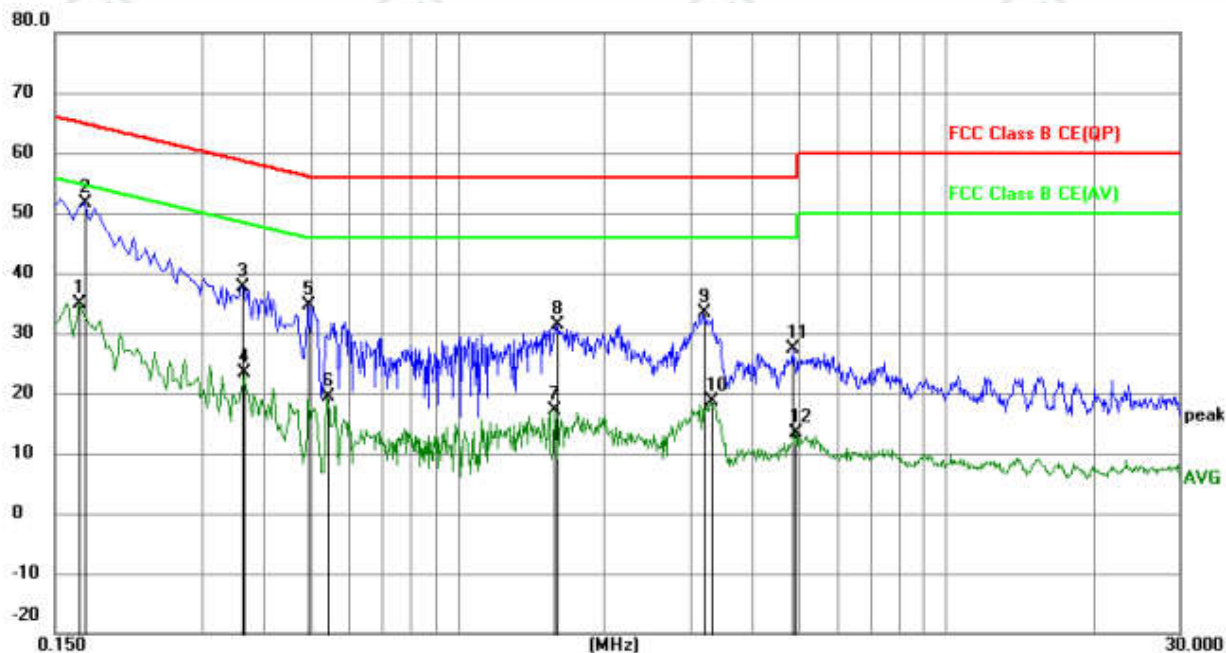

| No. | Mk. | Freq. MHz | Reading Level dBuV | Correct Factor dB | Measure- ment dBuV | Limit dBuV | Margin dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|--------------------------|---------------|--------------|----------|---------|
| 1 | | 0.1680 | 25.12 | 9.87 | 34.99 | 55.06 | -20.07 | AVG | |
| 2 | * | 0.1725 | 41.79 | 9.87 | 51.66 | 64.84 | -13.18 | QP | |
| 3 | | 0.3615 | 27.71 | 10.01 | 37.72 | 58.69 | -20.97 | QP | |
| 4 | | 0.3660 | 13.33 | 10.00 | 23.33 | 48.59 | -25.26 | AVG | |
| 5 | | 0.4965 | 24.71 | 9.95 | 34.66 | 56.06 | -21.40 | QP | |
| 6 | | 0.5415 | 9.38 | 10.00 | 19.38 | 46.00 | -26.62 | AVG | |
| 7 | | 1.5809 | 7.36 | 9.81 | 17.17 | 46.00 | -28.83 | AVG | |
| 8 | | 1.5945 | 21.48 | 9.81 | 31.29 | 56.00 | -24.71 | QP | |
| 9 | | 3.1920 | 23.56 | 9.79 | 33.35 | 56.00 | -22.65 | QP | |
| 10 | | 3.2955 | 8.87 | 9.79 | 18.66 | 46.00 | -27.34 | AVG | |
| 11 | | 4.8705 | 17.72 | 9.78 | 27.50 | 56.00 | -28.50 | QP | |
| 12 | | 4.9064 | 3.49 | 9.78 | 13.27 | 46.00 | -32.73 | AVG | |

Notes:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level = Receiver Reading + LISN Factor + Cable Loss.


Appendix H): Restricted bands around fundamental frequency (Radiated)

| | | | | | |
|-----------------|--|--------------------|------------------|--------|------------|
| Receiver Setup: | Frequency | Detector | RBW | VBW | Remark |
| | 30MHz-1GHz | Quasi-peak | 120kHz | 300kHz | Quasi-peak |
| | Above 1GHz | Peak | 1MHz | 3MHz | Peak |
| | | Peak | 1MHz | 10Hz | Average |
| Test Procedure: | <p>Below 1GHz test procedure as below:</p> <p>Test method Refer as KDB 558074 D01 v04, Section 12.1</p> <ol style="list-style-type: none"> The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable was turned from 0 degrees to 360 degrees to find the maximum reading. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel <p>Above 1GHz test procedure as below:</p> <ol style="list-style-type: none"> Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter). . Test the EUT in the lowest channel , the Highest channel The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is worse case. Repeat above procedures until all frequencies measured was complete. | | | | |
| Limit: | Frequency | Limit (dBμV/m @3m) | Remark | | |
| | 30MHz-88MHz | 40.0 | Quasi-peak Value | | |
| | 88MHz-216MHz | 43.5 | Quasi-peak Value | | |
| | 216MHz-960MHz | 46.0 | Quasi-peak Value | | |
| | 960MHz-1GHz | 54.0 | Quasi-peak Value | | |
| | Above 1GHz | 54.0 | Average Value | | |
| | | 74.0 | Peak Value | | |

Test plot as follows:

| | | | |
|---------|-----------------------|----------|------|
| Mode: | BLE GFSK Transmitting | Channel: | 2402 |
| Remark: | PK | | |


Test Graph

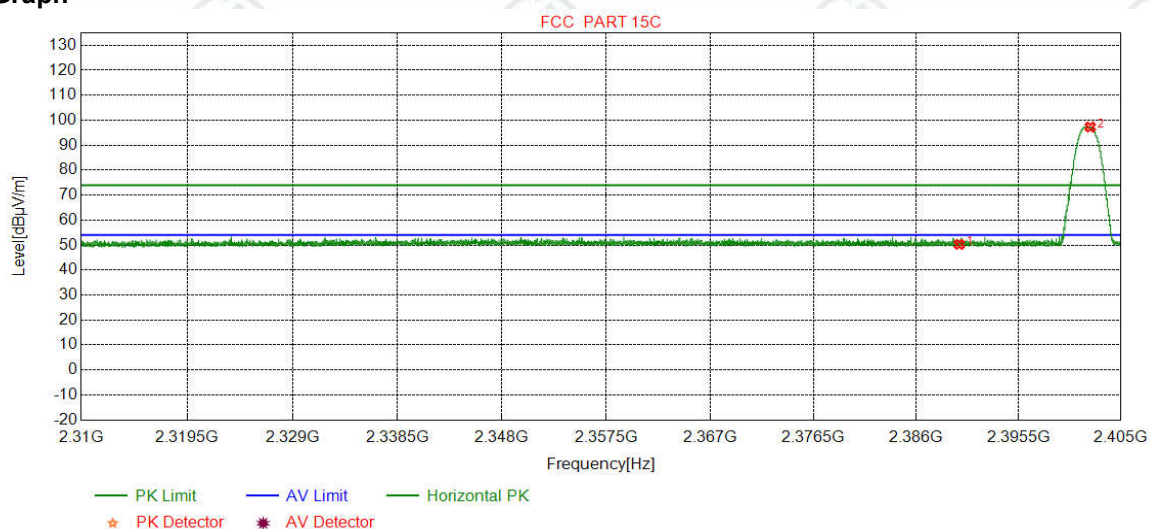

| NO | Freq. [MHz] | Ant Factor [dB] | Cable loss [dB] | Pream gain [dB] | Reading [dBμV] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Result | Polarity |
|----|-------------|-----------------|-----------------|-----------------|----------------|----------------|----------------|-------------|--------|------------|
| 1 | 2390.0000 | 32.25 | 13.37 | -43.12 | 47.76 | 50.26 | 74.00 | 23.74 | Pass | Horizontal |
| 2 | 2402.1561 | 32.26 | 13.31 | -43.12 | 94.82 | 97.27 | 74.00 | -23.27 | Pass | Horizontal |

| | | | |
|---------|-----------------------|----------|------|
| Mode: | BLE GFSK Transmitting | Channel: | 2402 |
| Remark: | PK | | |


Test Graph

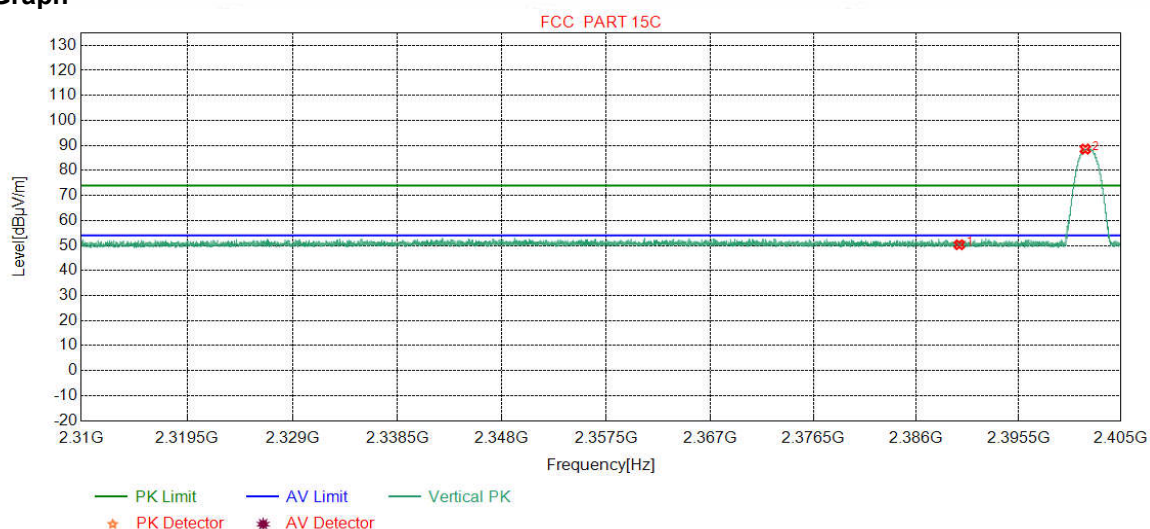

| NO | Freq. [MHz] | Ant Factor [dB] | Cable loss [dB] | Pream gain [dB] | Reading [dBμV] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Result | Polarity |
|----|-------------|-----------------|-----------------|-----------------|----------------|----------------|----------------|-------------|--------|----------|
| 1 | 2390.0000 | 32.25 | 13.37 | -43.12 | 47.80 | 50.30 | 74.00 | 23.70 | Pass | Vertical |
| 2 | 2401.7001 | 32.26 | 13.31 | -43.12 | 86.08 | 88.53 | 74.00 | -14.53 | Pass | Vertical |

| | | | |
|---------|-----------------------|----------|------|
| Mode: | BLE GFSK Transmitting | Channel: | 2402 |
| Remark: | AV | | |


Test Graph

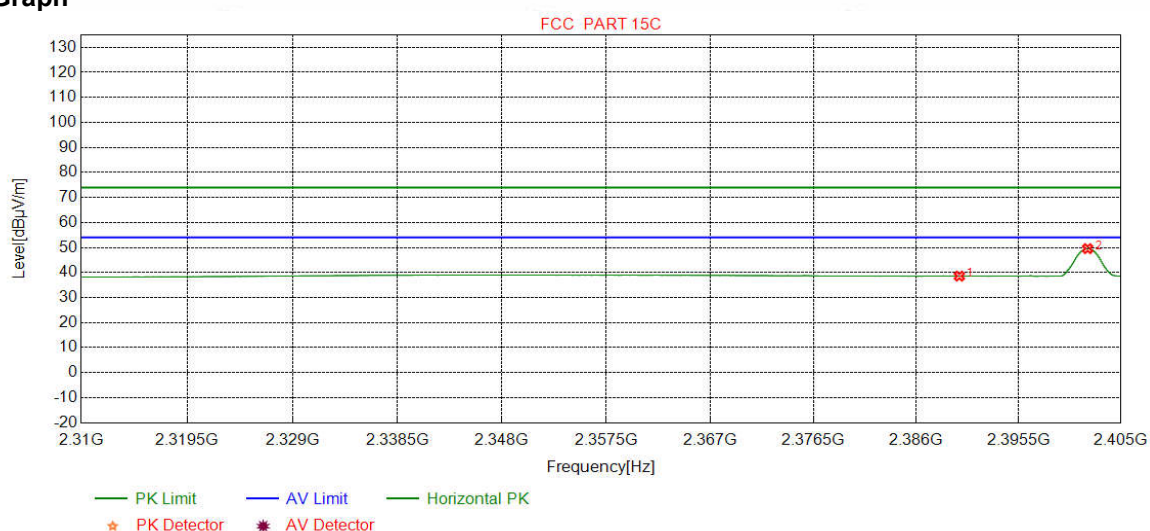

| NO | Freq. [MHz] | Ant Factor [dB] | Cable loss [dB] | Pream gain [dB] | Reading [dBμV] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Result | Polarity |
|----|-------------|-----------------|-----------------|-----------------|----------------|----------------|----------------|-------------|--------|------------|
| 1 | 2390.0000 | 32.25 | 13.37 | -43.12 | 36.06 | 38.56 | 54.00 | 15.44 | Pass | Horizontal |
| 2 | 2401.9155 | 32.26 | 13.31 | -43.12 | 47.09 | 49.54 | 54.00 | 4.46 | Pass | Horizontal |

| | | | |
|---------|-----------------------|----------|------|
| Mode: | BLE GFSK Transmitting | Channel: | 2402 |
| Remark: | AV | | |


Test Graph

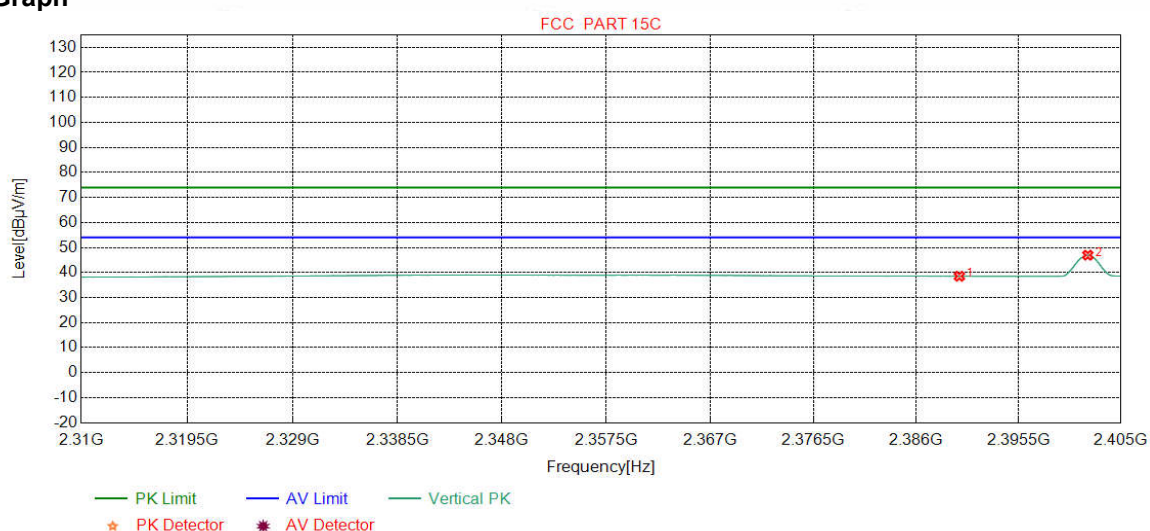

| NO | Freq. [MHz] | Ant Factor [dB] | Cable loss [dB] | Pream gain [dB] | Reading [dBμV] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Result | Polarity |
|----|-------------|-----------------|-----------------|-----------------|----------------|----------------|----------------|-------------|--------|----------|
| 1 | 2390.0000 | 32.25 | 13.37 | -43.12 | 36.01 | 38.51 | 54.00 | 15.49 | Pass | Vertical |
| 2 | 2401.9345 | 32.26 | 13.31 | -43.12 | 44.48 | 46.93 | 54.00 | 7.07 | Pass | Vertical |

| | | | |
|---------|-----------------------|----------|------|
| Mode: | BLE GFSK Transmitting | Channel: | 2480 |
| Remark: | PK | | |


Test Graph

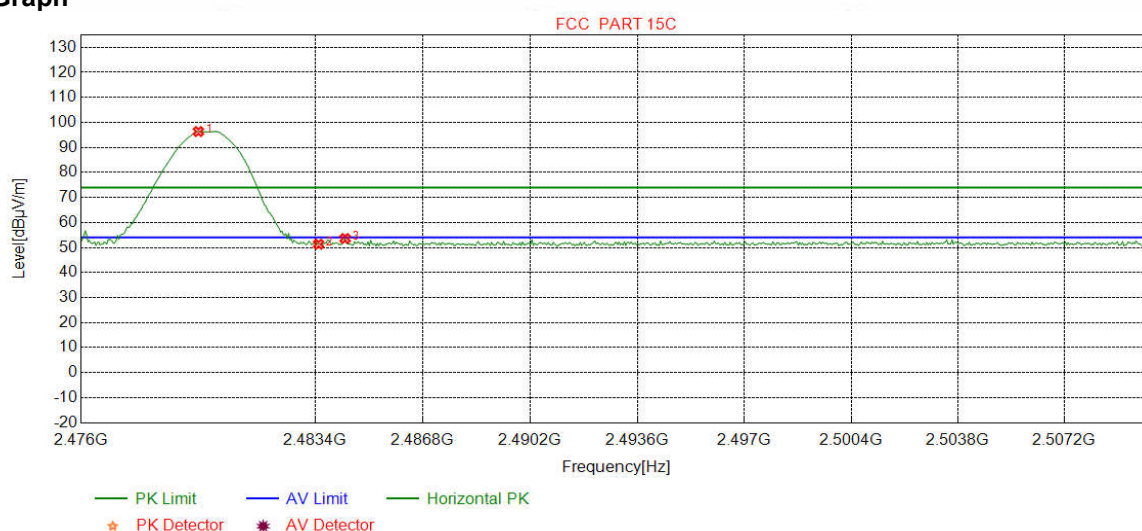

| NO | Freq. [MHz] | Ant Factor [dB] | Cable loss [dB] | Pream gain [dB] | Reading [dBμV] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Result | Polarity |
|----|-------------|-----------------|-----------------|-----------------|----------------|----------------|----------------|-------------|--------|------------|
| 1 | 2479.7021 | 32.37 | 13.39 | -43.10 | 93.70 | 96.36 | 74.00 | -22.36 | Pass | Horizontal |
| 2 | 2483.5000 | 32.38 | 13.38 | -43.11 | 48.66 | 51.31 | 74.00 | 22.69 | Pass | Horizontal |
| 3 | 2484.3404 | 32.38 | 13.37 | -43.10 | 50.95 | 53.60 | 74.00 | 20.40 | Pass | Horizontal |

| | | | |
|---------|-----------------------|----------|------|
| Mode: | BLE GFSK Transmitting | Channel: | 2480 |
| Remark: | PK | | |


Test Graph

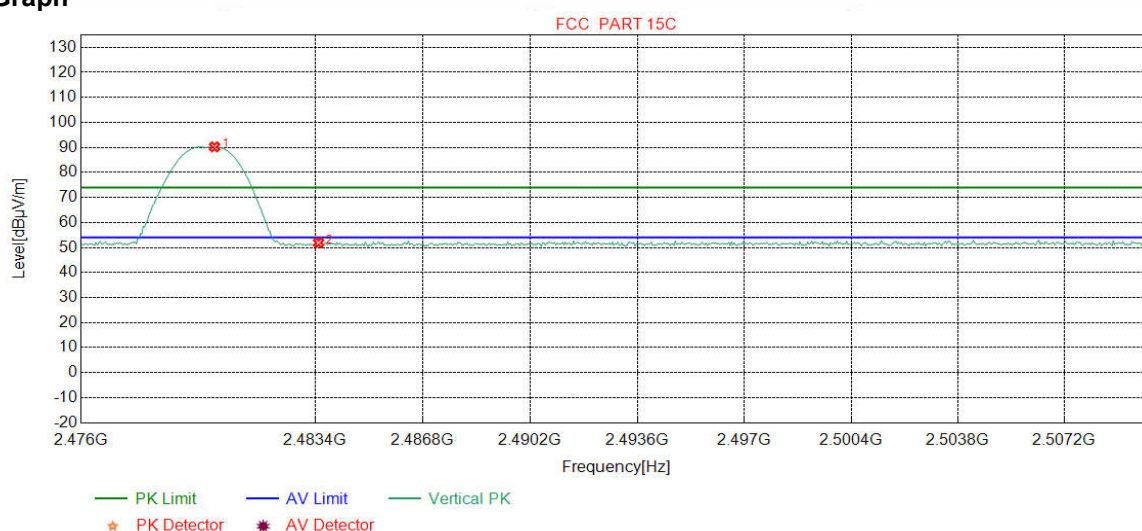

| NO | Freq. [MHz] | Ant Factor [dB] | Cable loss [dB] | Pream gain [dB] | Reading [dBμV] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Result | Polarity |
|----|-------------|-----------------|-----------------|-----------------|----------------|----------------|----------------|-------------|--------|----------|
| 1 | 2480.2128 | 32.37 | 13.39 | -43.10 | 87.58 | 90.24 | 74.00 | -16.24 | Pass | Vertical |
| 2 | 2483.5000 | 32.38 | 13.38 | -43.11 | 49.25 | 51.90 | 74.00 | 22.10 | Pass | Vertical |

| | | | |
|---------|-----------------------|----------|------|
| Mode: | BLE GFSK Transmitting | Channel: | 2480 |
| Remark: | AV | | |


Test Graph

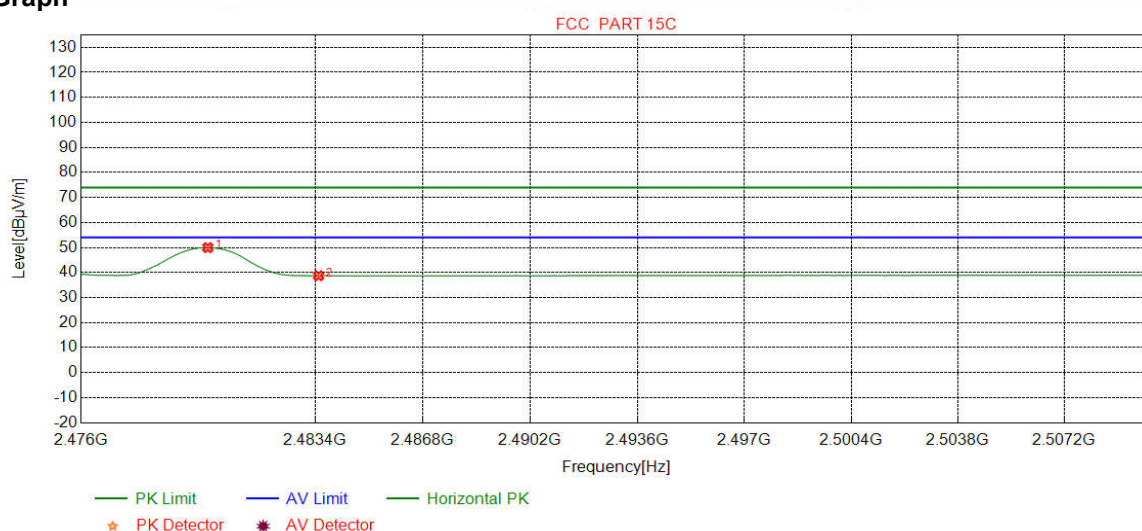

| NO | Freq. [MHz] | Ant Factor [dB] | Cable loss [dB] | Pream gain [dB] | Reading [dBμV] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Result | Polarity |
|----|-------------|-----------------|-----------------|-----------------|----------------|----------------|----------------|-------------|--------|------------|
| 1 | 2480.0000 | 32.37 | 13.39 | -43.10 | 47.30 | 49.96 | 54.00 | 4.04 | Pass | Horizontal |
| 2 | 2483.5000 | 32.38 | 13.38 | -43.11 | 36.06 | 38.71 | 54.00 | 15.29 | Pass | Horizontal |

| | | | |
|---------|-----------------------|----------|------|
| Mode: | BLE GFSK Transmitting | Channel: | 2480 |
| Remark: | AV | | |

Test Graph

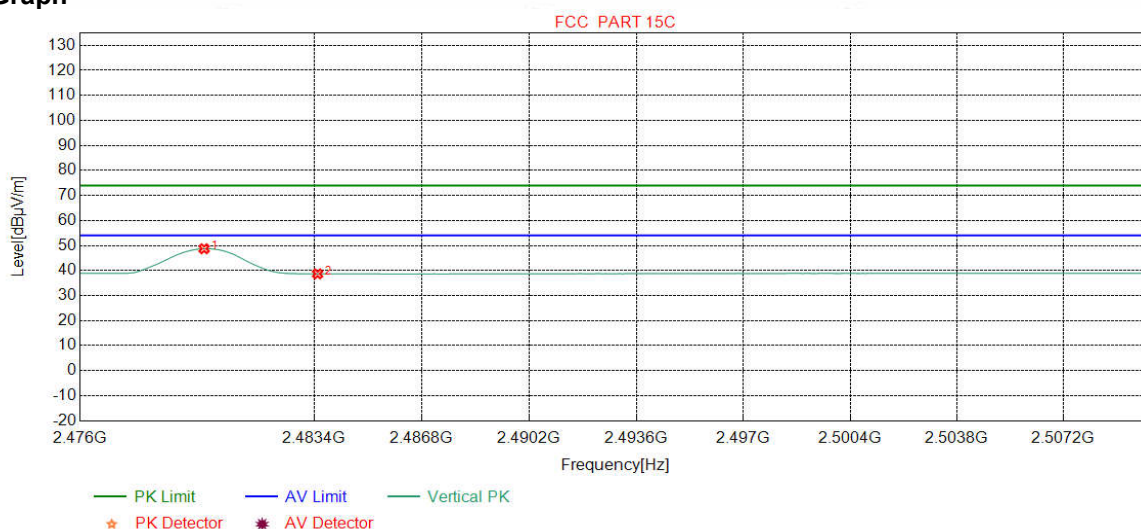

| N O | Freq. [MHz] | Ant Factor [dB] | Cable loss [dB] | Pream gain [dB] | Reading [dBμV] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Result | Polarity |
|-----|-------------|-----------------|-----------------|-----------------|----------------|----------------|----------------|-------------|--------|----------|
| 1 | 2479.9149 | 32.37 | 13.39 | -43.10 | 46.05 | 48.71 | 54.00 | 5.29 | Pass | Vertical |
| 2 | 2483.5000 | 32.38 | 13.38 | -43.11 | 36.01 | 38.66 | 54.00 | 15.34 | Pass | Vertical |

Note:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading - Correct Factor

Correct Factor = Preamplifier Factor - Antenna Factor - Cable Factor

Appendix I) Radiated Spurious Emissions

| | | | | | |
|--|-------------------|----------------------------------|----------------|------------|--------------------------|
| Receiver Setup: | Frequency | Detector | RBW | VBW | Remark |
| | 0.009MHz-0.090MHz | Peak | 10kHz | 30kHz | Peak |
| | 0.009MHz-0.090MHz | Average | 10kHz | 30kHz | Average |
| | 0.090MHz-0.110MHz | Quasi-peak | 10kHz | 30kHz | Quasi-peak |
| | 0.110MHz-0.490MHz | Peak | 10kHz | 30kHz | Peak |
| | 0.110MHz-0.490MHz | Average | 10kHz | 30kHz | Average |
| | 0.490MHz -30MHz | Quasi-peak | 10kHz | 30kHz | Quasi-peak |
| | 30MHz-1GHz | Quasi-peak | 120kHz | 300kHz | Quasi-peak |
| | Above 1GHz | Peak | 1MHz | 3MHz | Peak |
| Peak | | 1MHz | 10Hz | Average | |
| Test Procedure: | | | | | |
| Below 1GHz test procedure as below: Test method Refer as KDB 558074 D01 v04, Section 12.1 | | | | | |
| a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. | | | | | |
| b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. | | | | | |
| c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. | | | | | |
| d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable was turned from 0 degrees to 360 degrees to find the maximum reading. | | | | | |
| e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. | | | | | |
| f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. | | | | | |
| Above 1GHz test procedure as below: | | | | | |
| g. Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter). | | | | | |
| h. Test the EUT in the lowest channel ,the middle channel ,the Highest channel | | | | | |
| i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is worse case. | | | | | |
| j. Repeat above procedures until all frequencies measured was complete. | | | | | |
| Limit: | Frequency | Field strength (microvolt/meter) | Limit (dBμV/m) | Remark | Measurement distance (m) |
| | 0.009MHz-0.490MHz | 2400/F(kHz) | - | - | 300 |
| | 0.490MHz-1.705MHz | 24000/F(kHz) | - | - | 30 |
| | 1.705MHz-30MHz | 30 | - | - | 30 |
| | 30MHz-88MHz | 100 | 40.0 | Quasi-peak | 3 |
| | 88MHz-216MHz | 150 | 43.5 | Quasi-peak | 3 |
| | 216MHz-960MHz | 200 | 46.0 | Quasi-peak | 3 |
| | 960MHz-1GHz | 500 | 54.0 | Quasi-peak | 3 |
| | Above 1GHz | 500 | 54.0 | Average | 3 |
| Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device. | | | | | |

Radiated Spurious Emissions test Data:

Transmitter Emission Below 1GHz

| Mode: | | | BLE GFSK Transmitting | | | | | Channel: | | 2440 | |
|-------|-------------|-----------------|-----------------------|-----------------|----------------|----------------|----------------|-------------|--------|----------|--------|
| NO | Freq. [MHz] | Ant Factor [dB] | Cable loss [dB] | Pream gain [dB] | Reading [dBμV] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Result | Polarity | Remark |
| 1 | 47.9468 | 13.20 | 0.78 | -31.95 | 43.36 | 25.39 | 40.00 | 14.61 | Pass | H | PK |
| 2 | 72.0052 | 8.62 | 0.97 | -32.02 | 47.60 | 25.17 | 40.00 | 14.83 | Pass | H | PK |
| 3 | 120.2190 | 9.17 | 1.30 | -32.07 | 52.39 | 30.79 | 43.50 | 12.71 | Pass | H | PK |
| 4 | 240.0260 | 11.94 | 1.84 | -31.90 | 52.04 | 33.92 | 46.00 | 12.08 | Pass | H | PK |
| 5 | 384.0854 | 15.05 | 2.33 | -31.86 | 51.39 | 36.91 | 46.00 | 9.09 | Pass | H | PK |
| 6 | 649.9890 | 19.40 | 3.10 | -32.07 | 37.89 | 28.32 | 46.00 | 17.68 | Pass | H | PK |
| 7 | 48.0438 | 13.20 | 0.78 | -31.96 | 41.69 | 23.71 | 40.00 | 16.29 | Pass | V | PK |
| 8 | 71.9082 | 8.64 | 0.97 | -32.02 | 43.65 | 21.24 | 40.00 | 18.76 | Pass | V | PK |
| 9 | 120.0250 | 9.20 | 1.30 | -32.07 | 46.04 | 24.47 | 43.50 | 19.03 | Pass | V | PK |
| 10 | 150.0010 | 7.55 | 1.45 | -32.01 | 52.25 | 29.24 | 43.50 | 14.26 | Pass | V | PK |
| 11 | 240.0260 | 11.94 | 1.84 | -31.90 | 49.22 | 31.10 | 46.00 | 14.90 | Pass | V | PK |
| 12 | 384.1824 | 15.05 | 2.33 | -31.85 | 45.99 | 31.52 | 46.00 | 14.48 | Pass | V | PK |

Transmitter Emission above 1GHz

| Mode: | | | BLE GFSK Transmitting | | | | | Channel: | | 2402 | |
|-------|-------------|-----------------|-----------------------|-----------------|----------------|----------------|----------------|-------------|--------|----------|--------|
| NO | Freq. [MHz] | Ant Factor [dB] | Cable loss [dB] | Pream gain [dB] | Reading [dBμV] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Result | Polarity | Remark |
| 1 | 1063.6064 | 27.96 | 2.52 | -43.03 | 54.89 | 42.34 | 74.00 | 31.66 | Pass | H | PK |
| 2 | 2132.1132 | 31.88 | 3.62 | -43.16 | 56.60 | 48.94 | 74.00 | 25.06 | Pass | H | PK |
| 3 | 2665.3665 | 32.66 | 4.10 | -43.10 | 56.43 | 50.09 | 74.00 | 23.91 | Pass | H | PK |
| 4 | 4804.1203 | 34.50 | 4.55 | -42.80 | 51.92 | 48.17 | 74.00 | 25.83 | Pass | H | PK |
| 5 | 7914.3276 | 36.43 | 6.04 | -42.18 | 49.90 | 50.19 | 74.00 | 23.81 | Pass | H | PK |
| 6 | 9326.4218 | 37.63 | 6.62 | -42.06 | 49.98 | 52.17 | 74.00 | 21.83 | Pass | H | PK |
| 7 | 2129.9130 | 31.88 | 3.62 | -43.17 | 56.53 | 48.86 | 74.00 | 25.14 | Pass | V | PK |
| 8 | 4255.0837 | 34.16 | 4.50 | -42.90 | 52.52 | 48.28 | 74.00 | 25.72 | Pass | V | PK |
| 9 | 4804.0000 | 34.50 | 4.55 | -42.80 | 51.49 | 47.74 | 74.00 | 26.26 | Pass | V | PK |
| 10 | 7206.0000 | 36.31 | 5.81 | -42.16 | 46.01 | 45.97 | 74.00 | 28.03 | Pass | V | PK |
| 11 | 9608.0000 | 37.64 | 6.63 | -42.10 | 47.47 | 49.64 | 74.00 | 24.36 | Pass | V | PK |
| 12 | 12010.0000 | 39.31 | 7.60 | -41.90 | 47.38 | 52.39 | 74.00 | 21.61 | Pass | V | PK |

| Mode: | | | BLE GFSK Transmitting | | | | | Channel: | | 2440 | |
|-------|-------------|-----------------|-----------------------|-----------------|----------------|----------------|----------------|-------------|--------|----------|--------|
| NO | Freq. [MHz] | Ant Factor [dB] | Cable loss [dB] | Pream gain [dB] | Reading [dBμV] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Result | Polarity | Remark |
| 1 | 2132.7133 | 31.89 | 3.63 | -43.18 | 60.52 | 52.86 | 74.00 | 21.14 | Pass | H | PK |
| 2 | 2825.7826 | 32.92 | 4.23 | -43.09 | 52.19 | 46.25 | 74.00 | 27.75 | Pass | H | PK |
| 3 | 4880.0000 | 34.50 | 4.80 | -42.80 | 49.83 | 46.33 | 74.00 | 27.67 | Pass | H | PK |
| 4 | 7320.0000 | 36.42 | 5.85 | -42.14 | 46.68 | 46.81 | 74.00 | 27.19 | Pass | H | PK |
| 5 | 9760.0000 | 37.70 | 6.73 | -42.10 | 47.58 | 49.91 | 74.00 | 24.09 | Pass | H | PK |
| 6 | 12200.0000 | 39.42 | 7.67 | -41.90 | 45.07 | 50.26 | 74.00 | 23.74 | Pass | H | PK |
| 7 | 2132.1132 | 31.88 | 3.62 | -43.16 | 52.12 | 44.46 | 74.00 | 29.54 | Pass | V | PK |
| 8 | 4251.0834 | 34.15 | 4.51 | -42.90 | 57.14 | 52.90 | 74.00 | 21.10 | Pass | V | PK |
| 9 | 5314.1543 | 34.81 | 4.83 | -42.67 | 50.88 | 47.85 | 74.00 | 26.15 | Pass | V | PK |
| 10 | 7320.0000 | 36.42 | 5.85 | -42.14 | 46.12 | 46.25 | 74.00 | 27.75 | Pass | V | PK |
| 11 | 9760.0000 | 37.70 | 6.73 | -42.10 | 47.23 | 49.56 | 74.00 | 24.44 | Pass | V | PK |
| 12 | 12200.0000 | 39.42 | 7.67 | -41.90 | 45.46 | 50.65 | 74.00 | 23.35 | Pass | V | PK |

| Mode: | | | BLE GFSK Transmitting | | | | | Channel: | | 2480 | |
|-------|-------------|-----------------|-----------------------|-----------------|----------------|----------------|----------------|-------------|--------|----------|--------|
| NO | Freq. [MHz] | Ant Factor [dB] | Cable loss [dB] | Pream gain [dB] | Reading [dBμV] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Result | Polarity | Remark |
| 1 | 2122.7123 | 31.87 | 3.61 | -43.17 | 59.18 | 51.49 | 74.00 | 22.51 | Pass | H | PK |
| 2 | 2665.5666 | 32.66 | 4.10 | -43.10 | 56.63 | 50.29 | 74.00 | 23.71 | Pass | H | PK |
| 3 | 4263.0842 | 34.17 | 4.48 | -42.90 | 49.12 | 44.87 | 74.00 | 29.13 | Pass | H | PK |
| 4 | 5886.1924 | 35.62 | 5.07 | -42.61 | 48.61 | 46.69 | 74.00 | 27.31 | Pass | H | PK |
| 5 | 6892.2595 | 36.06 | 5.82 | -42.27 | 49.32 | 48.93 | 74.00 | 25.07 | Pass | H | PK |
| 6 | 9149.4100 | 37.67 | 6.45 | -42.03 | 50.73 | 52.82 | 74.00 | 21.18 | Pass | H | PK |
| 7 | 2132.3132 | 31.89 | 3.63 | -43.18 | 54.06 | 46.40 | 74.00 | 27.60 | Pass | V | PK |
| 8 | 2666.3666 | 32.67 | 4.10 | -43.10 | 55.72 | 49.39 | 74.00 | 24.61 | Pass | V | PK |
| 9 | 3988.0659 | 33.79 | 4.33 | -43.00 | 54.93 | 50.05 | 74.00 | 23.95 | Pass | V | PK |
| 10 | 4960.0000 | 34.50 | 4.82 | -42.80 | 50.93 | 47.45 | 74.00 | 26.55 | Pass | V | PK |
| 11 | 7440.0000 | 36.54 | 5.85 | -42.11 | 46.81 | 47.09 | 74.00 | 26.91 | Pass | V | PK |
| 12 | 9818.4546 | 37.73 | 6.65 | -42.10 | 50.07 | 52.35 | 74.00 | 21.65 | Pass | V | PK |

Note:

1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading - Correct Factor

Correct Factor = Preamplifier Factor - Antenna Factor - Cable Factor

2) Scan from 9kHz to 25GHz, the disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.