

FCC REPORT

Applicant: Autel Intelligent Tech. Corp., Ltd.

Address of Applicant: 6th - 10th Floor, Bldg. B1, Zhiyuan, Xueyuan Rd., Xili, Nanshan, Shenzhen, China

Manufacturer/ Factory: Autel Intelligent Tech. Corp., Ltd.

Address of Manufacturer/ Factory: 6th - 10th Floor, Bldg. B1, Zhiyuan, Xueyuan Rd., Xili, Nanshan, Shenzhen, China

Equipment Under Test (EUT)

Product Name: AUTOMOTIVE DIAGNOSTIC & ANALYSIS SYSTEM

Model No.: MaxiSys, MaxiSys Pro

Trade Mark: AUTEL

FCC ID: WQ8MAXISYSMY908

Applicable standards: FCC CFR Title 47 Part 15 Subpart E Section 15.407:2016

Date of sample receipt: January 08, 2017

Date of Test: January 09-16, 2017

Date of report issued: January 17, 2017

Test Result : PASS *

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:




Robinson Lo
Laboratory Manager

This results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

2 Version

Version No.	Date	Description
01	January 17, 2017	Original

Prepared By:




Date:

January 17, 2017

Project Engineer

Check By:



Date:

January 17, 2017

Reviewer

3 Contents

	Page
1 COVER PAGE.....	1
2 VERSION.....	2
3 CONTENTS	3
4 TEST SUMMARY	4
4.1 MEASUREMENT UNCERTAINTY	4
5 GENERAL INFORMATION.....	5
5.1 GENERAL DESCRIPTION OF EUT	5
5.2 TEST MODE	7
5.3 DESCRIPTION OF SUPPORT UNITS	7
5.4 TEST FACILITY.....	7
5.5 TEST LOCATION	7
6 TEST INSTRUMENTS LIST	8
7 TEST RESULTS AND MEASUREMENT DATA.....	9
7.1 ANTENNA REQUIREMENT	9
7.2 CONDUCTED EMISSIONS	10
7.3 CONDUCTED PEAK OUTPUT POWER	13
7.4 CHANNEL BANDWIDTH	14
7.5 POWER SPECTRAL DENSITY	18
7.6 BAND EDGES	22
7.6.1 Radiated Emission Method.....	22
7.7 SPURIOUS EMISSION.....	27
7.7.1 Radiated Emission Method.....	27
7.8 FREQUENCY STABILITY	33
8 TEST SETUP PHOTO	35
9 EUT CONSTRUCTIONAL DETAILS	36

4 Test Summary

Test Item	Section in CFR 47	Result
Antenna requirement	15.203	Pass
AC Power Line Conducted Emission	15.207	Pass
Conducted Peak Output Power	15.407(a)(3)	Pass
Channel Bandwidth	15.407(e)	Pass
Power Spectral Density	15.407(a)(3)	Pass
Band Edge	15.407(b)(4)	Pass
Spurious Emission	15.205/15.209/15.407(b)(4)	Pass

Pass: The EUT complies with the essential requirements in the standard.

4.1 Measurement Uncertainty

Test Item	Frequency Range	Measurement Uncertainty	Notes
Radiated Emission	9kHz ~ 30MHz	± 4.34dB	(1)
Radiated Emission	30MHz ~ 1000MHz	± 4.24dB	(1)
Radiated Emission	1GHz ~ 40GHz	± 4.68dB	(1)
AC Power Line Conducted Emission	0.15MHz ~ 30MHz	± 3.45dB	(1)
Note (1): The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.			

5 General Information

5.1 General Description of EUT

Product Name:	AUTOMOTIVE DIAGNOSTIC & ANALYSIS SYSTEM
Model No.:	MaxiSys, MaxiSys Pro
Test Model:	MaxiSys
<i>Remark:</i>	<i>Remark: All above models are identical in the same PCB layout, interior structure and electrical circuits. The only difference is the model name for commercial purpose.</i>
Operation Frequency:	802.11a/802.11n(HT20) @5G Band: 5745MHz ~ 5825MHz 802.11n(HT40) @ 5G Band: 5755MHz ~ 5795MHz
Channel numbers:	802.11a/802.11n(HT20) @5G Band: 5 802.11n(HT40) @ 5G Band: 2
Channel bandwidth:	802.11a/802.11n(HT20) @5G Band: 20MHz 802.11n(HT40) @ 5G Band: 40MHz
Modulation technology:	802.11a/802.11g/802.11n(H20)/802.11n(H40): Orthogonal Frequency Division Multiplexing (OFDM)
Antenna Type:	Integral Antenna
Antenna gain:	0.85dBi (declare by Applicant)
Power supply:	Model No.:GFP361DA-1230-1 Input: AC 100~240V~50/60Hz 1.2A Output: DC 12.0V 3.0A DC 3.7V Li-ion Battery

Operation Frequency each of channel @ 5.8G Band							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
149	5745MHz	153	5765MHz	155	5775MHz	157	5785MHz
161	5805MHz	165	5825MHz				

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Test channel	Frequency (MHz)	
	5.8G Band	
	802.11a 802.11n(HT20)	802.11n(HT40)
Lowest channel	5745	5755
Middle channel	5785	
Highest channel	5825	5795

5.2 Test mode

Transmitting mode	Keep the EUT in continuously transmitting mode
<i>Remark: During the test, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, the duty cycle>98%, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.</i>	

We have verified the construction and function in typical operation. All the test modes were carried out with the EUT in transmitting operation, which was shown in this test report and defined as follows:	
Per-scan all kind of data rate in lowest channel, and found the follow list which it was worst case.	
Mode	Data rate
802.11a	6Mbps
802.11n(HT20)	6.5Mbps
802.11n(HT40)	13Mbps
802.11ac(HT20)	6.5Mbps
802.11ac(HT40)	13.5Mbps
802.11ac(HT80)	29.3Mbps

5.3 Description of Support Units

None.

5.4 Test Facility

<p>The test facility is recognized, certified, or accredited by the following organizations:</p> <ul style="list-style-type: none"> ● FCC —Registration No.: 600491 Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files. Registration 600491, June 22, 2016. ● Industry Canada (IC) —Registration No.: 9079A-2 The 3m Semi-anechoic chamber of Global United Technology Services Co., Ltd. Has been Registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 9079A-2, August 15, 2016.

5.5 Test Location

All tests were performed at:
<p>Global United Technology Services Co., Ltd. Address: No. 301-309, 3/F., Jinyuan Business Building, No.2, Laodong Industrial Zone, Xixiang Road, Baoan District, Shenzhen, Guangdong, China Tel: 0755-27798480 Fax: 0755-27798960</p>


6 Test Instruments list

Radiated Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	3m Semi- Anechoic Chamber	ZhongYu Electron	9.2(L)*6.2(W)* 6.4(H)	GTS250	July. 03 2015	July. 02 2020
2	Control Room	ZhongYu Electron	6.2(L)*2.5(W)* 2.4(H)	GTS251	N/A	N/A
3	EMI Test Receiver	Rohde & Schwarz	ESU26	GTS203	June. 29 2016	June. 28 2017
4	Spectrum analyzer	Agilent	E4447A	GTS516	June. 29 2016	June. 28 2017
5	Spectrum Analyzer	Agilent	E4440A	GTS533	June. 29 2016	June. 28 2017
6	BiConiLog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	GTS214	June. 29 2016	June. 28 2017
7	Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	9120D-829	GTS208	June. 29 2016	June. 28 2017
8	Horn Antenna	ETS-LINDGREN	3160	GTS217	June. 29 2016	June. 28 2017
9	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
10	Coaxial Cable	GTS	N/A	GTS213	June. 29 2016	June. 28 2017
11	Coaxial Cable	GTS	N/A	GTS211	June. 29 2016	June. 28 2017
12	Coaxial cable	GTS	N/A	GTS210	June. 29 2016	June. 28 2017
13	Coaxial Cable	GTS	N/A	GTS212	June. 29 2016	June. 28 2017
14	Amplifier(100kHz-3GHz)	HP	8347A	GTS204	June. 29 2016	June. 28 2017
15	Amplifier(2GHz-20GHz)	HP	8349B	GTS206	June. 29 2016	June. 28 2017
16	Amplifier (18-40GHz)	MITEQ	AMF-6F-18004000-29-8P	GTS534	June. 29 2016	June. 28 2017
17	Band filter	Amindeon	82346	GTS219	June. 29 2016	June. 28 2017
18	Constant temperature and humidity box	Oregon Scientific	BA-888	GTS248	June. 29 2016	June. 28 2017
19	D.C. Power Supply	Instek	PS-3030	GTS232	June. 29 2016	June. 28 2017
20	Universal radio communication tester	Rohde & Schwarz	CMU200	GTS235	June. 29 2016	June. 28 2017
21	Splitter	Agilent	11636B	GTS237	June. 29 2016	June. 28 2017
22	Power Meter	Anritsu	ML2495A	GTS540	June. 29 2016	June. 28 2017
23	Power Sensor	Anritsu	MA2411B	GTS541	June. 29 2016	June. 28 2017

Conducted Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Shielding Room	ZhongYu Electron	7.3(L)x3.1(W)x2.9(H)	GTS252	May 16 2014	May 15 2019
2	EMI Test Receiver	R&S	ESCI 7	GTS552	June 29 2016	June 28 2017
3	Pulse Limiter	R&S	ESH3-Z2	GTS224	June 29 2016	June 28 2017
4	Coaxial Switch	ANRITSU CORP	MP59B	GTS225	June 29 2016	June 28 2017
5	Artificial Mains Network	SCHWARZBECK MESS	NSLK8127	GTS226	June 29 2016	June 28 2017
6	Coaxial Cable	GTS	N/A	GTS227	June 29 2016	June 28 2017
7	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
8	Thermo meter	KTJ	TA328	GTS233	June 29 2016	June 28 2017

7 Test results and Measurement Data

7.1 Antenna requirement


Standard requirement:	FCC Part15 C Section 15.203
<p><i>15.203 requirement:</i></p> <p><i>An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</i></p>	
E.U.T Antenna:	
<p><i>The antenna is Integral antenna. The best case gain of the antenna is 0.85Bi.</i></p>	
	

7.2 Conducted Emissions

Test Requirement:	FCC Part15 C Section 15.207														
Test Method:	ANSI C63.10:2013														
Test Frequency Range:	150KHz to 30MHz														
Class / Severity:	Class B														
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto														
Limit:	<table border="1"> <thead> <tr> <th rowspan="2">Frequency range (MHz)</th> <th colspan="2">Limit (dBuV)</th> </tr> <tr> <th>Quasi-peak</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15-0.5</td> <td>66 to 56*</td> <td>56 to 46*</td> </tr> <tr> <td>0.5-5</td> <td>56</td> <td>46</td> </tr> <tr> <td>5-30</td> <td>60</td> <td>50</td> </tr> </tbody> </table> <p>* Decreases with the logarithm of the frequency.</p>	Frequency range (MHz)	Limit (dBuV)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency range (MHz)	Limit (dBuV)														
	Quasi-peak	Average													
0.15-0.5	66 to 56*	56 to 46*													
0.5-5	56	46													
5-30	60	50													
Test setup:	<p><i>Remark</i> E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m</p>														
Test procedure:	<ol style="list-style-type: none"> 1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2013 on conducted measurement. 														
Test Instruments:	Refer to section 6.0 for details														
Test mode:	Refer to section 5.2 for details														
Test results:	Pass														


Measurement data

Line:

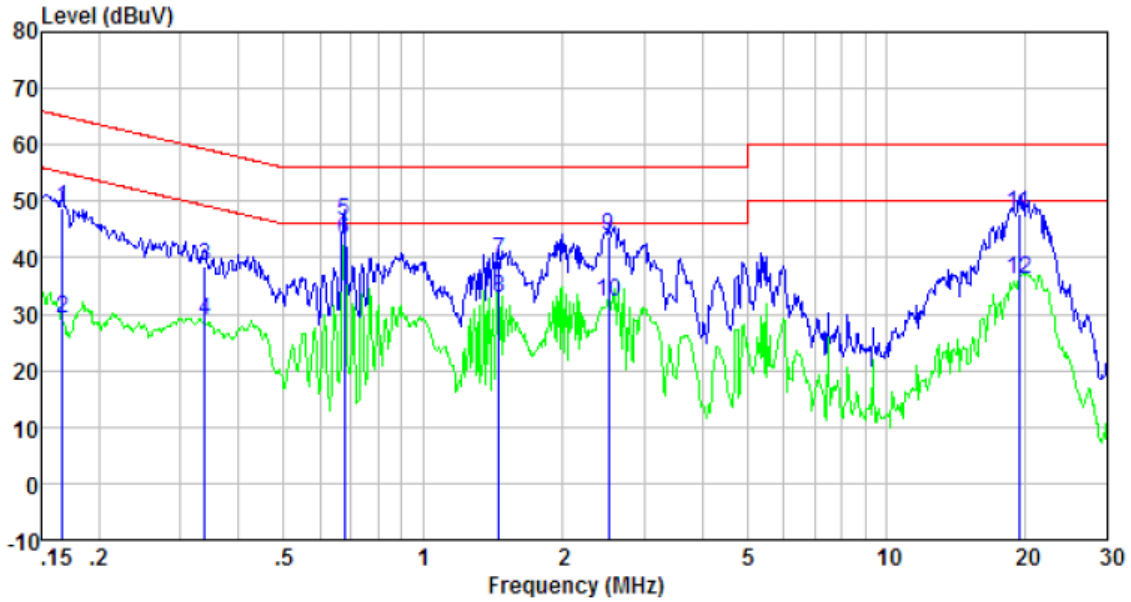

Freq MHz	Reading level dBuV	LISN/ISN factor dB	Cable loss dB	level dBuV	Limit level dBuV	Over limit dB	Remark
0.167	48.12	0.42	0.10	48.64	65.12	-16.48	QP
0.167	28.75	0.42	0.10	29.27	55.12	-25.85	Average
0.337	37.93	0.43	0.10	38.46	59.27	-20.81	QP
0.337	28.42	0.43	0.10	28.95	49.27	-20.32	Average
0.675	45.98	0.29	0.10	46.37	56.00	-9.63	QP
0.675	42.61	0.29	0.10	43.00	46.00	-3.00	Average
1.456	39.06	0.22	0.10	39.38	56.00	-16.62	QP
1.456	32.47	0.22	0.10	32.79	46.00	-13.21	Average
2.513	43.39	0.20	0.10	43.69	56.00	-12.31	QP
2.513	31.92	0.20	0.10	32.22	46.00	-13.78	Average
19.326	47.25	0.29	0.21	47.75	60.00	-12.25	QP
19.326	35.81	0.29	0.21	36.31	50.00	-13.69	Average

Neutral:

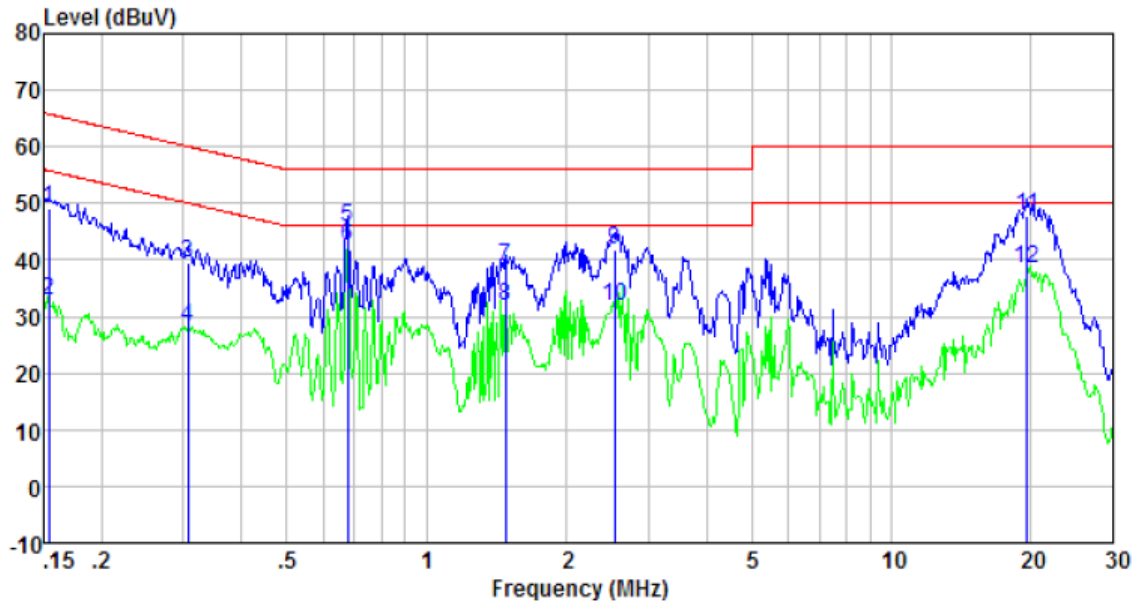


Freq MHz	Reading level dBuV	LISN/ISN factor dB	Cable loss dB	level dBuV	Limit level dBuV	Over limit dB	Remark
0.154	48.54	0.41	0.10	49.05	65.78	-16.73	QP
0.154	32.17	0.41	0.10	32.68	55.78	-23.10	Average
0.307	38.98	0.42	0.10	39.50	60.06	-20.56	QP
0.307	27.54	0.42	0.10	28.06	50.06	-22.00	Average
0.675	45.28	0.25	0.10	45.63	56.00	-10.37	QP
0.675	42.06	0.25	0.10	42.41	46.00	-3.59	Average
1.480	38.43	0.20	0.10	38.73	56.00	-17.27	QP
1.480	31.65	0.20	0.10	31.95	46.00	-14.05	Average
2.540	41.44	0.20	0.10	41.74	56.00	-14.26	QP
2.540	31.46	0.20	0.10	31.76	46.00	-14.24	Average
19.635	47.20	0.31	0.21	47.72	60.00	-12.28	QP
19.635	37.84	0.31	0.21	38.36	50.00	-11.64	Average

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Receiver Read level + LISN Factor + Cable Loss
4. If the average limit is met when using a quasi-peak detector receiver, the EUT shall be deemed to meet both limits and measurement with the average detector receiver is unnecessary.

7.3 Conducted Peak Output Power

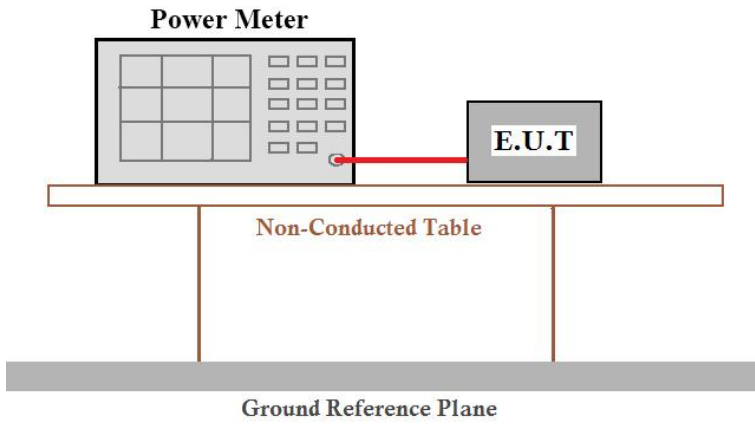
Test Requirement:	FCC Part15 E Section 15.407(a)(3)
Test Method:	ANSI C63.10:2013 and KDB789033 D02 General UNII Test Procedures New Rules v01
Limit:	30dBm
Test setup:	
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

Measurement Data

5.8G Band

Test CH	Peak Output Power (dBm)	Limit(dBm)	Result
	802.11a (HT20)		
Lowest	14.73	30	Pass
Middle	14.67		
Highest	14.86		
Test CH	Peak Output Power (dBm)		
	802.11n (HT20)		
Lowest	15.44		
Middle	15.73		
Highest	15.08		
Test CH	Peak Output Power (dBm)		
	802.11n (HT40)		
Lowest	15.49		
Highest	15.84		

7.4 Channel Bandwidth

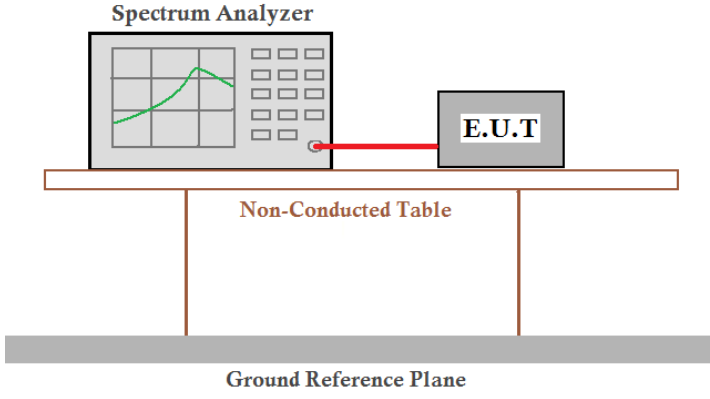
Test Requirement:	FCC Part15 E Section 15.407(e)
Test Method:	KDB789033 D02 General UNII Test Procedures New Rules v01
Limit:	>500KHz
Test setup:	 <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both are placed on a Non-Conducted Table, which is supported by a Ground Reference Plane.</p>
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

Measurement Data


5.8G Band					
Test CH	Channel Bandwidth (MHz)			Limit (KHz)	Result
	802.11a	802.11n(HT20)	802.11n(HT40)		
Lowest	16.584	17.823	36.576	>500	Pass
Middle	16.603	17.794	N/A		
Highest	16.567	17.776	36.584		

Test plot as follows:


Test mode: 802.11a

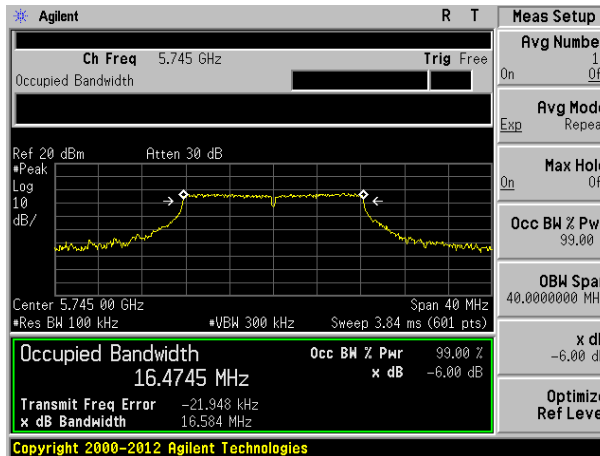

Lowest channel

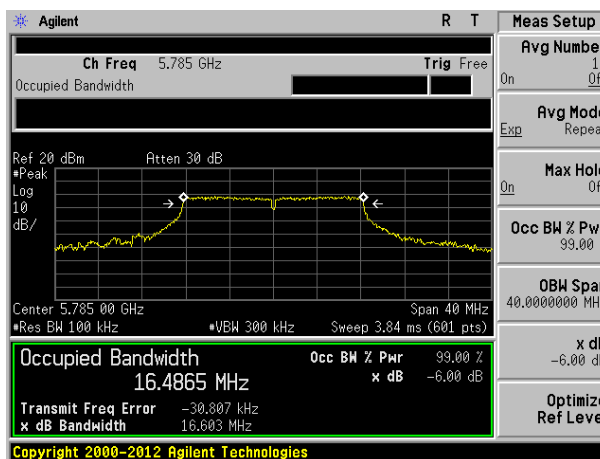


Middle channel

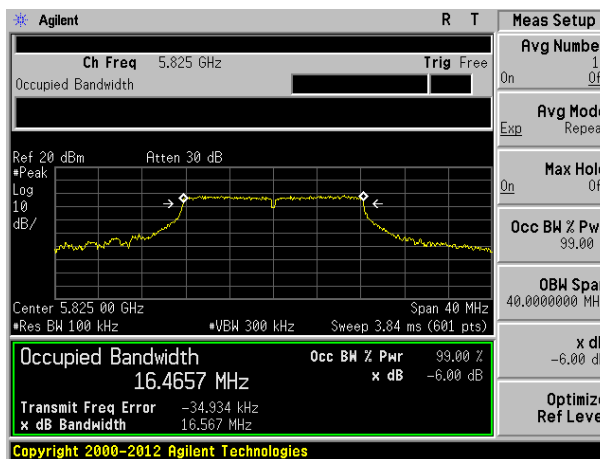


Highest channel


Test mode: 802.11n(HT20) @ 5.8G Band

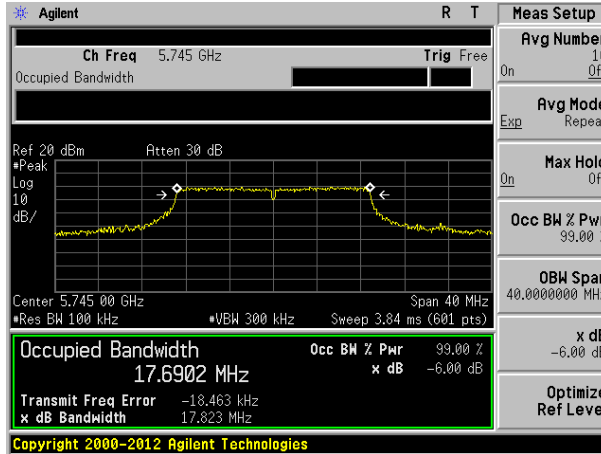

Lowest channel

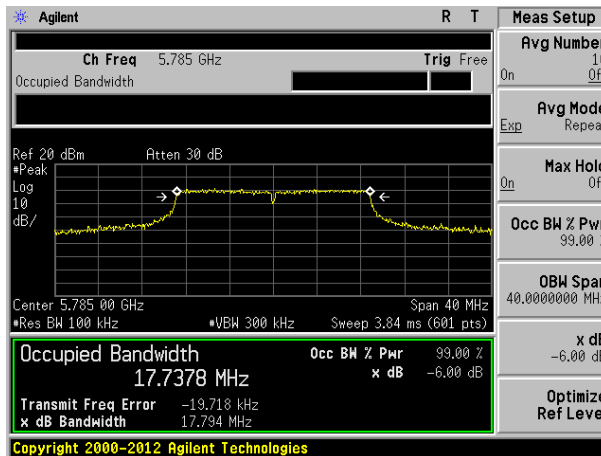


Middle channel

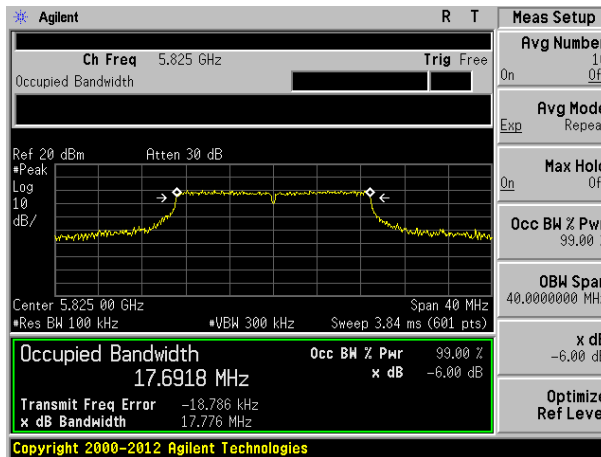


Highest channel

Test mode: 802.11n(HT40) @ 5.8G Band

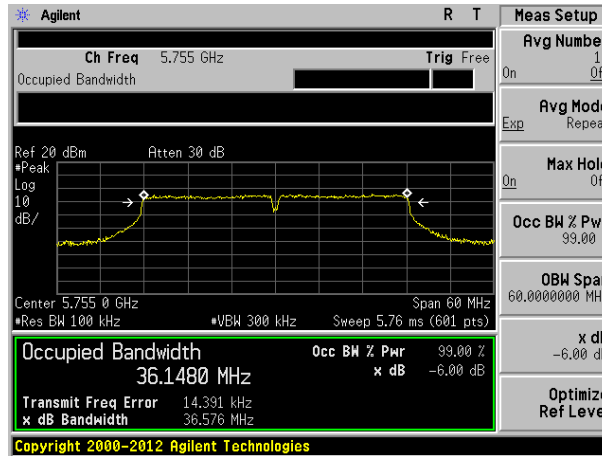


Lowest channel

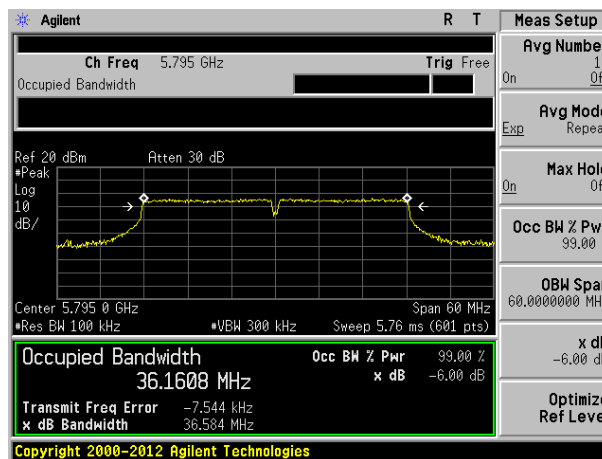

Highest channel

7.5 Power Spectral Density

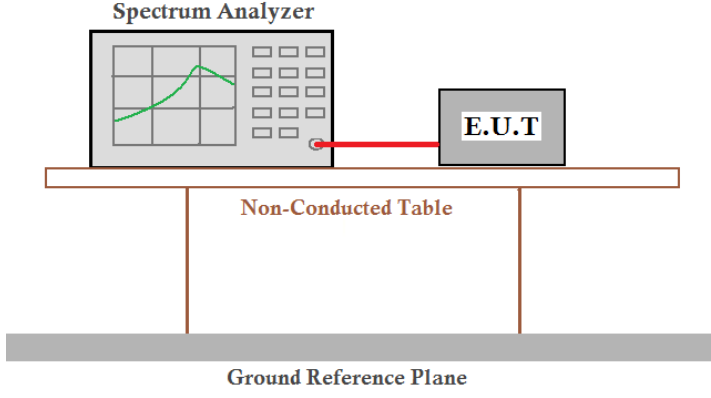
Test Requirement:	FCC Part15 E Section 15.407(a)(3)
Test Method:	KDB789033 D02 General UNII Test Procedures New Rules v01
Limit:	30dBm/500KHz
Test setup:	 <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both are placed on a Non-Conducted Table, which is supported by a Ground Reference Plane.</p>
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

Measurement Data


Test mode	Channel	Measured PSD (dBm)	Limit	Result
802.11a (HT20)	Lowest	3.66	30dBm/500K Hz	Pass
	Middle	6.09		
	Highest	4.28		
802.11n (HT20)	Lowest	6.45		
	Middle	6.16		
	Highest	6.96		
802.11n (HT40)	Lowest	1.39		
	Highest	2.88		

Test plot as follows:


Test mode:	802.11a
------------	---------

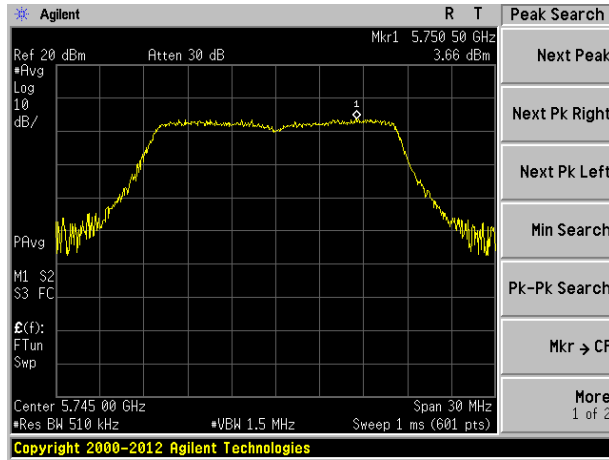

Lowest channel

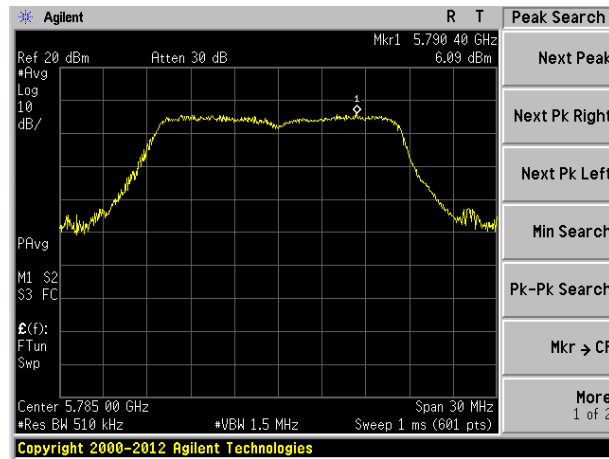


Middle channel

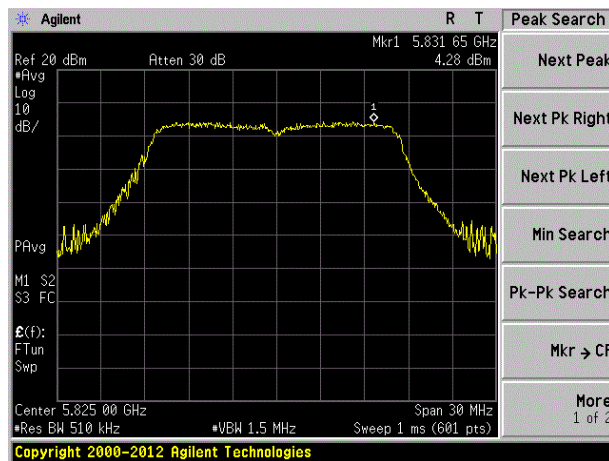


Highest channel


Test mode: 802.11n(HT20) @ 5.8G Band

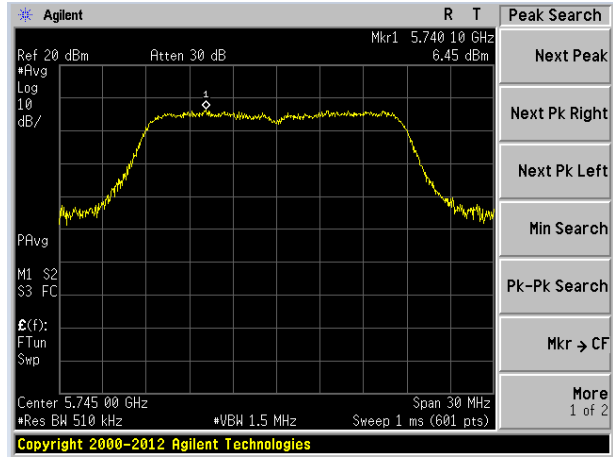

Lowest channel

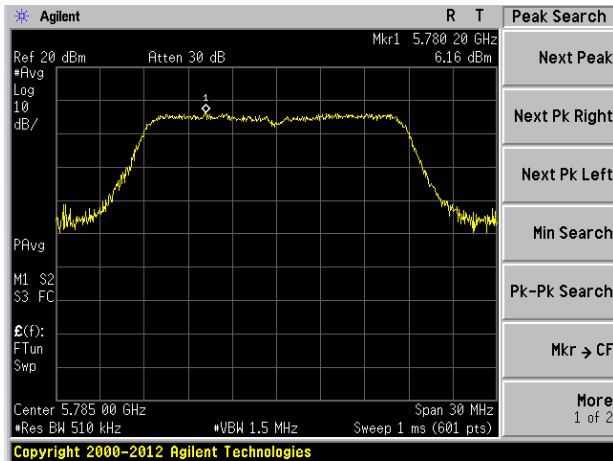


Middle channel

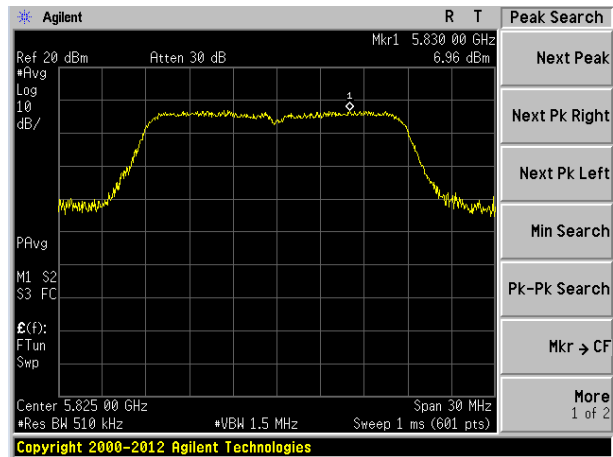


Highest channel

Test mode: 802.11n(HT40) @ 5.8G Band

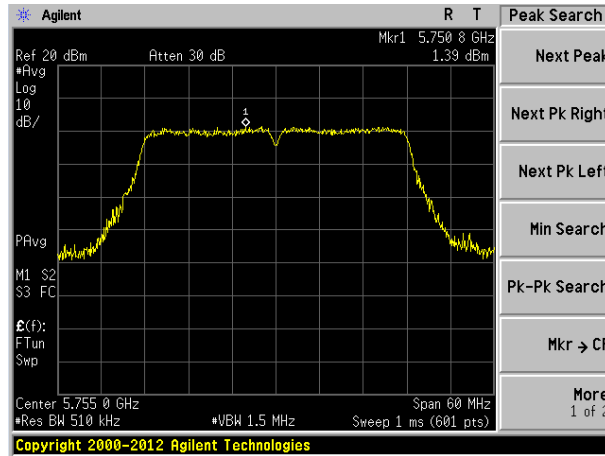


Lowest channel

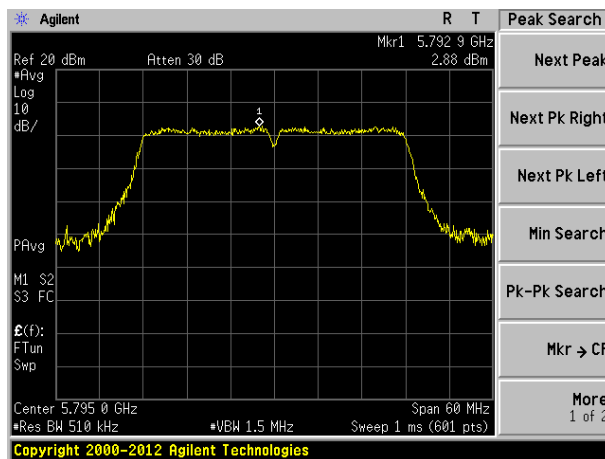

Highest channel

7.6 Band edges

7.6.1 Radiated Emission Method

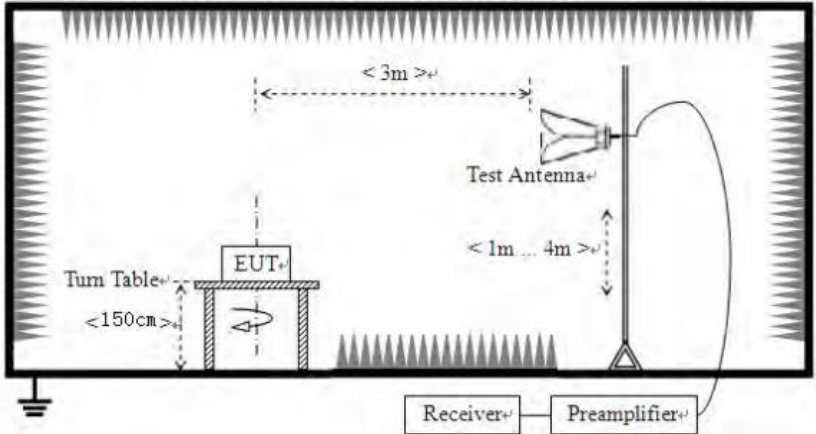Test Requirement:	FCC Part15 C Section 15.209 and 15.205				
Test Method:	ANSI C63.10: 2013				
Test Frequency Range:	30MHz to 40GHz, only worse case is reported				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	Above 1GHz	Peak	1MHz	3MHz	Peak
Limit:	All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.				
Test setup:					
Test Procedure:	<ol style="list-style-type: none"> 1. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not 				

	<p>have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</p> <p>7. The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, only the test worst case mode is recorded in the report.</p>
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

Measurement data:

Remark: The pre-test were performed on lowest, middle and highest frequencies, only the worst case's (lowest and highest frequencies) data was showed.

Remark:

According to KDB 789033 D02V01 section G) 1) (d), for For measurements above 1000 MHz @ 3m distance, the limit of field strength is computed as follows:

$$E[\text{dBuV/m}] = \text{EIRP}[\text{dBm}] + 95.2;$$

For example, if EIRP = -27dBm

$$E[\text{dBuV/m}] = -27 + 95.2 = 68.2\text{dBuV/m}.$$

Test mode:		802.11a(HT20)			Test channel:		Lowest		
Peak value:									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	
5725.00	46.74	32.53	9.83	32.29	56.81	68.20	-11.39	Horizontal	
5725.00	44.36	32.53	9.83	32.29	54.43	68.20	-13.77	Vertical	
RMS value:									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	
5725.00	34.00	32.53	9.83	32.29	44.07	54.00	-9.93	Horizontal	
5725.00	32.53	32.53	9.83	32.29	42.60	54.00	-11.40	Vertical	
Test mode:		802.11a(HT20)			Test channel:		Highest		
Peak value:									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	
5850.00	47.38	32.70	9.99	32.22	57.85	68.20	-10.35	Horizontal	
5850.00	46.97	32.70	9.99	32.22	57.44	68.20	-10.76	Vertical	
RMS value:									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	
5850.00	35.03	32.70	9.99	32.22	45.50	54.00	-8.50	Horizontal	
5850.00	34.75	32.70	9.99	32.22	45.22	54.00	-8.78	Vertical	

Test mode:		802.11n(HT20)			Test channel:		Lowest	
Peak value:								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5725.00	47.88	32.53	9.83	32.29	57.95	68.20	-10.25	Horizontal
5725.00	46.62	32.53	9.83	32.29	56.69	68.20	-11.51	Vertical
RMS value:								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5725.00	33.54	32.53	9.83	32.29	43.61	54.00	-10.39	Horizontal
5725.00	35.41	32.53	9.83	32.29	45.48	54.00	-8.52	Vertical
Test mode:		802.11n(HT20)			Test channel:		Highest	
Peak value:								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5850.00	46.65	32.70	9.99	32.22	57.12	68.20	-11.08	Horizontal
5850.00	44.79	32.70	9.99	32.22	55.26	68.20	-12.94	Vertical
RMS value:								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5850.00	32.74	32.70	9.99	32.22	43.21	54.00	-10.79	Horizontal
5850.00	33.83	32.70	9.99	32.22	44.30	54.00	-9.70	Vertical

Test mode:		802.11n(HT40)			Test channel:		Lowest	
Peak value:								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5725.00	48.03	32.53	9.83	32.29	58.10	68.20	-10.10	Horizontal
5725.00	46.72	32.53	9.83	32.29	56.79	68.20	-11.41	Vertical
RMS value:								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5725.00	36.34	32.53	9.83	32.29	46.41	54.00	-7.59	Horizontal
5725.00	34.86	32.53	9.83	32.29	44.93	54.00	-9.07	Vertical
Test mode:		802.11n(HT40)			Test channel:		Highest	
Peak value:								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5850.00	47.56	32.70	9.99	32.22	57.94	68.20	-10.26	Horizontal
5850.00	48.41	32.70	9.99	32.22	58.79	68.20	-9.41	Vertical
RMS value:								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5850.00	35.41	32.70	9.99	32.22	45.88	54.00	-8.12	Horizontal
5850.00	36.08	32.70	9.99	32.22	46.55	54.00	-7.45	Vertical

Remark:

1. *Final Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor*
2. *The emission levels of other frequencies are very lower than the limit and not show in test report.*

7.7 Spurious Emission

7.7.1 Radiated Emission Method

Test Requirement:	FCC Part15 C Section 15.209, Part 15E Section 15.407(b)(4)				
Test Method:	ANSI C63.10:2013				
Test Frequency Range:	30MHz to 40GHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak Value
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
		Peak	1MHz	3MHz	RMS Value
Limit:	Frequency	Limit (dBuV/m @3m)			Remark
	30MHz-88MHz	40.0			Quasi-peak Value
	88MHz-216MHz	43.5			Quasi-peak Value
	216MHz-960MHz	46.0			Quasi-peak Value
	Above 960MHz	54.0			Quasi-peak Value
	Above 1000MHz	74.0			Peak Value
	Above 1000MHz	54.0			Average Value
Test setup:	Below 1GHz				
	<p>The diagram illustrates the test setup for frequencies below 1GHz. It shows an Equipment Under Test (EUT) placed on a turn table, which is 80cm above the ground. A test antenna is positioned 3m away from the EUT and at a height of 1m to 4m. The antenna is connected to a preamplifier and then a receiver. The entire setup is enclosed in a shielded chamber.</p>				
	Above 1GHz				

	<p>The diagram illustrates the test setup within an anechoic chamber. An EUT (Equipment Under Test) is placed on a rotating table with a height of approximately 150 cm. The table is rotated 360 degrees. A test antenna is mounted on a variable-height antenna tower, positioned 3 meters away from the EUT. The antenna height is adjustable from 1 meter to 4 meters. The antenna is connected to a receiver and preamplifier system. The chamber walls are lined with absorbers to eliminate reflections.</p>
<p>Test Procedure:</p>	<ol style="list-style-type: none"> 1. The EUT was placed on the top of a rotating table (0.8m for below 1GHz and 1.5 meters for above 1GHz) above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. 7. The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, only the test worst case mode is recorded in the report.
<p>Test Instruments:</p>	<p>Refer to section 6.0 for details</p>
<p>Test mode:</p>	<p>Refer to section 5.2 for details</p>
<p>Test results:</p>	<p>Pass</p>

Measurement Data

■ Below 1GHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
35.25	47.06	14.39	0.61	30.07	31.99	40.00	-8.01	Vertical
78.97	44.80	10.43	1.02	29.80	26.45	40.00	-13.55	Vertical
127.22	47.14	11.32	1.41	29.53	30.34	43.50	-13.16	Vertical
211.53	41.04	12.93	1.91	29.31	26.57	43.50	-16.93	Vertical
383.93	39.64	16.68	2.78	29.57	29.53	46.00	-16.47	Vertical
599.32	41.41	20.45	3.72	29.30	36.28	46.00	-9.72	Vertical
55.81	42.80	14.97	0.82	29.95	28.64	40.00	-11.36	Horizontal
104.17	35.07	14.78	1.23	29.67	21.41	43.50	-22.09	Horizontal
209.31	43.17	12.87	1.89	29.29	28.64	43.50	-14.86	Horizontal
317.70	38.17	15.31	2.45	29.90	26.03	46.00	-19.97	Horizontal
389.36	49.17	16.83	2.80	29.55	39.25	46.00	-6.75	Horizontal
513.63	47.32	18.89	3.36	29.30	40.27	46.00	-5.73	Horizontal

Above 1GHz:

802.11a(HT20) 5745MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11490.00	28.06	39.85	14.98	34.60	48.29	74.00	-25.71	Vertical
17235.00	28.25	45.51	18.98	33.95	58.79	74.00	-15.21	Vertical
11490.00	29.70	39.85	14.98	34.60	49.93	74.00	-24.07	Horizontal
17235.00	29.52	45.51	18.98	33.95	60.06	74.00	-13.94	Horizontal
11490.00	22.63	39.85	14.98	34.60	42.86	54.00	-11.14	Vertical
17235.00	18.18	45.51	18.98	33.95	48.72	54.00	-5.28	Vertical
11490.00	20.21	39.85	14.98	34.60	40.44	54.00	-13.56	Horizontal
17235.00	17.16	45.51	18.98	33.95	47.70	54.00	-6.30	Horizontal

802.11a(HT20) 5785MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11570.00	30.95	39.76	14.99	34.75	50.95	74.00	-23.05	Vertical
17355.00	28.94	46.19	18.98	34.45	59.66	74.00	-14.34	Vertical
11570.00	28.70	39.76	14.99	34.75	48.70	74.00	-25.30	Horizontal
17355.00	28.17	46.19	18.98	34.45	58.89	74.00	-15.11	Horizontal
11570.00	21.03	39.76	14.99	34.75	41.03	54.00	-12.97	Vertical
17355.00	18.64	46.19	18.98	34.45	49.36	54.00	-4.64	Vertical
11570.00	20.57	39.76	14.99	34.75	40.57	54.00	-13.43	Horizontal
17355.00	17.48	46.19	18.98	34.45	48.20	54.00	-5.80	Horizontal

802.11a(HT20) 5825MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11650.00	28.67	39.61	14.99	34.86	48.41	74.00	-25.59	Vertical
17475.00	30.62	46.78	18.97	34.95	61.42	74.00	-12.59	Vertical
11650.00	29.33	39.61	14.99	34.86	49.07	74.00	-24.93	Horizontal
17475.00	30.15	46.78	18.97	34.95	60.95	74.00	-13.05	Horizontal
11650.00	21.53	39.61	14.99	34.86	41.27	54.00	-12.73	Vertical
17475.00	19.00	46.78	18.97	34.95	49.80	54.00	-4.20	Vertical
11650.00	21.34	39.61	14.99	34.86	41.08	54.00	-12.92	Horizontal
17475.00	17.01	46.78	18.97	34.95	47.81	54.00	-6.19	Horizontal

802.11n(HT20) 5745MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11490.00	28.83	39.85	14.98	34.60	49.06	74.00	-24.94	Vertical
17235.00	28.44	45.51	18.98	33.95	58.98	74.00	-15.02	Vertical
11490.00	29.56	39.85	14.98	34.60	49.79	74.00	-24.21	Horizontal
17235.00	29.30	45.51	18.98	33.95	59.84	74.00	-14.16	Horizontal
11490.00	21.13	39.85	14.98	34.60	41.36	54.00	-12.64	Vertical
17235.00	17.57	45.51	18.98	33.95	48.11	54.00	-5.89	Vertical
11490.00	20.83	39.85	14.98	34.60	41.06	54.00	-12.94	Horizontal
17235.00	19.58	45.51	18.98	33.95	50.12	54.00	-3.88	Horizontal

802.11n(HT20) 5785MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11570.00	29.06	39.76	14.99	34.75	49.06	74.00	-24.94	Vertical
17355.00	28.12	46.19	18.98	34.45	58.84	74.00	-15.16	Vertical
11570.00	29.95	39.76	14.99	34.75	49.95	74.00	-24.05	Horizontal
17355.00	30.89	46.19	18.98	34.45	61.61	74.00	-12.39	Horizontal
11570.00	22.21	39.76	14.99	34.75	42.21	54.00	-11.79	Vertical
17355.00	16.82	46.19	18.98	34.45	47.54	54.00	-6.46	Vertical
11570.00	21.94	39.76	14.99	34.75	41.94	54.00	-12.06	Horizontal
17355.00	18.61	46.19	18.98	34.45	49.33	54.00	-4.67	Horizontal

802.11n(HT20) 5825MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11650.00	29.35	39.61	14.99	34.86	49.09	74.00	-24.91	Vertical
17475.00	30.47	46.78	18.97	34.95	61.27	74.00	-12.73	Vertical
11650.00	28.84	39.61	14.99	34.86	48.58	74.00	-25.42	Horizontal
17475.00	28.32	46.78	18.97	34.95	59.12	74.00	-14.88	Horizontal
11650.00	21.28	39.61	14.99	34.86	41.02	54.00	-12.98	Vertical
17475.00	17.67	46.78	18.97	34.95	48.47	54.00	-6.46	Vertical
11650.00	22.09	39.61	14.99	34.86	41.83	54.00	-12.06	Horizontal
17475.00	19.37	46.78	18.97	34.95	50.17	54.00	-3.83	Horizontal

802.11n(HT40) 5755MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11510.00	28.83	39.85	14.98	34.63	49.03	74.00	-24.97	Vertical
17265.00	30.47	45.51	18.98	34.09	60.87	74.00	-13.13	Vertical
11510.00	28.18	39.85	14.98	34.63	48.38	74.00	-25.62	Horizontal
17265.00	30.92	45.51	18.98	34.09	61.32	74.00	-12.69	Horizontal
11510.00	20.24	39.85	14.98	34.63	40.44	54.00	-13.56	Vertical
17265.00	17.70	45.51	18.98	34.09	48.10	54.00	-5.90	Vertical
11510.00	20.69	39.85	14.98	34.63	40.89	54.00	-13.11	Horizontal
17265.00	19.44	45.51	18.98	34.09	49.84	54.00	-4.16	Horizontal


802.11n(HT40) 5795MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11590.00	28.80	39.71	14.99	34.78	48.72	74.00	-25.28	Vertical
17385.00	30.08	46.49	18.98	34.59	60.96	74.00	-13.04	Vertical
11590.00	30.75	39.71	14.99	34.78	50.67	74.00	-23.33	Horizontal
17385.00	29.73	46.49	18.98	34.59	60.61	74.00	-13.39	Horizontal
11590.00	22.35	39.71	14.99	34.78	42.27	54.00	-11.73	Vertical
17385.00	18.00	46.49	18.98	34.59	48.88	54.00	-5.12	Vertical
11590.00	21.24	39.71	14.99	34.78	41.16	54.00	-12.84	Horizontal
17385.00	18.47	46.49	18.98	34.59	49.35	54.00	-4.65	Horizontal

Note:

1. Level = Read Level + Antenna Factor+ Cable loss- Preamp Factor.
2. The test trace is same as the ambient noise (the test frequency range: 18GHz~40GHz), therefore no data appear in the report.

7.8 Frequency stability

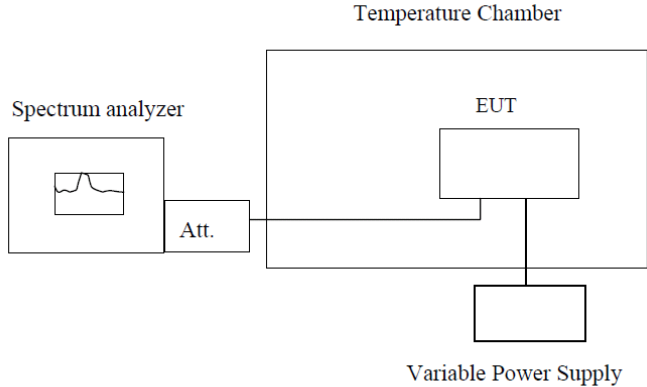Test Requirement:	FCC Part15 C Section 15.407(g)
Test Method:	ANSI C63.10:2013, FCC Part 2.1055
Limit:	Manufactures of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified
Test Procedure:	The EUT was setup to ANSI C63.4, 2003; tested to 2.1055 for compliance to FCC Part 15.407(g) requirements.
Test setup:	 <p style="text-align: center;">Note : Measurement setup for testing on Antenna connector</p>
Test Instruments:	Refer to section 5.10 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

Measurement data:

Frequency stability versus Temp.					
Power Supply: DC 3.7V					
Temp. (°C)	Operating Frequency (MHz)	0 minute	2 minute	5 minute	10 minute
		Measured Frequency (MHz)	Measured Frequency (MHz)	Measured Frequency (MHz)	Measured Frequency (MHz)
-30	5745	5743.0333	5744.1556	5744.2613	5743.3041
	5785	5784.1201	5783.3088	5783.2664	5782.7812
	5825	5823.8526	5824.1625	5822.2227	5822.8056
-20	5745	5744.7299	5743.4057	5744.7047	5744.6214
	5785	5783.0067	5784.1940	5784.3845	5784.5720
	5825	5824.7684	5823.1323	5824.7691	5824.8299
-10	5745	5743.8662	5743.7967	5744.9488	5744.9848
	5785	5784.8448	5783.7267	5784.0480	5784.7969
	5825	5824.9480	5824.5123	5824.9075	5824.0742
0	5745	5743.3776	5743.7060	5744.3406	5744.9140
	5785	5783.0715	5784.6229	5784.3416	5783.7054
	5825	5823.0033	5824.8055	5824.8000	5824.0733
10	5745	5744.5459	5743.4945	5744.5218	5744.5160
	5785	5784.8936	5783.0098	5784.3532	5784.3318
	5825	5823.6037	5823.9313	5824.1110	5824.9953
20	5745	5744.9410	5744.2743	5744.6371	5744.9431
	5785	5784.4691	5783.6755	5784.7238	5783.9856
	5825	5824.6210	5823.8166	5824.8046	5824.3259
30	5745	5743.8383	5743.1869	5744.0249	5744.8932
	5785	5784.5497	5784.6526	5783.4290	5783.1087
	5825	5823.6334	5824.0741	5823.7204	5823.9118
40	5745	5744.2785	5744.2952	5743.8820	5744.2352
	5785	5784.4654	5784.2599	5784.2623	5784.0802
	5825	5824.7652	5824.3493	5824.2001	5824.8649
50	5745	5743.8188	5744.5067	5744.0265	5743.7614
	5785	5783.7339	5783.2345	5784.0107	5784.4315
	5825	5823.7479	5824.7577	5824.0267	5824.9885



Note: The worst case is FL=5743.0333MHz, FH=5824.0742MHz

Frequency stability versus Voltage					
Temperature: 25°C					
Power Supply (VDC)	Operating Frequency (MHz)	0 minute	2 minute	5 minute	10 minute
		Measured Frequency (MHz)	Measured Frequency (MHz)	Measured Frequency (MHz)	Measured Frequency (MHz)
3.3	5745	5744.7460	5744.3696	5744.9550	5744.5700
	5785	5784.2273	5784.7881	5783.7133	5784.6475
	5825	5823.6214	5824.3046	5824.6056	5824.8272
3.7	5745	5744.4597	5744.5155	5743.2279	5743.8474
	5785	5783.2630	5783.1581	5784.5639	5783.5271
	5825	5823.4312	5824.2821	5823.8535	5824.4484
4.1	5745	5743.7509	5743.4244	5744.6991	5744.7393
	5785	5784.2143	5783.0291	5784.3245	5784.9476
	5825	5824.1934	5824.8501	5824.2599	5824.9493

Note: The worst case is FL=5744.7460MHz, FH=5824.9493MHz

8 Test Setup Photo

Radiated Emission

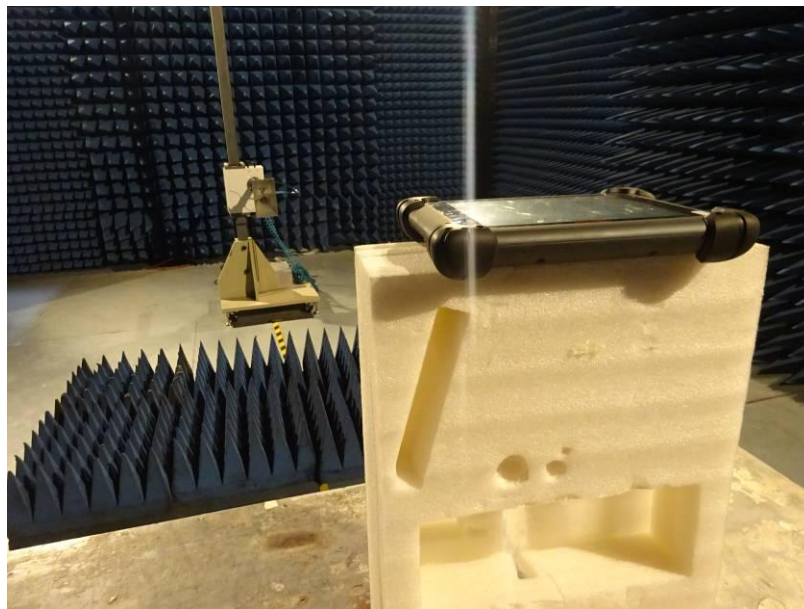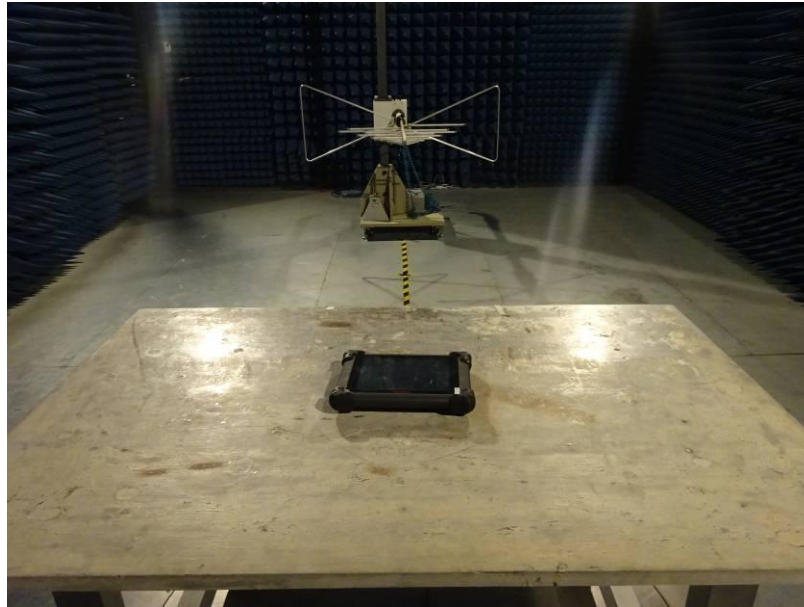

Conducted Emission



9 EUT Constructional Details

Reference to the test report No. GTS201612000141F01

-----END-----