

FCC TEST REPORT

For

Autel Intelligent Technology Corp., Ltd.

AUTOMOTIVE DIAGNOSTIC & ANALYSIS SYSTEM

Model No.: MaxiSys MS908, MaxiSys MS908PRO, MaxiSys MS908CV, MaxiSys CV

Prepared For : Autel Intelligent Technology Corp., Ltd.
Address : 6th - 10th Floor, Bldg. B1, Zhiyuan, Xueyuan Rd., Xili, Nanshan,
Shenzhen, 518055, China

Prepared By : Shenzhen Anbotek Compliance Laboratory Limited
Address : 1/F., Building 1, SEC Industrial Park, No.0409 Qianhai Road, Nanshan
District, Shenzhen, Guangdong, China
Tel: (86) 755-26066544 Fax: (86) 755-26014772

Report Number : R0217100096W4
Date of Test : Oct. 11~Nov. 13, 2017
Date of Report : Dec. 02, 2017

Contents

1. General Information.....	4
1.1. Client Information.....	4
1.2. Description of Device (EUT).....	4
1.3. Auxiliary Equipment Used During Test.....	4
1.4. Description of Test Modes.....	5
1.5. List of channels.....	6
1.6. Description Of Test Setup.....	7
1.7. Test Equipment List.....	8
1.8. Measurement Uncertainty.....	9
1.9. Description of Test Facility.....	9
2. Summary of Test Results.....	10
3. Conducted Emission Test.....	11
3.1. Test Standard and Limit.....	11
3.2. Test Setup.....	11
3.3. Test Procedure.....	11
3.4. Test Data.....	11
4. Radiation Spurious Emission and Band Edge.....	16
4.1. Test Standard and Limit.....	16
4.2. Test Setup.....	17
4.3. Test Procedure.....	18
4.4. Test Data.....	19
5. Maximum Peak Output Power Test.....	31
5.1. Test Standard and Limit.....	31
5.2. Test Setup.....	31
5.3. Test Procedure.....	31
5.4. Test Data.....	31
6. Occupy Bandwidth Test.....	33
6.1. Test Standard.....	33
6.2. Test Setup.....	33
6.3. Test Procedure.....	33
6.4. Test Data.....	33
7. Power Spectral Density Test.....	43
7.1. Test Standard and Limit.....	43
7.2. Test Setup.....	43
7.3. Test Procedure.....	43
7.4. Test Data.....	43
8. Antenna Requirement.....	49
8.1. Test Standard and Requirement.....	49
8.2. Antenna Connected Construction.....	50
APPENDIX I -- TEST SETUP PHOTOGRAPH.....	51
APPENDIX II -- EXTERNAL PHOTOGRAPH.....	52
APPENDIX III -- INTERNAL PHOTOGRAPH.....	53

TEST REPORT

Applicant : Autel Intelligent Technology Corp., Ltd.
Manufacturer : Autel Intelligent Technology Corp., Ltd.
Product Name : AUTOMOTIVE DIAGNOSTIC & ANALYSIS SYSTEM
Model No. : MaxiSys MS908, MaxiSys MS908PRO, MaxiSys MS908CV, MaxiSys CV
Trade Mark : Autel
Rating(s) : Input: DC 12V, 3A with DC 3.7V, 10000 mAh Battery inside

Test Standard(s) : FCC Part15 Subpart C 2017, Paragraph 15.407
ANSI C63.10: 2013
Test Method(s) : KDB 789033 D02 General UNII Test Procedures New Rules v01r04

The device described above is tested by Shenzhen Anbotek Compliance Laboratory Limited to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and Shenzhen Anbotek Compliance Laboratory Limited is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with the FCC Part 15 Subpart E requirements.

This report applies to above tested sample only and shall not be reproduced in part without written approval of Shenzhen Anbotek Compliance Laboratory Limited.

Date of Test : Oct. 11~Nov. 13, 2017

Prepared by :



Winkey Wang

(Tested Engineer / Winkey Wang)

Reviewer :

Tangcy. T.

(Project Manager / Tangcy. T)

Approved & Authorized Signer :

Tom Chen

(Manager / Tom Chen)

1. General Information

1.1. Client Information

Applicant	:	Autel Intelligent Technology Corp., Ltd.
Address	:	6th - 10th Floor, Bldg. B1, Zhiyuan, Xueyuan Rd.,Xili, Nanshan, Shenzhen, 518055, China
Manufacturer	:	Autel Intelligent Technology Corp., Ltd.
Address	:	6th - 10th Floor, Bldg. B1, Zhiyuan, Xueyuan Rd.,Xili, Nanshan, Shenzhen, 518055, China

1.2. Description of Device (EUT)

Product Name	:	AUTOMOTIVE DIAGNOSTIC & ANALYSIS SYSTEM	
Model No.	:	MaxiSys MS908, MaxiSys MS908PRO, MaxiSys MS908CV, MaxiSys CV (Note: All samples are the same except the model number and Colour, so we prepare "MaxiSys MS908" for test only.)	
Trade Mark	:	Autel	
Test Power Supply	:	AC 120V, 60Hz for adapter/AC 240V, 60Hz for adapter DC 3.7V Battery inside	
Product Description	:	Operation Frequency:	WIFI 5G: 5745MHz~5825MHz / 5755MHz~5795MHz/ 5775MHz
		Number of Channel:	WIFI 5G: 5 Channels for 802.11a 5 Channels for 802.11n(HT20) 2 Channels for 802.11n(HT40)
		Modulation Type:	OFDM with BPSK/QPSK/16QAM/64QAM for 802.11a/n;
		Antenna Type:	PIFA Antenna
		Antenna Gain(Peak):	0.85 dBi

Remark: 1) For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.
 2) This report is for WIFI 5.8G.

1.3. Auxiliary Equipment Used During Test

Adapter	:	Model: GME36A-120300FDS Input: 100-240V~50-60Hz, 1.2A Output: 12V, 3A
---------	---	---

1.4. Description of Test Modes

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Mode	Test channel	Frequency (MHz)
OFDM(802.11a/n20)	CH 149	5745MHz
	CH 157	5785MHz
	CH 165	5825MHz
OFDM(802.11n40)	CH 151	5755MHz
	CH159	5795MHz

Note:

1. The measurements are performed at the highest, middle, lowest available channels.
2. The EUT has been tested as an independent unit. And Continual Transmitting in maximum power.
3. For the relevant Conducted Measurement, the temporary antenna connector is used during the measurement. Antenna Connector Impedance: 50 Ω , Cable Loss: 1.0 dB
4. The EUT was programmed to be in continuously transmitting mode and the transmit duty cycle is more than 98%

1.5. List of channels

802.11a/n20

Channel	Freq. (MHz)	Channel	Freq. (MHz)
149	5745	153	5765
157	5785	161	5805
165	5825		


802.11n40

Channel	Freq. (MHz)	Channel	Freq. (MHz)
151	5755	159	5795


Anbotek

1.6. Description Of Test Setup

CE

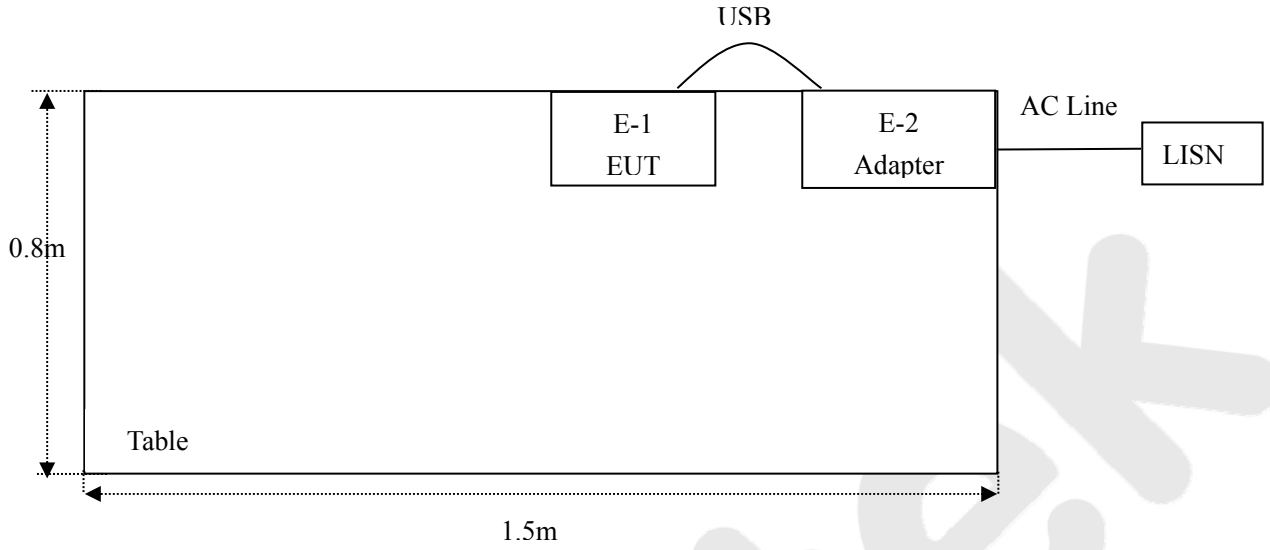

RE

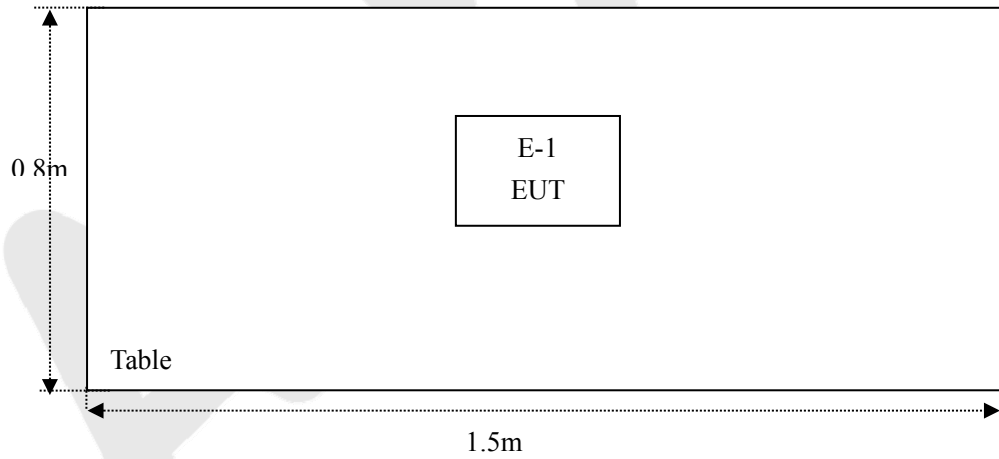

1.7. Test Equipment List

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	L.I.S.N. Artificial Mains Network	Rohde & Schwarz	ENV216	100055	May 27, 2017	1 Year
2.	EMI Test Receiver	Rohde & Schwarz	ESCI	100627	May 27, 2017	1 Year
3.	RF Switching Unit	Compliance Direction	RSU-M2	38303	May 27, 2017	1 Year
4.	Spectrum Analysis	Agilent	E4407B	US39390582	May 27, 2017	1 Year
5.	Spectrum Analysis	Agilent	N9038A	MY53227295	May 27, 2017	1 Year
6.	Preamplifier	SKET Electronic	BK1G18G30 D	KD17503	May 27, 2017	1 Year
7.	EMI Test Receiver	Rohde & Schwarz	ESPI	101604	May 27, 2017	1 Year
8.	Double Ridged Horn Antenna	Instruments corporation	GTH-0118	351600	May 31, 2017	1 Year
9.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	VULB 9163-289	May 31, 2017	1 Year
10.	Loop Antenna	Schwarzbeck	HFH2-Z2	100047	Apr. 03, 2017	1 Year
11.	Horn Antenna	Schwarzbeck	BBHA9170	9170-375	May 27, 2017	1 Year
12.	Pre-amplifier	SONOMA	310N	186860	May 27, 2017	1 Year
13.	Pre-amplifier	SKET Electronic	BK1G40G50 A	KD25352	May 27, 2017	1 Year
14.	EMI Test Software EZ-EMC	SHURPLE	N/A	N/A	N/A	N/A
15.	Power Sensor	DAER	RPR3006W	15I00041SN045	May 27, 2017	1 Year
16.	Power Sensor	DAER	RPR3006W	15I00041SN046	May 27, 2017	1 Year
17.	MXA Spectrum Analysis	Agilent	N9020A	MY51170037	May 27, 2017	1 Year
18.	MXG RF Vector Signal Generator	Agilent	N5182A	MY48180656	May 27, 2017	1 Year
19.	Signal Generator	Agilent	E4421B	MY41000743	May 27, 2017	1 Year
20.	DC Power supply	IVYTECH	IV6003	1601D6030007	May 26, 2017	1 Year
21.	TEMP&HUMI PROGRAMMABLE CHAMBER	Sertep	ZJ-HWHS80 B	ZJ-17042804	Mar. 03, 2017	1 Year

1.8. Measurement Uncertainty

Radiation Uncertainty	:	Ur = 4.1 dB (Horizontal)
		Ur = 4.3 dB (Vertical)
Conduction Uncertainty	:	Uc = 3.4dB

1.9. Description of Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC-Registration No.: 184111

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No. 184111, July 31, 2017.

ISED-Registration No.: 8058A-1

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (ISED) Innovation, Science and Economic Development Canada. The acceptance letter from the ISED is maintained in our files. Registration 8058A-1, June 13, 2016.

Test Location

All Emissions tests were performed at
Shenzhen Anbotek Compliance Laboratory Limited. at 1/F., Building 1, SEC Industrial Park, No.0409 Qianhai Road, Nanshan District, Shenzhen, Guangdong, China

2. Summary of Test Results


Standard	Test Type	Result
15.207 & 15.407	Conducted Emission	PASS
15.205/15.209	Spurious Emission	PASS
15.407(b)	Band Edge	PASS
15.407(a)(5)	Occupy Bandwidth	PASS
15.407(a)(1)(3)	Maximum Conducted Output Power	PASS
15.407(a)(1)(3)	Peak Power Spectral Density	PASS
15.203/15.407g	Antenna Requirement	PASS

3. Conducted Emission Test

3.1. Test Standard and Limit

Test Standard	FCC Part15 Section 15.207&15.407		
Test Limit	Frequency	Maximum RF Line Voltage (dBuV)	
		Quasi-peak Level	Average Level
	150kHz~500kHz	66 ~ 56 *	56 ~ 46 *
	500kHz~5MHz	56	46
	5MHz~30MHz	60	50
Remark: (1) *Decreasing linearly with logarithm of the frequency. (2) The lower limit shall apply at the transition frequency.			

3.2. Test Setup

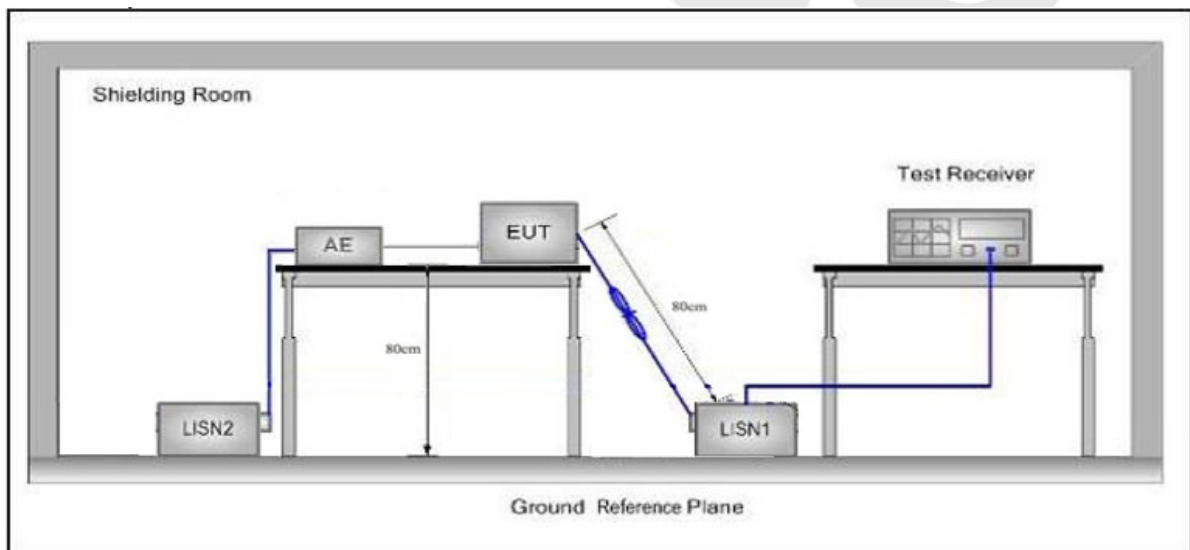

3.3. Test Procedure

The EUT system is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to FCC ANSI C63.10-2013 on Conducted Emission Measurement.

The bandwidth of test receiver (ESCI) set at 9kHz.


The frequency range from 150kHz to 30MHz is checked.

3.4. Test Data

Please to see the following pages

Conducted Emission Test Data


Test Site: 1# Shielded Room
 Operating Condition: Keeping TX mode
 Test Specification: AC 120V, 60Hz for adapter
 Comment: Live Line
 Tem.:25°C Hum.:50%

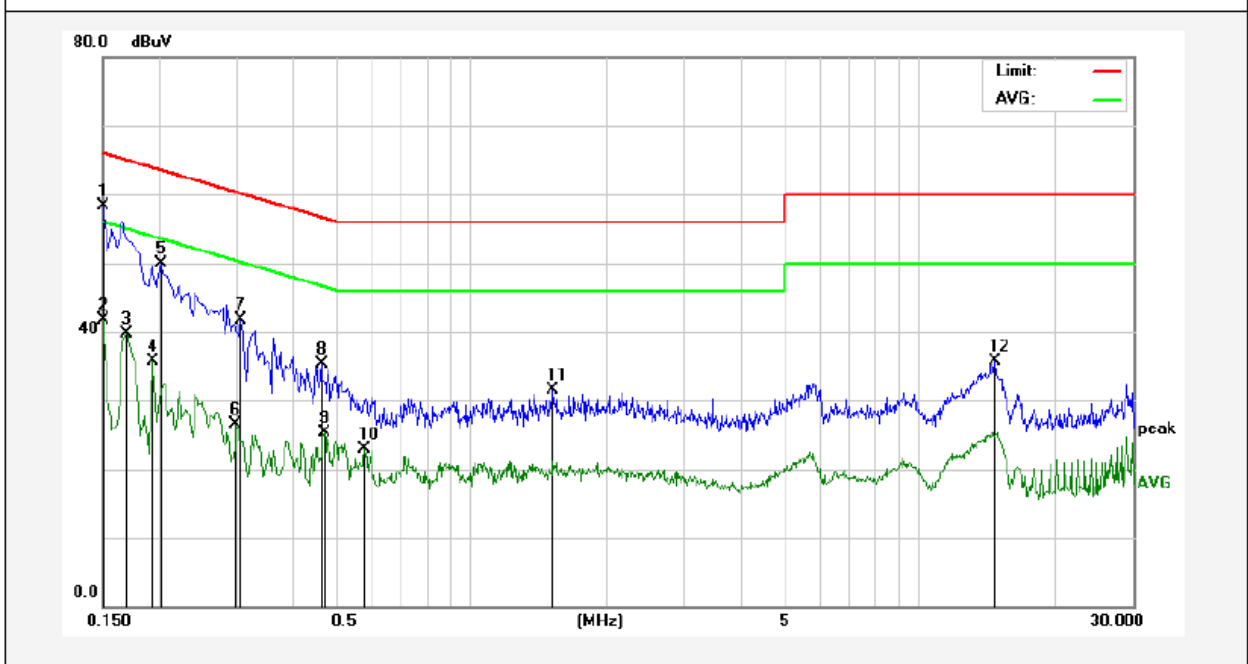

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Over Limit (dB)	Detector	Remark
1	0.1500	38.49	19.90	58.39	65.99	-7.60	QP	
2	0.1500	21.77	19.90	41.67	55.99	-14.32	AVG	
3	0.1700	19.89	19.90	39.79	54.96	-15.17	AVG	
4	0.1940	15.82	19.90	35.72	53.86	-18.14	AVG	
5	0.2020	30.03	19.90	49.93	63.52	-13.59	QP	
6	0.2980	6.61	19.89	26.50	50.30	-23.80	AVG	
7	0.3060	21.81	19.89	41.70	60.08	-18.38	QP	
8	0.4620	15.41	19.96	35.37	56.66	-21.29	QP	
9	0.4700	5.25	19.97	25.22	46.51	-21.29	AVG	
10	0.5780	2.87	20.00	22.87	46.00	-23.13	AVG	
11	1.5220	11.35	20.13	31.48	56.00	-24.52	QP	
12	14.7780	15.39	20.26	35.65	60.00	-24.35	QP	

Conducted Emission Test Data


Test Site: 1# Shielded Room
 Operating Condition: Keeping TX mode
 Test Specification: AC 120V, 60Hz for adapter
 Comment: Neutral Line
 Tem.:25°C Hum.:50%

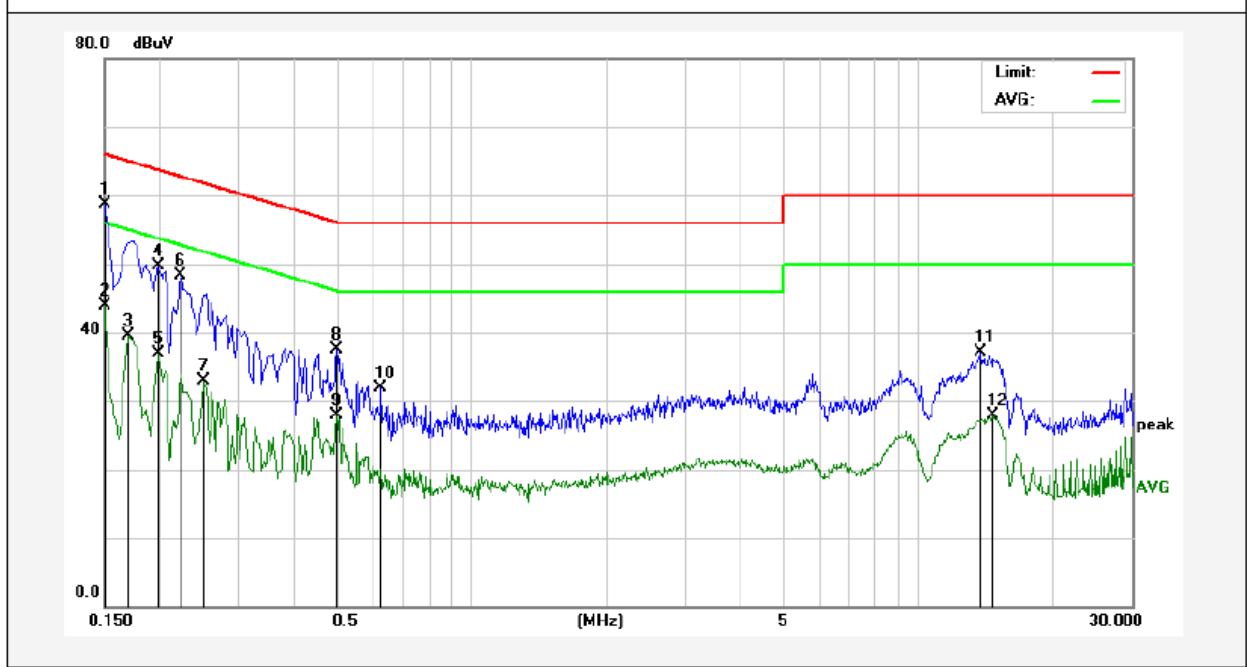

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Over Limit (dB)	Detector	Remark
1	0.1500	38.77	19.90	58.67	65.99	-7.32	QP	
2	0.1500	24.05	19.90	43.95	55.99	-12.04	AVG	
3	0.1700	19.65	19.90	39.55	54.96	-15.41	AVG	
4	0.1980	29.88	19.90	49.78	63.69	-13.91	QP	
5	0.1980	17.02	19.90	36.92	53.69	-16.77	AVG	
6	0.2220	28.35	19.89	48.24	62.74	-14.50	QP	
7	0.2500	13.04	19.89	32.93	51.75	-18.82	AVG	
8	0.4980	17.43	19.98	37.41	56.03	-18.62	QP	
9	0.4980	7.84	19.98	27.82	46.03	-18.21	AVG	
10	0.6260	11.96	20.02	31.98	56.00	-24.02	QP	
11	13.7540	16.78	20.28	37.06	60.00	-22.94	QP	
12	14.7340	7.66	20.26	27.92	50.00	-22.08	AVG	

Conducted Emission Test Data


Test Site: 1# Shielded Room
 Operating Condition: Keeping TX mode
 Test Specification: AC 240V, 60Hz for adapter
 Comment: Live Line
 Tem.:25°C Hum.:50%

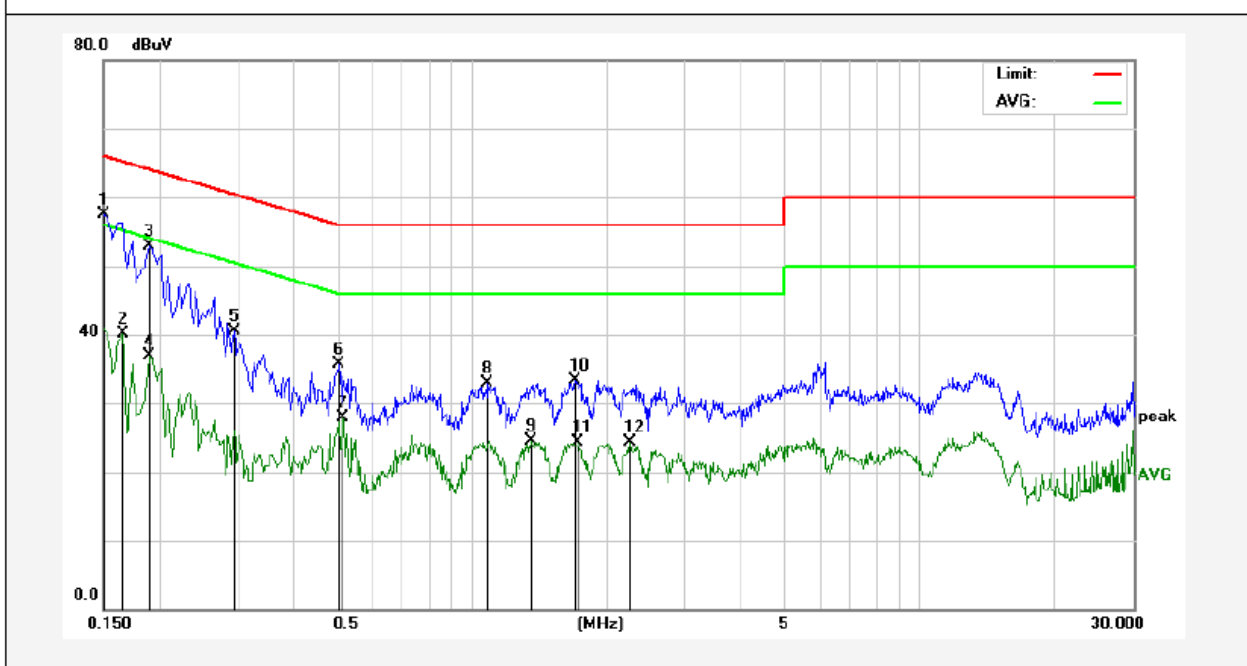

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Over Limit (dB)	Detector	Remark
1	0.1500	37.56	19.90	57.46	65.99	-8.53	QP	
2	0.1660	20.13	19.90	40.03	55.15	-15.12	AVG	
3	0.1900	32.91	19.90	52.81	64.03	-11.22	QP	
4	0.1900	17.04	19.90	36.94	54.03	-17.09	AVG	
5	0.2940	20.64	19.89	40.53	60.41	-19.88	QP	
6	0.5060	15.73	19.98	35.71	56.00	-20.29	QP	
7	0.5180	7.89	19.99	27.88	46.00	-18.12	AVG	
8	1.0859	12.75	20.12	32.87	56.00	-23.13	QP	
9	1.3580	4.33	20.13	24.46	46.00	-21.54	AVG	
10	1.7060	13.26	20.13	33.39	56.00	-22.61	QP	
11	1.7300	4.08	20.13	24.21	46.00	-21.79	AVG	
12	2.2540	4.12	20.14	24.26	46.00	-21.74	AVG	

Conducted Emission Test Data

Test Site: 1# Shielded Room
 Operating Condition: Keeping TX mode
 Test Specification: AC 240V, 60Hz for adapter
 Comment: Neutral Line
 Tem.:25°C Hum.:50%

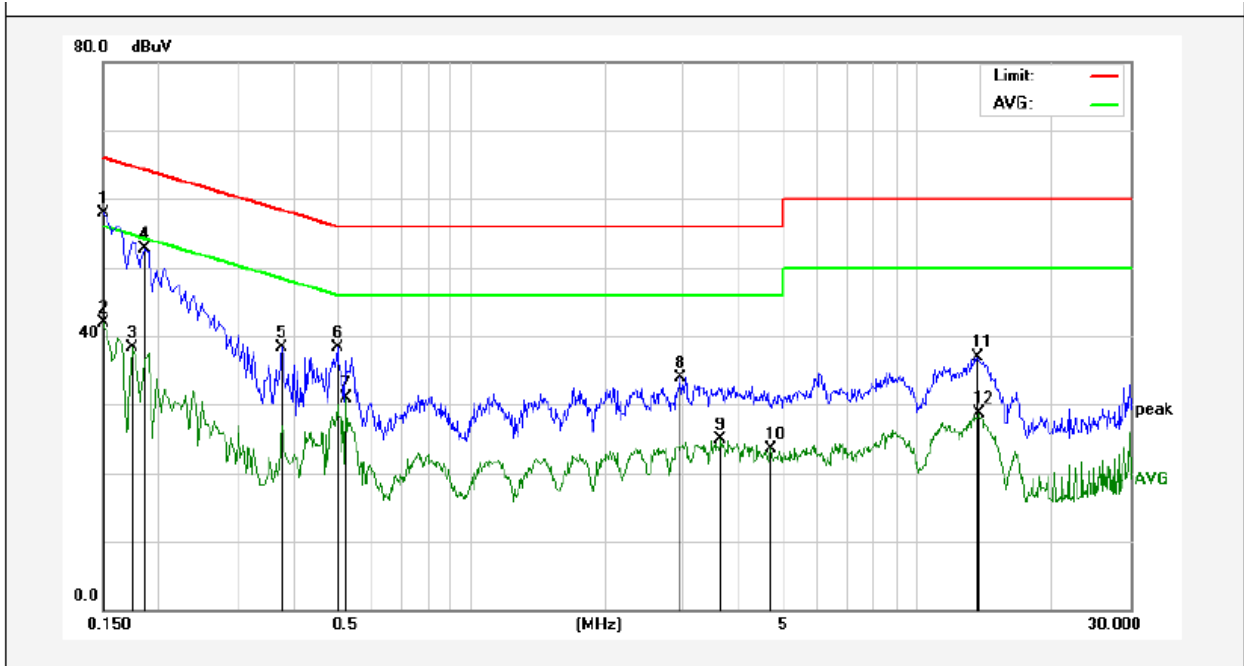

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Over Limit (dB)	Detector	Remark
1	0.1500	37.98	19.90	57.88	65.99	-8.11	QP	
2	0.1500	22.01	19.90	41.91	55.99	-14.08	AVG	
3	0.1740	18.40	19.90	38.30	54.76	-16.46	AVG	
4	0.1860	32.79	19.90	52.69	64.21	-11.52	QP	
5	0.3780	18.42	19.93	38.35	58.32	-19.97	QP	
6	0.5020	18.40	19.98	38.38	56.00	-17.62	QP	
7	0.5260	10.82	19.99	30.81	46.00	-15.19	AVG	
8	2.9500	13.83	20.16	33.99	56.00	-22.01	QP	
9	3.6260	4.77	20.17	24.94	46.00	-21.06	AVG	
10	4.7060	3.25	20.20	23.45	46.00	-22.55	AVG	
11	13.6700	16.67	20.28	36.95	60.00	-23.05	QP	
12	13.8260	8.35	20.28	28.63	50.00	-21.37	AVG	

4. Radiation Spurious Emission and Band Edge

4.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.209, 15.205 and 15.407, KDB 789033 D02 General UNII Test Procedures New Rules v01r04
---------------	---

Unwanted spurious emissions fallen in restricted bands per FCC Part15.205 shall comply with the general field strength limits set forth in § 15.209 as below table,

Test Limit	Frequency (MHz)	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz~0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz~88MHz	100	40.0	Quasi-peak	3
	88MHz~216MHz	150	43.5	Quasi-peak	3
	216MHz~960MHz	200	46.0	Quasi-peak	3
	960MHz~1000MHz	500	54.0	Quasi-peak	3
	Above 1000MHz	500	54.0	Average	3

Remark:

- (1)The lower limit shall apply at the transition frequency.
- (2) 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.
- (3) Above 1GHz limit: $E[\text{dB}\mu\text{V/m}] = \text{EIRP}[\text{dBm}] + 95.2 = 68.2 \text{ dBuV/m}$, for $\text{EIPR}[\text{dBm}] = -27\text{dBm}$.

For transmitters operating in the 5.725-5.85GHz band:

15.407(b)(4)(i) All emissions shall be limited to a level of -27dBm/MHz at 75MHz or more above or below the band edge increasing linearly to 10dBm/MHz at 25MHz above or below the band edge, and from 25MHz above or below the band edge increasing linearly to a level of 15.6dBm/MHz at 5MHz above or below the band edge, and from 5MHz above or below the band edge increasing linearly to a level of 27dBm/MHz at the band edge.

KDB789033 D02 v01r04 (G)(2)(c)

(i) Sections 15.407(b)(1) to (b)(3) specify the unwanted emission limits for the U-NII-1 and U-NII-2 bands. As specified, emissions above 1000 MHz that are outside of the restricted bands are subject to a peak emission limit of -27dBm/MHz.³

(ii) Section 15.407(b)(4) specifies the unwanted emission limit for the U-NII-3 band. A band emissions mask is specified in Section 15.407(b)(4)(i). The emission limits are in terms of a Peak detector. An alternative to the band emissions mask is specified in Section 15.407(b)(4)(ii). The alternative limits are based on the highest antenna gain specified in the filing. There are also marketing and importation restrictions for the devices using the alternative limit.⁴

Note 3: An out-of-band emission that complies with both the average and peak limits of Section 15.209 is not required to satisfy the -27 dBm/MHz peak emission limit.

Note 4: Only devices with antenna gains of 10 dBi or less may be approved using the emission limits specified in Section 15.247(d) till March 2, 2018; all other devices operating in this band must use the mask specified in Section 15.407(b)(4)(i).

4.2. Test Setup

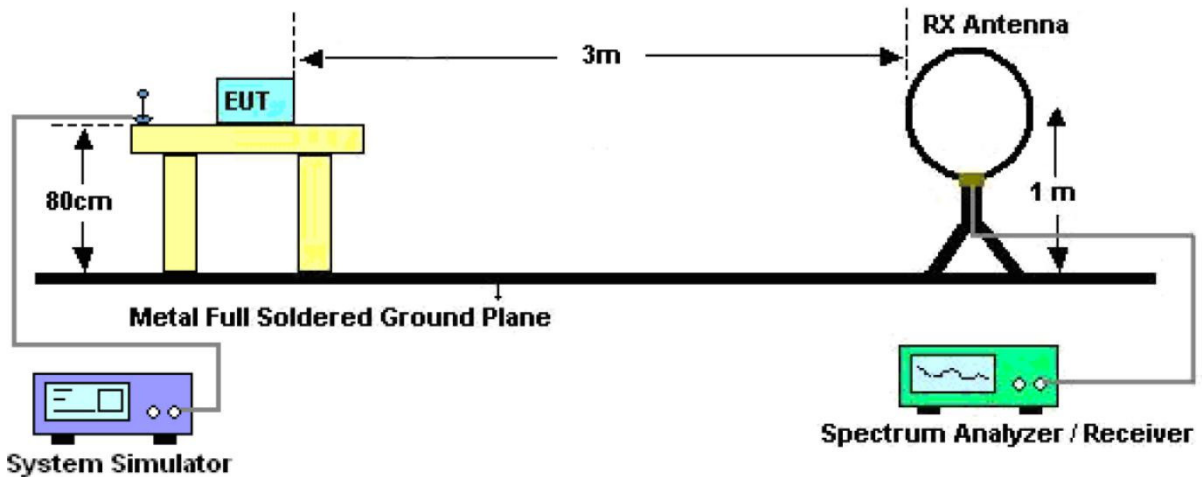


Figure 1. Below 30MHz

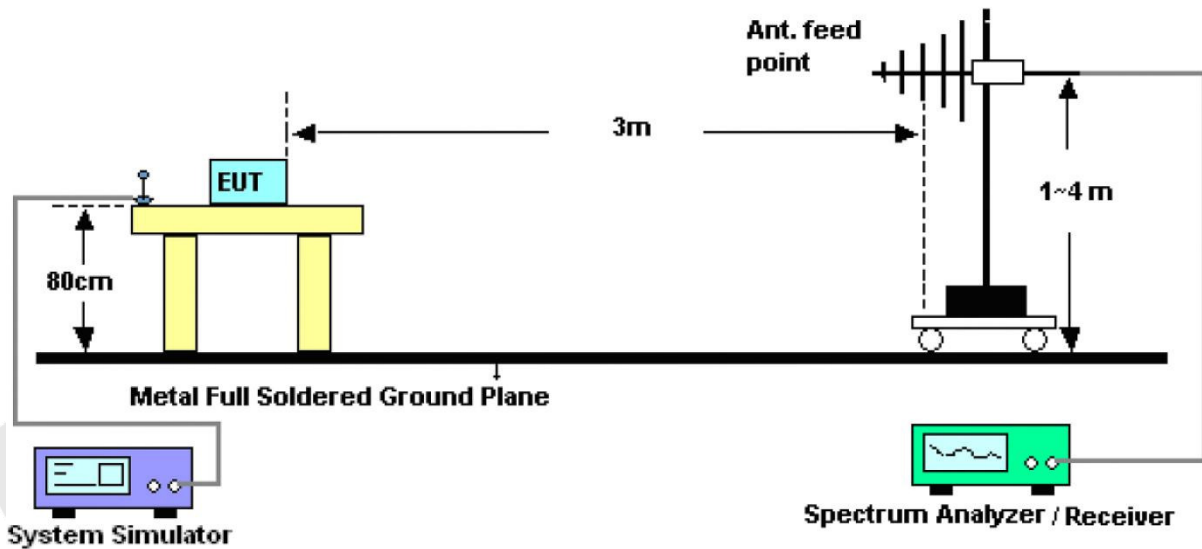


Figure 2. 30MHz to 1GHz

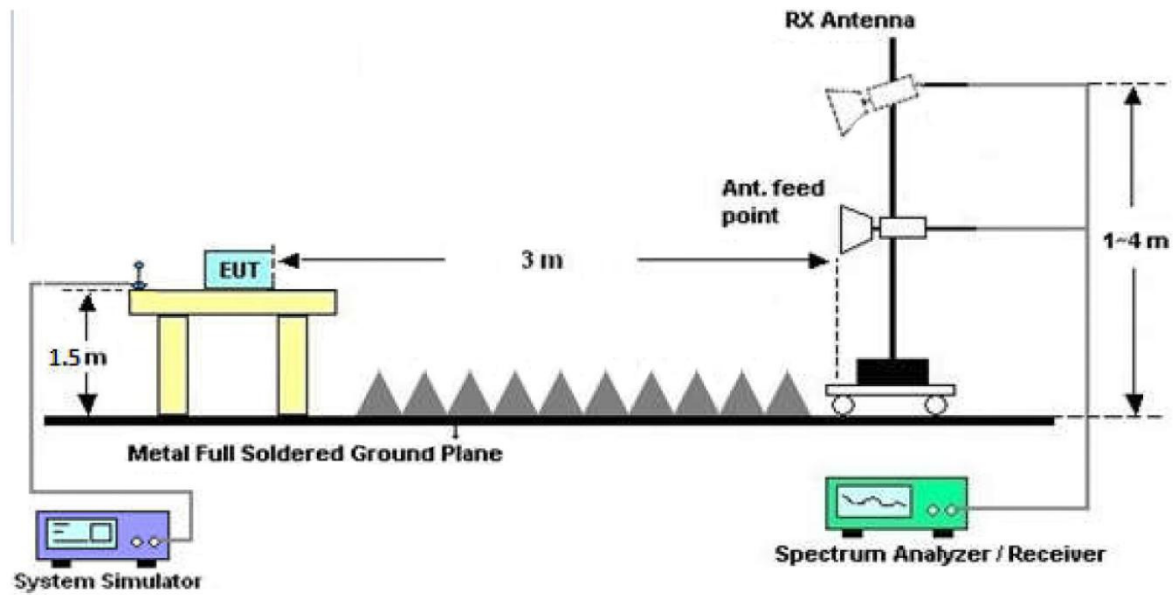


Figure 3. Above 1 GHz

4.3. Test Procedure

For below 1GHz: The EUT is placed on a turntable, which is 0.8m above the ground plane.

For above 1GHz: The EUT is placed on a turntable, which is 1.5m above the ground plane.

The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna which is mounted on a antenna tower. The antenna can be moved up and down from 1 to 4 meters to find out the maximum emission level. Rotated the EUT through three orthogonal axes to determine the maximum emissions, both horizontal and vertical polarization of the antenna are set on test. The EUT is tested in 9*6*6 Chamber. The device is evaluated in xyz orientation.

For the radiated emission test above 1GHz:

Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.

For 9kHz to 150kHz, Set the spectrum analyzer as:

RBW = 200Hz, VBW =1kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 150kHz to 30MHz, Set the spectrum analyzer as:

RBW = 9KHz, VBW =30kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 30MHz to 1000MHz, Set the spectrum analyzer as:

RBW = 100kHz, VBW =300kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For above 1GHz, Set the spectrum analyzer as:

RBW =1MHz, VBW =1MHz, Detector= Peak, Trace mode= Max hold, Sweep- auto couple.

RBW =1MHz, VBW =10Hz, Detector= Average, Trace mode= Max hold, Sweep- auto couple.

4.4. Test Data


PASS

The test results of 9kHz-30MHz was attenuated more than 20dB below the permissible limits, so the results don't record in the report.

Anbotek

Test Results (30~1000MHz)

Job No.: 0217100096W4 Temp.(°C)/Hum.(%RH): 24.3°C/55%RH
 Standard: FCC PART 15C Power Source: AC 120V/60Hz
 Test Mode: TX Mode Polarization: Horizontal

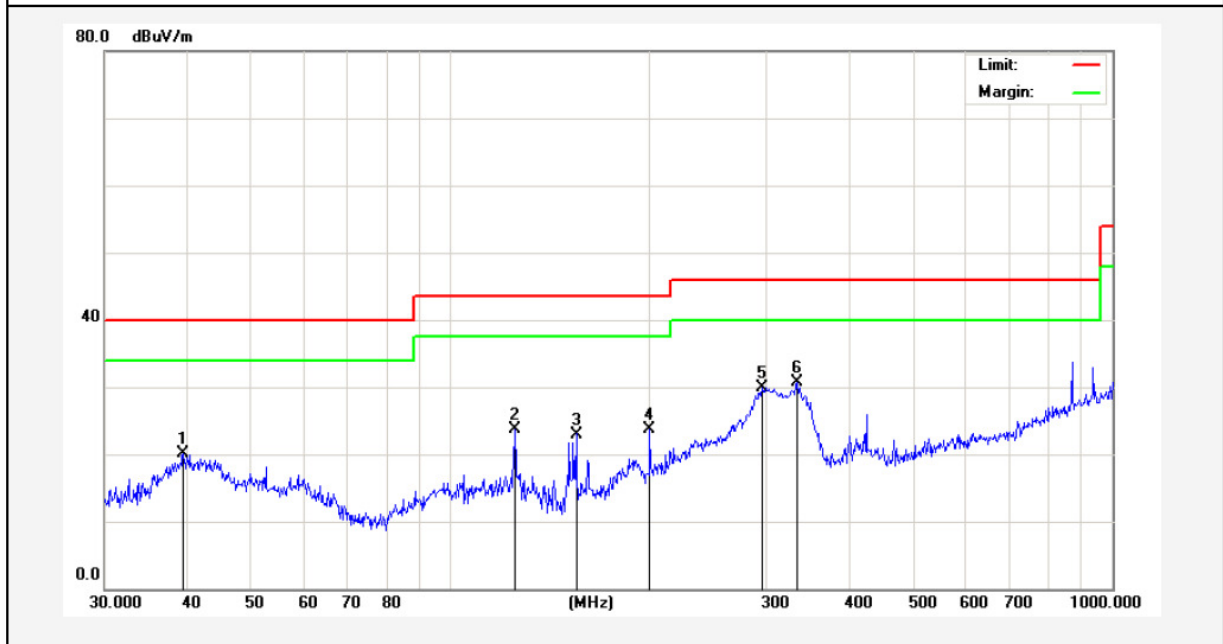


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	39.4371	31.44	-11.27	20.17	40.00	-19.83	QP	300	16	
2	125.0066	45.78	-22.08	23.70	43.50	-19.80	QP	300	77	
3	154.8204	46.11	-23.11	23.00	43.50	-20.50	QP	300	114	
4	199.9856	44.48	-20.87	23.61	43.50	-19.89	QP	300	152	
5	296.1836	47.72	-17.79	29.93	46.00	-16.07	QP	300	213	
6	333.6865	45.27	-14.61	30.66	46.00	-15.34	QP	300	227	



Test Results (30~1000MHz)

Job No.: 0217100096W4 Temp.(°C)/Hum.(%RH): 24.3°C/55%RH
 Standard: FCC PART 15C Power Source: AC 120V/60Hz
 Test Mode: TX Mode Polarization: Vertical

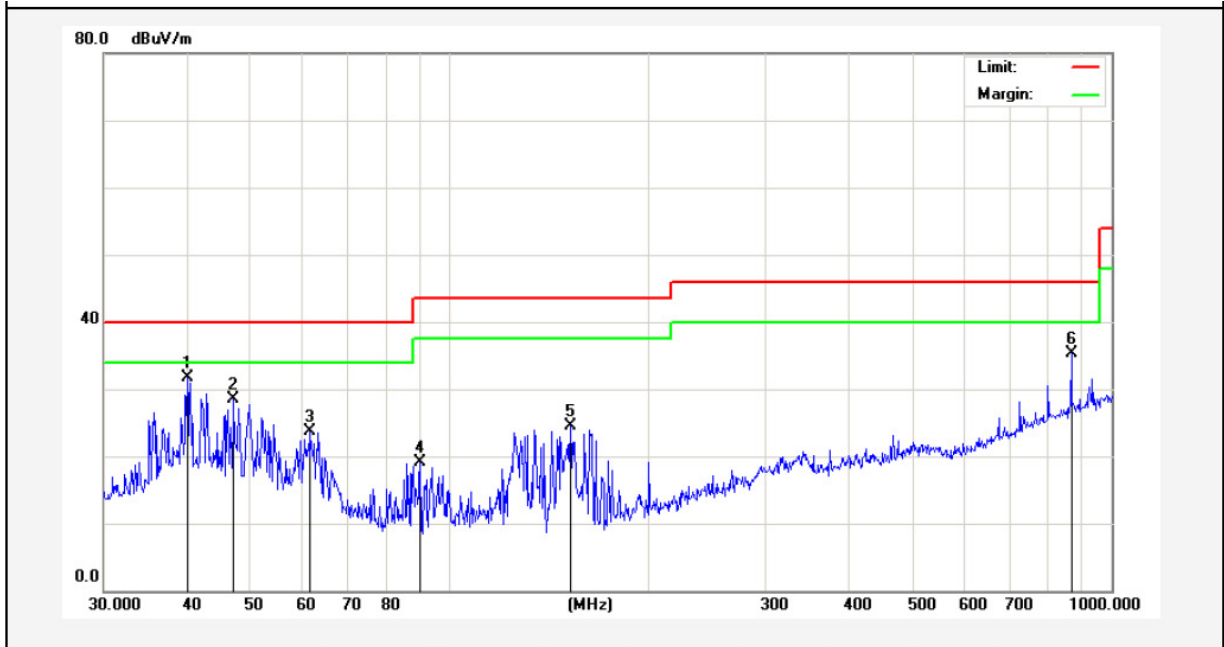

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	40.1347	42.64	-10.92	31.72	40.00	-8.28	QP	300	16	
2	47.1599	41.86	-13.44	28.42	40.00	-11.58	QP	300	67	
3	61.5618	39.79	-16.05	23.74	40.00	-16.26	QP	300	110	
4	90.2205	36.87	-17.80	19.07	43.50	-24.43	QP	300	164	
5	152.1297	42.72	-18.24	24.48	43.50	-19.02	QP	300	199	
6	869.1302	39.67	-4.29	35.38	46.00	-10.62	QP	300	241	



Test Results (Above 1000MHz)

Test mode:	IEEE 802.11a	Test channel:	Low CH
------------	--------------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
11490.00	41.66	32.66	18.21	34.01	58.52	74.00	-15.48	V
17235.00	34.78	33.42	20.20	35.00	53.40	68.20	-14.80	V
11490.00	36.58	32.66	18.21	34.01	53.44	74.00	-20.56	H
17235.00	36.95	33.42	20.20	35.00	55.57	68.20	-12.63	H

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
11490.00	30.44	32.66	18.21	34.01	47.30	54.00	-6.70	V
17235.00	27.63	33.42	20.20	35.00	46.25	54.00	-7.75	V
11490.00	27.01	32.66	18.21	34.01	43.87	54.00	-10.13	H
17235.00	25.98	33.42	20.20	35.00	44.60	54.00	-9.40	H

Test mode:	IEEE 802.11a	Test channel:	Mid CH
------------	--------------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
11570.00	41.36	32.67	18.24	34.02	58.25	74.00	-15.75	V
17355.00	35.44	33.44	20.22	35.01	54.09	68.20	-14.11	V
11570.00	36.78	32.67	18.24	34.02	53.67	74.00	-20.33	H
17355.00	34.95	33.44	20.22	35.01	53.60	68.20	-14.60	H

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
11570.00	29.35	32.67	18.24	34.02	46.24	54.00	-7.76	V
17355.00	27.44	33.44	20.22	35.01	46.09	54.00	-7.91	V
11570.00	29.41	32.67	18.24	34.02	46.30	54.00	-7.70	H
17355.00	28.06	33.44	20.22	35.01	46.71	54.00	-7.29	H

Test mode:	IEEE 802.11a	Test channel:	High CH
------------	--------------	---------------	---------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
11650.00	39.57	32.69	18.26	34.04	56.48	74.00	-17.52	V
17475.00	38.77	33.46	20.23	35.02	57.44	68.20	-10.76	V
11650.00	40.41	32.69	18.26	34.04	57.32	74.00	-16.68	H
17475.00	38.72	33.46	20.23	35.02	57.39	68.20	-10.81	H

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
11650.00	29.36	32.69	18.26	34.04	46.27	54.00	-7.73	V
17475.00	28.66	33.46	20.23	35.02	47.33	54.00	-6.67	V
11650.00	27.55	32.69	18.26	34.04	44.46	54.00	-9.54	H
17475.00	27.36	33.46	20.23	35.02	46.03	54.00	-7.97	H

Test mode:	IEEE 802.11n(HT20)	Test channel:	Low CH
------------	--------------------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
11490.00	38.63	32.66	18.21	34.01	55.49	74.00	-18.51	V
17235.00	36.55	33.42	20.20	35.00	55.17	68.20	-13.03	V
11490.00	36.85	32.66	18.21	34.01	53.71	74.00	-20.29	H
17235.00	37.17	33.42	20.20	35.00	55.79	68.20	-12.41	H

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
11490.00	29.63	32.66	18.21	34.01	46.49	54.00	-7.51	V
17235.00	27.51	33.42	20.20	35.00	46.13	54.00	-7.87	V
11490.00	29.04	32.66	18.21	34.01	45.90	54.00	-8.10	H
17235.00	27.16	33.42	20.20	35.00	45.78	54.00	-8.22	H

Test mode:	IEEE 802.11n(HT20)	Test channel:	Mid CH
------------	--------------------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
11570.00	42.77	32.67	18.24	34.02	59.66	74.00	-14.34	V
17355.00	38.46	33.44	20.22	35.01	57.11	68.20	-11.09	V
11570.00	39.41	32.67	18.24	34.02	56.30	74.00	-17.70	H
17355.00	36.55	33.44	20.22	35.01	55.20	68.20	-13.00	H

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
11570.00	30.77	32.67	18.24	34.02	47.66	54.00	-6.34	V
17355.00	27.32	33.44	20.22	35.01	45.97	54.00	-8.03	V
11570.00	28.65	32.67	18.24	34.02	45.54	54.00	-8.46	H
17355.00	26.74	33.44	20.22	35.01	45.39	54.00	-8.61	H

Test mode:	IEEE 802.11n(HT20)	Test channel:	High CH
------------	--------------------	---------------	---------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
11650.00	41.07	32.69	18.26	34.04	57.98	74.00	-16.02	V
17475.00	39.45	33.46	20.23	35.02	58.12	68.20	-10.08	V
11650.00	37.01	32.69	18.26	34.04	53.92	74.00	-20.08	H
17475.00	38.15	33.46	20.23	35.02	56.82	68.20	-11.38	H

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
11650.00	32.33	32.69	18.26	34.04	49.24	54.00	-4.76	V
17475.00	31.95	33.46	20.23	35.02	50.62	54.00	-3.38	V
11650.00	28.06	32.69	18.26	34.04	44.97	54.00	-9.03	H
17475.00	28.44	33.46	20.23	35.02	47.11	54.00	-6.89	H

Test mode:	IEEE 802.11n(HT40)	Test channel:	Low CH
------------	--------------------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
11510.00	41.29	32.66	18.21	34.01	58.15	74.00	-15.85	V
17265.00	36.77	33.43	20.21	35.00	55.41	68.20	-12.79	V
11510.00	38.14	32.66	18.21	34.01	55.00	74.00	-19.00	H
17265.00	38.66	33.43	20.21	35.00	57.30	68.20	-10.90	H

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
11510.00	31.89	32.66	18.21	34.01	48.75	54.00	-5.25	V
17265.00	29.33	33.43	20.21	35.00	47.97	54.00	-6.03	V
11510.00	30.58	32.66	18.21	34.01	47.44	54.00	-6.56	H
17265.00	27.66	33.43	20.21	35.00	46.30	54.00	-7.70	H

Test mode:	IEEE 802.11n(HT40)	Test channel:	High CH
------------	--------------------	---------------	---------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
11590.00	41.36	32.68	18.24	34.03	58.25	74.00	-15.75	V
17385.00	38.65	33.45	20.22	35.02	57.30	68.20	-10.90	V
11590.00	37.42	32.68	18.24	34.03	54.31	74.00	-19.69	H
17385.00	38.53	33.45	20.22	35.02	57.18	68.20	-11.02	H

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
11590.00	30.21	32.68	18.24	34.03	47.10	54.00	-6.90	V
17385.00	27.58	33.45	20.22	35.02	46.23	54.00	-7.77	V
11590.00	30.17	32.68	18.24	34.03	47.06	54.00	-6.94	H
17385.00	27.09	33.45	20.22	35.02	45.74	54.00	-8.26	H

Note:

- Final Level = Receiver Read level + Antenna Factor + Cable Loss - Preamplifier Factor

Radiated Band Edge:

Test Mode: 802.11a								
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
5725.00	42.36	29.78	15.69	31.08	56.75	68.20	-11.45	H
5850.00	40.29	30.01	16.82	32.09	55.03	68.20	-13.17	H
5725.00	43.65	29.78	15.69	31.08	58.04	68.20	-10.16	V
5850.00	41.96	30.01	16.82	32.09	56.70	68.20	-11.50	V
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
5725.00	32.47	29.78	15.69	31.08	46.86	54.00	-7.14	H
5850.00	32.09	30.01	16.82	32.09	46.83	54.00	-7.17	H
5725.00	33.59	29.78	15.69	31.08	47.98	54.00	-6.02	V
5850.00	33.67	30.01	16.82	32.09	48.41	54.00	-5.59	V


Test Mode: 802.11n20								
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
5725.00	41.69	29.78	15.69	31.08	56.08	68.20	-12.12	H
5850.00	40.33	30.01	16.82	32.09	55.07	68.20	-13.13	H
5725.00	43.26	29.78	15.69	31.08	57.65	68.20	-10.55	V
5850.00	41.07	30.01	16.82	32.09	55.81	68.20	-12.39	V
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
5725.00	32.17	29.78	15.69	31.08	46.56	54.00	-7.44	H
5850.00	33.65	30.01	16.82	32.09	48.39	54.00	-5.61	H
5725.00	33.74	29.78	15.69	31.08	48.13	54.00	-5.87	V
5850.00	32.09	30.01	16.82	32.09	46.83	54.00	-7.17	V

Test Mode: 802.11n40								
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
5725.00	41.36	29.78	15.69	31.08	55.75	68.20	-12.45	H
5850.00	42.68	30.01	16.82	32.09	57.42	68.20	-10.78	H
5725.00	41.00	29.78	15.69	31.08	55.39	68.20	-12.81	V
5850.00	40.23	30.01	16.82	32.09	88.74	68.20	-13.23	V
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
5725.00	30.58	29.78	15.69	31.08	44.97	54.00	-9.03	H
5850.00	31.45	30.01	16.82	32.09	46.19	54.00	-7.81	H
5725.00	33.61	29.78	15.69	31.08	48.00	54.00	-6.00	V
5850.00	33.18	30.01	16.82	32.09	47.92	54.00	-6.08	V




For conducted test:


802.11a: Band Edge, Left Side

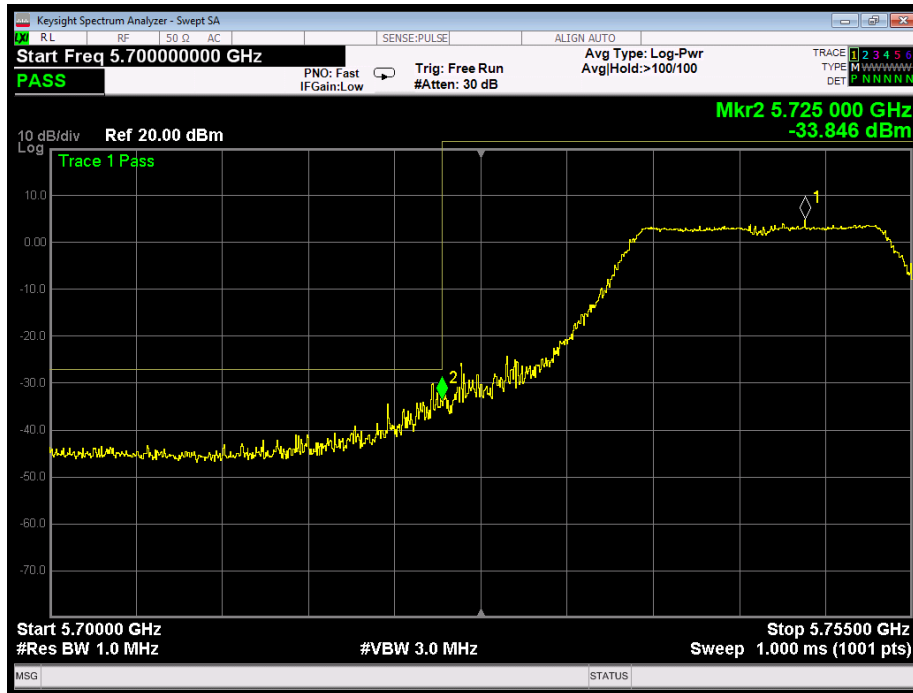


802.11a: Band Edge, Right Side

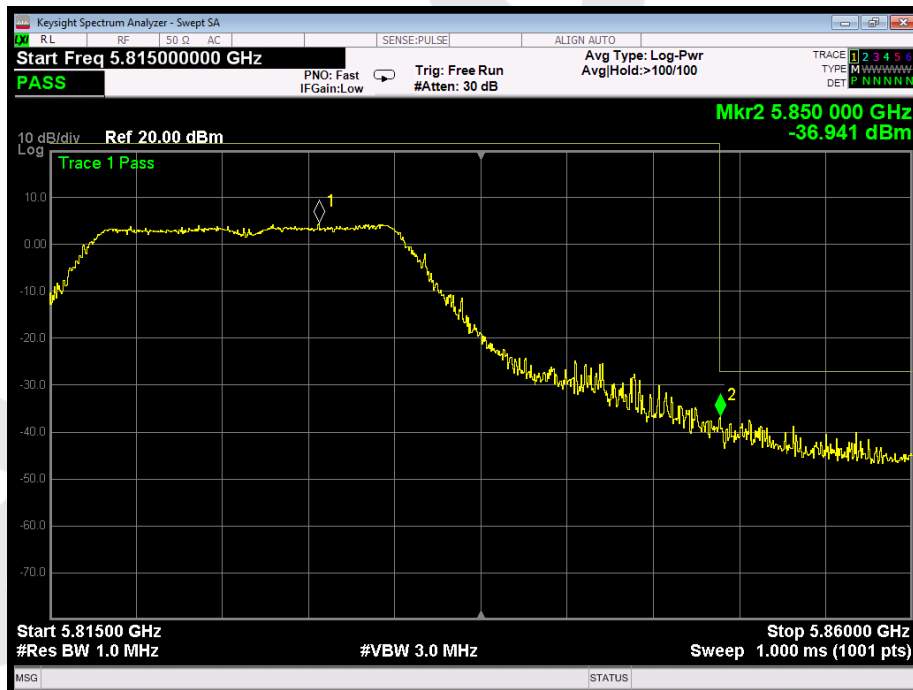

802.11n(20): Band Edge, Left Side

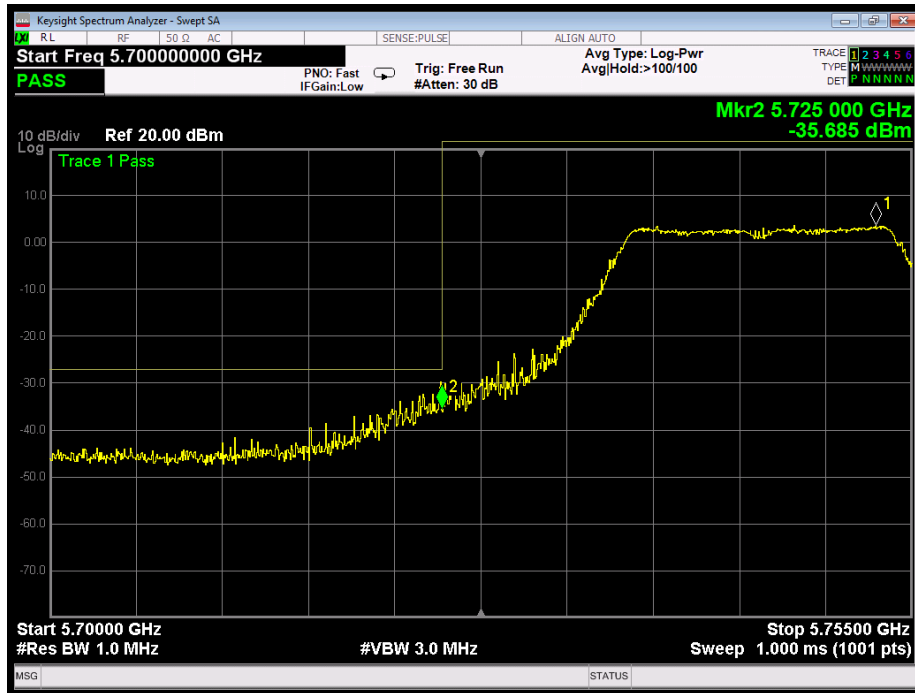


802.11n(20): Band Edge, Right Side

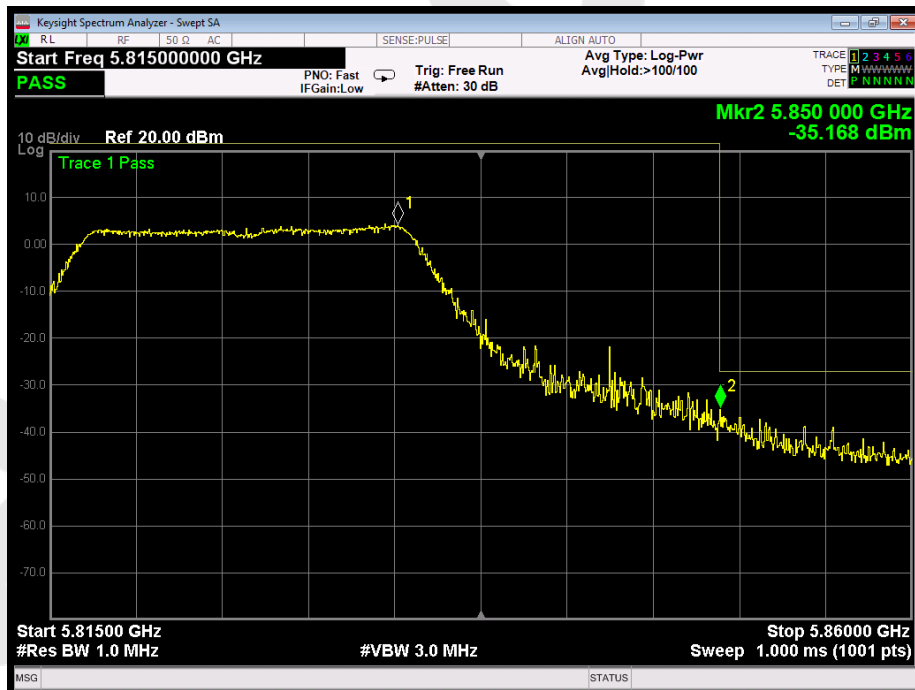

802.11n(40): Band Edge, Left Side



802.11n(40): Band Edge, Right Side

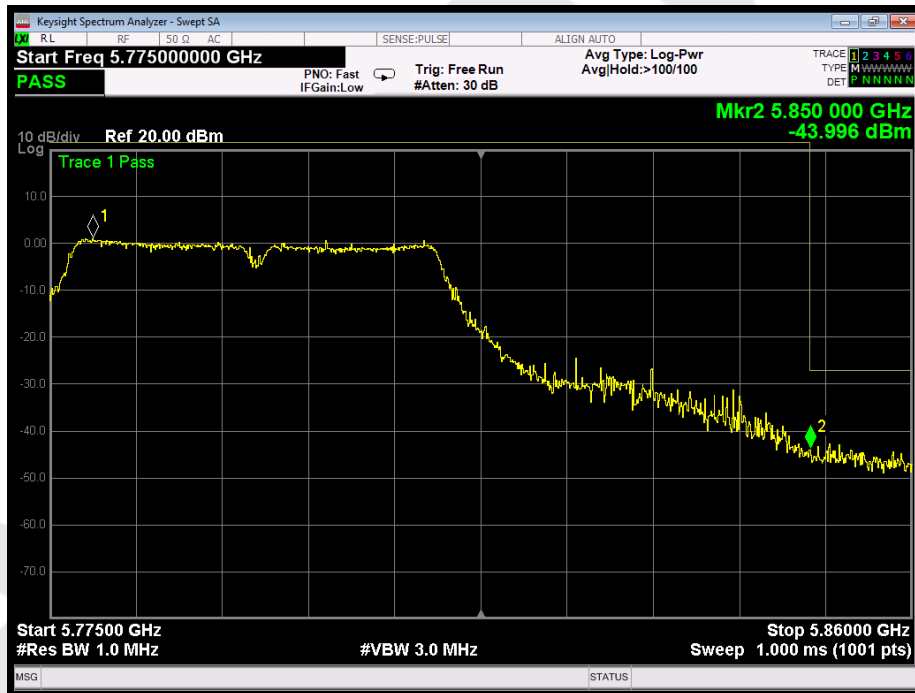


5. Maximum Peak Output Power Test

5.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.407 (a)(1) (3)
Test Limit	30dBm (1W)

5.2. Test Setup



5.3. Test Procedure

1. The Transmitter output (antenna port) was connected to the power meter.
2. Turn on the EUT and power meter and then record the power value.
3. Repeat above procedures on all channels needed to be tested.

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.

5.4. Test Data

Test Item	: Max. peak output power	Test Mode	: CH Low ~ CH High
Test Voltage	: AC 120V/60Hz	Temperature	: 24°C
Test Result	: PASS	Humidity	: 55%RH

Mode	Channel Frequency (MHz)	Peak Power output (dBm)			Correctional Limit (dBm)	Results
		ANT		SUM		
802.11a	5745	11.83			30	PASS
	5785	12.65			30	PASS
	5825	11.97			30	PASS
802.11n20	5745	10.78			30	PASS
	5785	10.82			30	PASS
	5825	10.90			30	PASS
802.11n40	5755	10.14			30	PASS
	5795	10.26			30	PASS

Note:


1) For power test the duty cycle is 100% in continuous transmitting mode. Please see the plot of next page.

6. Occupy Bandwidth Test

6.1. Test Standard

Test Standard	FCC Part15 C Section 15.403(i), 15.407 (e)
---------------	--

6.2. Test Setup



6.3. Test Procedure

1. Place the EUT on the table and set it in the transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

3. Set the spectrum analyzer as:

26 dB & 99% bandwidth

- RBW = approximately 1% of the emission bandwidth;
- Set the VBW > RBW;
- Detector = Peak
- Trace mode = Max hold.
- Sweep - auto couple.

6 dB bandwidth

- RBW = 100kHz;
- Set the video bandwidth (VBW) ≥ 3 RBW;
- Detector = Peak
- Trace mode = Max hold.
- Sweep - auto couple.

4. Measure the maximum width of the emission that is 26dB /6dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer.
5. Repeat until all the rest channels are investigated.


6.4. Test Data

Test Item	: 6dB & 26dB BW	Test Mode	: CH Low ~ CH High
Test Voltage	: AC 120V/60Hz	Temperature	: 24°C
Test Result	: PASS	Humidity	: 55%RH


Mode	Channel Frequency (MHz)	6dB BW(MHz)	Limit	Results
802.11a	5745	16.44	>0.5MHz	PASS
	5785	16.55		PASS
	5825	16.48		PASS
802.11n20	5745	17.67		PASS
	5785	17.70		PASS
	5825	17.64		PASS
802.11n40	5755	36.44		PASS
	5795	36.32		PASS

Mode	Channel Frequency (MHz)	26dB BW(MHz)	99% Bandwidth (MHz)
802.11a	5745	22.49	16.985
	5785	22.77	17.025
	5825	23.11	16.997
802.11n20	5745	23.52	18.193
	5785	23.16	18.128
	5825	23.36	18.122
802.11n40	5755	49.52	37.428
	5795	50.45	38.050


6dB Bandwidth

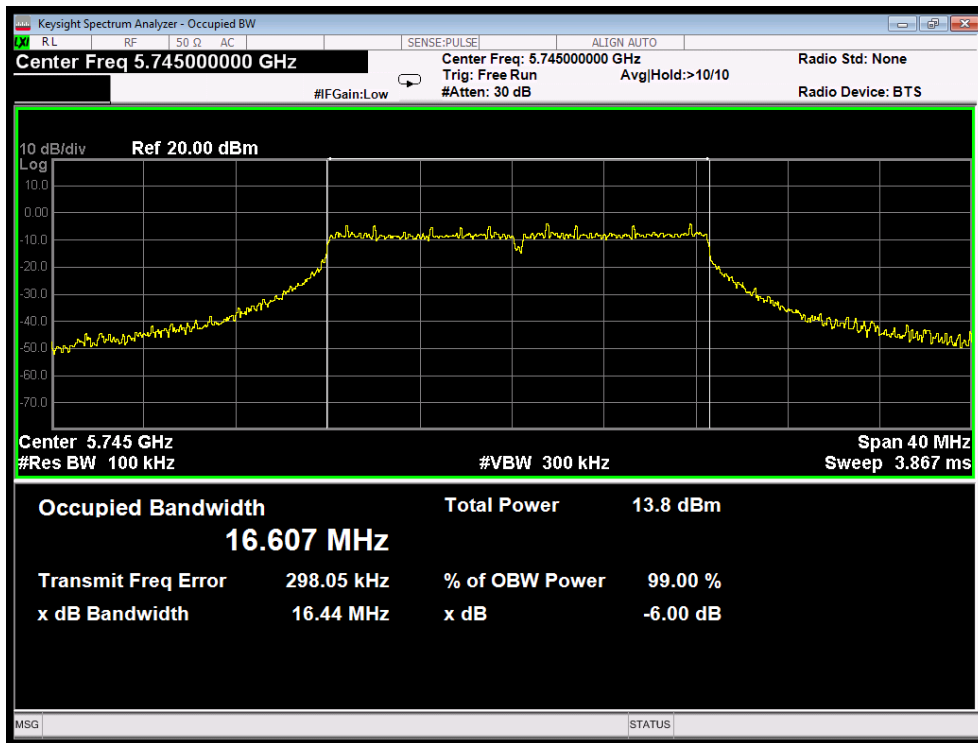


Test Mode: 802.11a--Low

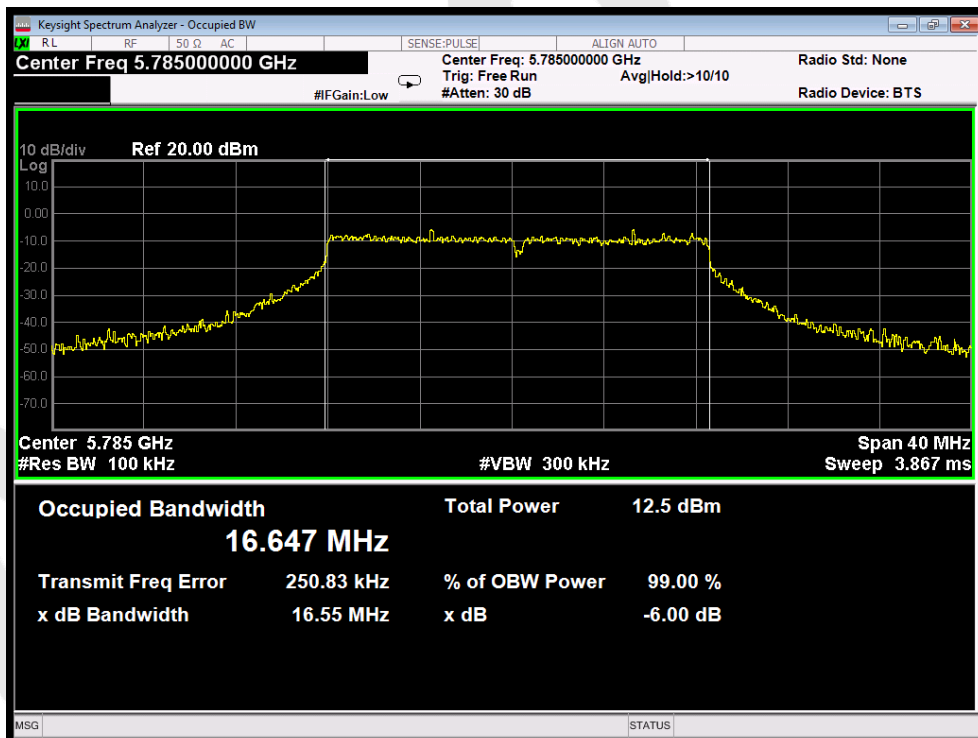


Test Mode: 802.11a---Middle

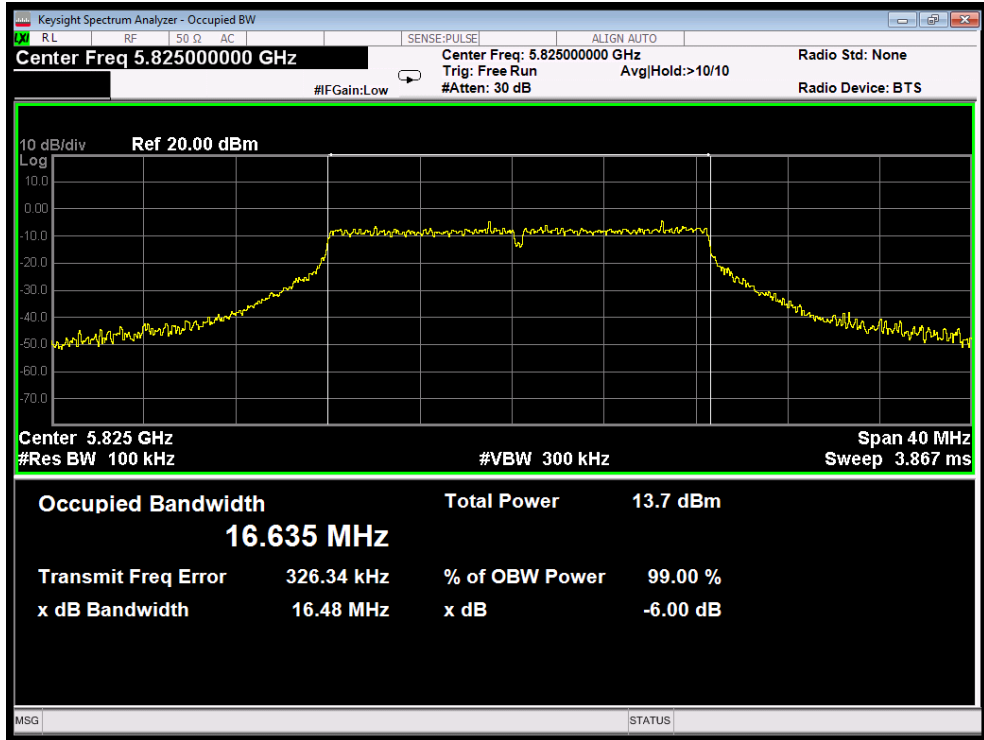


Test Mode: 802.11a---High

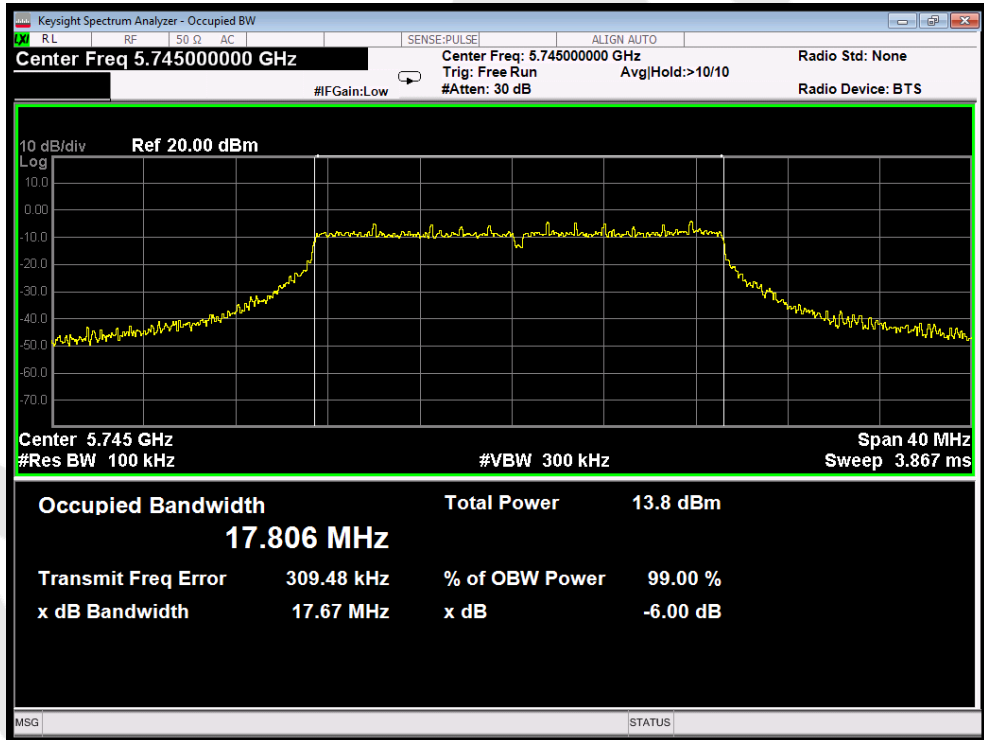


Test Mode: 802.11n20---Low

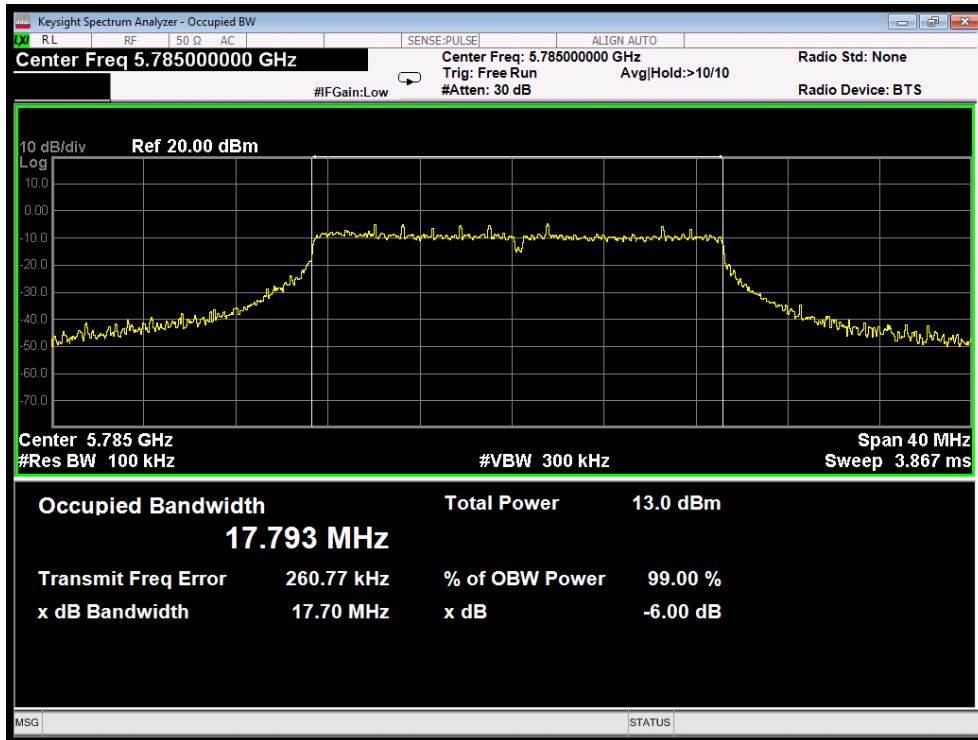


Test Mode: 802.11n20---Middle

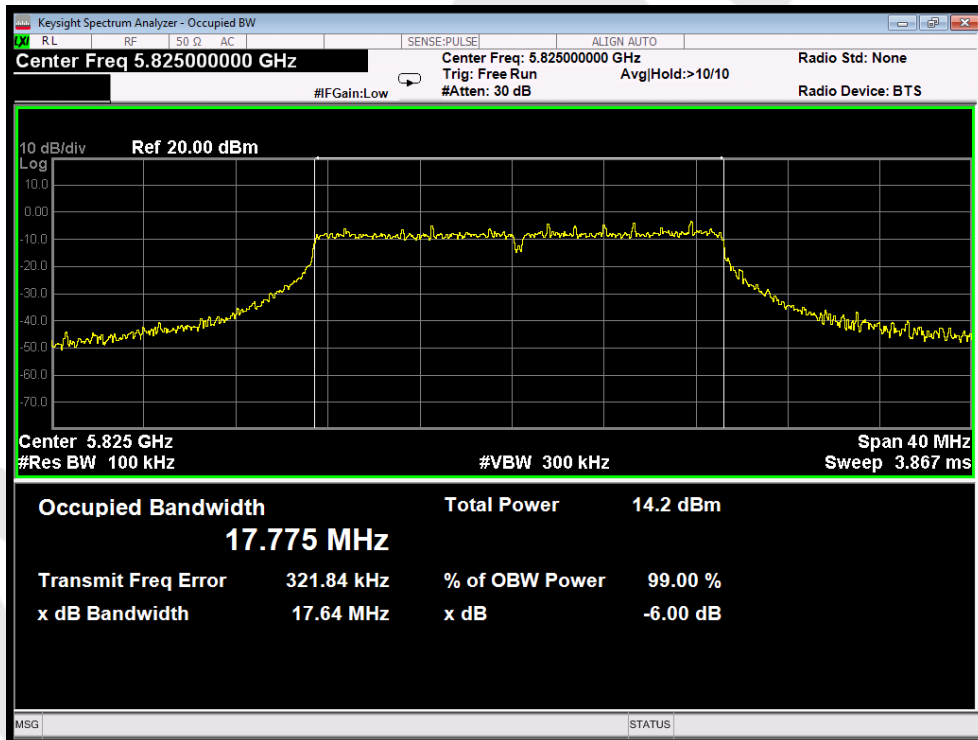

Test Mode: 802.11n20---High

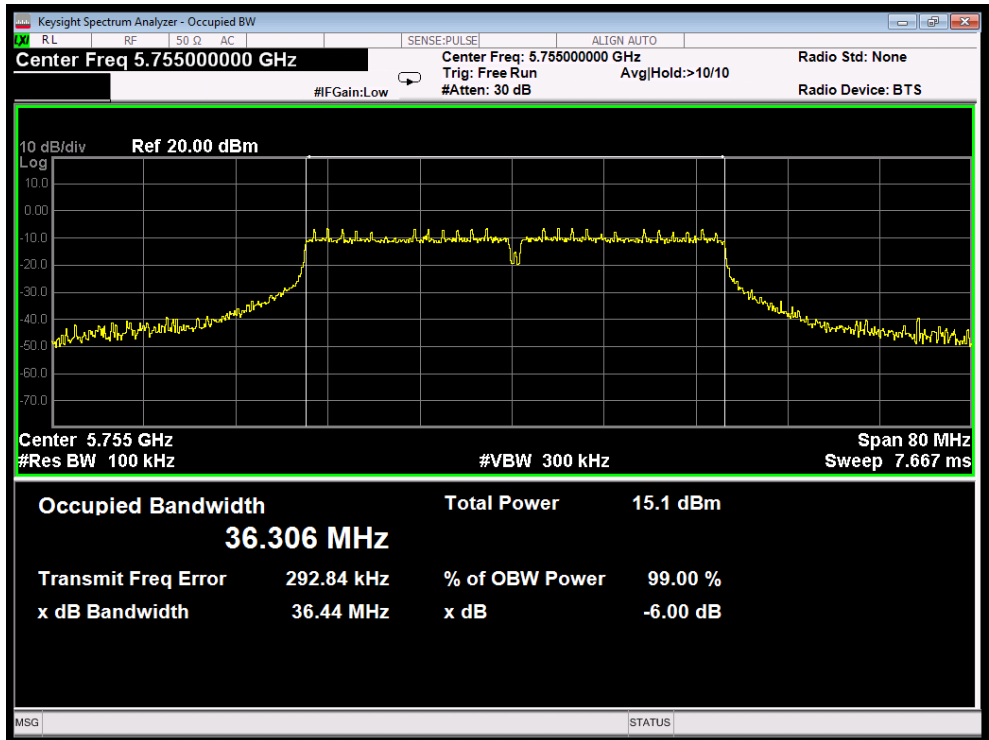


Test Mode: 802.11n40---Low

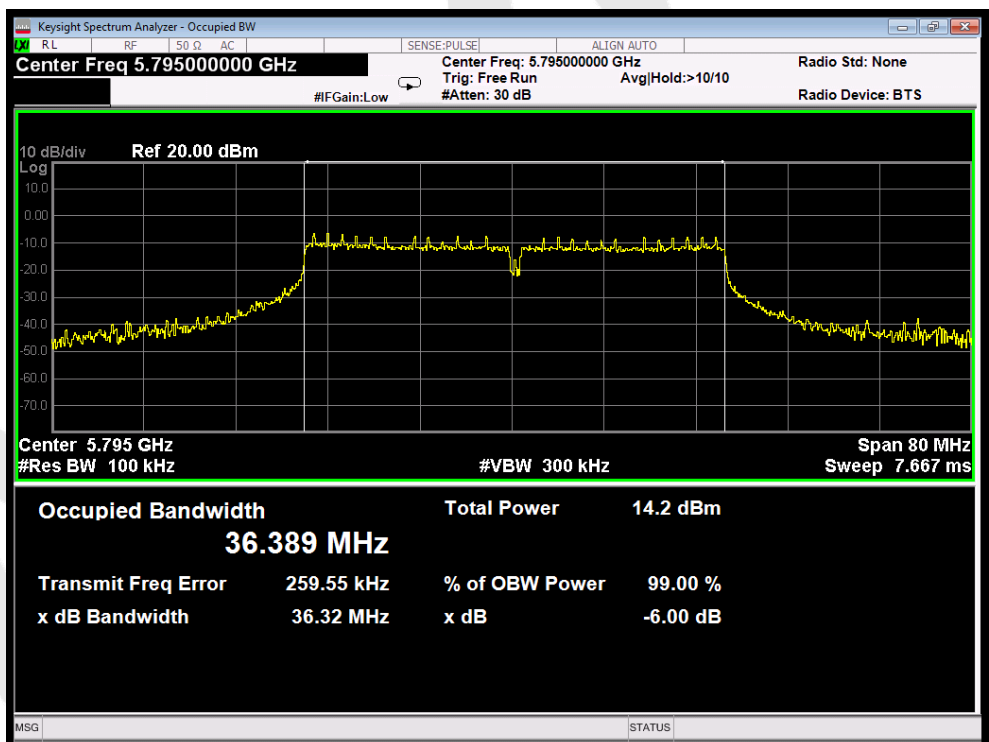


Test Mode: 802.11n40---High


26dB & 99% Bandwidth

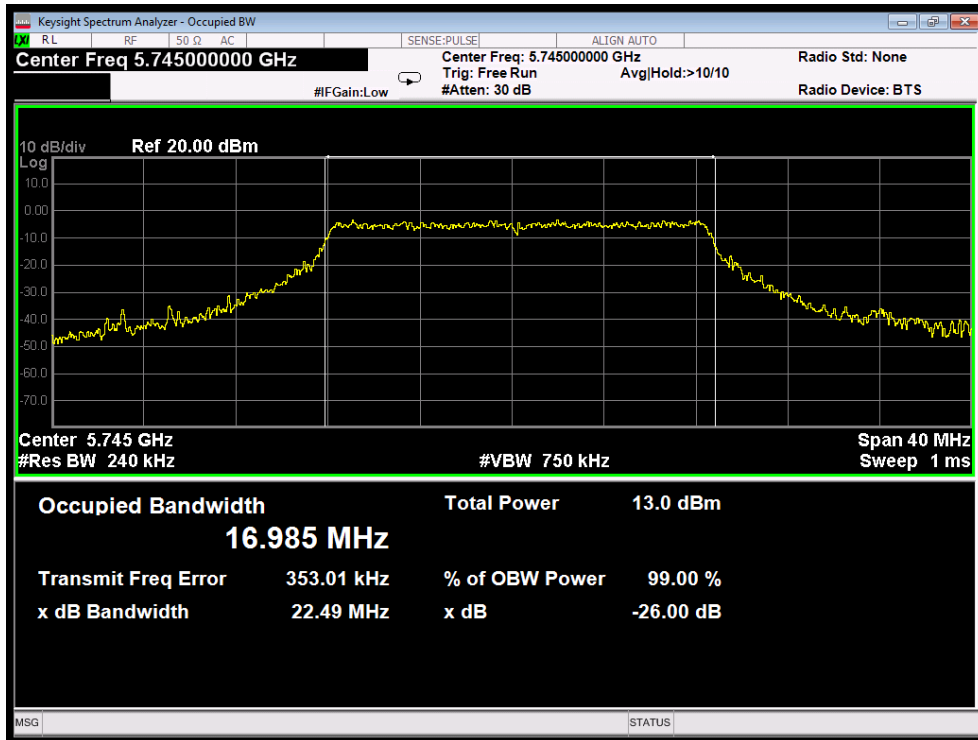


Test Mode: 802.11a--Low

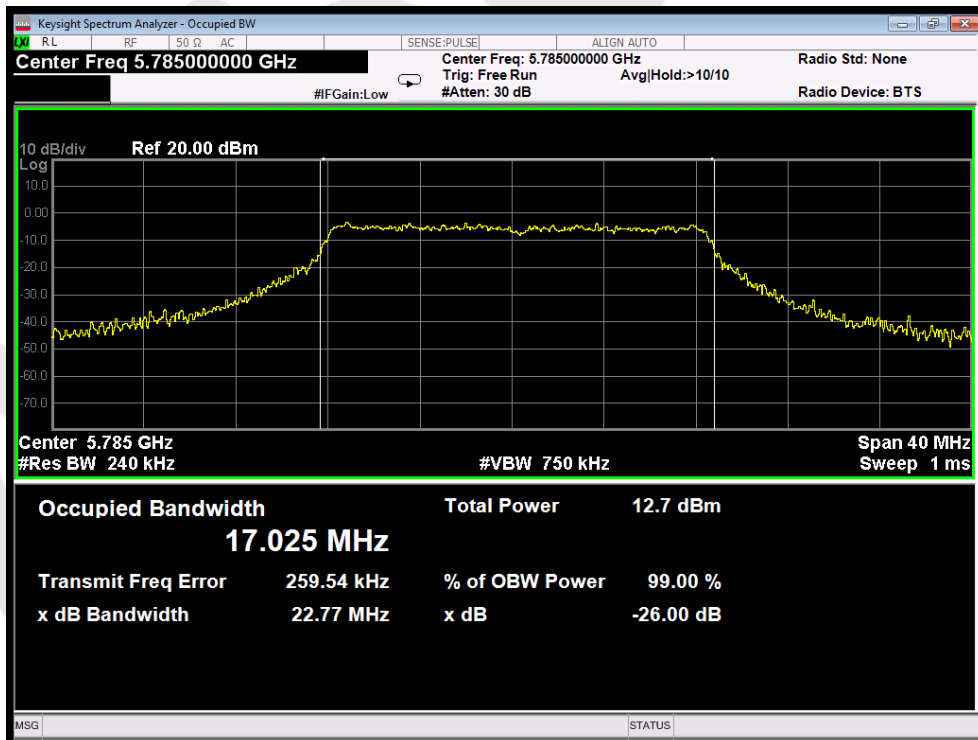


Test Mode: 802.11a---Middle

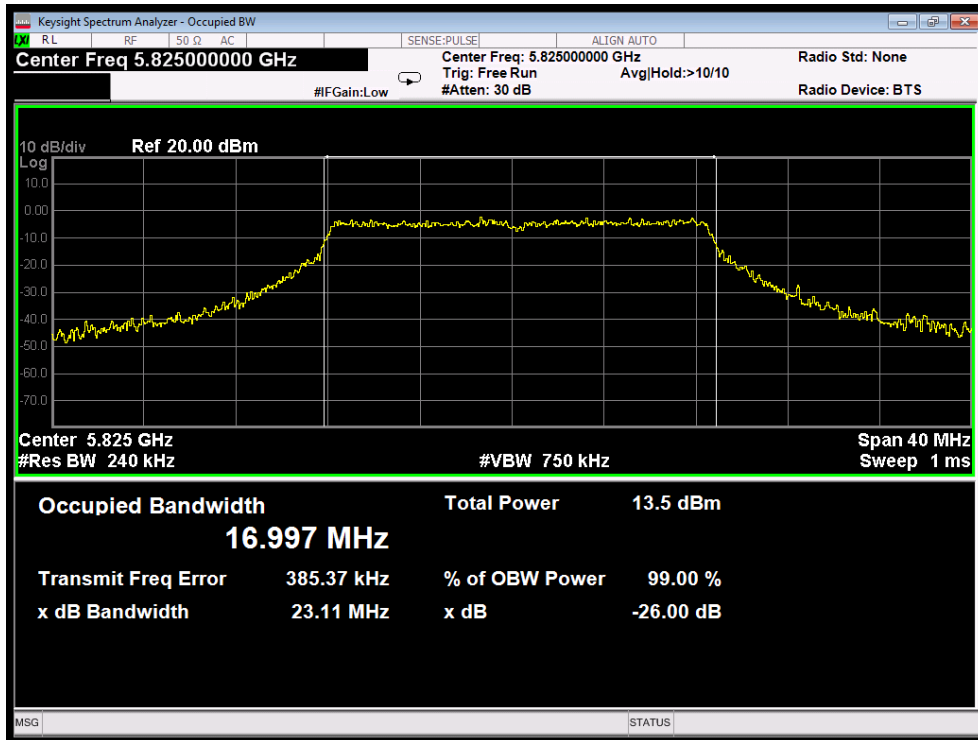


Test Mode: 802.11a---High

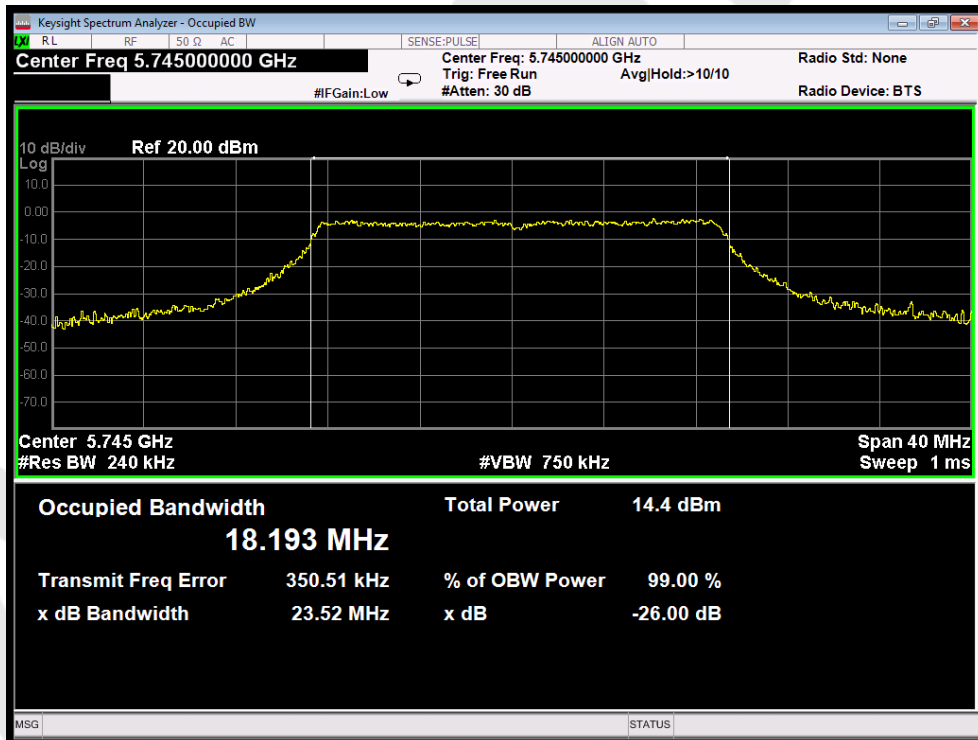


Test Mode: 802.11n20---Low

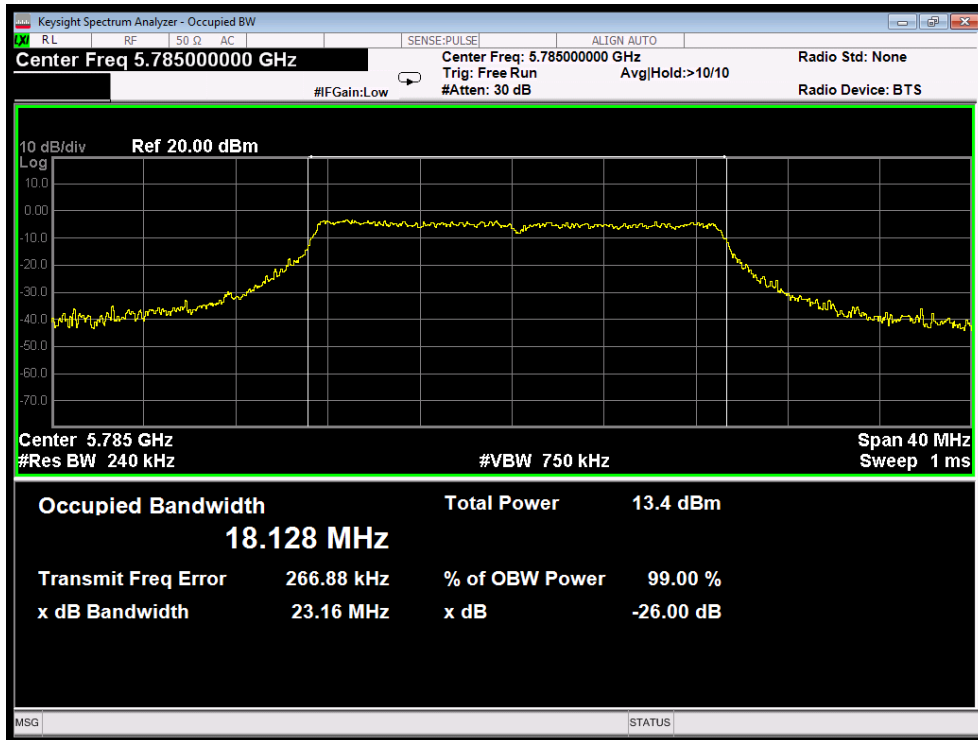


Test Mode: 802.11n20---Middle

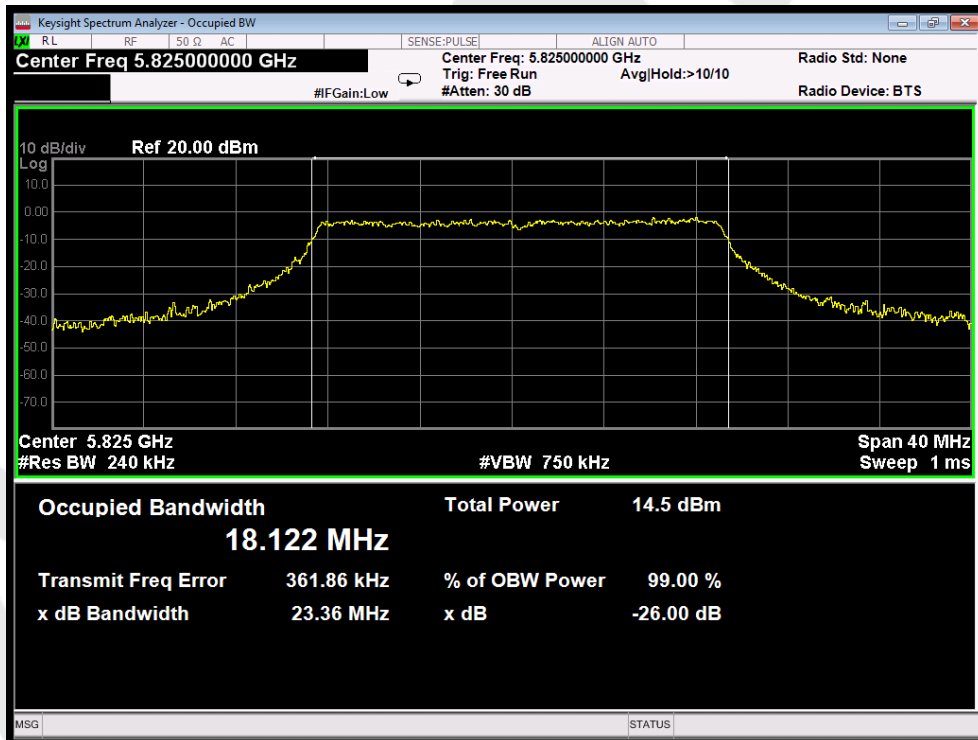

Test Mode: 802.11n20---High

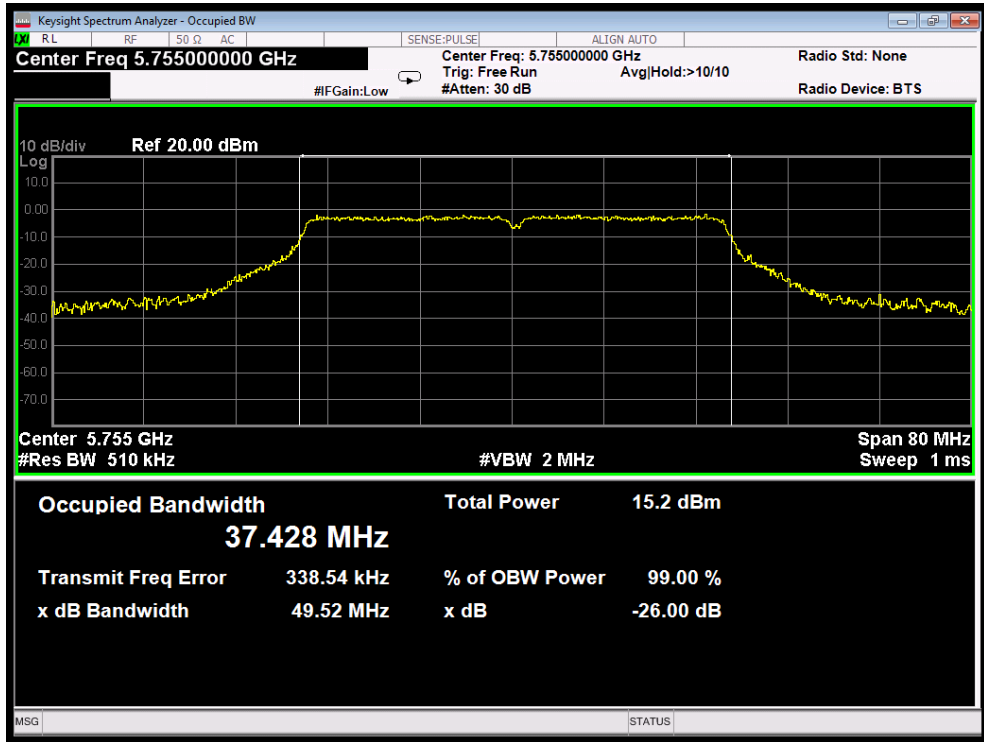

Test Mode: 802.11n40---Low

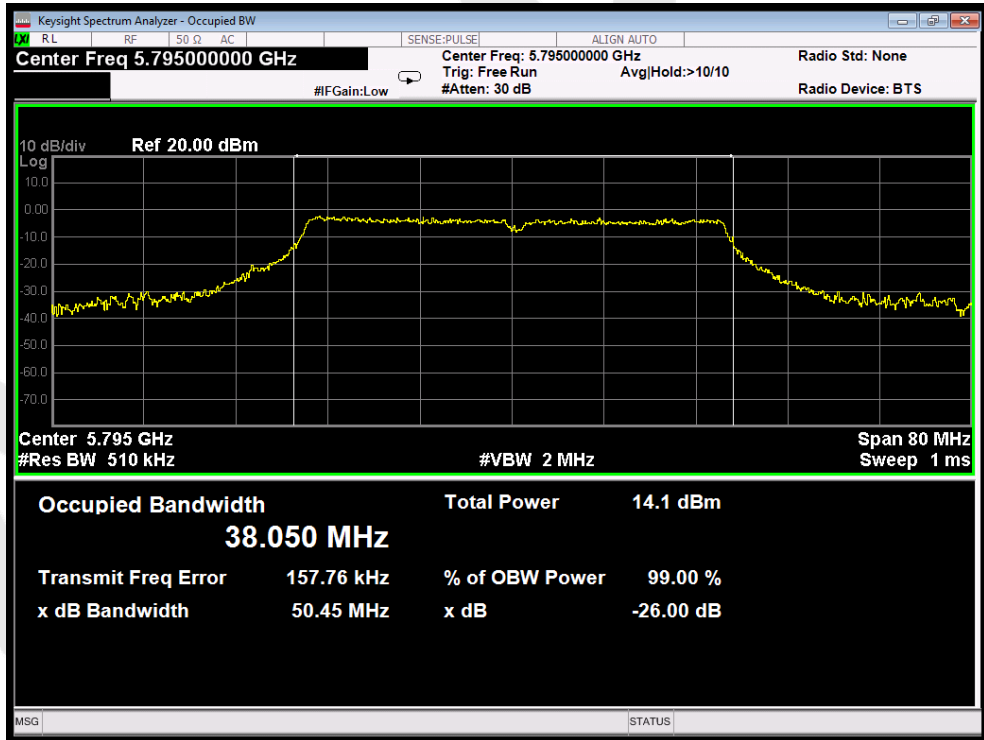


Test Mode: 802.11n40---High

7. Power Spectral Density Test

7.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.407 (a) (3)
Test Limit	not exceed 30dBm/500kHz

7.2. Test Setup

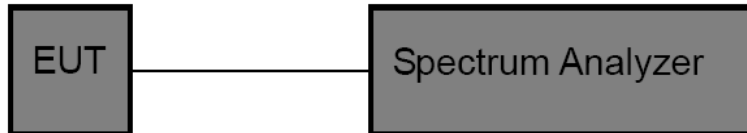

7.3. Test Procedure


For devices operating in the bands 5.15-5.25 GHz, 5.25-5.35 GHz, and 5.47-5.725 GHz, the above procedures make use of 1 MHz RBW to satisfy directly the 1 MHz reference bandwidth specified in § 15.407(a)(5). For devices operating in the band 5.725-5.85 GHz, the rules specify a measurement bandwidth of 500 kHz. Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of a RBWs less than 1 MHz, or 500 kHz, “provided that the measured power is integrated over the full reference bandwidth” to show the total power over the specified measurement bandwidth (i.e., 1 MHz, or 500 kHz).

1. The EUT is directly connected to the spectrum analyzer;
2. Set RBW =510KHz;
3. Set VBW ≥ 3 RBW;
3. Set the span to encompass the entire emissions bandwidth (EBW) of the signal;
5. Detector=RMS;
6. Sweep time= auto couple;
7. Trace mode=max. hold;


7.4. Test Data

Test Item	: Power Spectral Density	Test Mode	: CH Low ~ CH High
Test Voltage	: AC 120V/60HZ	Temperature	: 24°C
Test Result	: PASS	Humidity	: 55%RH


Test Mode	Channel Frequency (MHz)	Final Power Spectral Density (dBm)			Correctional Limit (dBm)	Results
		ANT		SUM		
802.11a	5745	2.071			30	PASS
	5785	1.615			30	PASS
	5825	2.865			30	PASS
802.11n20	5745	1.365			30	PASS
	5785	1.264			30	PASS
	5825	2.107			30	PASS
802.11n40	5755	-1.499			30	PASS
	5795	-0.653			30	PASS

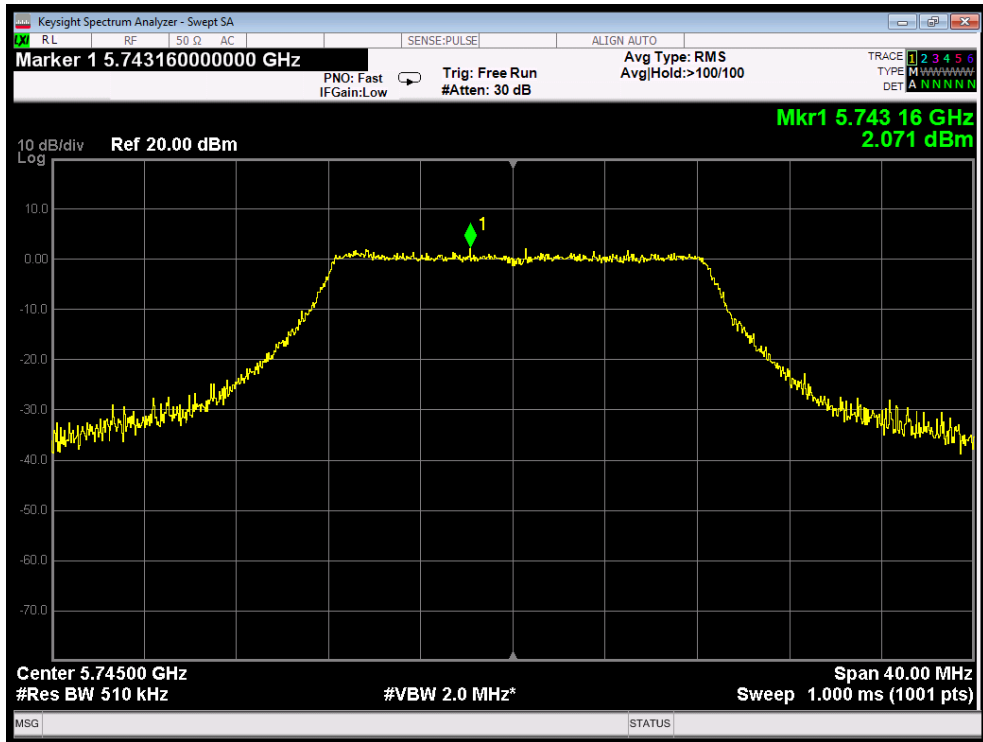


Test Mode: 802.11a--Low

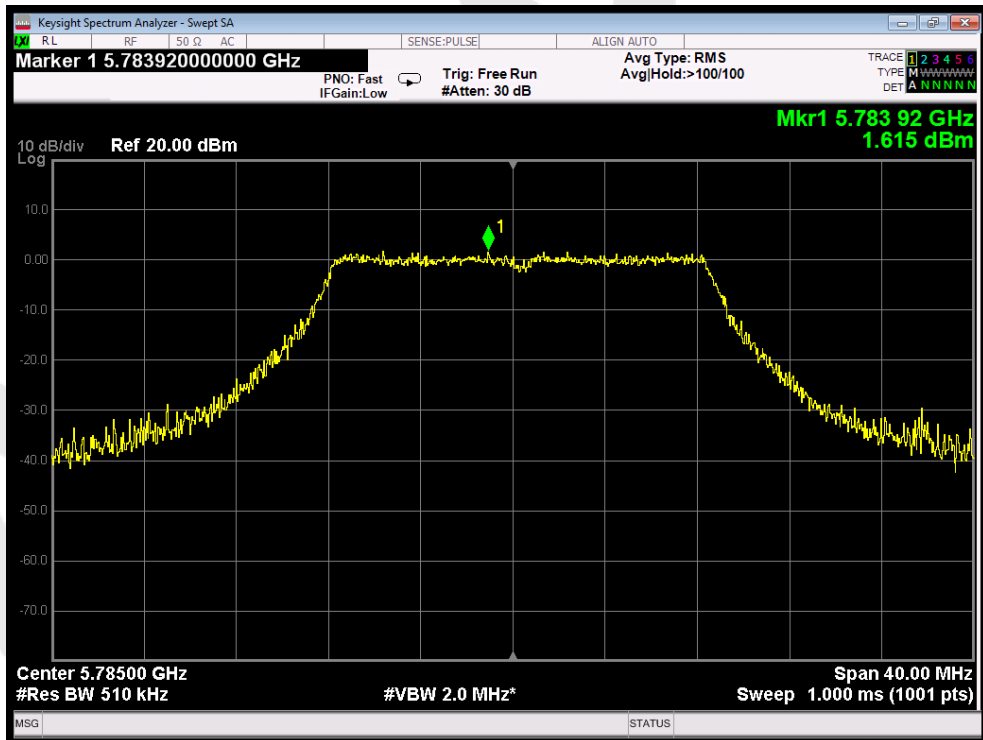


Test Mode: 802.11a---Middle

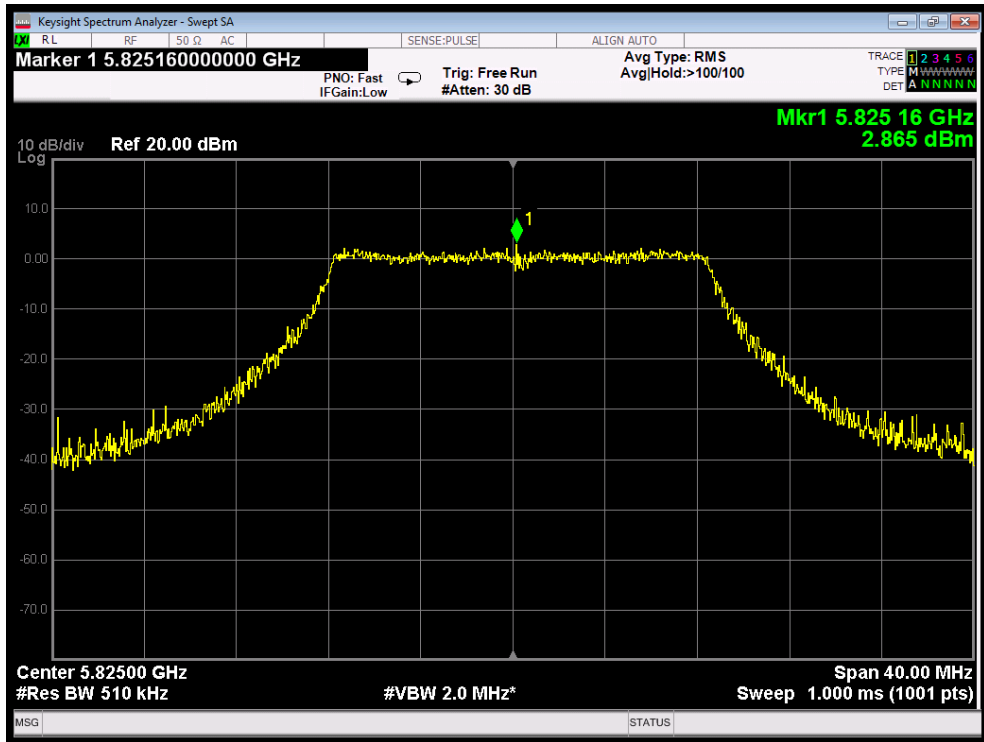


Test Mode: 802.11a---High

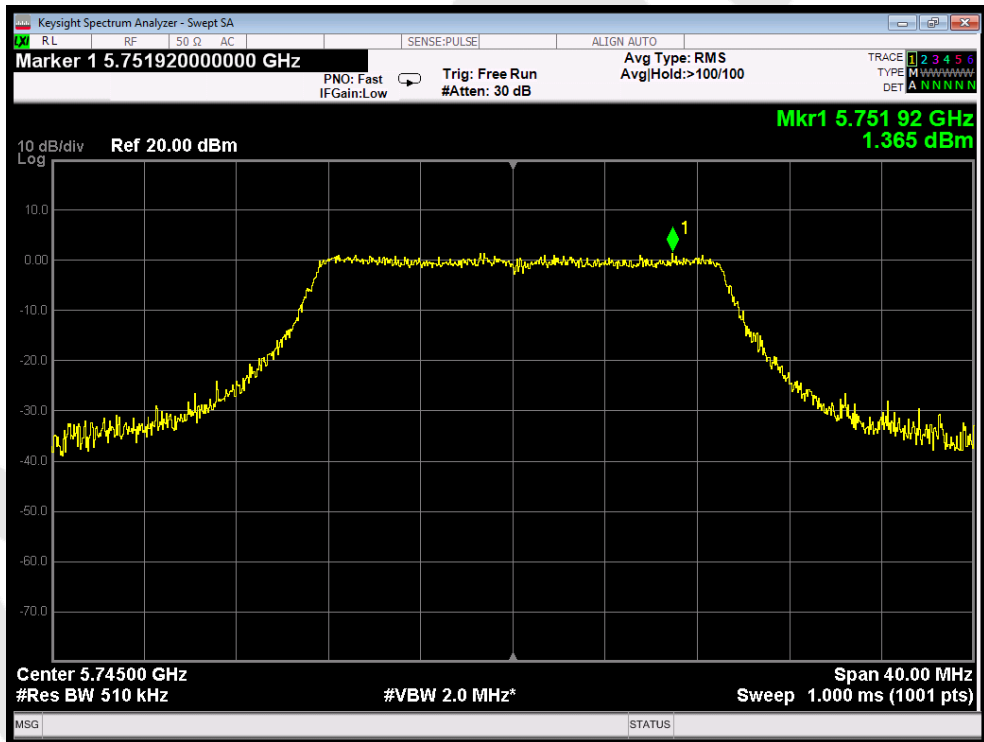


Test Mode: 802.11n20---Low

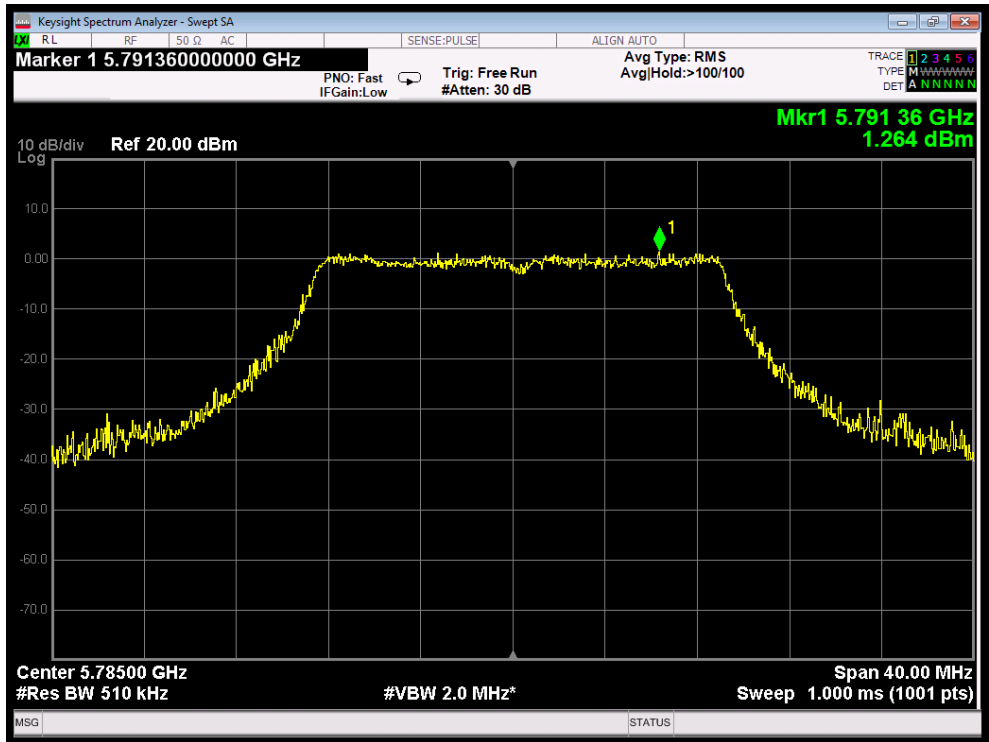


Test Mode: 802.11n20---Middle

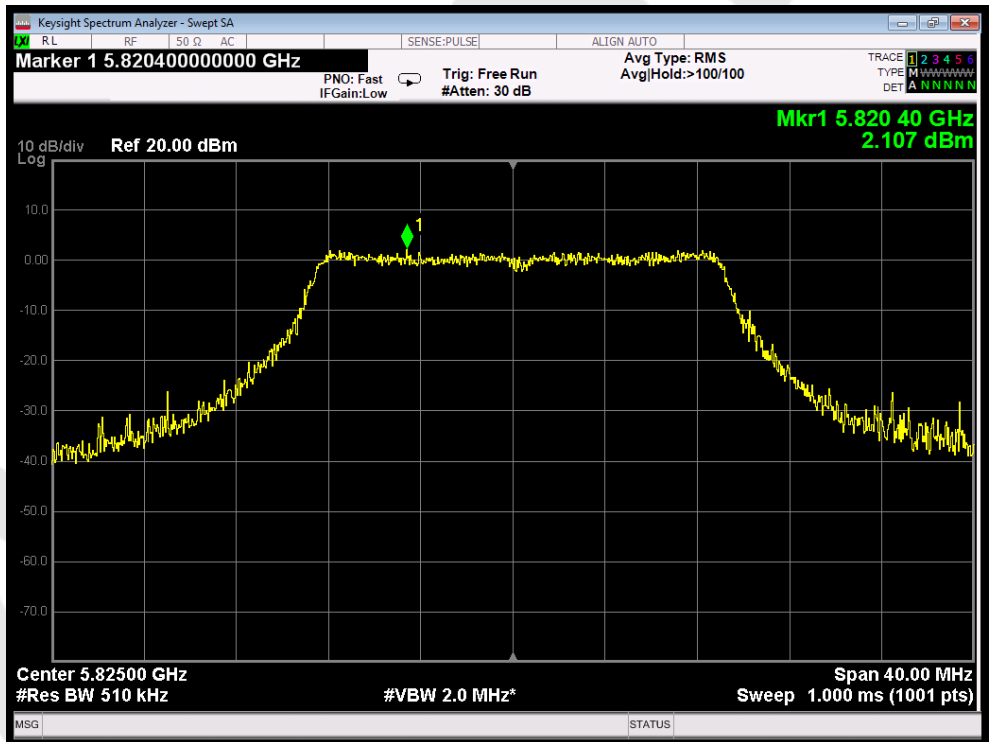

Test Mode: 802.11n20---High

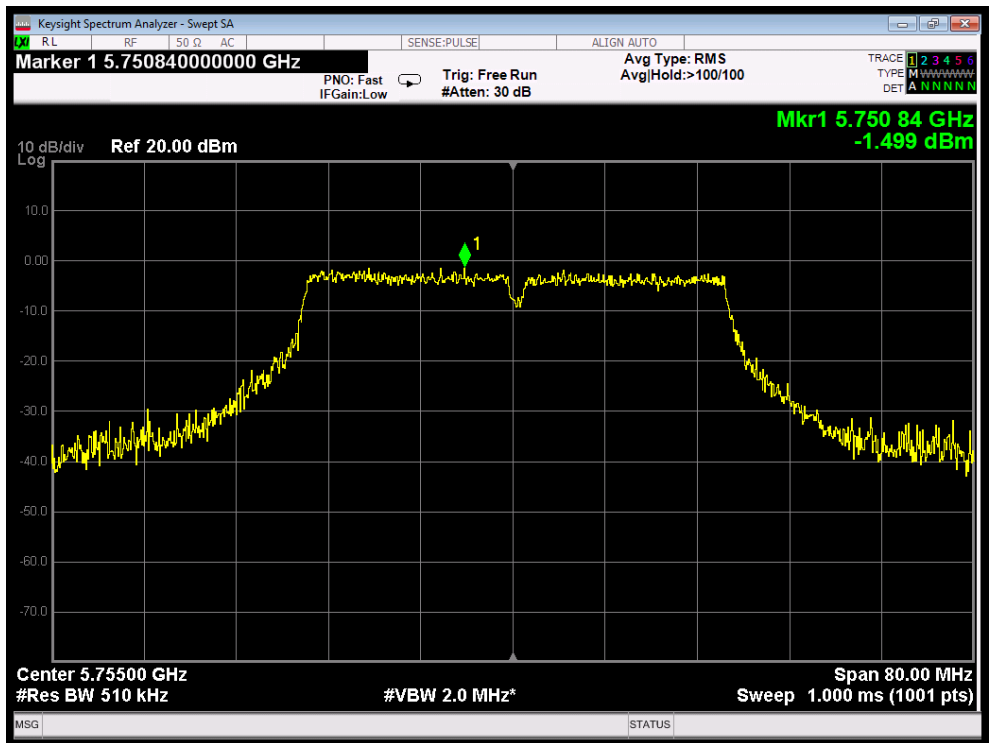

Test Mode: 802.11n40---Low

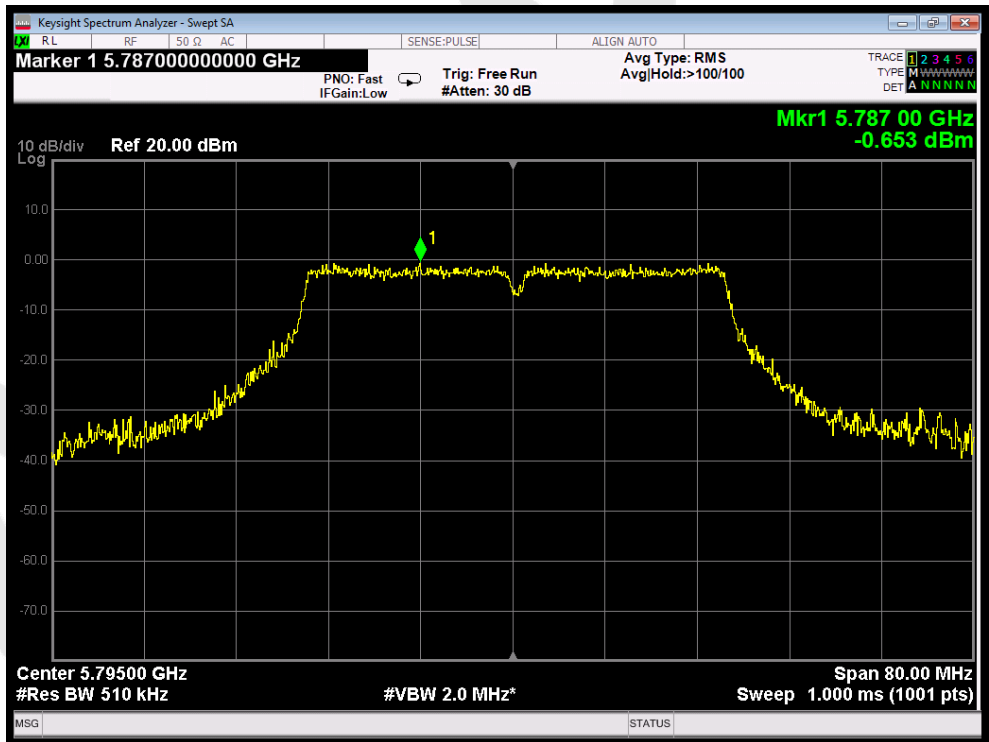

Test Mode: 802.11n40---High


8. Antenna Requirement

8.1. Test Standard and Requirement

Test Standard	FCC Part15 Section 15.203 /15.407
Requirement	<p>1) 15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</p> <p>2) 15.407 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.</p>

8.2. Antenna Connected Construction

The WIFI antenna is a PIFA antenna which permanently attached, and the best case gain of the antenna is 0.58 dBi. It complies with the standard requirement.

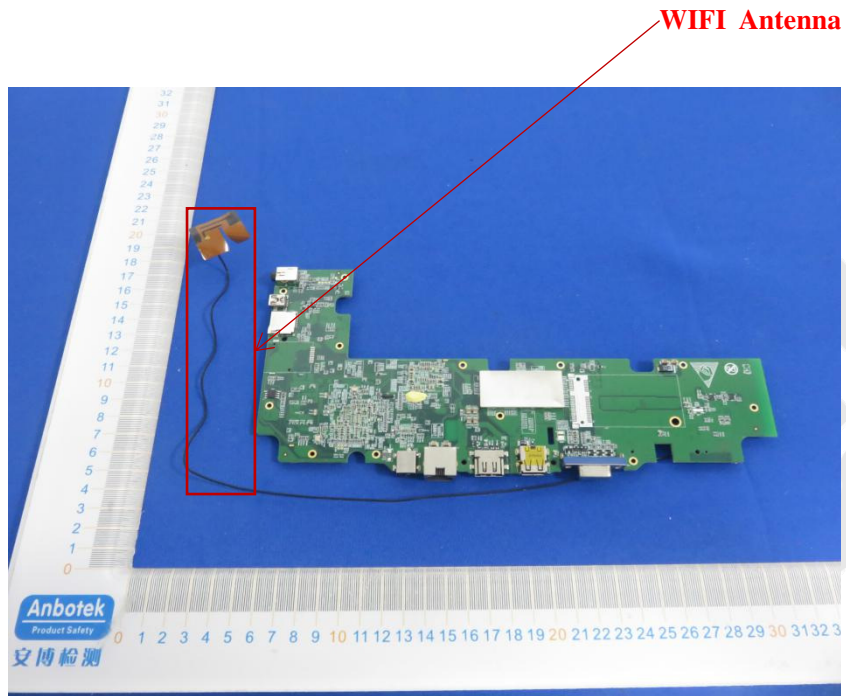

APPENDIX I -- TEST SETUP PHOTOGRAPH

Please see the test report of R0217100096W1

Anbotek

APPENDIX II -- EXTERNAL PHOTOGRAPH

Please see the test report of R0217100096W1

Anbotek

APPENDIX III -- INTERNAL PHOTOGRAPH

Please see the test report of R0217100096W1

Anbotek

End of Report