

## Perliminary

TQJ-3700AT6-NJ

Fiberglass Omni Antenna

## Technical Sheet




### Applications

- 3.6~3.8GHz Band
- Point to Multipoint


### Features

- Low VSWR
- High Quality Fiberglass Radome
- Supplied with mounting kits
- Mast mounting
- Integral N-male connector
- Can work with M110N big magnetic mount

E Plane



H Plane

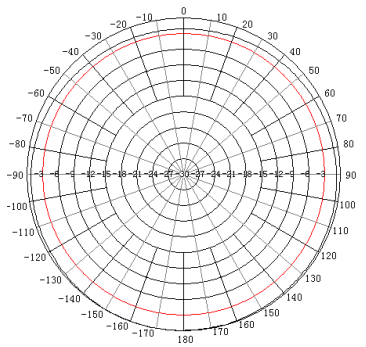


The picture is for reference only.

## Specifications

Model	TQJ-3700AT6-NJ
Freq.Range-MHz	3600~3800
Bandwidth-MHz	200
Gain-dBi	6
Ver.Beamwidth-°	24
VSWR	≤1.7
Impedance-Ω	50
Polarization	Vertical
Max.Power-W	100
Connector	N male
Dimension-mm	300 ref.
Mounting way	Mast
Mast Diameter-mm	φ 30 to 50 (when working with mounting kit)
Weight-Kg	0.2
Temperature Range	-40 to +65deg

## Installation Sketch

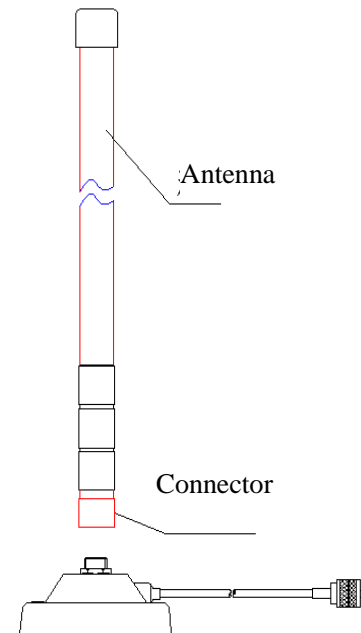

M110N big magnetic mount



Kenbotong Communication LTD.

Addr: Kenbotong Building, Changrong rd. Foshan, Guangdong, China.

528000

Tel: +86-757-82219788, 82126632 Fax: +86-757-82212072

Email: kbt@kenbotong.com web: <http://www.kenbotong.com>