



EMC TEST REPORT

Applicant ID TECH
FCC ID WQJ-KIISREDB
Product ViVOpay Kiosk III SRED
Brand ViVOpay
Model ViVOpay Kiosk III SRED
Report No. R1811A0498-E1
Issue Date December 28, 2018

TA Technology (Shanghai) Co., Ltd. tested the above equipment in accordance with the requirements in **FCC Code CFR47 Part15B (2018)/ ANSI C63.4 (2014)**. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Wei Liu

Guangchang Fan

Performed by: Wei Liu/ Manager

Approved by: Guangchang Fan/ Director

TA Technology (Shanghai) Co., Ltd.

No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China

TEL: +86-021-50791141/2/3

FAX: +86-021-50791141/2/3-8000



Table of Contents

1	Test Laboratory.....	4
1.1	Notes of the Test Report.....	4
1.2	Test facility.....	4
1.3	Testing Location.....	5
2	General Description of Equipment under Test.....	6
2.1	Client Information.....	6
2.2	General information.....	6
2.3	Applied Standards.....	7
2.4	Test Mode.....	8
3	Test Case Results.....	9
3.1	Radiated Emission.....	9
3.2	Conducted Emission.....	13
4	Main Test Instrument.....	15
ANNEX A: The EUT Appearance and Test Configuration.....		16
A.1	EUT Appearance.....	16
A.2	Test Setup.....	19



Summary of measurement results

Number	Test Case	Clause in FCC Rules	Conclusion
1	Radiated Emission	FCC Part15.109, ANSI C63.4-2014	PASS
2	Conducted Emission	FCC Part15.107, ANSI C63.4-2014	PASS
Test Date: November 16, 2018 ~ November 28, 2018			

1 Test Laboratory

1.1 Notes of the Test Report

This report shall not be reproduced in full or partial, without the written approval of **TA technology (shanghai) co., Ltd.** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein .Measurement Uncertainties were not taken into account and are published for informational purposes only. This report is written to support regulatory compliance of the applicable standards stated above.

1.2 Test facility

CNAS (accreditation number: L2264)

TA Technology (Shanghai) Co., Ltd. has obtained the accreditation of China National Accreditation Service for Conformity Assessment (CNAS).

FCC (Designation number: CN1179, Test Firm Registration Number: 446626)

TA Technology (Shanghai) Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.

IC (recognition number is 8510A)

TA Technology (Shanghai) Co., Ltd. has been listed by industry Canada to perform electromagnetic emission measurement.

VCCI (recognition number is C-4595, T-2154, R-4113, G-10766)

TA Technology (Shanghai) Co., Ltd. has been listed by industry Japan to perform electromagnetic emission measurement.

A2LA (Certificate Number: 3857.01)

TA Technology (Shanghai) Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform electromagnetic emission measurement.



1.3 Testing Location

Company: TA Technology (Shanghai) Co., Ltd.
Address: No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China
City: Shanghai
Post code: 201201
Country: P. R. China
Contact: Xu Kai
Telephone: +86-021-50791141/2/3
Fax: +86-021-50791141/2/3-8000
Website: <http://www.ta-shanghai.com>
E-mail: xukai@ta-shanghai.com

2 General Description of Equipment under Test

2.1 Client Information

Applicant	ID TECH
Applicant address	10721 Walker Street, Cypress, California 90630 Cypress, California
Manufacturer	ID TECH
Manufacturer address	10721 Walker Street Cypress, CA 90630 Cypress, CA / United States

2.2 General information

EUT Description	
Device Type:	Equipment for Building-in Device
Model Number:	ViVOpay Kiosk III SRED
SN:	842T189852
HW Version:	80136110 Rev.B
SW Version:	80136120 Rev.B
Antenna Type:	External Antenna
Frequency Range(s):	13.56MHz ± 7kHz
Test Mode:	Transfer Data Mode
<p>Note: The information of the EUT is declared by the manufacturer.</p> <p>2. The EUT don't have standard Adapter. The adapter used for testing in this report is the after-market accessory.</p> <p>3. There is more than one Antenna (Antenna 1 and Antenna 2, each one should be applied throughout the compliance test respectively, however, only the worst case (Antenna 1) will be recorded in this report.</p>	



2.3 Applied Standards

According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

Test standards

FCC Code CFR47 Part15B (2018)

ANSI C63.4 (2014)

2.4 Test Mode

Test Mode	
Mode 1	External Power Supply + EUT + Antenna1 +Idle
Mode 2	External Power Supply + EUT + Antenna2 +Idle

During the test, the preliminary test was performed in all modes, and mode 1 selected as the worst condition for radiated emissions. The test data of the worst-case condition was recorded in this report.

3 Test Case Results

3.1 Radiated Emission

Ambient condition

Temperature	Relative humidity	Pressure
24°C~26°C	45%~50%	102.5kPa

Methods of Measurement

The EUT is placed on a non-metallic table 0.8m above the horizontal metal reference ground plane. The distance between EUT and receive antenna should be 3 meters. During the test, the EUT was operating in its typical mode. The test method is according to ANSI C63.4-2014. Sweep the whole frequency band through the range from 30MHz to the 5th harmonic of the carrier. During the test, the height of receive antenna shall be moved from 1 to 4 meters, and the antenna shall be performed under horizontal and vertical polarization. The turn table shall be rotated from 0 to 360 degrees for detecting the maximum of radiated signal level.

The data of cable loss and antenna factor has been calibrated in full testing frequency range before the testing. During the test, the EUT is worked at maximum output power.

Set the spectrum analyzer in the following:

Below 1GHz:

RBW=100 kHz / VBW=300 kHz / Sweep=AUTO

Above 1GHz:


(a) PEAK: RBW=1MHz / VBW=3MHz/ Sweep=AUTO

(b) AVERAGE: RBW=1MHz / VBW=1Hz / Sweep=AUTO


The radiated emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in stand-up position (Z axis) and the worst case was recorded.

Test Setup

Below 1GHz

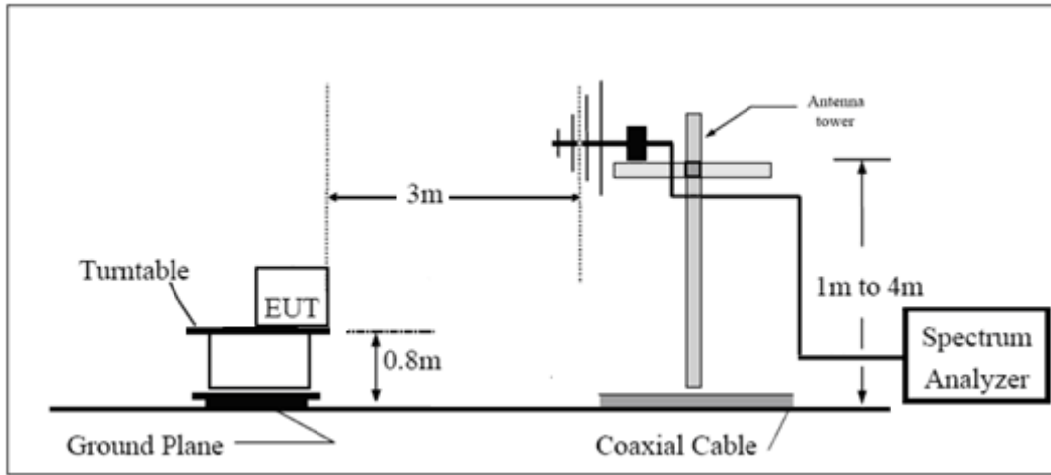

Above 1GHz

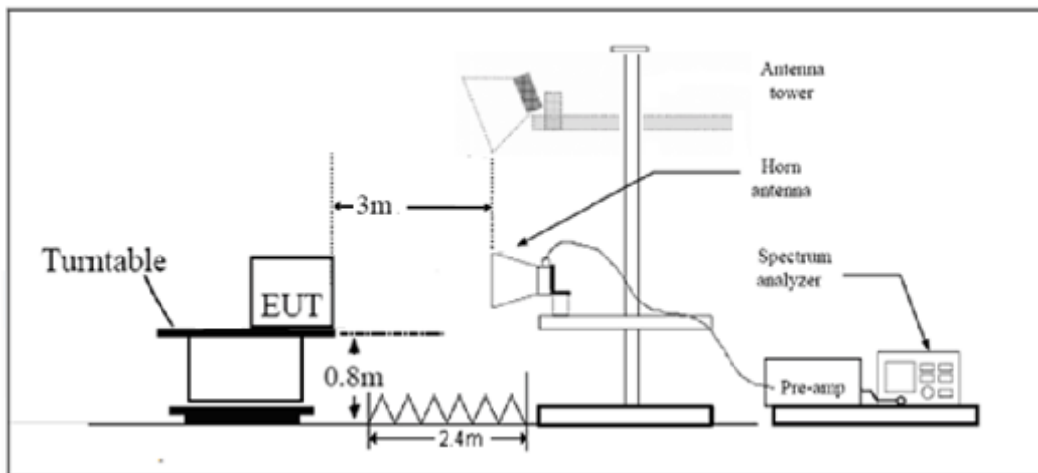

Note: Area side:2.4mX3.6m

Antenna Tower meets ANSI C63.4 requirements for measurements above 1 GHz by keeping the antenna aimed at the EUT during the antenna's ascent/ descent along the antenna mast.

Limits

Frequency (MHz)	Field Strength (dB μ V/m)	Detector
30 -88	40.0	Quasi-peak
88-216	43.5	Quasi-peak
216 – 960	46.0	Quasi-peak
960-1000	54.0	Quasi-peak
1000-5 th harmonic of the highest frequency or 40GHz, which is lower	54 74	Average Peak

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$.


Frequency	Uncertainty
30MHz~200MHz	4.02 dB
200MHz~1000MHz	3.28 dB
1GHz~18GHz	3.70 dB
18GHz~26.5GHz	5.78 dB
26.5GHz~40GHz	5.82 dB

Test Results

Sweep the whole frequency band through the range from 30MHz to the 5th harmonic of the carrier,

The following graphs display the maximum values of horizontal and vertical by software.
For above 1GHz, Blue trace uses the peak detection, Green trace uses the average detection.

Copy of RE 0.03-1GHz QP Class B

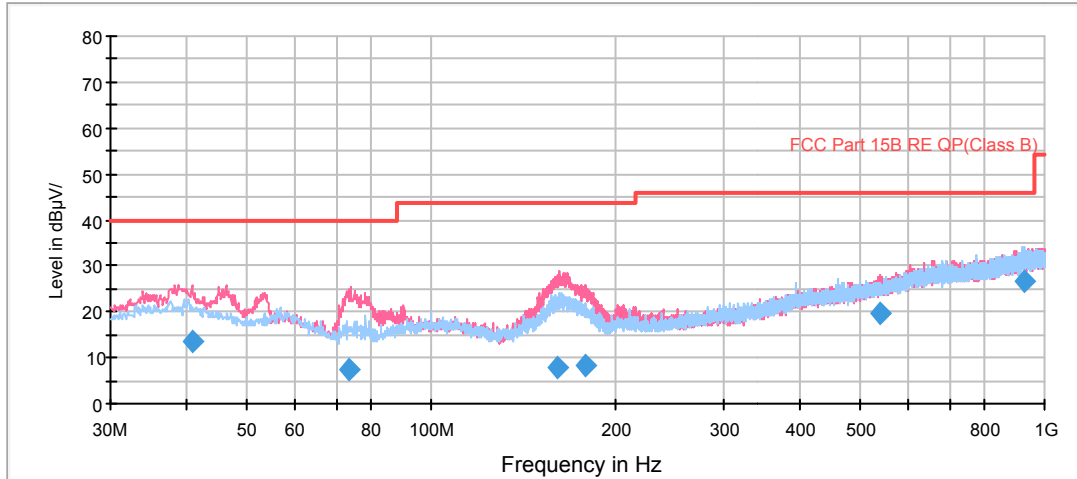

Radiates Emission from 30MHz to 1GHz

Note: This graph displays the maximum values of horizontal and vertical by software

Frequency (MHz)	Quasi-Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
40.831250	13.7	100.0	V	285.0	-3.2	16.9	26.3	40.0
73.535000	7.4	200.0	V	285.0	-2.7	10.1	32.6	40.0
160.835000	8.1	100.0	V	74.0	-2.0	10.1	35.4	43.5
177.925000	8.4	100.0	V	157.0	-2.5	10.9	35.1	43.5
539.976250	19.8	200.0	V	133.0	-2.0	21.8	26.2	46.0
929.957500	26.5	200.0	H	306.0	-0.4	26.9	19.5	46.0

3.2 Conducted Emission


Ambient condition

Temperature	Relative humidity	Pressure
24°C ~26°C	50%~55%	102.5kPa

Methods of Measurement

The EUT is placed on a non-metallic table of 80cm height above the horizontal metal reference ground plane. During the test, the EUT was operating in its typical mode. The test method is according to ANSI C63.4-2014. Connect the AC power line of the EUT to the L.I.S.N. Use EMI receiver to detect the average and Quasi-peak value. RBW is set to 9 kHz, VBW is set to 30kHz. The measurement result should include both L line and N line.

Test Setup

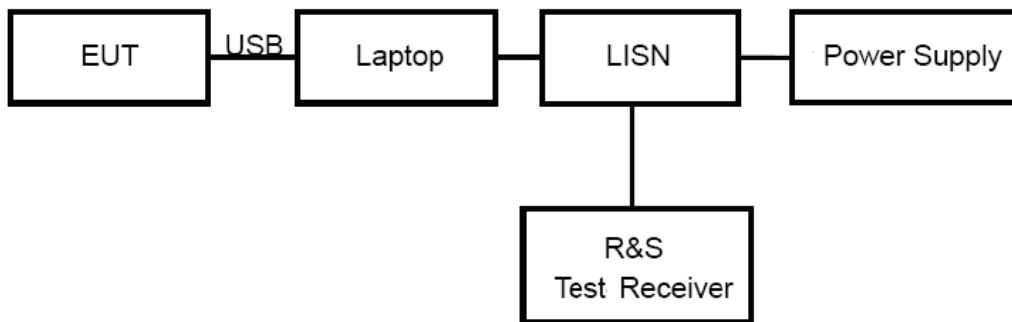

Note: Power Supply is AC Power source and it is used to change the voltage 120V/60Hz.

Limits

Frequency (MHz)	Conducted Limits(dBμV)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 *	56 to 46 *
0.5 - 5	56	46
5 - 30	60	50


*: Decreases with the logarithm of the frequency.

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$. $U = 2.57$ dB.

Test Results


Following plots, Blue trace uses the peak detection; Green trace uses the average detection.

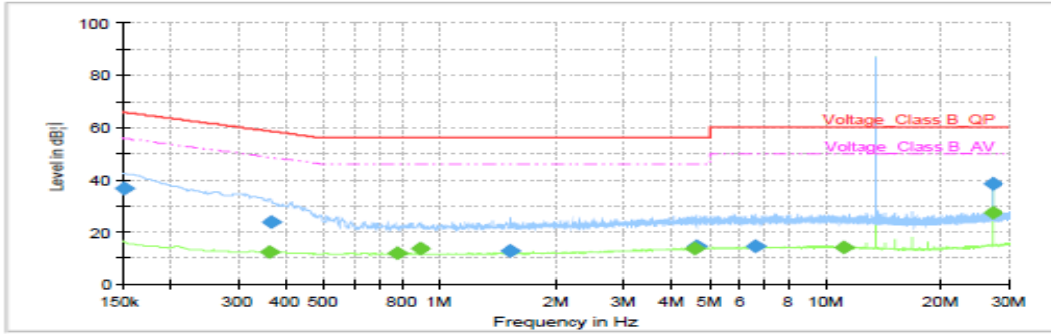

Frequency (MHz)	QuasiPeak (dB; i V)	Average (dB; i V)	Limit (dB; i V)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)	Comment
0.152250	36.55	---	65.88	29.33	1000.0	9.000	L1	ON	19.0	
0.361500	---	12.54	48.69	36.15	1000.0	9.000	L1	ON	19.2	
0.363750	23.71	---	58.64	34.93	1000.0	9.000	L1	ON	19.2	
0.771000	---	12.01	46.00	33.99	1000.0	9.000	L1	ON	19.2	
0.883500	---	13.61	46.00	32.39	1000.0	9.000	L1	ON	19.2	
1.518000	12.86	---	56.00	43.14	1000.0	9.000	L1	ON	19.2	
4.553250	---	13.52	46.00	32.48	1000.0	9.000	L1	ON	19.1	
4.620750	14.58	---	56.00	41.42	1000.0	9.000	L1	ON	19.1	
6.609750	14.60	---	60.00	45.40	1000.0	9.000	L1	ON	19.1	
11.136750	---	14.27	50.00	35.73	1000.0	9.000	L1	ON	19.4	
27.116250	---	27.47	50.00	22.53	1000.0	9.000	L1	ON	20.0	
27.116250	38.57	---	60.00	21.43	1000.0	9.000	L1	ON	20.0	

L line

Conducted Emission from 150 KHz to 30 MHz

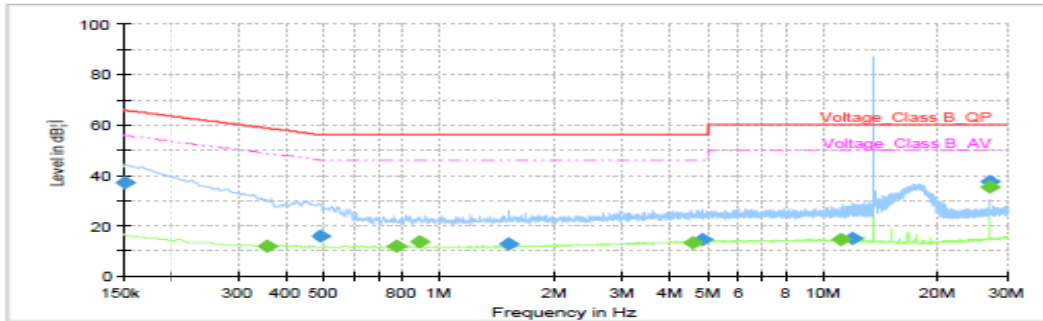

Frequency (MHz)	QuasiPeak (dB; i V)	Average (dB; i V)	Limit (dB; i V)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)	Comment
0.152250	37.12	---	65.88	28.76	1000.0	9.000	N	ON	19.1	
0.354750	---	11.95	48.85	36.90	1000.0	9.000	N	ON	19.2	
0.489750	16.12	---	56.17	40.05	1000.0	9.000	N	ON	19.2	
0.771000	---	11.97	46.00	34.03	1000.0	9.000	N	ON	19.2	
0.883500	---	13.82	46.00	32.18	1000.0	9.000	N	ON	19.2	
1.518000	12.95	---	56.00	43.05	1000.0	9.000	N	ON	19.2	
4.553250	---	13.43	46.00	32.57	1000.0	9.000	N	ON	19.1	
4.839000	14.71	---	56.00	41.29	1000.0	9.000	N	ON	19.1	
11.116500	---	14.40	50.00	35.60	1000.0	9.000	N	ON	19.4	
11.879250	15.15	---	60.00	44.85	1000.0	9.000	N	ON	19.4	
27.116250	---	35.29	50.00	14.71	1000.0	9.000	N	ON	19.9	
27.118500	37.65	---	60.00	22.35	1000.0	9.000	N	ON	19.9	

N line

Conducted Emission from 150 KHz to 30 MHz



4 Main Test Instrument

Name	Manufacturer	Type	Serial Number	Last Cal.	Cal. Due Date
Signal Analyzer	R&S	FSV30	100815	2017-12-17	2018-12-16
EMI Test Receiver	R&S	ESCI	100948	2018-05-20	2019-05-19
Trilog Antenna	SCHWARZBECK	VULB 9163	9163-201	2017-11-18	2019-11-17
Horn Antenna	R&S	HF907	100126	2018-07-07	2020-07-06
EMI Test Receiver	R&S	ESR	101667	2018-05-20	2019-05-19
LISN	R&S	ENV216	101171	2016-12-16	2019-12-15
Bore Sight Antenna mast	ETS	2171B	00058752	/	/
Test software	EMC32	R&S	9.26.0	/	/


*****END OF REPORT *****

ANNEX A: The EUT Appearance and Test Configuration

A.1 EUT Appearance



Front Side

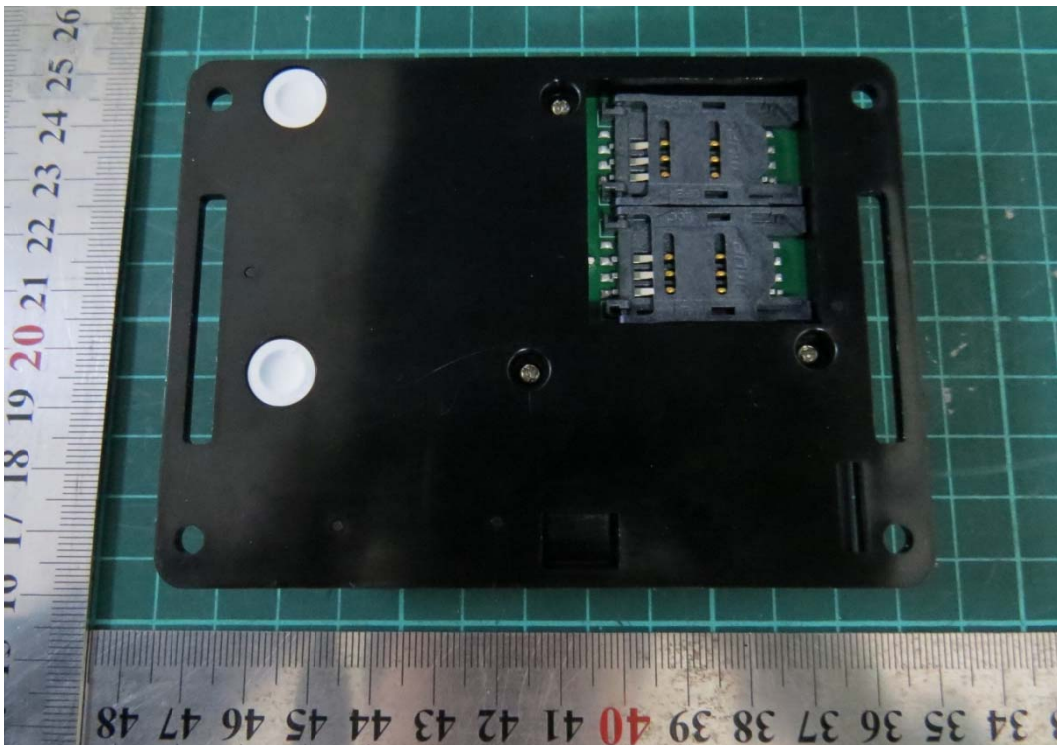

Back Side

a: EUT



Antenna1



Antenna 2

b: Antenna



power line




connecting line

c: USB Cable

Picture 1 EUT and Accessory

A.2 Test Setup

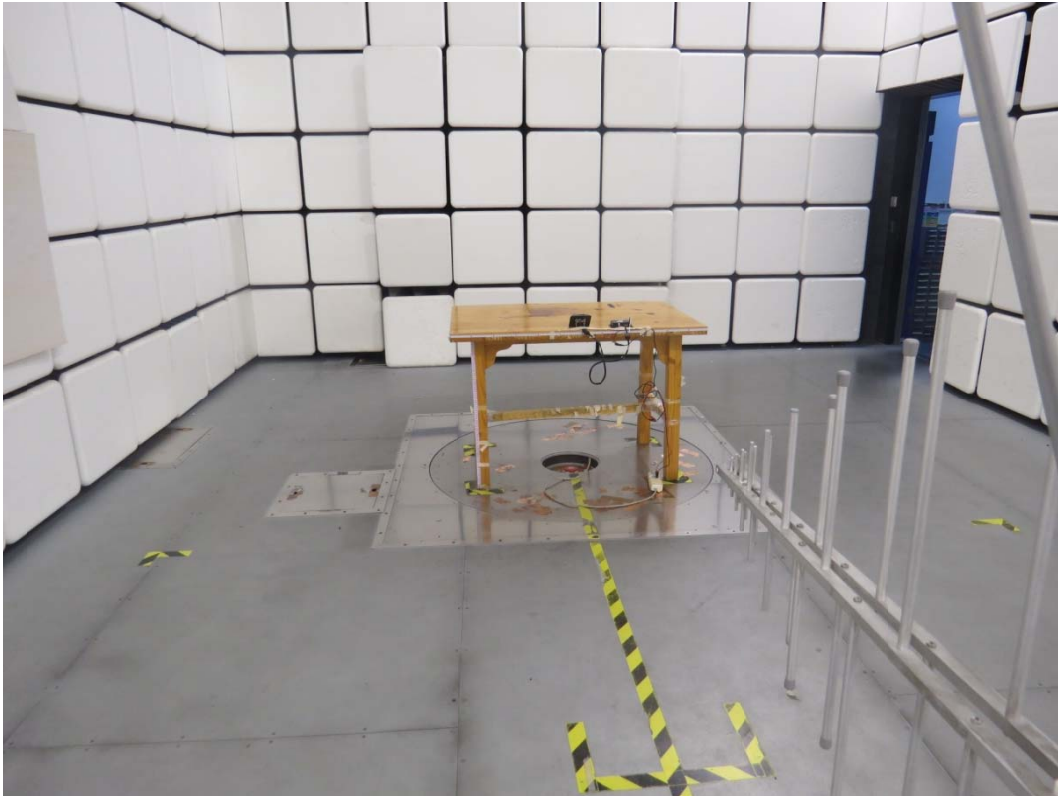

Below 1GHz

Picture 2 Radiated Emission Test Setup



Picture 3 Conducted Emission Test Setup