

FCC PART 15.247  
TEST REPORT

For

**ESPRESSIF SYSTEMS (SHANGHAI) PTE LTD**

456 Bibo Road Room A201, Shanghai, China

**FCC ID: 2AC7Z-ESP32WROVER**


<b>Report Type:</b> Original Report	<b>Product Type:</b> WIFI & Bluetooth Module
<b>Test Engineer:</b> Belle Cheng	<i>Belle.cheng</i>
<b>Report Number:</b> RKS170517002-00A	
<b>Report Date:</b> 2017-05-25	
<b>Reviewed By:</b> Oscar Ye RF Leader	<i>Oscar.Ye</i>
<b>Prepared By:</b>	Bay Area Compliance Laboratories Corp. (Kunshan) No.248 Chenghu Road, Kunshan, Jiangsu province, China Tel: +86-0512-86175000 Fax: +86-0512-88934268 <a href="http://www.baclcorp.com.cn">www.baclcorp.com.cn</a>

**Note:** This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

## TABLE OF CONTENTS

<b>GENERAL INFORMATION.....</b>	<b>4</b>
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	4
OBJECTIVE .....	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY .....	4
MEASUREMENT UNCERTAINTY.....	5
TEST FACILITY .....	5
<b>SYSTEM TEST CONFIGURATION.....</b>	<b>6</b>
DESCRIPTION OF TEST CONFIGURATION .....	6
EUT EXERCISE SOFTWARE .....	6
SPECIAL ACCESSORIES.....	6
EQUIPMENT MODIFICATIONS .....	6
SUPPORT EQUIPMENT LIST AND DETAILS .....	7
EXTERNAL I/O CABLE.....	7
BLOCK DIAGRAM OF TEST SETUP .....	7
<b>SUMMARY OF TEST RESULTS.....</b>	<b>9</b>
<b>TEST EQUIPMENT LIST .....</b>	<b>10</b>
<b>FCC§15.247 (i), §1.1310&amp; §2.1091 –MAXIMUM PERMISSIBLE EXPOSURE (MPE).....</b>	<b>11</b>
APPLICABLE STANDARD .....	11
MEASUREMENT RESULT .....	12
<b>FCC §15.203 – ANTENNA REQUIREMENT.....</b>	<b>13</b>
APPLICABLE STANDARD .....	13
ANTENNA CONNECTOR CONSTRUCTION .....	13
<b>FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS .....</b>	<b>14</b>
APPLICABLE STANDARD .....	14
EUT SETUP.....	14
EMI TEST RECEIVER SETUP.....	14
TEST PROCEDURE .....	14
CORRECTED FACTOR & MARGIN CALCULATION .....	15
TEST RESULTS SUMMARY .....	15
TEST DATA .....	15
<b>FCC §15.205, §15.209 &amp; §15.247(d) – RADIATED EMISSIONS.....</b>	<b>18</b>
APPLICABLE STANDARD .....	18
MEASUREMENT UNCERTAINTY.....	18
EUT SETUP .....	18
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP .....	19
TEST PROCEDURE .....	19
CORRECTED AMPLITUDE & MARGIN CALCULATION .....	19
TEST RESULTS SUMMARY .....	20
TEST DATA .....	20
<b>FCC §15.247(a) (1)-CHANNEL SEPARATION TEST .....</b>	<b>24</b>
APPLICABLE STANDARD .....	24
TEST PROCEDURE .....	24
TEST DATA .....	24

<b>FCC §15.247(a) (1) – 20 dB EMISSION BANDWIDTH.....</b>	<b>30</b>
APPLICABLE STANDARD .....	30
TEST PROCEDURE .....	30
TEST DATA .....	30
<b>FCC §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL TEST .....</b>	<b>36</b>
APPLICABLE STANDARD .....	36
TEST PROCEDURE .....	36
TEST DATA .....	36
<b>FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME).....</b>	<b>39</b>
APPLICABLE STANDARD .....	39
TEST PROCEDURE .....	39
TEST DATA .....	39
<b>FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT .....</b>	<b>55</b>
APPLICABLE STANDARD .....	55
TEST PROCEDURE .....	55
TEST DATA .....	55
<b>FCC §15.247(d) - BAND EDGES TESTING .....</b>	<b>61</b>
APPLICABLE STANDARD .....	61
TEST PROCEDURE .....	61
TEST DATA .....	61

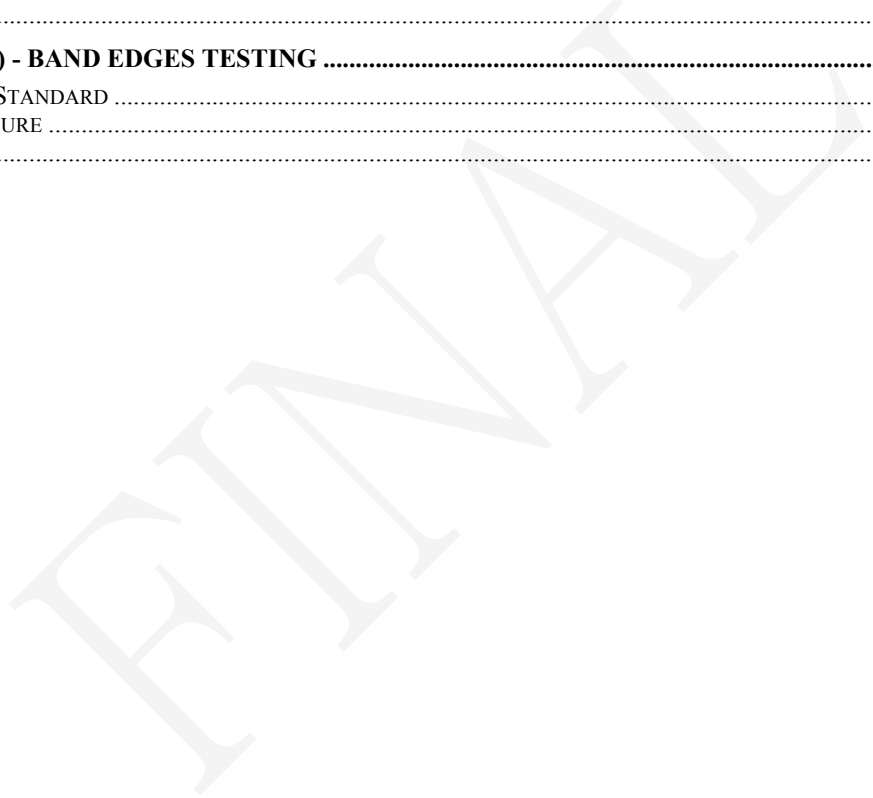

## GENERAL INFORMATION

### Product Description for Equipment under Test (EUT)

Applicant	ESPRESSIF SYSTEMS (SHANGHAI) PTE LTD
Tested Model	ESP32-WROVER
Product Type	WIFI & Bluetooth Module
Dimension	18 mm(L) × 31.4 mm(W) × 3.3mm(H)
Power Supply	DC 3.3V

*\*All measurement and test data in this report was gathered from production sample serial number: 20170426002 (Assigned by the BACL. The EUT supplied by the applicant was received on 2017-04-26)*

### Objective

This test report is prepared on behalf of ESPRESSIF SYSTEMS (SHANGHAI) PTE LTD in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commissions rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

### Related Submittal(s)/Grant(s)

FCC Part 15.247 DTS submissions with FCC ID: 2AC7Z-ESP32WROVER.

### Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Kunshan). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

**Measurement Uncertainty**

Item		Uncertainty
AC Power Lines Conducted Emissions		3.19dB
RF conducted test with spectrum		0.9dB
RF Output Power with Power meter		0.5dB
Radiated emission	30MHz~1GHz	6.11dB
	1GHz~6GHz	4.45dB
	6GHz~18GHz	5.23dB
Occupied Bandwidth		0.5kHz
Temperature		1.0°C
Humidity		6%

**Test Facility**

The test site used by Bay Area Compliance Laboratories Corp. (Kunshan) to collect test data is located on the No.248 Chenghu Road, Kunshan, Jiangsu province, China.

Test site at Bay Area Compliance Laboratories Corp. (Kunshan) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on November 06, 2014. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2014.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 815570. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

## SYSTEM TEST CONFIGURATION

### Description of Test Configuration

For Bluetooth, 79 channels are provided for testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	40	2442
1	2403	...	...
2	2404	...	...
...	...	...	...
...	...	77	2479
39	2441	78	2480

EUT was tested with Channel 0, 39 and 78.

### EUT Exercise Software

RF Test Tool: ESP32\_RF\_TEST\_BIN\_V1.1.1

GFSK: Power level ATT 32

$\pi/4$ -DQPSK: Power level ATT 32

8DPSK: Power level ATT 32

### Special Accessories

No special accessory.

### Equipment Modifications

No modification was made to the EUT tested.

**Support Equipment List and Details**


Manufacturer	Description	Model	Serial Number
/	Control Board	ESP32-WROVER	/
DELL	Notebook	GX620	D65874152
DELL	Adapter	LA90PM130	/

**External I/O Cable**


Cable Description	Shielding Type	Length (m)	From Port	To
USB Cable	Unshielding	1.0	Control Board	Notebook

**Block Diagram of Test Setup**


For Conducted Emissions:

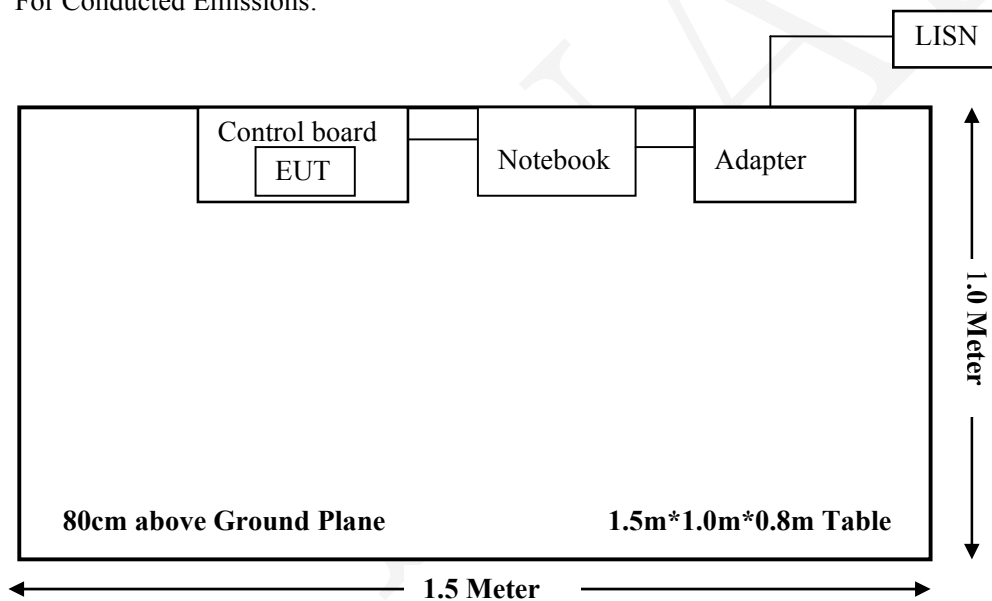

For Radiated Emissions (Below 1GHz):

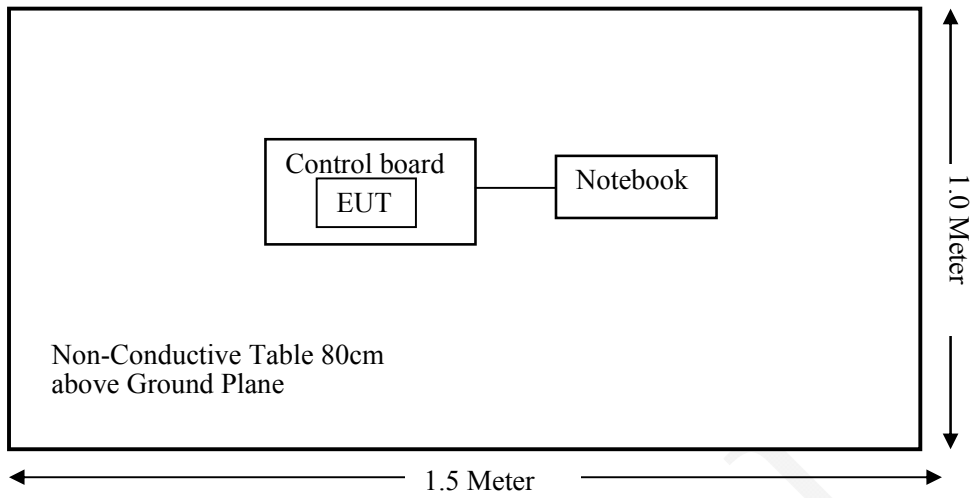

For Radiated Emissions (Above 1GHz):

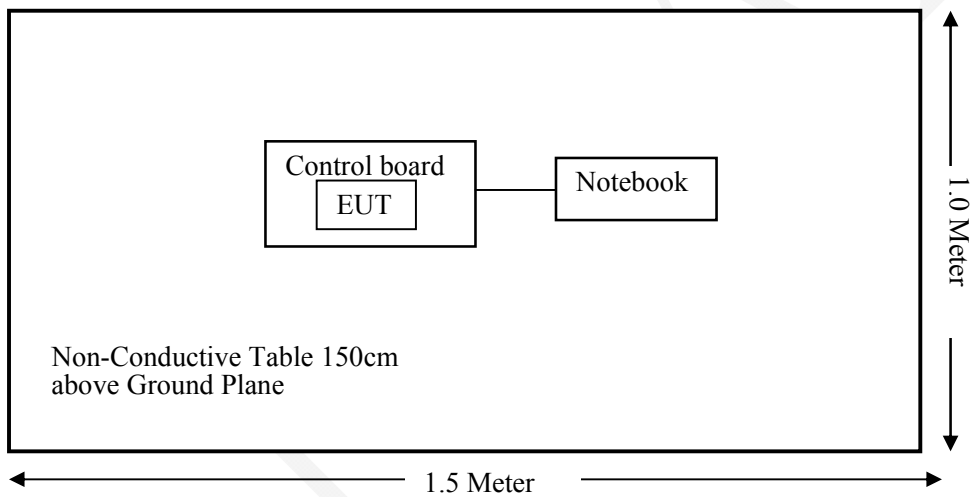



**SUMMARY OF TEST RESULTS**

<b>FCC Rules</b>	<b>Description of Test</b>	<b>Result</b>
§15.247 (i), §1.1310 & §2.1091	Maximum Permissible Exposure (MPE)	Compliance
§15.203	Antenna Requirement	Compliance
§15.207(a)	AC Line Conducted Emissions	Compliance
§15.205, §15.209 & §15.247(d)	Radiated Emissions	Compliance
§15.247(a)(1)	20 dB Emission Bandwidth	Compliance
§15.247(a)(1)	Channel Separation Test	Compliance
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliance
§15.247(a)(1)(iii)	Quantity of hopping channel Test	Compliance
§15.247(b)(1)	Peak Output Power Measurement	Compliance
§15.247(d)	Band edges	Compliance

**TEST EQUIPMENT LIST**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
<b>Radiated Emission Test</b>					
Rohde & Schwarz	EMI Test Receiver	ESCI	100195	2016-11-25	2017-11-24
Rohde & Schwarz	Signal Analyzer	FSIQ26	100048	2016-11-25	2017-11-24
Sunol Sciences	Broadband Antenna	JB3	A090314-2	2016-01-09	2019-01-08
ETS	Horn Antenna	3115	6229	2016-01-11	2019-01-10
ETS-LINDGREN	Horn Antenna	3116	00084159	2016-10-18	2019-10-17
Sonoma Instrument	Pre-amplifier	330N	160904	2016-10-21	2017-10-20
Narda	Pre-amplifier	AFS42-00101800	2001270	2016-12-12	2017-12-11
R&S	Auto test Software	EMC32	100361	/	/
Haojintech	Coaxial Cable	Cable-1	001	2016-12-12	2017-12-11
Haojintech	Coaxial Cable	Cable-2	002	2016-12-12	2017-12-11
Haojintech	Coaxial Cable	Cable-3	003	2016-12-12	2017-12-11
MICRO-COAX	Coaxial Cable	Cable-4	004	2016-12-12	2017-12-11
MICRO-COAX	Coaxial Cable	Cable-5	005	2016-12-12	2017-12-11
<b>RF Conducted Test</b>					
Rohde & Schwarz	Signal Analyzer	FSIQ26	836131/009	2016-09-21	2017-09-20
BACL	Temperature & Humidity Chamber	BTH-150	30023	2016-10-10	2017-10-09
ESPRESSIF	RF Cable	N/A	N/A	2017-05-17	2018-05-16
<b>Conducted Emission Test</b>					
Rohde & Schwarz	EMI Test Receiver	ESCI	100195	2016-11-25	2017-11-24
Rohde & Schwarz	LISN	ESH3-Z5	862770/011	2016-10-10	2017-10-09
ROHDE&SCHWARZ	LISN	ENV216	3560655016	2016-11-25	2017-11-24
Rohde & Schwarz	CE Test software	EMC 32	100357	/	/
MICRO-COAX	Coaxial Cable	Cable-6	006	2016-09-08	2017-09-07

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Kunshan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

**FCC§15.247 (i), §1.1310& §2.1091 –MAXIMUM PERMISSIBLE EXPOSURE (MPE)**

**Applicable Standard**

According to subpart 15.247(i)and subpart §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission’s guidelines.

Limits for Maximum Permissible Exposure (MPE) (§1.1310, §2.1091)

<b>(B) Limits for General Population/Uncontrolled Exposure</b>				
<b>Frequency Range (MHz)</b>	<b>Electric Field Strength (V/m)</b>	<b>Magnetic Field Strength (A/m)</b>	<b>Power Density (mW/cm<sup>2</sup>)</b>	<b>Averaging Time (minutes)</b>
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f <sup>2</sup> )	30
30-300	27.5	0.073	0.2	30
300-1500	/		f/1500	30
1500-100,000	/		1.0	30

f = frequency in MHz; \* = Plane-wave equivalent power density; According to §1.1310 and §2.1091 RF exposure is calculated.

**Calculated Formulary:**

Predication of MPE limit at a given distance

$S = PG/4 \pi R^2$  = power density (in appropriate units, e.g. mW/cm<sup>2</sup>);

P = power input to the antenna (in appropriate units, e.g., mW);

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain;

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm);

**Measurement Result**

Mode	Frequency Range	Antenna Gain		Target Output Power	Output Power		Evaluation Distance	Power Density	MPE Limit
	(MHz)	(dBi)	(numeric)	(dBm)	(dBm)	(mW)	(cm)	(mW/cm <sup>2</sup> )	(mW/cm <sup>2</sup> )
BT(BDR)	2402-2480	2.00	1.58	0.5±1	1.50	1.41	20	0.0004	1.0
BT(EDR)	2402-2480	2.00	1.58	3±1	4.00	2.51	20	0.0008	1.0
BLE	2402-2480	2.00	1.58	4±1	5.00	3.16	20	0.0010	1.0
802.11b	2412~2462	2.00	1.58	17.5±1	18.50	70.79	20	0.0223	1.0
802.11g		2.00	1.58	14±1	15.00	31.62	20	0.0100	1.0
802.11n HT20		2.00	1.58	13±1	14.00	25.12	20	0.0079	1.0
802.11n HT40	2422~2452	2.00	1.58	13±1	14.00	25.12	20	0.0079	1.0

Note: For the above target output power are all declared by the manufacturer.

**Result:** The device meet FCC MPE at 20 cm distance.

---

## **FCC §15.203 – ANTENNA REQUIREMENT**

---

### **Applicable Standard**

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

### **Antenna Connector Construction**

The EUT has a PCB antenna arrangement for Bluetooth, which the antenna gain is 2 dBi, fulfill the requirement of this section. Please refer to the EUT photos.


**Result:** Compliance.

**FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS**

**Applicable Standard**

FCC §15.207(a)

**EUT Setup**

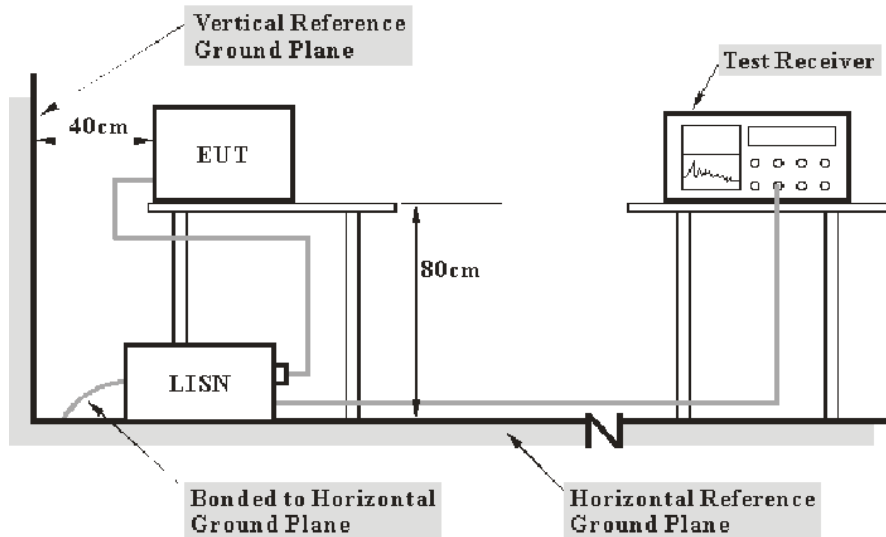

- Note: 1. Support units were connected to second LISN.  
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The measurement procedure of EUT setup is according with ANSI C63.10-2013. The related limit was specified in FCC Part 15.207.

**EMI Test Receiver Setup**

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

**Test Procedure**

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

## Corrected Factor & Margin Calculation

The Corrected factor is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

$$\text{Correction Factor} = \text{LISN VDF} + \text{Cable Loss} + \text{Transient Limiter Attenuation}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

## Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207.

### Test Data

#### Environmental Conditions


<b>Temperature:</b>	20.2 °C
<b>Relative Humidity:</b>	51 %
<b>ATM Pressure:</b>	101.3 kPa

*The testing was performed by Belle Cheng on 2017-05-17.*

*EUT operation mode: Transmitting in Middle channel of 8-DPSK (Worst case)*

AC 120V/60 Hz, Line

Full Spectrum

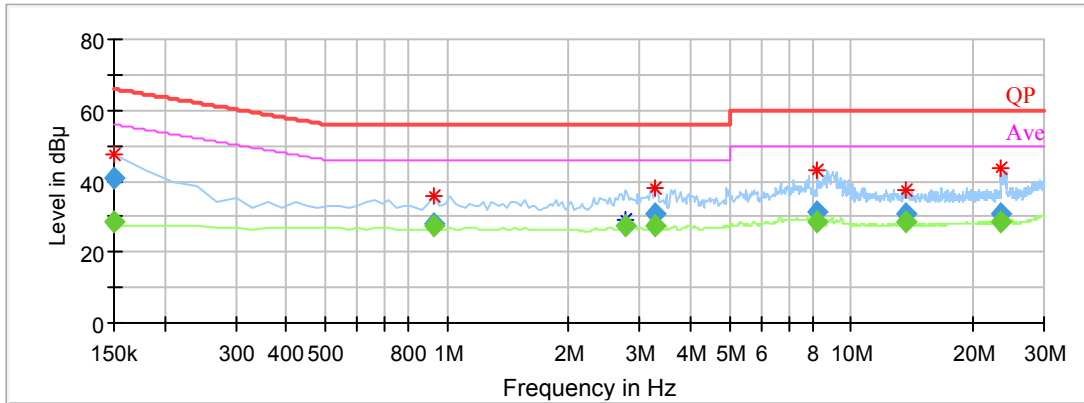


Frequency (MHz)	QuasiPeak (dBµV)	Average (dB µ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.150000	---	28.29	9.000	L1	10.1	27.71	56.00	Compliance
0.150000	40.60	---	9.000	L1	10.1	25.40	66.00	Compliance
0.930000	---	27.50	9.000	L1	9.9	18.50	46.00	Compliance
0.930000	28.24	---	9.000	L1	9.9	27.76	56.00	Compliance
2.760000	---	27.61	9.000	L1	9.9	18.39	46.00	Compliance
3.270000	---	27.53	9.000	L1	9.9	18.47	46.00	Compliance
3.270000	30.53	---	9.000	L1	9.9	25.47	56.00	Compliance
8.250000	---	28.81	9.000	L1	10.0	21.19	50.00	Compliance
8.250000	31.28	---	9.000	L1	10.0	28.72	60.00	Compliance
13.620000	---	28.65	9.000	L1	10.2	21.35	50.00	Compliance
13.620000	30.72	---	9.000	L1	10.2	29.28	60.00	Compliance
23.400000	---	28.68	9.000	L1	10.5	21.32	50.00	Compliance



**AC 120V/60 Hz, Neutral**

Full Spectrum

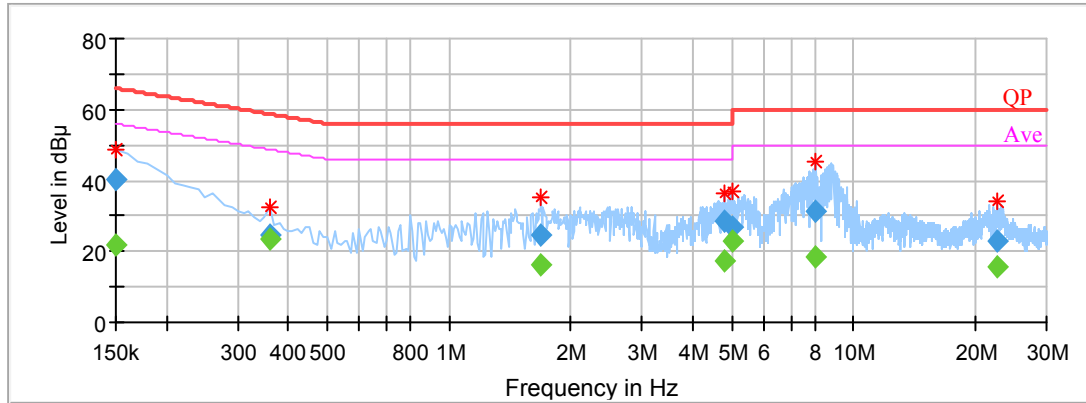

Frequency (MHz)	QuasiPeak (dB $\mu$ V)	Average (dB $\mu$ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB $\mu$ V)	Comment
0.150000	---	21.90	9.000	N	10.1	34.10	56.00	Compliance
0.150000	40.36	---	9.000	N	10.1	25.64	66.00	Compliance
0.360000	---	23.35	9.000	N	10.1	25.38	48.73	Compliance
0.360000	24.42	---	9.000	N	10.1	34.31	58.73	Compliance
1.690000	---	16.32	9.000	N	9.9	29.68	46.00	Compliance
1.690000	24.55	---	9.000	N	9.9	31.45	56.00	Compliance
4.790000	---	17.38	9.000	N	9.9	28.62	46.00	Compliance
4.790000	28.49	---	9.000	N	9.9	27.51	56.00	Compliance
5.030000	---	22.72	9.000	N	9.9	27.28	50.00	Compliance
5.030000	26.81	---	9.000	N	9.9	33.19	60.00	Compliance
8.090000	---	18.46	9.000	N	9.9	31.54	50.00	Compliance
8.090000	31.37	---	9.000	N	9.9	28.63	60.00	Compliance

**Note:**

- 1) Corr.=LISN VDF (Voltage Division Factor) + Cable Loss
- 2) Corrected Amplitude = Reading + Corr.
- 3) Margin = Limit -Corrected Amplitude

**FCC §15.205, §15.209 & §15.247(d) – RADIATED EMISSIONS**

**Applicable Standard**


FCC §15.205; §15.209; §15.247(d)

**Measurement Uncertainty**


All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

**EUT Setup**

Below 1 GHz:

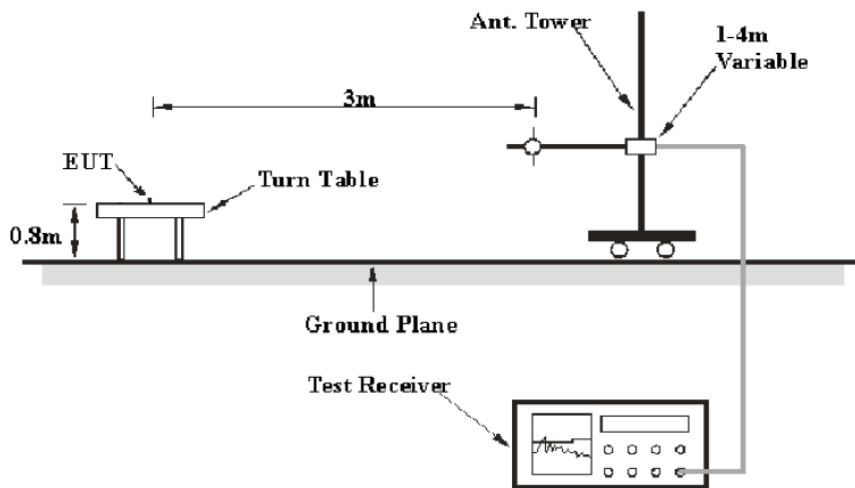

**Above 1GHz:**

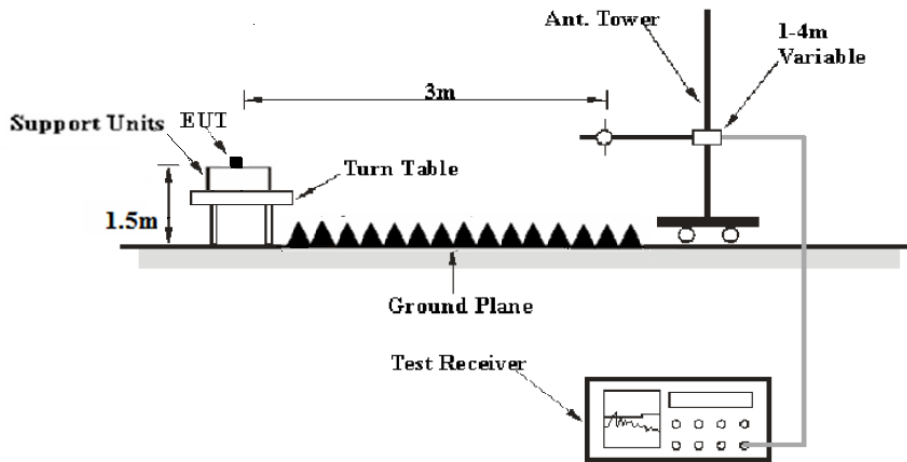

The radiated emission tests were performed in the 3 meters, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209 and FCC 15.247 limits.

**EMI Test Receiver & Spectrum Analyzer Setup**

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30 MHz – 1000 MHz	120 kHz	300 kHz	120 kHz	QP

Frequency Range	RBW	Video B/W	Detector
1GHz – 25GHz	1MHz	3 MHz	PK
	1MHz	10 Hz	Ave.

**Test Procedure**

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All final data was recorded in Quasi-peak detection mode for frequency range of 30 MHz -1 GHz and peak and Average detection modes for frequencies above 1 GHz.

**Corrected Amplitude & Margin Calculation**

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

### Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Subpart C, section 15.205, 15.209 and 15.247.

### Test Data

#### Environmental Conditions

<b>Temperature:</b>	20.2 °C
<b>Relative Humidity:</b>	51 %
<b>ATM Pressure:</b>	101.3 kPa

The testing was performed by Belle Cheng on 2017-05-17.

EUT operation mode: Transmitting

**30MH -25 GHz:** (Scan with GFSK, π/4-DQPSK, 8-DPSK mode, the worst case is 8-DPSK Mode)

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (cm)	Polar (H/V)			Limit (dB μ V/m)	Margin (dB)
Low Channel (2402 MHz)									
320.51	32.54	QP	324	201	V	1.33	33.87	46	12.13
2402.00	102.35	PK	169	208	V	-6.19	96.16	/	/
2402.00	86.21	Ave	169	208	V	-6.19	80.02	/	/
2402.00	92.08	PK	68	160	H	-6.19	85.89	/	/
2402.00	81.58	Ave	68	160	H	-6.19	75.39	/	/
2390.00	46.44	PK	48	114	V	-6.22	40.22	74	33.78
2390.00	32.28	Ave	48	114	V	-6.22	26.06	54	27.94
2400.00	48.24	PK	14	194	H	-6.19	42.05	74	31.95
2400.00	33.47	Ave	14	194	H	-6.19	27.28	54	26.72
3210.23	52.33	PK	97	237	V	-2.89	49.44	74	24.56
3210.23	41.19	Ave	97	237	V	-2.89	38.30	54	15.70
4804.00	55.24	PK	334	195	H	1.61	56.85	74	17.15
4804.00	41.27	Ave	334	195	H	1.61	42.88	54	11.12
7206.00	45.19	PK	259	110	H	7.55	52.74	74	21.26
7206.00	32.47	Ave	259	110	H	7.55	40.02	54	13.98

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBµV/m)	FCC Part 15.247/205/209	
	Reading (dBµV)	Detector (PK/QP/Ave.)		Height (cm)	Polar (H/V)			Limit (dB µ V/m)	Margin (dB)
Middle Channel (2441 MHz)									
320.51	33.19	QP	100	178	V	1.33	34.52	46	11.48
2441.00	104.24	PK	64	231	V	-6.17	98.07	/	/
2441.00	86.05	Ave	64	231	V	-6.17	79.88	/	/
2441.00	92.93	PK	208	145	H	-6.17	86.76	/	/
2441.00	79.46	Ave	208	145	H	-6.17	73.29	/	/
1604.51	49.47	PK	6	160	H	-8.99	40.48	74	33.52
1604.51	34.12	Ave	6	160	H	-8.99	25.13	54	28.87
3211.54	52.49	PK	103	167	H	-2.89	49.60	74	24.40
3211.54	41.92	Ave	103	167	H	-2.89	39.03	54	14.97
4882.00	56.84	PK	230	233	V	1.79	58.63	74	15.37
4882.00	41.93	Ave	230	233	V	1.79	43.72	54	10.28
6451.24	46.98	PK	257	103	H	5.73	52.71	74	21.29
6451.24	34.10	Ave	257	103	H	5.73	39.83	54	14.17
7323.00	39.45	PK	246	231	H	7.67	47.12	74	26.88
7323.00	31.89	Ave	246	231	H	7.67	39.56	54	14.44
High Channel (2480MHz)									
320.51	32.48	QP	275	222	V	1.33	33.81	46	12.19
2480.00	102.95	PK	135	101	V	-6.01	96.94	/	/
2480.00	85.34	Ave	135	101	V	-6.01	79.33	/	/
2480.00	92.51	PK	272	100	H	-6.01	86.50	/	/
2480.00	82.13	Ave	272	100	H	-6.01	76.12	/	/
2483.50	45.65	PK	213	204	H	-6.01	39.64	74	34.36
2483.50	32.11	Ave	213	204	H	-6.01	26.10	54	27.90
1605.22	49.61	PK	32	142	H	-8.99	40.62	74	33.38
1605.22	32.66	Ave	32	142	H	-8.99	23.67	54	30.33
4960.00	56.73	PK	327	249	V	1.97	58.70	74	15.30
4960.00	42.51	Ave	327	249	V	1.97	44.48	54	9.52
6454.87	44.92	PK	337	206	H	5.73	50.65	74	23.35
6454.87	35.41	Ave	337	206	H	5.73	41.14	54	12.86
7440.00	45.17	PK	344	171	H	7.79	52.96	74	21.04
7440.00	31.59	Ave	344	171	H	7.79	39.38	54	14.62

Note:


Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor

Corrected Amplitude = Corrected Factor + Reading


Margin = Limit - Corrected. Amplitude

**Spurious Emissions at Antenna Port:**


**Low Channel**

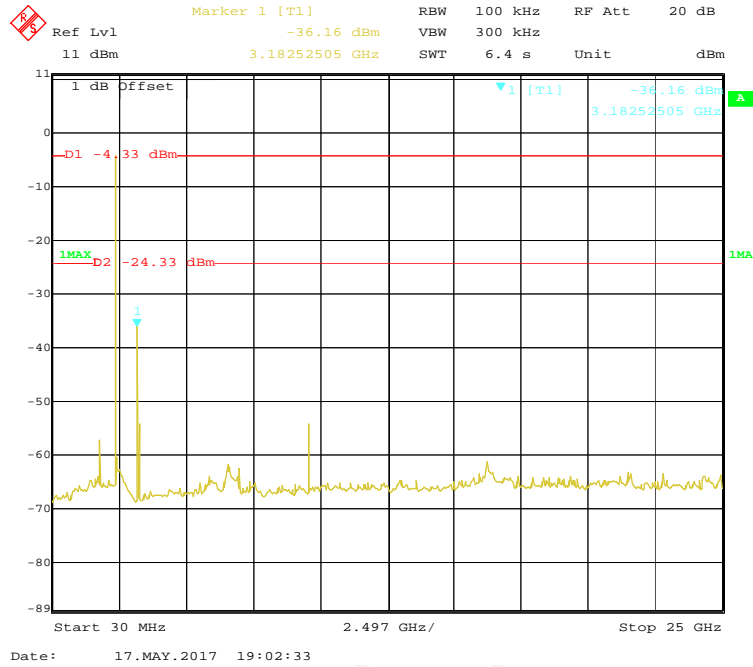

**Middle Channel**

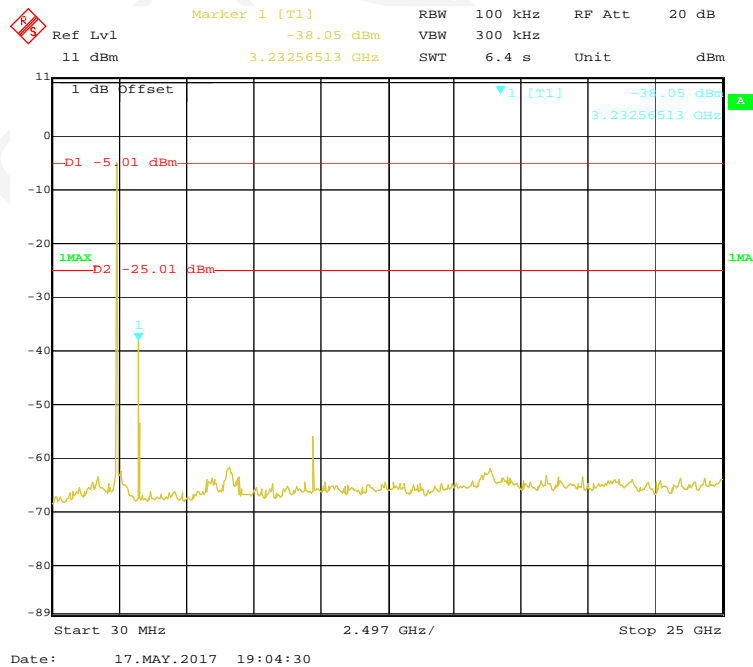

### High Channel

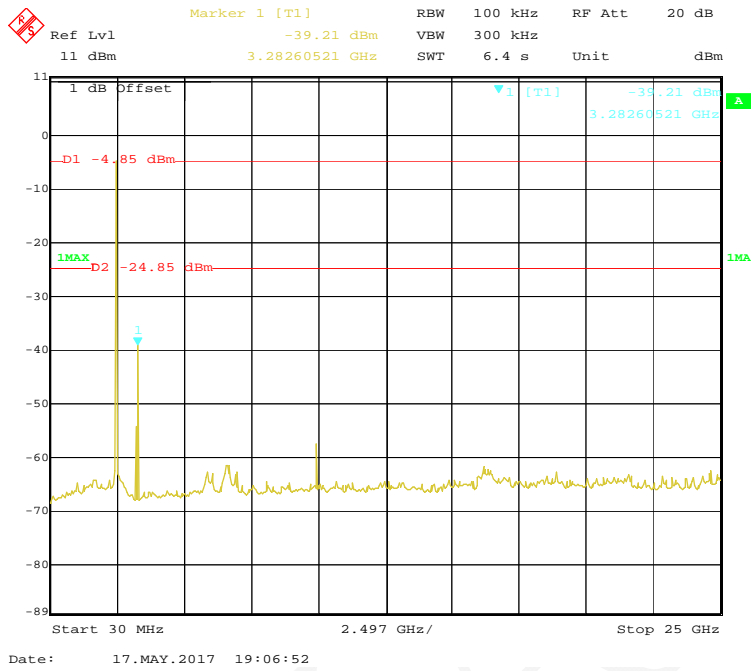

## **FCC §15.247(a) (1)-CHANNEL SEPARATION TEST**

### **Applicable Standard**

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW.

### **Test Procedure**

1. Set the EUT in transmitting mode, maxhold the channel.
2. Set the adjacent channel of the EUT and maxhold another trace.
3. Measure the channel separation.

### **Test Data**

#### **Environmental Conditions**

<b>Temperature:</b>	20.3 °C
<b>Relative Humidity:</b>	51 %
<b>ATM Pressure:</b>	101.3 kPa

*The testing was performed by Belle Cheng on 2017-05-17.*

*EUT operation mode: Transmitting*


*Test Result: Compliance. Please refer to following tables and plots*




Mode	Channel	Frequency (MHz)	Channel Separation (MHz)	Limit (MHz)	Result
<b>BDR (GFSK)</b>	Low	2402	1.004	0.585	Pass
	Adjacent	2403			
	Middle	2441	1.004	0.585	Pass
	Adjacent	2442			
	High	2480	0.998	0.585	Pass
	Adjacent	2479			
<b>EDR (π/4-DQPSK)</b>	Low	2402	1.010	0.838	Pass
	Adjacent	2403			
	Middle	2441	0.998	0.838	Pass
	Adjacent	2442			
	High	2480	0.998	0.838	Pass
	Adjacent	2479			
<b>EDR (8DPSK)</b>	Low	2402	0.998	0.809	Pass
	Adjacent	2403			
	Middle	2441	1.004	0.809	Pass
	Adjacent	2442			
	Adjacent	2479	0.998	0.809	Pass
	High	2480			

Note: Limit = 2/3 \* 20 dB bandwidth


**BDR (GFSK): Low Channel**

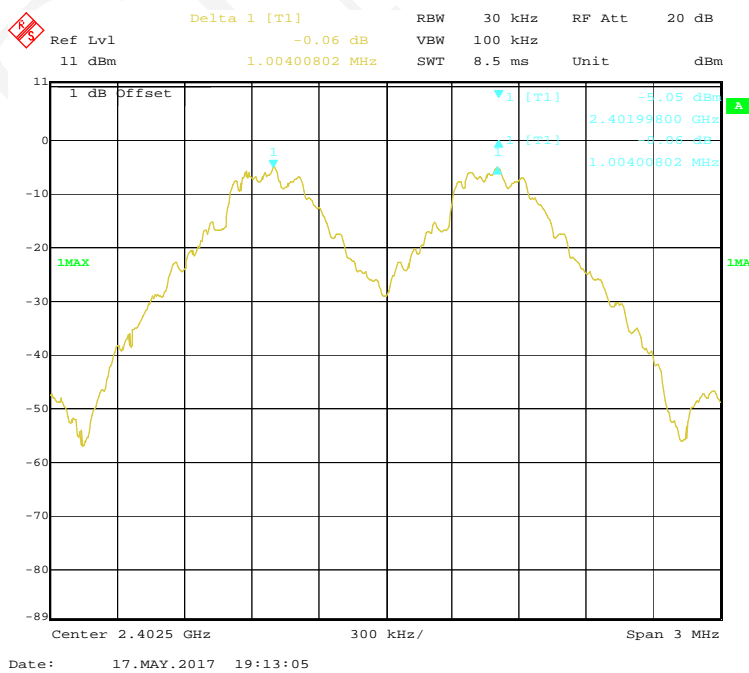


**BDR (GFSK): Middle Channel**

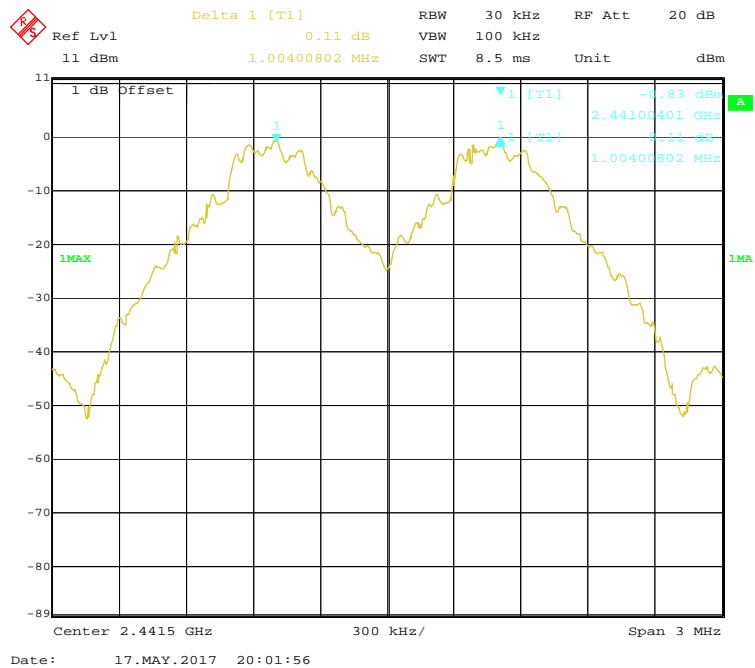


**BDR (GFSK): High Channel**

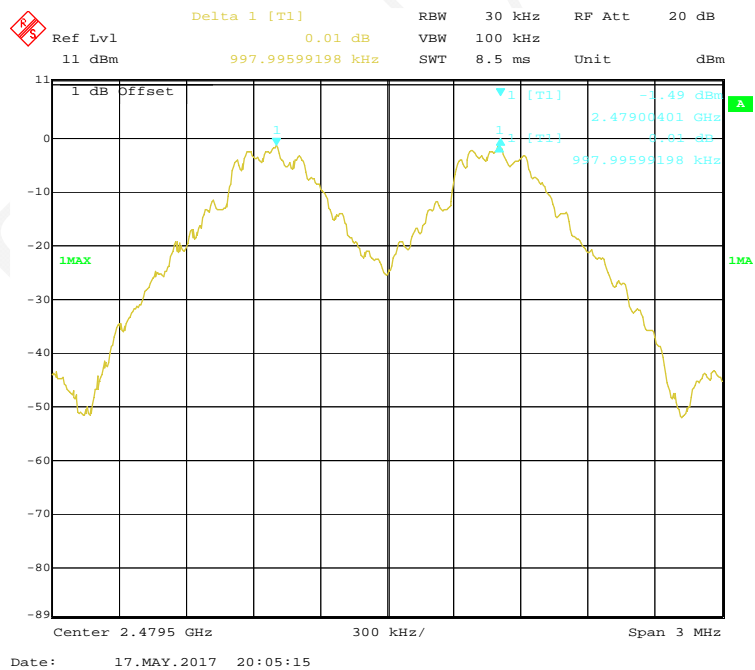


**EDR ( $\pi/4$ -DQPSK): Low Channel**

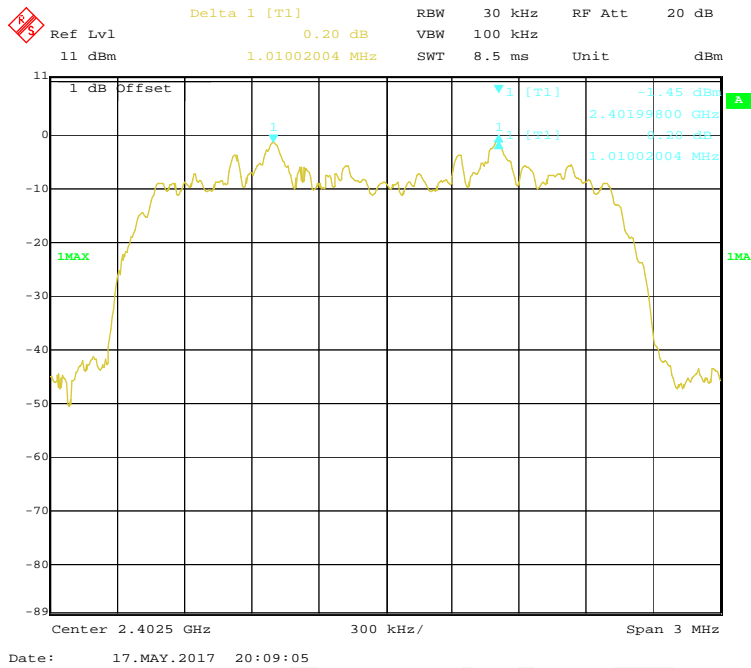


**EDR ( $\pi/4$ -DQPSK): Middle Channel**

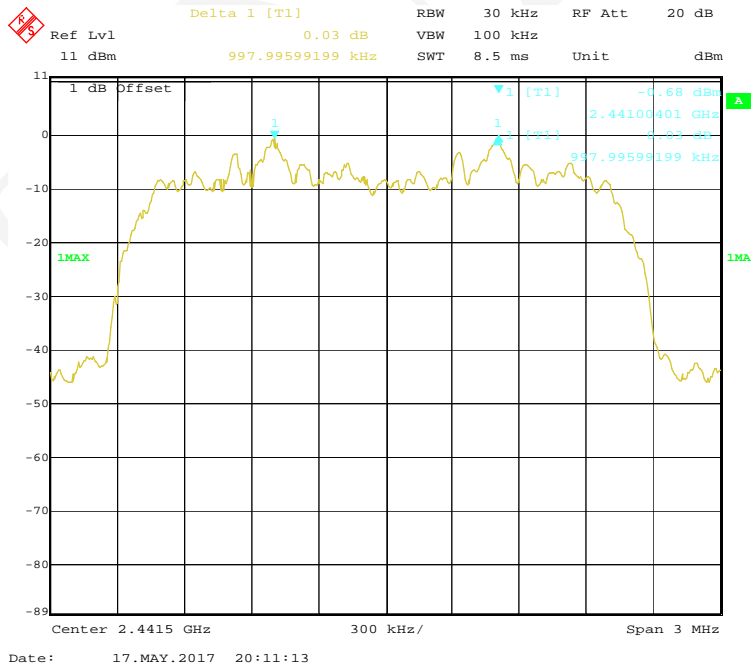


**EDR ( $\pi/4$ -DQPSK): High Channel**

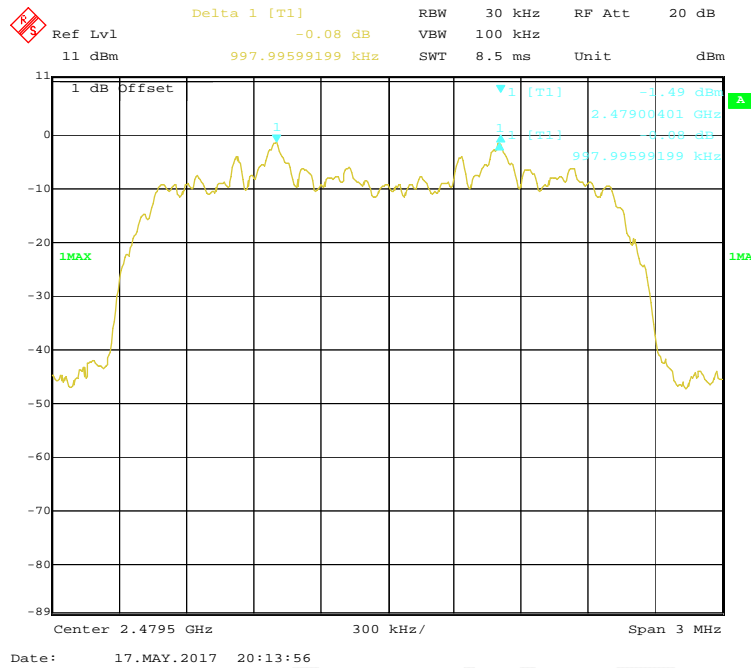


**EDR (8DPSK): Low Channel**

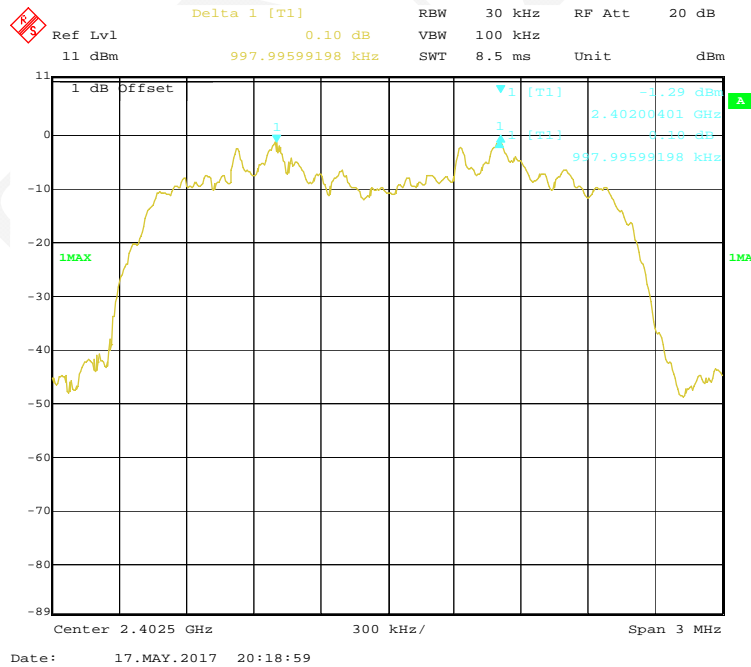

**EDR (8DPSK): Middle Channel**

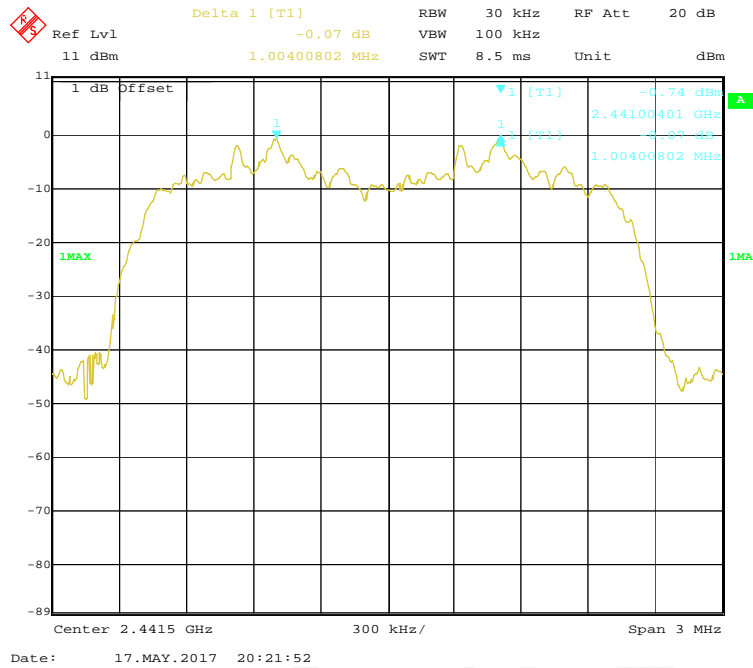

**EDR (8DPSK): High Channel**

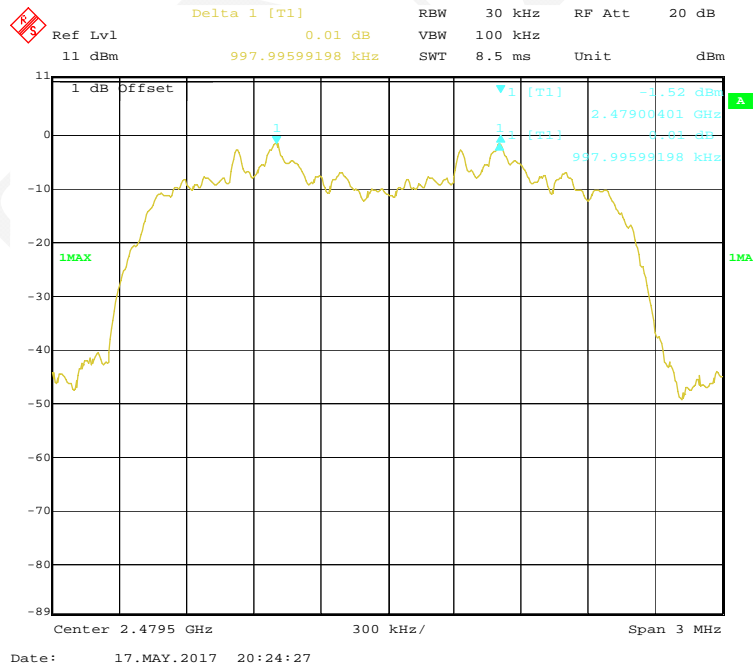

## FCC §15.247(a) (1) – 20 dB EMISSION BANDWIDTH

### Applicable Standard

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

### Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

### Test Data

#### Environmental Conditions

<b>Temperature:</b>	20.3 °C
<b>Relative Humidity:</b>	51 %
<b>ATM Pressure:</b>	101.3 kPa


*The testing was performed by Belle Cheng on 2017-05-17.*

*EUT operation mode: Transmitting*


*Test Result: Compliance. Please refer to following tables and plots*

Mode	Channel	Frequency (MHz)	20 dB Emission Bandwidth (MHz)
<b>BDR (GFSK)</b>	Low	2402	0.878
	Middle	2441	0.878
	High	2480	0.878
<b>EDR (<math>\pi/4</math>-DQPSK)</b>	Low	2402	1.257
	Middle	2441	1.257
	High	2480	1.257
<b>EDR (8DPSK)</b>	Low	2402	1.214
	Middle	2441	1.214
	High	2480	1.214


**BDR (GFSK): Low Channel**

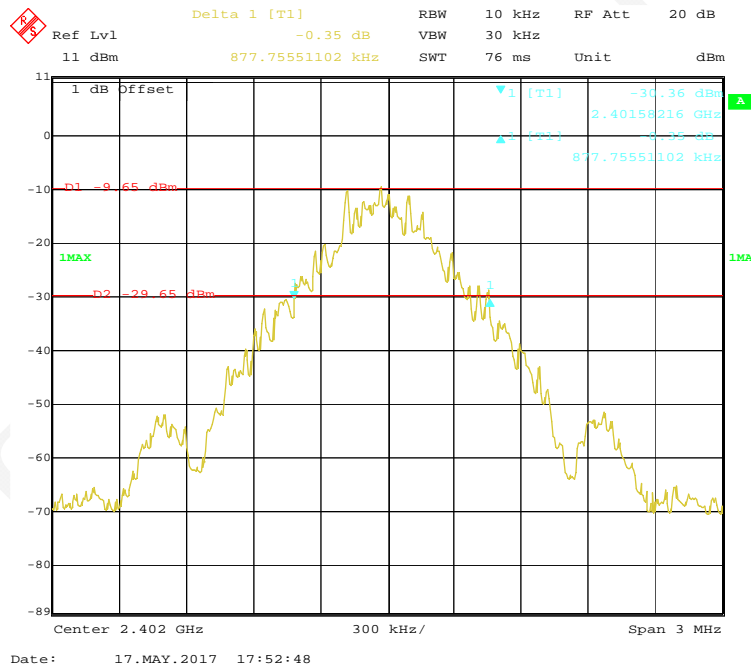

**BDR (GFSK): Middle Channel**

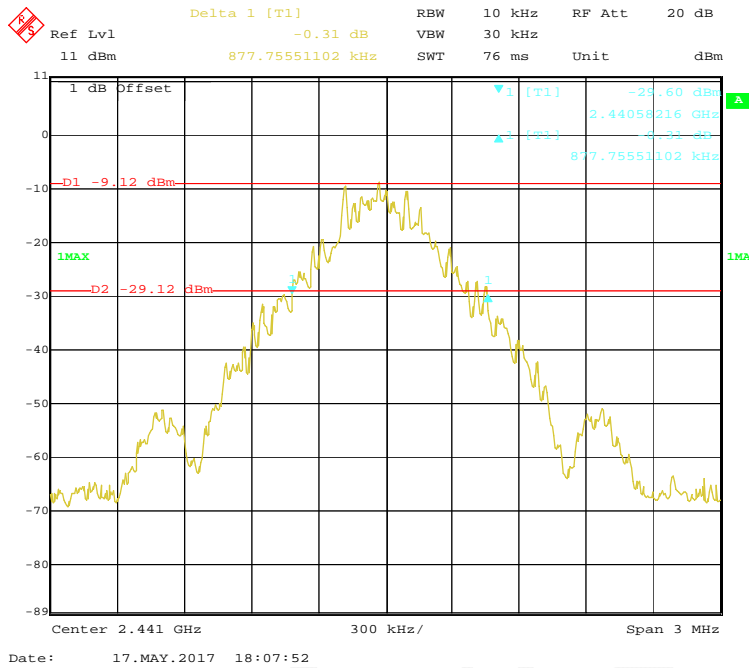


**BDR (GFSK): High Channel**

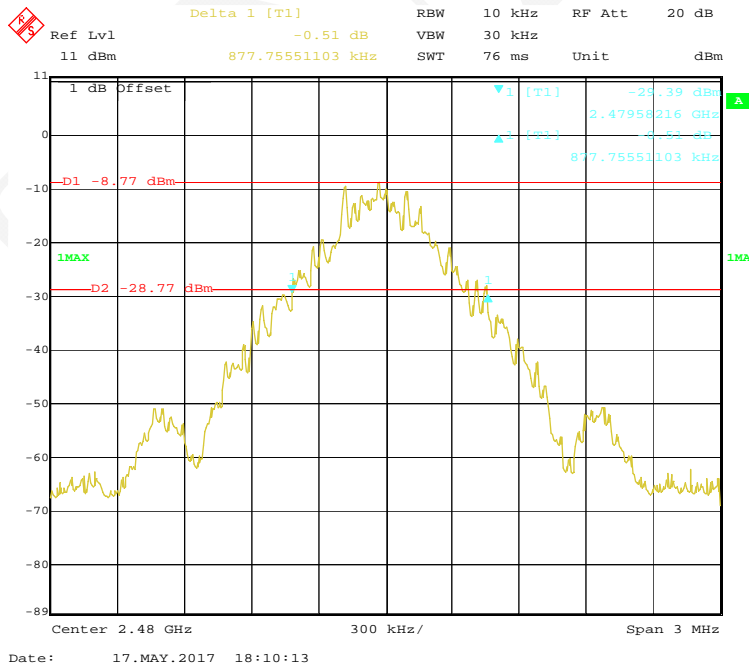





**EDR ( $\pi/4$ -DQPSK): Low Channel**

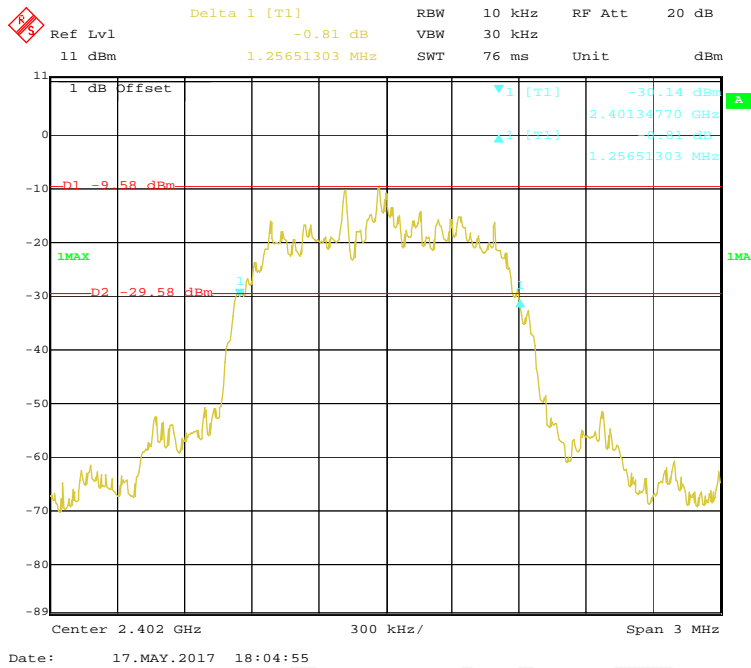


**EDR( $\pi/4$ -DQPSK): Middle Channel**

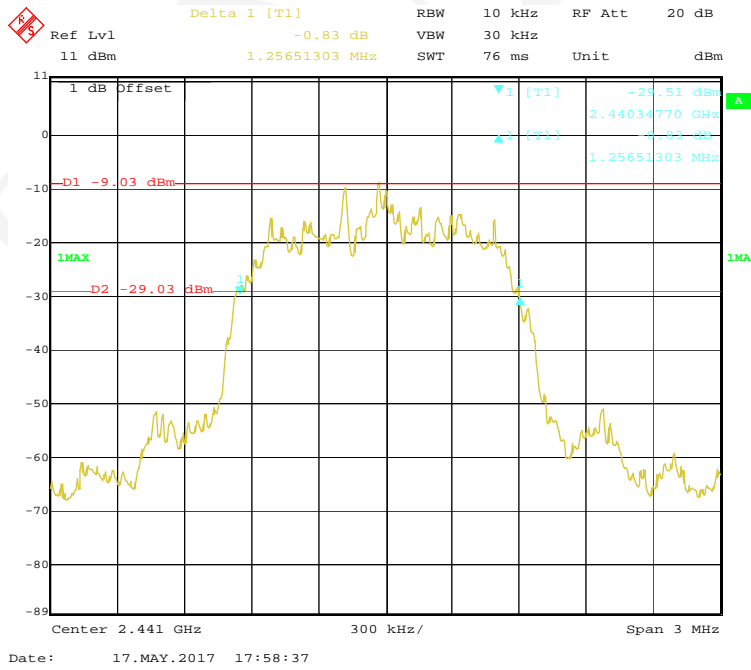


**EDR ( $\pi/4$ -DQPSK): High Channel**

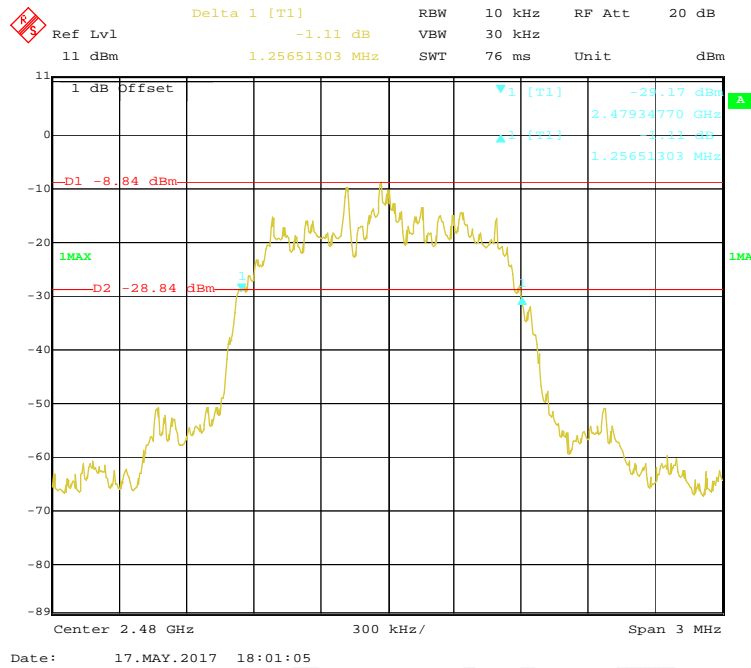


**EDR (8DPSK): Low Channel**

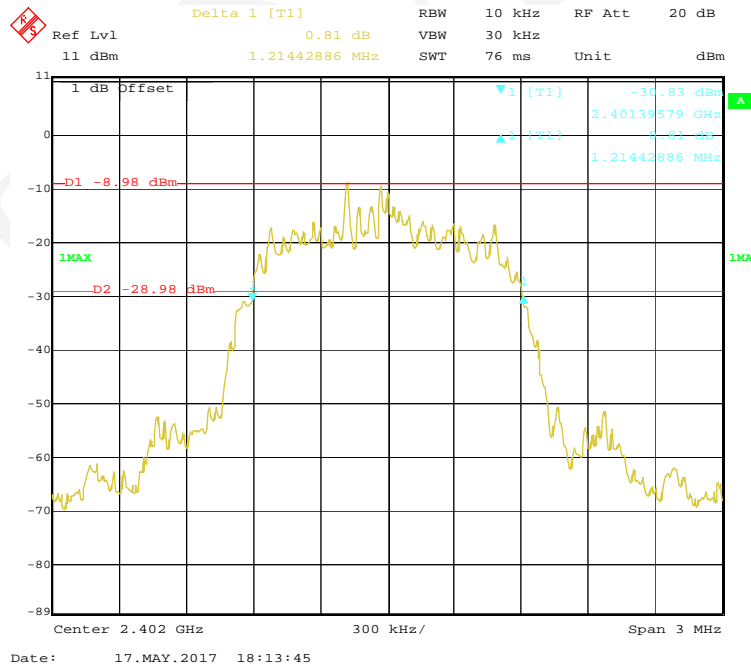

**EDR (8DPSK): Middle Channel**

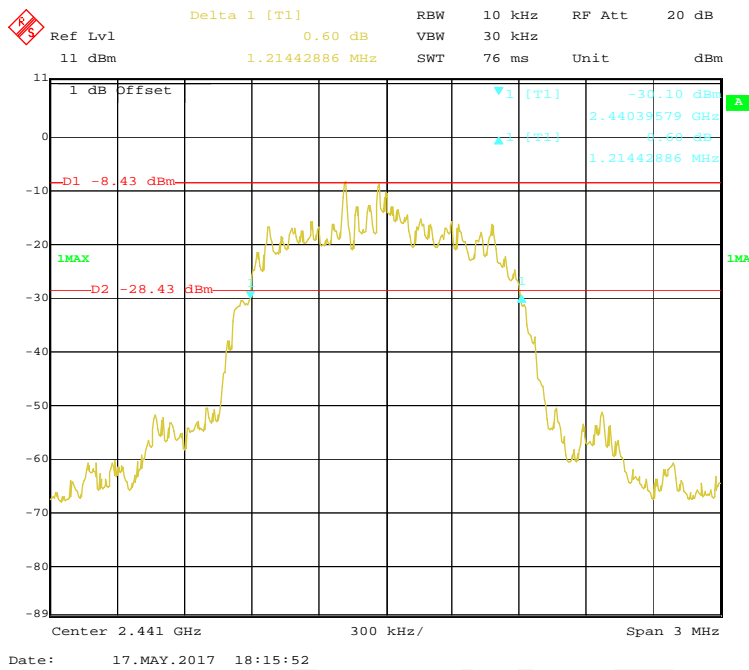

**EDR (8DPSK): High Channel**

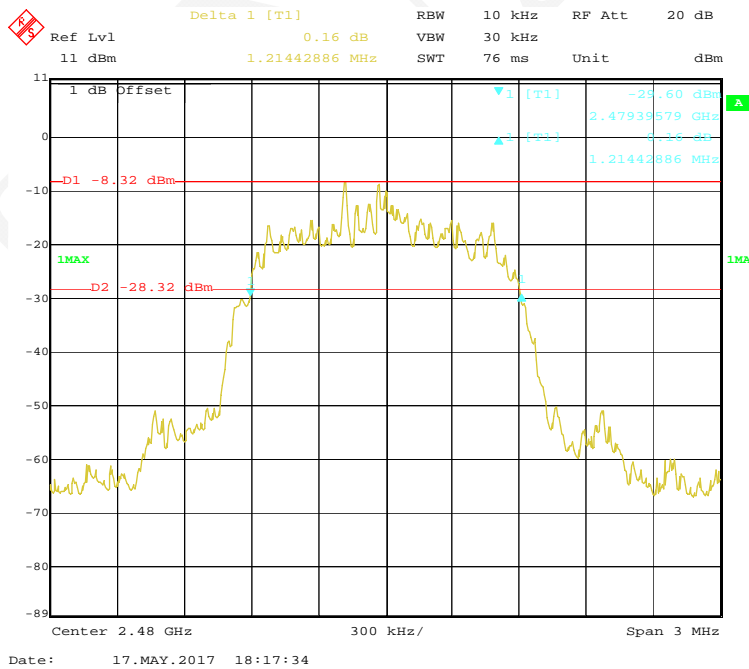

**FCC §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL TEST****Applicable Standard**

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

**Test Procedure**

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Set the EUT in hopping mode from first channel to last.
3. By using the max-hold function record the quantity of the channel.

**Test Data****Environmental Conditions**

<b>Temperature:</b>	20.1 °C
<b>Relative Humidity:</b>	51 %
<b>ATM Pressure:</b>	101.3 kPa


*The testing was performed by Belle Cheng on 2017-05-18.*

*EUT operation mode: Transmitting*


*Test Result: Compliance. Please refer to following tables and plots*

Mode	Frequency Range (MHz)	Number of Hopping Channel (CH)	Limit (CH)
BDR (GFSK)	2400-2483.5	79	≥15
EDR (π/4-DQPSK)	2400-2483.5	79	≥15
EDR (8DPSK)	2400-2483.5	79	≥15


**BDR (GFSK): Number of Hopping Channels**

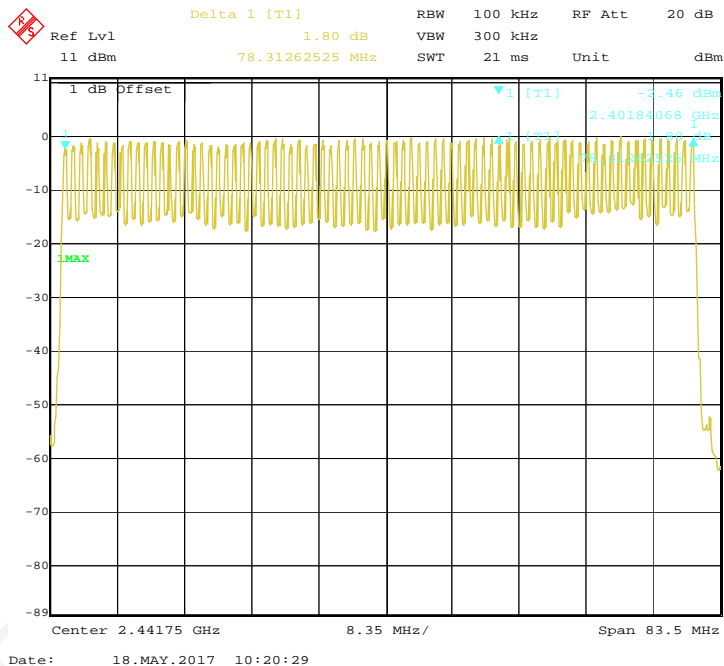

### EDR ( $\pi/4$ -DQPSK): Number of Hopping Channels

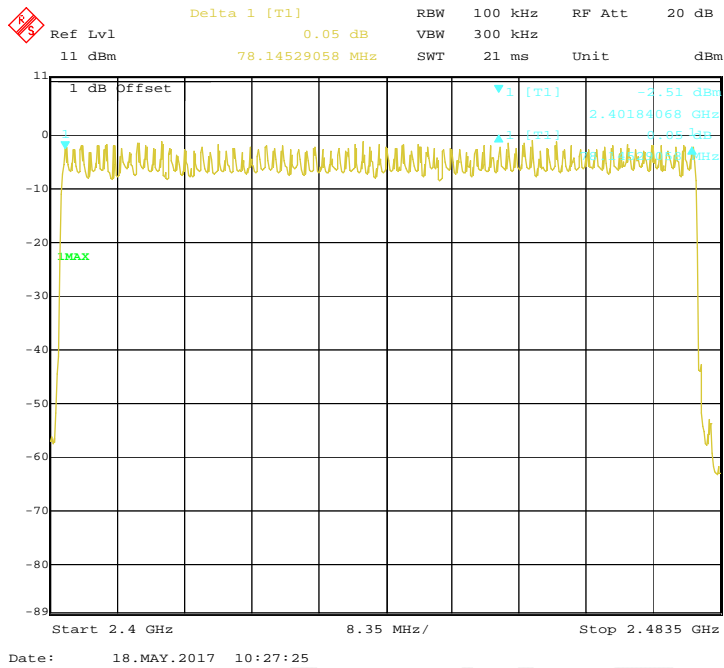

### EDR (8DPSK): Number of Hopping Channels

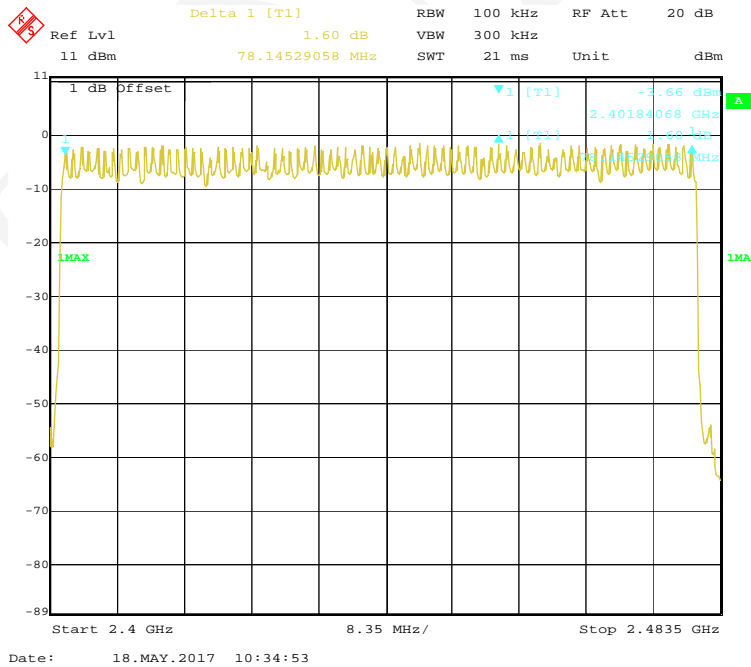

**FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME)****Applicable Standard**

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

**Test Procedure**

The EUT was worked in channel hopping; Spectrum SPAN was set as 0. Sweep was set as 0.4 X channel no. (s), the quantity of pulse was get from single sweep. In addition, the time of single pulses was tested.

**Test Data****Environmental Conditions**

<b>Temperature:</b>	20.1 °C
<b>Relative Humidity:</b>	51 %
<b>ATM Pressure:</b>	101.3 kPa

*The testing was performed by Belle Cheng on 2017-05-18.*

*EUT operation mode: Transmitting*


*Test Result: Compliance. Please refer to following tables and plots*

Mode		Channel	Pulse Width (ms)	Dwell Time (S)	Limit (S)	Result	
BDR (GFSK)	DH 1	Low	0.391	0.125	0.4	Pass	
		Middle	0.387	0.124	0.4	Pass	
		High	0.389	0.124	0.4	Pass	
	Note: DH1:Dwell time = Pulse time*(1600/2/79)*31.6S						
	DH 3	Low	1.659	0.265	0.4	Pass	
		Middle	1.659	0.265	0.4	Pass	
		High	1.659	0.265	0.4	Pass	
	Note: DH3:Dwell time = Pulse time*(1600/4/79)*31.6S						
	DH 5	Low	2.915	0.311	0.4	Pass	
		Middle	2.931	0.313	0.4	Pass	
		High	2.915	0.311	0.4	Pass	
	Note: DH5:Dwell time = Pulse time*(1600/6/79)*31.6S						
	EDR ( $\pi/4$ -DQPSK)	2DH 1	Low	0.401	0.128	0.4	Pass
Middle			0.403	0.129	0.4	Pass	
High			0.405	0.130	0.4	Pass	
Note: 2DH1:Dwell time = Pulse time*(1600/2/79)*31.6S							
2DH 3		Low	1.665	0.266	0.4	Pass	
		Middle	1.671	0.267	0.4	Pass	
		High	1.665	0.266	0.4	Pass	
Note: 2DH3:Dwell time = Pulse time*(1600/4/79)*31.6S							
2DH 5		Low	2.931	0.313	0.4	Pass	
		Middle	2.915	0.311	0.4	Pass	
		High	2.923	0.312	0.4	Pass	
Note: 2DH5:Dwell time = Pulse time*(1600/6/79)*31.6S							
EDR (8DPSK)		3DH 1	Low	0.401	0.128	0.4	Pass
	Middle		0.401	0.128	0.4	Pass	
	High		0.403	0.129	0.4	Pass	
	Note:3 DH1:Dwell time = Pulse time*(1600/2/79)*31.6S						
	3DH 3	Low	1.671	0.267	0.4	Pass	
		Middle	1.677	0.268	0.4	Pass	
		High	1.665	0.266	0.4	Pass	
	Note: 3DH3:Dwell time = Pulse time*(1600/4/79)*31.6S						
	3DH 5	Low	2.939	0.313	0.4	Pass	
		Middle	2.915	0.311	0.4	Pass	
		High	2.931	0.313	0.4	Pass	
	Note: 3DH5:Dwell time = Pulse time*(1600/6/79)*31.6S						







### Pulse time, High Channel, DH1

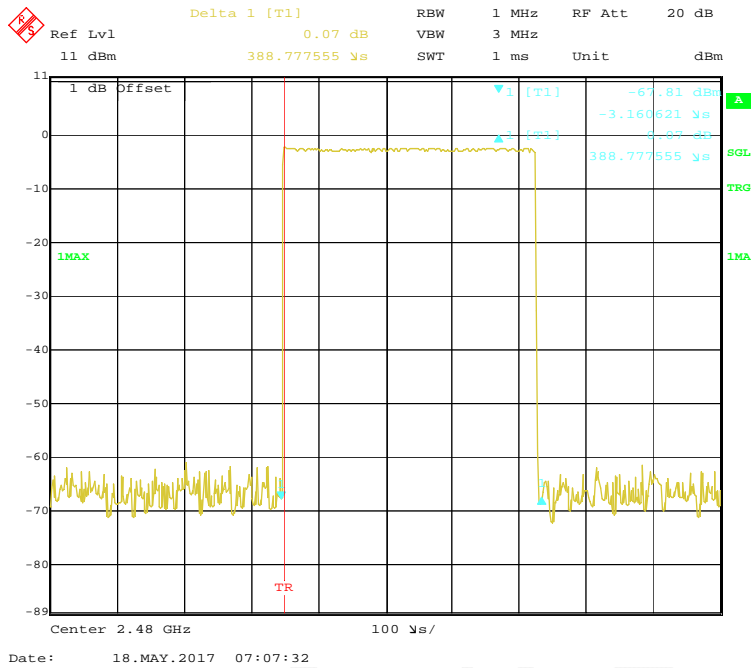


### Pulse time, Low Channel, DH3

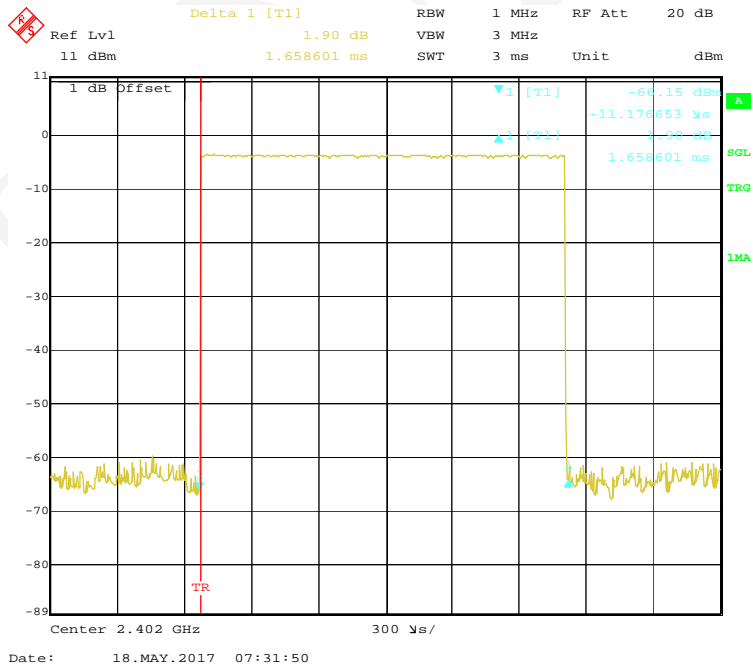


**Pulse time, Middle Channel, DH3**

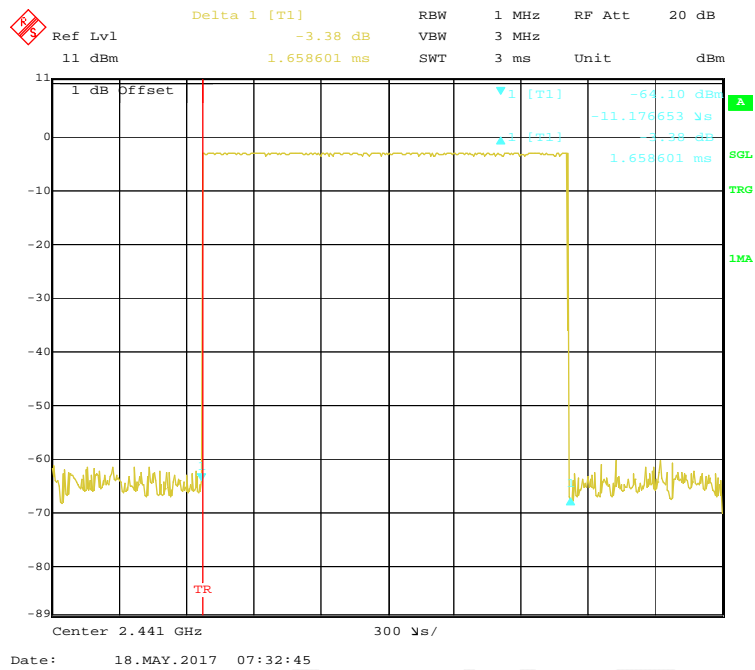


**Pulse time, High Channel, DH3**

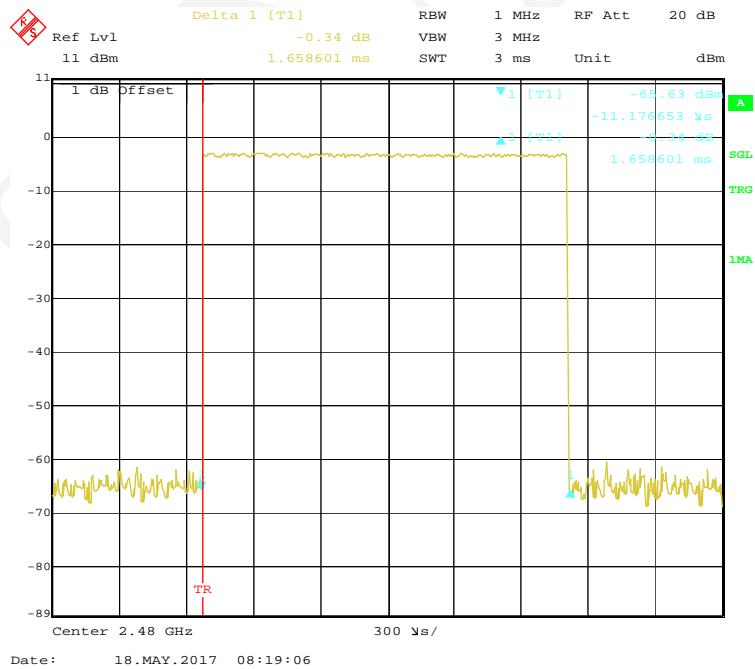


### Pulse time, Low Channel, DH5

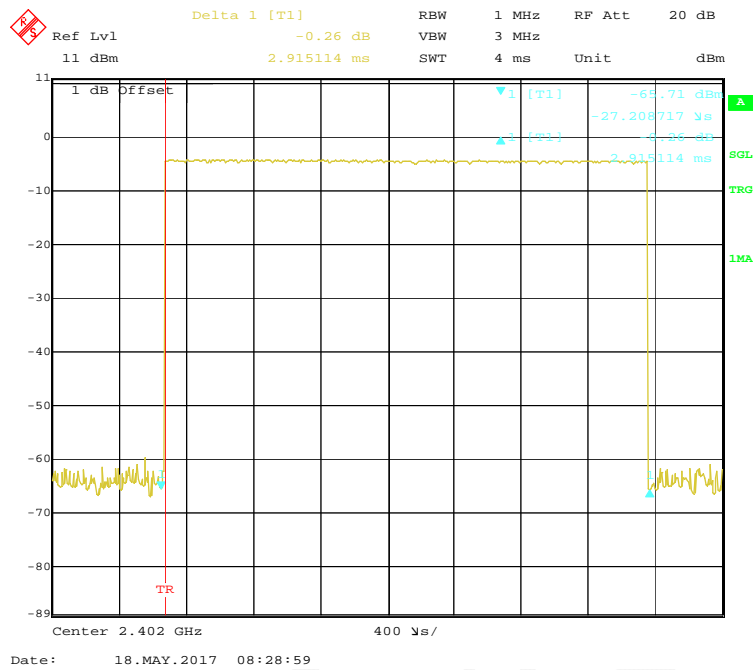


### Pulse time, Middle Channel, DH5

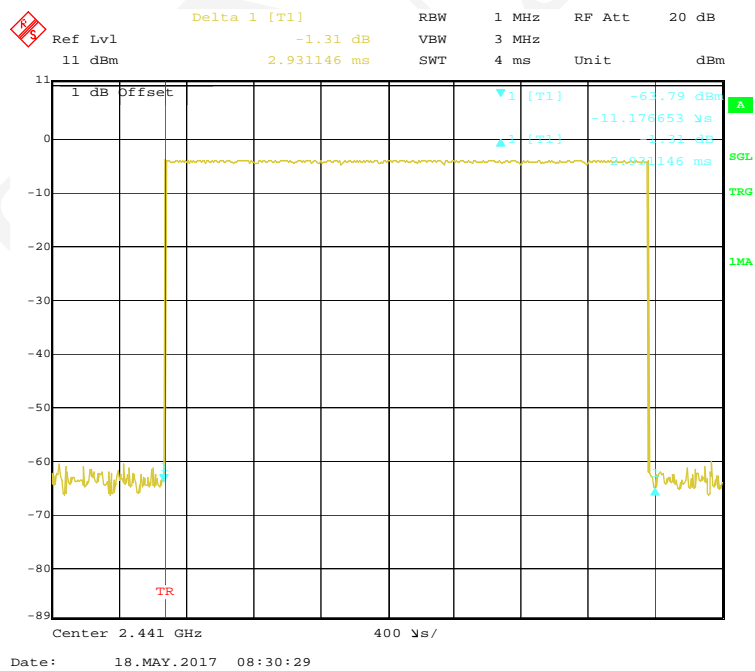


**Pulse time, High Channel, DH5**

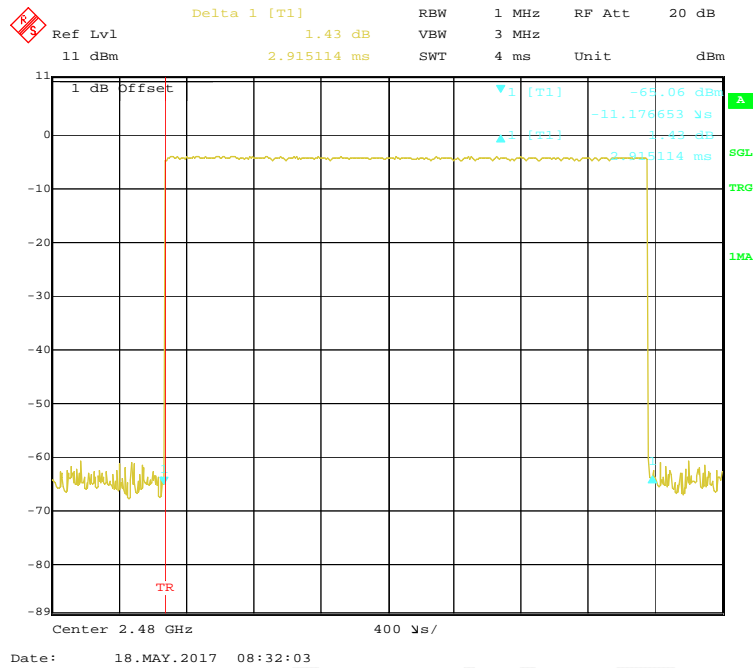


**EDR ( $\pi/4$ -DQPSK): Pulse time, Low Channel, 2DH1**

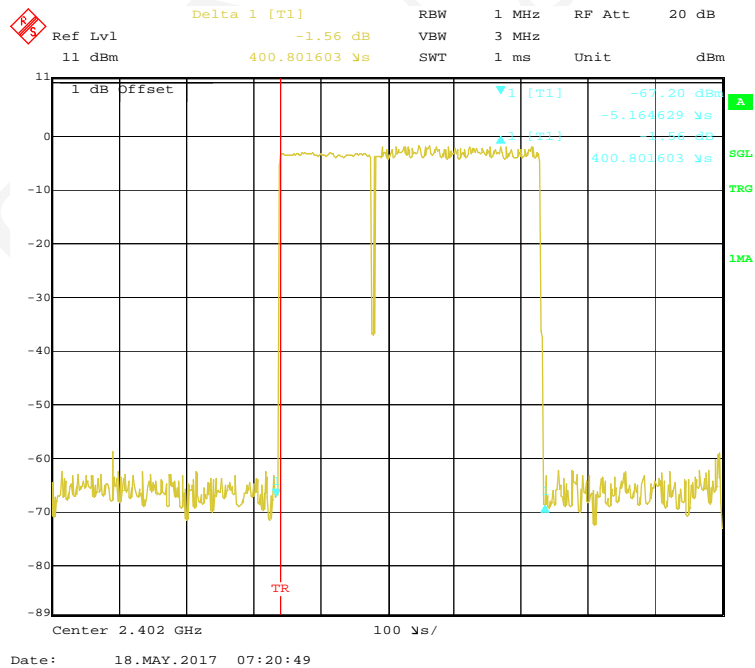


**Pulse time, Middle Channel, 2DH1**

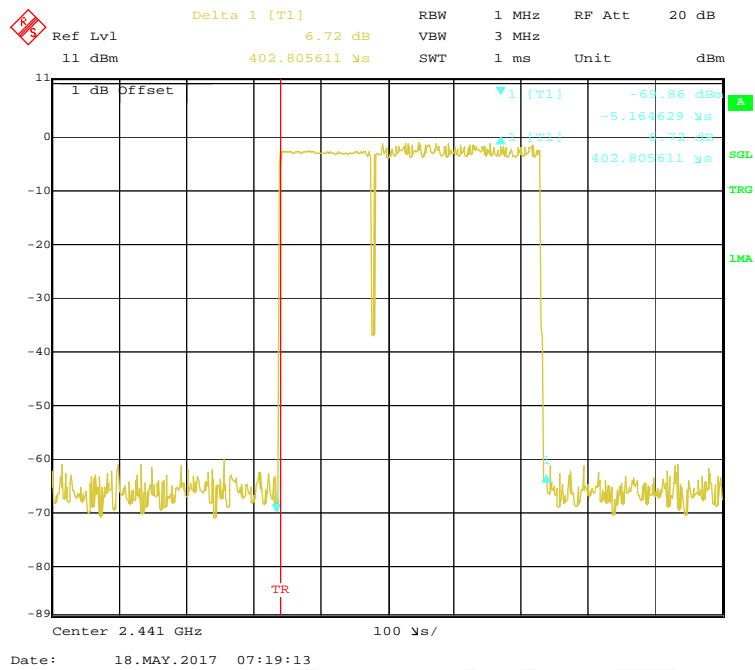


**Pulse time, High Channel, 2DH1**

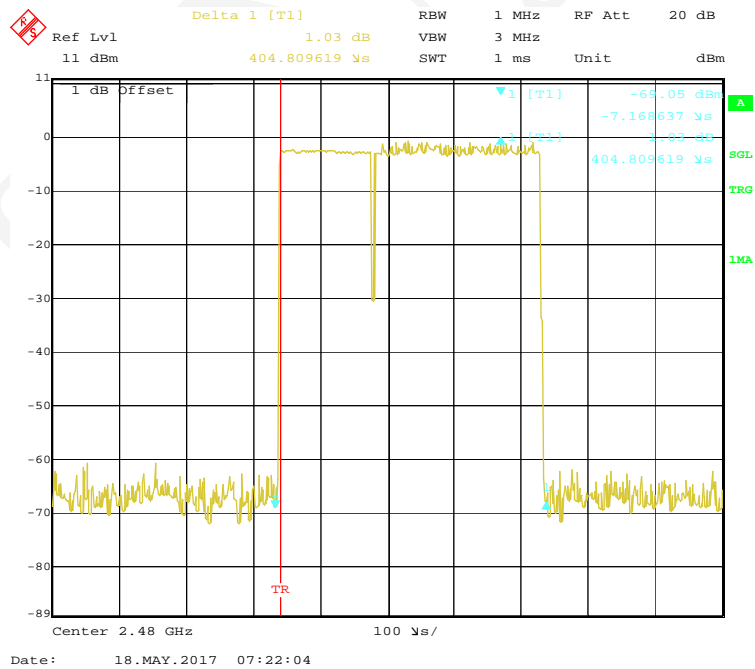


**Pulse time, Low Channel, 2DH3**

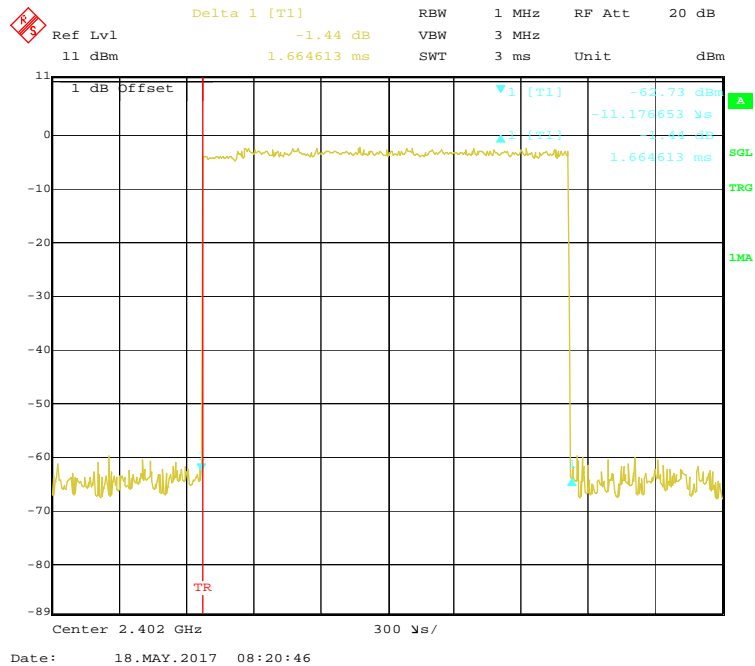


**Pulse time, Middle Channel, 2DH3**

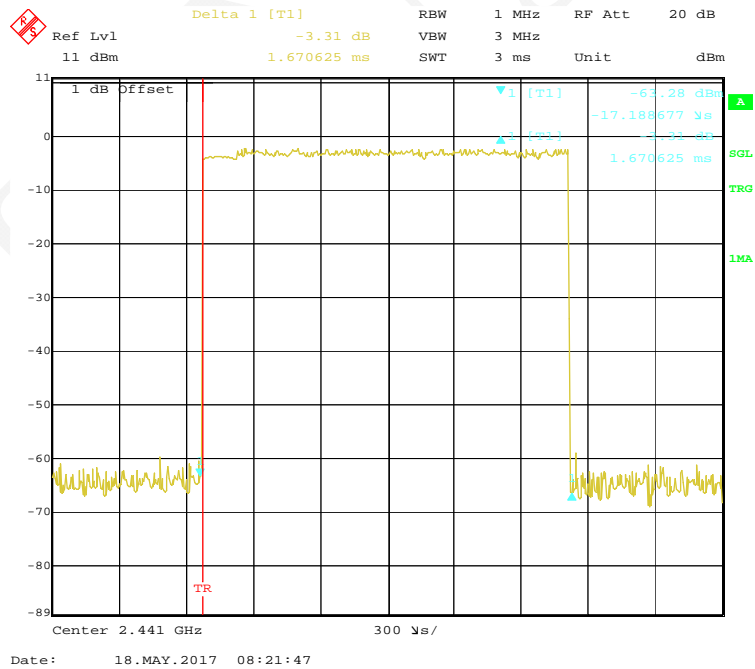

### Pulse time, High Channel, 2DH3

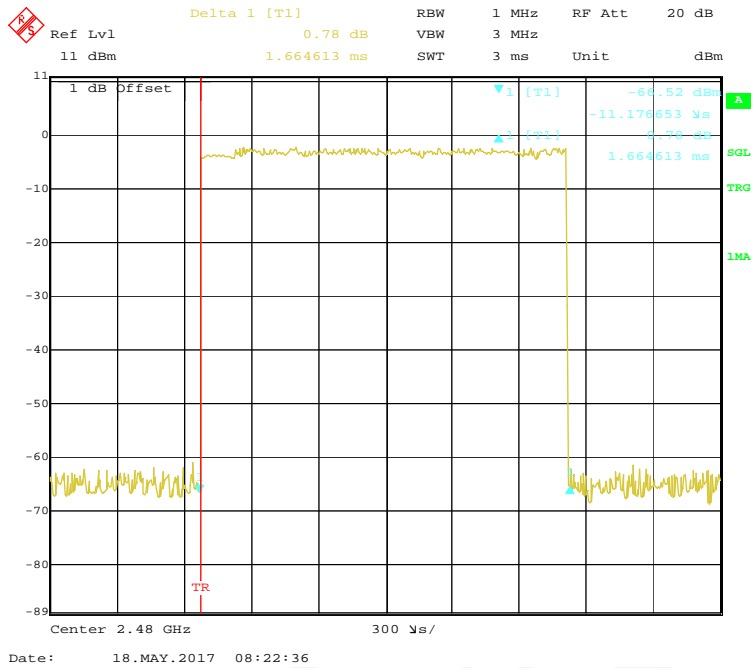


### Pulse time, Low Channel, 2DH5

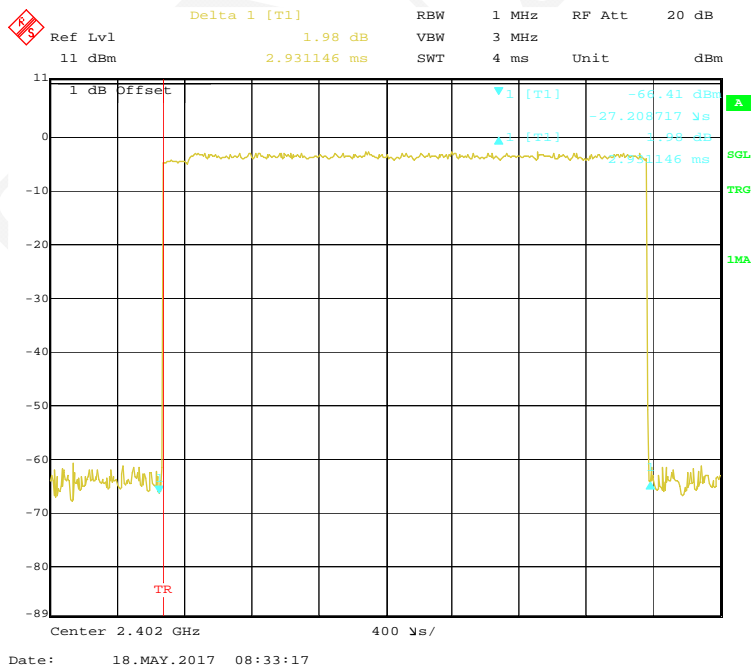





**Pulse time, Middle Channel, 2DH5**

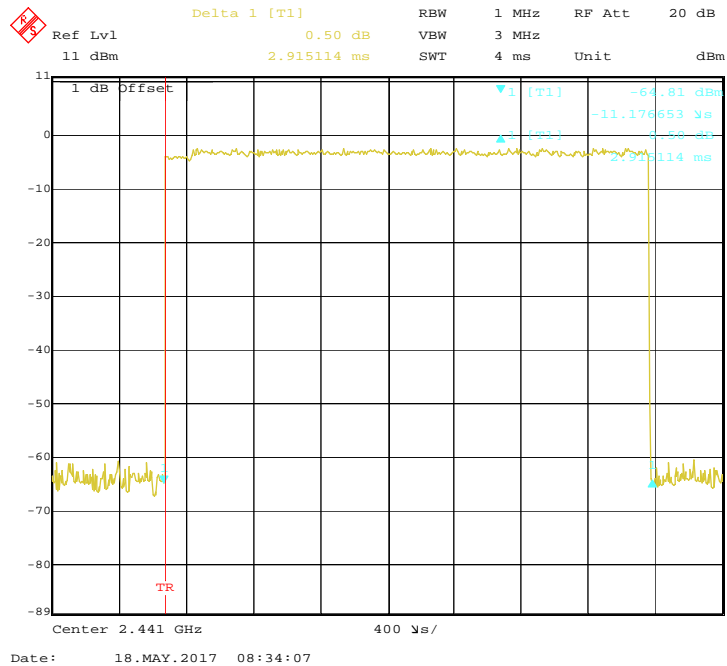


**Pulse time, High Channel, 2DH5**

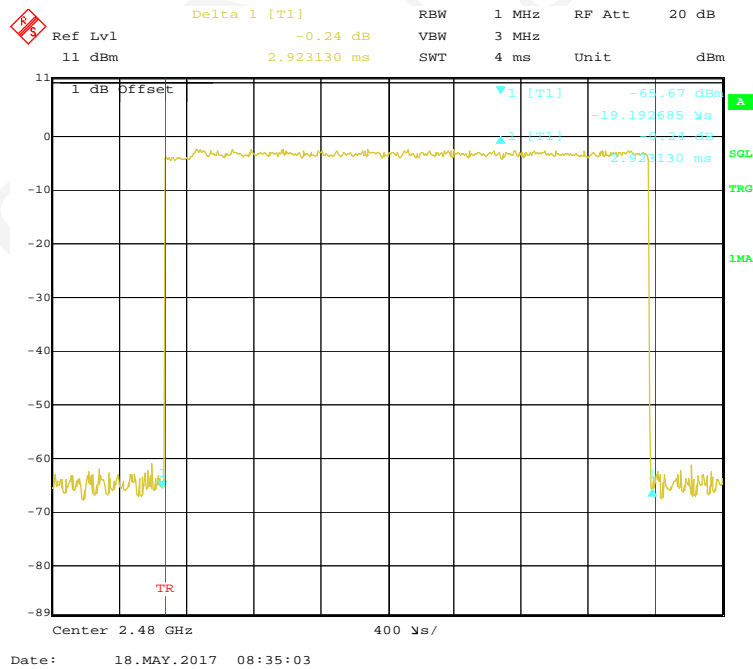


**EDR (8DPSK): Pulse time, Low Channel, 3DH1**

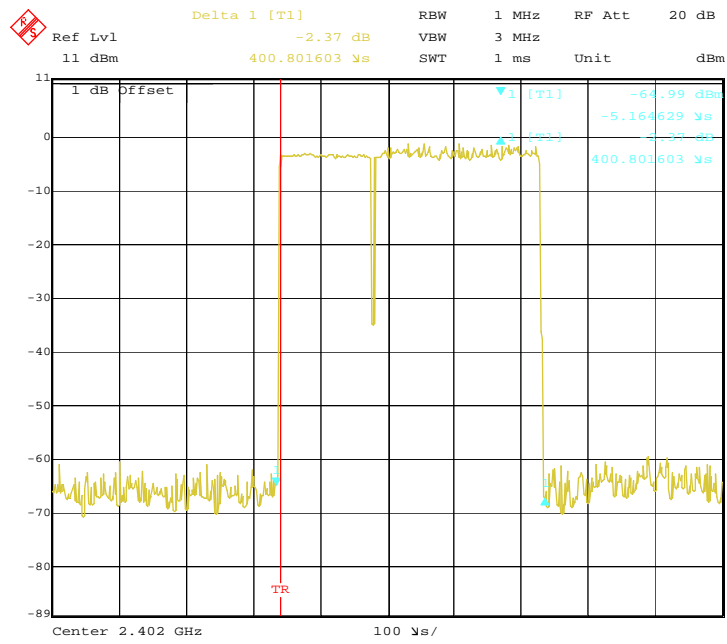


**Pulse time, Middle Channel, 3DH1**

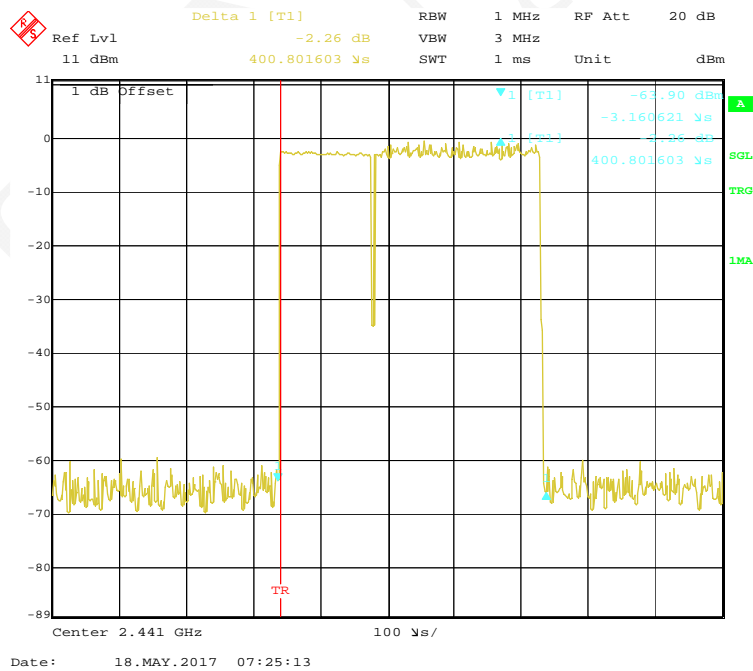


### Pulse time, High Channel, 3DH1

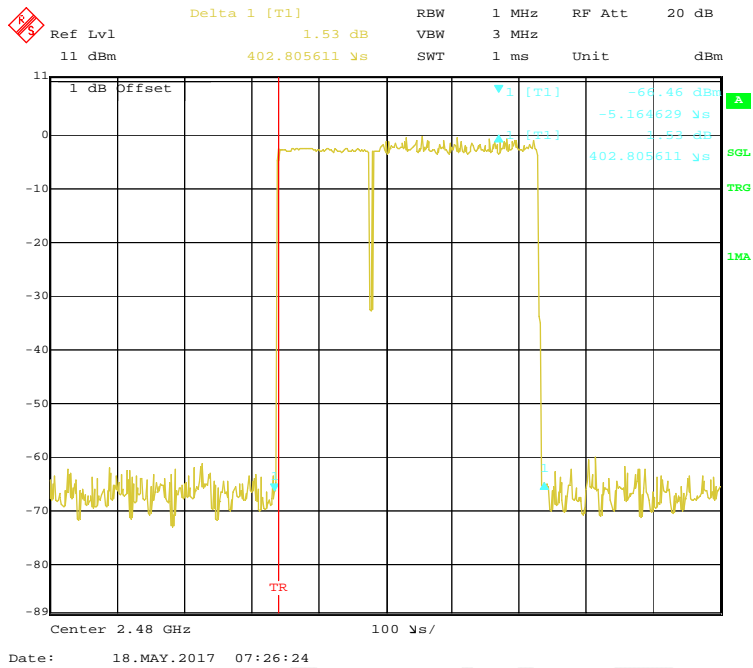

### Pulse time, Low Channel, 3DH3

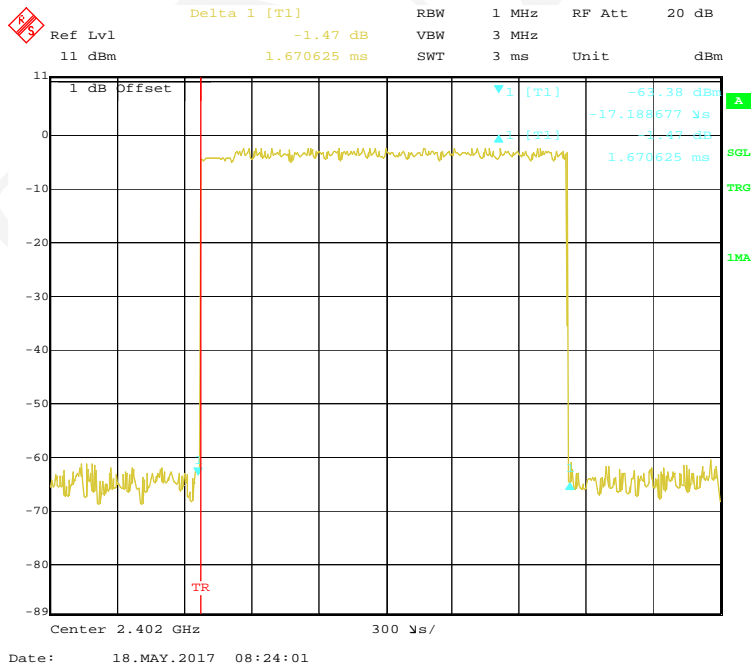


**Pulse time, Middle Channel, 3DH3**

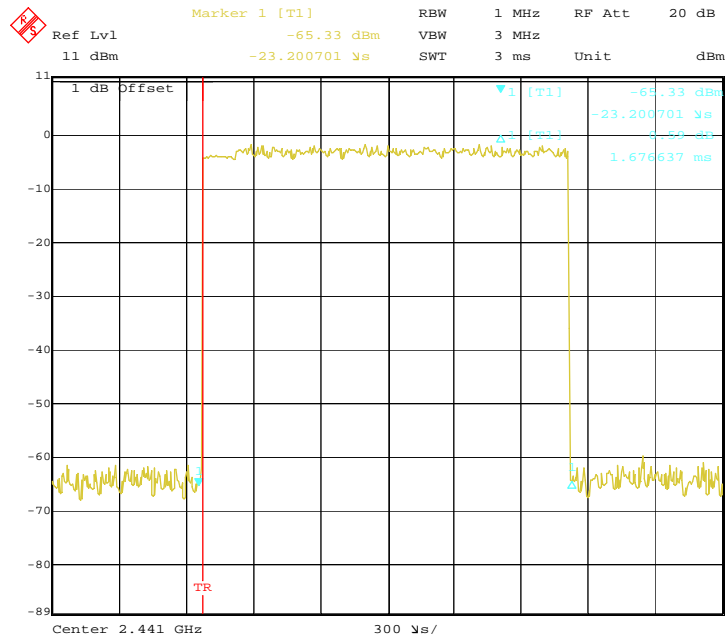


Date: 18.MAY.2017 08:25:01

**Pulse time, High Channel, 3DH3**

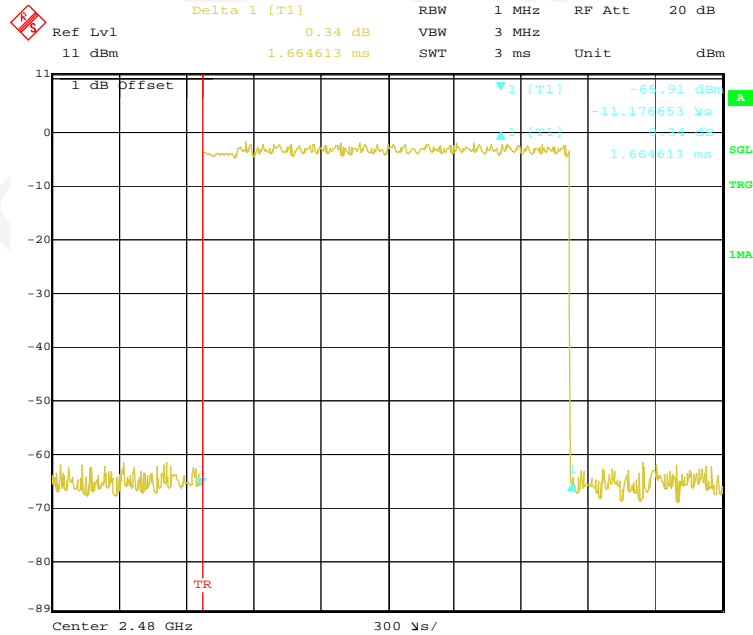


Date: 18.MAY.2017 08:26:26

**Pulse time, Low Channel, 3DH5**

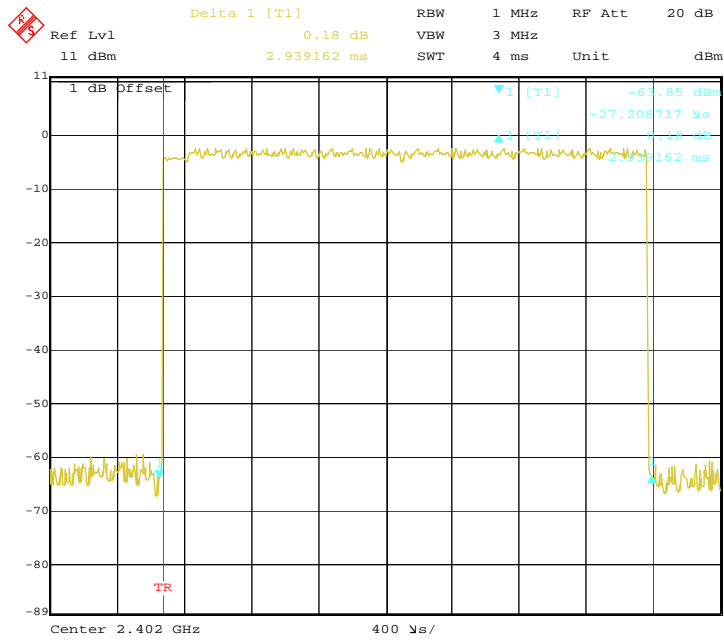


Date: 18.MAY.2017 08:36:19

**Pulse time, Middle Channel, 3DH5**

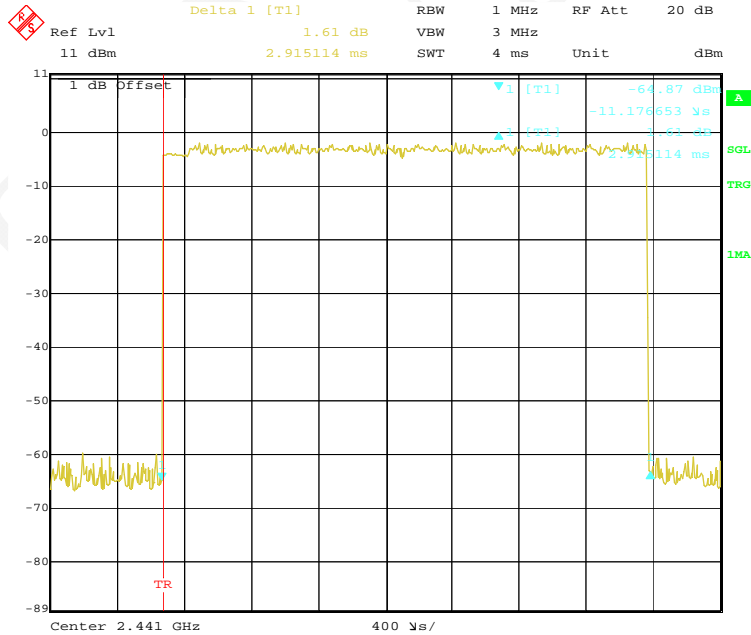

Date: 18.MAY.2017 08:37:06

### Pulse time, High Channel, 3DH5

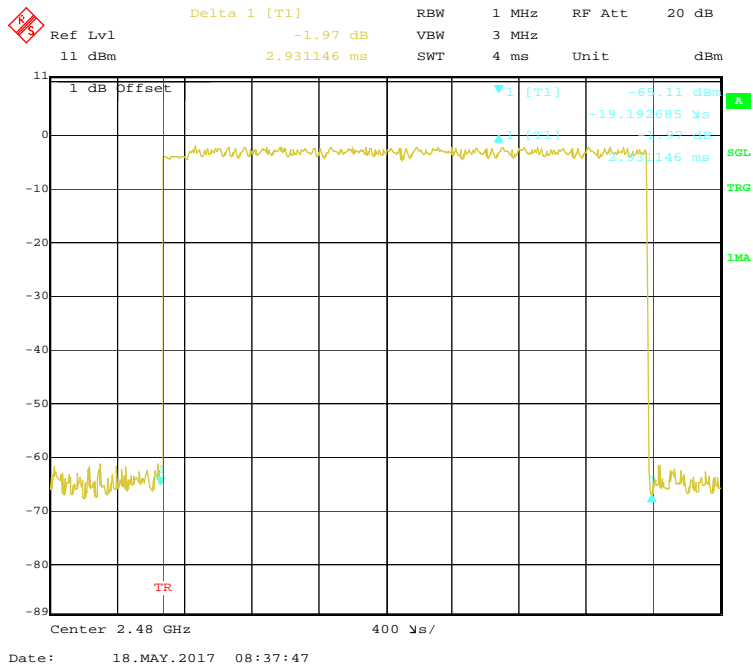

## FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT

### Applicable Standard

According to §15.247(b) (1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. And for all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.

### Test Procedure

1. Place the EUT on a bench and set in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.

### Test Data

#### Environmental Conditions

<b>Temperature:</b>	20.2 °C
<b>Relative Humidity:</b>	51 %
<b>ATM Pressure:</b>	101.3 kPa


*The testing was performed by Belle Cheng on 2017-05-17.*

*EUT operation mode: Transmitting*

*Test Result: Compliance. Please refer to following tables and plots*


Mode	Channel	Frequency (MHz)	Output Power		Limit (mW)
			(dBm)	(mW)	
<b>BDR (GFSK)</b>	Low	2402	0.63	1.16	1000
	Middle	2441	1.04	1.27	1000
	High	2480	0.34	1.08	1000
<b>EDR (<math>\pi/4</math>-DQPSK)</b>	Low	2402	2.68	1.85	1000
	Middle	2441	3.19	2.08	1000
	High	2480	2.48	1.77	1000
<b>EDR (8DPSK)</b>	Low	2402	3.13	2.06	1000
	Middle	2441	3.56	2.27	1000
	High	2480	2.83	1.92	1000

**BDR (GFSK): Low Channel**

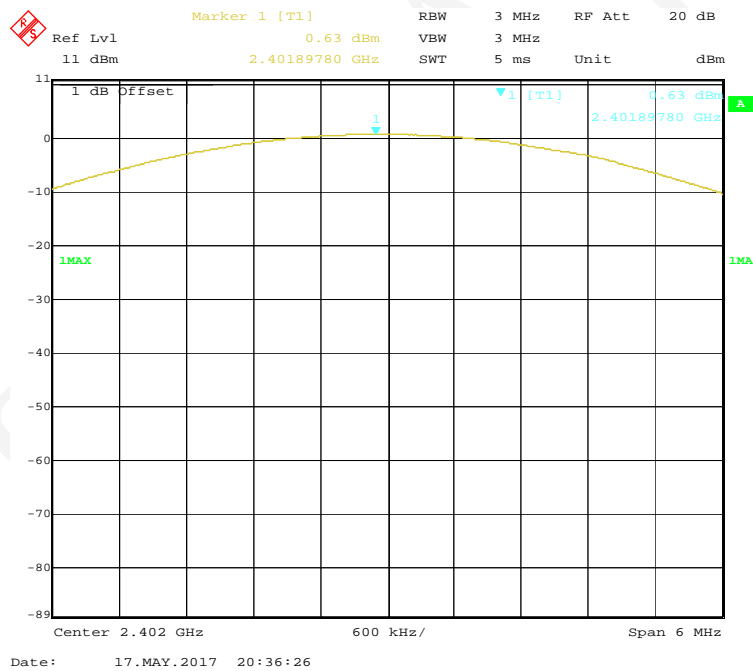





**BDR (GFSK): Middle Channel**

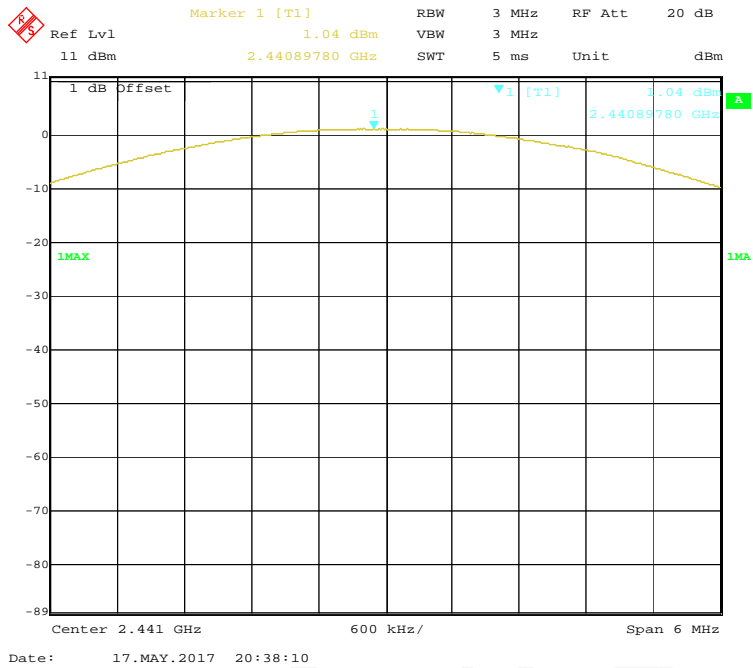


**BDR (GFSK): High Channel**

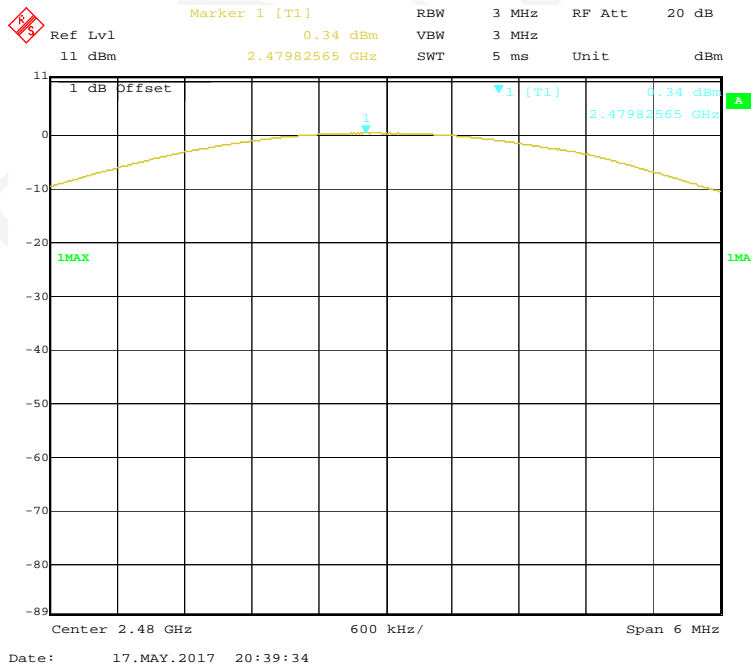


**EDR( $\pi/4$ -DQPSK): Low Channel**

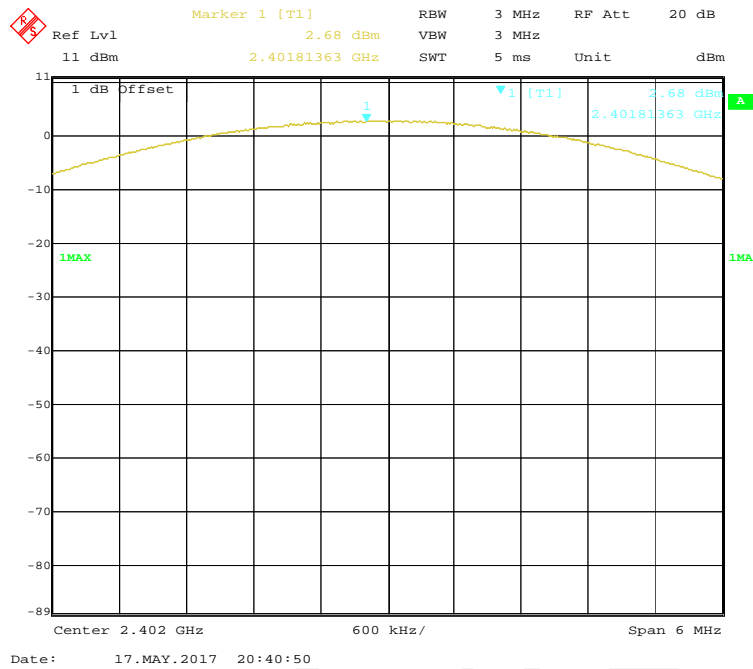


**EDR( $\pi/4$ -DQPSK): Middle Channel**

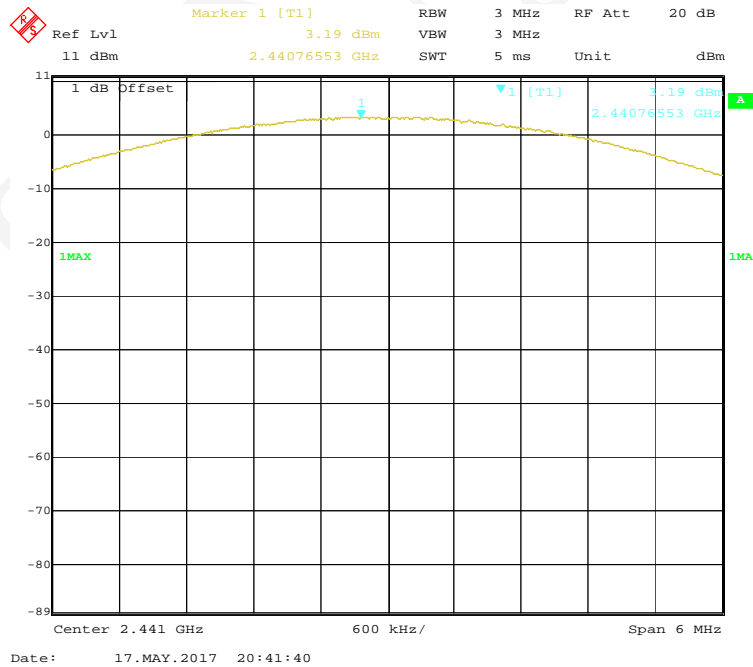


### EDR( $\pi/4$ -DQPSK): High Channel

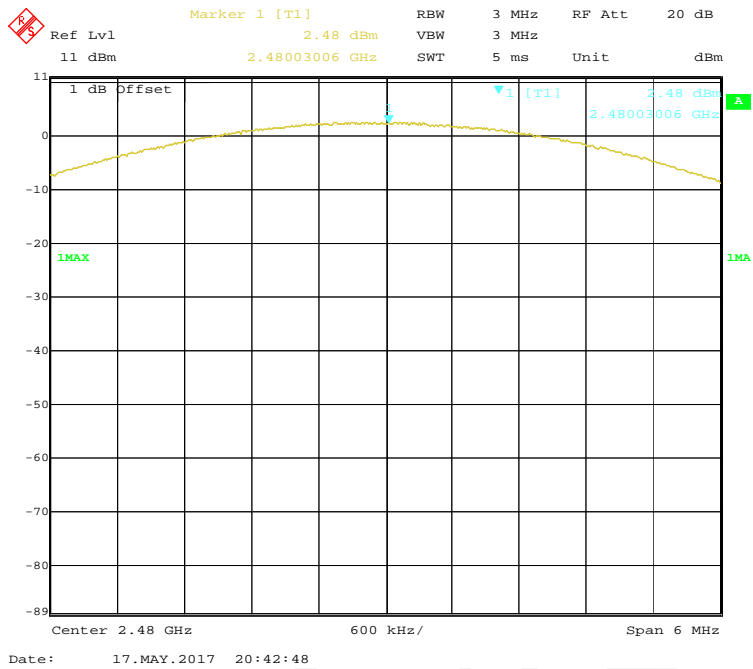


### EDR(8DPSK): Low Channel

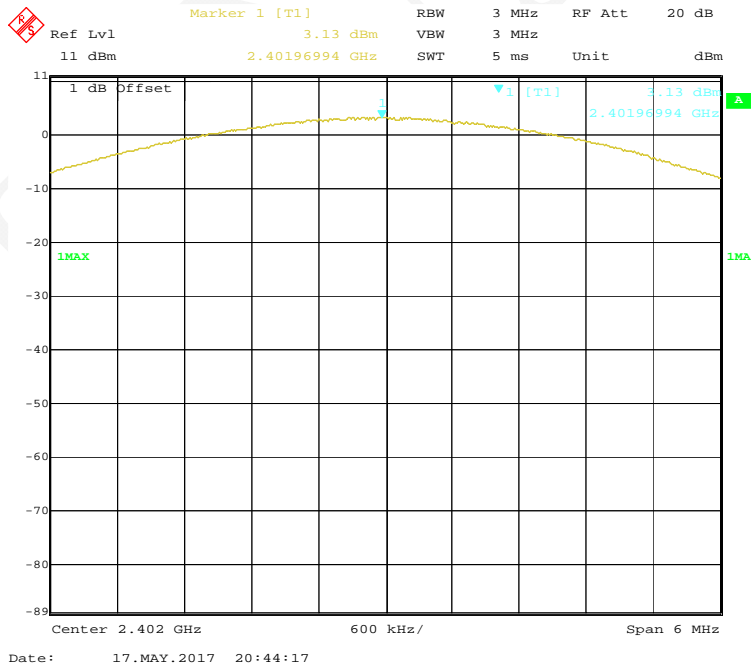

### EDR(8DPSK): Middle Channel

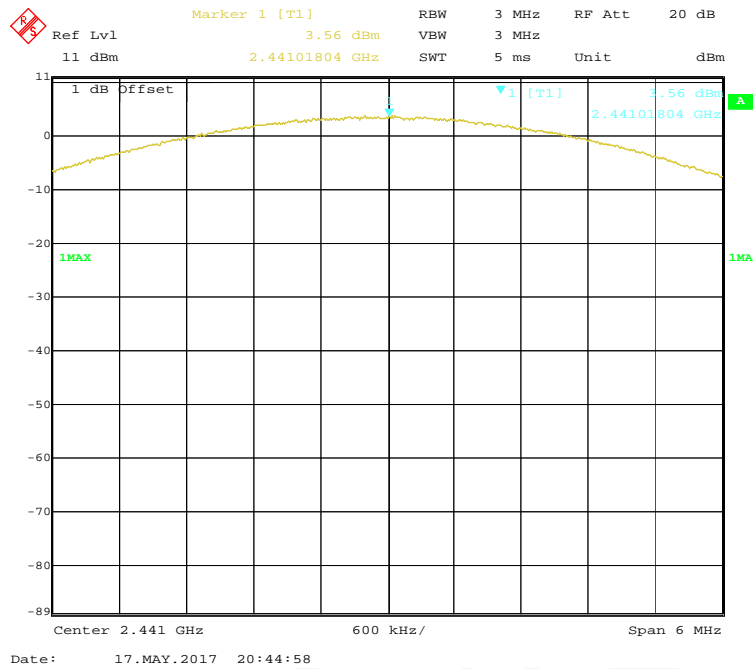

### EDR(8DPSK): High Channel

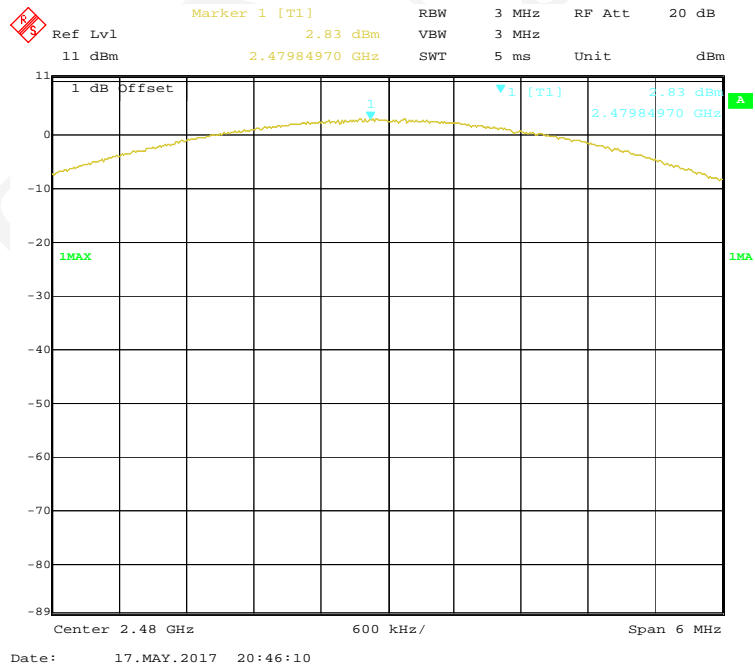

## **FCC §15.247(d) - BAND EDGES TESTING**

### **Applicable Standard**

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### **Test Procedure**

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

### **Test Data**

#### **Environmental Conditions**


<b>Temperature:</b>	20.2 °C
<b>Relative Humidity:</b>	51 %
<b>ATM Pressure:</b>	101.3 kPa

*The testing was performed by Belle Cheng on 2017-05-17.*


EUT operation mode: Transmitting

Test Result: Compliance. Please refer to following plots.


**BDR (GFSK): Band Edge-Left Side**

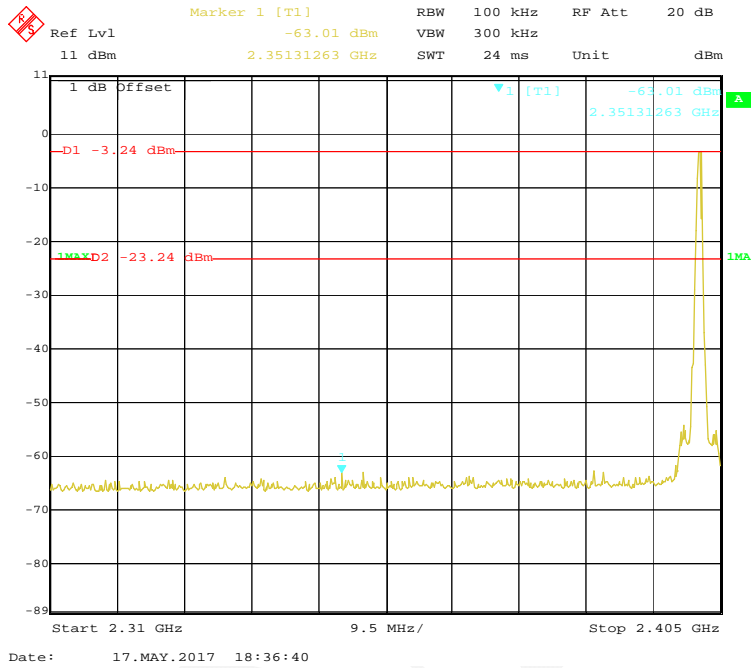


**BDR (GFSK): Band Edge-Right Side**

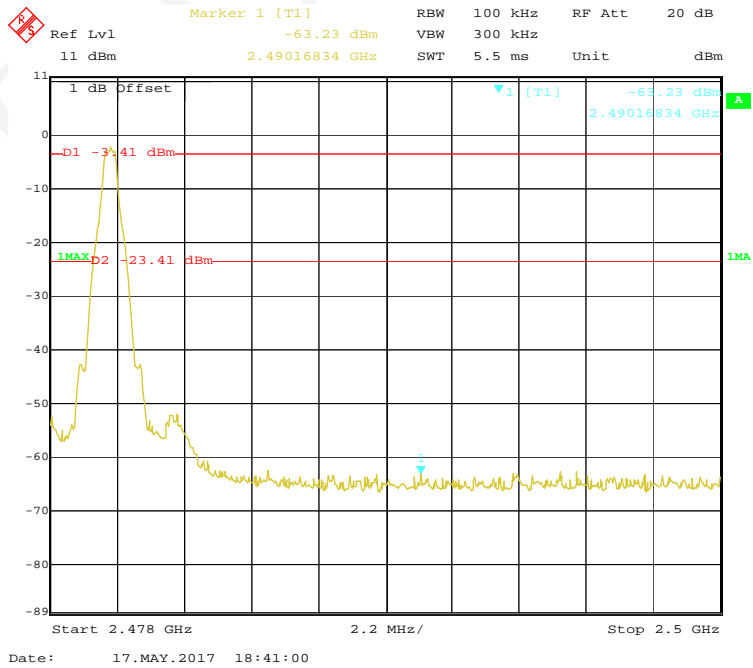


**EDR ( $\pi/4$ -DQPSK): Band Edge-Left Side**

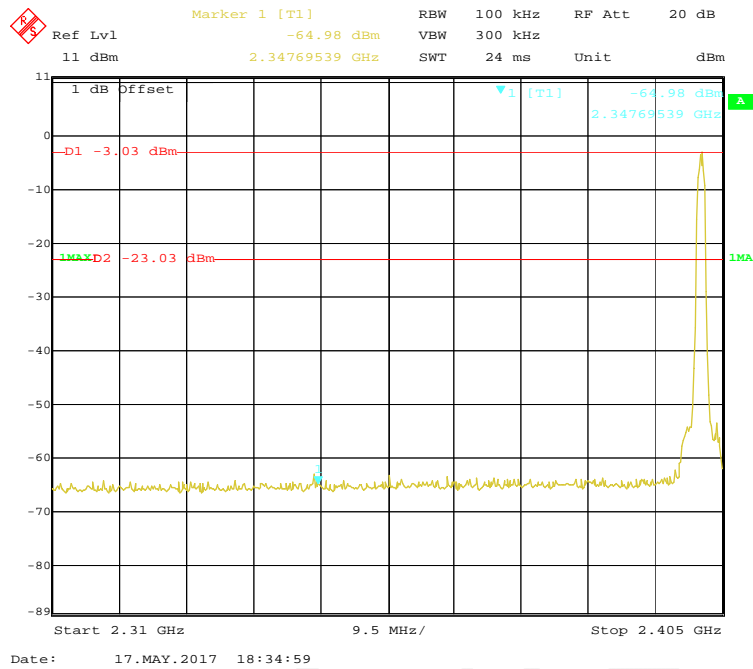


**EDR ( $\pi/4$ -DQPSK): Band Edge-Right Side**

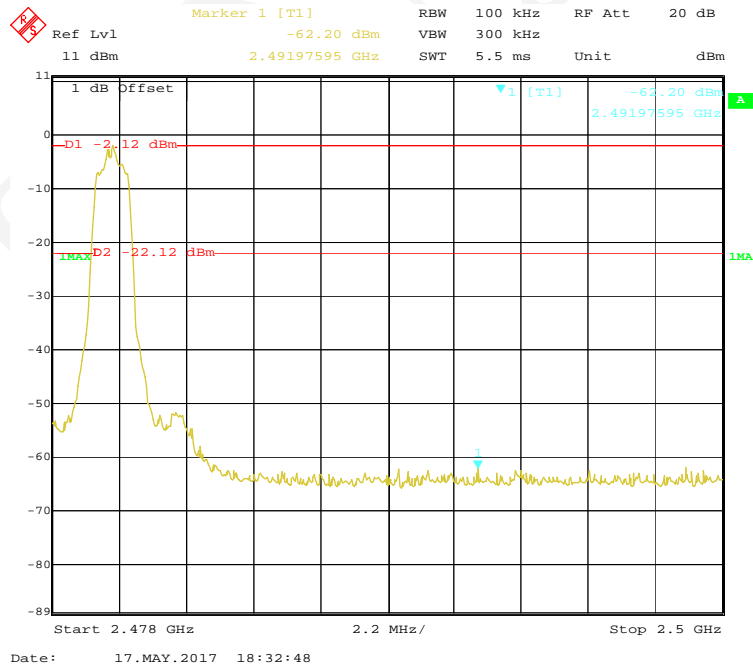

### EDR (8DPSK): Band Edge-Left Side

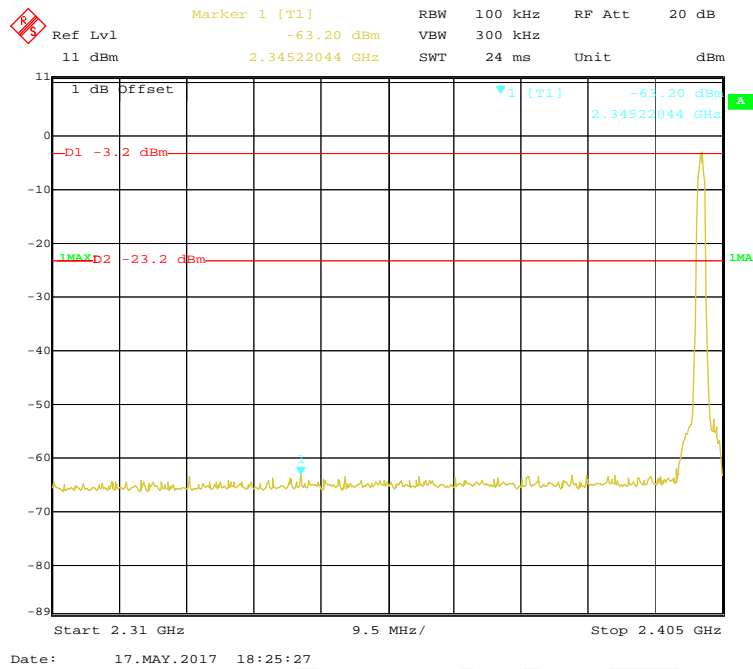

### BDR (8DPSK): Band Edge-Right Side

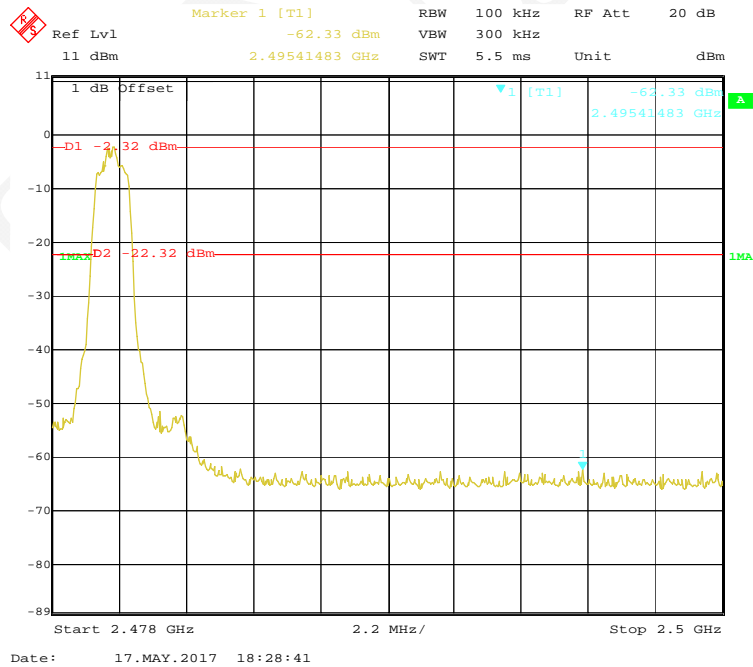

\*\*\*\*\* END OF REPORT \*\*\*\*\*