



CTK Co., Ltd.  
The Prime Leader of Global Regulatory Certification

## CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea  
Tel: +82-31-339-9970 Fax: +82-31-339-9855  
www.e-ctk.com

# TEST REPORT For FCC

Test Report No. : 2011100031  
Date of Issue : October 13, 2011  
FCC ID : WQRSHS-3320  
Model/Type No. : SHS-3320  
Kind of Product : Digital Doorlock  
Applicant : SEOUL COMMTECH Co., Ltd.  
Applicant Address : 448-11, Seongnae 3dong, Gangdong-gu, Seoul, Korea 134-033  
Manufacturer : VEGATECH Co., Ltd.  
Manufacturer Address : 146-7 Sangdaewondong, Jungwongu, Sunghamsi, Kyungki-Do Korea  
Contact Person : Jinhee Kim / Senior Engineer  
Telephone : +82-2-2225-6883  
Received Date : September 26, 2011  
Test period : Start : September 26, 2011 End : October 13, 2011  
Test Results :  **In Compliance**  **Not in Compliance**

The test results presented in this report relate only to the object tested.

Tested by

Won-Jae, Hwang  
Test Engineer  
Date: October 13, 2011

Reviewed by

Young-Joon, Park  
Technical Manager  
Date: October 13, 2011



CTK Co., Ltd.  
The Prime Leader of Global Regulatory Certification

# CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea  
Tel: +82-31-339-9970 Fax: +82-31-339-9855  
www.e-ctk.com

## REPORT REVISION HISTORY

Date	Revision	Revision
October 13, 2011	Issued (2011100031)	

***This report shall not be reproduced except in full, without the written approval of CTK Co., Ltd. This document may be altered or revised by CTK Co., Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by CTK Co., Ltd. will constitute fraud and shall nullify the document.***



CTK Co., Ltd.  
The Prime Leader of Global Regulatory Certification

# CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea

Tel: +82-31-339-9970 Fax: +82-31-339-9855

www.e-ctk.com

## TABLE OF CONTENTS

REPORT REVISION HISTORY .....	2
1.0 General Product Description .....	4
1.1 Model Differences .....	4
1.2 Device Modifications.....	4
1.3 EUT Configuration(s).....	5
1.4 Test Software .....	5
1.5 EUT Operating Mode(s) .....	5
1.6 Configuration .....	6
1.7 Calibration Details of Equipment Used for Measurement .....	7
1.8 Test Facility.....	7
1.9 Measurement Procedure .....	7
1.10 Laboratory Accreditations and Listings.....	8
2.0 Emissions Test Regulations .....	9
2.1 Radiated Electric Field Emissions - 15.225(a) .....	10
2.2 Radiated Electric Field Emissions - 15.225(b)(c) .....	12
2.3 Radiated Electric Field Emissions - 15.225(d) .....	13
2.4 Frequency Stability - 15.225(e) .....	15
2.5 Conducted Voltage Emissions - 15.207.....	17
APPENDIX A – TEST DATA.....	18
Radiated Electric Field Emissions (Quasi-Peak reading) .....	18
Bandwidth of the Operating Frequency .....	19



## 1.0 General Product Description

### 1.0.1 Tested Equipment

- Unless otherwise indicated, all tests were conducted on Model SHS-3320
- Tests performed on Model \_\_\_\_\_ were considered to be representative of Model(s) \_\_\_\_\_.

### 1.0.2 Equipment Size, Mobility and Identification

Dimensions: 68(W) by 180(L) by 29.5(H)  mm (Outdoor Unit)  
68(W) by 180(L) by 36.1(H)  mm (Indoor Unit)

Mobility:  Portable  Table-top  Built-in  
 Floor-standing

Serial No.: Prototype

### 1.0.3 Electrical Ratings

Input : 6 Vdc (4 AA Alkaline 1.5 V Batteries (LR6))  
Output : -

### 1.0.4 Test Voltage & Frequency

Unless indicated otherwise on the individual data sheet or test results, the test voltage and frequency was as indicated below.

Voltage: 6 Vdc (Battery)  
Frequency: -

### 1.0.5 Clock & Other Frequencies Utilized

8 MHz, 13.56 MHz

## 1.1 Model Differences

Not applicable

## 1.2 Device Modifications

Not applicable



### 1.3 EUT Configuration(s)

See Appendix A for individual test set-up configuration(s). The following peripheral devices and/or interface cables were connected during the measurement:

Peripheral Devices

Device	Manufacturer	Model No.	Serial No.	FCC ID or DoC

Cable Description

#	Description	Ferrite Core	Length (m)	Other Details

### 1.4 Test Software

- EMC Test V 1.0
- Display Test Patterns - V1.5
- Ping.exe
- Not applicable

### 1.5 EUT Operating Mode(s)

Equipment under test was operated during the measurement under the following conditions:

- Standby
- Display circles pattern
- Practice operation - EUT transmitting at 13.56 MHz continuously
- Scrolling 'H'
- Read / Write



CTK Co., Ltd.  
The Prime Leader of Global Regulatory Certification


## CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea

Tel: +82-31-339-9970 Fax: +82-31-339-9855

www.e-ctk.com

### 1.6 Configuration

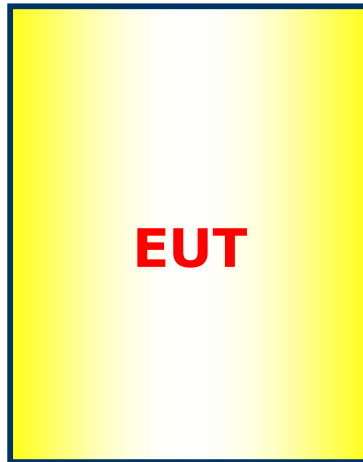



## 1.7 Calibration Details of Equipment Used for Measurement

Test equipment and test accessories are calibrated on regular basis. The maximum time between calibrations is one year or what is recommended by the manufacturer, whichever is less. All test equipment calibrations are traceable to the Korea Research Institute of Standards and Science (KRISS), therefore, all test data recorded in this report is traceable to KRISS.

## 1.8 Test Facility

The measurement facility is located at 386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea. The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22.

## 1.9 Measurement Procedure

Preliminary AC power line conducted emissions tests were performed shielded room. To find worst mode, several typical mode and typical cable position were tested. Final AC power line conducted emissions test was performed shielded room. (location is same as Preliminary test)

Based on the preliminary tests of the EUT, final test was proceeded worst case test mode and cable configuration.

Preliminary radiated emissions test were performed anechoic chamber (Distance of antenna and EUT was 3 m). To find worst mode, several typical mode and typical cable position were tested and peak level and frequency were recorded.

Final radiated emissions test was performed Open Area Test Site. Based on the preliminary tests of the EUT, final test was proceeded worst case test mode and cable configuration.

\* Measurement procedures was In accordance with ANSI C63.4-2003 7.2.3, 7.2.4, 8.3.1.1, 8.3.1.2



CTK Co., Ltd.  
The Prime Leader of Global Regulatory Certification





# CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea

Tel: +82-31-339-9970 Fax: +82-31-339-9855

www.e-ctk.com

## 1.10 Laboratory Accreditations and Listings

Country	Agency	Scope of Accreditation	Logo
USA	FCC	3 & 10 meter Open Area Test Sites and one conducted site to perform FCC Part 15/18 measurements.	 805871
JAPAN	VCCI	10 meter Open Area Test Site and one conducted site.	 R-948, C-986, T-1843
KOREA	KCC	EMI (10 meter Open Area Test Site and two conducted sites) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 No. 51, KR0025
International	KOLAS	EMC	





## 2.0 Emissions Test Regulations

The emissions tests were performed according to following regulations:

- EN 61000-6-3:2007
- EN 61000-6-4:2007
- EN 55011:2007 +A2:2007  Group 1  Group 2  
 Class A  Class B
- EN 55013:2001 +A1:2003 +A2:2006
- EN 55014-1:2006
- EN 55015:2006
- EN 61204-3:2000  Class A  Class B
- EN 61131-2:2003
- EN 61326-1:2006  Class A  Class B
- EN 55022:2006  Class A  Class B
- EN 61000-3-2:2006
- EN 61000-3-3:1995 +A1:2001 +A2:2005
- VCCI V-3/2008.04  Class A  Class B
- AS/NZS CISPR22:2006  Class A  Class B
- FCC Part 15 Subpart C
- CISPR 22:2006  Class A  Class B

## 2.1 Radiated Electric Field Emissions - 15.225(a)

### Reference Standard

FCC Part 15.225(a)

### Test Date

October 4, 2011

### Test Location

EMI-Anechoic chamber with a conductive ground plane:  
Testing was performed at a test distance of 3 m

### Test Equipment

	Name of Equipment	Manufacturer	Model No.	Serial No.	Due Date
<input checked="" type="checkbox"/>	Field Strength Meter	Rohde & Schwarz	ESHS30	828144/002	2012-02-09
<input checked="" type="checkbox"/>	Loop Antenna	EMCO	6502	9107-2652	2012-10-29


### Frequency Range of Measurement

13.553 MHz to 13.567 MHz

### Instrument Settings

IF Band Width: 10 kHz

### Test Setup

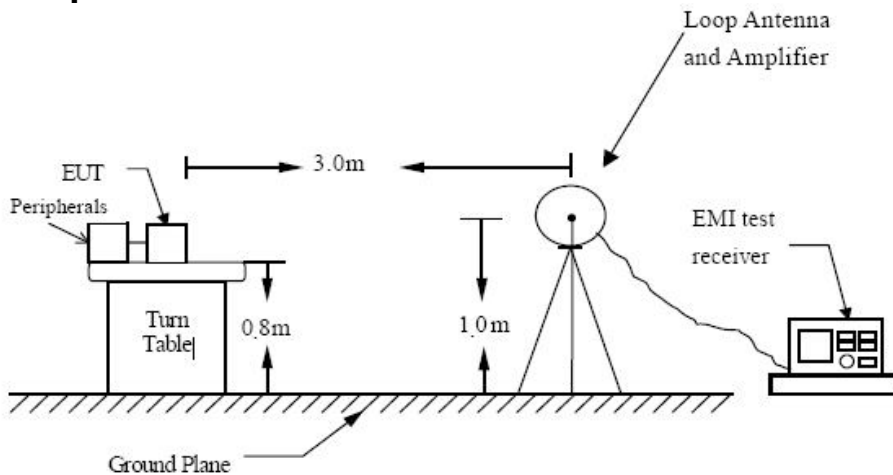



CTK Co., Ltd.  
The Prime Leader of Global Regulatory Certification

## CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea

Tel: +82-31-339-9970 Fax: +82-31-339-9855

www.e-ctk.com

### Measurement Procedure(blow 30 MHz)

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. Three orientation for the EUT were tried to find out which orientation produces the worst emissions.
3. The loop antenna was also moved around to find out worst position for the emissions.
4. Set the spectrum analyzer in the following setting as:  
For Below 30 MHz :  
RBW = 9 kHz / VBW = 300 kHz / Sweep = AUTO
5. Repeat above procedures until the measurements for all frequencies are complete.

### Radiated emission limits

The field strength of any emissions within the band 13.553-13.567 MHz shall not exceed 15.848 uV/m at 30 meters.

### Test Results

Frequency (MHz)	Field Strength of Fundamental uV/m@ 30 m	Field Strength of Fundamental dBuV/m @ 30 m	Field Strength of Fundamental dBuV/m @ 3 m
13.553-13.567	1.69	4.55	44.55

The requirements are:

- MET
- NOT MET
- NOT APPLICABLE

### Remarks

See Appendix A for test data



CTK Co., Ltd.  
The Prime Leader of Global Regulatory Certification

# CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea

Tel: +82-31-339-9970 Fax: +82-31-339-9855

www.e-ctk.com

## 2.2 Radiated Electric Field Emissions - 15.225(b)(c)

### Reference Standard

FCC Part 15.225(b)(c)

### Test Date

October 4, 2011

### Test Location

EMI-Anechoic chamber with a conductive ground plane:  
Testing was performed at a test distance of 3 m

### Test Equipment

	Name of Equipment	Manufacturer	Model No.	Serial No.	Due Date
<input checked="" type="checkbox"/>	Field Strength Meter	Rohde & Schwarz	ESHS30	828144/002	2012-02-09
<input checked="" type="checkbox"/>	Loop Antenna	EMCO	6502	9107-2652	2011-10-29

### Frequency Range of Measurement

13.410 MHz to 13.553 MHz, 13.567 MHz to 13.710 MHz  
13.110 MHz to 13.410 MHz, 13.710 MHz to 14.010 MHz

### Instrument Settings

IF Band Width: 10 kHz

### Radiated emission limits

Within the bands 13.410-13.553 MHz and 13.567-13.710 MHz, the field strength of any emissions shall not exceed 334 uV/m at 30 meters.

Within the bands 13.110-13.410 MHz and 13.710-14.010 MHz, the field strength of any emissions shall not exceed 106 uV/m at 30 meters.

### Test Results

Frequency (MHz)	Field Strength of Fundamental uV/m @ 30 m	Field Strength of Fundamental dBuV/m @ 30 m	Field Strength of Fundamental dBuV/m @ 3 m
13.410-13.553	0.94	-0.51	39.49
13.567-13.710	0.80	-1.98	38.02
13.110-13.410	0.17	-15.44	24.56
13.710-14.010	0.16	-15.99	24.01

The requirements are:

- MET
- NOT MET
- NOT APPLICABLE



## 2.3 Radiated Electric Field Emissions - 15.225(d)

### Reference Standard

FCC Part 15.225(d), 15.209

### Test Date

December 6, 2010

### Test Location

EMI-Anechoic chamber with a conductive ground plane:  
Testing was performed at a test distance of 3 m

### Test Equipment

	Name of Equipment	Manufacturer	Model No.	Serial No.	Due Date
<input checked="" type="checkbox"/>	Field Strength Meter	Rohde & Schwarz	ESVS30	826638/008	2012-07-07
<input checked="" type="checkbox"/>	ULTRA Broadband Antenna	Rohde & Schwarz	HL562	361324/014	2011-11-18
<input checked="" type="checkbox"/>	Field Strength Meter	Rohde & Schwarz	ESHS30	828144/002	2012-02-09
<input checked="" type="checkbox"/>	Loop Antenna	EMCO	6502	9107-2652	2011-10-29

### Frequency Range of Measurement

9 kHz to 1000 MHz

### Instrument Settings

IF Band Width: 10 kHz (9 kHz to 30 MHz)

IF Band Width: 120 kHz (30 MHz to 1000 MHz)

### Measurement Procedure(above 30 MHz)

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Set the spectrum analyzer in the following setting as:  
For 30 MHz ~ 1000 MHz :  
RBW = 120 kHz / VBW = 300 kHz / Sweep = AUTO
7. Repeat above procedures until the measurements for all frequencies are complete.



CTK Co., Ltd.  
The Prime Leader of Global Regulatory Certification

## CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea

Tel: +82-31-339-9970 Fax: +82-31-339-9855

www.e-ctk.com

### Radiated emission limits

Frequency (MHz)	Field Strength (uV/m)	Measurement Distance (m)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3

\*\* Except as provided in 15.209(g).fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72MHz, 76-88MHz, 174-216MHz, 470-806MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g.15.231 and 15.241.

### Test Results

The requirements are:

- MET  
 NOT MET  
 NOT APPLICABLE

### Remarks

See Appendix A for test data

## 2.4 Frequency Stability – 15.225(e)

### Reference Standard

FCC Part 15.225(e)


### Test Date

December 08, 2010

### Test Equipment

	Name of Equipment	Manufacturer	Model No.	Serial No.	Due Date
<input checked="" type="checkbox"/>	Signal Analyzer	Agilent	N9020A	MY48011598	2011-11-12
<input checked="" type="checkbox"/>	Temp & Humi Chamber	Kunpoong Engineering	JT-TH-556-1	9 Q E 5 - 0 0 2	2012-01-14

### Test Setup

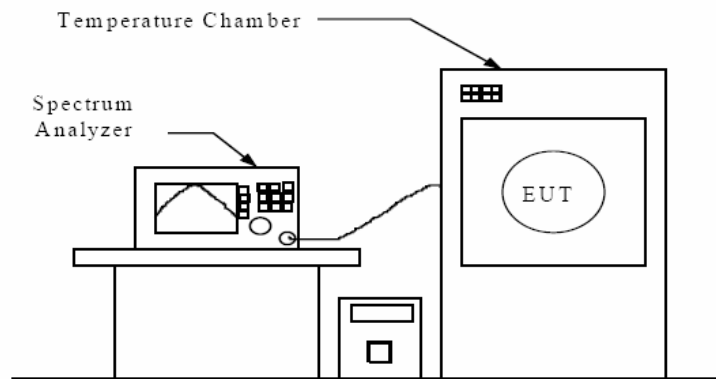

### Test Procedure

- A. Frequency stability vs. temperature measurement
  - The EUT was placed into the constant temperature chamber.
  - The spectrum analyzer was used to read the EUT operating frequency.
  - Set the constant temperature chamber temperature within the range of  $-20^{\circ}\text{C}$  to  $+50^{\circ}\text{C}$
- B. Frequency stability vs. input voltage measurement
  - The EUT was placed into the constant temperature chamber and set the temperature to  $20^{\circ}\text{C}$ .
  - The spectrum analyzer was used to read the EUT operating frequency.
  - The EUT is powered with the DC Power Supplied it with 85% and 115% voltage, and measured the EUT operating frequency.



CTK Co., Ltd.  
The Prime Leader of Global Regulatory Certification

## CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea

Tel: +82-31-339-9970 Fax: +82-31-339-9855

www.e-ctk.com

### Frequency tolerance Limit

The frequency tolerance of the carrier signal shall be maintained within +/- 0.01% of the operating frequency over a temperature variation of -20 °c to +50 °c at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 °c.

- Operating frequency : 13.56 MHz
- Limit : 13.56 MHz \* (±) 0.0001 = (±) 1356 Hz
- Within the band : 13.558644 MHz – 13.561356 MHz.

### Test Data

Timing	-20 °C	-10 °C	0 °C	10 °C	20 °C	30 °C	40 °C	50 °C
Start-up	13.559681	13.559712	13.559756	13.559770	13.559779	13.559780	13.559797	13.559794
10 min	13.559872	13.559728	13.559760	13.559777	13.559794	13.559780	13.559795	13.559793
30 min	13.559904	13.559737	13.559772	13.559776	13.559780	13.559798	13.559796	13.559790

Timing	Power 85%	Power 115%
Start-up	Not Applicable (Battery Power)	Not Applicable (Battery Power)
10 min	Not Applicable (Battery Power)	Not Applicable (Battery Power)
30 min	Not Applicable (Battery Power)	Not Applicable (Battery Power)

### Test Results

The requirements are:

- MET
- NOT MET
- NOT APPLICABLE





CTK Co., Ltd.  
The Prime Leader of Global Regulatory Certification

# CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea  
Tel: +82-31-339-9970 Fax: +82-31-339-9855  
www.e-ctk.com

## 2.5 Conducted Voltage Emissions – 15.207

### Reference Standard

FCC Part 15.207

### Test Date

Not Applicable (Battery Power)

### Test Location

Shielded Room

### Test Equipment

	Name of Equipment	Manufacturer	Model No.	Serial No.	Due Date
<input type="checkbox"/>	EMI Test Receiver	Rohde & Schwarz	ESCI3	100032	2012-02-09
<input type="checkbox"/>	EMI Test Receiver	Rohde & Schwarz	ESHS30	828144/002	2012-02-09
<input type="checkbox"/>	LISN	Rohde & Schwarz	ENV216	101150	2012-03-09
<input type="checkbox"/>	LISN	EMCO	3825/2	9409-2246	2011-07-09
<input type="checkbox"/>	LISN	Rohde & Schwarz	ENV216	101151	2012-03-09
<input type="checkbox"/>	LISN	Rohde & Schwarz	ESH3-Z5	100207	2011-11-15
<input type="checkbox"/>	ISN	TESEQ GMBH	ISN T8	25191	2011-12-30
<input type="checkbox"/>	ISN	TESEQ GMBH	ENY81-CA6	101553	2011-11-25

### Frequency Range of Measurement

150 kHz to 30 MHz

### Instrument Settings

IF Band Width: 9 kHz

### Conducted Emission limits

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

### Test Results

The requirements are:

MET

Frequency (MHz)	Measured Data (dBuV)	Margin (dB)	Remark

NOT MET

NOT APPLICABLE

### Remarks



# CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea

Tel: +82-31-339-9970 Fax: +82-31-339-9855

www.e-ctk.com

CTK Co., Ltd.  
The Prime Leader of Global Regulatory Certification

## APPENDIX A – TEST DATA

### Radiated Electric Field Emissions (Quasi-Peak reading)


#### 1) Fundamental Frequency Test Data

Frequency [MHz]	Reading [dB $\mu$ V/m@3m]	Pol.	Height [m]	Correction Factor		Limits [dB $\mu$ V/m@3m]	Result [dB $\mu$ V/m@3m]	Margin [dB]
				Antenna	Cable			
13.56	35.70	H	1.0	8.84	0.01	124.0	24.6	99.5
13.56	33.31	V	1.0	8.84	0.01	124.0	22.2	101.8

#### 2) Frequency Range from 9 kHz to 30 MHz Test Data

Frequency [MHz]	Reading [dB $\mu$ V/m@3m]	Pol.	Height [m]	Correction Factor		Limits [dB $\mu$ V/m@3m]	Result [dB $\mu$ V/m@3m]	Margin [dB]
				Antenna	Cable			
Not detected emissions.								

#### 3) Frequency Range from 30 MHz to 1000 MHz Test Data

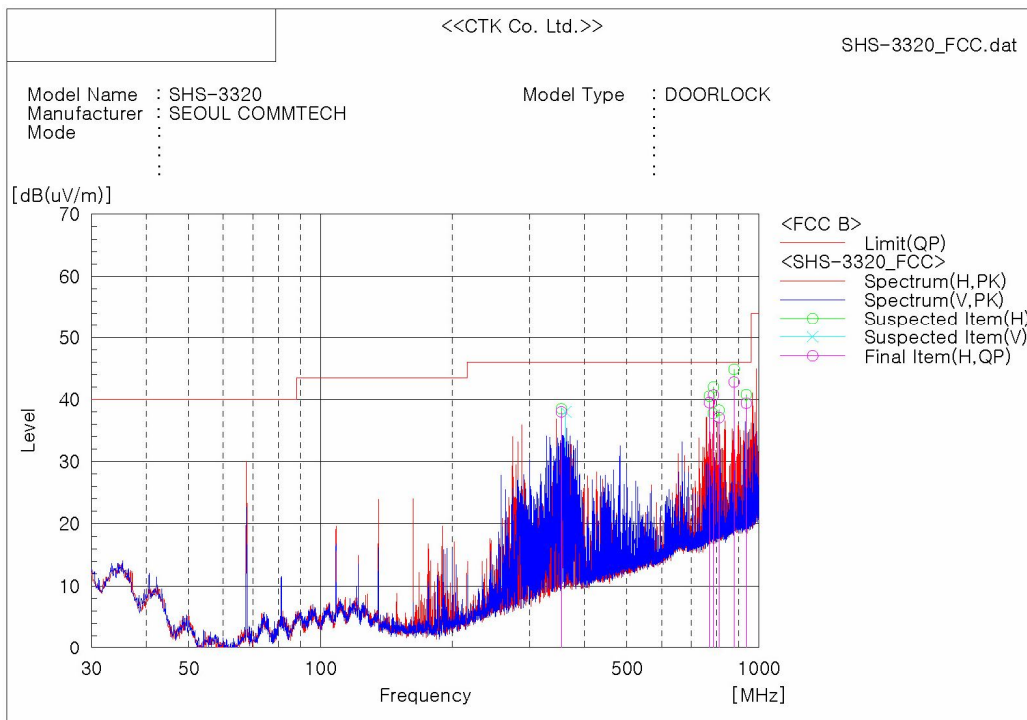

#### Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]	Remark
1	354.344	H	50.5	-12.5	38.0	46.0	8.0	100.0	167.0	
2	770.959	H	43.6	-4.1	39.5	46.0	6.5	100.0	315.0	
3	788.419	H	44.4	-3.7	40.7	46.0	5.3	100.0	241.0	
4	811.456	H	40.3	-3.2	37.1	46.0	8.9	100.0	315.0	
5	878.144	H	44.5	-1.7	42.8	46.0	3.2	100.0	241.0	
6	936.101	H	40.0	-0.6	39.4	46.0	6.6	100.0	92.0	



# CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea

Tel: +82-31-339-9970 Fax: +82-31-339-9855

www.e-ctk.com

CTK Co., Ltd.  
The Prime Leader of Global Regulatory Certification

## Bandwidth of the Operating Frequency

