

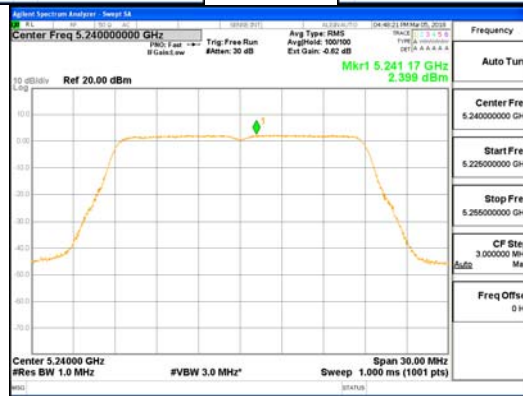


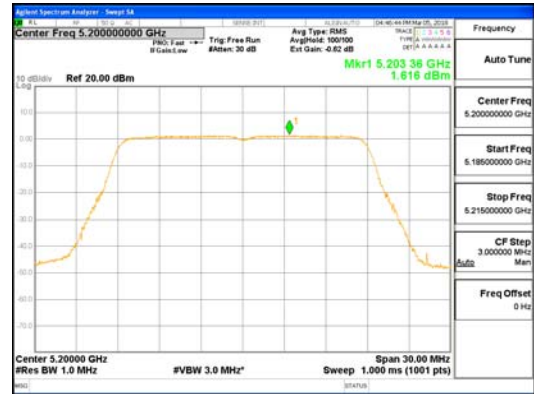


CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2018-00984
 Page (108) / (165)
 Pages

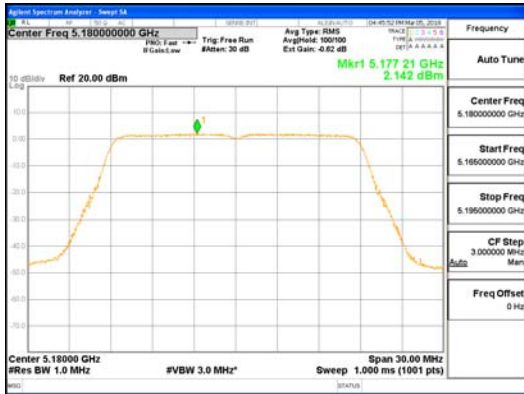

CDD Mode_ANT2_802.11n_HT20_UNII-1


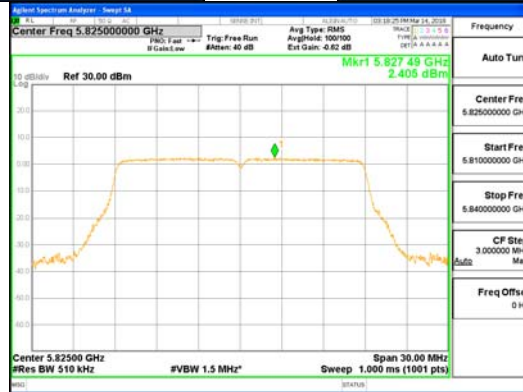


CDD Mode_ANT2_802.11n_HT20_UNII-3




CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2018-00984
 Page (109) / (165)
 Pages

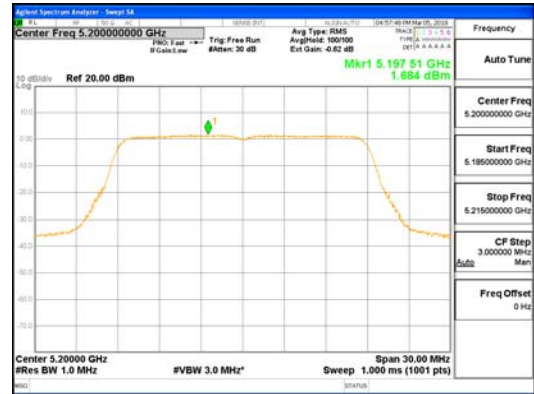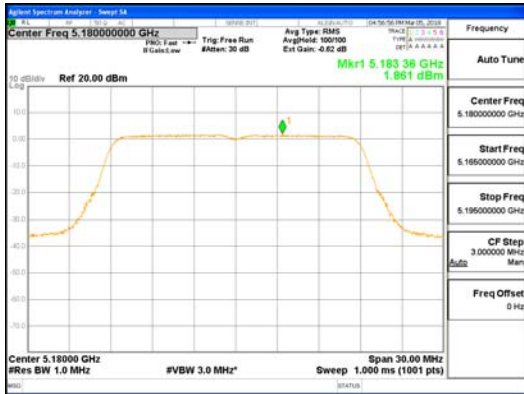

CDD Mode_ANT3_802.11n_HT20_UNII-1



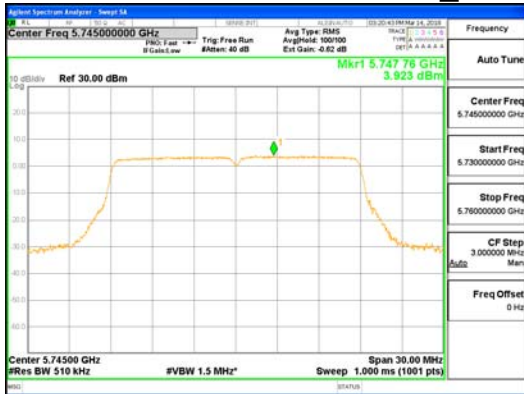


CDD Mode_ANT3_802.11n_HT20_UNII-3



CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2018-00984
 Page (110) / (165)
 Pages

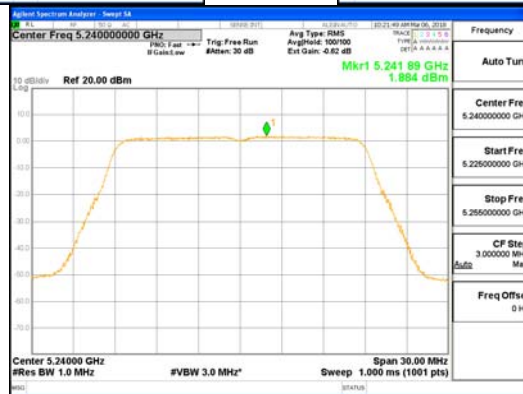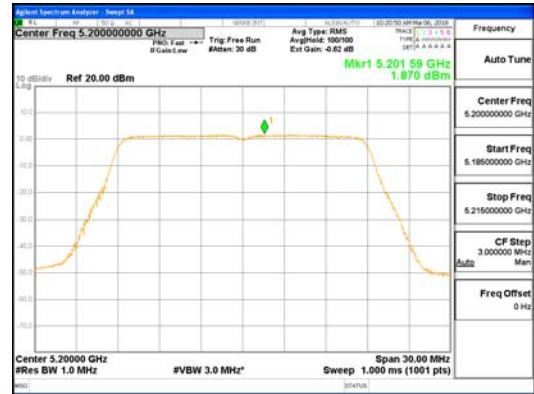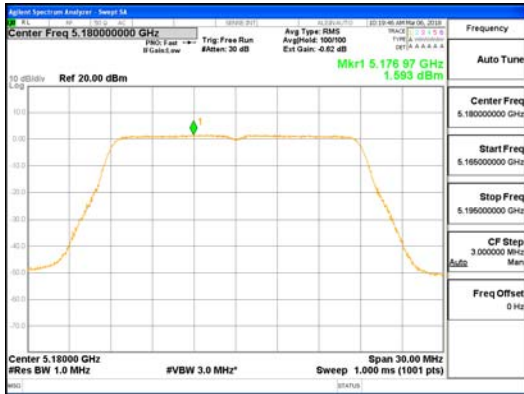

CDD Mode_ANTO_802.11ac_VHT20_UNII-1






CDD Mode_ANTO_802.11ac_VHT20_UNII-3



CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2018-00984
 Page (111) / (165)
 Pages

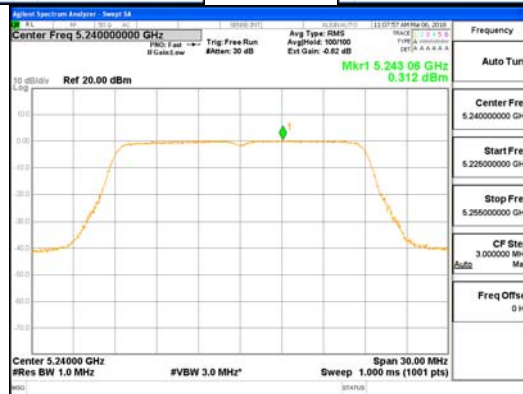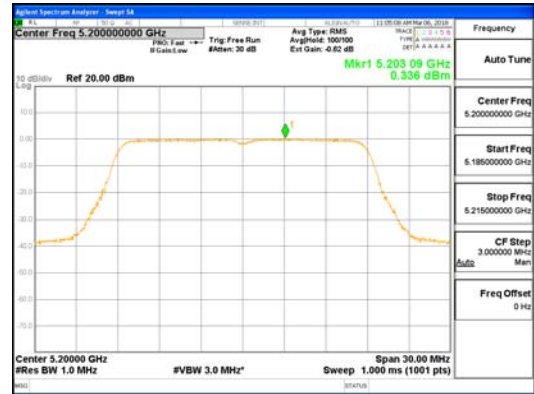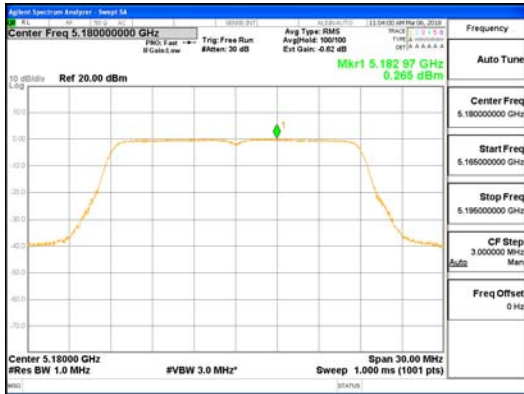

CDD Mode_ANT1_802.11ac_VHT20_UNII-1






CDD Mode_ANT1_802.11ac_VHT20_UNII-3





CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2018-00984
 Page (112) / (165)
 Pages

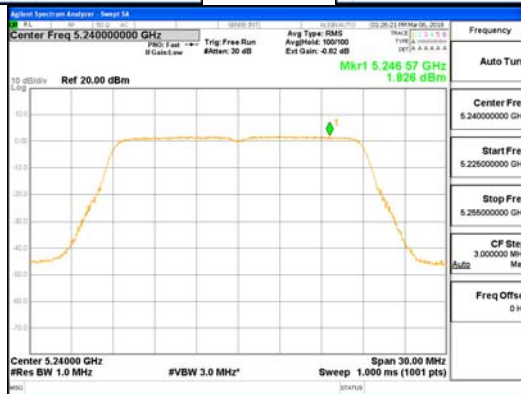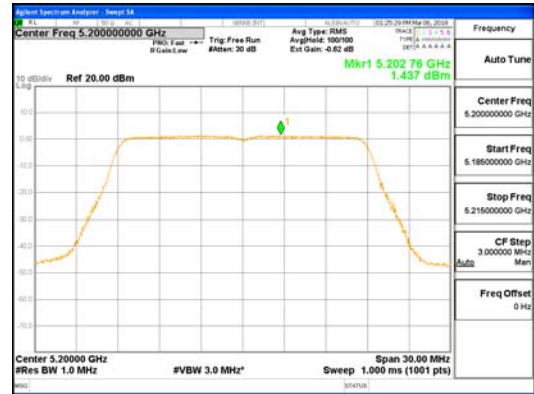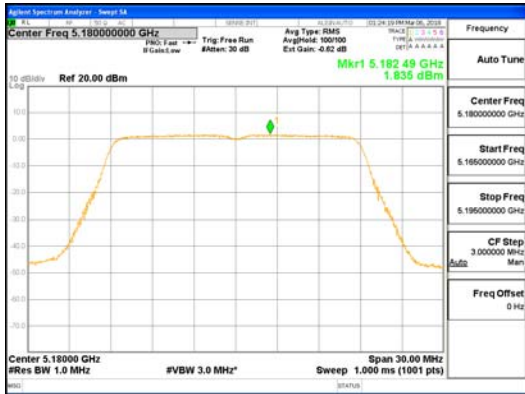

CDD Mode_ANT2_802.11ac_VHT20_UNII-1


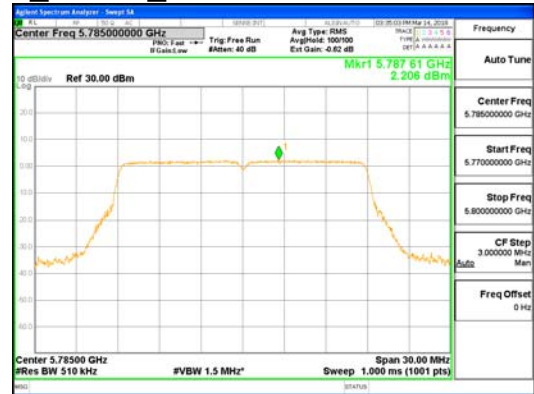
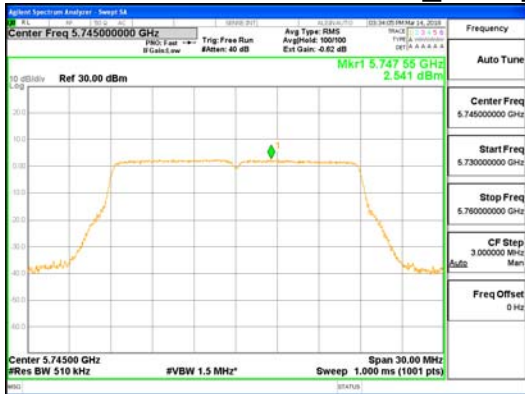


CDD Mode_ANT2_802.11ac_VHT20_UNII-3




CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2018-00984
 Page (113) / (165)
 Pages

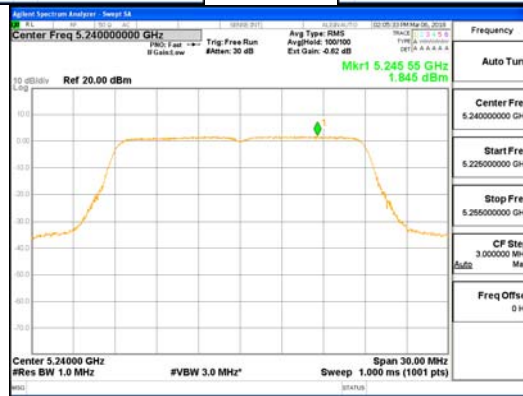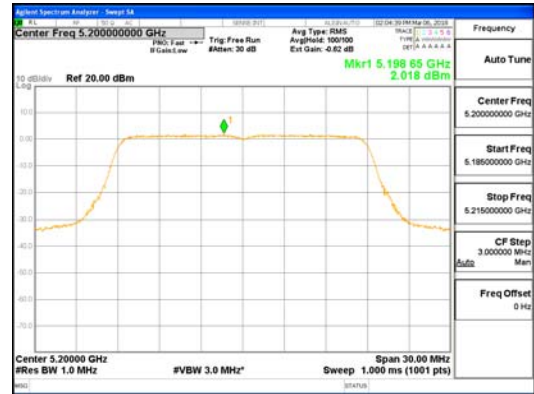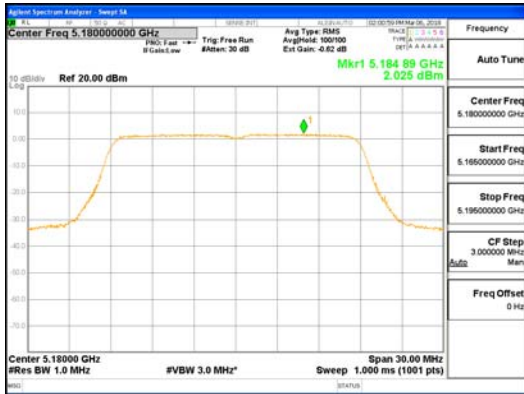

CDD Mode_ANT3_802.11ac_VHT20_UNII-1


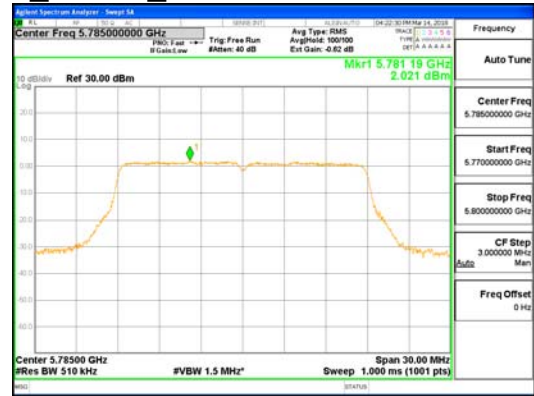


CDD Mode_ANT3_802.11ac_VHT20_UNII-3





CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501



Report No.:
 CTK-2018-00984
 Page (114) / (165)
 Pages

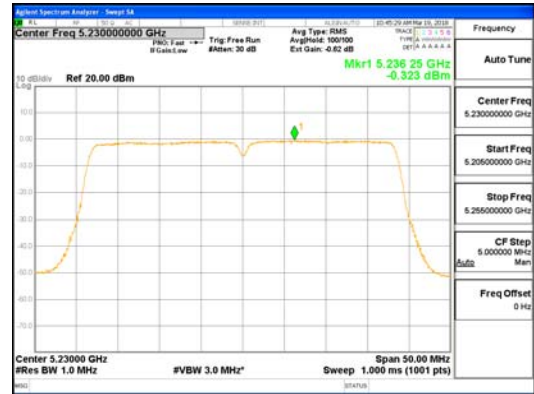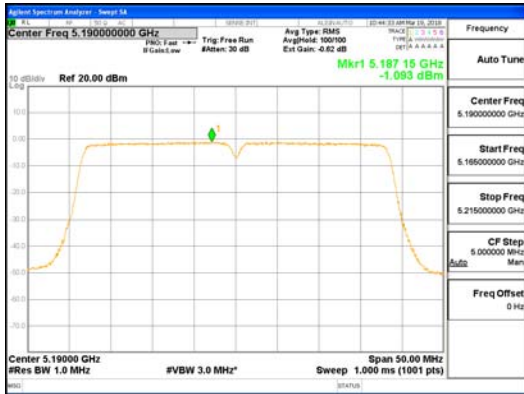



CDD Mode_ANT0_802.11n_HT40_UNII-1

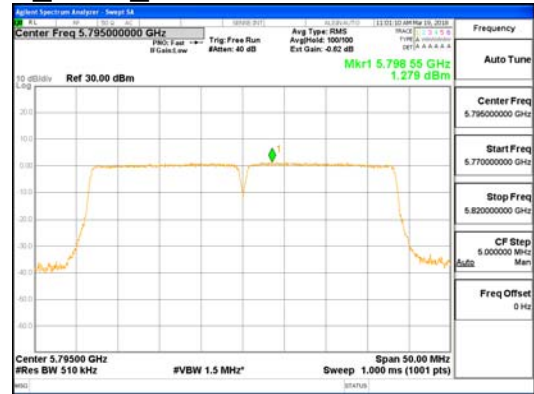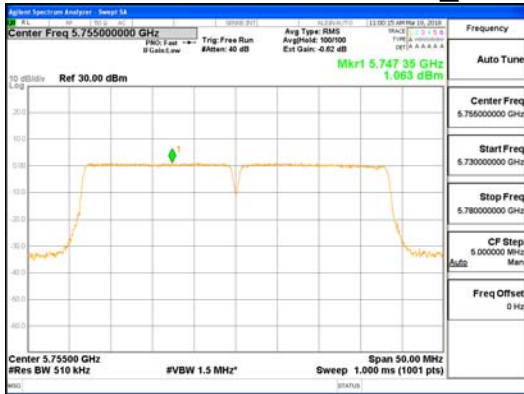

CDD Mode_ANT0_802.11n_HT40_UNII-3

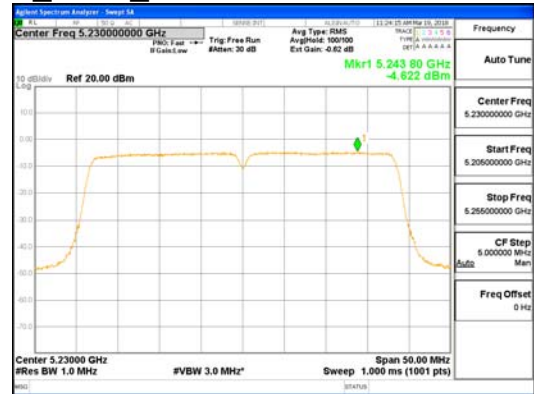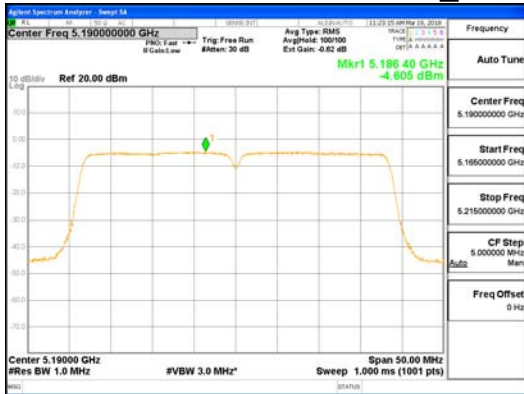

CDD Mode_ANT1_802.11n_HT40_UNII-1

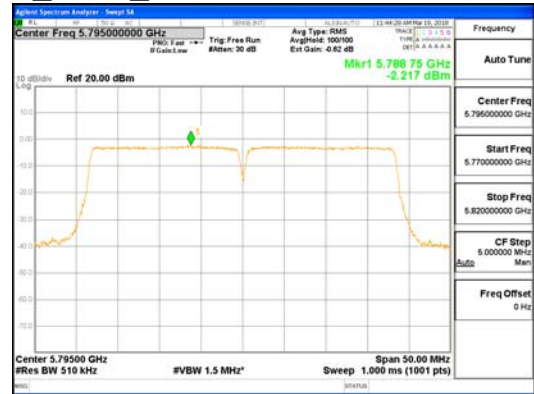
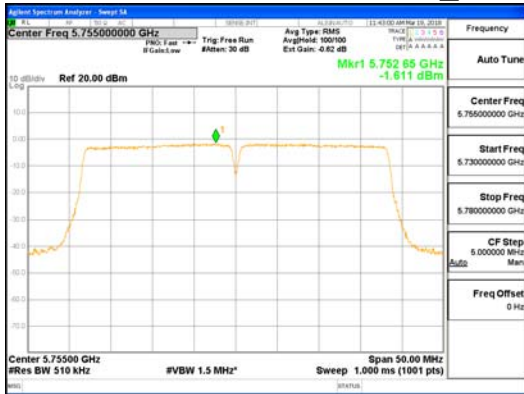


CDD Mode_ANT1_802.11n_HT40_UNII-3



CTK Co., Ltd.
(Ho-dong), 113, Yejik-ro, Cheoin-gu,
Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501



Report No.:
CTK-2018-00984
Page (115) / (165)
Pages

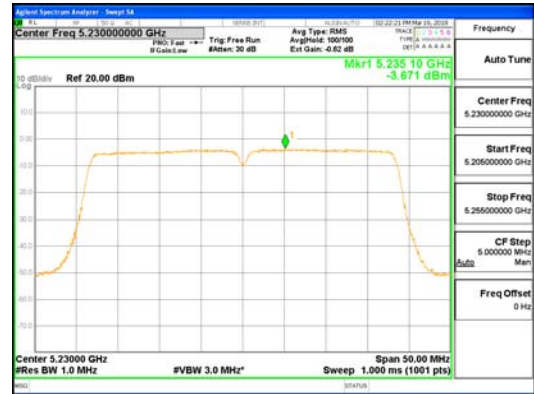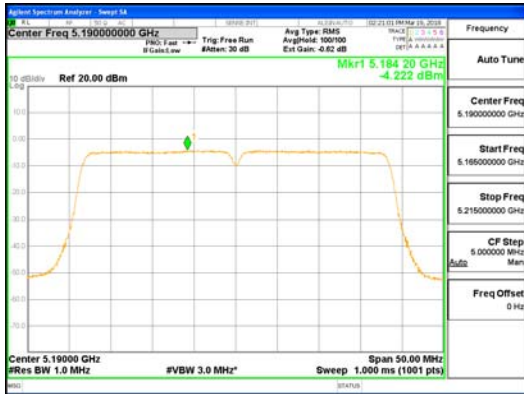


CDD Mode_ANT2_802.11n_HT40_UNII-1





CDD Mode_ANT2_802.11n_HT40_UNII-3

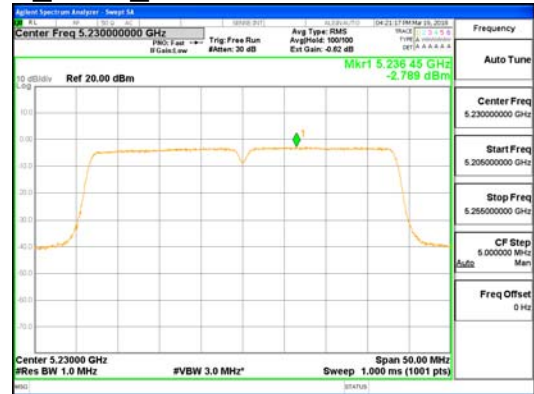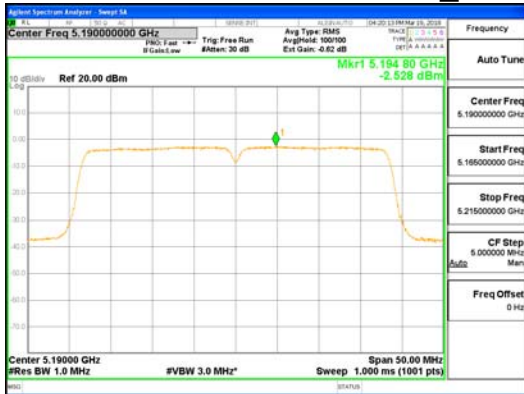


CDD Mode_ANT3_802.11n_HT40_UNII-1

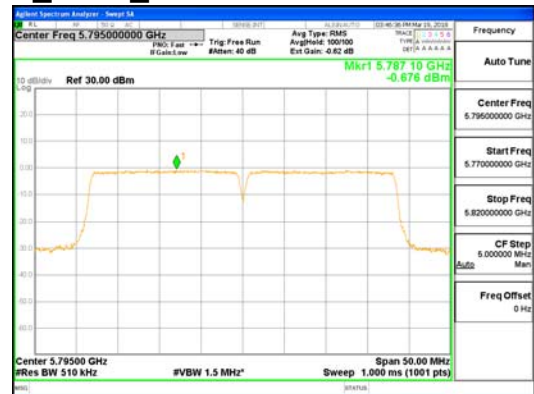


CDD Mode_ANT3_802.11n_HT40_UNII-3

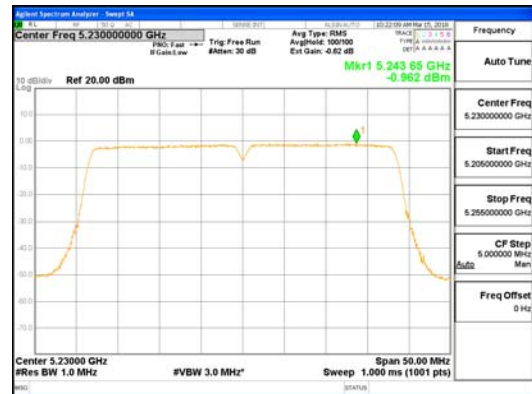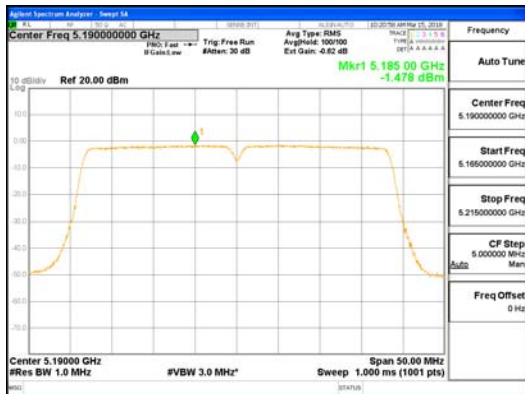



CDD Mode_ANT0_802.11ac_VHT40_UNII-1

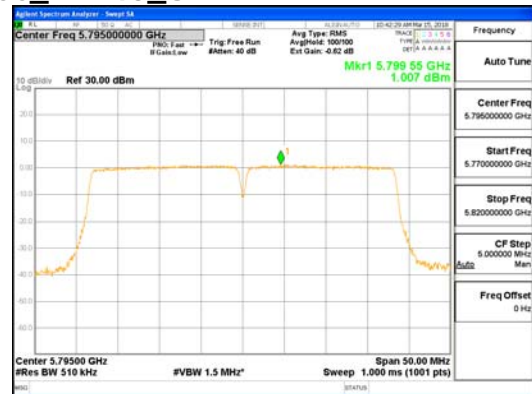

CDD Mode_ANT0_802.11ac_VHT40_UNII-3

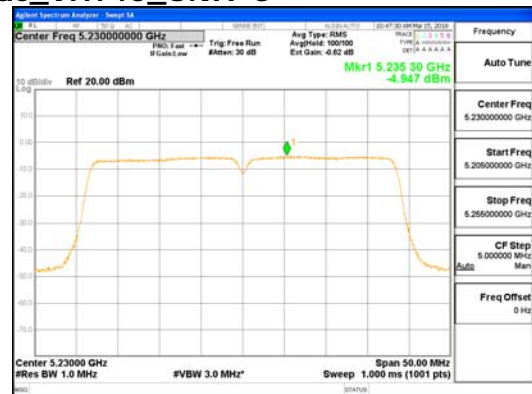

CDD Mode_ANT1_802.11ac_VHT40_UNII-1

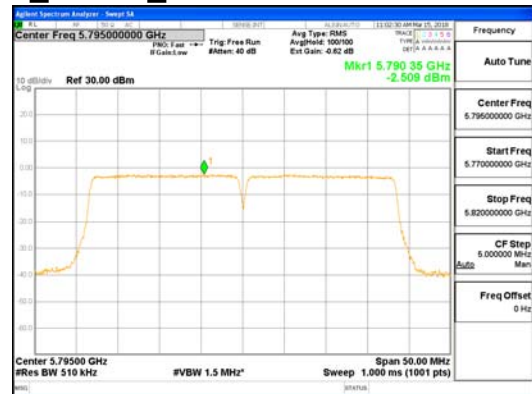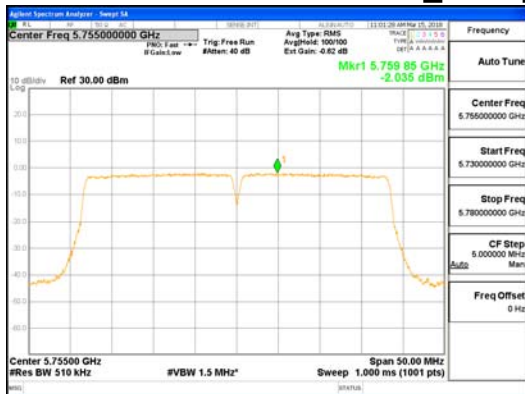


CDD Mode_ANT1_802.11ac_VHT40_UNII-3




CTK Co., Ltd.
(Ho-dong), 113, Yejik-ro, Cheoin-gu,
Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501



Report No.:
CTK-2018-00984
Page (117) / (165)
Pages

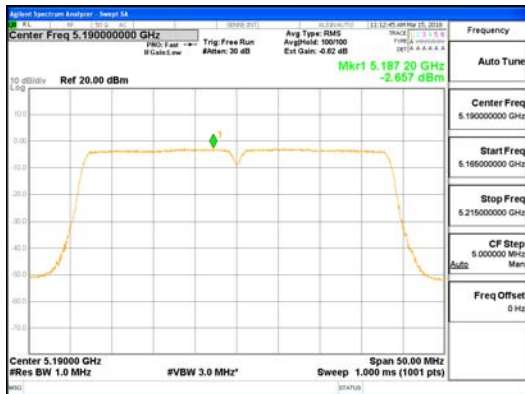


CDD Mode_ANT2_802.11ac_VHT40_UNII-1

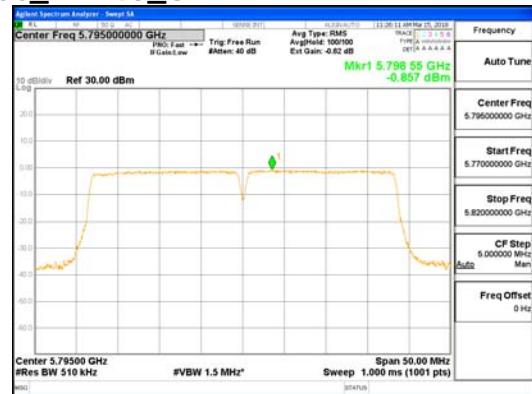


CDD Mode_ANT2_802.11ac_VHT40_UNII-3

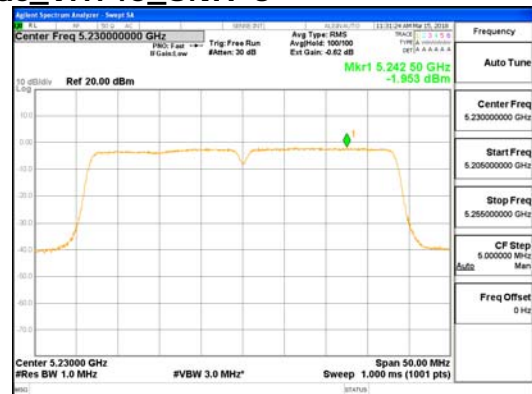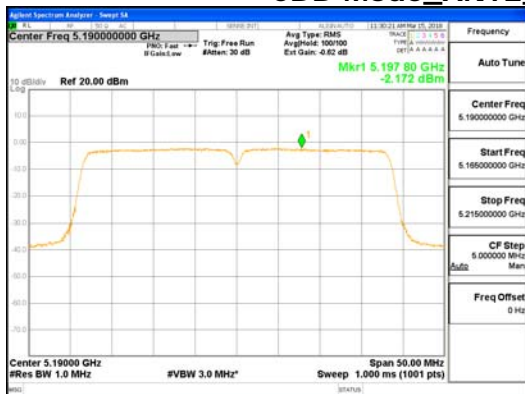


CDD Mode_ANT3_802.11ac_VHT40_UNII-1

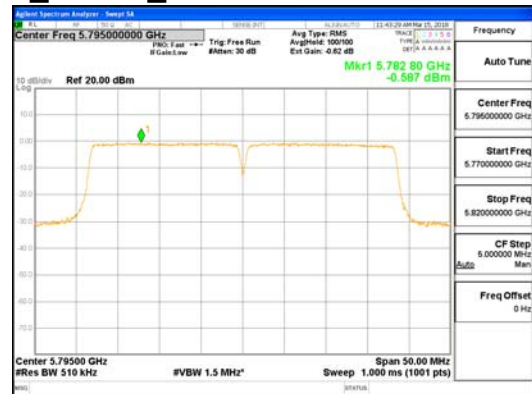


CDD Mode_ANT3_802.11ac_VHT40_UNII-3

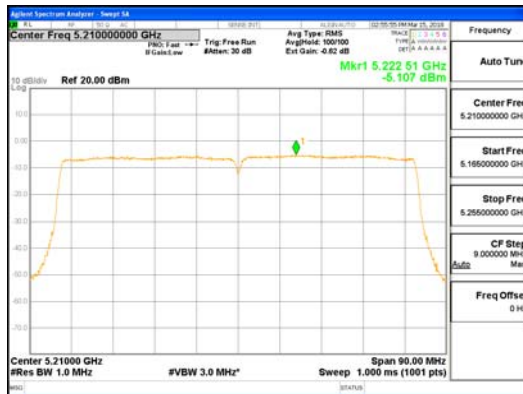


CDD Mode_ANTO_802.11ac_VHT80_UNII-1

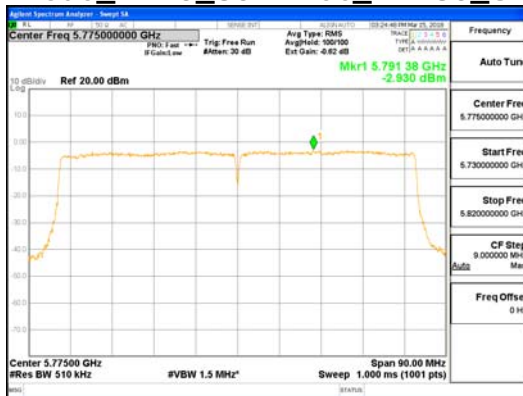


CDD Mode_ANTO_802.11ac_VHT80_UNII-3

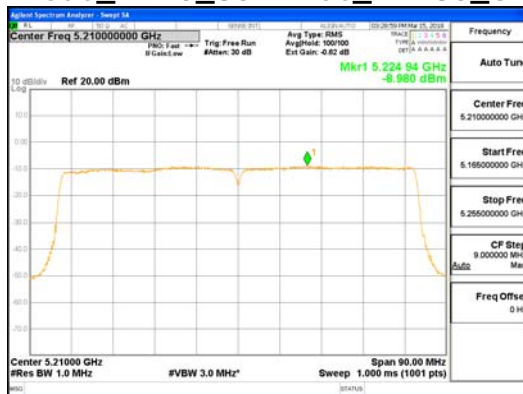

CDD Mode_ANT1_802.11ac_VHT80_UNII-1

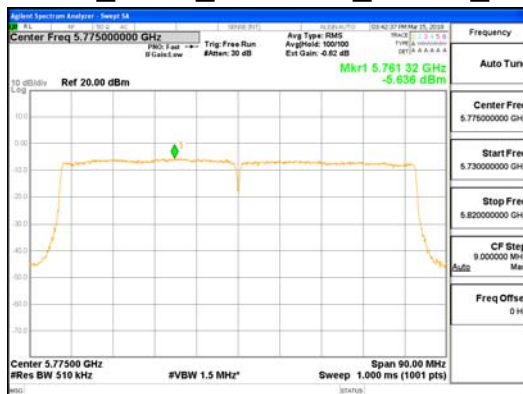


CDD Mode_ANT1_802.11ac_VHT80_UNII-3

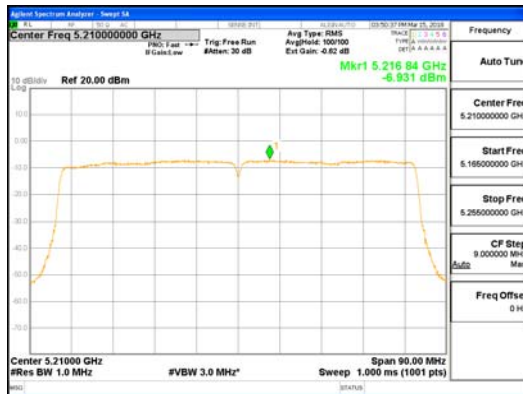


CDD Mode_ANT2_802.11ac_VHT80_UNII-1



CDD Mode_ANT2_802.11ac_VHT80_UNII-3

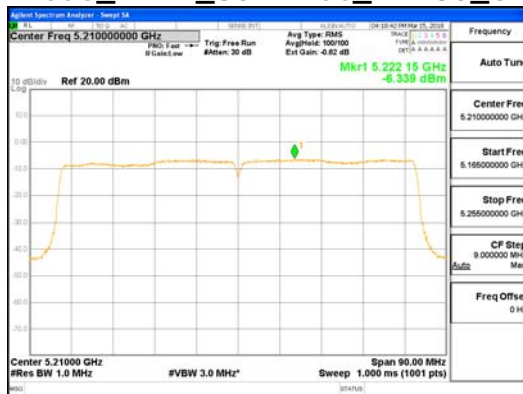

CDD Mode_ANT3_802.11ac_VHT80_UNII-1

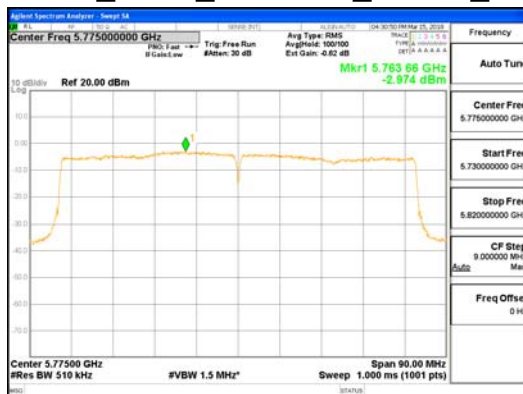

CDD Mode_ANT3_802.11ac_VHT80_UNII-3

4.6 Frequency Stability

Test Procedures

The EUT was placed inside of an environmental chamber as the temperature in the chamber was varied between 0 °C and +45 °C (Declaration by the Manufacturer). The temperature was incremented by 10 °C (5 °C) intervals and the unit was allowed to stabilize at each temperature before each measurement. The center frequency of the transmitting channel was evaluated at each temperature and the frequency deviation from the channel's center frequency was recorded.

Data for the worst case channel is shown below.

Temperature (°C)	0	10	20	30	40	45
Frequency	Measured Frequency Error (kHz)					
5 180 MHz	126.80	71.835	49.489	71.277	7.776	26.053
5 200 MHz	115.19	61.387	52.615	49.501	39.375	19.107
5 240 MHz	136.30	106.75	71.513	77.177	38.905	17.875
5 745 MHz	68.871	77.593	37.367	31.335	-7.023	-0.669
5 785 MHz	135.42	98.546	118.94	77.254	79.960	41.077
5 825 MHz	112.25	103.06	87.000	50.905	33.021	26.847

Note :

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature range as tested.

4.7 Unwanted Emissions

Test Location

- 10 m SAC (test distance : 10 m, 3 m)
 3 m SAC (test distance : 3 m)

Test Procedures

- 1) In the frequency range of 9 kHz to 30 MHz, magnetic field is measured with Loop Antenna. The Test Antenna is positioned with its plane vertical at 1m distance from the EUT. The center of the Loop Test Antenna is 1m above the ground. During the measurement the Loop Test Antenna rotates about its vertical axis for maximum response at each azimuth about the EUT.
- 2) In the frequency range above 30 MHz, Bi-Log Test Antenna(30 MHz to 1 GHz) and Horn Test Antenna(above 1 GHz) are used. Test Antenna is 3m away from the EUT. Test Antenna height is carried from 1m to 4m above the ground to determine the maximum value of the field strength. The emissions levels at both horizontal and vertical polarizations should be tested.

Test Settings:

Frequency Range = 9 kHz ~ 1 GHz

a) RBW = 100 kHz for $f < 1$ GHz, 9 kHz for $f < 30$ MHz

b) VBW \geq RBW

c) Detector = CISPR Quasi-peak

d) Sweep time = auto couple

- Peak

Frequency Range = 1 GHz ~ 40 GHz

a) RBW = 1 MHz

b) VBW $\geq 3 \times$ RBW

d) Sweep time = auto

c) Detector = Peak

e) Trace mode = max hold

- Average (duty cycle $\geq 98\%$)

Frequency Range = 1 GHz ~ 40 GHz

a) RBW = 1 MHz

b) VBW \leq RBW/100(Not less than 10 Hz)

d) Sweep time = auto

c) Detector = Peak

e) Trace mode = max hold



- Average (duty cycle < 98%)

Frequency Range = 1 GHz ~ 40 GHz

a) RBW = 1 MHz

b) VBW ≥ 1/T

d) Sweep time = auto

c) Detector = Peak

e) Trace mode = max hold

Limit

- 15.209(a)

Frequency(MHz)	Field Strength uV/m@3m	Field Strength dBuV/m@3m	Deasurement Distance (meters)
0.009-0.490	2400/F(kHz)	-	300
0.490-1.705	24000/F(kHz)	-	30
1.705-30	30	-	30
30-88	100**	40	3
88-216	150**	43.5	3
216-960	200**	46	3
Above 960	500	54	3

** Except as provided in 15.209(g).fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72MHz, 76-88MHz, 174-216MHz, 470-806MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g.15.231 and 15.241.


- 15.407, KDB 789033

E.I.R.P -27 dBm/MHz


$E[\text{dBuV/m}] = \text{EIRP}[\text{dBm}] + 95.2$, for $d = 3\text{m}$

Test Setup:


- 1) For field strength of emissions from 9 kHz to 30 MHz

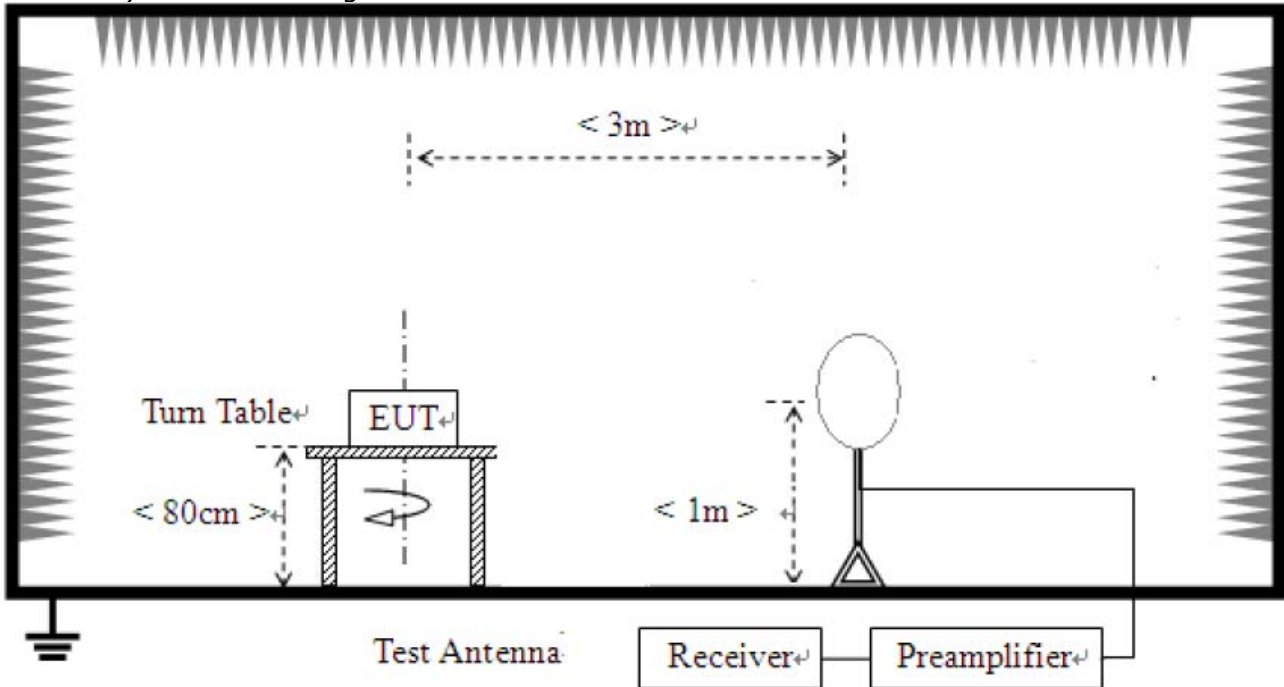

- 2) For field strength of emissions from 30 MHz to 1 GHz

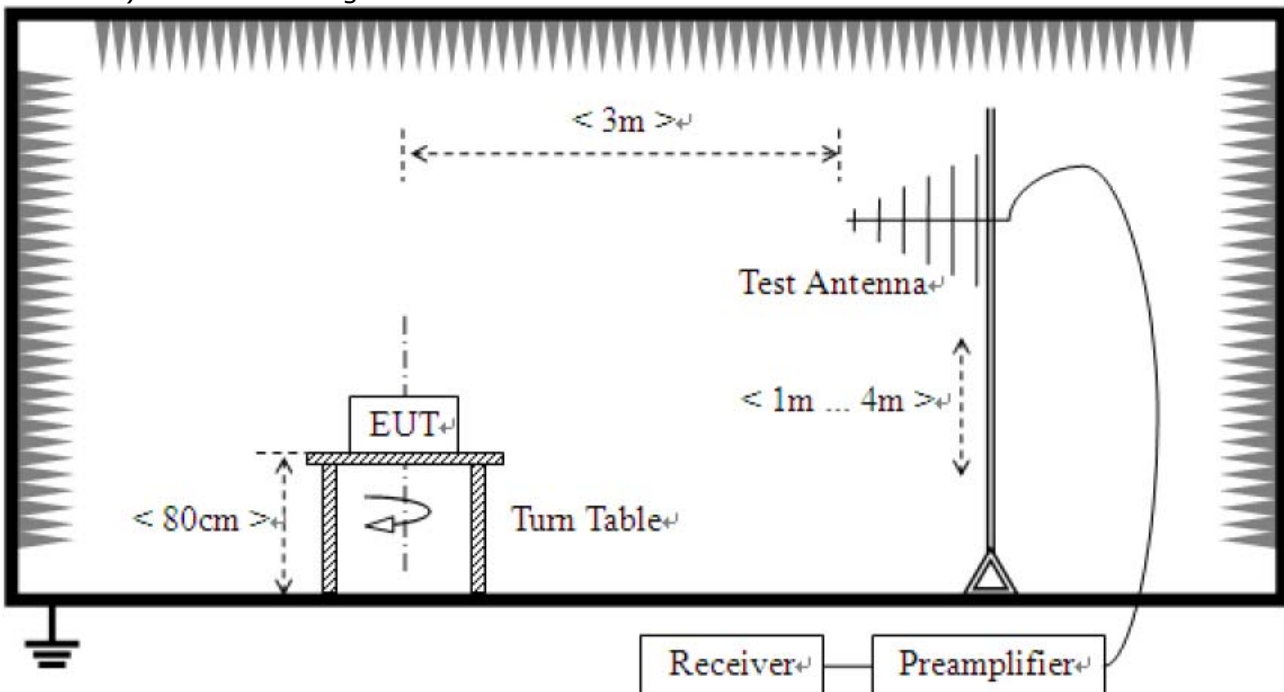

3) For field strength of emissions above 1 GHz

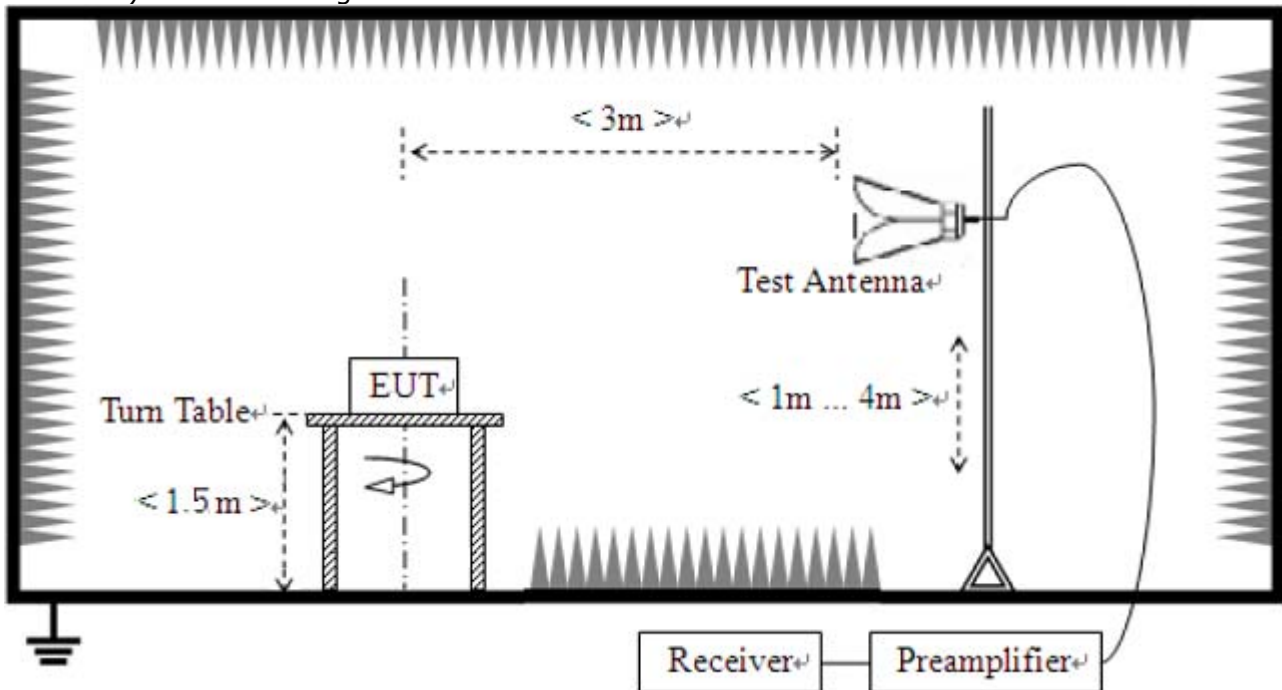

Test Mode

We have done all test mode.

The worst case antenna configuration and Test mode are determined to be as follows.

802.11a mode : ANT0 + ANT1 + ANT2 + ANT3

802.11n SDM mode : ANT0 + ANT1 + ANT2 + ANT3

802.11ac SDM mode : ANT0 + ANT1 + ANT2 + ANT3

So the results are only attached worst cases.

 CTK Co., Ltd. <small>The Prime Leader of Global Regulatory Certification</small>	CTK Co., Ltd. (Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea Tel: +82-31-339-9970 Fax: +82-31-624-9501	Report No.: CTK-2018-00984 Page (125) / (165) Pages	
---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	-----------------------------------------------------------------------------------------------------------------------------------------------	--------------------------------------------------------------	--

Test Results

1) 9 kHz to 30 MHz

Test mode : 802.11a, 802.11n, 802.11ac (Worst case)

The requirements are:

Complies

Frequency (MHz)	Measured Data (dBuV/m)	Margin (dB)	Remark
-	-	-	See note

Note :

The amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB)


2) 30 MHz to 1 GHz

Test mode : 802.11a(Worst Case)

The requirements are:

Complies

Test Data

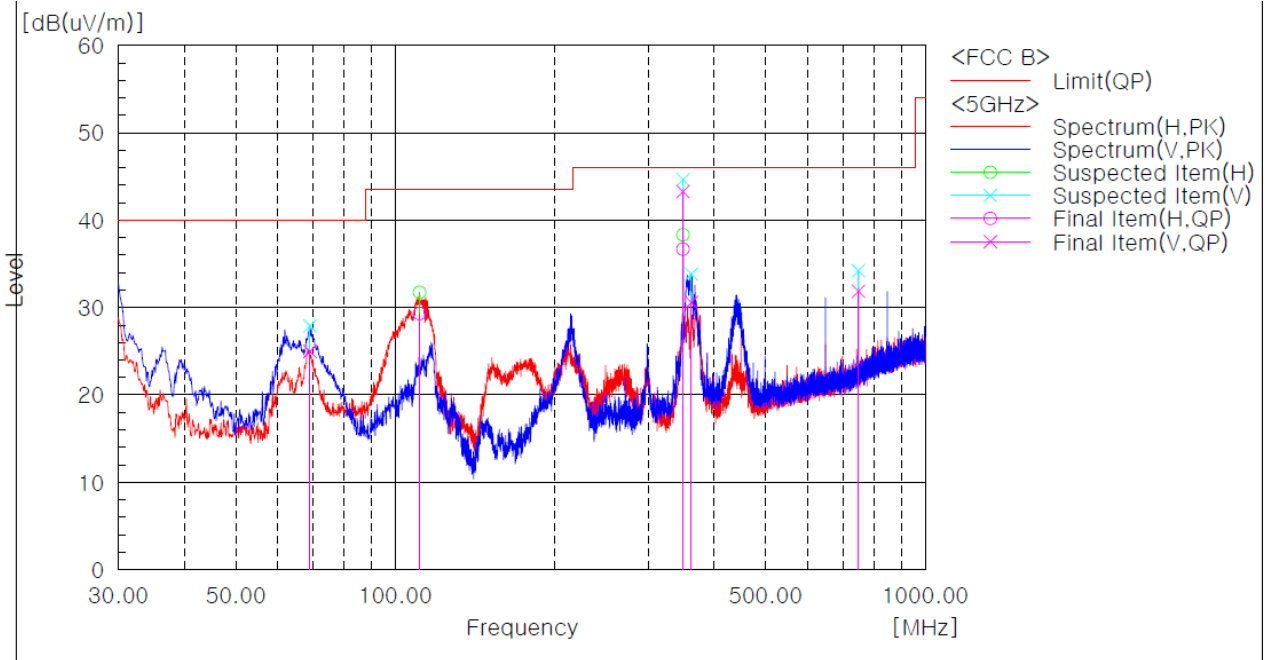

Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Angle [deg]	Remark
1	68.926	V	41.2	-16.2	25.0	40.0	15.0	141.6	
2	111.005	H	44.0	-14.7	29.3	43.5	14.2	246.6	
3	348.927	V	54.5	-11.2	43.3	46.0	2.7	283.3	
4	348.927	H	47.9	-11.2	36.7	46.0	9.3	188.1	
5	361.539	V	41.6	-11.0	30.6	46.0	15.4	10.9	
6	747.647	V	38.1	-6.2	31.9	46.0	14.1	49.0	

Remark :

1. The EUT was tested in three orientations in order to determine that "Z axis" was the worst case.
2. Result = Reading + c.f(Correction factor)
3. Correction factor = Antenna factor + Cable loss + 6 dB attenuator - Amp Gain



CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2018-00984
 Page (127) / (165)
 Pages

3) above 1 GHz

Test mode : 802.11a

The requirements are:

Complies

Test Data

Ch.36(5 180 MHz)

Frequency [MHz]	(P)	Limit AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Level AV [dB(uV/m)]	Level PK [dB(uV/m)]	Margin AV [dB]	Margin PK [dB]
10 360.00	H	54.00	74.00	50.02	63.80	3.98	10.20
10 360.00	V	54.00	74.00	50.36	61.21	3.64	12.80
15 540.00	H	54.00	74.00	43.75	58.14	10.25	15.86
15 540.00	V	54.00	74.00	45.33	57.70	8.67	16.30
5 150.00	H	54.00	74.00	40.66	55.60	13.35	18.41
5 150.00	V	54.00	74.00	43.01	57.98	10.99	16.02

Ch.40(5 200 MHz)

Frequency [MHz]	(P)	Limit AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Level AV [dB(uV/m)]	Level PK [dB(uV/m)]	Margin AV [dB]	Margin PK [dB]
10 400.00	H	54.00	74.00	50.10	63.01	3.90	10.99
10 400.00	V	54.00	74.00	50.28	62.43	3.72	11.57
15 600.00	H	54.00	74.00	43.13	56.82	10.87	17.18
15 600.00	V	54.00	74.00	44.46	58.42	9.54	15.58

Ch.48(5 240 MHz)

Frequency [MHz]	(P)	Limit AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Level AV [dB(uV/m)]	Level PK [dB(uV/m)]	Margin AV [dB]	Margin PK [dB]
10 480.00	H	54.00	74.00	48.41	61.07	5.59	12.93
10 480.00	V	54.00	74.00	50.80	62.03	3.20	11.97
15 720.00	H	54.00	74.00	43.62	55.36	10.38	18.64
15 720.00	V	54.00	74.00	46.25	61.11	7.75	12.89



Ch.149(5 745 MHz)

Frequency [MHz]	(P)	Limit AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Level AV [dB(uV/m)]	Level PK [dB(uV/m)]	Margin AV [dB]	Margin PK [dB]
11 490.00	H	54.00	74.00	48.40	63.07	5.60	10.93
11 490.00	V	54.00	74.00	50.92	65.62	3.08	8.38
17 235.00	H	54.00	74.00	51.38	64.56	2.62	9.44
17 235.00	V	54.00	74.00	49.09	65.25	4.91	8.75

Ch.157(5 785 MHz)

Frequency [MHz]	(P)	Limit AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Level AV [dB(uV/m)]	Level PK [dB(uV/m)]	Margin AV [dB]	Margin PK [dB]
11 570.00	H	54.00	74.00	49.42	63.56	4.58	10.44
11 570.00	V	54.00	74.00	50.05	65.04	3.95	8.97
17 355.00	H	54.00	74.00	50.60	65.05	3.40	8.95
17 355.00	V	54.00	74.00	49.67	63.85	4.34	10.15

Ch.165(5 825 MHz)

Frequency [MHz]	(P)	Limit AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Level AV [dB(uV/m)]	Level PK [dB(uV/m)]	Margin AV [dB]	Margin PK [dB]
11 650.00	H	54.00	74.00	50.34	63.86	3.66	10.14
11 650.00	V	54.00	74.00	50.99	64.96	3.01	9.04
17 475.00	H	54.00	74.00	50.11	63.21	3.89	10.79
17 475.00	V	54.00	74.00	50.65	64.97	3.35	9.03

Remarks


1. The EUT was tested in three orientations in order to determine that "Z axis" was the worst case.




CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2018-00984
 Page (129) / (165)
 Pages

Worst Case Mode :	802.11a
Worst Case Transfer Rate :	6 Mbps
Distance of Measurements :	3 Meters
Operating Frequency :	5 180 MHz
Channel :	36

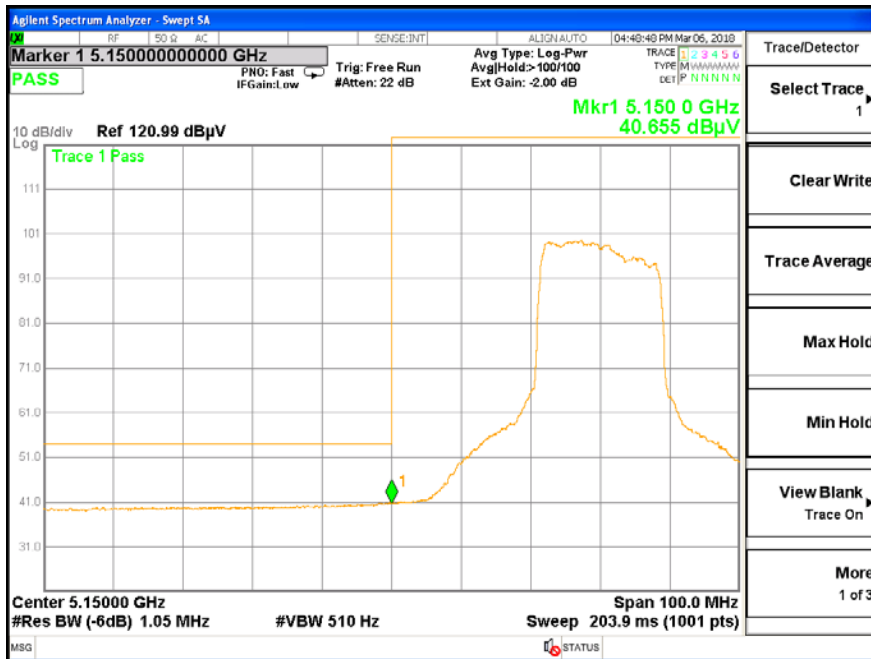

Radiated Restricted Lower Band Edge Plot Average (Antenna-Horizontal)

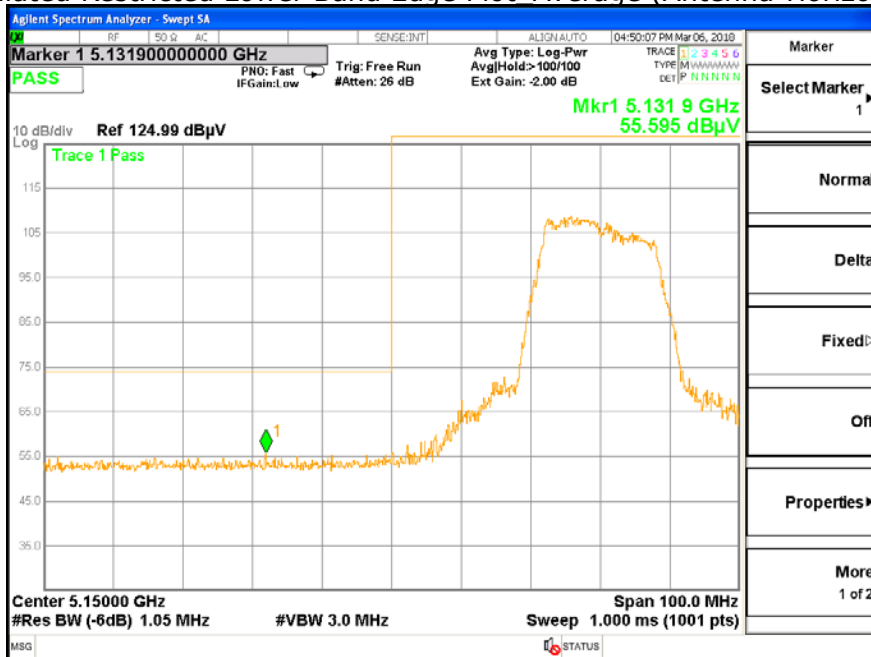


Radiated Restricted Lower Band Edge Plot_Peak (Antenna- Horizontal)




CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2018-00984
 Page (130) / (165)
 Pages

Worst Case Mode :	802.11a
Worst Case Transfer Rate :	6 Mbps
Distance of Measurements :	3 Meters
Operating Frequency :	5 180 MHz
Channel :	36

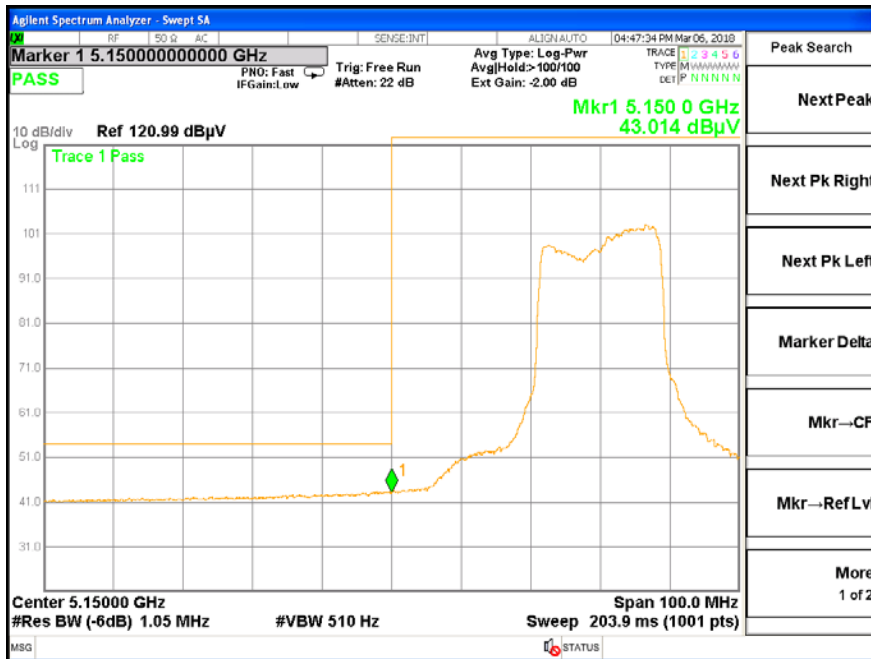

Radiated Restricted Lower Band Edge Plot Average (Antenna- Vertical)

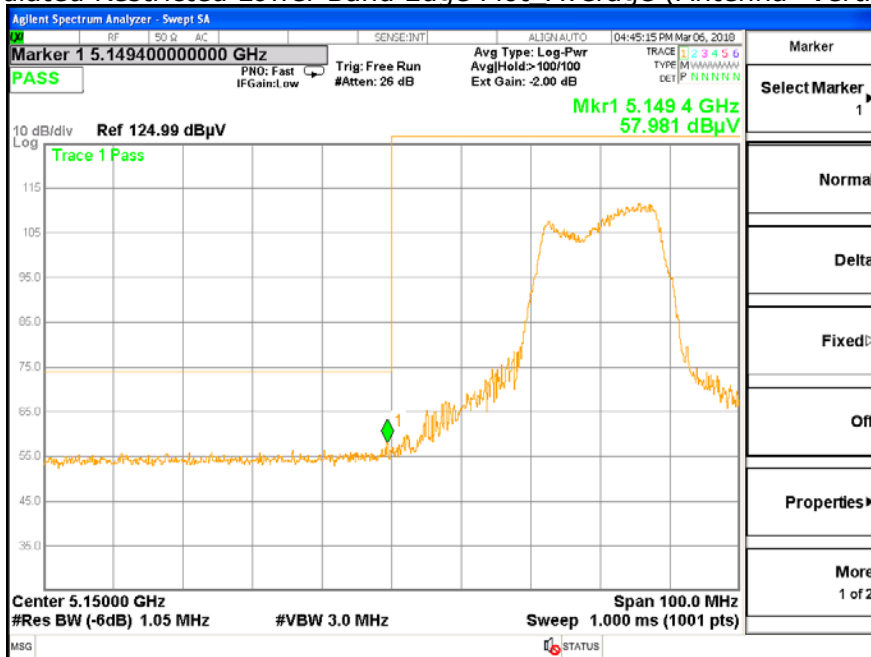


Radiated Restricted Lower Band Edge Plot_Peak (Antenna- Vertical)




CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2018-00984
 Page (131) / (165)
 Pages

Worst Case Mode :	802.11a
Worst Case Transfer Rate :	6 Mbps
Distance of Measurements :	3 Meters
Operating Frequency :	5 745 MHz
Channel :	149

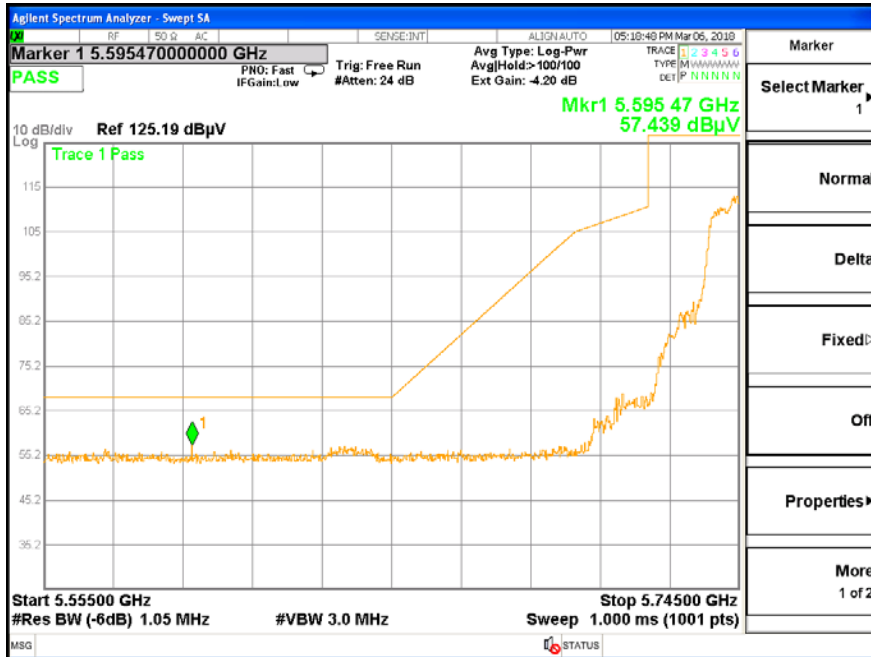

Radiated Restricted Lower Band Edge Plot (Antenna-Horizontal)

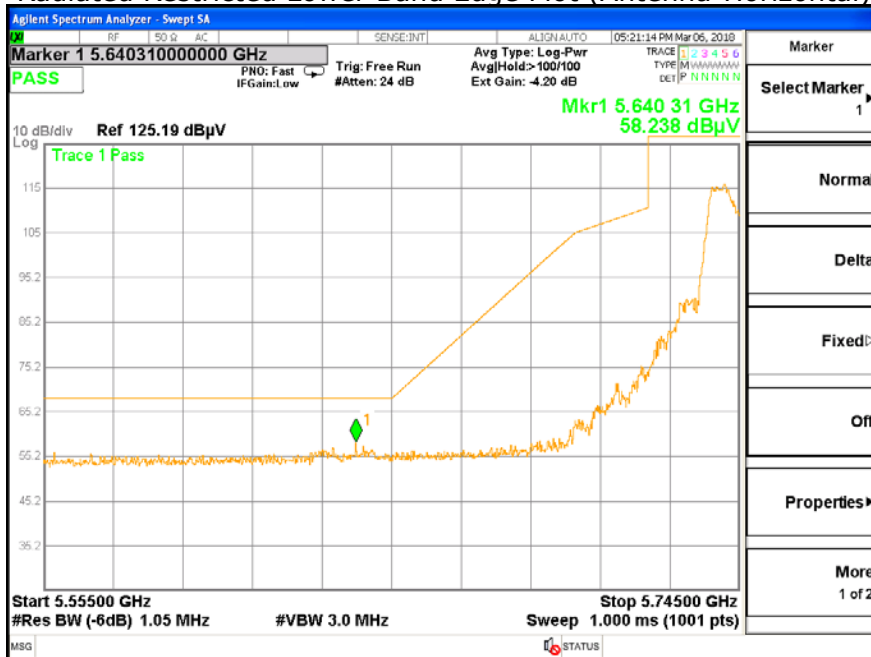


Radiated Restricted Lower Band Edge Plot (Antenna- Vertical)




CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2018-00984
 Page (132) / (165)
 Pages

Worst Case Mode :	802.11a
Worst Case Transfer Rate :	6 Mbps
Distance of Measurements :	3 Meters
Operating Frequency :	5 825 MHz
Channel :	165

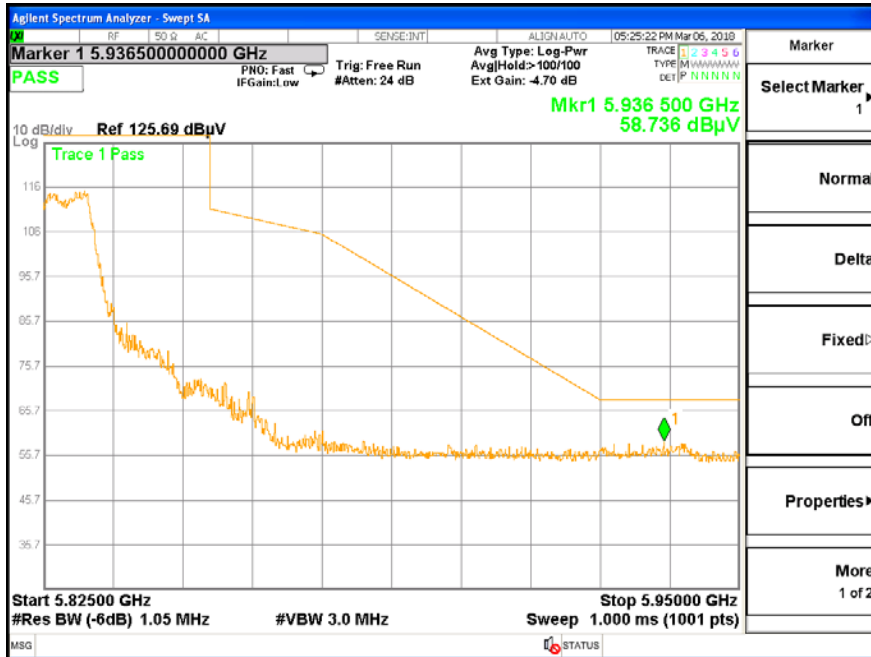

Radiated Restricted Upper Band Edge Plot (Antenna-Horizontal)

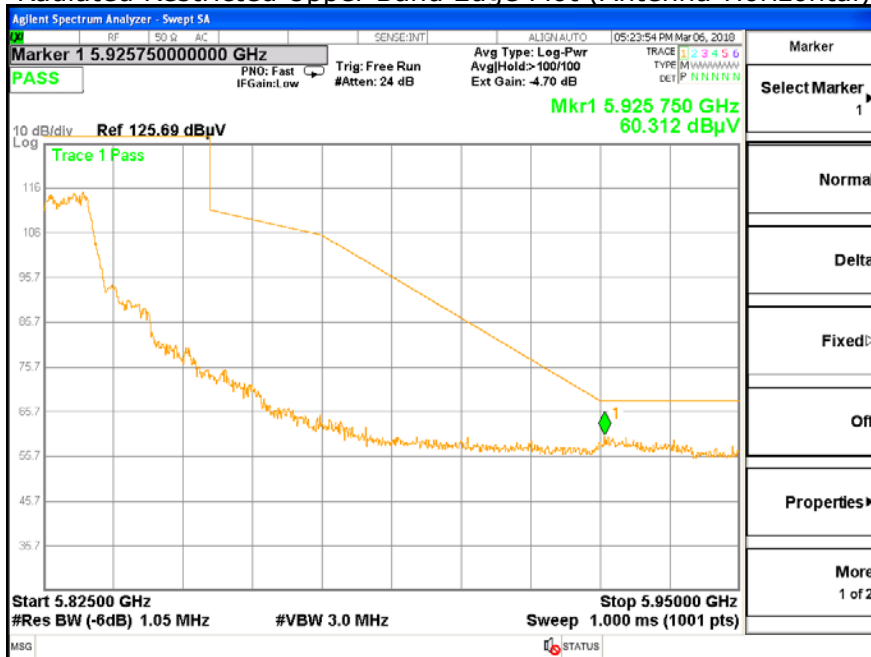

Radiated Restricted Upper Band Edge Plot (Antenna- Vertical)



CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2018-00984
 Page (133) / (165)
 Pages

Test mode : 802.11n_HT20_SDM Mode

The requirements are:

Complies

Test Data

Ch.36(5 180 MHz)

Frequency [MHz]	(P)	Limit AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Level AV [dB(uV/m)]	Level PK [dB(uV/m)]	Margin AV [dB]	Margin PK [dB]
10 360.00	H	54.00	74.00	51.07	64.17	2.93	9.83
10 360.00	V	54.00	74.00	48.63	61.95	5.37	12.05
15 540.00	H	54.00	74.00	43.92	56.87	10.08	17.13
15 540.00	V	54.00	74.00	43.44	56.17	10.56	17.83
5 150.00	H	54.00	74.00	43.14	62.90	10.86	11.10
5 150.00	V	54.00	74.00	45.88	62.15	8.13	11.85

Ch.40(5 200 MHz)

Frequency [MHz]	(P)	Limit AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Level AV [dB(uV/m)]	Level PK [dB(uV/m)]	Margin AV [dB]	Margin PK [dB]
10 400.00	H	54.00	74.00	50.81	62.37	3.19	11.63
10 400.00	V	54.00	74.00	47.95	61.13	6.05	12.87
15 600.00	H	54.00	74.00	44.13	57.55	9.87	16.45
15 600.00	V	54.00	74.00	43.30	55.69	10.70	18.31

Ch.48(5 240 MHz)

Frequency [MHz]	(P)	Limit AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Level AV [dB(uV/m)]	Level PK [dB(uV/m)]	Margin AV [dB]	Margin PK [dB]
10 480.00	H	54.00	74.00	49.73	63.72	4.27	10.28
10 480.00	V	54.00	74.00	48.19	60.30	5.81	13.70
15 720.00	H	54.00	74.00	45.47	58.44	8.53	15.56
15 720.00	V	54.00	74.00	43.96	57.23	10.04	16.77



CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2018-00984
 Page (134) / (165)
 Pages

Ch.149(5 745 MHz)

Frequency [MHz]	(P)	Limit AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Level AV [dB(uV/m)]	Level PK [dB(uV/m)]	Margin AV [dB]	Margin PK [dB]
11 490.00	H	54.00	74.00	51.19	65.44	2.81	8.56
11 490.00	V	54.00	74.00	48.33	63.28	5.67	10.72
17 235.00	H	54.00	74.00	48.62	62.55	5.38	11.45
17 235.00	V	54.00	74.00	47.94	60.24	6.06	13.76

Ch.157(5 785 MHz)

Frequency [MHz]	(P)	Limit AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Level AV [dB(uV/m)]	Level PK [dB(uV/m)]	Margin AV [dB]	Margin PK [dB]
11 570.00	H	54.00	74.00	51.65	65.47	2.35	8.53
11 570.00	V	54.00	74.00	49.28	64.22	4.72	9.78
17 355.00	H	54.00	74.00	48.96	61.90	5.04	12.10
17 355.00	V	54.00	74.00	48.11	60.74	5.89	13.26

Ch.165(5 825 MHz)

Frequency [MHz]	(P)	Limit AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Level AV [dB(uV/m)]	Level PK [dB(uV/m)]	Margin AV [dB]	Margin PK [dB]
11 650.00	H	54.00	74.00	52.23	65.84	1.77	8.16
11 650.00	V	54.00	74.00	49.97	65.47	4.03	8.53
17 475.00	H	54.00	74.00	49.13	63.51	4.87	10.49
17 475.00	V	54.00	74.00	47.71	61.35	6.29	12.65

Remarks


1. The EUT was tested in three orientations in order to determine that "Z axis" was the worst case.




CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2018-00984
 Page (135) / (165)
 Pages

Worst Case Mode :	802.11n_HT20_SDM Mode
Worst Case Transfer Rate :	MCS 24
Distance of Measurements :	3 Meters
Operating Frequency :	5 180 MHz
Channel :	36

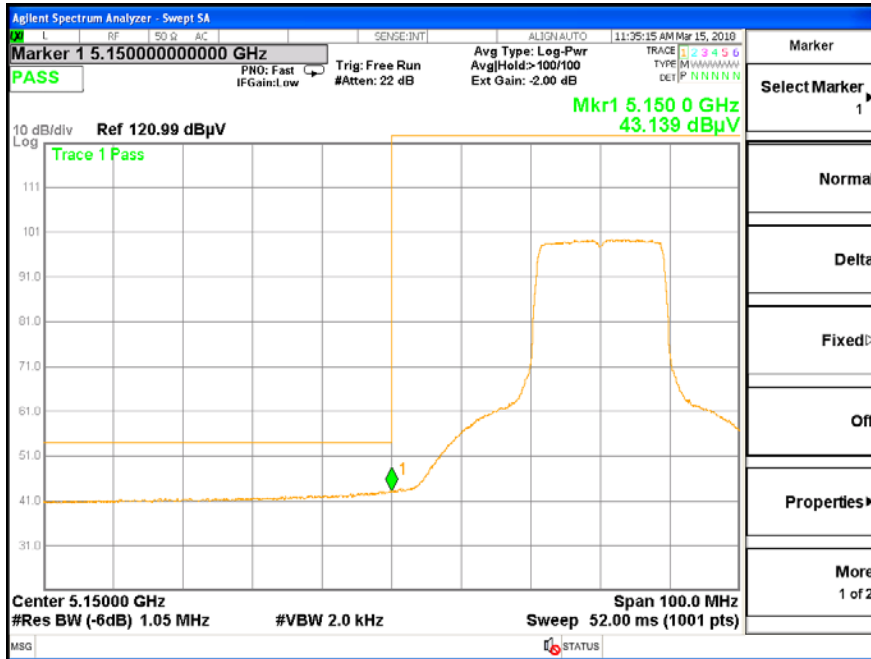

Radiated Restricted Lower Band Edge Plot Average (Antenna-Horizontal)

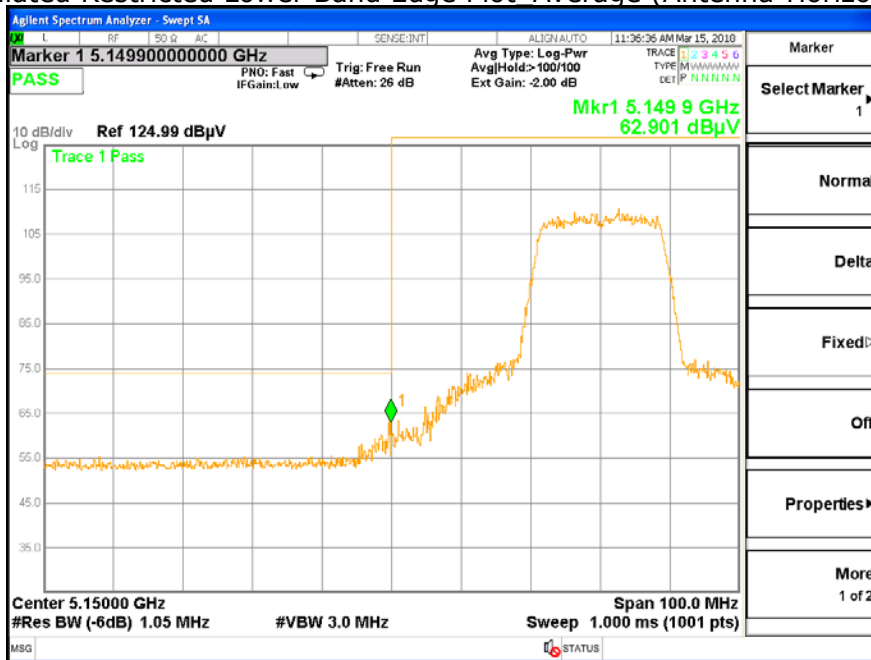


Radiated Restricted Lower Band Edge Plot_Peak (Antenna- Horizontal)




CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2018-00984
 Page (136) / (165)
 Pages

Worst Case Mode :	802.11n_HT20_SDM Mode
Worst Case Transfer Rate :	MCS 24
Distance of Measurements :	3 Meters
Operating Frequency :	5 180 MHz
Channel :	36

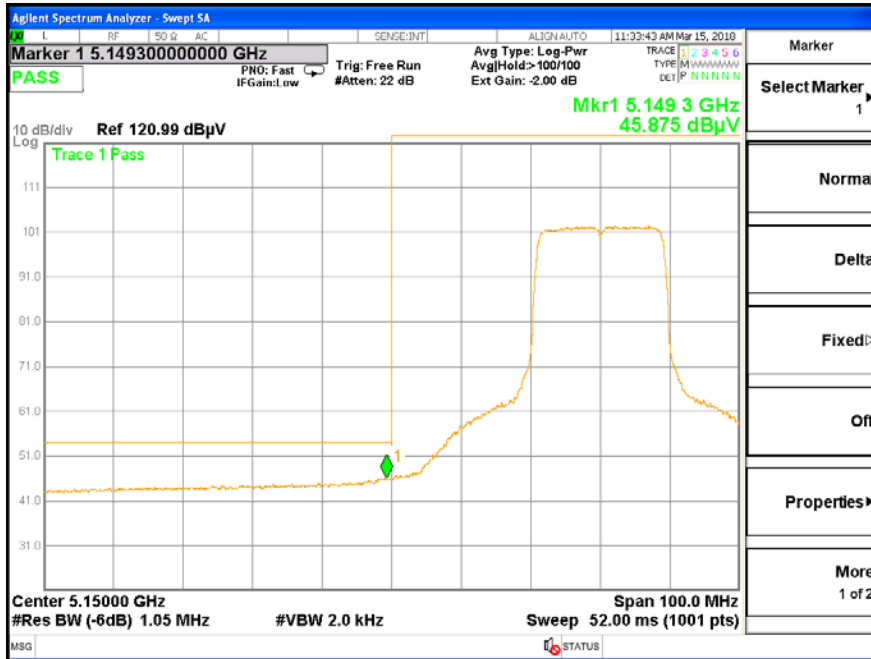

Radiated Restricted Lower Band Edge Plot Average (Antenna- Vertical)

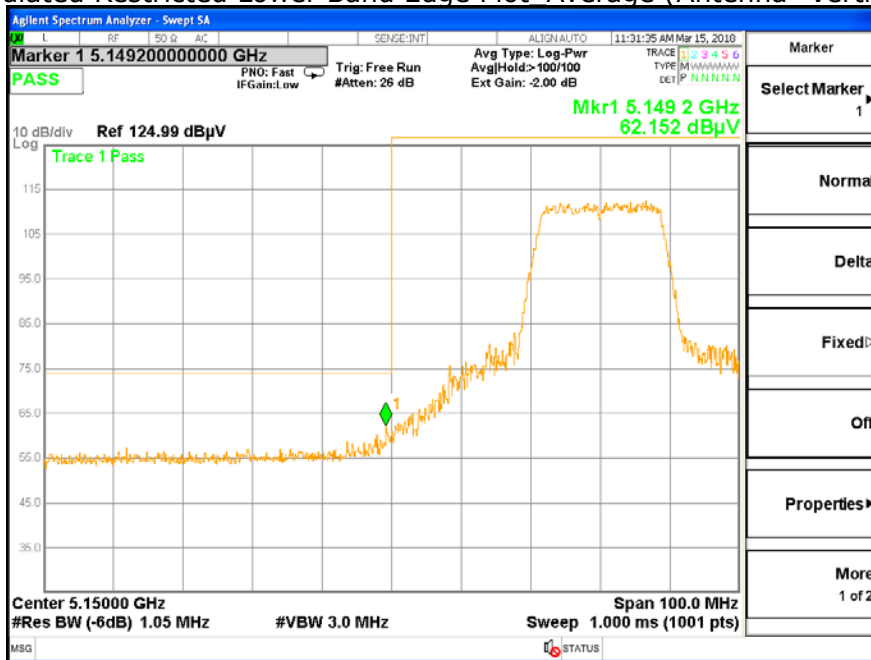


Radiated Restricted Lower Band Edge Plot_Peak (Antenna- Vertical)




CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2018-00984
 Page (137) / (165)
 Pages

Worst Case Mode :	802.11n_HT20_SDM Mode
Worst Case Transfer Rate :	MCS 24
Distance of Measurements :	3 Meters
Operating Frequency :	5 745 MHz
Channel :	149

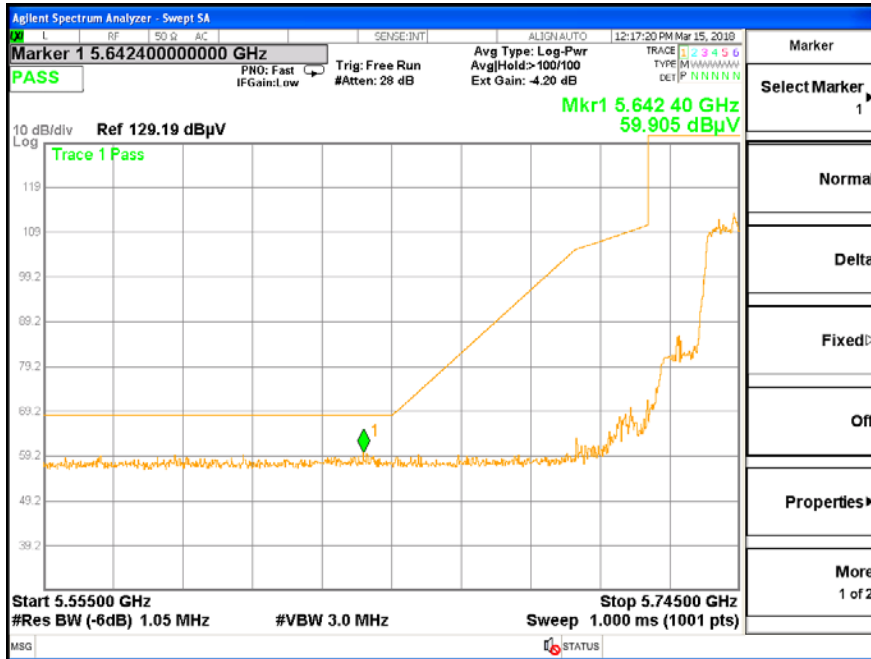

Radiated Restricted Lower Band Edge Plot (Antenna-Horizontal)

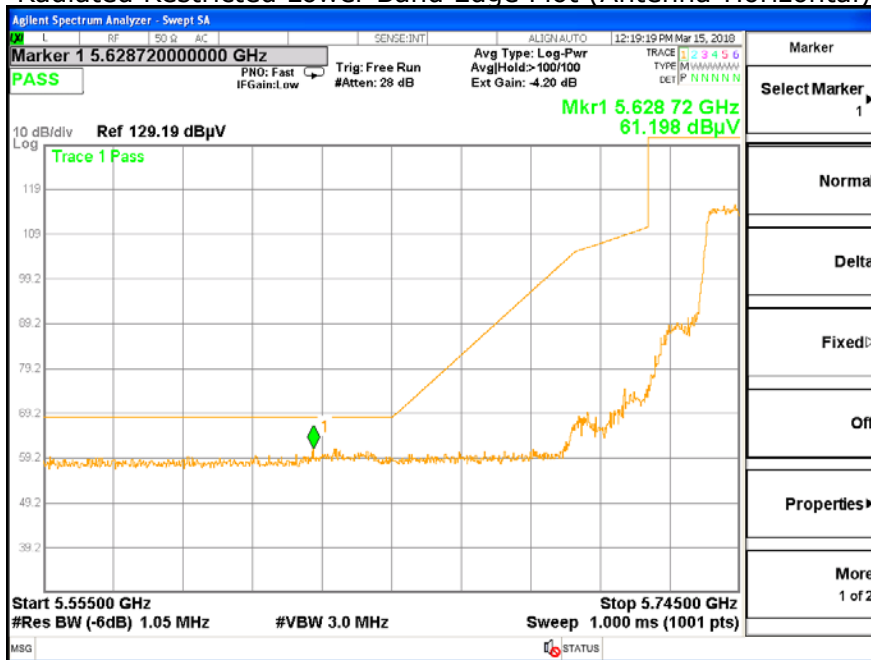


Radiated Restricted Lower Band Edge Plot (Antenna- Vertical)




CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2018-00984
 Page (138) / (165)
 Pages

Worst Case Mode :	802.11n_HT20_SDM Mode
Worst Case Transfer Rate :	MCS 24
Distance of Measurements :	3 Meters
Operating Frequency :	5 825 MHz
Channel :	165

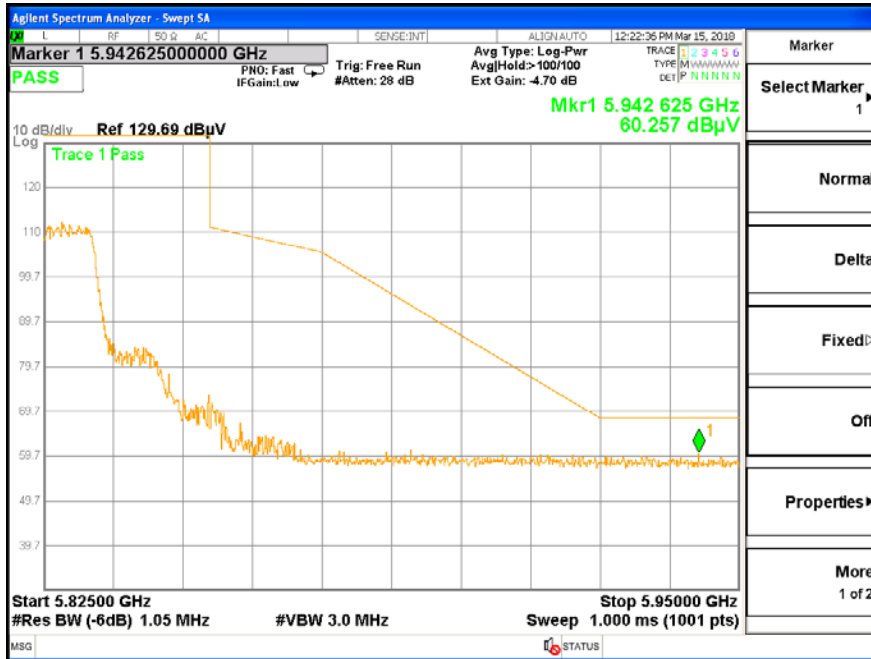

Radiated Restricted Upper Band Edge Plot (Antenna-Horizontal)

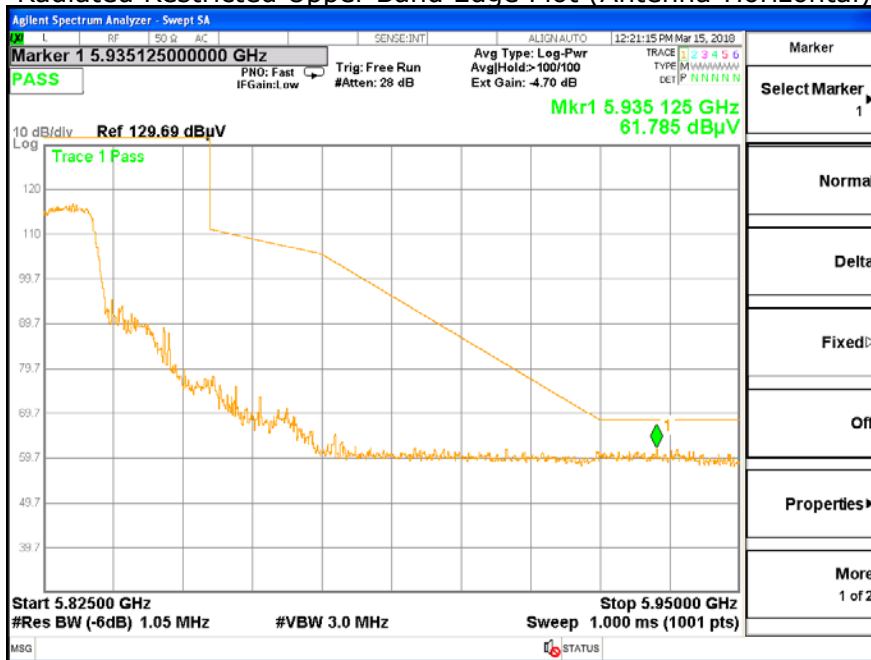

Radiated Restricted Upper Band Edge Plot (Antenna- Vertical)



CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2018-00984
 Page (139) / (165)
 Pages

Test mode : 802.11ac_VHT20_SDM Mode

The requirements are:

Complies

Test Data

Ch.36(5 180 MHz)

Frequency [MHz]	(P)	Limit AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Level AV [dB(uV/m)]	Level PK [dB(uV/m)]	Margin AV [dB]	Margin PK [dB]
10 360.00	H	54.00	74.00	51.12	62.62	2.88	11.38
10 360.00	V	54.00	74.00	48.29	62.27	5.71	11.73
15 540.00	H	54.00	74.00	43.49	56.63	10.51	17.37
15 540.00	V	54.00	74.00	43.22	55.01	10.78	18.99
5 150.00	H	54.00	74.00	44.21	62.83	9.79	11.17
5 150.00	V	54.00	74.00	46.33	63.86	7.67	10.14

Ch.40(5 200 MHz)

Frequency [MHz]	(P)	Limit AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Level AV [dB(uV/m)]	Level PK [dB(uV/m)]	Margin AV [dB]	Margin PK [dB]
10 400.00	H	54.00	74.00	49.91	62.52	4.09	11.48
10 400.00	V	54.00	74.00	48.16	60.62	5.84	13.38
15 600.00	H	54.00	74.00	43.85	57.12	10.15	16.88
15 600.00	V	54.00	74.00	43.13	57.51	10.87	16.49

Ch.48(5 240 MHz)

Frequency [MHz]	(P)	Limit AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Level AV [dB(uV/m)]	Level PK [dB(uV/m)]	Margin AV [dB]	Margin PK [dB]
10 480.00	H	54.00	74.00	49.72	61.76	4.28	12.24
10 480.00	V	54.00	74.00	47.93	61.43	6.07	12.57
15 720.00	H	54.00	74.00	45.31	58.52	8.69	15.48
15 720.00	V	54.00	74.00	43.59	57.99	10.41	16.01



CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2018-00984
 Page (140) / (165)
 Pages

Ch.149(5 745 MHz)

Frequency [MHz]	(P)	Limit AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Level AV [dB(uV/m)]	Level PK [dB(uV/m)]	Margin AV [dB]	Margin PK [dB]
11 490.00	H	54.00	74.00	49.82	63.83	4.18	10.17
11 490.00	V	54.00	74.00	47.53	62.91	6.47	11.09
17 235.00	H	54.00	74.00	47.44	59.45	6.56	14.55
17 235.00	V	54.00	74.00	47.40	59.03	6.60	14.97

Ch.157(5 785 MHz)

Frequency [MHz]	(P)	Limit AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Level AV [dB(uV/m)]	Level PK [dB(uV/m)]	Margin AV [dB]	Margin PK [dB]
11 570.00	H	54.00	74.00	51.37	66.15	2.63	7.85
11 570.00	V	54.00	74.00	49.43	63.31	4.57	10.69
17 355.00	H	54.00	74.00	48.33	61.04	5.67	12.96
17 355.00	V	54.00	74.00	48.56	59.88	5.44	14.12

Ch.165(5 825 MHz)

Frequency [MHz]	(P)	Limit AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Level AV [dB(uV/m)]	Level PK [dB(uV/m)]	Margin AV [dB]	Margin PK [dB]
11 650.00	H	54.00	74.00	50.94	65.10	3.06	8.90
11 650.00	V	54.00	74.00	49.57	64.80	4.43	9.20
17 475.00	H	54.00	74.00	49.27	63.68	4.73	10.32
17 475.00	V	54.00	74.00	48.32	61.76	5.68	12.24

Remarks


1. The EUT was tested in three orientations in order to determine that "Z axis" was the worst case.




CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2018-00984
 Page (141) / (165)
 Pages

Worst Case Mode :	802.11ac_VHT20_SDM Mode
Worst Case Transfer Rate :	MNSS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 180 MHz
Channel :	36

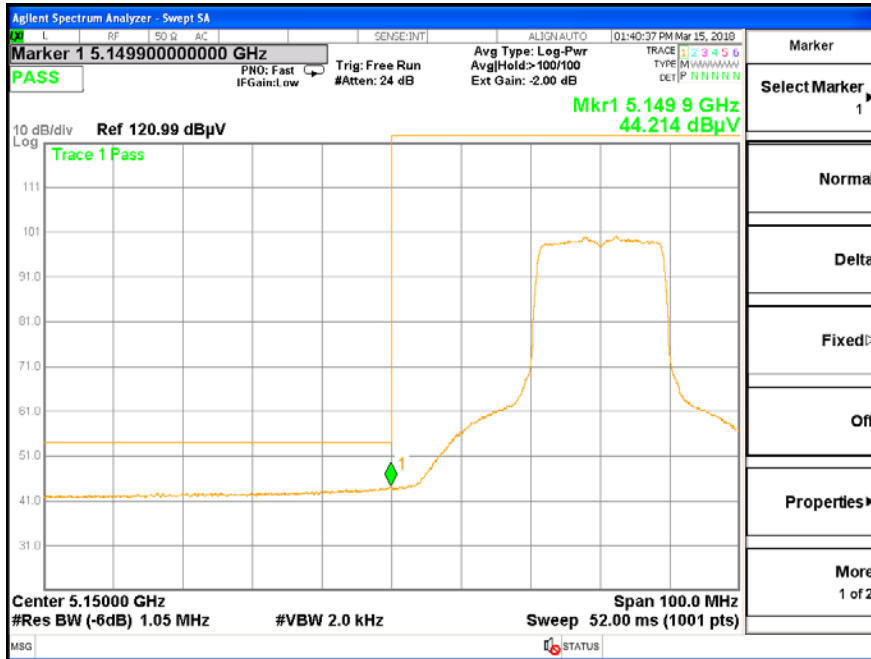

Radiated Restricted Lower Band Edge Plot Average (Antenna-Horizontal)

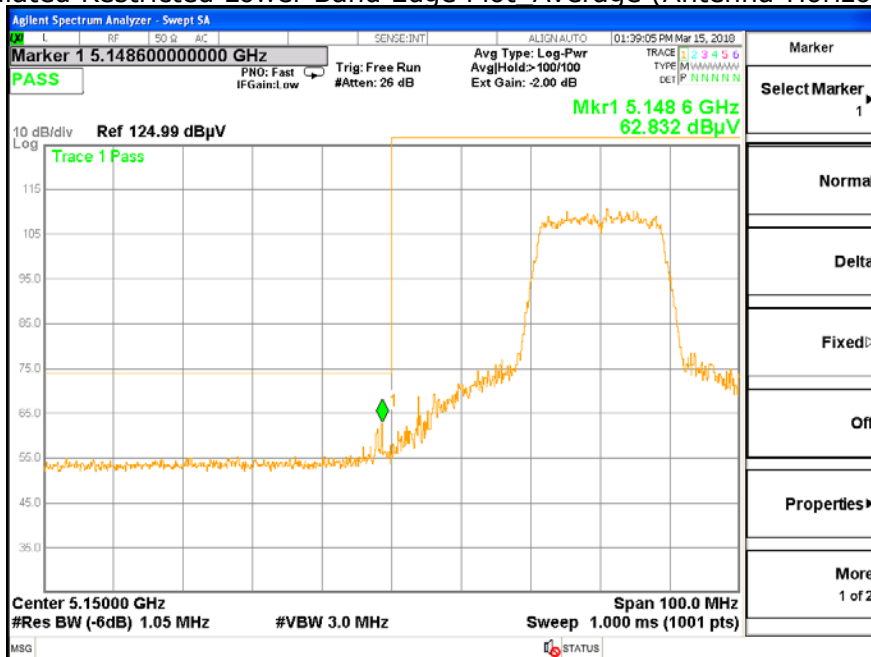


Radiated Restricted Lower Band Edge Plot_Peak (Antenna- Horizontal)




CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2018-00984
 Page (142) / (165)
 Pages

Worst Case Mode :	802.11ac_VHT20_SDM Mode
Worst Case Transfer Rate :	MNSS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 180 MHz
Channel :	36

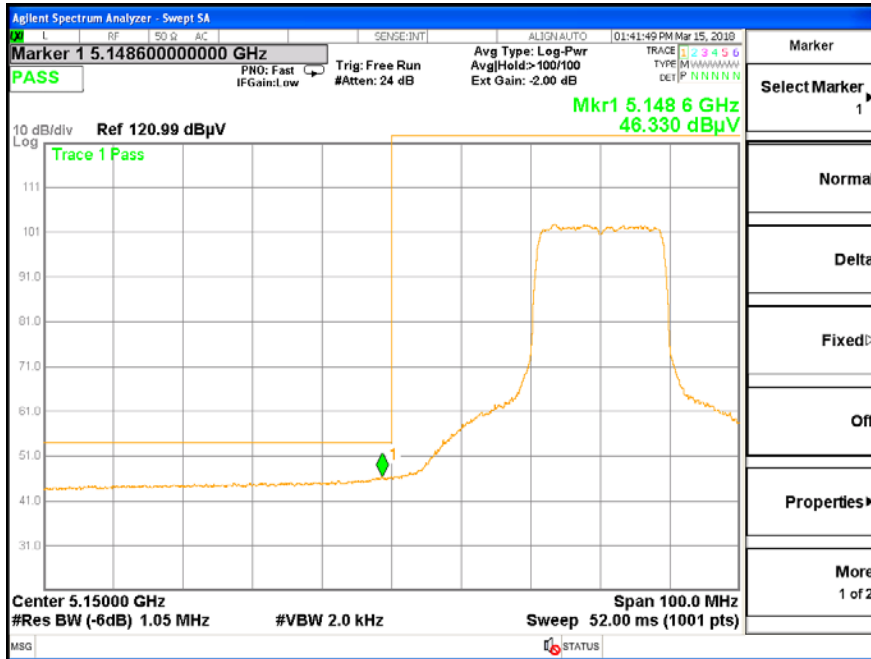

Radiated Restricted Lower Band Edge Plot Average (Antenna- Vertical)

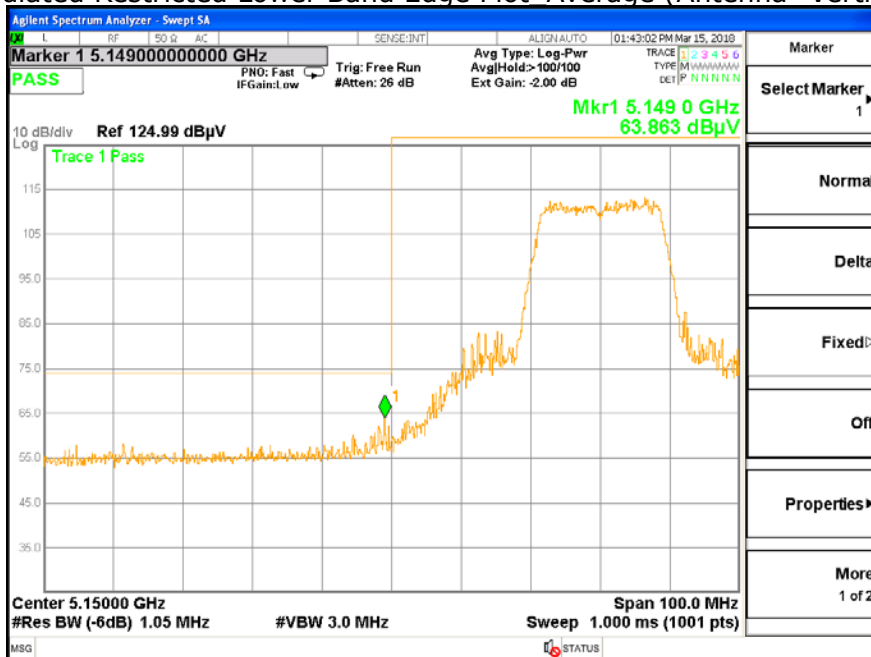


Radiated Restricted Lower Band Edge Plot_Peak (Antenna- Vertical)




CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2018-00984
 Page (143) / (165)
 Pages

Worst Case Mode :	802.11ac_VHT20_SDM Mode
Worst Case Transfer Rate :	MNSS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 745 MHz
Channel :	149

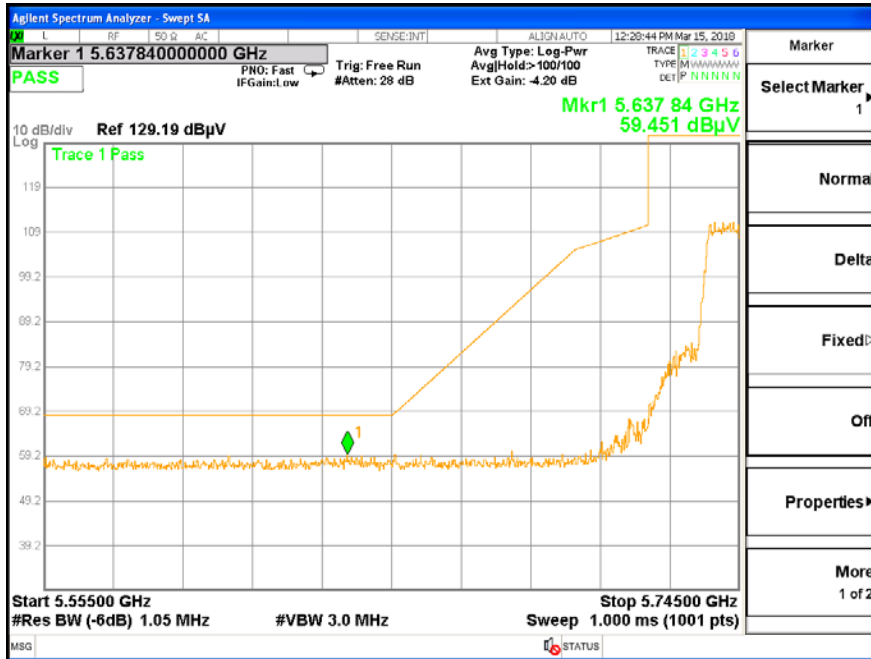

Radiated Restricted Lower Band Edge Plot (Antenna-Horizontal)

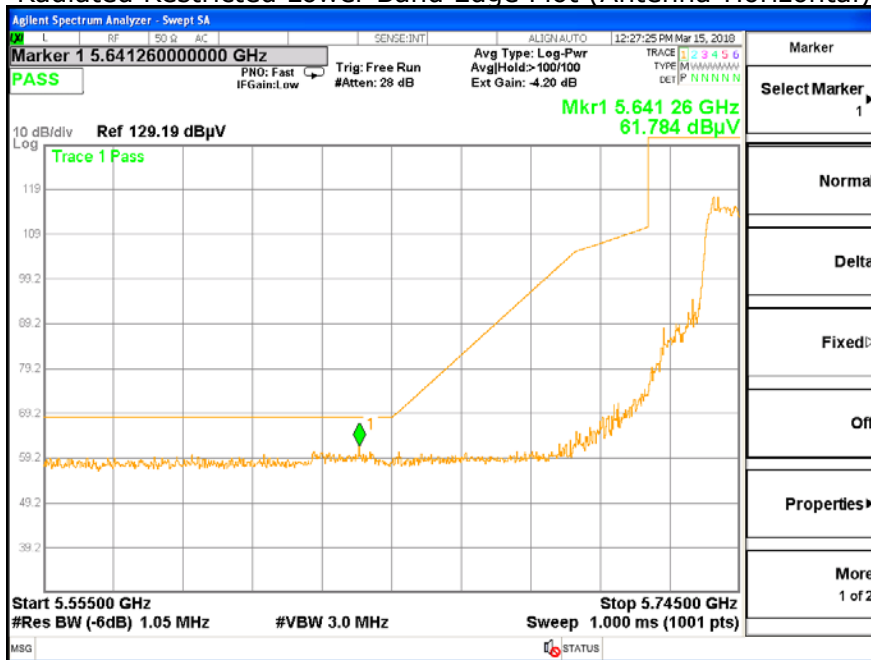


Radiated Restricted Lower Band Edge Plot (Antenna- Vertical)




CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2018-00984
 Page (144) / (165)
 Pages

Worst Case Mode :	802.11ac_VHT20_SDM Mode
Worst Case Transfer Rate :	MNSS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 825 MHz
Channel :	165

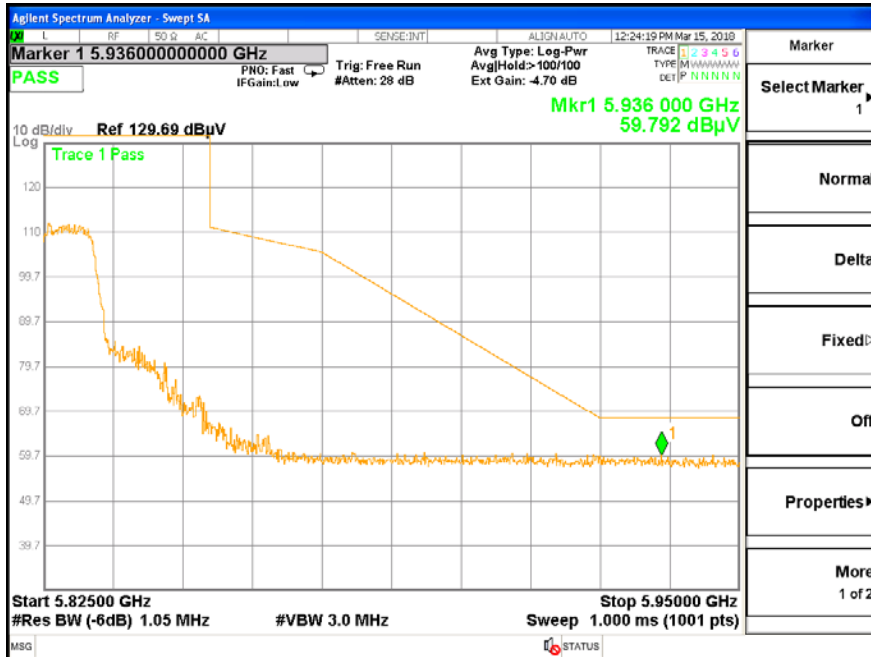

Radiated Restricted Upper Band Edge Plot (Antenna-Horizontal)

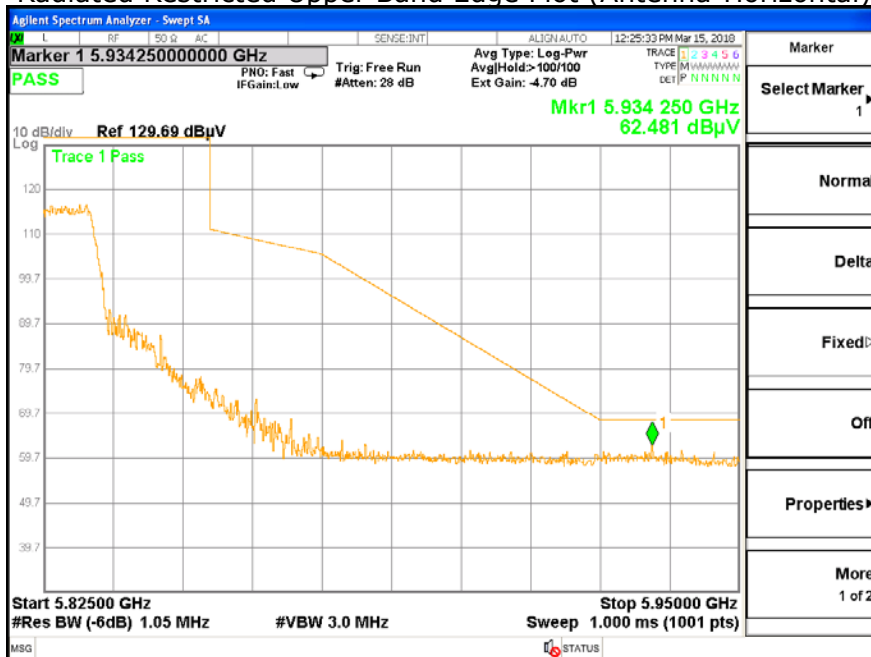

Radiated Restricted Upper Band Edge Plot (Antenna- Vertical)



CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2018-00984
 Page (145) / (165)
 Pages

Test mode : 802.11n_HT40_SDM Mode

The requirements are:

Complies

Test Data

Ch.38(5 190 MHz)

Frequency [MHz]	(P)	Limit AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Level AV [dB(uV/m)]	Level PK [dB(uV/m)]	Margin AV [dB]	Margin PK [dB]
10 380.00	H	54.00	74.00	44.57	57.48	9.43	16.52
10 380.00	V	54.00	74.00	43.76	58.66	10.24	15.34
15 570.00	H	54.00	74.00	42.06	53.25	11.94	20.75
15 570.00	V	54.00	74.00	42.05	53.13	11.95	20.87
5 150.00	H	54.00	74.00	52.15	66.29	1.85	7.71
5 150.00	V	54.00	74.00	50.02	62.97	3.98	11.03

Ch.46(5 230 MHz)

Frequency [MHz]	(P)	Limit AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Level AV [dB(uV/m)]	Level PK [dB(uV/m)]	Margin AV [dB]	Margin PK [dB]
10 460.00	H	54.00	74.00	44.06	57.63	9.94	16.37
10 460.00	V	54.00	74.00	44.65	59.08	9.35	14.92
15 690.00	H	54.00	74.00	42.82	53.76	11.18	20.24
15 690.00	V	54.00	74.00	42.11	54.17	11.89	19.83

Ch.151(5 755 MHz)

Frequency [MHz]	(P)	Limit AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Level AV [dB(uV/m)]	Level PK [dB(uV/m)]	Margin AV [dB]	Margin PK [dB]
11 510.00	H	54.00	74.00	49.10	61.74	4.90	12.26
11 510.00	V	54.00	74.00	46.29	61.21	7.71	12.79
17 265.00	H	54.00	74.00	47.72	58.16	6.28	15.84
17 265.00	V	54.00	74.00	47.30	57.61	6.70	16.39



CTK Co., Ltd.
(Ho-dong), 113, Yejik-ro, Cheoin-gu,
Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No.:
CTK-2018-00984
Page (146) / (165)
Pages

Ch.159(5 795 MHz)

Frequency [MHz]	(P)	Limit AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Level AV [dB(uV/m)]	Level PK [dB(uV/m)]	Margin AV [dB]	Margin PK [dB]
11 590.00	H	54.00	74.00	51.17	63.64	2.83	10.36
11 590.00	V	54.00	74.00	48.38	61.56	5.62	12.44
17 385.00	H	54.00	74.00	47.47	58.87	6.53	15.13
17 385.00	V	54.00	74.00	46.98	58.95	7.02	15.05

Remarks


1. The EUT was tested in three orientations in order to determine that "Z axis" was the worst case.




CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2018-00984
 Page (147) / (165)
 Pages

Worst Case Mode :	802.11n_HT40_SDM Mode
Worst Case Transfer Rate :	MCS 24
Distance of Measurements :	3 Meters
Operating Frequency :	5 190 MHz
Channel :	38

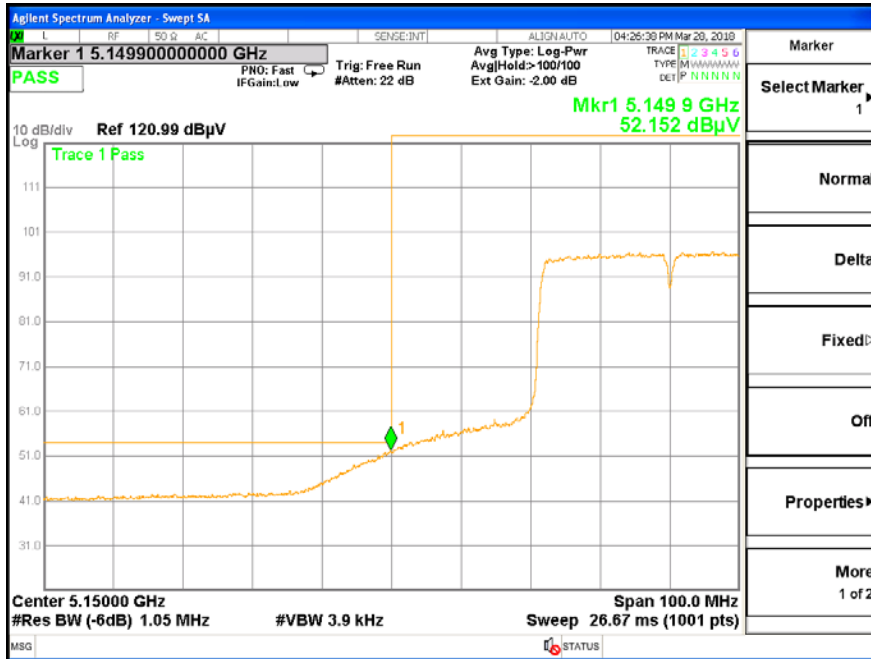

Radiated Restricted Lower Band Edge Plot Average (Antenna-Horizontal)

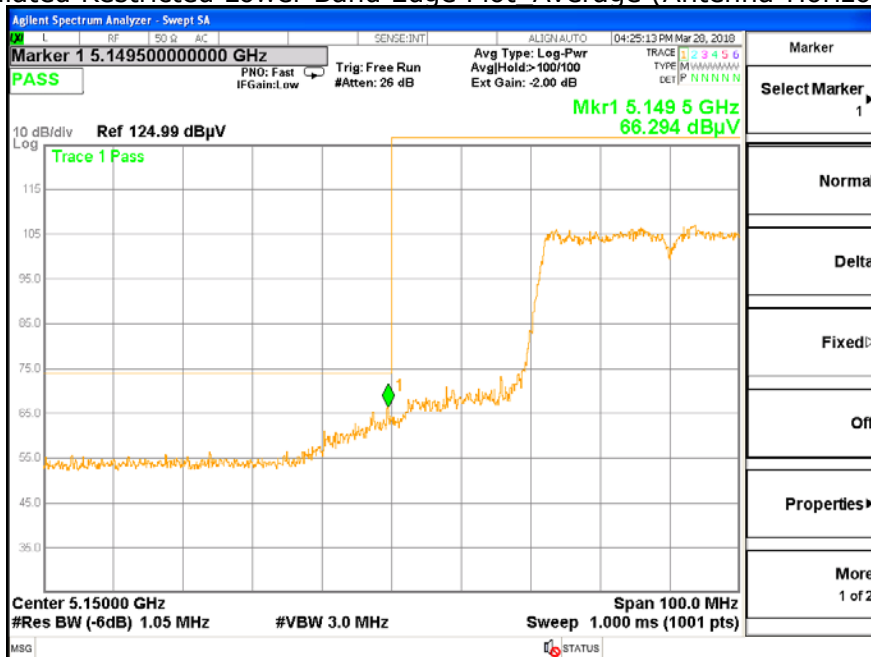


Radiated Restricted Lower Band Edge Plot_Peak (Antenna- Horizontal)




CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2018-00984
 Page (148) / (165)
 Pages

Worst Case Mode :	802.11n_HT40_SDM Mode
Worst Case Transfer Rate :	MCS 24
Distance of Measurements :	3 Meters
Operating Frequency :	5 190 MHz
Channel :	38

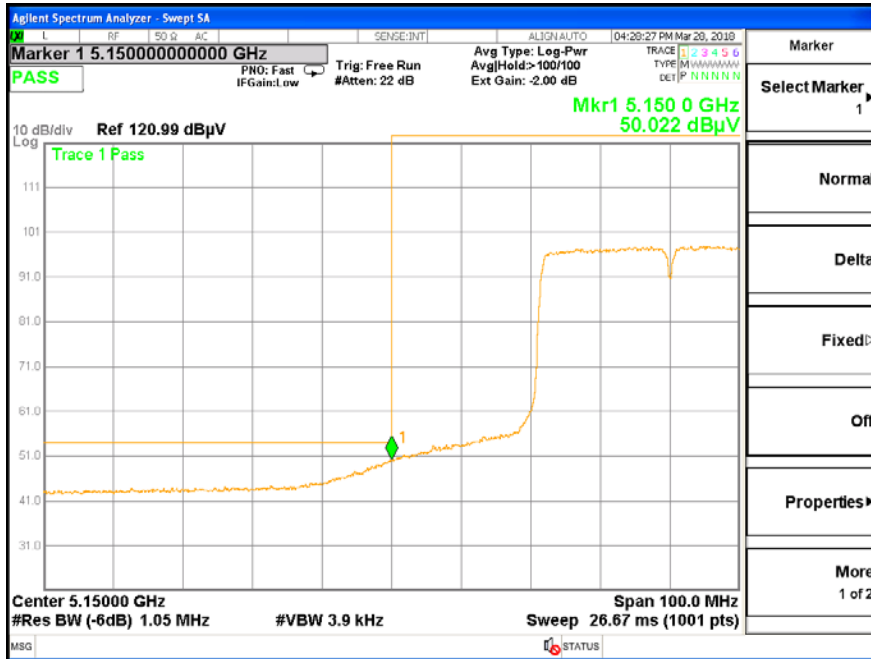

Radiated Restricted Lower Band Edge Plot Average (Antenna- Vertical)

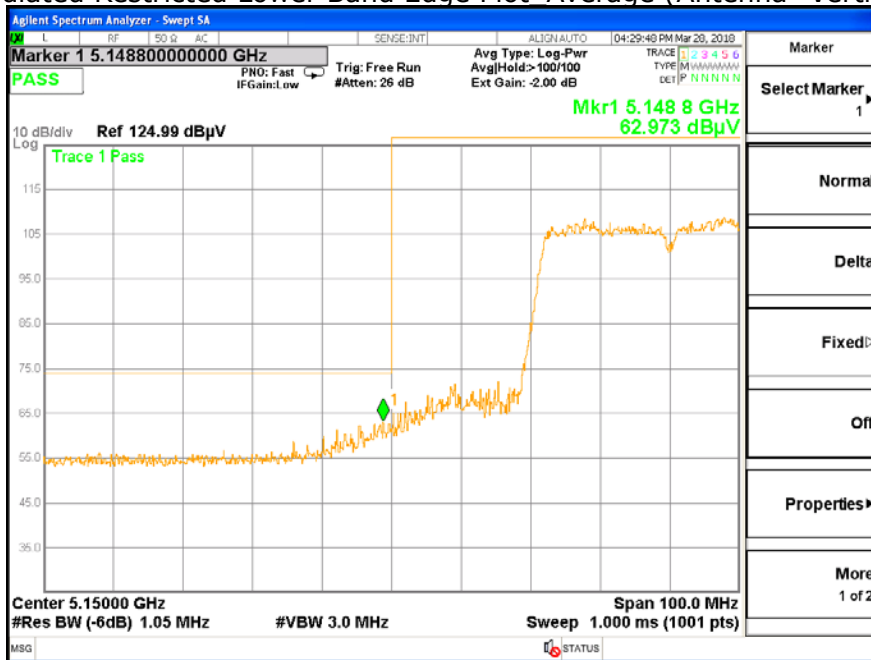


Radiated Restricted Lower Band Edge Plot_Peak (Antenna- Vertical)




CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2018-00984
 Page (149) / (165)
 Pages

Worst Case Mode :	802.11n_HT40_SDM Mode
Worst Case Transfer Rate :	MCS 24
Distance of Measurements :	3 Meters
Operating Frequency :	5 755 MHz
Channel :	151

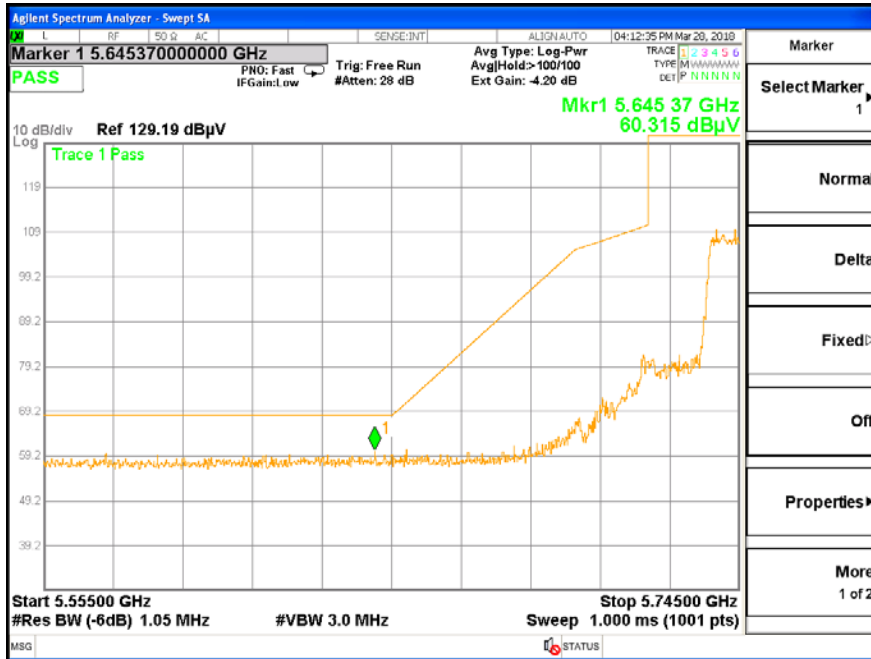

Radiated Restricted Lower Band Edge Plot (Antenna-Horizontal)

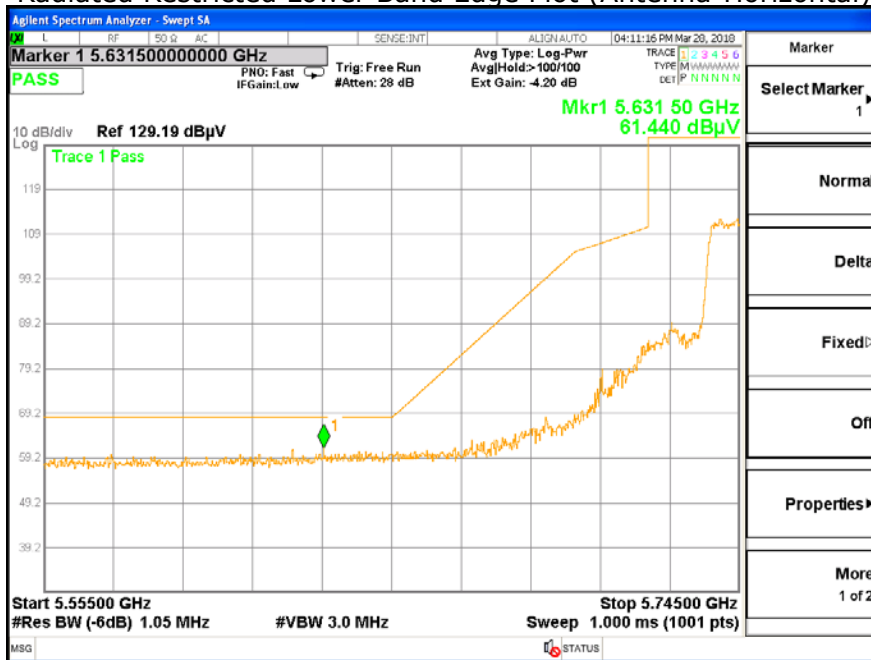


Radiated Restricted Lower Band Edge Plot (Antenna- Vertical)




CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2018-00984
 Page (150) / (165)
 Pages

Worst Case Mode :	802.11n_HT40_SDM Mode
Worst Case Transfer Rate :	MCS 24
Distance of Measurements :	3 Meters
Operating Frequency :	5 795 MHz
Channel :	159

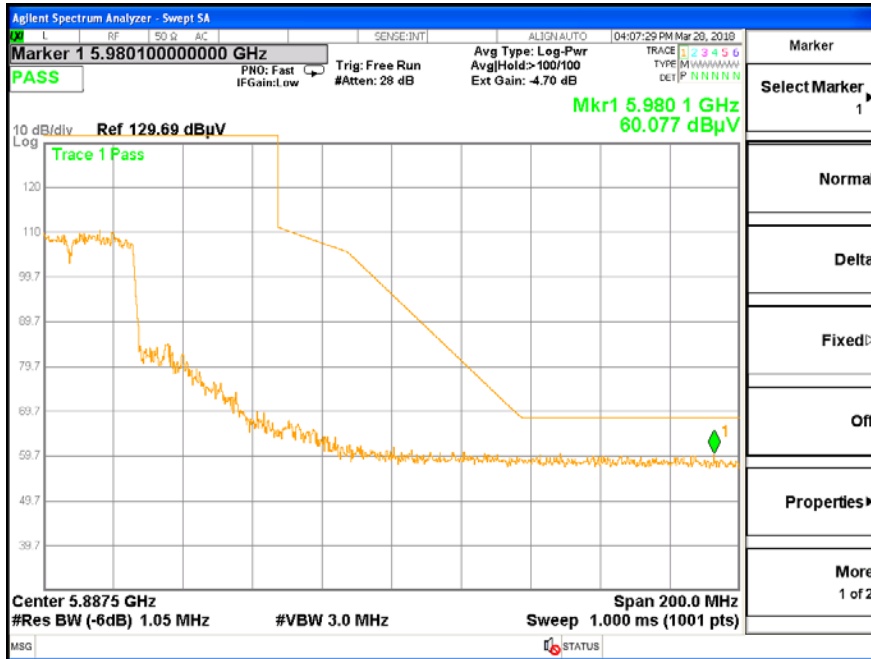

Radiated Restricted Upper Band Edge Plot (Antenna-Horizontal)

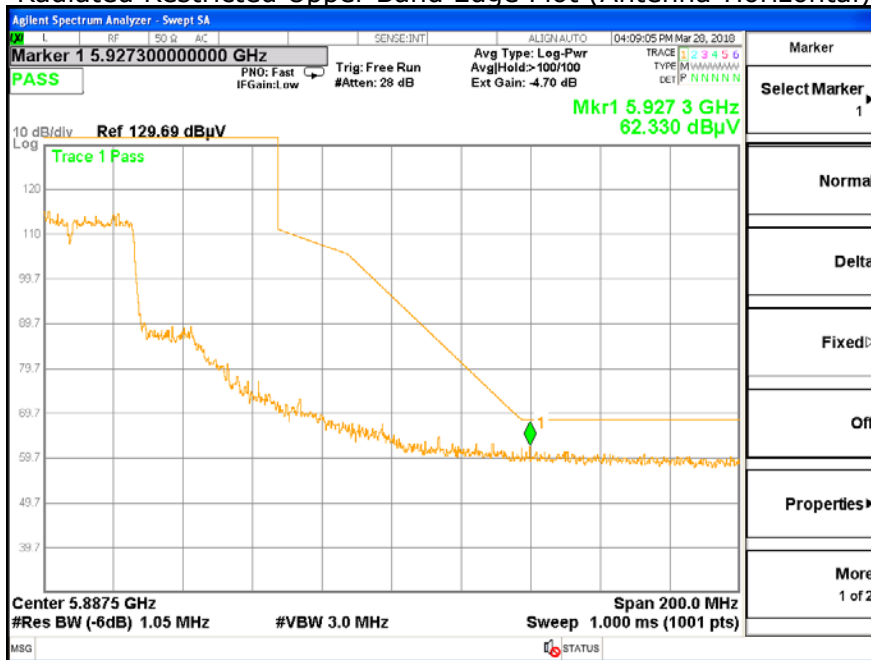

Radiated Restricted Upper Band Edge Plot (Antenna- Vertical)



Test mode : 802.11ac_VHT40_SDM Mode

The requirements are:

Complies

Test Data

Ch.38(5 190 MHz)

Frequency [MHz]	(P)	Limit AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Level AV [dB(uV/m)]	Level PK [dB(uV/m)]	Margin AV [dB]	Margin PK [dB]
10 380.00	H	54.00	74.00	44.74	57.11	9.26	16.89
10 380.00	V	54.00	74.00	43.49	56.44	10.51	17.56
5 150.00	H	54.00	74.00	51.18	65.48	2.82	8.52
5 150.00	V	54.00	74.00	49.36	67.67	4.64	6.33

Ch.46(5 230 MHz)

Frequency [MHz]	(P)	Limit AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Level AV [dB(uV/m)]	Level PK [dB(uV/m)]	Margin AV [dB]	Margin PK [dB]
10 460.00	H	54.00	74.00	44.58	57.26	9.42	16.74
10 460.00	V	54.00	74.00	44.64	60.25	9.36	13.75
15 690.00	H	54.00	74.00	42.75	54.11	11.25	19.89
15 690.00	V	54.00	74.00	42.14	53.91	11.86	20.09

Ch.151(5 755 MHz)

Frequency [MHz]	(P)	Limit AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Level AV [dB(uV/m)]	Level PK [dB(uV/m)]	Margin AV [dB]	Margin PK [dB]
11 510.00	H	54.00	74.00	49.98	61.82	4.02	12.18
11 510.00	V	54.00	74.00	46.59	60.67	7.41	13.33
17 265.00	H	54.00	74.00	47.91	58.72	6.09	15.28
17 265.00	V	54.00	74.00	46.89	58.96	7.11	15.04



CTK Co., Ltd.
(Ho-dong), 113, Yejik-ro, Cheoin-gu,
Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No.:
CTK-2018-00984
Page (152) / (165)
Pages

Ch.159(5 795 MHz)

Frequency [MHz]	(P)	Limit AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Level AV [dB(uV/m)]	Level PK [dB(uV/m)]	Margin AV [dB]	Margin PK [dB]
11 590.00	H	54.00	74.00	50.82	63.31	3.18	10.69
11 590.00	V	54.00	74.00	48.08	61.42	5.92	12.58
17 385.00	H	54.00	74.00	47.60	58.26	6.40	15.74
17 385.00	V	54.00	74.00	46.53	57.82	7.47	16.18

Remarks


1. The EUT was tested in three orientations in order to determine that "Z axis" was the worst case.




CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2018-00984
 Page (153) / (165)
 Pages

Worst Case Mode :	802.11ac_VHT40_SDM Mode
Worst Case Transfer Rate :	MNSS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 190 MHz
Channel :	38

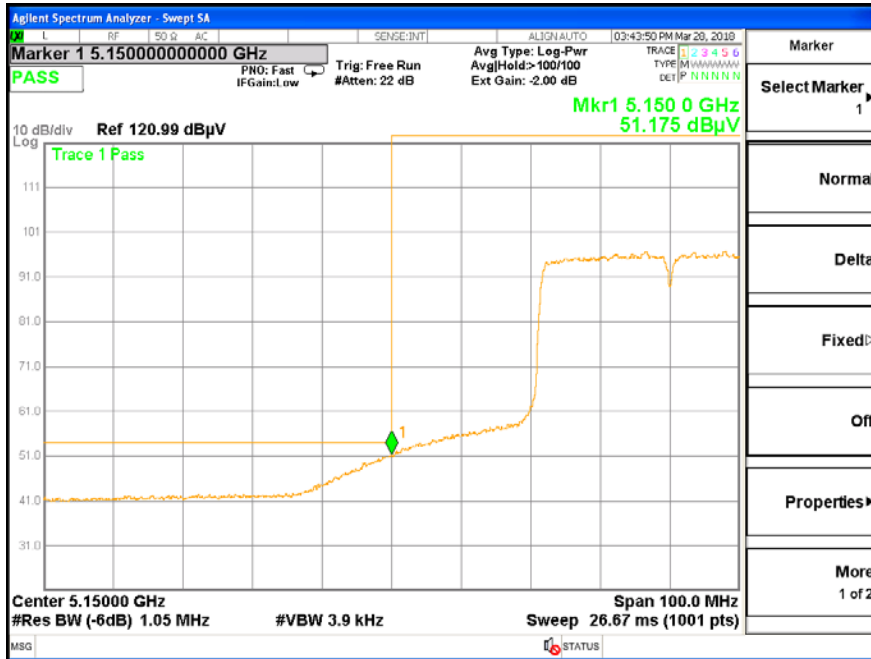

Radiated Restricted Lower Band Edge Plot Average (Antenna-Horizontal)

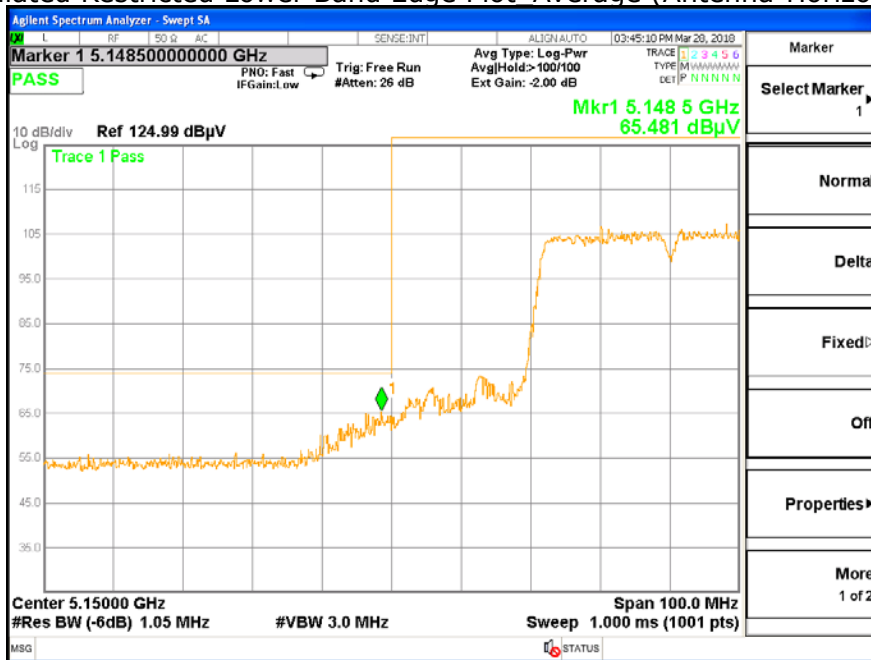


Radiated Restricted Lower Band Edge Plot_Peak (Antenna- Horizontal)




CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2018-00984
 Page (154) / (165)
 Pages

Worst Case Mode :	802.11ac_VHT40_SDM Mode
Worst Case Transfer Rate :	MNSS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 190 MHz
Channel :	38

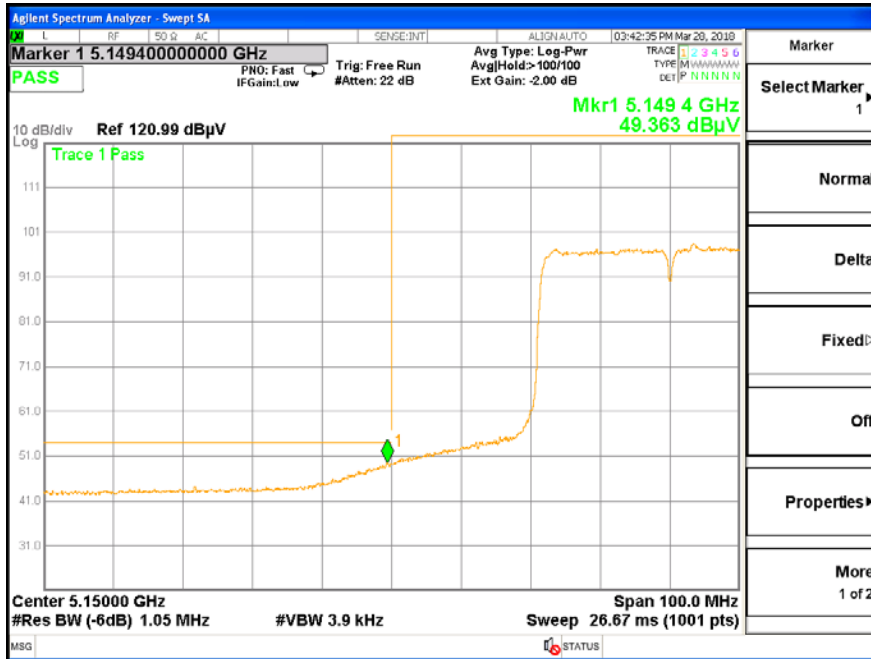

Radiated Restricted Lower Band Edge Plot Average (Antenna- Vertical)

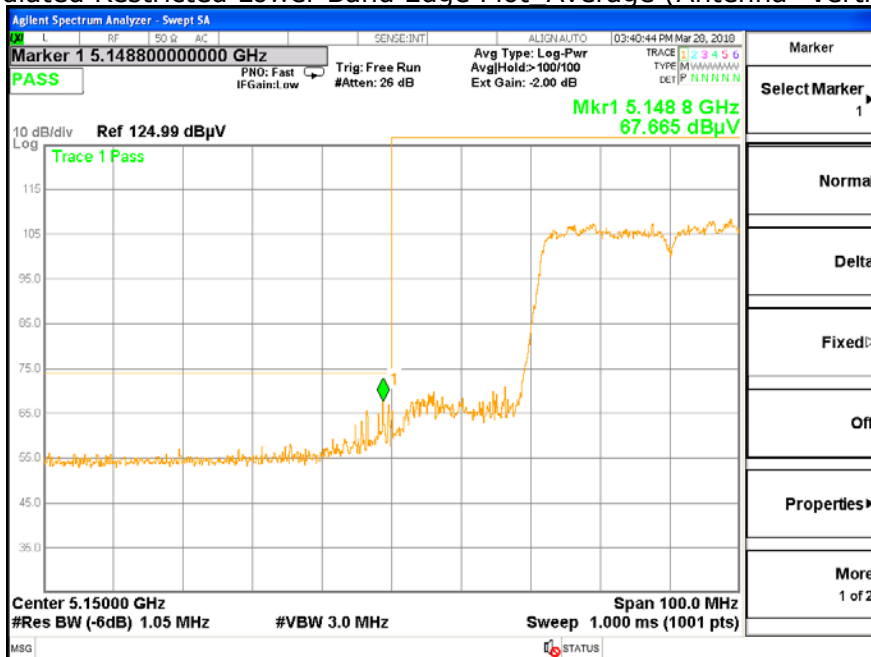


Radiated Restricted Lower Band Edge Plot_Peak (Antenna- Vertical)




CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2018-00984
 Page (155) / (165)
 Pages

Worst Case Mode :	802.11ac_VHT40_SDM Mode
Worst Case Transfer Rate :	MNSS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 755 MHz
Channel :	151

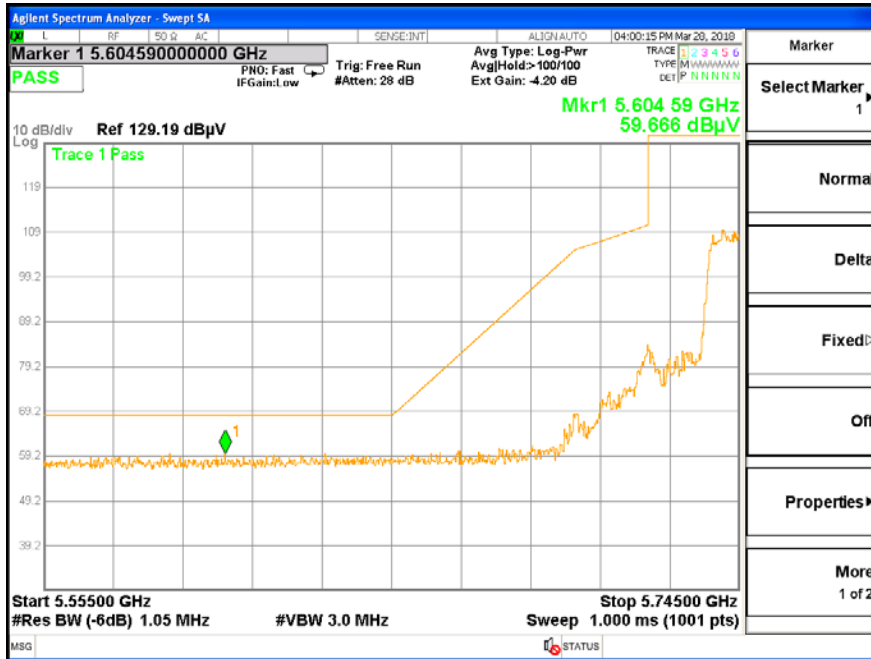

Radiated Restricted Lower Band Edge Plot (Antenna-Horizontal)

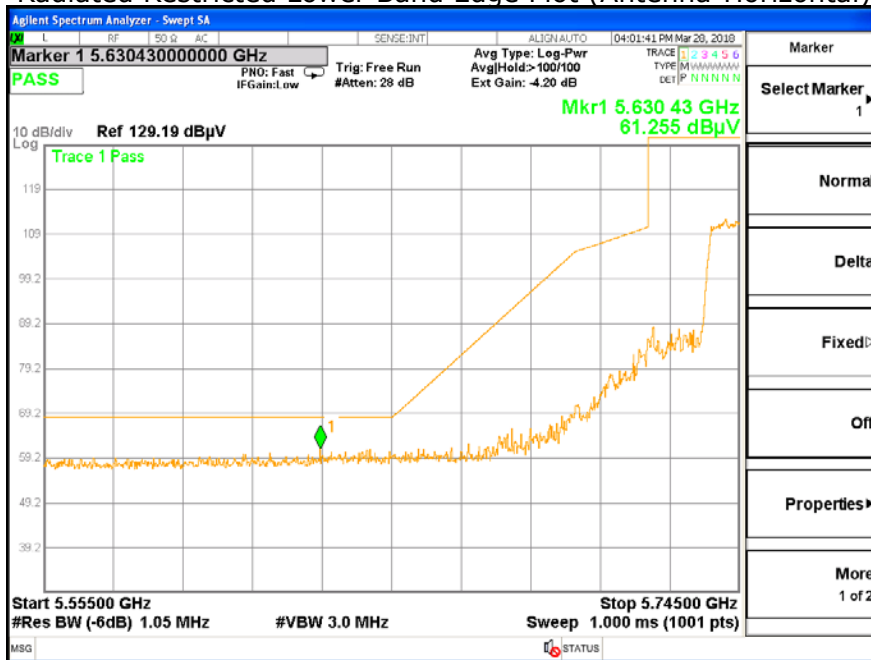


Radiated Restricted Lower Band Edge Plot (Antenna- Vertical)




CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2018-00984
 Page (156) / (165)
 Pages

Worst Case Mode :	802.11ac_VHT40_SDM Mode
Worst Case Transfer Rate :	MNSS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 795 MHz
Channel :	159

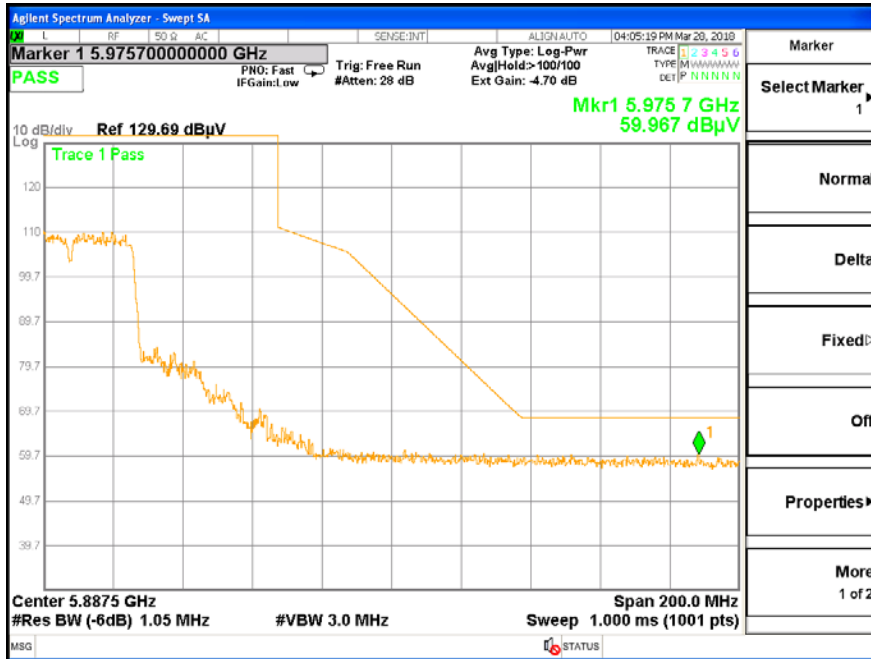

Radiated Restricted Upper Band Edge Plot (Antenna-Horizontal)

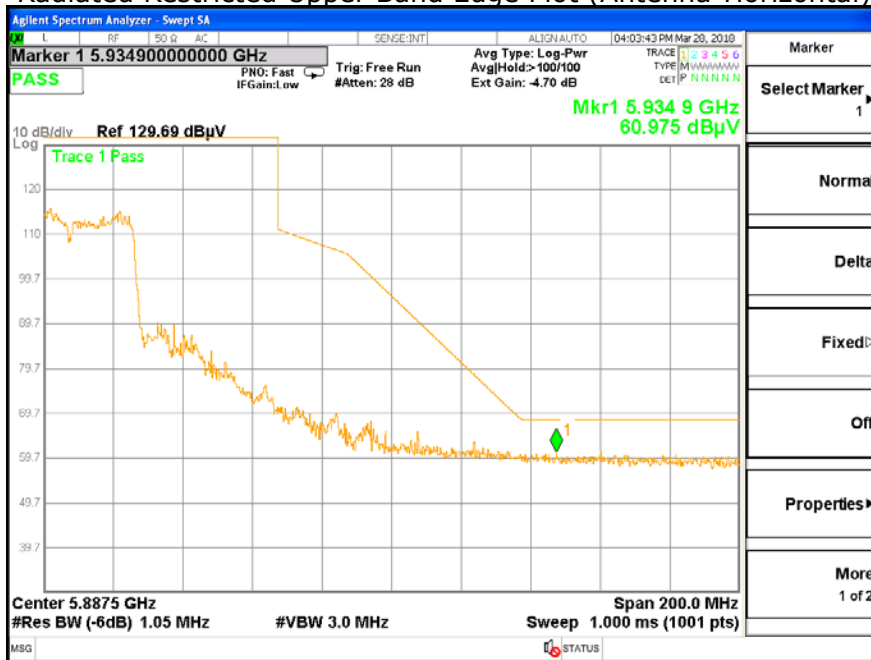

Radiated Restricted Upper Band Edge Plot (Antenna- Vertical)



CTK Co., Ltd.
(Ho-dong), 113, Yejik-ro, Cheoin-gu,
Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No.:
CTK-2018-00984
Page (157) / (165)
Pages

Test mode : 802.11ac_VHT80

The requirements are:

Complies

Test Data

Ch.42(5 210 MHz)

Frequency [MHz]	(P)	Limit AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Level AV [dB(uV/m)]	Level PK [dB(uV/m)]	Margin AV [dB]	Margin PK [dB]
10 420.00	H	54.00	74.00	44.01	53.65	9.99	20.35
10 420.00	V	54.00	74.00	43.98	54.15	10.02	19.85
5 150.00	H	54.00	74.00	51.96	63.53	2.04	10.47
5 150.00	V	54.00	74.00	49.37	60.50	4.63	13.50

Ch.155(5 775 MHz)

Frequency [MHz]	(P)	Limit AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Level AV [dB(uV/m)]	Level PK [dB(uV/m)]	Margin AV [dB]	Margin PK [dB]
11 550.00	H	54.00	74.00	46.77	57.98	7.23	16.02
11 550.00	V	54.00	74.00	46.13	56.11	7.87	17.89

Remarks


1. The EUT was tested in three orientations in order to determine that "Z axis" was the worst case.




CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2018-00984
 Page (158) / (165)
 Pages

Worst Case Mode :	802.11ac_VHT80_SDM Mode
Worst Case Transfer Rate :	MNSS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 210 MHz
Channel :	42

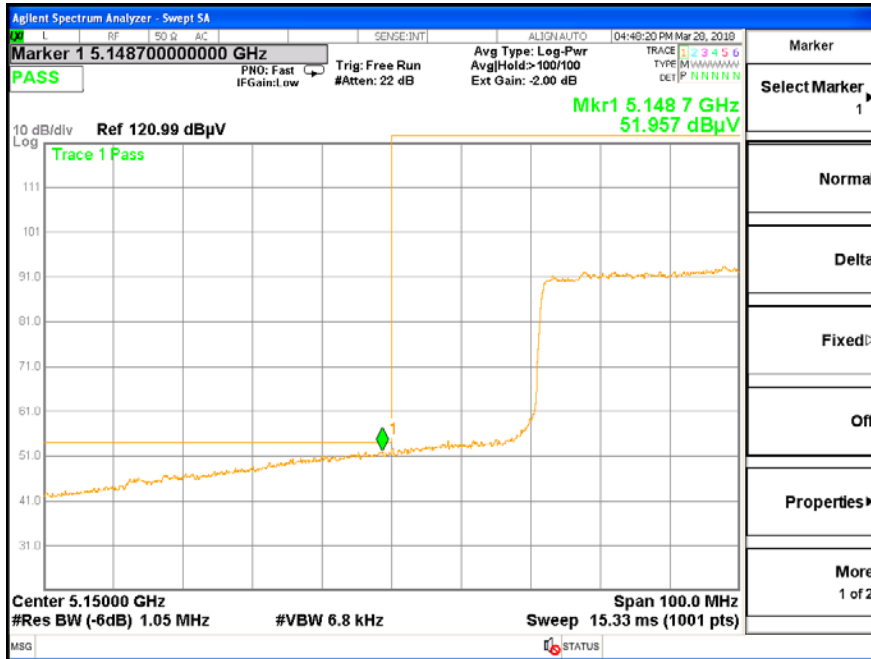

Radiated Restricted Lower Band Edge Plot Average (Antenna-Horizontal)

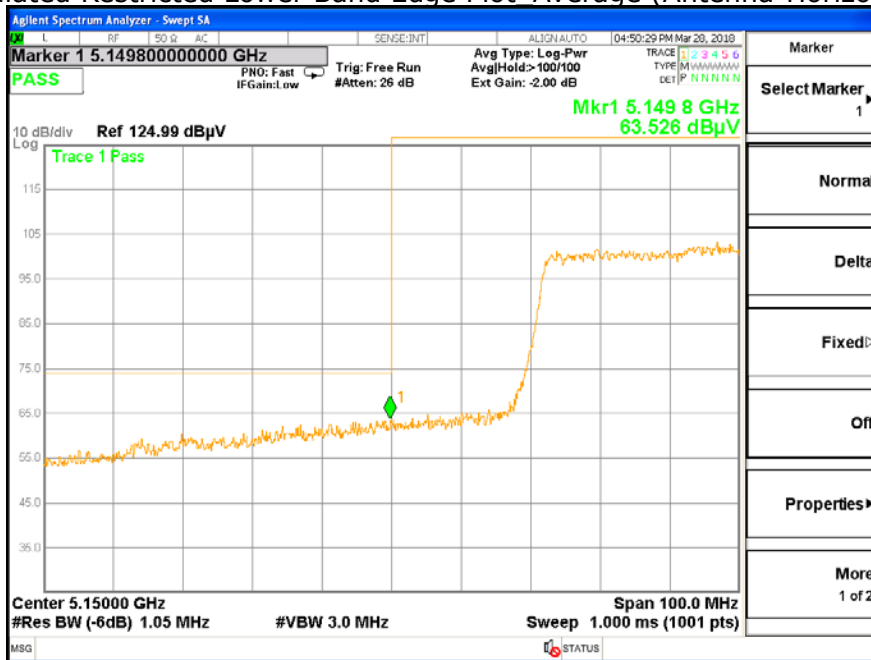


Radiated Restricted Lower Band Edge Plot_Peak (Antenna- Horizontal)




CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2018-00984
 Page (159) / (165)
 Pages

Worst Case Mode :	802.11ac_VHT80_SDM Mode
Worst Case Transfer Rate :	MNSS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 210 MHz
Channel :	42

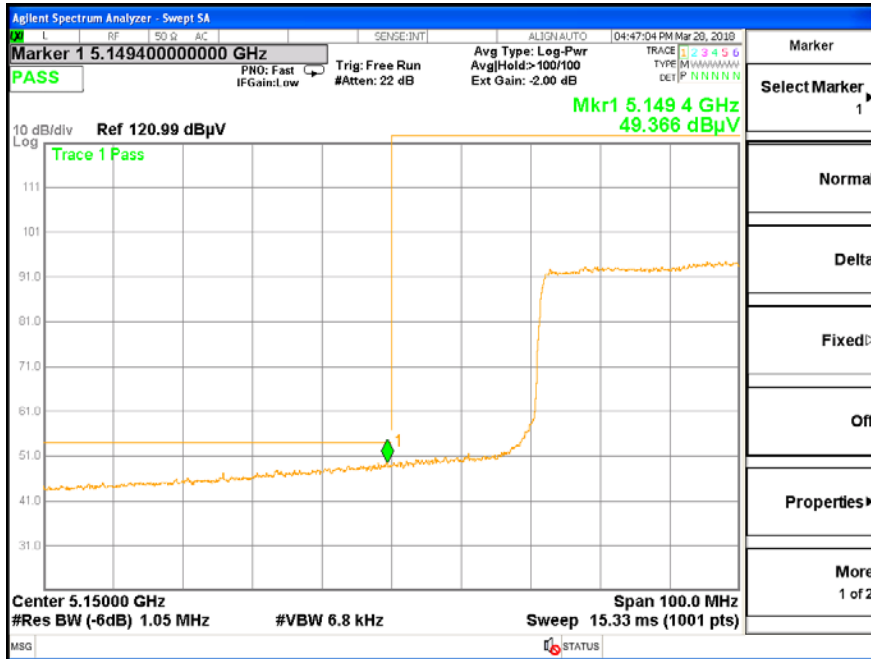

Radiated Restricted Lower Band Edge Plot Average (Antenna- Vertical)

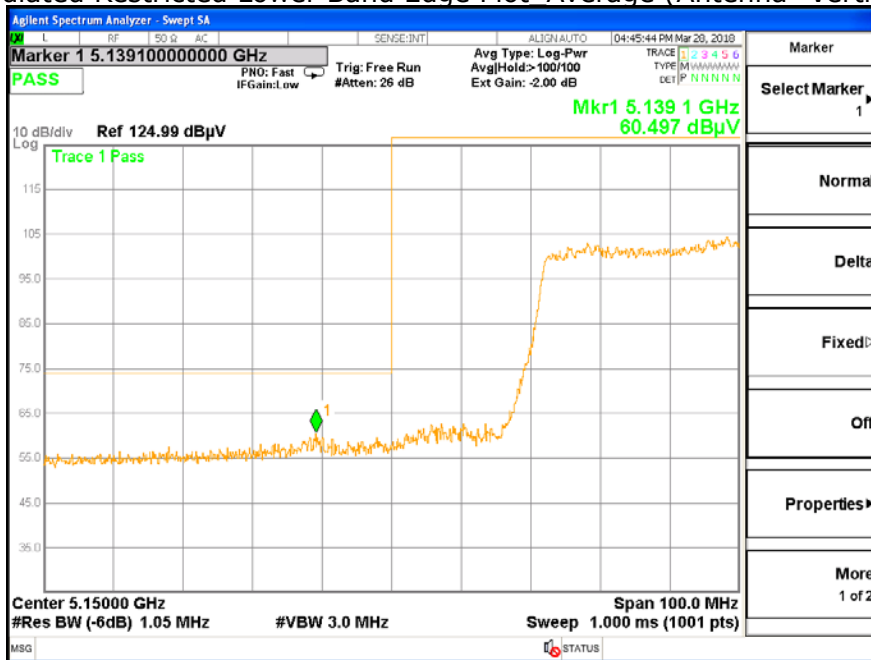


Radiated Restricted Lower Band Edge Plot_Peak (Antenna- Vertical)




CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2018-00984
 Page (160) / (165)
 Pages

Worst Case Mode :	802.11ac_VHT80_SDM Mode
Worst Case Transfer Rate :	MNSS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 775 MHz
Channel :	155

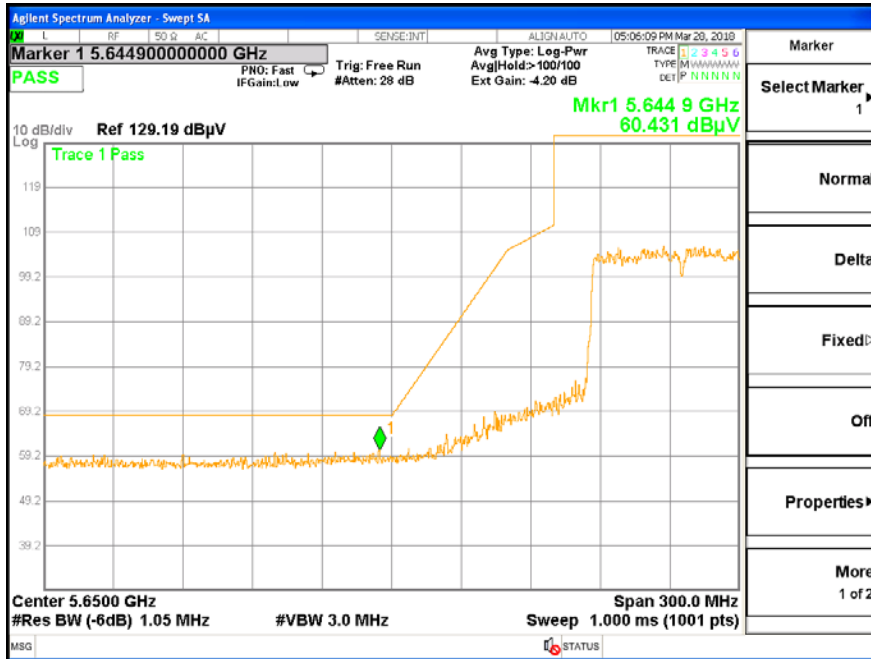

Radiated Restricted Lower Band Edge Plot (Antenna-Horizontal)

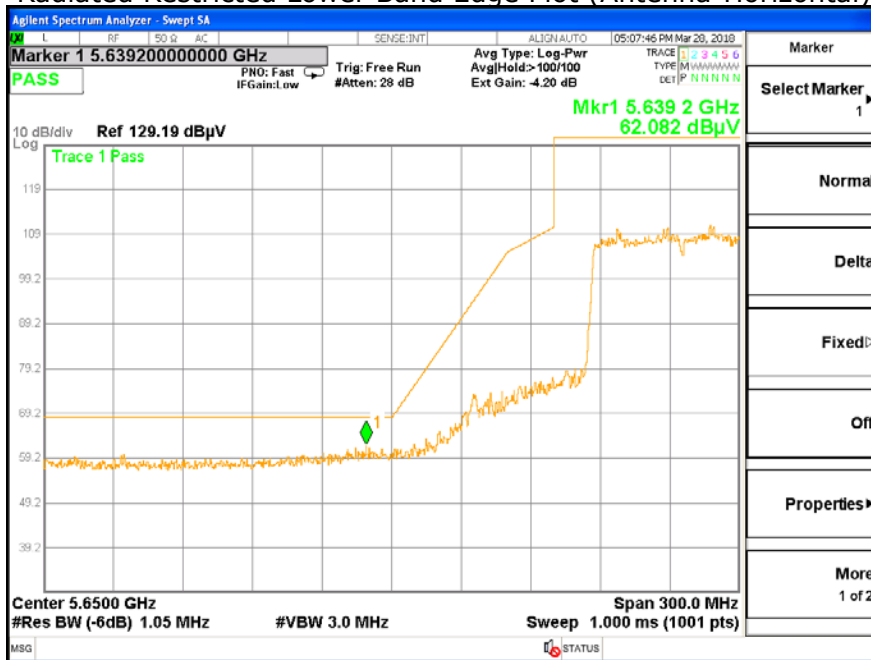


Radiated Restricted Lower Band Edge Plot (Antenna- Vertical)




CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2018-00984
 Page (161) / (165)
 Pages

Worst Case Mode :	802.11ac_VHT80_SDM Mdoe
Worst Case Transfer Rate :	MNSS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 775 MHz
Channel :	155

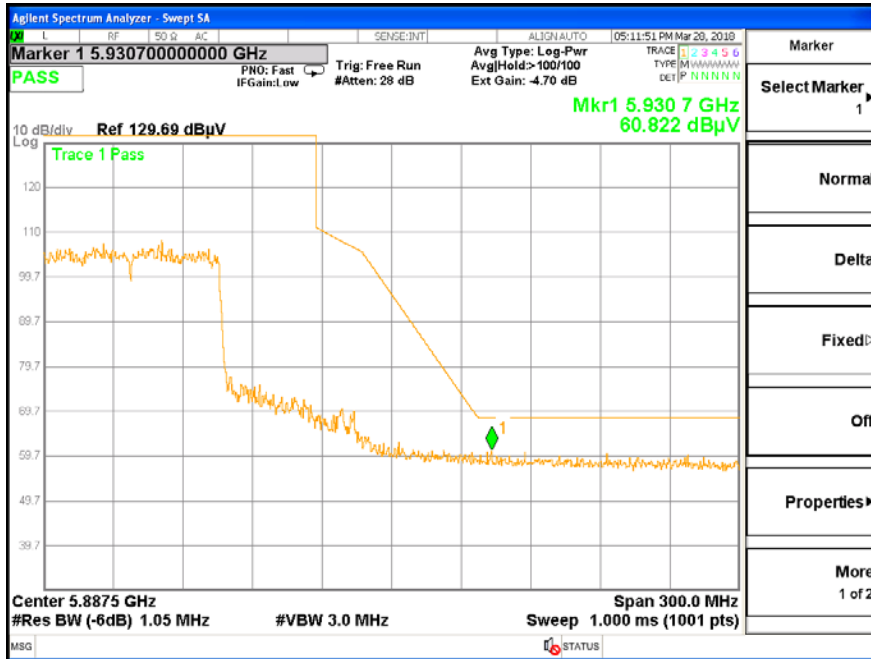

Radiated Restricted Upper Band Edge Plot (Antenna-Horizontal)

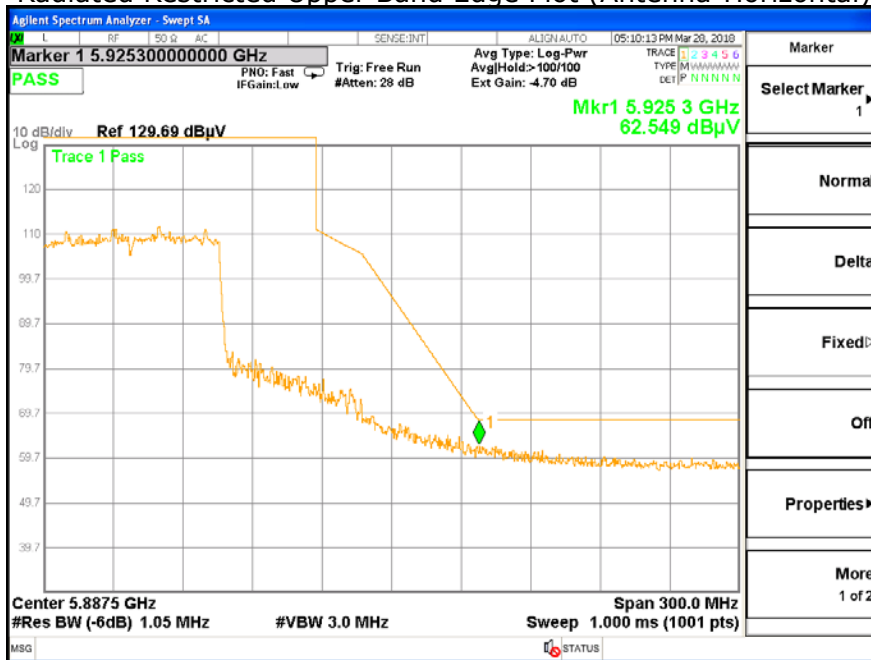

Radiated Restricted Upper Band Edge Plot (Antenna- Vertical)



CTK Co., Ltd.
(Ho-dong), 113, Yejik-ro, Cheoin-gu,
Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No.:
CTK-2018-00984
Page (162) / (165)
Pages

4.8 AC Conducted Emissions

Test Location

Shielded Room

Frequency Range of Measurement

150 kHz to 30 MHz

Instrument Settings

IF Band Width: 9 kHz

Test Procedures

The EUT was placed on a non-metallic table 0.8m above the metallic, grounded floor and 0.4m from the reference ground plane wall. The distance to other metallic surfaces was at least 0.8m.

Amplitude measurements were performed with a quasi-peak detector and an average detector.

Limit

- 15.207(a)

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 ~ 0.5	66 to 56*	56 to 46*
0.5 ~ 5	56	46
5 ~ 30	60	50

* Decreases with the logarithm of the frequency.

Test Results


The requirements are:

Complies

Test Data

[LINE]

3CE_Class B_L1

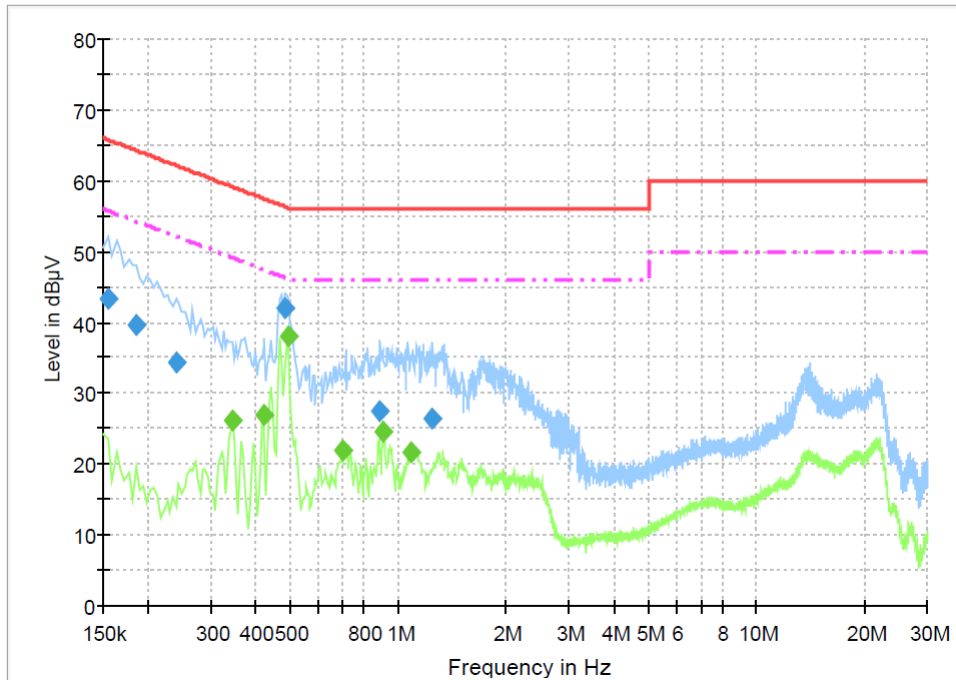


Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.154500	43.3	1000.0	9.000	On	L1	9.8	22.5	65.8
0.186000	39.6	1000.0	9.000	On	L1	9.8	24.7	64.2
0.240000	34.3	1000.0	9.000	On	L1	9.7	27.8	62.1
0.483000	42.0	1000.0	9.000	On	L1	10.0	14.3	56.3
0.888000	27.4	1000.0	9.000	On	L1	9.8	28.6	56.0
1.248000	26.4	1000.0	9.000	On	L1	9.7	29.6	56.0

Final Result 2

Frequency (MHz)	CAverage (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.343500	26.1	1000.0	9.000	On	L1	9.9	23.0	49.1
0.420000	26.9	1000.0	9.000	On	L1	9.9	20.6	47.4
0.492000	38.1	1000.0	9.000	On	L1	10.0	8.1	46.1
0.703500	21.8	1000.0	9.000	On	L1	9.9	24.2	46.0
0.910500	24.6	1000.0	9.000	On	L1	9.8	21.4	46.0
1.090500	21.7	1000.0	9.000	On	L1	9.8	24.3	46.0

[NEUTRAL]
3CE_Class B_N

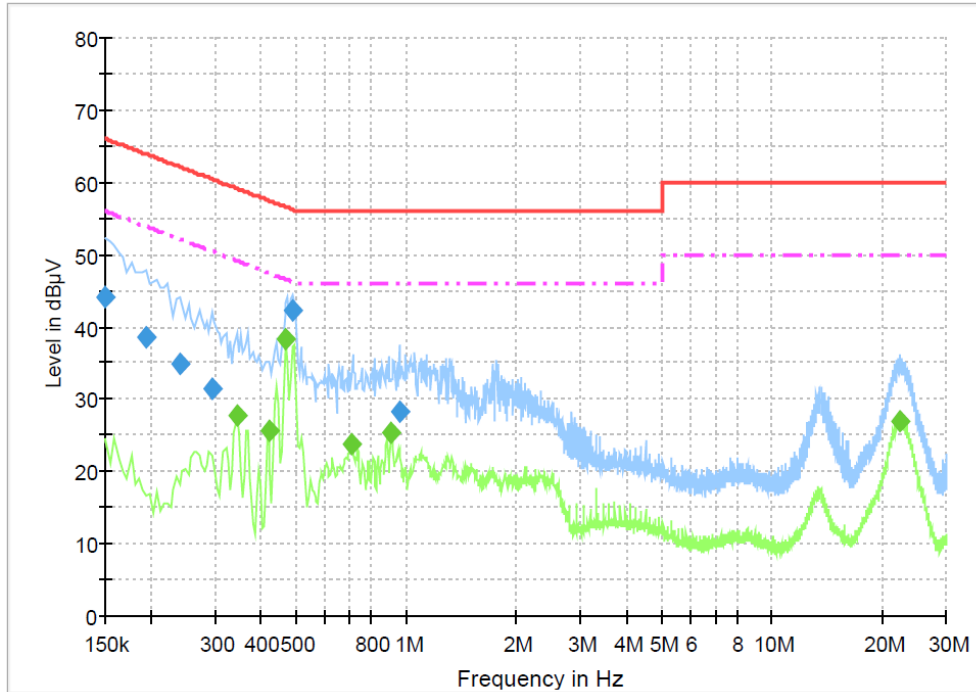

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.150000	44.1	1000.0	9.000	On	N	9.8	21.9	66.0
0.195000	38.5	1000.0	9.000	On	N	9.9	25.3	63.8
0.240000	34.8	1000.0	9.000	On	N	9.8	27.3	62.1
0.294000	31.4	1000.0	9.000	On	N	9.8	29.0	60.4
0.487500	42.2	1000.0	9.000	On	N	9.9	14.0	56.2
0.955500	28.3	1000.0	9.000	On	N	9.8	27.7	56.0

Final Result 2

Frequency (MHz)	CAverage (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.343500	27.8	1000.0	9.000	On	N	9.9	21.3	49.1
0.420000	25.6	1000.0	9.000	On	N	9.9	21.9	47.4
0.469500	38.3	1000.0	9.000	On	N	9.9	8.3	46.5
0.708000	23.7	1000.0	9.000	On	N	9.9	22.3	46.0
0.910500	25.5	1000.0	9.000	On	N	9.8	20.5	46.0
22.308000	27.0	1000.0	9.000	On	N	10.2	23.0	50.0



CTK Co., Ltd.
(Ho-dong), 113, Yejik-ro, Cheoin-gu,
Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No.:
CTK-2018-00984
Page (165) / (165)
Pages

APPENDIX A – Test Equipment Used For Tests

	Name of Equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1	Signal Analyzer	Agilent	N9020A	MY48011598	2017-11-01	2018-11-01
2	Signal Generator	Rohde & Schwarz	SMB100A	175528	2017-11-01	2018-11-01
3	EMI Test Receiver	Rohde & Schwarz	ESCI7	100814	2017-10-25	2018-10-25
4	Bilog Antenna	Schaffner	CBL6111C	2551	2016-05-13	2018-05-13
5	Active Loop Antenna	SCHWARZBECK	FMZB 1513	1513-125	2016-05-16	2018-05-16
6	6dB Attenuator	R&S	DNF	272.4110.50-2	2017-10-25	2018-10-25
7	AMPLIFIER	SONOMA	310	291721	2018-02-02	2019-02-02
8	EMI Test Receiver	Rohde & Schwarz	ESU40	100336	2017-05-12	2018-05-12
9	LISN	Rohde & Schwarz	ENV216	101760	2018-01-31	2019-01-31
10	Preamplifier	Agilent	8449B	3008A02011	2017-11-30	2018-11-30
11	Horn Antenna	ETS-Lindgren	3116	00062504	2017-12-04	2019-12-04
12	Horn Antenna	ETS-Lindgren	3117	00154525	2017-02-17	2019-02-17
13	Singnal Canditioning Unit	R&S	SCU-40	10023	2017-11-01	2018-11-01
14	Band Reject Filter	Micro Tronics	BRM50716	G184	2018-01-26	2019-01-26
15	Temp&Humi Chamber	ESPEC CORP.	SH-241	92000872	2018-01-26	2019-01-26