

4.4 Power Spectral Density

Test Procedures

Maximum Power Spectral Density (KDB 789033, Method SA-2)
Multiple Transmitter Output (KDB 662911 D01, D02)

The peak power density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating in transmission mode at the appropriate frequencies.

Test Settings :

Center frequency = the highest, middle and the lowest channels

- a) RBW = 1 MHz, 500 KHz (UNII 3)
- b) VBW = 3 MHz, 1.5 MHz (UNII 3)
- c) Sweep time = auto
- d) Detector = power averaging (rms)
- e) Trace mode = Average at least 100
- f) Duty cycle factor = $10\log(1/x)$

CDD Mode	802.11a	0.19 dB
	802.11n_HT20	0.21 dB
	802.11n_HT40	0.41 dB
	802.11ac_VHT20	0.21 dB
	802.11ac_VHT40	0.41 dB
	802.11ac_VHT80	0.86 dB
SDM Mode	802.11n_HT20	0.74 dB
	802.11n_HT40	1.30 dB
	802.11ac_VHT20	0.73 dB
	802.11ac_VHT40	1.29 dB
	802.11ac_VHT80	2.06 dB



CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2018-01335
 Page (95) / (160)
 Pages

Limit

Operating Mode	Band	Mode	ANT Configuration	ANT Gain (dBi)	Limit (dBm)
SISO	UNII 1	802.11a/n/ac	ANT0	2.00	17.00
			ANT1		
			ANT2		
			ANT3		
	UNII 3	802.11a/n/ac	ANT0		30.00
			ANT1		
			ANT2		
			ANT3		
MIMO (2Tx)	UNII 1	802.11a/n/ac	ANT0 + ANT1	5.01	17.00
	UNII 3				30.00
MIMO (3Tx)	UNII 1	802.11a/n/ac	ANT0 + ANT1 + ANT2	6.77	16.23
	UNII 3				29.23
MIMO (4Tx)	UNII 1	802.11a/n/ac	ANT0 + ANT1 + ANT2 + ANT3	8.02	14.98
	UNII 3				27.98



Test Data

CDD Mode_ANTO

Test Mode	Frequency (MHz)	Measured Power Density (dBm)	Duty cycle Factor (dB)	Result Output Power (dBm)	Limit (dBm)	Margin (dB)
802.11a	5 180	5.37	0.19	5.56	17.00	11.44
	5 200	5.77	0.19	5.96	17.00	11.04
	5 240	5.83	0.19	6.02	17.00	10.98
	5 745	0.04	0.19	0.23	30.00	29.77
	5 785	-0.17	0.19	0.02	30.00	29.98
	5 825	-0.22	0.19	-0.03	30.00	30.03
802.11n_HT20	5 180	4.54	0.21	4.75	17.00	12.25
	5 200	4.86	0.21	5.07	17.00	11.93
	5 240	4.94	0.21	5.15	17.00	11.85
	5 745	0.91	0.21	1.12	30.00	28.88
	5 785	0.82	0.21	1.03	30.00	28.97
	5 825	0.62	0.21	0.83	30.00	29.17
802.11ac_VHT20	5 180	5.65	0.21	5.86	17.00	11.14
	5 200	5.6	0.21	5.81	17.00	11.19
	5 240	5.65	0.21	5.86	17.00	11.14
	5 745	0.82	0.21	1.03	30.00	28.97
	5 785	1.10	0.21	1.31	30.00	28.69
	5 825	0.62	0.21	0.83	30.00	29.17
802.11n_HT40	5 190	-1.48	0.41	-1.07	17.00	18.07
	5 230	-1.52	0.41	-1.11	17.00	18.11
	5 755	-2.04	0.41	-1.63	30.00	31.63
	5 795	-2.03	0.41	-1.62	30.00	31.62
802.11ac_VHT40	5 190	-1.71	0.41	-1.3	17.00	18.30
	5 230	-1.78	0.41	-1.37	17.00	18.37
	5 755	-2.12	0.41	-1.71	30.00	31.71
	5 795	-2.34	0.41	-1.93	30.00	31.93
802.11ac_VHT80	5 210	-7.05	0.86	-6.19	17.00	23.19
	5 775	-5.53	0.86	-4.67	30.00	34.67
Measurement uncertainty		± 1.5 dB				



CDD Mode_ANT1

Test Mode	Frequency (MHz)	Measured Power Density (dBm)	Duty cycle Factor (dB)	Result Output Power (dBm)	Limit (dBm)	Margin (dB)
802.11a	5 180	5.10	0.19	5.29	17.00	11.71
	5 200	5.28	0.19	5.47	17.00	11.53
	5 240	5.13	0.19	5.32	17.00	11.68
	5 745	-0.37	0.19	-0.18	30.00	30.18
	5 785	-0.64	0.19	-0.45	30.00	30.45
	5 825	-0.97	0.19	-0.78	30.00	30.78
802.11n _HT20	5 180	4.34	0.21	4.55	17.00	12.45
	5 200	4.08	0.21	4.29	17.00	12.71
	5 240	4.17	0.21	4.38	17.00	12.62
	5 745	0.61	0.21	0.82	30.00	29.18
	5 785	0.25	0.21	0.46	30.00	29.54
	5 825	0.01	0.21	0.22	30.00	29.78
802.11ac _VHT20	5 180	5.02	0.21	5.23	17.00	11.77
	5 200	4.85	0.21	5.06	17.00	11.94
	5 240	5.07	0.21	5.28	17.00	11.72
	5 745	0.75	0.21	0.96	30.00	29.04
	5 785	0.90	0.21	1.11	30.00	28.89
	5 825	-0.05	0.21	0.16	30.00	29.84
802.11n _HT40	5 190	-2.55	0.41	-2.14	17.00	19.14
	5 230	-2.28	0.41	-1.87	17.00	18.87
	5 755	-2.20	0.41	-1.79	30.00	31.79
	5 795	-2.83	0.41	-2.42	30.00	32.42
802.11ac _VHT40	5 190	-2.09	0.41	-1.68	17.00	18.68
	5 230	-2.40	0.41	-1.99	17.00	18.99
	5 755	-2.31	0.41	-1.90	30.00	31.90
	5 795	-2.15	0.41	-1.74	30.00	31.74
802.11ac _VHT80	5 210	-7.07	0.86	-6.21	17.00	23.21
	5 775	-5.63	0.86	-4.77	30.00	34.77
Measurement uncertainty		± 1.5 dB				



CDD Mode_ANT2

Test Mode	Frequency (MHz)	Measured Power Density (dBm)	Duty cycle Factor (dB)	Result Output Power (dBm)	Limit (dBm)	Margin (dB)
802.11a	5 180	5.53	0.19	5.72	17.00	11.28
	5 200	6.06	0.19	6.25	17.00	10.75
	5 240	5.63	0.19	5.82	17.00	11.18
	5 745	-0.35	0.19	-0.16	30.00	30.16
	5 785	-0.16	0.19	0.03	30.00	29.97
	5 825	-0.72	0.19	-0.53	30.00	30.53
802.11n_HT20	5 180	4.71	0.21	4.92	17.00	12.08
	5 200	4.65	0.21	4.86	17.00	12.14
	5 240	4.75	0.21	4.96	17.00	12.04
	5 745	0.25	0.21	0.46	30.00	29.54
	5 785	0.55	0.21	0.76	30.00	29.24
	5 825	0.31	0.21	0.52	30.00	29.48
802.11ac_VHT20	5 180	5.41	0.21	5.62	17.00	11.38
	5 200	5.72	0.21	5.93	17.00	11.07
	5 240	5.70	0.21	5.91	17.00	11.09
	5 745	0.59	0.21	0.80	30.00	29.20
	5 785	0.69	0.21	0.90	30.00	29.10
	5 825	0.23	0.21	0.44	30.00	29.56
802.11n_HT40	5 190	-2.62	0.41	-2.21	17.00	19.21
	5 230	-2.45	0.41	-2.04	17.00	19.04
	5 755	-2.27	0.41	-1.86	30.00	31.86
	5 795	-2.06	0.41	-1.65	30.00	31.65
802.11ac_VHT40	5 190	-2.22	0.41	-1.81	17.00	18.81
	5 230	-2.03	0.41	-1.62	17.00	18.62
	5 755	-1.99	0.41	-1.58	30.00	31.58
	5 795	-2.02	0.41	-1.61	30.00	31.61
802.11ac_VHT80	5 210	-7.70	0.86	-6.84	17.00	23.84
	5 775	-5.95	0.86	-5.09	30.00	35.09
Measurement uncertainty		± 1.5 dB				



CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2018-01335
 Page (99) / (160)
 Pages

CDD Mode_ANT3

Test Mode	Frequency (MHz)	Measured Power Density (dBm)	Duty cycle Factor (dB)	Result Output Power (dBm)	Limit (dBm)	Margin (dB)
802.11a	5 180	4.99	0.19	5.18	17.00	11.82
	5 200	4.66	0.19	4.85	17.00	12.15
	5 240	4.85	0.19	5.04	17.00	11.96
	5 745	-0.42	0.19	-0.23	30.00	30.23
	5 785	-0.77	0.19	-0.58	30.00	30.58
	5 825	-1.35	0.19	-1.16	30.00	31.16
802.11n _HT20	5 180	3.76	0.21	3.97	17.00	13.03
	5 200	3.87	0.21	4.08	17.00	12.92
	5 240	3.89	0.21	4.10	17.00	12.90
	5 745	0.31	0.21	0.52	30.00	29.48
	5 785	-0.12	0.21	0.09	30.00	29.91
	5 825	-0.61	0.21	-0.40	30.00	30.40
802.11ac _VHT20	5 180	4.23	0.21	4.44	17.00	12.56
	5 200	4.78	0.21	4.99	17.00	12.01
	5 240	4.65	0.21	4.86	17.00	12.14
	5 745	0.31	0.21	0.52	30.00	29.48
	5 785	0.07	0.21	0.28	30.00	29.72
	5 825	0.01	0.21	0.22	30.00	29.78
802.11n _HT40	5 190	-2.92	0.41	-2.51	17.00	19.51
	5 230	-2.27	0.41	-1.86	17.00	18.86
	5 755	-2.50	0.41	-2.09	30.00	32.09
	5 795	-2.84	0.41	-2.43	30.00	32.43
802.11ac _VHT40	5 190	-2.67	0.41	-2.26	17.00	19.26
	5 230	-2.57	0.41	-2.16	17.00	19.16
	5 755	-2.76	0.41	-2.35	30.00	32.35
	5 795	-2.62	0.41	-2.21	30.00	32.21
802.11ac _VHT80	5 210	-8.22	0.86	-7.36	17.00	24.36
	5 775	-5.91	0.86	-5.05	30.00	35.05
Measurement uncertainty		± 1.5 dB				



CDD Mode_ANTO + ANT1

Test Mode	Frequency (MHz)	Measured Power Density (dBm)	Duty cycle Factor (dB)	Result Output Power (dBm)	Limit (dBm)	Margin (dB)
802.11a	5 180	8.25	0.19	8.44	17.00	8.56
	5 200	8.54	0.19	8.73	17.00	8.27
	5 240	8.50	0.19	8.69	17.00	8.31
	5 745	2.85	0.19	3.04	30.00	26.96
	5 785	2.61	0.19	2.80	30.00	27.20
	5 825	2.43	0.19	2.62	30.00	27.38
802.11n_HT20	5 180	7.45	0.21	7.66	17.00	9.34
	5 200	7.50	0.21	7.71	17.00	9.29
	5 240	7.58	0.21	7.79	17.00	9.21
	5 745	3.77	0.21	3.98	30.00	26.02
	5 785	3.55	0.21	3.76	30.00	26.24
	5 825	3.34	0.21	3.55	30.00	26.45
802.11ac_VHT20	5 180	8.36	0.21	8.57	17.00	8.43
	5 200	8.25	0.21	8.46	17.00	8.54
	5 240	8.38	0.21	8.59	17.00	8.41
	5 745	3.80	0.21	4.01	30.00	25.99
	5 785	4.01	0.21	4.22	30.00	25.78
	5 825	3.31	0.21	3.52	30.00	26.48
802.11n_HT40	5 190	1.03	0.41	1.44	17.00	15.56
	5 230	1.13	0.41	1.54	17.00	15.46
	5 755	0.89	0.41	1.30	30.00	28.70
	5 795	0.60	0.41	1.01	30.00	28.99
802.11ac_VHT40	5 190	1.11	0.41	1.52	17.00	15.48
	5 230	0.93	0.41	1.34	17.00	15.66
	5 755	0.80	0.41	1.21	30.00	28.79
	5 795	0.77	0.41	1.18	30.00	28.82
802.11ac_VHT80	5 210	-4.05	0.86	-3.19	17.00	20.19
	5 775	-2.57	0.86	-1.71	30.00	31.71
Measurement uncertainty		± 1.5 dB				



CDD Mode_ANTO + ANT1 + ANT2

Test Mode	Frequency (MHz)	Measured Power Density (dBm)	Duty cycle Factor (dB)	Result Output Power (dBm)	Limit (dBm)	Margin (dB)
802.11a	5 180	10.11	0.19	10.30	16.23	5.93
	5 200	10.49	0.19	10.68	16.23	5.55
	5 240	10.31	0.19	10.50	16.23	5.73
	5 745	4.55	0.19	4.74	29.23	24.49
	5 785	4.45	0.19	4.64	29.23	24.59
	5 825	4.15	0.19	4.34	29.23	24.89
802.11n _HT20	5 180	9.30	0.21	9.51	16.23	6.72
	5 200	9.31	0.21	9.52	16.23	6.71
	5 240	9.40	0.21	9.61	16.23	6.62
	5 745	5.37	0.21	5.58	29.23	23.65
	5 785	5.32	0.21	5.53	29.23	23.70
	5 825	5.09	0.21	5.30	29.23	23.93
802.11ac _VHT20	5 180	10.14	0.21	10.35	16.23	5.88
	5 200	10.18	0.21	10.39	16.23	5.84
	5 240	10.25	0.21	10.46	16.23	5.77
	5 745	5.49	0.21	5.70	29.23	23.53
	5 785	5.67	0.21	5.88	29.23	23.35
	5 825	5.05	0.21	5.26	29.23	23.97
802.11n _HT40	5 190	2.59	0.41	3.00	16.23	13.23
	5 230	2.71	0.41	3.12	16.23	13.11
	5 755	2.60	0.41	3.01	29.23	26.22
	5 795	2.48	0.41	2.89	29.23	26.34
802.11ac _VHT40	5 190	2.77	0.41	3.18	16.23	13.05
	5 230	2.71	0.41	3.12	16.23	13.11
	5 755	2.63	0.41	3.04	29.23	26.19
	5 795	2.60	0.41	3.01	29.23	26.22
802.11ac _VHT80	5 210	-2.49	0.86	-1.63	16.23	17.86
	5 775	-0.93	0.86	-0.07	29.23	29.30
Measurement uncertainty		± 1.5 dB				



CDD Mode_ANT0 + ANT1 + ANT2 + ANT3


Test Mode	Frequency (MHz)	Measured Power Density (dBm)	Duty cycle Factor (dB)	Result Output Power (dBm)	Limit (dBm)	Margin (dB)
802.11a	5 180	11.27	0.19	11.46	14.98	3.52
	5 200	11.50	0.19	11.69	14.98	3.29
	5 240	11.40	0.19	11.59	14.98	3.39
	5 745	5.75	0.19	5.94	27.98	22.04
	5 785	5.59	0.19	5.78	27.98	22.20
	5 825	5.23	0.19	5.42	27.98	22.56
802.11n _HT20	5 180	10.37	0.21	10.58	14.98	4.40
	5 200	10.40	0.21	10.61	14.98	4.37
	5 240	10.48	0.21	10.69	14.98	4.29
	5 745	6.55	0.21	6.76	27.98	21.22
	5 785	6.41	0.21	6.62	27.98	21.36
	5 825	6.13	0.21	6.34	27.98	21.64
802.11ac _VHT20	5 180	11.13	0.21	11.34	14.98	3.64
	5 200	11.28	0.21	11.49	14.98	3.49
	5 240	11.31	0.21	11.52	14.98	3.46
	5 745	6.64	0.21	6.85	27.98	21.13
	5 785	6.73	0.21	6.94	27.98	21.04
	5 825	6.23	0.21	6.44	27.98	21.54
802.11n _HT40	5 190	3.66	0.41	4.07	14.98	10.91
	5 230	3.91	0.41	4.32	14.98	10.66
	5 755	3.77	0.41	4.18	27.98	23.80
	5 795	3.60	0.41	4.01	27.98	23.97
802.11ac _VHT40	5 190	3.86	0.41	4.27	14.98	10.71
	5 230	3.84	0.41	4.25	14.98	10.73
	5 755	3.74	0.41	4.15	27.98	23.83
	5 795	3.74	0.41	4.15	27.98	23.83
802.11ac _VHT80	5 210	-1.46	0.86	-0.60	14.98	15.58
	5 775	0.27	0.86	1.13	27.98	26.85
Measurement uncertainty		± 1.5 dB				

See next pages for actual measured spectrum plots.





CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2018-01335
 Page (103) / (160)
 Pages

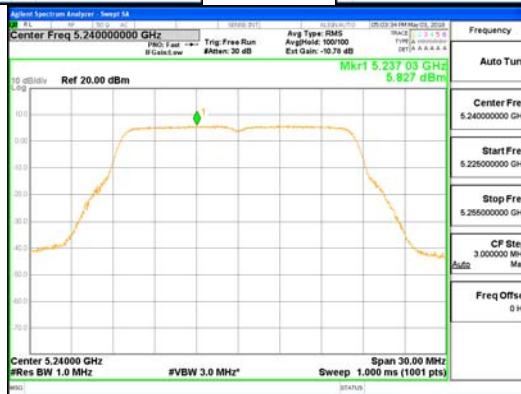

CDD Mode_ANTO_802.11a_UNII-1

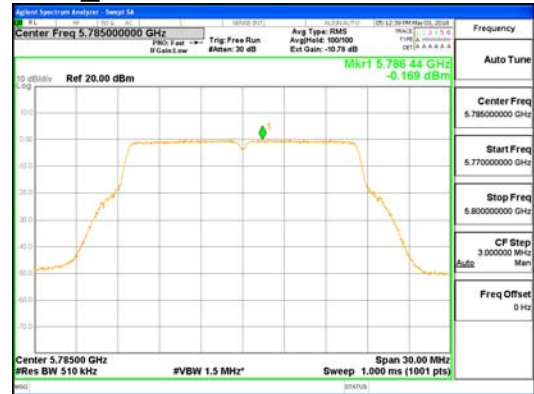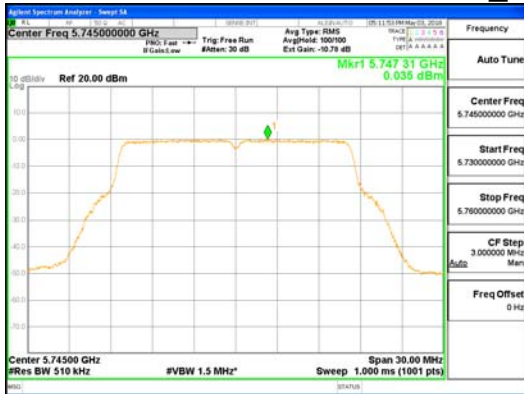


CDD Mode_ANTO_802.11a_UNII-3





CTK Co., Ltd.
(Ho-dong), 113, Yejik-ro, Cheoin-gu,
Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No.:
CTK-2018-01335
Page (104) / (160)
Pages

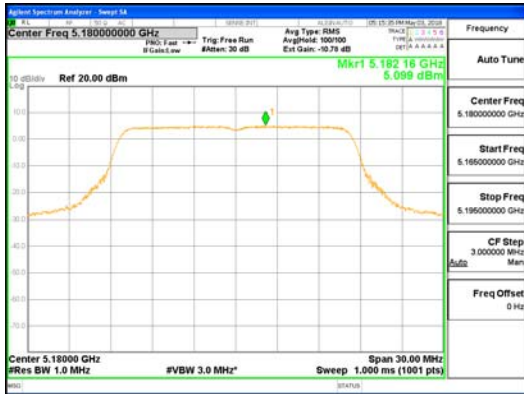

CDD Mode_ANT1_802.11a_UNII-1

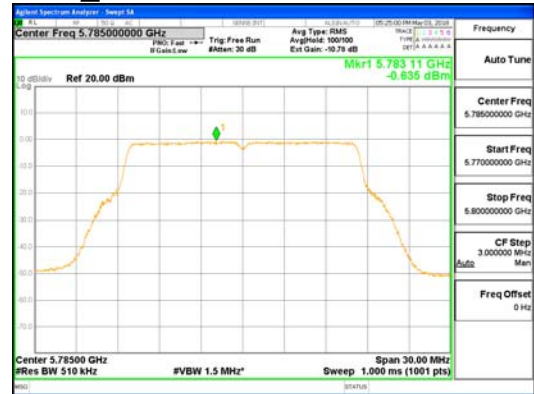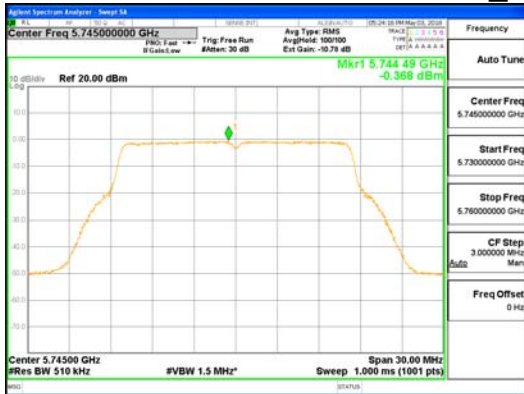

CDD Mode_ANT1_802.11a_UNII-3





CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2018-01335
 Page (105) / (160)
 Pages



CDD Mode_ANT2_802.11a_UNII-1

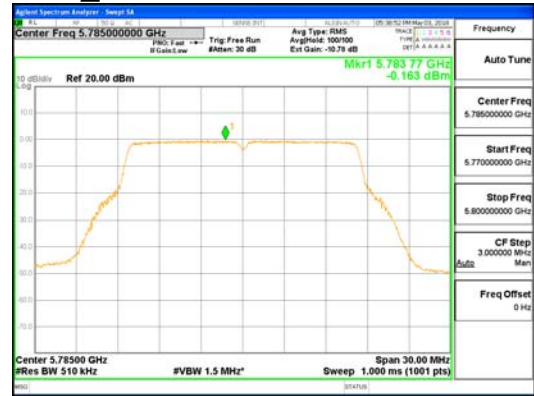
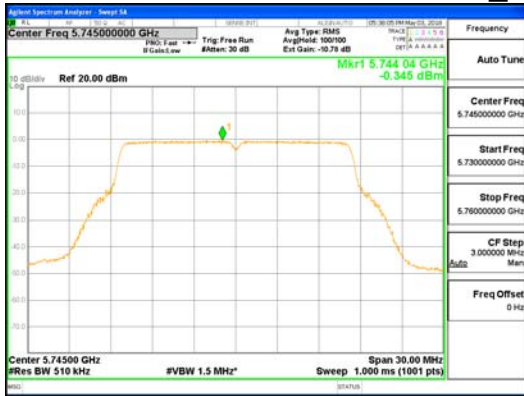


CDD Mode_ANT2_802.11a_UNII-3





CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2018-01335
 Page (106) / (160)
 Pages

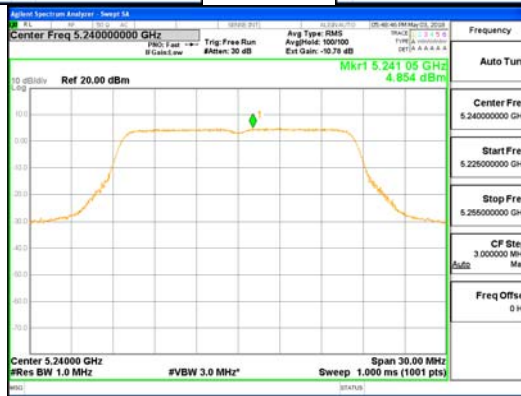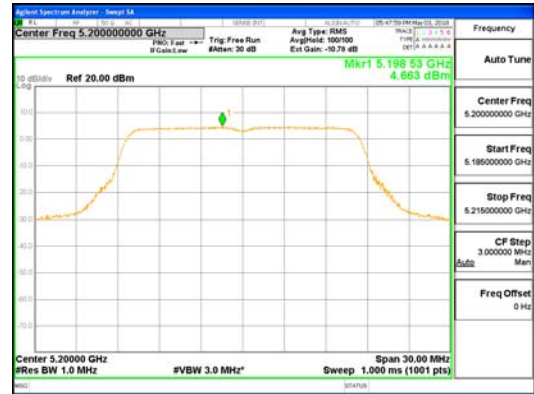

CDD Mode_ANT3_802.11a_UNII-1


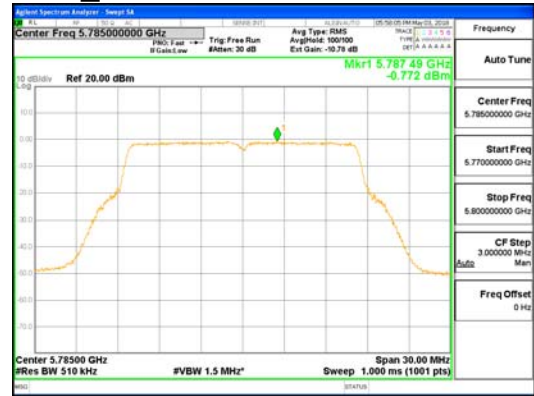
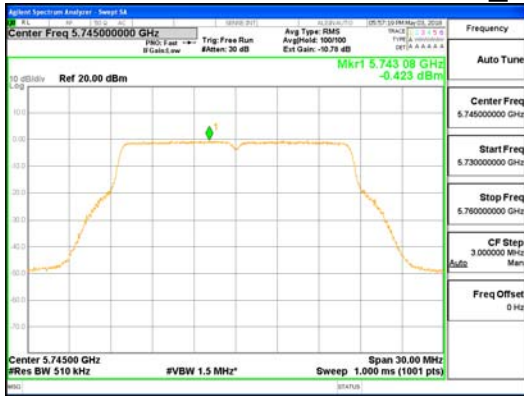


CDD Mode_ANT3_802.11a_UNII-3






CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2018-01335
 Page (107) / (160)
 Pages

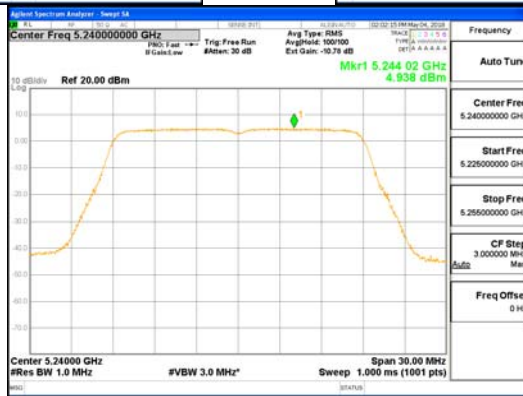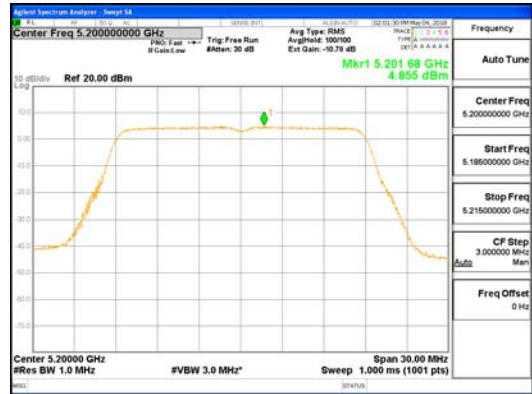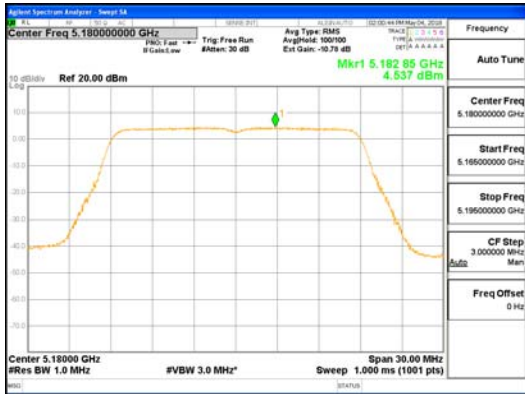

CDD Mode_ANTO_802.11n_HT20_UNII-1

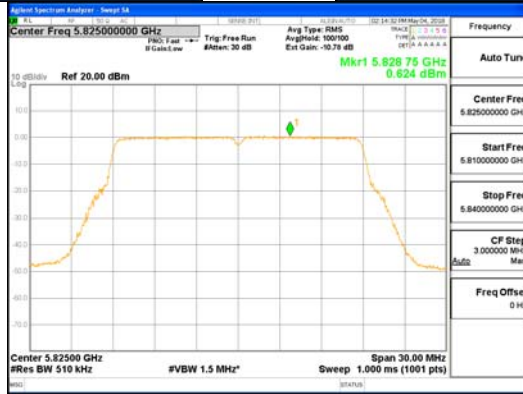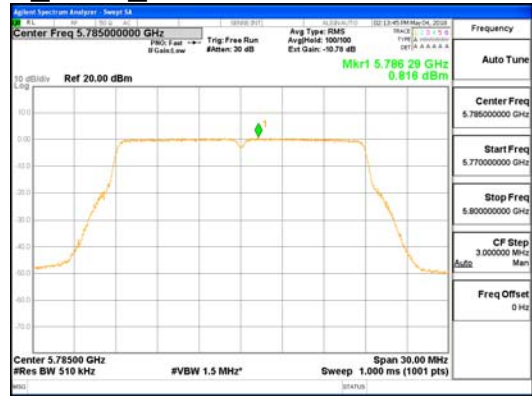
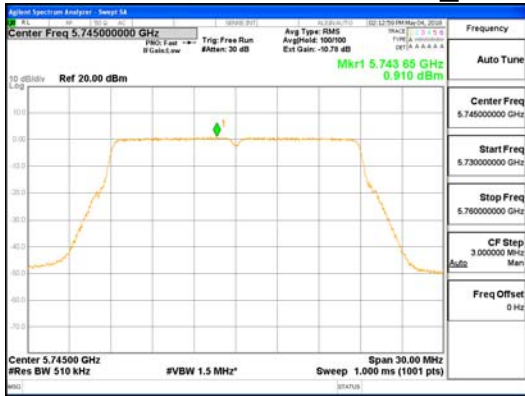


CDD Mode_ANTO_802.11n_HT20_UNII-3






CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2018-01335
 Page (108) / (160)
 Pages

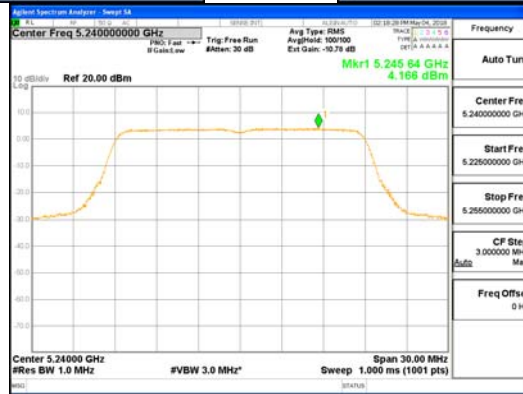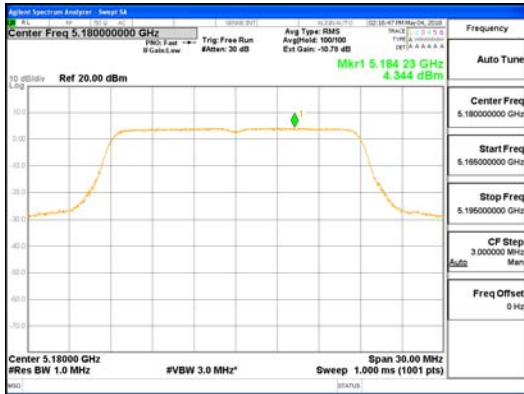

CDD Mode_ANT1_802.11n_HT20_UNII-1

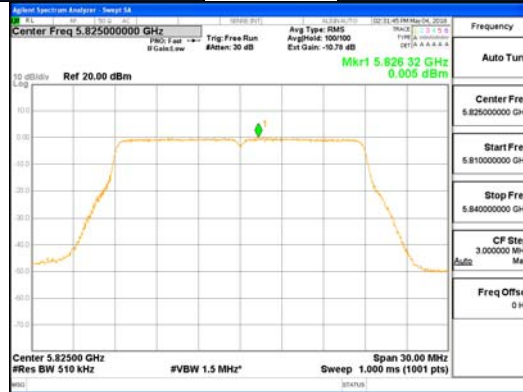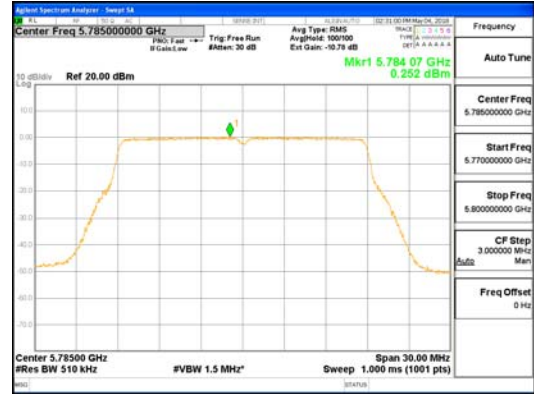
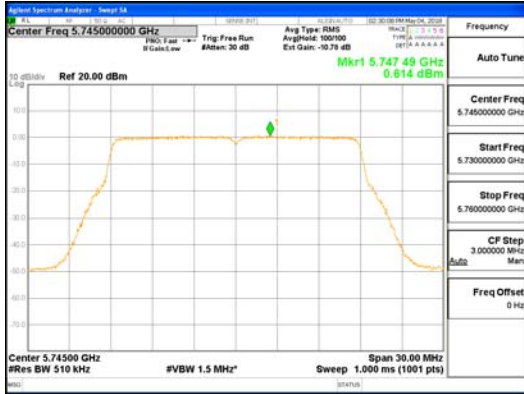


CDD Mode_ANT1_802.11n_HT20_UNII-3






CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2018-01335
 Page (109) / (160)
 Pages

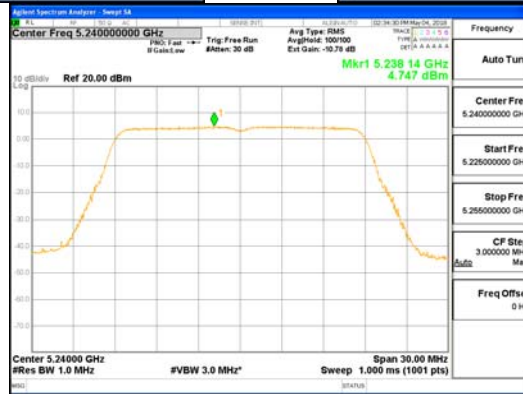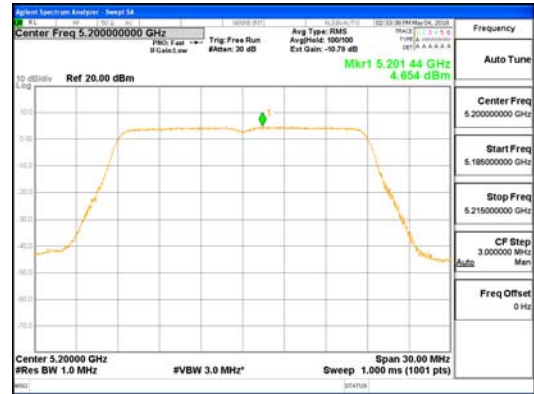

CDD Mode_ANT2_802.11n_HT20_UNII-1

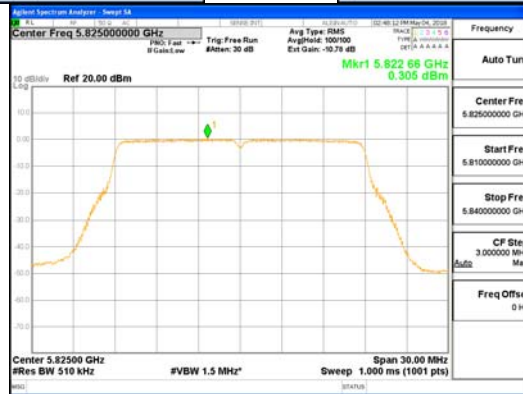
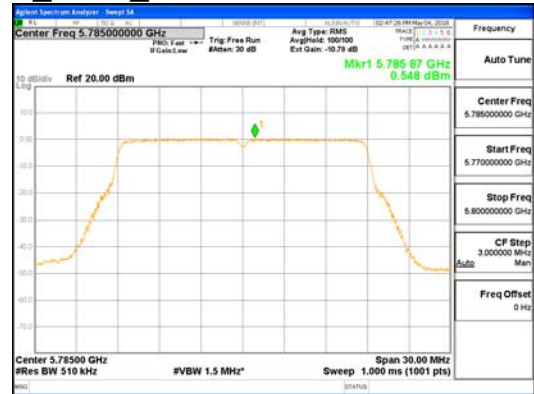
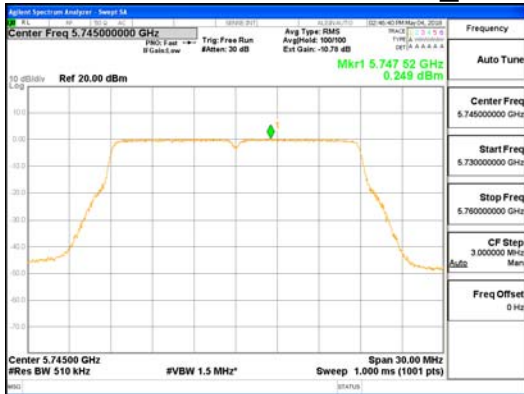


CDD Mode_ANT2_802.11n_HT20_UNII-3





CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2018-01335
 Page (110) / (160)
 Pages

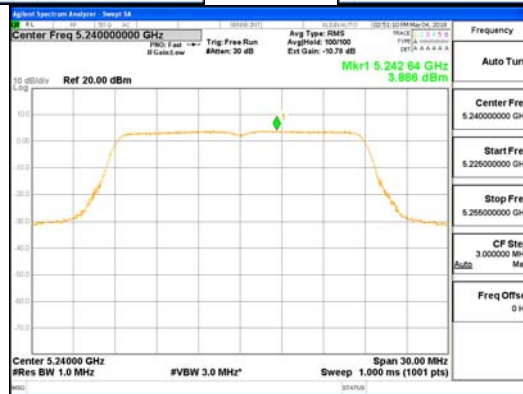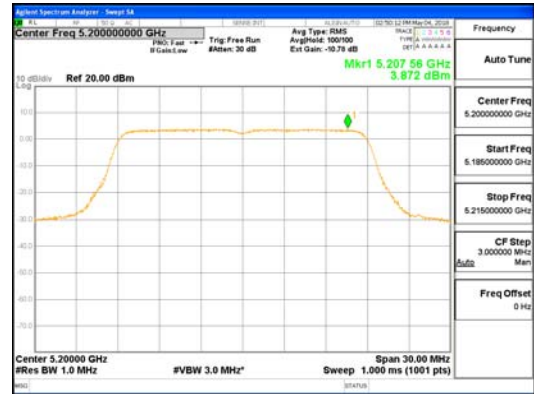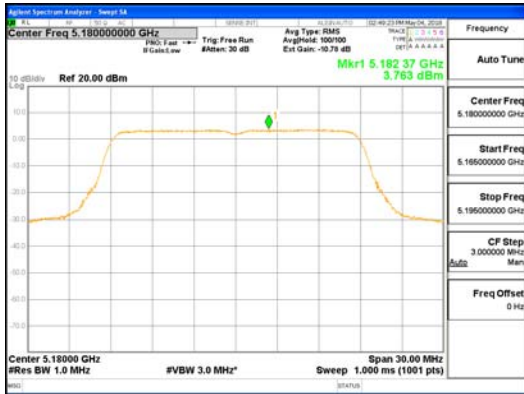

CDD Mode_ANT3_802.11n_HT20_UNII-1


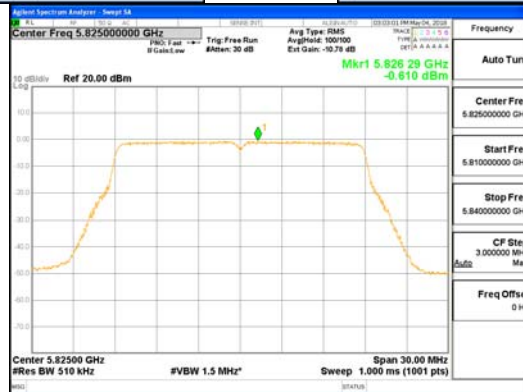
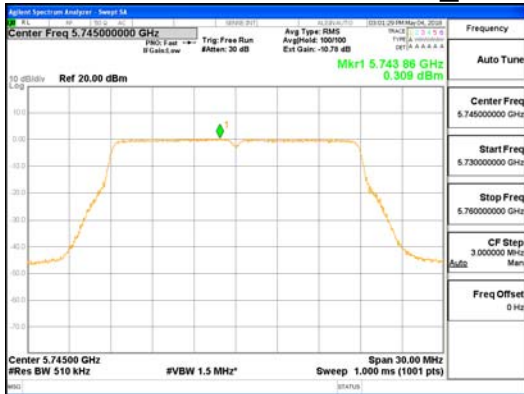


CDD Mode_ANT3_802.11n_HT20_UNII-3






CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2018-01335
 Page (111) / (160)
 Pages

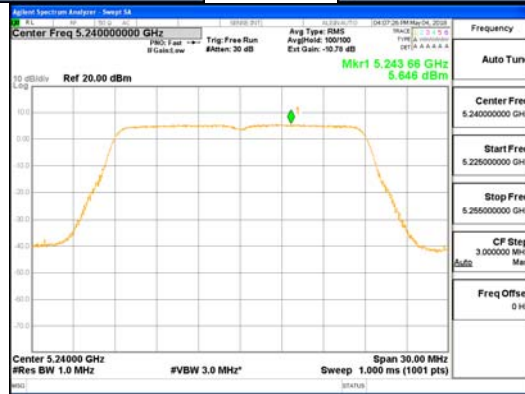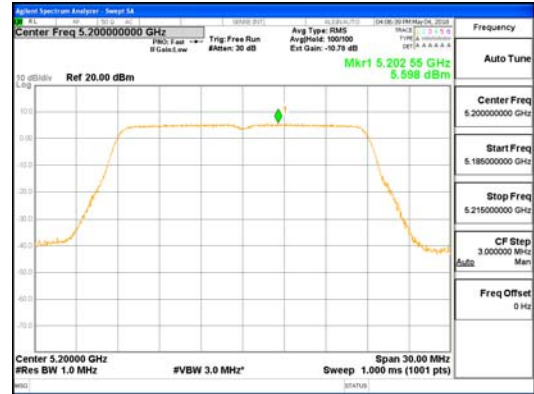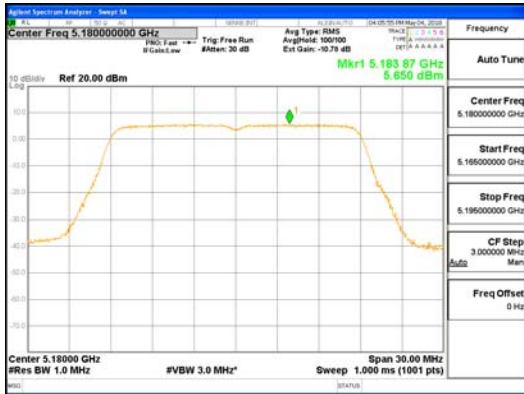

CDD Mode_ANTO_802.11ac_VHT20_UNII-1

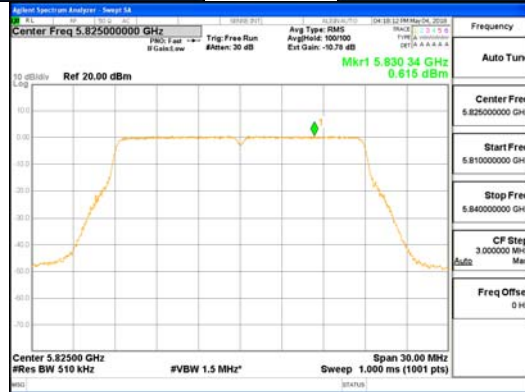
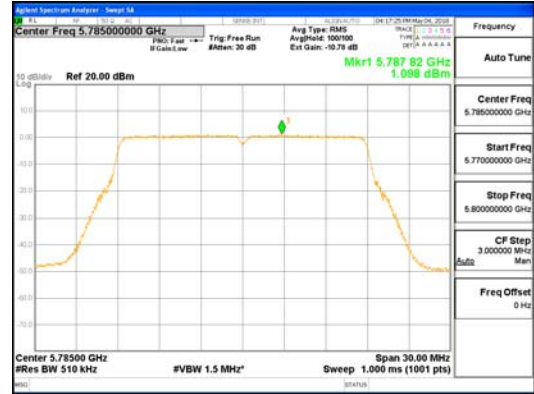
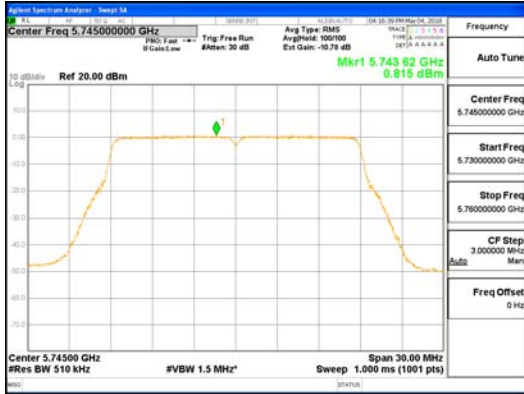


CDD Mode_ANTO_802.11ac_VHT20_UNII-3






CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2018-01335
 Page (112) / (160)
 Pages

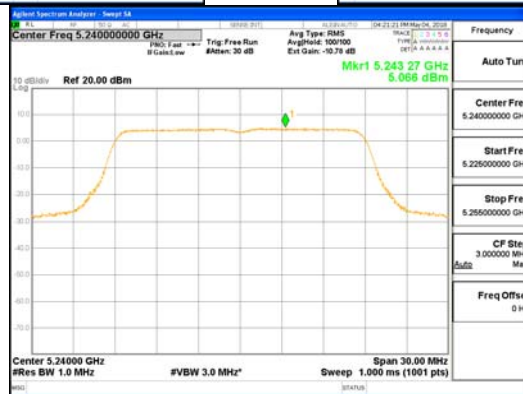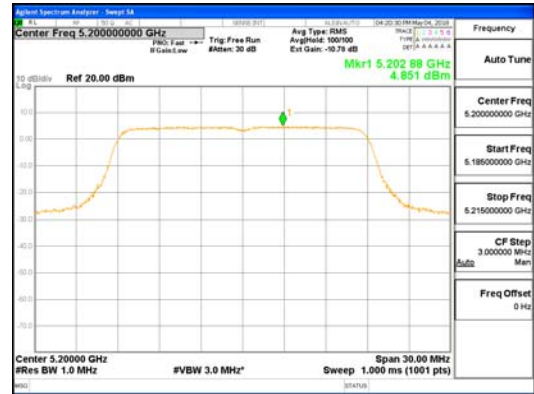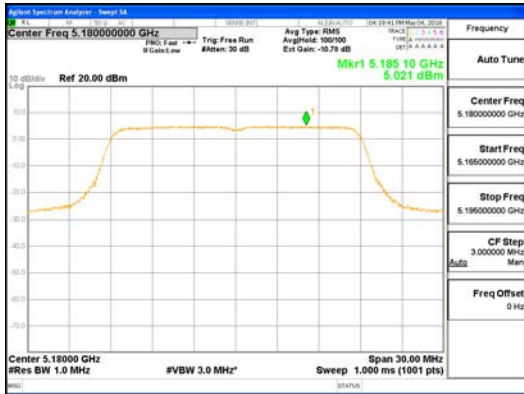

CDD Mode_ANT1_802.11ac_VHT20_UNII-1

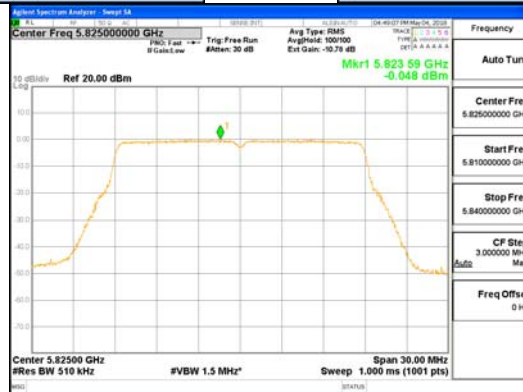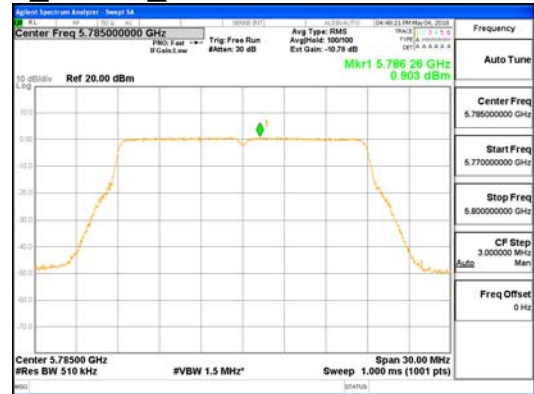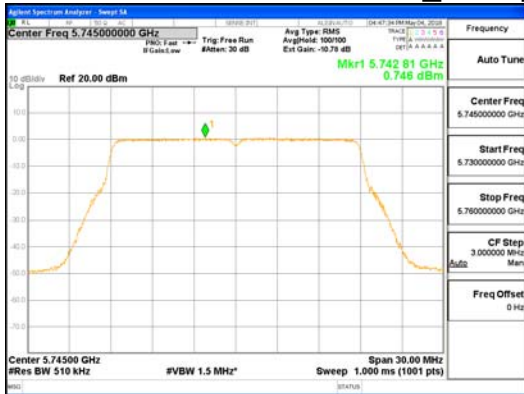


CDD Mode_ANT1_802.11ac_VHT20_UNII-3





CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2018-01335
 Page (113) / (160)
 Pages

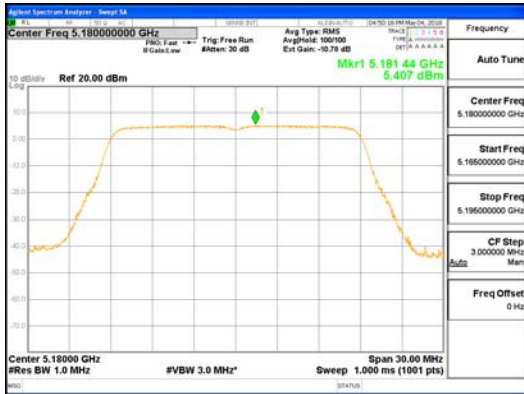

CDD Mode_ANT2_802.11ac_VHT20_UNII-1


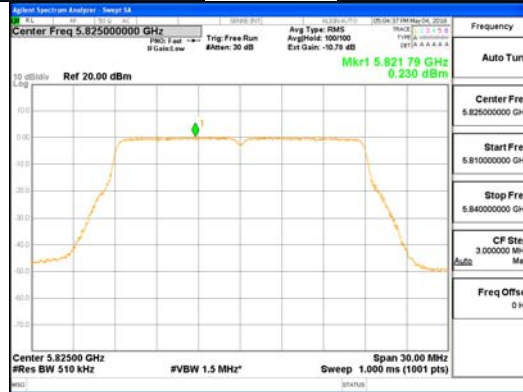
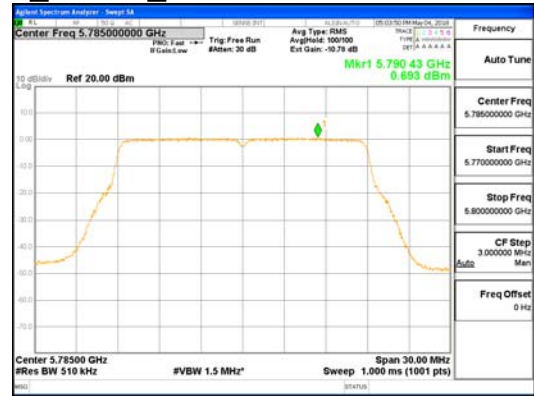


CDD Mode_ANT2_802.11ac_VHT20_UNII-3





CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2018-01335
 Page (114) / (160)
 Pages

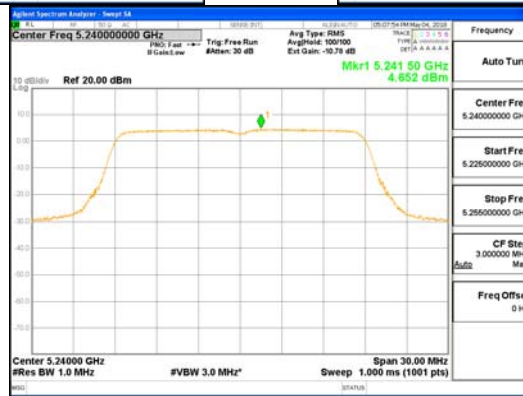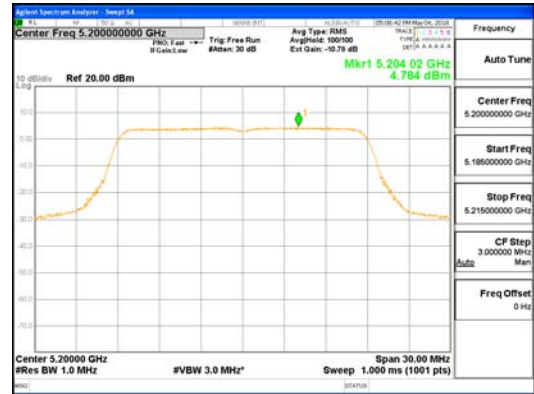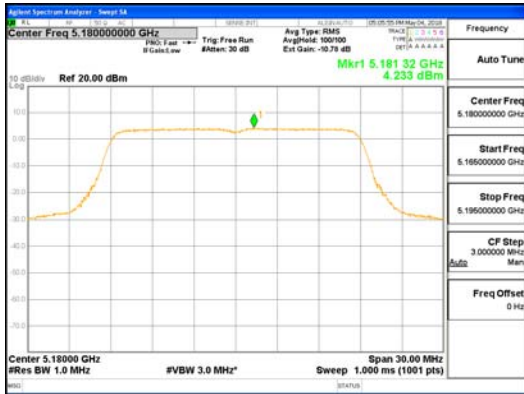

CDD Mode_ANT3_802.11ac_VHT20_UNII-1

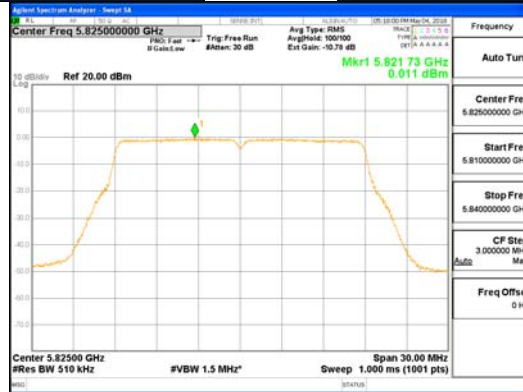
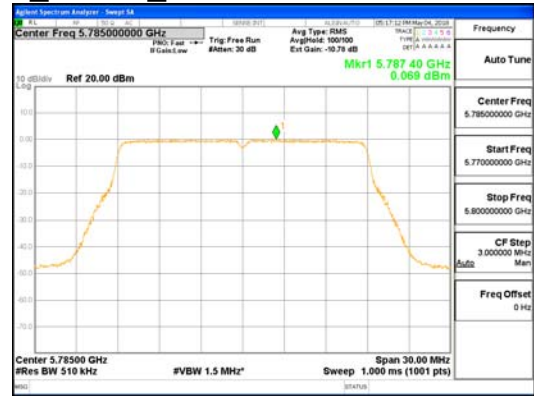


CDD Mode_ANT3_802.11ac_VHT20_UNII-3





CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501


Report No.:
 CTK-2018-01335
 Page (115) / (160)
 Pages

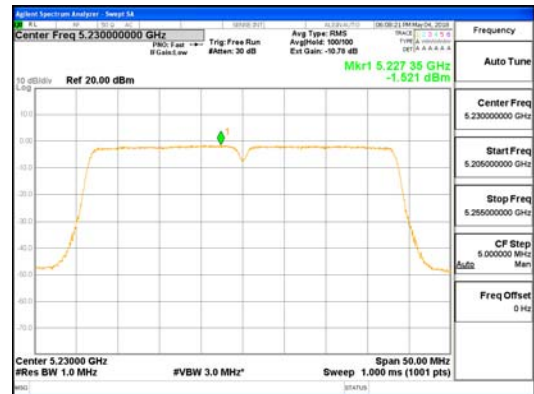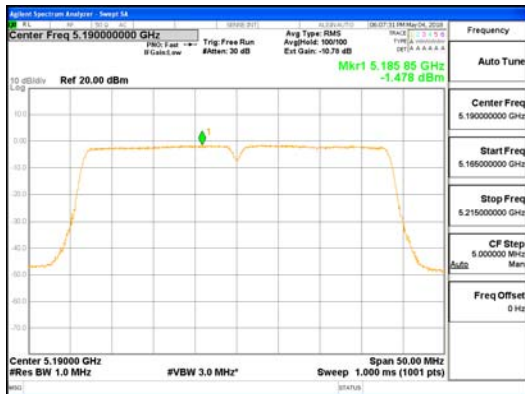



CDD Mode_ANT0_802.11n_HT40_UNII-1

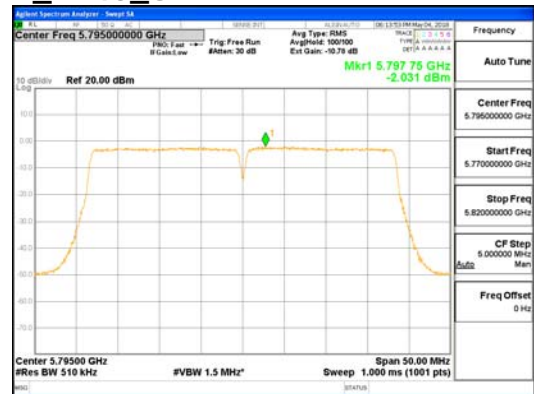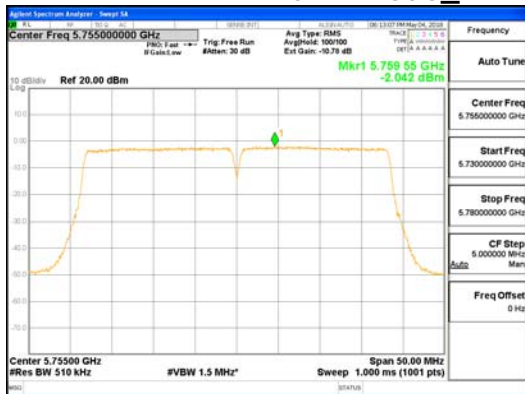

CDD Mode_ANT0_802.11n_HT40_UNII-3

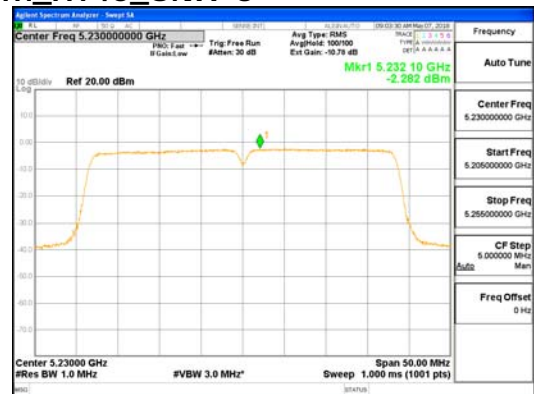

CDD Mode_ANT1_802.11n_HT40_UNII-1

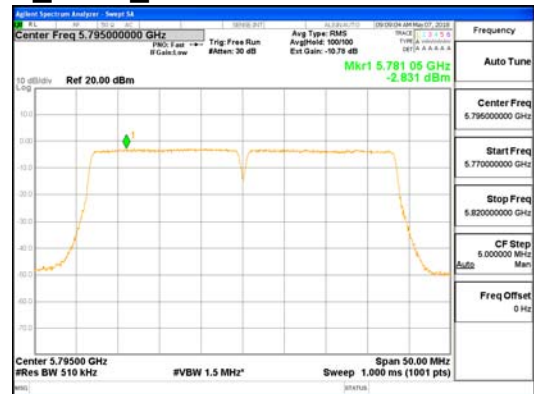
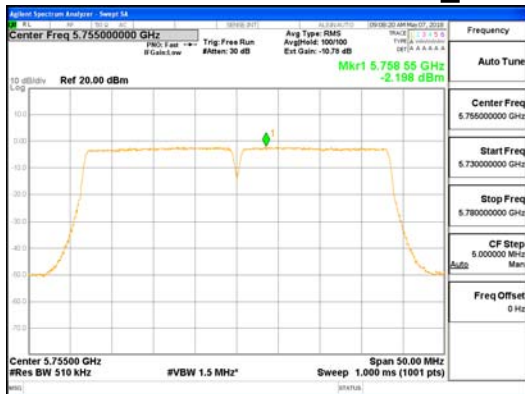


CDD Mode_ANT1_802.11n_HT40_UNII-3





CTK Co., Ltd.
(Ho-dong), 113, Yejik-ro, Cheoin-gu,
Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501



Report No.:
CTK-2018-01335
Page (116) / (160)
Pages

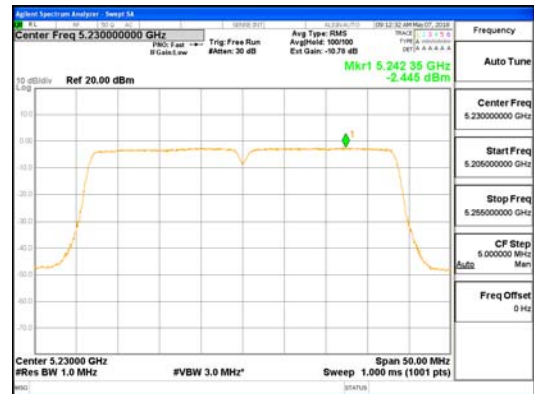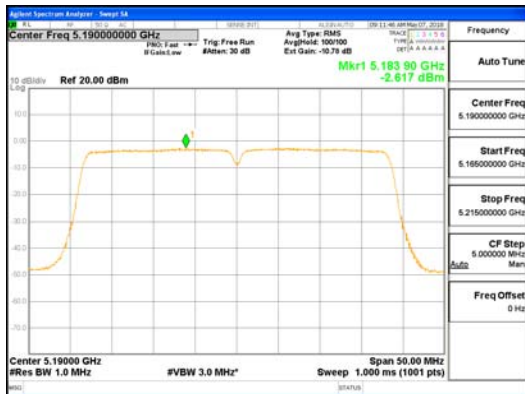



CDD Mode_ANT2_802.11n_HT40_UNII-1

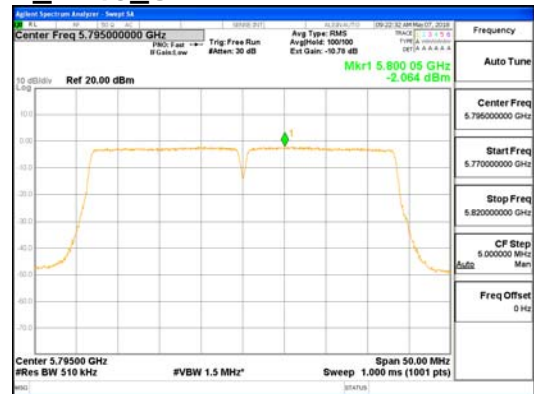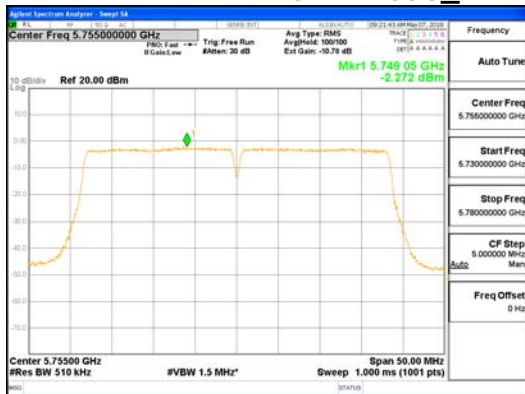

CDD Mode_ANT2_802.11n_HT40_UNII-3

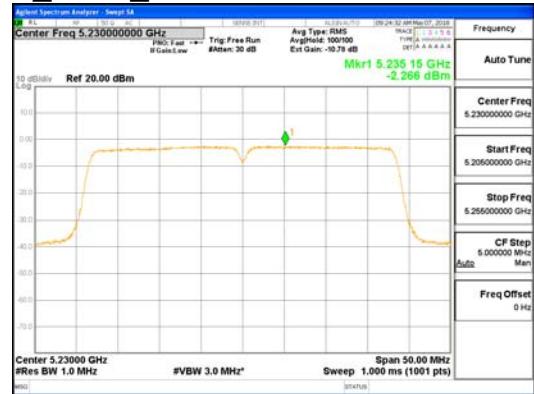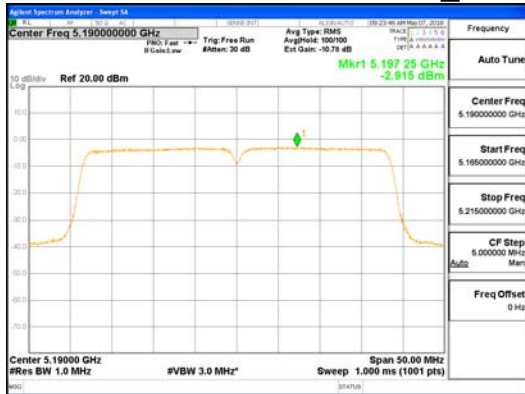

CDD Mode_ANT3_802.11n_HT40_UNII-1

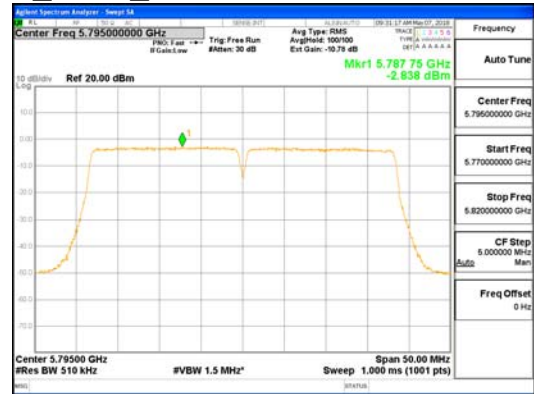
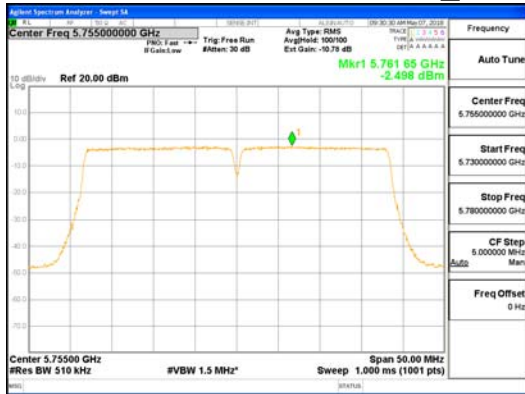


CDD Mode_ANT3_802.11n_HT40_UNII-3





CTK Co., Ltd.
(Ho-dong), 113, Yejik-ro, Cheoin-gu,
Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501



Report No.:
CTK-2018-01335
Page (117) / (160)
Pages

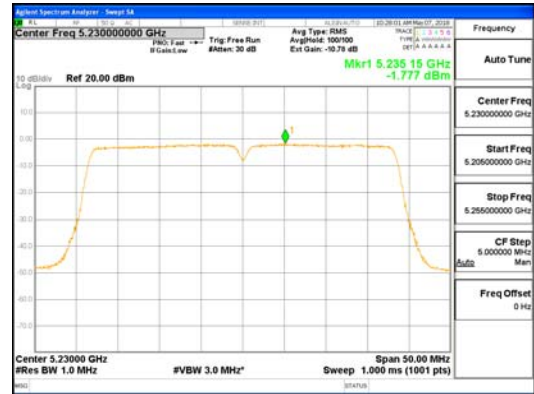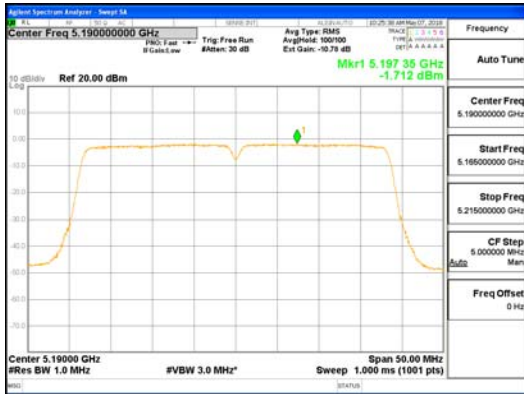



CDD Mode_ANT0_802.11ac_VHT40_UNII-1

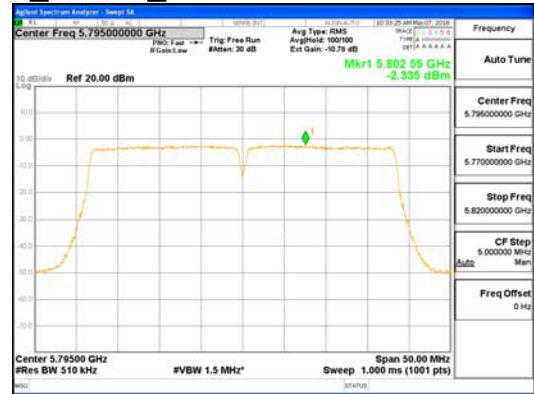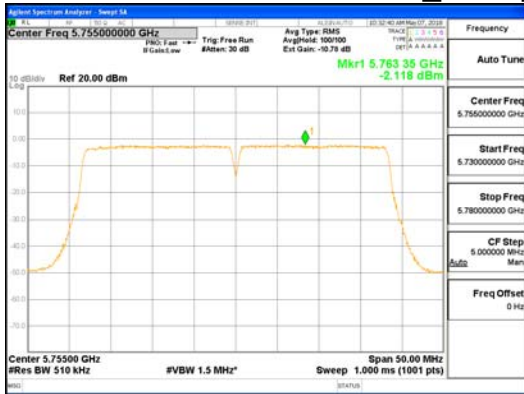

CDD Mode_ANT0_802.11ac_VHT40_UNII-3

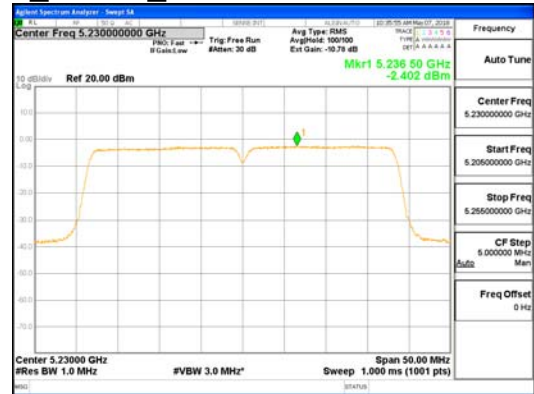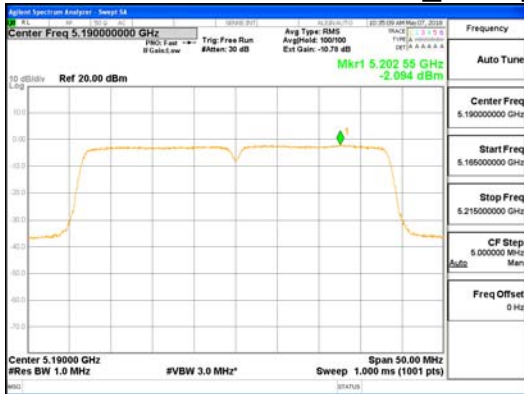

CDD Mode_ANT1_802.11ac_VHT40_UNII-1

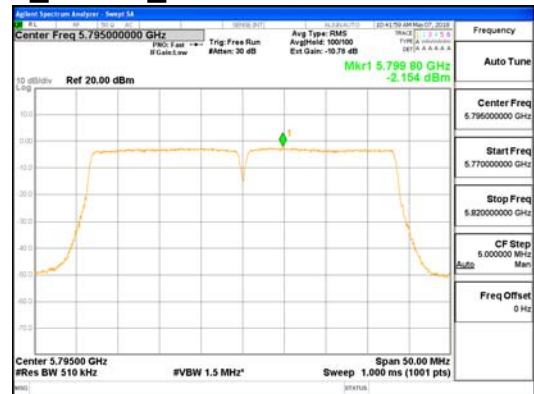
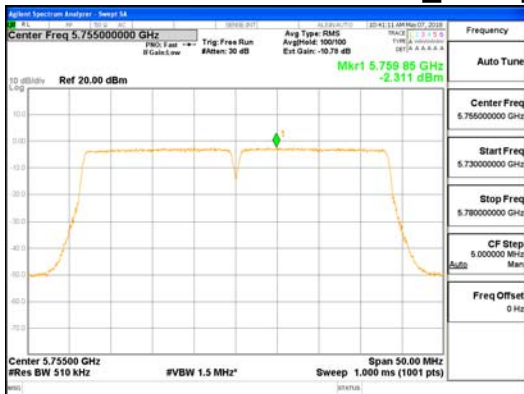


CDD Mode_ANT1_802.11ac_VHT40_UNII-3





CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501


Report No.:
 CTK-2018-01335
 Page (118) / (160)
 Pages

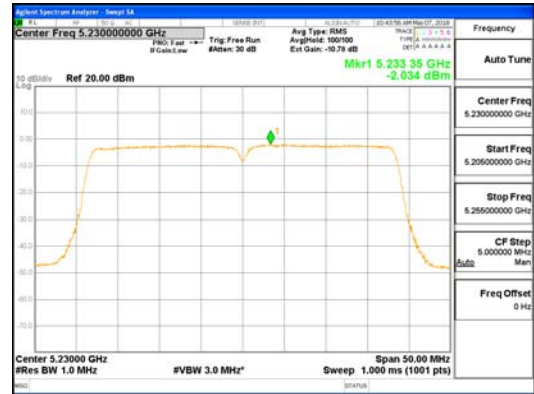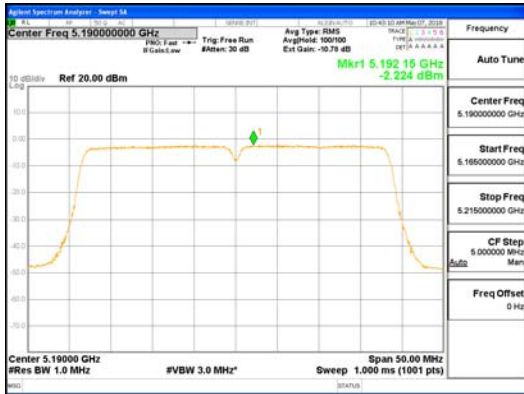



CDD Mode_ANT2_802.11ac_VHT40_UNII-1

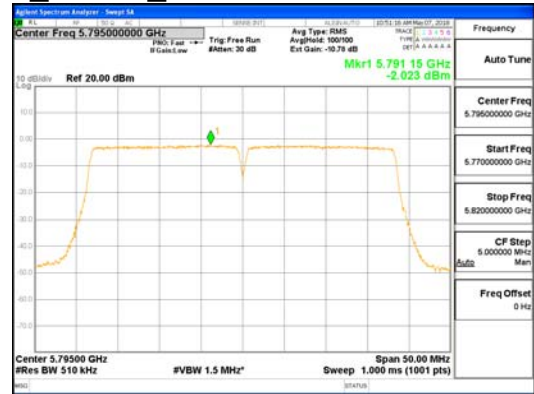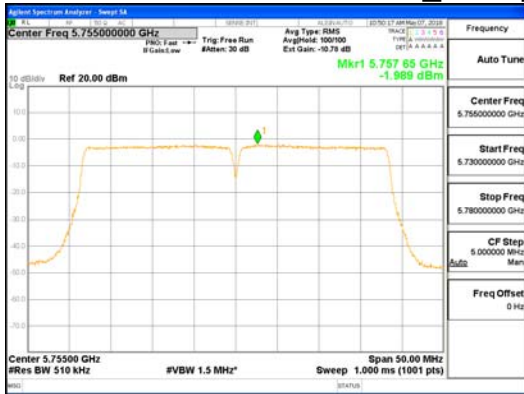


CDD Mode_ANT2_802.11ac_VHT40_UNII-3

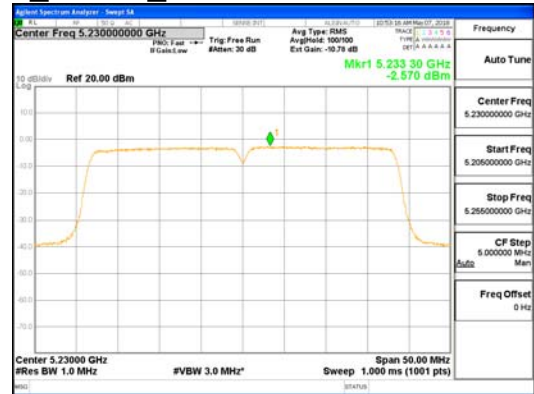

CDD Mode_ANT3_802.11ac_VHT40_UNII-1

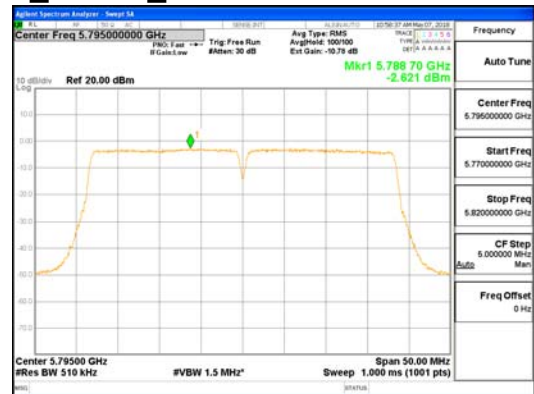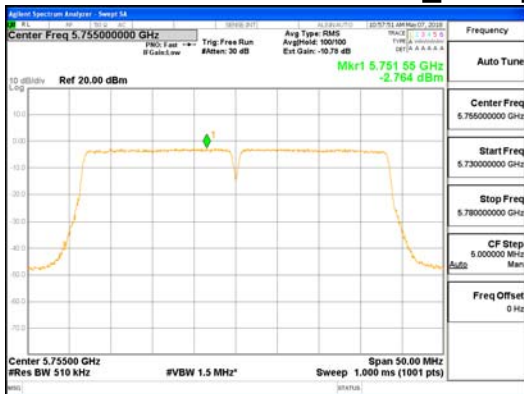


CDD Mode_ANT3_802.11ac_VHT40_UNII-3

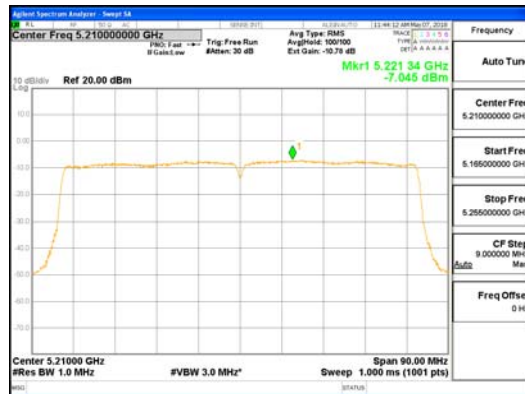


CDD Mode_ANTO_802.11ac_VHT80_UNII-1




CDD Mode_ANTO_802.11ac_VHT80_UNII-3

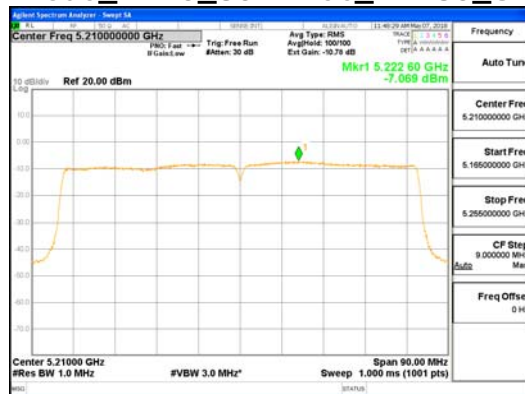

CDD Mode_ANT1_802.11ac_VHT80_UNII-1

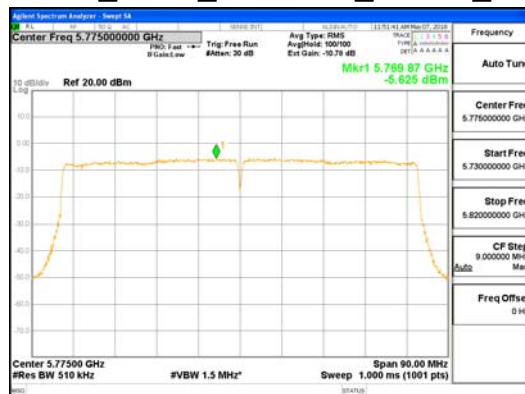

CDD Mode_ANT1_802.11ac_VHT80_UNII-3

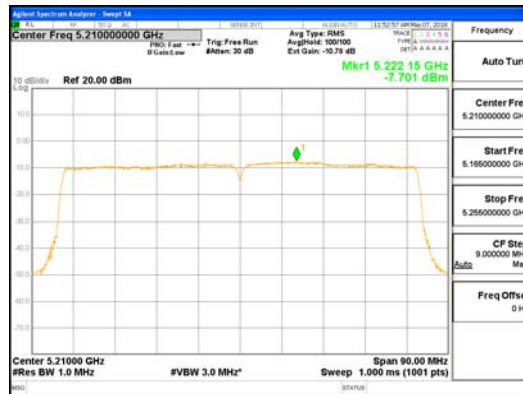


CDD Mode_ANT2_802.11ac_VHT80_UNII-1



CDD Mode_ANT2_802.11ac_VHT80_UNII-3



CDD Mode_ANT3_802.11ac_VHT80_UNII-1

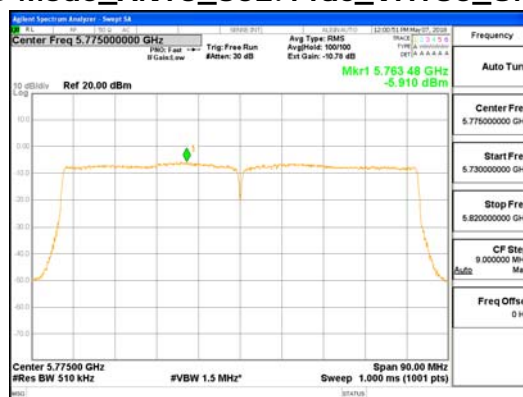

CDD Mode_ANT3_802.11ac_VHT80_UNII-3

4.5 Frequency Stability

Test Procedures

The EUT was placed inside of an environmental chamber as the temperature in the chamber was varied between 0 °C and +45 °C (Declaration by the Manufacturer). The temperature was incremented by 10 °C (5 °C) intervals and the unit was allowed to stabilize at each temperature before each measurement. The center frequency of the transmitting channel was evaluated at each temperature and the frequency deviation from the channel's center frequency was recorded.

Data for the worst case channel is shown below.

Temperature (°C)	0	10	20	30	40	45
Frequency	Measured Frequency Error (kHz)					
5 180 MHz	88.31	76.12	61.87	40.64	21.42	24.95
5 200 MHz	90.96	86.66	65.09	45.50	26.54	29.83
5 240 MHz	95.28	81.11	56.33	46.86	29.37	23.99
5 745 MHz	86.18	77.21	48.16	34.14	15.13	12.57
5 785 MHz	85.71	74.09	51.10	27.44	13.65	8.81
5 825 MHz	97.63	80.41	55.47	35.68	20.99	17.80

Note :

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature range as tested.

4.6 Unwanted Emissions

Test Location

- 10 m SAC (test distance : 10 m, 3 m)
 3 m SAC (test distance : 3 m)

Test Procedures

- 1) In the frequency range of 9 kHz to 30 MHz, magnetic field is measured with Loop Antenna. The Test Antenna is positioned with its plane vertical at 1m distance from the EUT. The center of the Loop Test Antenna is 1m above the ground. During the measurement the Loop Test Antenna rotates about its vertical axis for maximum response at each azimuth about the EUT.
- 2) In the frequency range above 30 MHz, Bi-Log Test Antenna(30 MHz to 1 GHz) and Horn Test Antenna(above 1 GHz) are used. Test Antenna is 3m away from the EUT. Test Antenna height is carried from 1m to 4m above the ground to determine the maximum value of the field strength. The emissions levels at both horizontal and vertical polarizations should be tested.

Test Settings:

Frequency Range = 9 kHz ~ 1 GHz

- a) RBW = 100 kHz for $f < 1$ GHz, 9 kHz for $f < 30$ MHz
b) VBW \geq RBW
c) Detector = CISPR Quasi-peak
d) Sweep time = auto couple

- Peak

Frequency Range = 1 GHz ~ 40 GHz

- a) RBW = 1 MHz
b) VBW $\geq 3 \times$ RBW
c) Detector = Peak
d) Sweep time = auto
e) Trace mode = max hold

- Average (duty cycle $\geq 98\%$)

Frequency Range = 1 GHz ~ 40 GHz

- a) RBW = 1 MHz
b) VBW $\geq 3 \times$ RBW
c) Detector = RMS
d) Sweep time = auto
e) Averaging type = power (i.e., RMS)
f) Trace mode = average (at least 100 traces)



- Average (duty cycle < 98%)

Frequency Range = 1 GHz ~ 40 GHz

a) RBW = 1 MHz

b) VBW ≥ 3 × RBW

c) Detector = RMS

d) Sweep time = auto

e) Averaging type = power (i.e., RMS)

f) Trace mode = average (at least 100 traces)

If power averaging (RMS) mode, then the applicable correction factor is $10 \log(1/x)$, where x is the duty cycle.

CDD Mode	802.11a	0.19 dB
	802.11n_HT20	0.21 dB
	802.11n_HT40	0.41 dB
	802.11ac_VHT20	0.21 dB
	802.11ac_VHT40	0.41 dB
	802.11ac_VHT80	0.86 dB
SDM Mode	802.11n_HT20	0.74 dB
	802.11n_HT40	1.30 dB
	802.11ac_VHT20	0.73 dB
	802.11ac_VHT40	1.29 dB
	802.11ac_VHT80	2.06 dB

Limit

- 15.209(a)

Frequency(MHz)	Field Strength uV/m@3m	Field Strength dBuV/m@3m	Deasurement Distance (meters)
0.009-0.490	2400/F(kHz)	-	300
0.490-1.705	24000/F(kHz)	-	30
1.705-30	30	-	30
30-88	100**	40	3
88-216	150**	43.5	3
216-960	200**	46	3
Above 960	500	54	3

** Except as provided in 15.209(g).fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72MHz, 76-88MHz, 174-216MHz, 470-806MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g.15.231 and 15.241.


- 15.407, KDB 789033

E.I.R.P -27 dBm/MHz


$E[\text{dBuV/m}] = \text{EIRP}[\text{dBm}] + 95.2$, for $d = 3\text{m}$

Test Setup:


- 1) For field strength of emissions from 9 kHz to 30 MHz

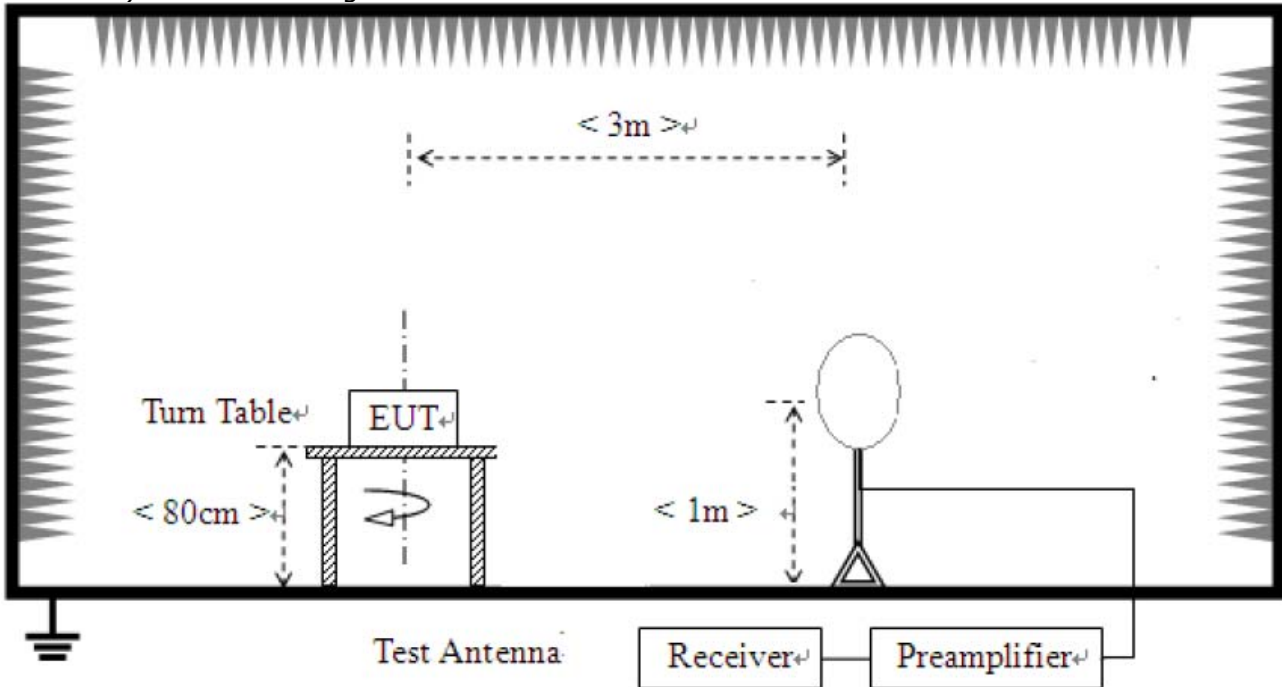

- 2) For field strength of emissions from 30 MHz to 1 GHz

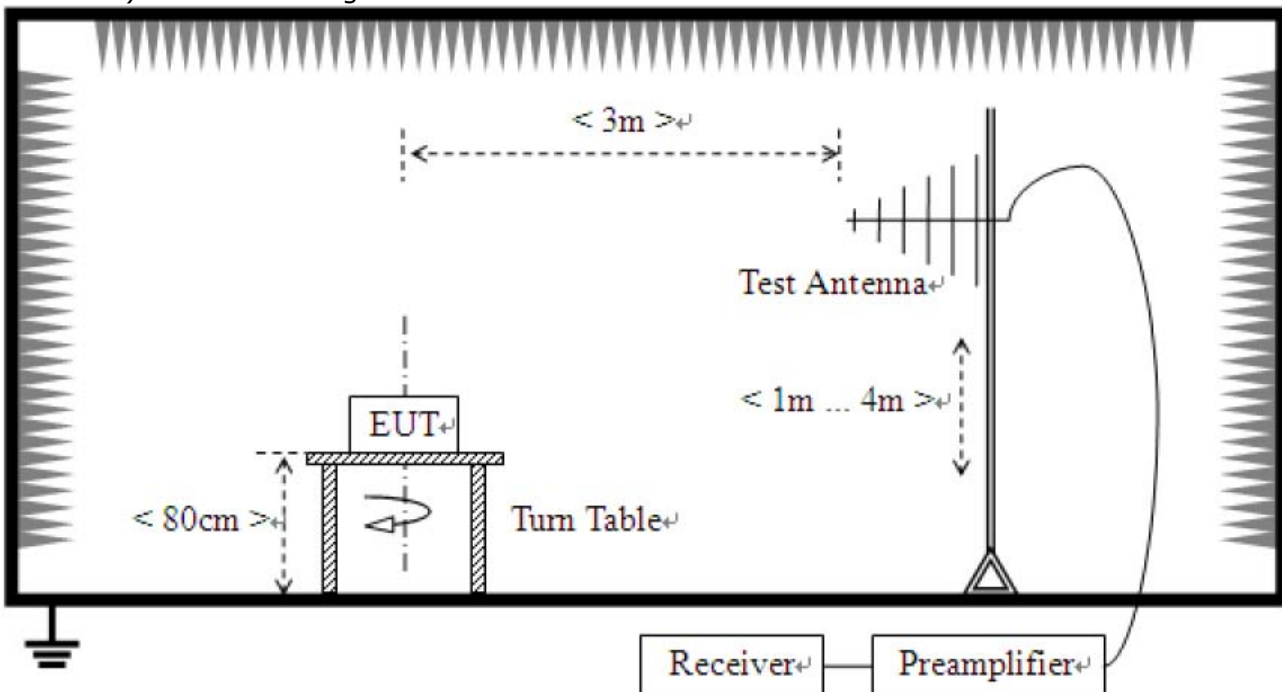

3) For field strength of emissions above 1 GHz

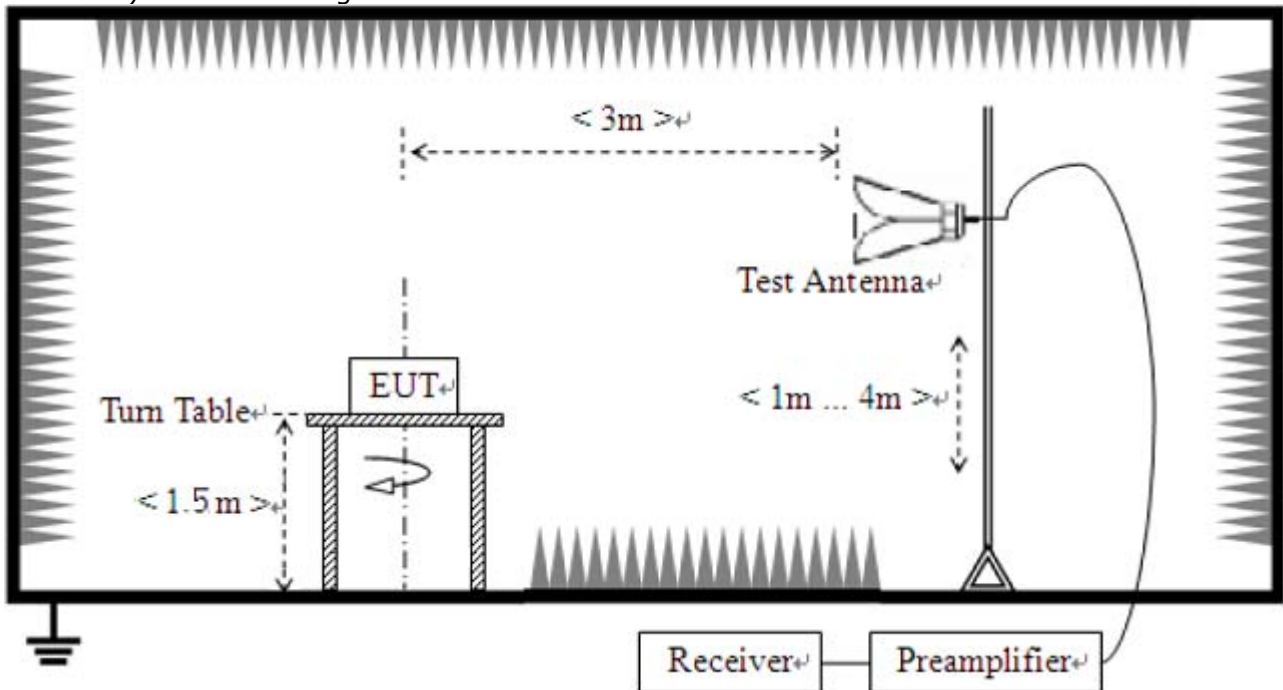

Test Mode

We have done all test mode.

The worst case antenna configuration and Test mode are determined to be as follows.

802.11a mode : ANT0 + ANT1 + ANT2 + ANT3 (MIMO)

802.11n CDD mode : ANT0 + ANT1 + ANT2 + ANT3 (MIMO)

802.11ac CDD mode : ANT0 + ANT1 + ANT2 + ANT3 (MIMO)

So the results are only attached worst cases.

 CTK Co., Ltd. <small>The Prime Leader of Global Regulatory Certification</small>	CTK Co., Ltd. (Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea Tel: +82-31-339-9970 Fax: +82-31-624-9501	Report No.: CTK-2018-01335 Page (126) / (160) Pages	
---	---	--	--

Test Results

1) 9 kHz to 30 MHz

Test mode : 802.11a, 802.11n, 802.11ac (Worst case)

The requirements are:

Complies

Frequency (MHz)	Measured Data (dBuV/m)	Margin (dB)	Remark
-	-	-	See note

Note :

The amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB)


2) 30 MHz to 1 GHz

Test mode : 802.11a(Worst Case)

The requirements are:

Complies

Test Data

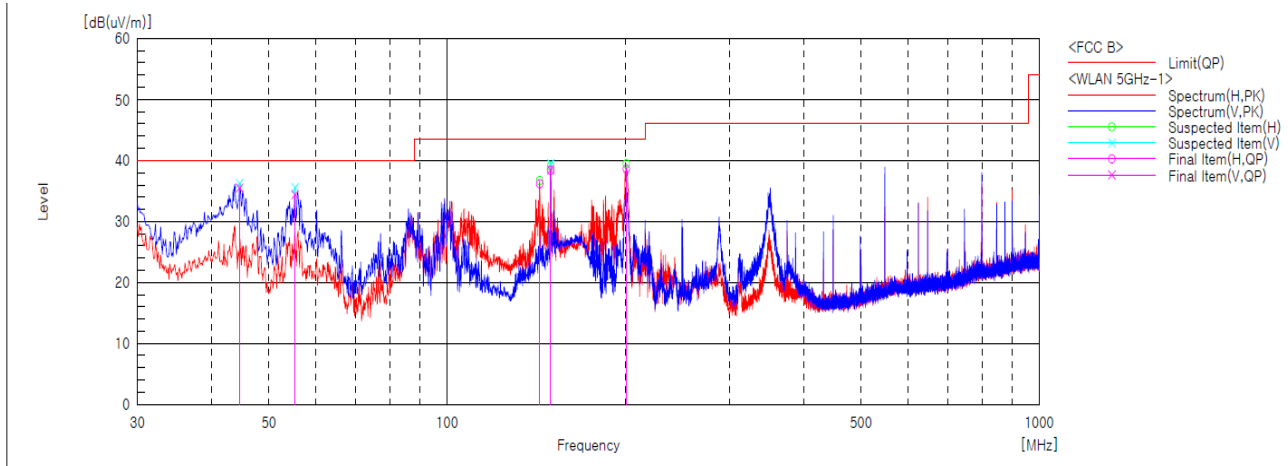

Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]	Remark
1	44.588	V	47.9	-12.4	35.5	40.0	4.5	99.8	221.7	
2	55.366	V	47.3	-12.9	34.4	40.0	5.6	99.8	204.7	
3	143.331	H	53.8	-17.6	36.2	43.5	7.3	99.8	105.5	
4	149.537	V	55.9	-17.4	38.5	43.5	5.0	99.8	100.6	
5	149.537	H	55.8	-17.4	38.4	43.5	5.1	99.8	122.6	
6	200.813	H	52.7	-14.1	38.6	43.5	4.9	99.8	210.4	

Remark :

1. The EUT was tested in three orientations in order to determine that "Z axis" was the worst case.
2. Result = Reading + c.f(Correction factor)
3. Correction factor = Antenna factor + Cable loss + 6 dB attenuator - Amp Gain



3) above 1 GHz

Test mode : 802.11a

The requirements are:

Complies

Test Data

Ch.36(5 180 MHz)

Frequency [MHz]	(P)	Limit AV [dBuV/m]	Limit PK [dBuV/m]	Result AV [dBuV/m]	Result PK [dBuV/m]	Margin AV [dB]	Margin PK [dB]
2 500.00	H	54.00	74.00	36.89	42.70	17.11	31.30
2 500.00	V	54.00	74.00	31.79	40.80	22.21	33.20
10 360.00	H	54.00	74.00	49.69	61.60	4.31	12.40
10 360.00	V	54.00	74.00	50.59	63.30	3.41	10.70
15 540.00	H	54.00	74.00	47.19	61.00	6.81	13.00
15 540.00	V	54.00	74.00	46.69	62.50	7.31	11.50
5 150.00	H	54.00	74.00	45.59	57.30	8.41	16.70
5 150.00	V	54.00	74.00	43.79	58.30	10.21	15.70

Ch.40(5 200 MHz)

Frequency [MHz]	(P)	Limit AV [dBuV/m]	Limit PK [dBuV/m]	Result AV [dBuV/m]	Result PK [dBuV/m]	Margin AV [dB]	Margin PK [dB]
2 500.00	H	54.00	74.00	37.49	42.50	16.51	31.50
2 500.00	V	54.00	74.00	31.89	40.90	22.11	33.10
10 400.00	H	54.00	74.00	48.89	61.10	5.11	12.90
10 400.00	V	54.00	74.00	49.99	64.30	4.01	9.70
15 600.00	H	54.00	74.00	45.99	61.10	8.01	12.90
15 600.00	V	54.00	74.00	46.29	60.70	7.71	13.30

Ch.48(5 240 MHz)

Frequency [MHz]	(P)	Limit AV [dBuV/m]	Limit PK [dBuV/m]	Result AV [dBuV/m]	Result PK [dBuV/m]	Margin AV [dB]	Margin PK [dB]
2 500.00	H	54.00	74.00	37.79	42.20	16.21	31.80
2 500.00	V	54.00	74.00	31.69	41.00	22.31	33.00
10 480.00	H	54.00	74.00	48.99	60.50	5.01	13.50
10 480.00	V	54.00	74.00	50.09	61.90	3.91	12.10
15 720.00	H	54.00	74.00	46.69	62.10	7.31	11.90
15 720.00	V	54.00	74.00	46.59	62.60	7.41	11.40

Ch.149(5 745 MHz)

Frequency [MHz]	(P)	Limit AV [dBuV/m]	Limit PK [dBuV/m]	Result AV [dBuV/m]	Result PK [dBuV/m]	Margin AV [dB]	Margin PK [dB]
2 500.00	H	54.00	74.00	36.09	43.50	17.91	30.50
2 500.00	V	54.00	74.00	30.79	41.90	23.21	32.10
11 490.00	H	54.00	74.00	45.59	59.10	8.41	14.90
11 490.00	V	54.00	74.00	46.69	59.00	7.31	15.00
17 235.00	H	54.00	74.00	49.19	62.00	4.81	12.00
17 235.00	V	54.00	74.00	49.79	64.10	4.21	9.90

Ch.157(5 785 MHz)

Frequency [MHz]	(P)	Limit AV [dBuV/m]	Limit PK [dBuV/m]	Result AV [dBuV/m]	Result PK [dBuV/m]	Margin AV [dB]	Margin PK [dB]
2 500.00	H	54.00	74.00	35.99	42.80	18.01	31.20
2 500.00	V	54.00	74.00	31.39	40.90	22.61	33.10
11 570.00	H	54.00	74.00	46.69	60.40	7.31	13.60
11 570.00	V	54.00	74.00	46.99	60.70	7.01	13.30
17 355.00	H	54.00	74.00	49.59	64.70	4.41	9.30
17 355.00	V	54.00	74.00	52.49	63.10	1.51	10.90

Ch.165(5 825 MHz)

Frequency [MHz]	(P)	Limit AV [dBuV/m]	Limit PK [dBuV/m]	Result AV [dBuV/m]	Result PK [dBuV/m]	Margin AV [dB]	Margin PK [dB]
2 500.00	H	54.00	74.00	35.99	42.50	18.01	31.50
2 500.00	V	54.00	74.00	32.09	40.90	21.91	33.10
11 650.00	H	54.00	74.00	48.99	63.70	5.01	10.30
11 650.00	V	54.00	74.00	47.99	61.40	6.01	12.60
17 475.00	H	54.00	74.00	50.19	63.30	3.81	10.70
17 475.00	V	54.00	74.00	52.49	63.80	1.51	10.20

Remarks


1. The EUT was tested in three orientations in order to determine that "Z axis" was the worst case.



CTK Co., Ltd.
(Ho-dong), 113, Yejik-ro, Cheoin-gu,
Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No.:
CTK-2018-01335
Page (130) / (160)
Pages

Worst Case Mode :	802.11a
Worst Case Transfer Rate :	6 Mbps
Distance of Measurements :	3 Meters
Operating Frequency :	5 180 MHz
Channel :	36

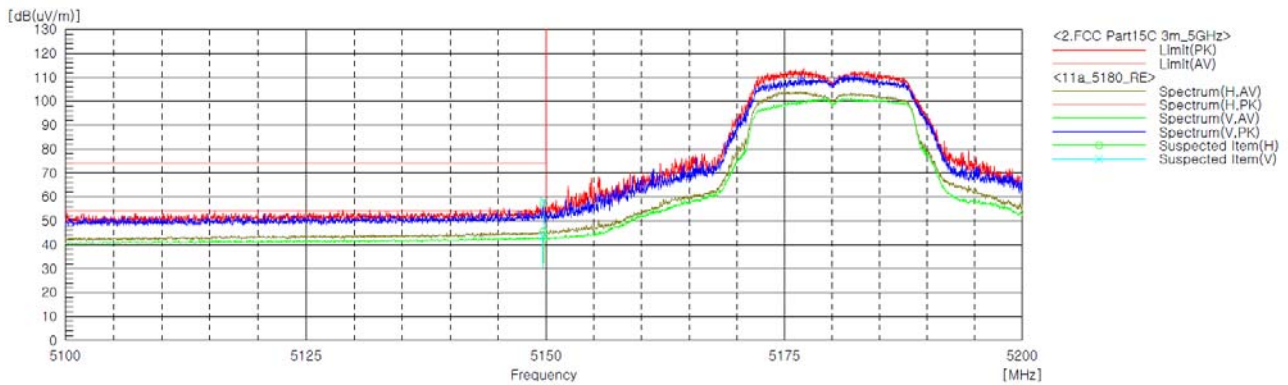


Radiated Restricted Lower Band Edge Plot



CTK Co., Ltd.
(Ho-dong), 113, Yejik-ro, Cheoin-gu,
Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No.:
CTK-2018-01335
Page (131) / (160)
Pages

Worst Case Mode :	802.11a
Worst Case Transfer Rate :	6 Mbps
Distance of Measurements :	3 Meters
Operating Frequency :	5 745 MHz
Channel :	149

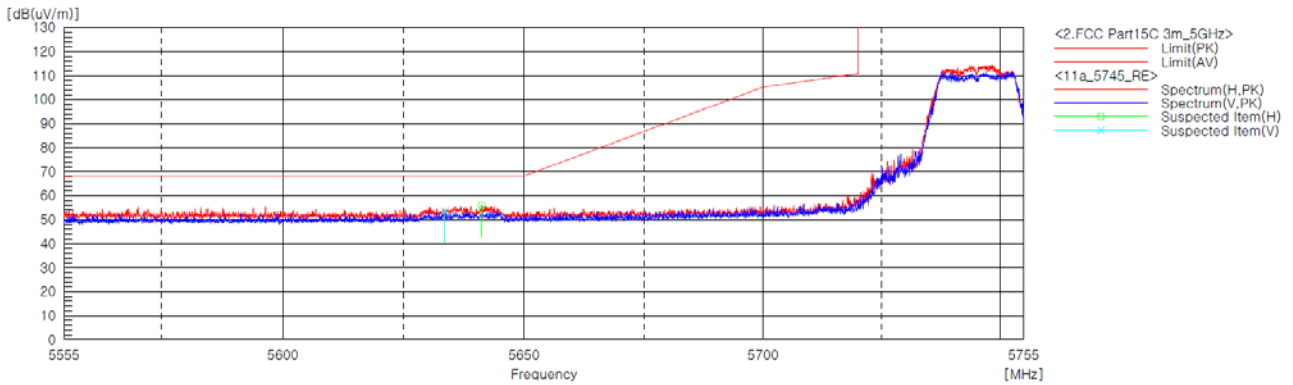


Radiated Restricted Lower Band Edge Plot



CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2018-01335
 Page (132) / (160)
 Pages

Worst Case Mode :	802.11a
Worst Case Transfer Rate :	6 Mbps
Distance of Measurements :	3 Meters
Operating Frequency :	5 825 MHz
Channel :	165

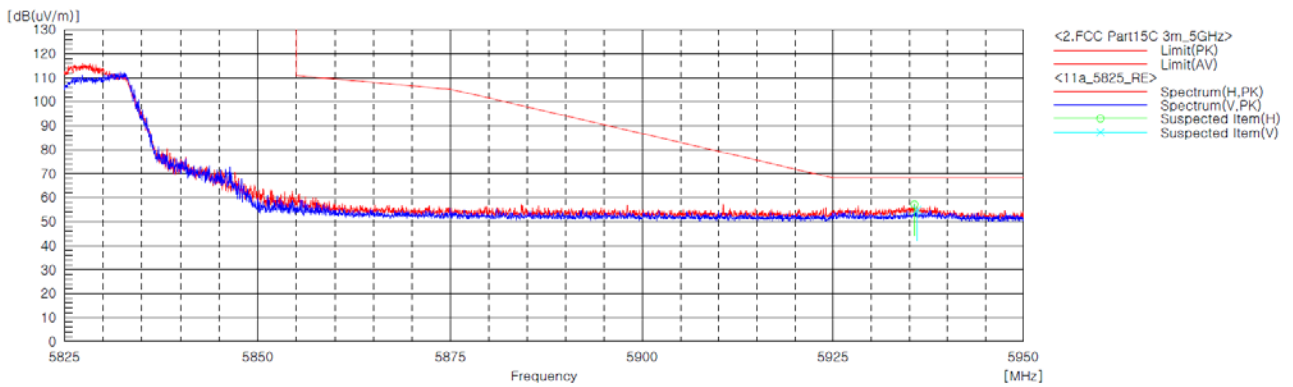

Radiated Restricted Upper Band Edge Plot



Test mode : 802.11n_HT20_CDD Mode

The requirements are:

Complies

Test Data

Ch.36(5 180 MHz)

Frequency [MHz]	(P)	Limit AV [dBuV/m]	Limit PK [dBuV/m]	Result AV [dBuV/m]	Result PK [dBuV/m]	Margin AV [dB]	Margin PK [dB]
2 500.00	H	54.00	74.00	37.41	42.70	16.59	31.30
2 500.00	V	54.00	74.00	31.91	40.40	22.09	33.60
10 360.00	H	54.00	74.00	49.41	60.50	4.59	13.50
10 360.00	V	54.00	74.00	50.61	61.70	3.39	12.30
15 540.00	H	54.00	74.00	45.31	61.20	8.69	12.80
15 540.00	V	54.00	74.00	45.21	60.10	8.79	13.90
5 150.00	H	54.00	74.00	46.31	58.70	7.69	15.30
5 150.00	V	54.00	74.00	44.91	57.10	9.09	16.90

Ch.40(5 200 MHz)

Frequency [MHz]	(P)	Limit AV [dBuV/m]	Limit PK [dBuV/m]	Result AV [dBuV/m]	Result PK [dBuV/m]	Margin AV [dB]	Margin PK [dB]
2 500.00	H	54.00	74.00	37.31	42.50	16.69	31.50
2 500.00	V	54.00	74.00	31.71	40.50	22.29	33.50
10 400.00	H	54.00	74.00	48.81	59.50	5.19	14.50
10 400.00	V	54.00	74.00	49.51	61.20	4.49	12.80
15 600.00	H	54.00	74.00	45.31	59.90	8.69	14.10
15 600.00	V	54.00	74.00	45.01	59.60	8.99	14.40

Ch.48(5 240 MHz)

Frequency [MHz]	(P)	Limit AV [dBuV/m]	Limit PK [dBuV/m]	Result AV [dBuV/m]	Result PK [dBuV/m]	Margin AV [dB]	Margin PK [dB]
2 500.00	H	54.00	74.00	37.21	42.80	16.79	31.20
2 500.00	V	54.00	74.00	32.01	40.60	21.99	33.40
10 480.00	H	54.00	74.00	47.31	58.70	6.69	15.30
10 480.00	V	54.00	74.00	48.31	60.10	5.69	13.90
15 720.00	H	54.00	74.00	46.61	63.30	7.39	10.70
15 720.00	V	54.00	74.00	45.61	61.40	8.39	12.60

Ch.149(5 745 MHz)

Frequency [MHz]	(P)	Limit AV [dBuV/m]	Limit PK [dBuV/m]	Result AV [dBuV/m]	Result PK [dBuV/m]	Margin AV [dB]	Margin PK [dB]
2 500.00	H	54.00	74.00	36.81	42.50	17.19	31.50
2 500.00	V	54.00	74.00	32.41	41.90	21.59	32.10
11 490.00	H	54.00	74.00	46.51	59.90	7.49	14.10
11 490.00	V	54.00	74.00	47.71	61.10	6.29	12.90
17 235.00	H	54.00	74.00	48.91	65.10	5.09	8.90
17 235.00	V	54.00	74.00	51.41	64.50	2.59	9.50

Ch.157(5 785 MHz)

Frequency [MHz]	(P)	Limit AV [dBuV/m]	Limit PK [dBuV/m]	Result AV [dBuV/m]	Result PK [dBuV/m]	Margin AV [dB]	Margin PK [dB]
2 500.00	H	54.00	74.00	37.11	43.20	16.89	30.80
2 500.00	V	54.00	74.00	31.91	42.00	22.09	32.00
11 570.00	H	54.00	74.00	47.41	61.40	6.59	12.60
11 570.00	V	54.00	74.00	47.81	63.20	6.19	10.80
17 355.00	H	54.00	74.00	49.41	64.30	4.59	9.70
17 355.00	V	54.00	74.00	51.71	64.40	2.29	9.60

Ch.165(5 825 MHz)

Frequency [MHz]	(P)	Limit AV [dBuV/m]	Limit PK [dBuV/m]	Result AV [dBuV/m]	Result PK [dBuV/m]	Margin AV [dB]	Margin PK [dB]
2 500.00	H	54.00	74.00	37.01	42.60	16.99	31.40
2 500.00	V	54.00	74.00	31.91	41.40	22.09	32.60
11 650.00	H	54.00	74.00	49.71	63.10	4.29	10.90
11 650.00	V	54.00	74.00	49.11	63.70	4.89	10.30
17 475.00	H	54.00	74.00	49.81	64.90	4.19	9.10
17 475.00	V	54.00	74.00	51.61	64.40	2.39	9.60

Remarks


1. The EUT was tested in three orientations in order to determine that "Z axis" was the worst case.



CTK Co., Ltd.
(Ho-dong), 113, Yejik-ro, Cheoin-gu,
Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No.:
CTK-2018-01335
Page (135) / (160)
Pages

Worst Case Mode :	802.11n_HT20_CDD Mode
Worst Case Transfer Rate :	MCS 24
Distance of Measurements :	3 Meters
Operating Frequency :	5 180 MHz
Channel :	36

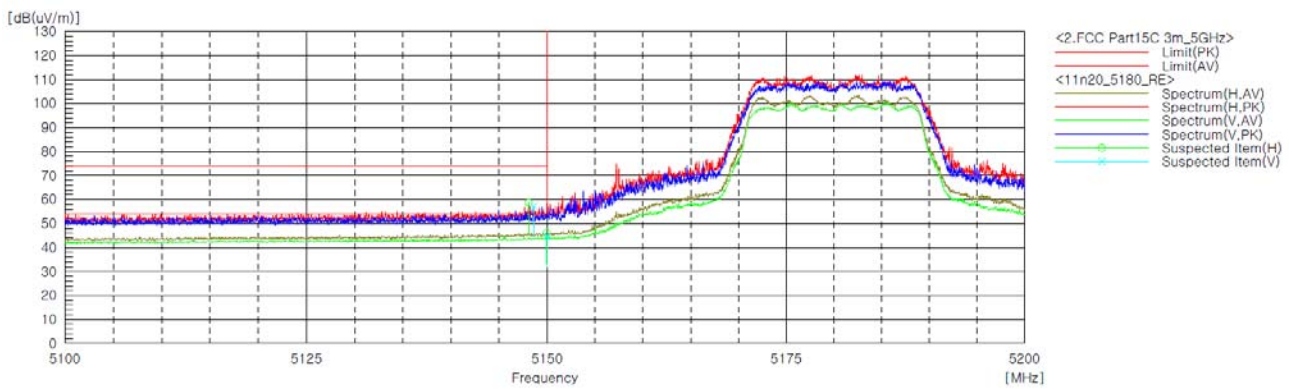


Radiated Restricted Lower Band Edge Plot



CTK Co., Ltd.
(Ho-dong), 113, Yejik-ro, Cheoin-gu,
Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No.:
CTK-2018-01335
Page (136) / (160)
Pages

Worst Case Mode :	802.11n_HT20_CDD Mode
Worst Case Transfer Rate :	MCS 24
Distance of Measurements :	3 Meters
Operating Frequency :	5 745 MHz
Channel :	149

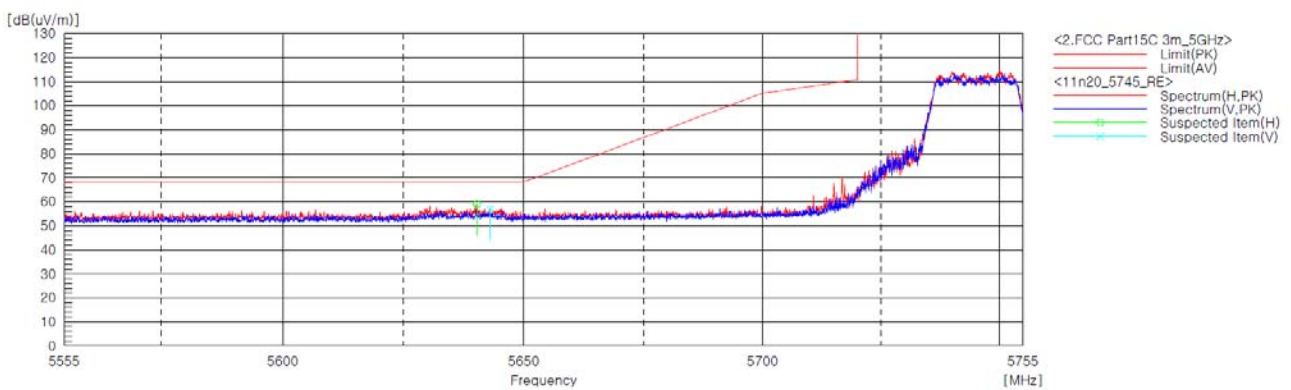


Radiated Restricted Lower Band Edge Plot



CTK Co., Ltd.
(Ho-dong), 113, Yejik-ro, Cheoin-gu,
Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No.:
CTK-2018-01335
Page (137) / (160)
Pages

Worst Case Mode :	802.11n_HT20_CDD Mode
Worst Case Transfer Rate :	MCS 24
Distance of Measurements :	3 Meters
Operating Frequency :	5 825 MHz
Channel :	165

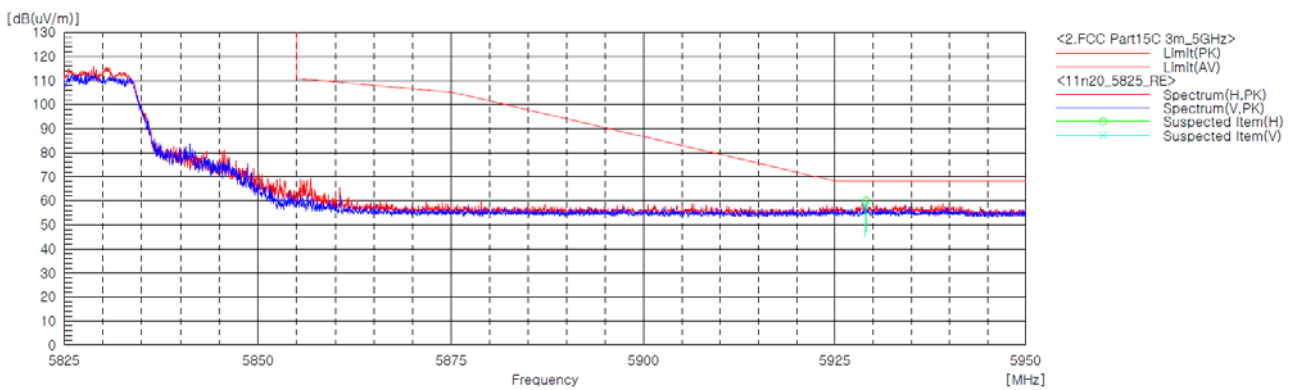

Radiated Restricted Upper Band Edge Plot



CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2018-01335
 Page (138) / (160)
 Pages

Test mode : 802.11ac_VHT20_CDD Mode

The requirements are:

Complies

Test Data

Ch.36(5 180 MHz)

Frequency [MHz]	(P)	Limit AV [dBuV/m]	Limit PK [dBuV/m]	Result AV [dBuV/m]	Result PK [dBuV/m]	Margin AV [dB]	Margin PK [dB]
2 500.00	H	54.00	74.00	36.41	42.70	17.59	31.30
2 500.00	V	54.00	74.00	32.11	40.50	21.89	33.50
10 360.00	H	54.00	74.00	49.81	60.50	4.19	13.50
10 360.00	V	54.00	74.00	49.51	62.90	4.49	11.10
15 540.00	H	54.00	74.00	45.51	60.30	8.49	13.70
15 540.00	V	54.00	74.00	46.51	60.50	7.49	13.50
5 150.00	H	54.00	74.00	47.41	64.90	6.59	9.10
5 150.00	V	54.00	74.00	45.51	61.90	8.49	12.10

Ch.40(5 200 MHz)

Frequency [MHz]	(P)	Limit AV [dBuV/m]	Limit PK [dBuV/m]	Result AV [dBuV/m]	Result PK [dBuV/m]	Margin AV [dB]	Margin PK [dB]
2 500.00	H	54.00	74.00	36.71	42.90	17.29	31.10
2 500.00	V	54.00	74.00	31.61	41.00	22.39	33.00
10 400.00	H	54.00	74.00	49.21	59.90	4.79	14.10
10 400.00	V	54.00	74.00	48.71	61.50	5.29	12.50
15 600.00	H	54.00	74.00	45.21	60.10	8.79	13.90
15 600.00	V	54.00	74.00	45.61	60.70	8.39	13.30

Ch.48(5 240 MHz)

Frequency [MHz]	(P)	Limit AV [dBuV/m]	Limit PK [dBuV/m]	Result AV [dBuV/m]	Result PK [dBuV/m]	Margin AV [dB]	Margin PK [dB]
2 500.00	H	54.00	74.00	36.61	42.80	17.39	31.20
2 500.00	V	54.00	74.00	31.61	40.50	22.39	33.50
10 480.00	H	54.00	74.00	48.21	60.00	5.79	14.00
10 480.00	V	54.00	74.00	49.41	61.10	4.59	12.90
15 720.00	H	54.00	74.00	47.51	63.40	6.49	10.60
15 720.00	V	54.00	74.00	46.11	62.40	7.89	11.60



Ch.149(5 745 MHz)

Frequency [MHz]	(P)	Limit AV [dBuV/m]	Limit PK [dBuV/m]	Result AV [dBuV/m]	Result PK [dBuV/m]	Margin AV [dB]	Margin PK [dB]
2 500.00	H	54.00	74.00	36.41	42.60	17.59	31.40
2 500.00	V	54.00	74.00	31.71	40.80	22.29	33.20
11 490.00	H	54.00	74.00	46.81	61.20	7.19	12.80
11 490.00	V	54.00	74.00	48.61	61.60	5.39	12.40
17 235.00	H	54.00	74.00	49.51	63.70	4.49	10.30
17 235.00	V	54.00	74.00	50.21	65.00	3.79	9.00

Ch.157(5 785 MHz)

Frequency [MHz]	(P)	Limit AV [dBuV/m]	Limit PK [dBuV/m]	Result AV [dBuV/m]	Result PK [dBuV/m]	Margin AV [dB]	Margin PK [dB]
2 500.00	H	54.00	74.00	36.81	43.10	17.19	30.90
2 500.00	V	54.00	74.00	31.91	40.90	22.09	33.10
11 570.00	H	54.00	74.00	48.41	63.00	5.59	11.00
11 570.00	V	54.00	74.00	48.31	61.60	5.69	12.40
17 355.00	H	54.00	74.00	50.41	65.80	3.59	8.20
17 355.00	V	54.00	74.00	51.41	66.20	2.59	7.80

Ch.165(5 825 MHz)

Frequency [MHz]	(P)	Limit AV [dBuV/m]	Limit PK [dBuV/m]	Result AV [dBuV/m]	Result PK [dBuV/m]	Margin AV [dB]	Margin PK [dB]
2 500.00	H	54.00	74.00	36.51	42.80	17.49	31.20
2 500.00	V	54.00	74.00	32.01	41.10	21.99	32.90
11 650.00	H	54.00	74.00	49.61	63.80	4.39	10.20
11 650.00	V	54.00	74.00	48.81	63.50	5.19	10.50
17 475.00	H	54.00	74.00	49.71	63.70	4.29	10.30
17 475.00	V	54.00	74.00	51.61	65.10	2.39	8.90

Remarks


1. The EUT was tested in three orientations in order to determine that "Z axis" was the worst case.



CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2018-01335
 Page (140) / (160)
 Pages

Worst Case Mode :	802.11ac_VHT20_CDD Mode
Worst Case Transfer Rate :	MNSS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 180 MHz
Channel :	36

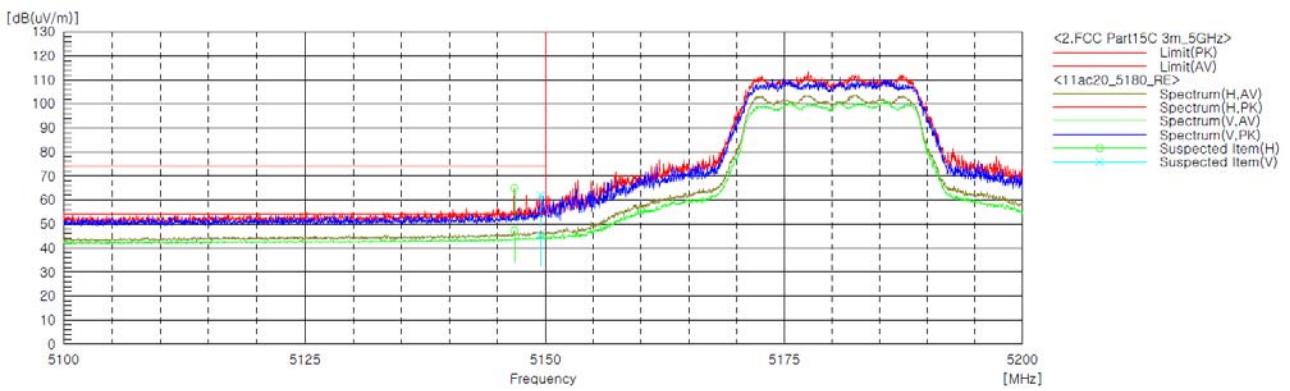


Radiated Restricted Lower Band Edge Plot



CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2018-01335
 Page (141) / (160)
 Pages

Worst Case Mode :	802.11ac_VHT20_CDD Mode
Worst Case Transfer Rate :	MNSS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 745 MHz
Channel :	149

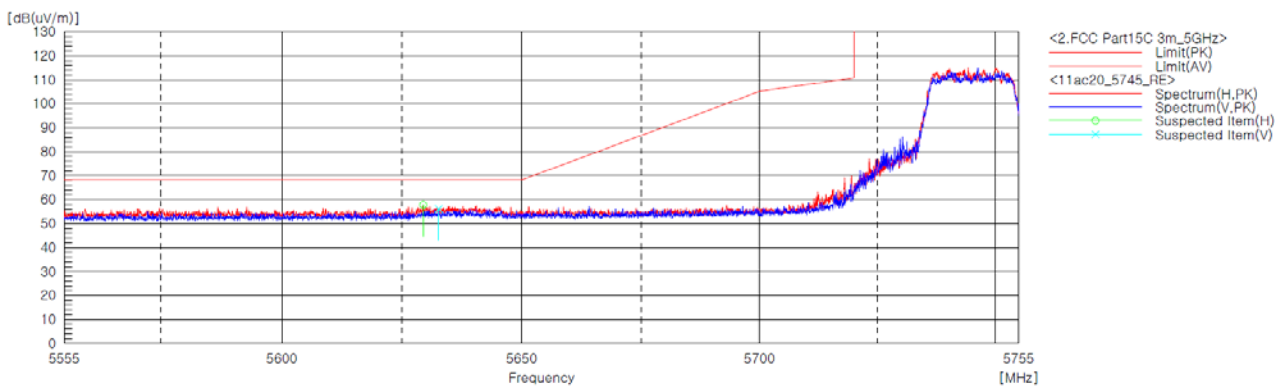


Radiated Restricted Lower Band Edge Plot



CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2018-01335
 Page (142) / (160)
 Pages

Worst Case Mode :	802.11ac_VHT20_CDD Mode
Worst Case Transfer Rate :	MNSS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 825 MHz
Channel :	165

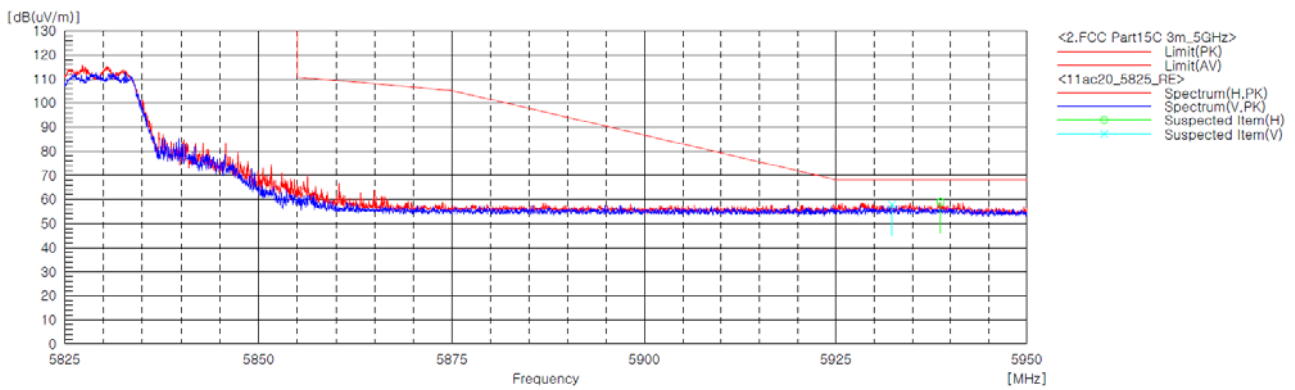

Radiated Restricted Upper Band Edge Plot



CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2018-01335
 Page (143) / (160)
 Pages

Test mode : 802.11n_HT40_CDD Mode

The requirements are:

Complies

Test Data

Ch.38(5 190 MHz)

Frequency [MHz]	(P)	Limit AV [dBuV/m]	Limit PK [dBuV/m]	Result AV [dBuV/m]	Result PK [dBuV/m]	Margin AV [dB]	Margin PK [dB]
2 500.00	H	54.00	74.00	36.91	42.50	17.09	31.50
2 500.00	V	54.00	74.00	32.81	40.50	21.19	33.50
10 380.00	H	54.00	74.00	43.81	54.50	10.19	19.50
10 380.00	V	54.00	74.00	42.91	54.20	11.09	19.80
5 150.00	H	54.00	74.00	50.21	62.60	3.79	11.40
5 150.00	V	54.00	74.00	47.91	60.20	6.09	13.80

Ch.46(5 230 MHz)

Frequency [MHz]	(P)	Limit AV [dBuV/m]	Limit PK [dBuV/m]	Result AV [dBuV/m]	Result PK [dBuV/m]	Margin AV [dB]	Margin PK [dB]
2 500.00	H	54.00	74.00	36.61	42.60	17.39	31.40
2 500.00	V	54.00	74.00	32.21	40.40	21.79	33.60
10 460.00	H	54.00	74.00	44.61	53.40	9.39	20.60
10 460.00	V	54.00	74.00	44.91	56.70	9.09	17.30

Ch.151(5 755 MHz)

Frequency [MHz]	(P)	Limit AV [dBuV/m]	Limit PK [dBuV/m]	Result AV [dBuV/m]	Result PK [dBuV/m]	Margin AV [dB]	Margin PK [dB]
2 500.00	H	54.00	74.00	36.91	42.40	17.09	31.60
2 500.00	V	54.00	74.00	31.91	40.70	22.09	33.30
11 510.00	H	54.00	74.00	48.91	60.90	5.09	13.10
11 510.00	V	54.00	74.00	49.41	60.80	4.59	13.20
17 265.00	H	54.00	74.00	49.21	61.30	4.79	12.70
17 265.00	V	54.00	74.00	52.01	62.20	1.99	11.80



CTK Co., Ltd.
(Ho-dong), 113, Yejik-ro, Cheoin-gu,
Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No.:
CTK-2018-01335
Page (144) / (160)
Pages

Ch.159(5 795 MHz)

Frequency [MHz]	(P)	Limit AV [dBuV/m]	Limit PK [dBuV/m]	Result AV [dBuV/m]	Result PK [dBuV/m]	Margin AV [dB]	Margin PK [dB]
2 500.00	H	54.00	74.00	36.91	42.60	17.09	31.40
2 500.00	V	54.00	74.00	31.81	40.50	22.19	33.50
11 590.00	H	54.00	74.00	50.31	62.40	3.69	11.60
11 590.00	V	54.00	74.00	49.41	61.00	4.59	13.00
17 385.00	H	54.00	74.00	49.61	61.40	4.39	12.60
17 385.00	V	54.00	74.00	51.31	61.60	2.69	12.40

Remarks


1. The EUT was tested in three orientations in order to determine that "Z axis" was the worst case.



CTK Co., Ltd.
(Ho-dong), 113, Yejik-ro, Cheoin-gu,
Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No.:
CTK-2018-01335
Page (145) / (160)
Pages

Worst Case Mode :	802.11n_HT40_CDD Mode
Worst Case Transfer Rate :	MCS 24
Distance of Measurements :	3 Meters
Operating Frequency :	5 190 MHz
Channel :	38

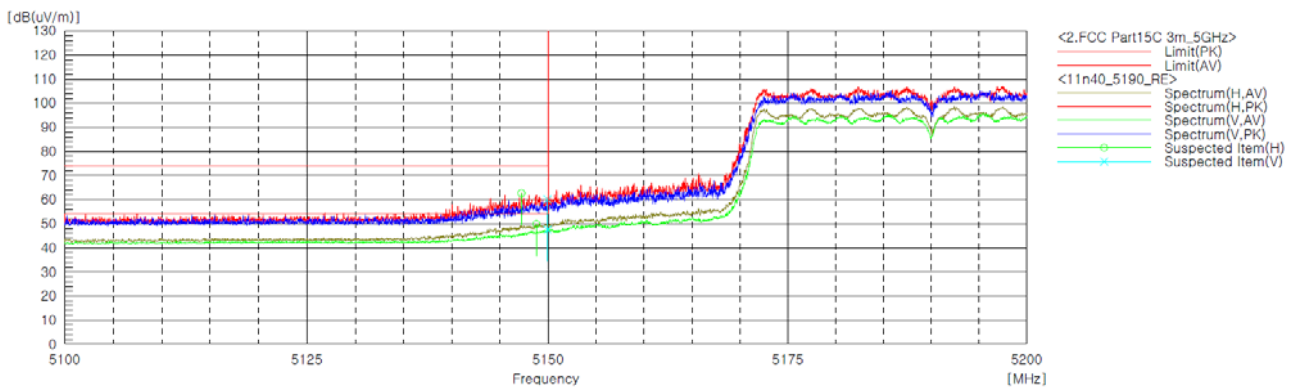


Radiated Restricted Lower Band Edge Plot



CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2018-01335
 Page (146) / (160)
 Pages

Worst Case Mode :	802.11n_HT40_CDD Mode
Worst Case Transfer Rate :	MCS 24
Distance of Measurements :	3 Meters
Operating Frequency :	5 755 MHz
Channel :	151

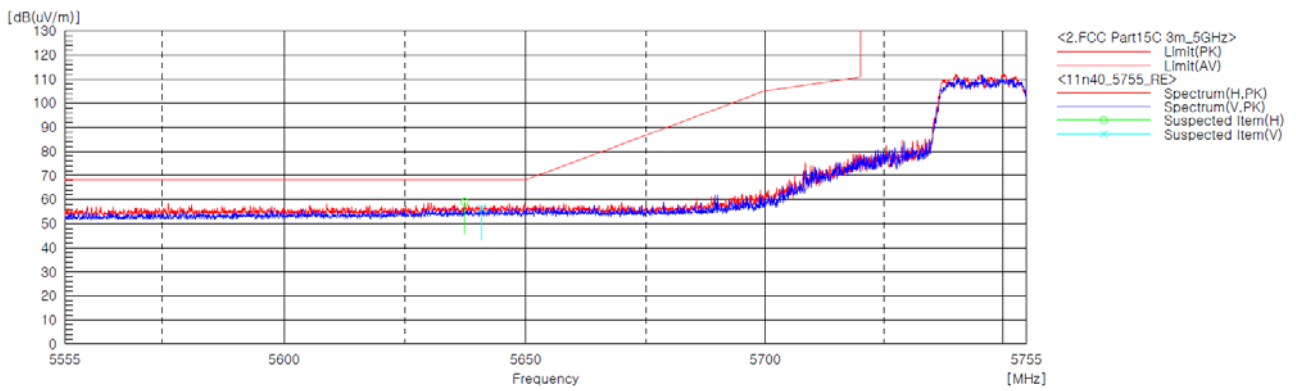


Radiated Restricted Lower Band Edge Plot



CTK Co., Ltd.
(Ho-dong), 113, Yejik-ro, Cheoin-gu,
Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No.:
CTK-2018-01335
Page (147) / (160)
Pages

Worst Case Mode :	802.11n_HT40_CDD Mode
Worst Case Transfer Rate :	MCS 24
Distance of Measurements :	3 Meters
Operating Frequency :	5 795 MHz
Channel :	159

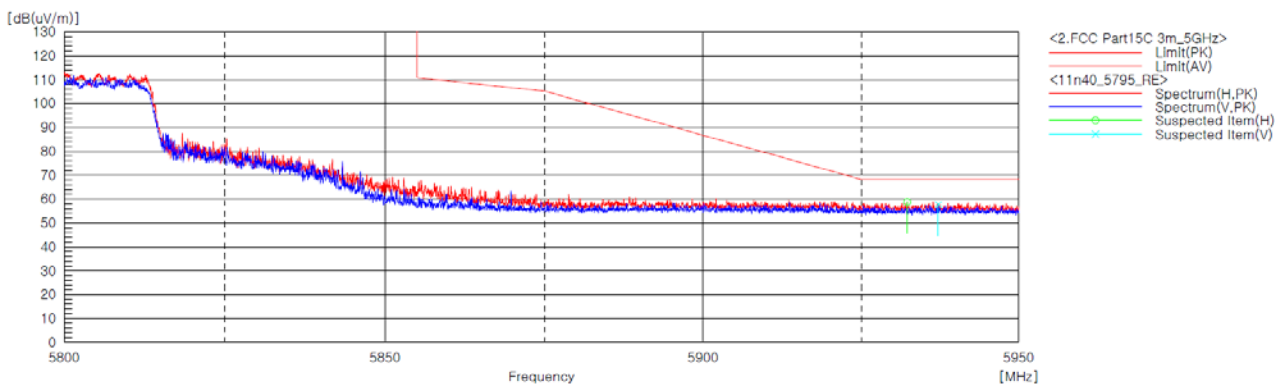

Radiated Restricted Upper Band Edge Plot



CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2018-01335
 Page (148) / (160)
 Pages

Test mode : 802.11ac_VHT40_CDD Mode

The requirements are:

Complies

Test Data

Ch.38(5 190 MHz)

Frequency [MHz]	(P)	Limit AV [dBuV/m]	Limit PK [dBuV/m]	Result AV [dBuV/m]	Result PK [dBuV/m]	Margin AV [dB]	Margin PK [dB]
2 500.00	H	54.00	74.00	36.91	42.40	17.09	31.60
2 500.00	V	54.00	74.00	31.71	40.60	22.29	33.40
10 380.00	H	54.00	74.00	3.41	53.40	50.59	20.60
10 380.00	V	54.00	74.00	43.51	54.90	10.49	19.10
5 150.00	H	54.00	74.00	50.11	61.20	3.89	12.80
5 150.00	V	54.00	74.00	47.91	61.60	6.09	12.40

Ch.46(5 230 MHz)

Frequency [MHz]	(P)	Limit AV [dBuV/m]	Limit PK [dBuV/m]	Result AV [dBuV/m]	Result PK [dBuV/m]	Margin AV [dB]	Margin PK [dB]
2 500.00	H	54.00	74.00	36.61	42.30	17.39	31.70
2 500.00	V	54.00	74.00	31.71	40.40	22.29	33.60
10 460.00	H	54.00	74.00	43.11	54.50	10.89	19.50
10 460.00	V	54.00	74.00	44.31	54.90	9.69	19.10

Ch.151(5 755 MHz)

Frequency [MHz]	(P)	Limit AV [dBuV/m]	Limit PK [dBuV/m]	Result AV [dBuV/m]	Result PK [dBuV/m]	Margin AV [dB]	Margin PK [dB]
2 500.00	H	54.00	74.00	36.81	42.50	17.19	31.50
2 500.00	V	54.00	74.00	31.91	40.50	22.09	33.50
11 510.00	H	54.00	74.00	48.61	62.10	5.39	11.90
11 510.00	V	54.00	74.00	49.01	60.70	4.99	13.30
17 265.00	H	54.00	74.00	49.61	62.70	4.39	11.30
17 265.00	V	54.00	74.00	51.41	62.90	2.59	11.10



CTK Co., Ltd.
(Ho-dong), 113, Yejik-ro, Cheoin-gu,
Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No.:
CTK-2018-01335
Page (149) / (160)
Pages

Ch.159(5 795 MHz)

Frequency [MHz]	(P)	Limit AV [dBuV/m]	Limit PK [dBuV/m]	Result AV [dBuV/m]	Result PK [dBuV/m]	Margin AV [dB]	Margin PK [dB]
2 500.00	H	54.00	74.00	36.91	42.60	17.09	31.40
2 500.00	V	54.00	74.00	31.81	40.80	22.19	33.20
11 590.00	H	54.00	74.00	51.11	63.20	2.89	10.80
11 590.00	V	54.00	74.00	49.41	62.00	4.59	12.00
17 385.00	H	54.00	74.00	50.71	61.20	3.29	12.80
17 385.00	V	54.00	74.00	51.71	62.10	2.29	11.90

Remarks


1. The EUT was tested in three orientations in order to determine that "Z axis" was the worst case.



CTK Co., Ltd.
(Ho-dong), 113, Yejik-ro, Cheoin-gu,
Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No.:
CTK-2018-01335
Page (150) / (160)
Pages

Worst Case Mode :	802.11ac_VHT40_CDD Mode
Worst Case Transfer Rate :	MNSS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 190 MHz
Channel :	38

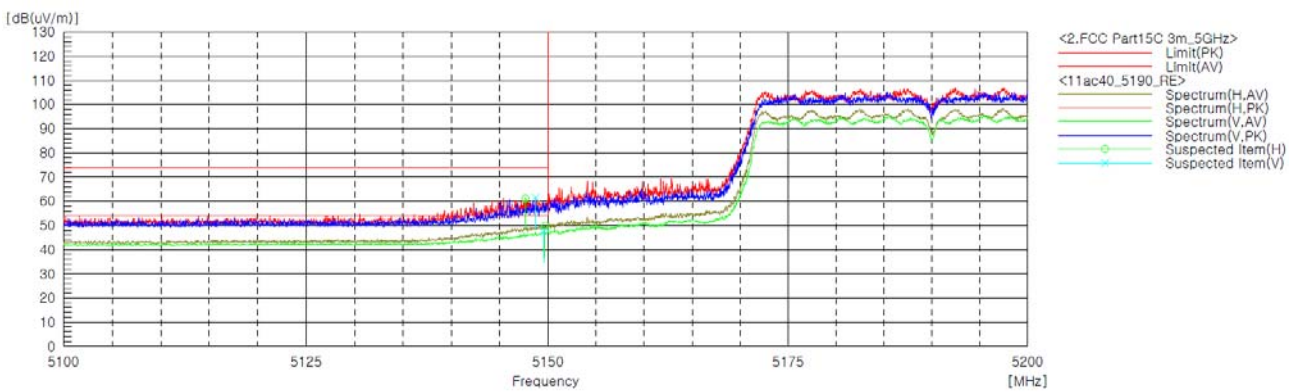


Radiated Restricted Lower Band Edge Plot



CTK Co., Ltd.
(Ho-dong), 113, Yejik-ro, Cheoin-gu,
Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No.:
CTK-2018-01335
Page (151) / (160)
Pages

Worst Case Mode :	802.11ac_VHT40_CDD Mode
Worst Case Transfer Rate :	MNSS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 755 MHz
Channel :	151

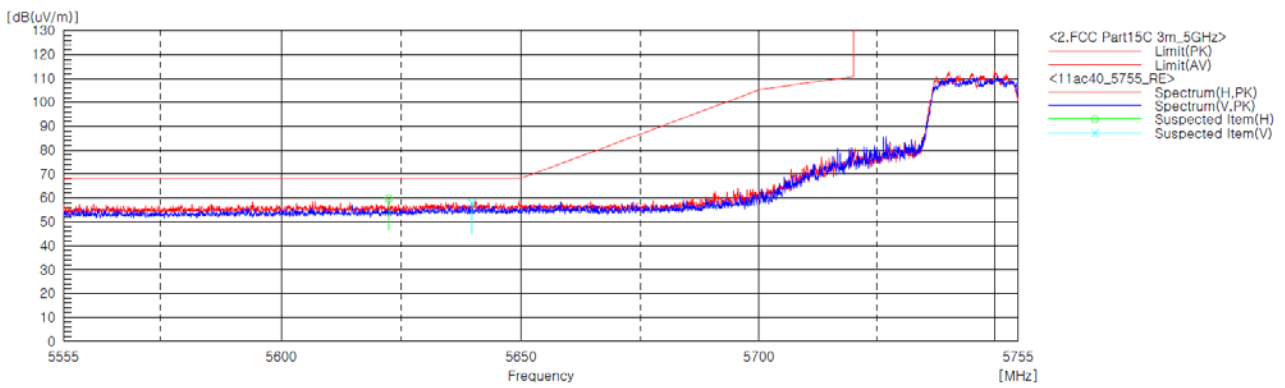


Radiated Restricted Lower Band Edge Plot



CTK Co., Ltd.
(Ho-dong), 113, Yejik-ro, Cheoin-gu,
Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No.:
CTK-2018-01335
Page (152) / (160)
Pages

Worst Case Mode :	802.11ac_VHT40_CDD Mode
Worst Case Transfer Rate :	MNSS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 795 MHz
Channel :	159

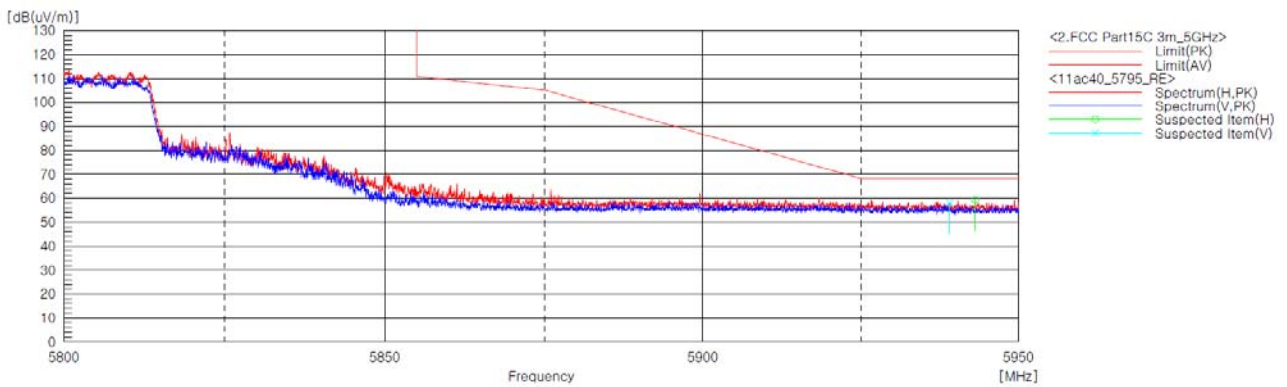

Radiated Restricted Upper Band Edge Plot



CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2018-01335
 Page (153) / (160)
 Pages

Test mode : 802.11ac_VHT80_CDD Mode

The requirements are:

Complies

Test Data

Ch.42(5 210 MHz)

Frequency [MHz]	(P)	Limit AV [dBuV/m]	Limit PK [dBuV/m]	Result AV [dBuV/m]	Result PK [dBuV/m]	Margin AV [dB]	Margin PK [dB]
2 500.00	H	54.00	74.00	37.36	42.40	16.64	31.60
2 500.00	V	54.00	74.00	32.76	41.30	21.24	32.70
10 420.00	H	54.00	74.00	42.06	51.40	11.94	22.60
10 420.00	V	54.00	74.00	42.16	52.70	11.84	21.30
5 150.00	H	54.00	74.00	50.56	62.50	3.44	11.50
5 150.00	V	54.00	74.00	48.16	59.30	5.84	14.70

Ch.155(5 775 MHz)

Frequency [MHz]	(P)	Limit AV [dBuV/m]	Limit PK [dBuV/m]	Result AV [dBuV/m]	Result PK [dBuV/m]	Margin AV [dB]	Margin PK [dB]
2 500.00	H	54.00	74.00	37.56	42.60	16.44	31.40
2 500.00	V	54.00	74.00	32.16	40.70	21.84	33.30
11 550.00	H	54.00	74.00	48.36	60.50	5.64	13.50
11 550.00	V	54.00	74.00	49.76	61.10	4.24	12.90
17 325.00	H	54.00	74.00	49.96	61.80	4.04	12.20
17 325.00	V	54.00	74.00	51.46	63.20	2.54	10.80

Remarks


1. The EUT was tested in three orientations in order to determine that "Z axis" was the worst case.



CTK Co., Ltd.
(Ho-dong), 113, Yejik-ro, Cheoin-gu,
Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No.:
CTK-2018-01335
Page (154) / (160)
Pages

Worst Case Mode :	802.11ac_VHT80_CDD Mode
Worst Case Transfer Rate :	MNSS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 210 MHz
Channel :	42

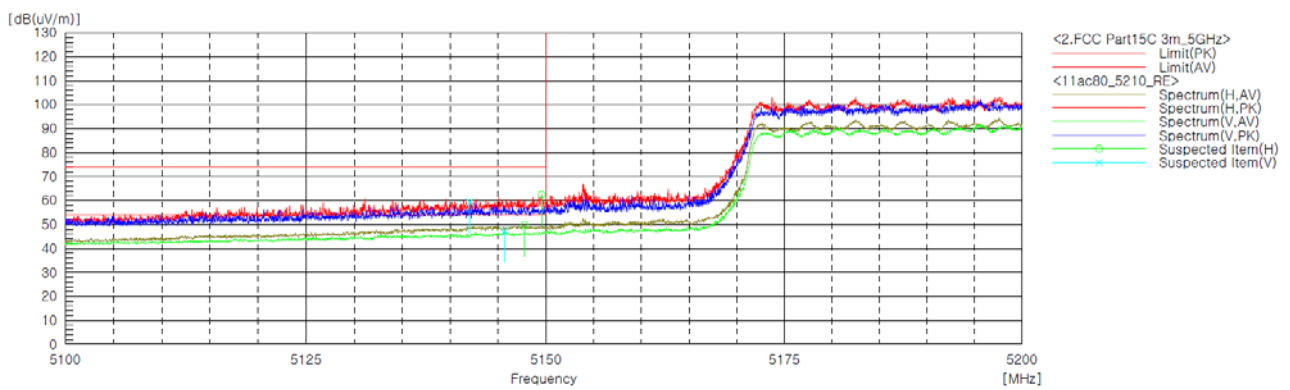


Radiated Restricted Lower Band Edge Plot



CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2018-01335
 Page (155) / (160)
 Pages

Worst Case Mode :	802.11ac_VHT80_CDD Mode
Worst Case Transfer Rate :	MNSS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 775 MHz
Channel :	155

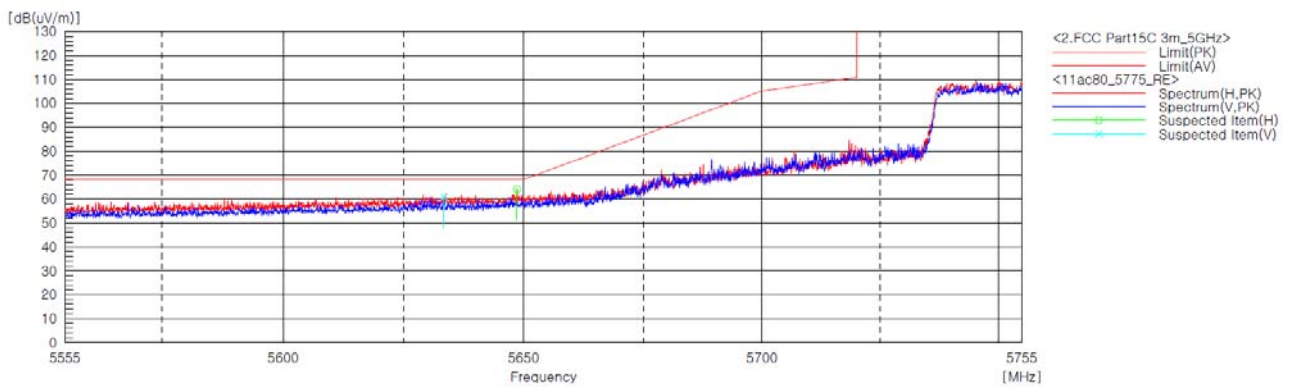


Radiated Restricted Lower Band Edge Plot



CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2018-01335
 Page (156) / (160)
 Pages

Worst Case Mode :	802.11ac_VHT80_CDD Mode
Worst Case Transfer Rate :	MNSS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 775 MHz
Channel :	155

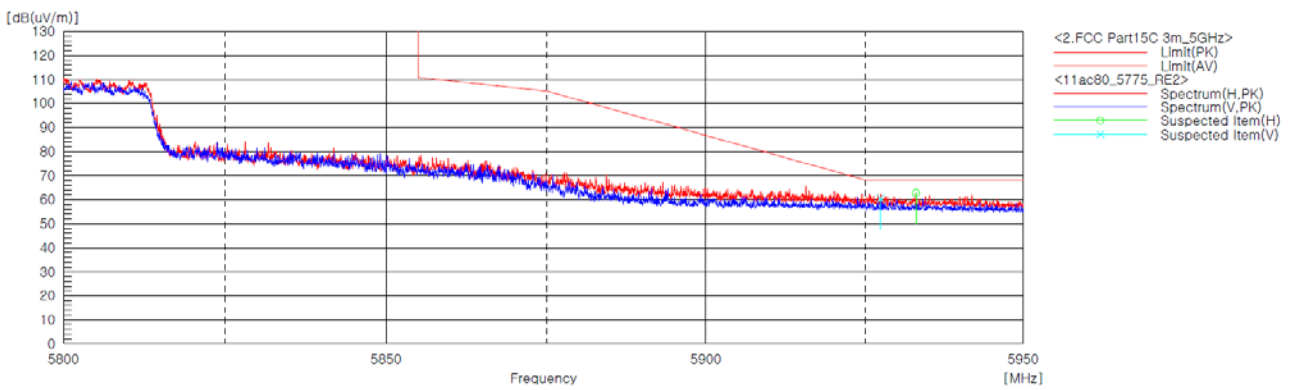

Radiated Restricted Upper Band Edge Plot



CTK Co., Ltd.
(Ho-dong), 113, Yejik-ro, Cheoin-gu,
Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No.:
CTK-2018-01335
Page (157) / (160)
Pages

4.7 AC Conducted Emissions

Test Location

Shielded Room

Frequency Range of Measurement

150 kHz to 30 MHz

Instrument Settings

IF Band Width: 9 kHz

Test Procedures

The EUT was placed on a non-metallic table 0.8m above the metallic, grounded floor and 0.4m from the reference ground plane wall. The distance to other metallic surfaces was at least 0.8m.

Amplitude measurements were performed with a quasi-peak detector and an average detector.

Limit

- 15.207(a)

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 ~ 0.5	66 to 56*	56 to 46*
0.5 ~ 5	56	46
5 ~ 30	60	50

* Decreases with the logarithm of the frequency.

Test Results


The requirements are:

Complies

Test Data

[LINE]

3CE_Class B_L1

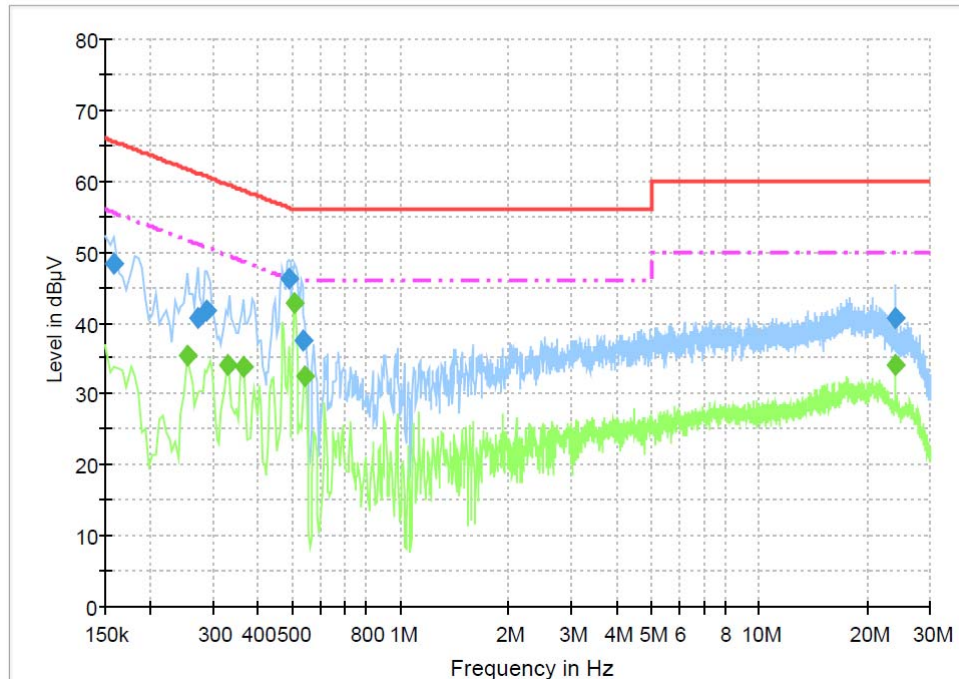


Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.159000	48.4	1000.0	9.000	On	L1	9.8	17.1	65.5
0.271500	40.7	1000.0	9.000	On	L1	9.7	20.4	61.1
0.289500	41.8	1000.0	9.000	On	L1	9.8	18.7	60.5
0.487500	46.3	1000.0	9.000	On	L1	10.0	9.9	56.2
0.537000	37.5	1000.0	9.000	On	L1	10.0	18.5	56.0
24.000000	40.6	1000.0	9.000	On	L1	10.1	19.4	60.0

Final Result 2

Frequency (MHz)	CAverage (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.253500	35.4	1000.0	9.000	On	L1	9.6	16.3	51.6
0.330000	34.2	1000.0	9.000	On	L1	9.9	15.3	49.5
0.366000	33.7	1000.0	9.000	On	L1	9.9	14.9	48.6
0.505500	42.7	1000.0	9.000	On	L1	10.0	3.3	46.0
0.541500	32.5	1000.0	9.000	On	L1	10.0	13.5	46.0
24.004500	34.1	1000.0	9.000	On	L1	10.1	15.9	50.0

[NEUTRAL]
3CE_Class B_N

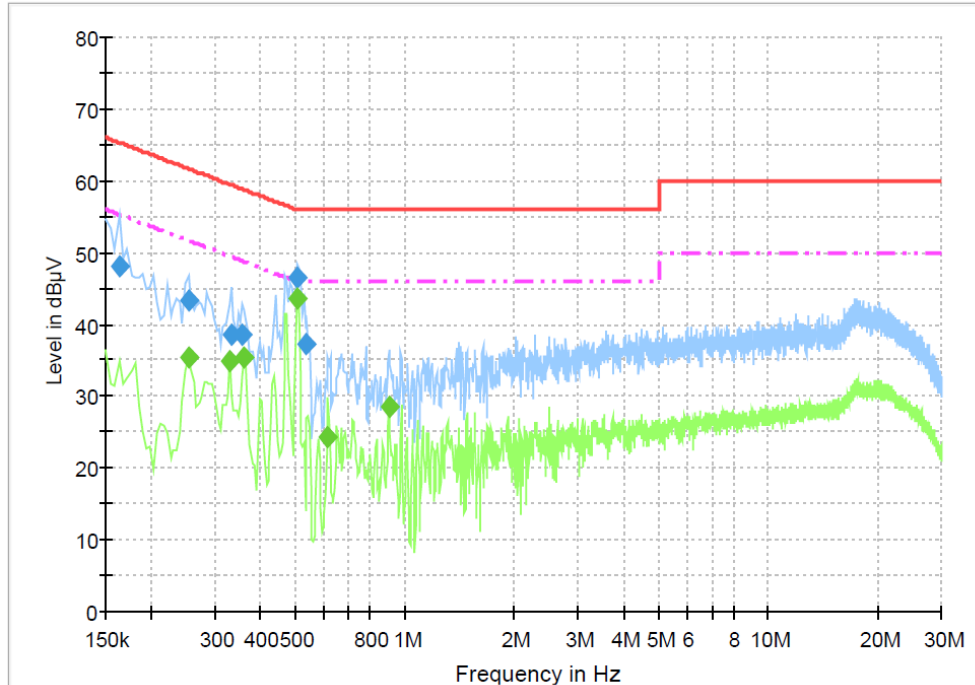

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.163500	48.1	1000.0	9.000	On	N	9.8	17.2	65.3
0.253500	43.4	1000.0	9.000	On	N	9.7	18.3	61.6
0.334500	38.6	1000.0	9.000	On	N	9.9	20.8	59.3
0.357000	38.6	1000.0	9.000	On	N	9.9	20.2	58.8
0.505500	46.5	1000.0	9.000	On	N	9.9	9.5	56.0
0.537000	37.3	1000.0	9.000	On	N	9.9	18.7	56.0

Final Result 2

Frequency (MHz)	CAverage (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.253500	35.4	1000.0	9.000	On	N	9.7	16.3	51.6
0.330000	34.9	1000.0	9.000	On	N	9.9	14.6	49.5
0.361500	35.5	1000.0	9.000	On	N	9.9	13.2	48.7
0.505500	43.7	1000.0	9.000	On	N	9.9	2.3	46.0
0.613500	24.2	1000.0	9.000	On	N	9.9	21.8	46.0
0.906000	28.5	1000.0	9.000	On	N	9.8	17.5	46.0



CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2018-01335
 Page (160) / (160)
 Pages

APPENDIX A – Test Equipment Used For Tests

	Name of Equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1	Signal Analyzer	Agilent	N9020A	MY48011598	2017-11-01	2018-11-01
2	Signal Generator	Rohde & Schwarz	SMB100A	175528	2017-11-01	2018-11-01
3	EMI Test Receiver	Rohde & Schwarz	ESCI7	100814	2017-10-25	2018-10-25
4	Bilog Antenna	Schaffner	CBL6111C	2551	2018-05-10	2020-05-10
5	Active Loop Antenna	SCHWARZBECK	FMZB 1513	1513-125	2018-05-02	2020-05-02
6	6dB Attenuator	R&S	DNF	272.4110.50-2	2017-10-25	2018-10-25
7	AMPLIFIER	SONOMA	310	291721	2018-02-02	2019-02-02
8	EMI Test Receiver	Rohde & Schwarz	ESU40	100336	2018-02-01	2019-02-01
9	LISN	Rohde & Schwarz	ENV216	101235	2018-01-31	2019-01-31
10	Preamplifier	Agilent	8449B	3008A02011	2017-11-30	2018-11-30
11	Horn Antenna	ETS-Lindgren	3116	00062504	2017-12-04	2019-12-04
12	Horn Antenna	ETS-Lindgren	3117	00154525	2017-02-17	2019-02-17
13	Singnal Canditioning Unit	R&S	SCU-40	10023	2017-11-01	2018-11-01
14	Band Reject Filter	Micro Tronics	BRM50716	G184	2018-01-26	2019-01-26
15	Temp&Humi Chamber	ESPEC CORP.	SH-242	93008423	2017-09-18	2018-09-18