


GW-11 2.4 GHz Band SMA Mount Dipole 1.8 dBi

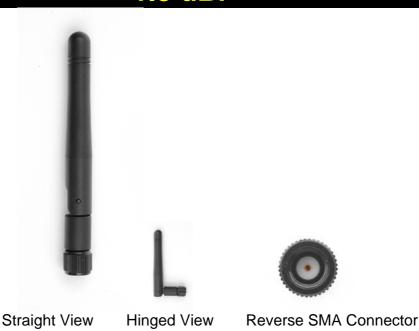

The GW-11 2.4 GHz dipole reverse SMA plug mount antenna is ideal for 2.4 GHz wireless applications such as Bluetooth and Wireless LAN. At only 82mm in length omni-directional 1.8dBi gain across all bands ensures constant reception and transmission. The antenna structure is designed for robust handling and the housing is made with TPE giving superior environmental reliability and a quality finish. The antenna can be rotated 90 degrees on the base hinge for ease of placement. Connector mount is fully customizable.

Features

Electrical

2.4 GHz Band
 Suitable for Wireless LAN, Bluetooth, etc

Gain 1.8 dBi
 VSWR 1.92 Max

Directivity
 Omni-directional

Power Handling 1W

Mechanical

Miniaturized 82mm

TPE Housing Robust and Quality Feel
 Connector Straight SMA Plug Reverse

©Copyright 2006 by Taoglas Limited. All Rights Reserved.
Unit 3, Enniscorthy Technology Centre, Mile House Road,
Enniscorthy, Co. Wexford, Ireland.

www.taoglas.com




Hinge

90 degrees rotation

Other

- Black Color
- ROHS Compliant

Outline Drawing

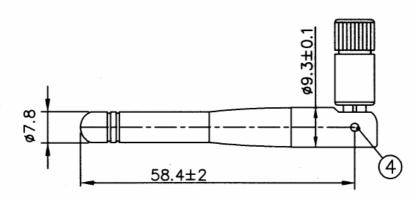

Unit:mm

Fig. 1 Side View

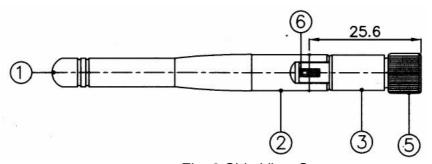


Fig. 2 Side View Structure

Key


1	Antenna Cover	TPE (Black)
2	Antenna Base	PC (Black)
3	Antenna Base	PBT (Black)
4	Rivet	Brass, Zn Plated (Black)
5	Connector	SMA Straight Plug Reverse (Black)
6	Cable	RG-178 50 Ohm

©Copyright 2006 by Taoglas Limited. All Rights Reserved.
Unit 3, Enniscorthy Technology Centre, Mile House Road,
Enniscorthy, Co. Wexford, Ireland.

www.taoglas.com




Smith Chart, VSWR, S11 Magnitude

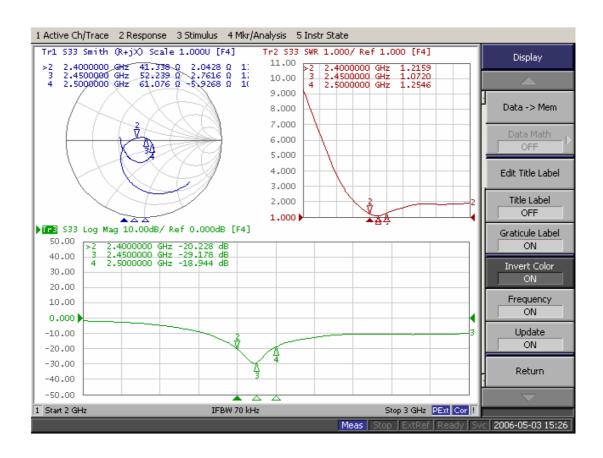




2D Far Field Radiation Pattern - Horizontal

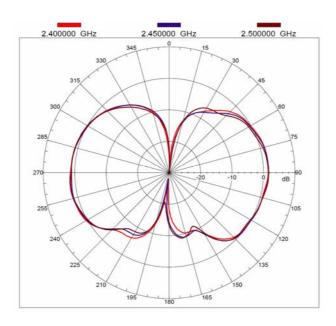

2D Far Field Radiation Pattern - Vertical

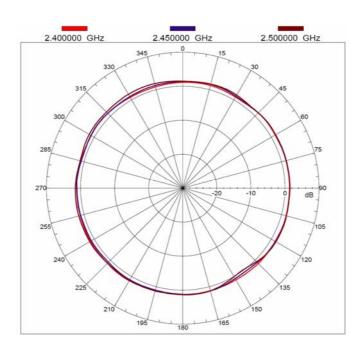

©Copyright 2006 by Taoglas Limited. All Rights Reserved.
Unit 3, Enniscorthy Technology Centre, Mile House Road,
Enniscorthy, Co. Wexford, Ireland.

www.taoglas.com