




RADIO TEST REPORT

FCC ID : WR932181716523
Equipment : Video doorbell
Brand Name : ecobee
Model Name : EB-CAMSDB-01
Applicant : Ecobee Incorporated
25, Dockside Drive Suite 700, Toronto, Canada,
M5A0B5
Standard : 47 CFR FCC Part 15.247

The product was received on Jul. 10, 2023, and testing was started from Jul. 21, 2023 and completed on Aug. 07, 2023. We, Sporton International Inc. Hsinchu Laboratory, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2013 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. Hsinchu Laboratory, the test report shall not be reproduced except in full.

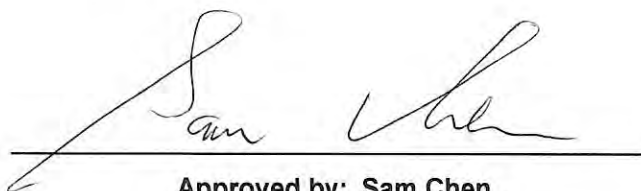

Approved by: Sam Chen

Sporton International Inc. Hsinchu Laboratory
No.8, Ln. 724, Bo'ai St., Zhubei City, Hsinchu County 302010, Taiwan (R.O.C.)



Table of Contents

History of this test report.....4

Summary of Test Result.....5

1 General Description6

1.1 Information.....6

1.2 Applicable Standards8

1.3 Testing Location Information8

1.4 Measurement Uncertainty8

2 Test Configuration of EUT9

2.1 Test Channel Mode9

2.2 The Worst Case Measurement Configuration.....9

2.3 EUT Operation during Test11

2.4 Accessories11

2.5 Support Equipment.....11

2.6 Test Setup Diagram13

3 Test Result16

3.1 AC Power-line Conducted Emissions16

3.2 20dB Bandwidth and Carrier Frequency Separation.....18

3.3 Maximum Conducted Output Power19

3.4 Power Spectral Density22

3.5 Time of Occupancy (Dwell Time)24

3.6 Emissions in Non-restricted Frequency Bands25

3.7 Emissions in Restricted Frequency Bands.....26

4 Test Equipment and Calibration Data29

Appendix A. Test Results of AC Power-line Conducted Emissions

Appendix B. Test Results of 20dB Bandwidth AND Carrier Frequency Separation

Appendix C. Test Results of Maximum Conducted Output Power

Appendix D. Test Results of Power Spectral Density

Appendix E. Test Results of Time of Occupancy (Dwell Time)

Appendix F. Test Results of Emissions in Non-restricted Frequency Bands

Appendix G. Test Results of Emissions in Restricted Frequency Bands



Appendix H. Test Photos

Photographs of EUT v01



History of this test report

| Report No. | Version | Description | Issued Date |
|------------|---------|-------------------------|---------------|
| FR361614AH | 01 | Initial issue of report | Aug. 31, 2023 |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |



Summary of Test Result

| Report Clause | Ref Std. Clause | Test Items | Result (PASS/FAIL) | Remark |
|---------------|-----------------|---|--------------------|--------|
| 1.1.2 | 15.203 | Antenna Requirement | PASS | - |
| 3.1 | 15.207 | AC Power-line Conducted Emissions | PASS | - |
| 3.2 | 15.247(a) | 20dB Bandwidth | PASS | - |
| 3.2 | 15.247(a) | Carrier Frequency Separation | PASS | - |
| 3.3 | 15.247(b) | Maximum Conducted Output Power | PASS | - |
| 3.4 | 15.247(e) | Power Spectral Density | PASS | - |
| 3.5 | 15.247(a) | Time of Occupancy (Dwell Time) | PASS | - |
| 3.6 | 15.247(d) | Emissions in Non-restricted Frequency Bands | PASS | - |
| 3.7 | 15.247(d) | Emissions in Restricted Frequency Bands | PASS | - |

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the chapter "Measurement Uncertainty".

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: Sam Chen**Report Producer: Sophia Shiung**



1 General Description

1.1 Information

1.1.1 RF General Information

| Frequency Range (MHz) | Ch. Frequency (MHz) | Channel Number | Modulation | Data Rate (Kbps) |
|-----------------------|---------------------|----------------|------------|------------------|
| 902 MHz – 928 MHz | 920, 927.35 | 00, 49 [2] | BPSK | 40 |

1.1.2 Antenna Information

| Ant. | Port | | | Brand | Model Name | Antenna Type | Connector | Gain (dBi) |
|------|------------------|--------|-------|-------|--------------------|--------------|-----------|------------|
| | WLAN / Bluetooth | Thread | Sub-G | | | | | |
| 1 | 1 | - | - | PSA | RFMTA160900NNLB001 | PIFA | N/A | Note 1 |
| 2 | - | 1 | - | PSA | RFPCA361205IMAB401 | PIFA | I-PEX | |
| 3 | - | - | 1 | PSA | RFMTA341100NNUB001 | PIFA | N/A | |

| Ant. | Brand | Model Name | Antenna Type | Connector | Gain (dBi) |
|------|-----------|------------|--------------|-----------|------------|
| 4 | Socionext | SC1233AR3 | Chip | N/A | 2 |

Note 1:

| Ant. | Antenna Gain (dBi) | | | | |
|------|--------------------|------|-----------|--------|-------|
| | WLAN | | Bluetooth | Thread | Sub-G |
| | 2.4GHz | 5GHz | | | |
| 1 | 2.81 | 4.99 | 2.81 | - | - |
| 2 | - | - | - | 3.00 | - |
| 3 | - | - | - | - | 1.66 |

Note 2: The above information was declared by manufacturer.

Note 3: **For 2.4GHz function:**

For IEEE 802.11 b/g/n (TX/1RX):

Only Port 1 can be used as transmitting/receiving antenna.

For 5GHz function:

For IEEE 802.11a/n/ac (1TX/1RX):

Only Port 1 can be used as transmitting/receiving antenna.

For bluetooth function (1TX/1RX):

Only Port 1 can be used as transmitting/receiving antenna.

For Thread function (1TX/1RX):

Only Port 1 can be used as transmitting/receiving antenna.

For Sub-G function (1TX/1RX):

Only Port 1 can be used as transmitting/receiving antenna.

For 24GHz function (1TX/2RX):

Only Ant. 4 can be used as transmitting/receiving antenna.



1.1.3 Mode Test Duty Cycle

| Mode | DC | DCF(dB) | T(s) | VBW(Hz) ≥ 1/T |
|---------------------|----|---------|----------------|----------------|
| Sub-G (Hybrid mode) | 1 | 0 | n/a (DC>=0.98) | n/a (DC>=0.98) |

Note:

- ◆ DC is Duty Cycle.
- ◆ DCF is Duty Cycle Factor.

1.1.4 EUT Operational Condition

| | | | |
|------------------------------|---|--------------------------|----------------|
| EUT Power Type | From host system (16~24 Vac) | | |
| Function | <input checked="" type="checkbox"/> Point-to-multipoint | <input type="checkbox"/> | Point-to-point |
| Test Software Version | Tera Tern Ver:4.75 | | |

Note: The above information was declared by manufacturer.



1.2 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR FCC Part 15.247
- ♦ ANSI C63.10-2013

The following reference test guidance is not within the scope of accreditation of TAF.

- ♦ FCC KDB 558074 D01 v05r02
- ♦ FCC KDB 414788 D01 v01r01

1.3 Testing Location Information

| Testing Location Information | |
|---|--|
| Test Lab. : Sporton International Inc. Hsinchu Laboratory | |
| Hsinchu | ADD: No.8, Ln. 724, Bo'ai St., Zhubei City, Hsinchu County 302010, Taiwan (R.O.C.) |
| (TAF: 3787) | TEL: 886-3-656-9065 FAX: 886-3-656-9085 |
| | Test site Designation No. TW3787 with FCC. |
| | Conformity Assessment Body Identifier (CABID) TW3787 with ISED. |

| Test Condition | Test Site No. | Test Engineer | Test Environment (°C / %) | Test Date |
|-----------------|---------------|---------------|---------------------------|---------------------------------|
| RF Conducted | TH01-CB | Jay Lo | 23.1~24.5 / 68~72 | Jul. 31, 2023~ Aug. 04, 2023 |
| Radiated < 1GHz | 03CH05-CB | George Fan | 22.9~23.6 / 60~63 | Jul. 31, 2023~ Aug. 03, 2023 |
| Radiated > 1GHz | 03CH05-CB | George Fan | 20~21 / 55~58 | Jul. 21, 2023~ Jul. 26, 2023 |
| AC Conduction | CO01-CB | Ryan Huang | 22~23 / 56~57 | Aug. 07, 2023 |

1.4 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

| Test Items | Uncertainty | Remark |
|--------------------------------------|-------------|--------------------------|
| Conducted Emission (150kHz ~ 30MHz) | 3.4 dB | Confidence levels of 95% |
| Radiated Emission (9kHz ~ 30MHz) | 3.7 dB | Confidence levels of 95% |
| Radiated Emission (30MHz ~ 1,000MHz) | 5.1 dB | Confidence levels of 95% |
| Radiated Emission (1GHz ~ 18GHz) | 4.1 dB | Confidence levels of 95% |
| Radiated Emission (18GHz ~ 40GHz) | 4.2 dB | Confidence levels of 95% |
| Conducted Emission | 3.1 dB | Confidence levels of 95% |
| Output Power Measurement | 0.8 dB | Confidence levels of 95% |
| Power Density Measurement | 3.1 dB | Confidence levels of 95% |
| Bandwidth Measurement | 2.2% | Confidence levels of 95% |



2 Test Configuration of EUT

2.1 Test Channel Mode

| Mode | Power Setting |
|---------------------|---------------|
| Sub-G (Hybrid mode) | - |
| 920MHz | 40 |
| 927.35MHz | 40 |

2.2 The Worst Case Measurement Configuration

| The Worst Case Mode for Following Conformance Tests | |
|---|---|
| Tests Item | AC power-line conducted emissions |
| Condition | AC power-line conducted measurement for line and neutral Test Voltage: 120Vac / 60Hz |
| Operating Mode | Normal Link |
| 1 | EUT_WLAN 2.4GHz + Thread + 24GHz radar |
| 2 | EUT_WLAN 5GHz + Thread + 24GHz radar |
| 3 | EUT_Bluetooth + Thread + 24GHz radar |
| Mode 3 has been evaluated to be the worst case among Mode 1~3, thus measurement for Mode 4~5 will follow this same test mode. | |
| 4 | EUT_Bluetooth + Sub-G (Hopping mode) + 24GHz radar |
| 5 | EUT_Bluetooth + Sub-G (Hybrid mode) + 24GHz radar |
| For operating, mode 3 is the worst case and it was record in this test report. | |

| The Worst Case Mode for Following Conformance Tests | |
|---|---|
| Tests Item | Maximum Conducted Output Power Power Spectral Density 20dB Bandwidth Carrier Frequency Separation Maximum Conducted Output Power Time of Occupancy (Dwell Time) Emissions in Non-restricted Frequency Bands |
| Test Condition | Conducted measurement at transmit chains |



| The Worst Case Mode for Following Conformance Tests | |
|---|---|
| Tests Item | Emissions in Restricted Frequency Bands |
| Test Condition | Radiated measurement If EUT consist of multiple antenna assembly (multiple antenna are used in EUT regardless of spatial multiplexing MIMO configuration), the radiated test should be performed with highest antenna gain of each antenna type. |
| Operating Mode < 1GHz | Normal Link |
| | After evaluating, EUT in Y axis was the worst case, so the measurement will follow this same test configuration. |
| 1 | EUT in Y axis_WLAN 2.4GHz + Thread + 24GHz radar |
| 2 | EUT in Y axis_WLAN 5GHz + Thread + 24GHz radar |
| 3 | EUT in Y axis_Bluetooth + Thread + 24GHz radar |
| Mode 3 has been evaluated to be the worst case among Mode 1~3, thus measurement for Mode 4~5 will follow this same test mode. | |
| 4 | EUT in Y axis_Bluetooth + Sub-G (Hopping mode) + 24GHz radar |
| 5 | EUT in Y axis_Bluetooth + Sub-G (Hybrid mode) + 24GHz radar |
| For operating, mode 3 is the worst case and it was record in this test report. | |
| Operating Mode > 1GHz | CTX |
| | After evaluating, EUT in Y axis was the worst case, so the measurement will follow this same test configuration. |
| 1 | EUT in Y axis |

| The Worst Case Mode for Following Conformance Tests | |
|--|---|
| Tests Item | Simultaneous Transmission Analysis - Co-location RF Exposure Evaluation |
| Operating Mode | |
| 1 | WLAN 2.4GHz + Thread + 24GHz radar |
| 2 | WLAN 2.4GHz + Sub-G (Hopping mode) + 24GHz radar |
| 3 | WLAN 2.4GHz + Sub-G (Hybrid mode) + 24GHz radar |
| 4 | WLAN 5GHz + Thread + 24GHz radar |
| 5 | WLAN 5GHz + Sub-G (Hopping mode) + 24GHz radar |
| 6 | WLAN 5GHz + Sub-G (Hybrid mode) + 24GHz radar |
| 7 | Bluetooth + Thread + 24GHz radar |
| 8 | Bluetooth + Sub-G (Hopping mode) + 24GHz radar |
| 9 | Bluetooth + Sub-G (Hybrid mode) + 24GHz radar |
| Refer to Sporton Test Report No.: FA361614 for Co-location RF Exposure Evaluation. | |



Note: The adapter was for measurement only and would not be marketed. Its information is shown as below:

| Equipment | Brand Name | Model Name |
|---------------|------------|------------|
| Power adapter | AMIGO | CT-5723-03 |

2.3 EUT Operation during Test

For CTX Mode:

The EUT was programmed to be in continuously transmitting mode.

For Normal Link Mode:

During the test, the EUT operation to normal function.

2.4 Accessories

| Accessories |
|-------------------------------------|
| CHIME adapter*1: Non-shielded, 0.2m |
| Backplate*1 |

2.5 Support Equipment

For AC Conduction:

| Support Equipment | | | | |
|-------------------|---------------|------------|------------|--------|
| No. | Equipment | Brand Name | Model Name | FCC ID |
| A | Power adapter | AMIGO | CT-5723-03 | N/A |
| B | Test fixture | NEWHOUSE | CHM1 | N/A |
| C | NB | DELL | PP13S | N/A |

For Radiated (below 1GHz):

| Support Equipment | | | | |
|-------------------|---------------|------------|------------|--------|
| No. | Equipment | Brand Name | Model Name | FCC ID |
| A | Power adapter | AMIGO | CT-5723-03 | N/A |
| B | Test fixture | NEWHOUSE | CHM1 | N/A |
| C | NB | DELL | PP13S | N/A |

For Radiated (above 1GHz):


| Support Equipment | | | | |
|-------------------|---------------|------------|---------------|--------|
| No. | Equipment | Brand Name | Model Name | FCC ID |
| A | NB | DELL | E4300 | N/A |
| B | Fixture | ALPHA | 1EBRC21T..A2G | N/A |
| C | Power adapter | AMIGO | CT-5723-03 | N/A |




For RF Conducted:

| Support Equipment | | | | |
|--------------------------|------------------|-------------------|-------------------|---------------|
| No. | Equipment | Brand Name | Model Name | FCC ID |
| A | NB | DELL | E4300 | N/A |
| B | Fixture | ALPHA | 1EBRC21T..A2G | N/A |
| C | Power adapter | AMIGO | CT-5723-03 | N/A |

2.6 Test Setup Diagram

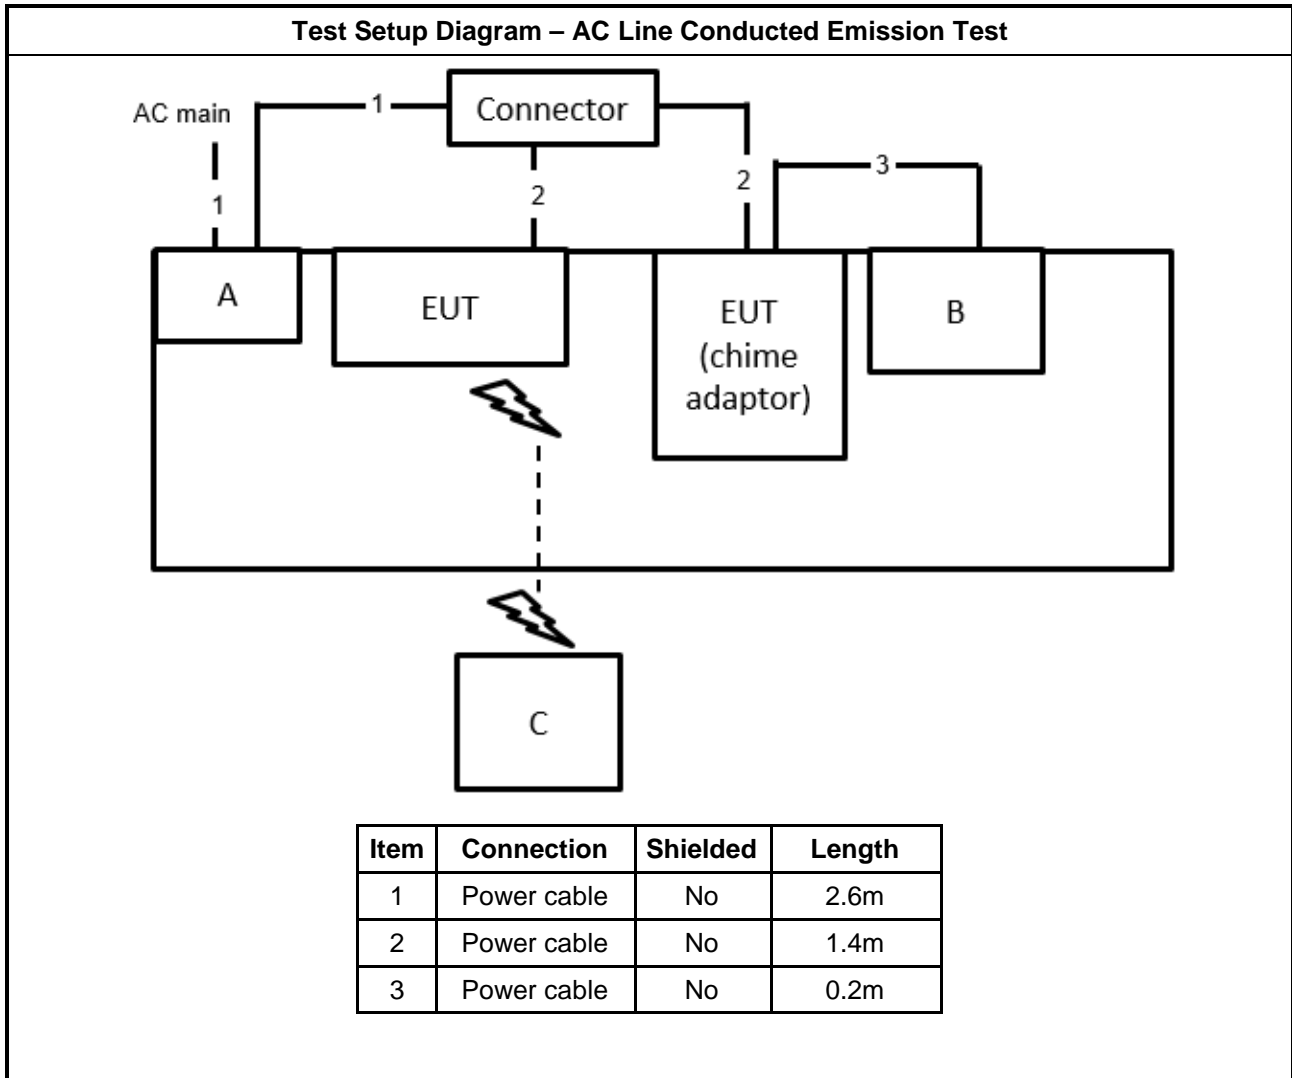


Test Setup Diagram - Radiated Test < 1GHz

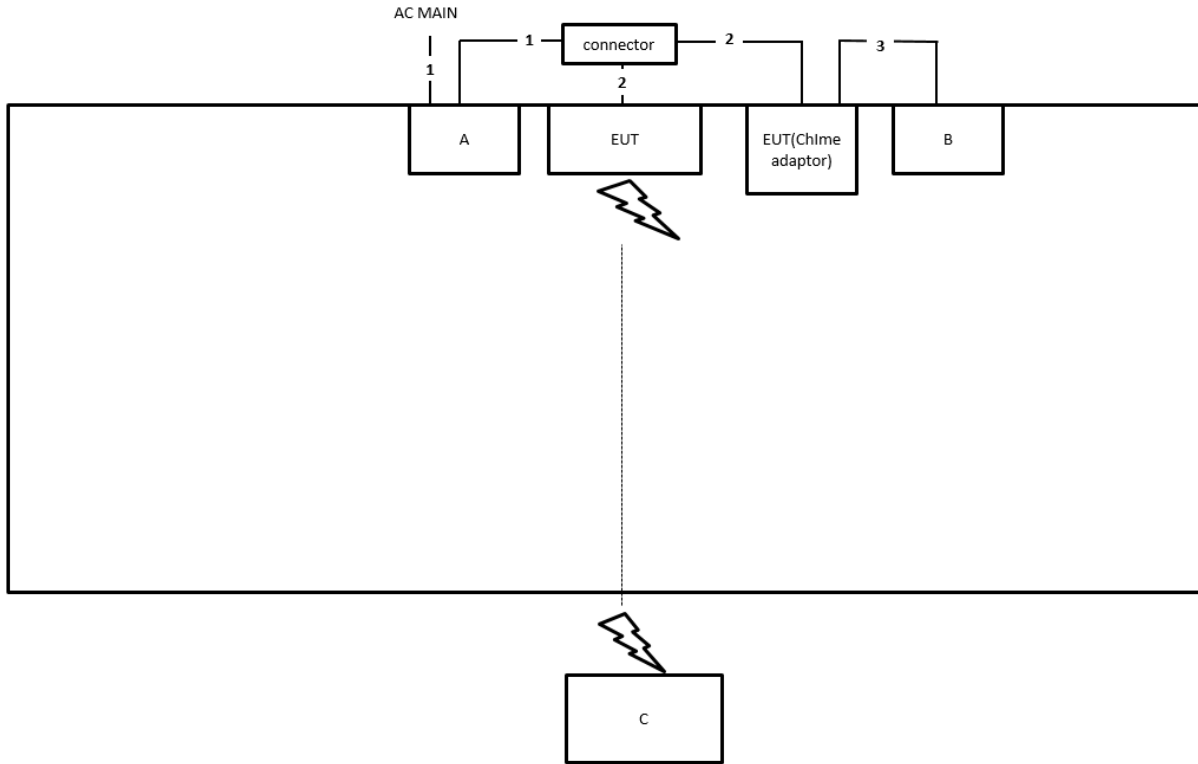

| Item | Connection | Shielded | Length |
|------|-------------|----------|--------|
| 1 | Power cable | No | 2.6m |
| 2 | Power cable | No | 1.4m |
| 3 | Power cable | No | 0.2m |

Test Setup Diagram - Radiated Test > 1GHz

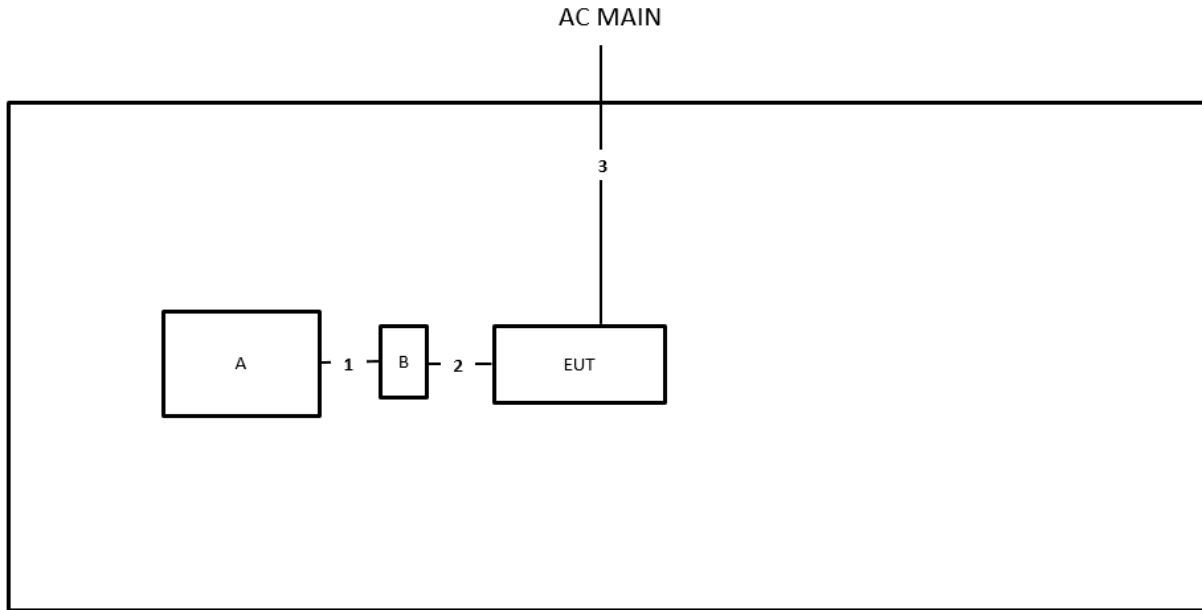

| Item | Connection | Shielded | Length |
|------|-------------|----------|--------|
| 1 | USB cable | No | 0.5m |
| 2 | PIN cable | No | 0.15m |
| 3 | Power cable | No | 2.6m |



3 Test Result

3.1 AC Power-line Conducted Emissions

3.1.1 AC Power-line Conducted Emissions Limit

| AC Power-line Conducted Emissions Limit | | |
|---|------------|-----------|
| Frequency Emission (MHz) | Quasi-Peak | Average |
| 0.15-0.5 | 66 - 56 * | 56 - 46 * |
| 0.5-5 | 56 | 46 |
| 5-30 | 60 | 50 |

Note 1: * Decreases with the logarithm of the frequency.


3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.1.3 Test Procedures

| Test Method |
|--|
| ▪ Refer as ANSI C63.10-2013 , clause 6.2 for AC power-line conducted emissions. |

3.1.4 Test Setup

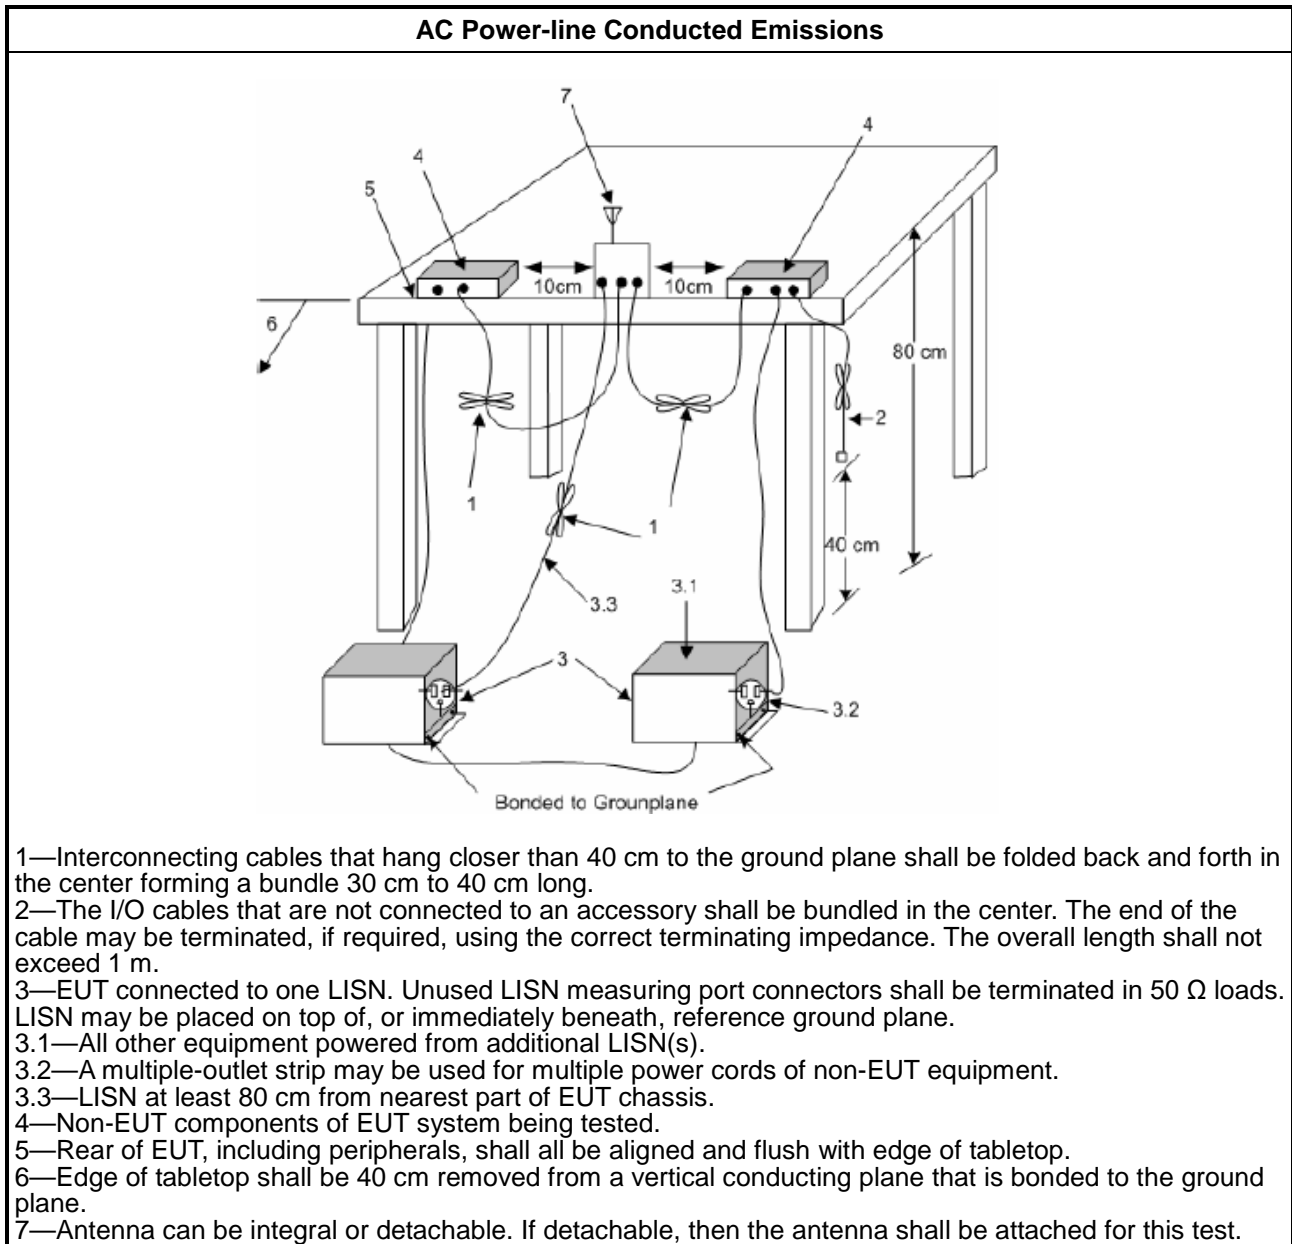

3.1.5 Measurement Results Calculation

The measured Level is calculated using:

- a. Corrected Reading: LISN Factor (LISN) + Attenuator (AT/AUX) + Cable Loss (CL) + Read Level (Raw) = Level
- b. Margin = -Limit + Level

3.1.6 Test Result of AC Power-line Conducted Emissions

Refer as Appendix A

3.2 20dB Bandwidth and Carrier Frequency Separation

3.2.1 20dB Bandwidth and Carrier Frequency Separation Limit

| 20dB Bandwidth and Carrier Frequency Separation Limit for Frequency Hopping Systems | |
|---|--|
| <ul style="list-style-type: none"> 902-928 MHz Band: <ul style="list-style-type: none"> $N \geq 50$ and $ChS \geq MAX$ (20 dB bandwidth, 25 kHz); 20 dB bandwidth \leq 250 kHz. $50 > N \geq 25$ and $ChS \geq MAX$ (20 dB bandwidth, 25 kHz); 20 dB bandwidth $>$ 250 kHz. | |
| <ul style="list-style-type: none"> 2400-2483.5 MHz Band: <ul style="list-style-type: none"> $N \geq 75$ and $ChS \geq MAX$ (20 dB bandwidth, 25 kHz). $75 > N \geq 15$ and $ChS \geq MAX$ (20 dB bandwidth 2/3, 25 kHz). | |
| <ul style="list-style-type: none"> 5725-5850 MHz Band: <ul style="list-style-type: none"> $N \geq 75$ and $ChS \geq MAX$ (20 dB bandwidth, 25 kHz); 20 dB bandwidth \leq 1 MHz. | |
| N: Number of Hopping Frequencies; ChS: Hopping Channel Separation | |


3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.2.3 Test Procedures

| Test Method |
|---|
| <ul style="list-style-type: none"> Refer as ANSI C63.10-2013, clause 6.9.1 for 20 dB bandwidth measurement. |
| <ul style="list-style-type: none"> Refer as ANSI C63.10-2013, clause 7.8.2 for carrier frequency separation measurement. |

3.2.4 Test Setup

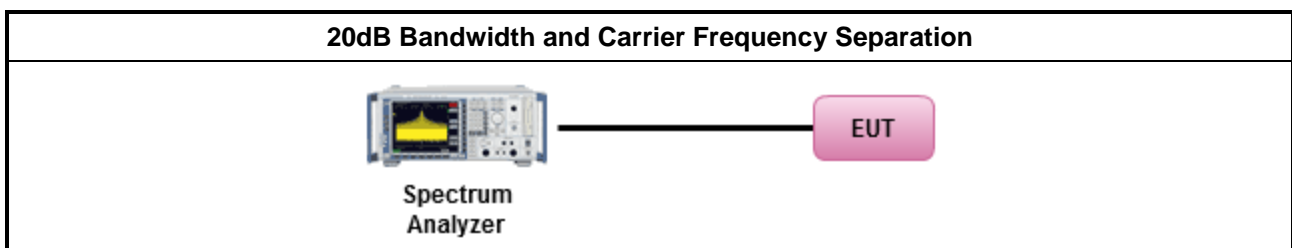

3.2.5 Test Result of 20dB Bandwidth

Refer as Appendix B

3.2.6 Test Result of Carrier Frequency Separation

Refer as Appendix B



3.3 Maximum Conducted Output Power

3.3.1 Maximum Conducted Output Power Limit

| Maximum Conducted Output Power Limit | |
|---|---|
| | <ul style="list-style-type: none"> ▪ If $G_{TX} \leq 6$ dBi, then $P_{Out} \leq 30$ dBm (1 W) |
| | <ul style="list-style-type: none"> ▪ Point-to-multipoint systems (P2M): If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$ dBm |
| | <ul style="list-style-type: none"> ▪ Point-to-point systems (P2P): If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm |
| | <ul style="list-style-type: none"> ▪ Smart antenna system (SAS): |
| | <ul style="list-style-type: none"> - Single beam: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm |
| | <ul style="list-style-type: none"> - Overlap beam: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm |
| | <ul style="list-style-type: none"> - Aggregate power on all beams: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3 + 8$ dB dBm |
| P_{Out} = maximum peak conducted output power or maximum conducted output power in dBm, G_{TX} = the maximum transmitting antenna directional gain in dBi. | |

3.3.2 Measuring Instruments


Refer a test equipment and calibration data table in this test report.



3.3.3 Test Procedures

| Test Method | |
|--|--|
| <ul style="list-style-type: none"> ▪ Maximum Peak Conducted Output Power | |
| | <input type="checkbox"/> Refer as FCC KDB 558074, clause 8.3.1.1 & C63.10 clause 11.9.1.1 (RBW ≥ EBW method). |
| | <input type="checkbox"/> Refer as FCC KDB 558074, clause 8.3.1.3 & C63.10 clause 11.9.1.3 (peak power meter). |
| <ul style="list-style-type: none"> ▪ Maximum Conducted Output Power | |
| [duty cycle ≥ 98% or external video / power trigger] | |
| | <input type="checkbox"/> Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.2 Method AVGSA-1. |
| | <input type="checkbox"/> Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.3 Method AVGSA-1A. (alternative) |
| duty cycle < 98% and average over on/off periods with duty factor | |
| | <input type="checkbox"/> Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.4 Method AVGSA-2. |
| | <input type="checkbox"/> Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.5 Method AVGSA-2A (alternative) |
| | <input type="checkbox"/> Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.6 Method AVGSA-3 |
| | <input type="checkbox"/> Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.7 Method AVGSA-3A (alternative) |
| Measurement using a power meter (PM) | |
| | <input checked="" type="checkbox"/> Refer as FCC KDB 558074, clause 8.3.2.3 & C63.10 clause 11.9.2.3.1 Method AVGPM (using an RF average power meter). |
| | <input type="checkbox"/> Refer as FCC KDB 558074, clause 8.3.2.3 & C63.10 clause 11.9.2.3.2 Method AVGPM-G (using an gate RF average power meter). |
| <ul style="list-style-type: none"> ▪ For conducted measurement. | |
| <ul style="list-style-type: none"> ▪ If the EUT supports multiple transmit chains using options given below: Refer as FCC KDB 662911, In-band power measurements. Using the measure-and-sum approach, measured all transmit ports individually. Sum the power (in linear power units e.g., mW) of all ports for each individual sample and save them. | |
| <ul style="list-style-type: none"> ▪ If multiple transmit chains, EIRP calculation could be following as methods: $P_{total} = P_1 + P_2 + \dots + P_n$ (calculated in linear unit [mW] and transfer to log unit [dBm]) $EIRP_{total} = P_{total} + DG$ | |

3.3.4 Test Setup

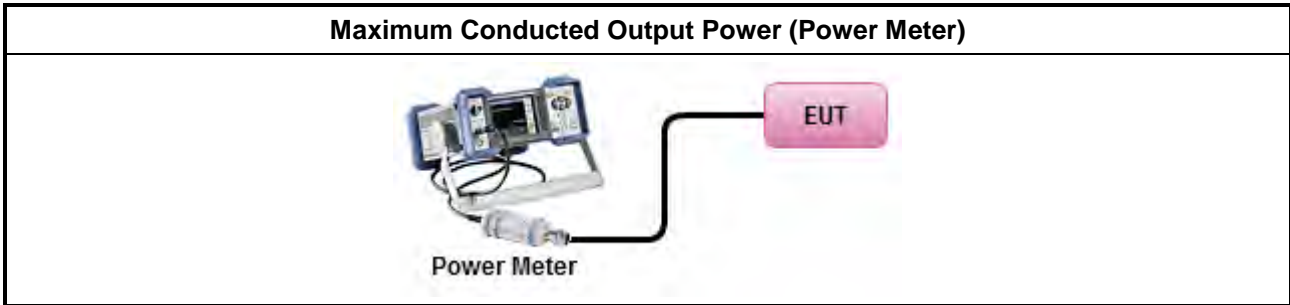

3.3.5 Test Result of Maximum Conducted Output Power

Refer as Appendix C



3.4 Power Spectral Density

3.4.1 Power Spectral Density Limit

| Power Spectral Density Limit |
|---|
| <ul style="list-style-type: none"> Power Spectral Density (PSD) ≤ 8 dBm/3kHz |


3.4.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.4.3 Test Procedures

| Test Method | | | |
|---|--|---|--|
| <ul style="list-style-type: none"> Peak power spectral density procedures that the same method as used to determine the conducted output power. If maximum peak conducted output power was measured to demonstrate compliance to the output power limit, then the peak PSD procedure below (Method PKPSD) shall be used. If maximum conducted output power was measured to demonstrate compliance to the output power limit, then one of the average PSD procedures shall be used, as applicable based on the following criteria (the peak PSD procedure is also an acceptable option). | | | |
| <input checked="" type="checkbox"/> Refer as FCC KDB 558074, clause 8.4 & C63.10 clause 11.10 Method Max. PKPSD. | | | |
| <ul style="list-style-type: none"> For conducted measurement. <ul style="list-style-type: none"> If The EUT supports multiple transmit chains using options given below: <table border="1"> <tbody> <tr> <td> <input checked="" type="checkbox"/> Option 1: Measure and sum the spectra across the outputs. Refer as FCC KDB 662911, In-band power spectral density (PSD). Sample all transmit ports simultaneously using a spectrum analyzer for each transmit port. Where the trace bin-by-bin of each transmit port summing can be performed. (i.e., in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3, and so on up to the NTX output to obtain the value for the first frequency bin of the summed spectrum.). Add up the amplitude (power) values for the different transmit chains and use this as the new data trace. </td> </tr> <tr> <td> <input type="checkbox"/> Option 2: Measure and sum spectral maxima across the outputs. With this technique, spectra are measured at each output of the device at the required resolution bandwidth. The maximum value (peak) of each spectrum is determined. These maximum values are then summed mathematically in linear power units across the outputs. These operations shall be performed separately over frequency spans that have different out-of-band or spurious emission limits, </td> </tr> <tr> <td> <input type="checkbox"/> Option 3: Measure and add 10 log(N) dB, where N is the number of transmit chains. Refer as FCC KDB 662911, In-band power spectral density (PSD). Performed at each transmit chains and each transmit chains shall be compared with the limit have been reduced with 10 log(N). Or each transmit chains shall be add 10 log(N) to compared with the limit. </td> </tr> </tbody> </table> | <input checked="" type="checkbox"/> Option 1: Measure and sum the spectra across the outputs. Refer as FCC KDB 662911, In-band power spectral density (PSD). Sample all transmit ports simultaneously using a spectrum analyzer for each transmit port. Where the trace bin-by-bin of each transmit port summing can be performed. (i.e., in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3, and so on up to the NTX output to obtain the value for the first frequency bin of the summed spectrum.). Add up the amplitude (power) values for the different transmit chains and use this as the new data trace. | <input type="checkbox"/> Option 2: Measure and sum spectral maxima across the outputs. With this technique, spectra are measured at each output of the device at the required resolution bandwidth. The maximum value (peak) of each spectrum is determined. These maximum values are then summed mathematically in linear power units across the outputs. These operations shall be performed separately over frequency spans that have different out-of-band or spurious emission limits, | <input type="checkbox"/> Option 3: Measure and add 10 log(N) dB, where N is the number of transmit chains. Refer as FCC KDB 662911, In-band power spectral density (PSD). Performed at each transmit chains and each transmit chains shall be compared with the limit have been reduced with 10 log(N). Or each transmit chains shall be add 10 log(N) to compared with the limit. |
| <input checked="" type="checkbox"/> Option 1: Measure and sum the spectra across the outputs. Refer as FCC KDB 662911, In-band power spectral density (PSD). Sample all transmit ports simultaneously using a spectrum analyzer for each transmit port. Where the trace bin-by-bin of each transmit port summing can be performed. (i.e., in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3, and so on up to the NTX output to obtain the value for the first frequency bin of the summed spectrum.). Add up the amplitude (power) values for the different transmit chains and use this as the new data trace. | | | |
| <input type="checkbox"/> Option 2: Measure and sum spectral maxima across the outputs. With this technique, spectra are measured at each output of the device at the required resolution bandwidth. The maximum value (peak) of each spectrum is determined. These maximum values are then summed mathematically in linear power units across the outputs. These operations shall be performed separately over frequency spans that have different out-of-band or spurious emission limits, | | | |
| <input type="checkbox"/> Option 3: Measure and add 10 log(N) dB, where N is the number of transmit chains. Refer as FCC KDB 662911, In-band power spectral density (PSD). Performed at each transmit chains and each transmit chains shall be compared with the limit have been reduced with 10 log(N). Or each transmit chains shall be add 10 log(N) to compared with the limit. | | | |

3.4.4 Test Setup

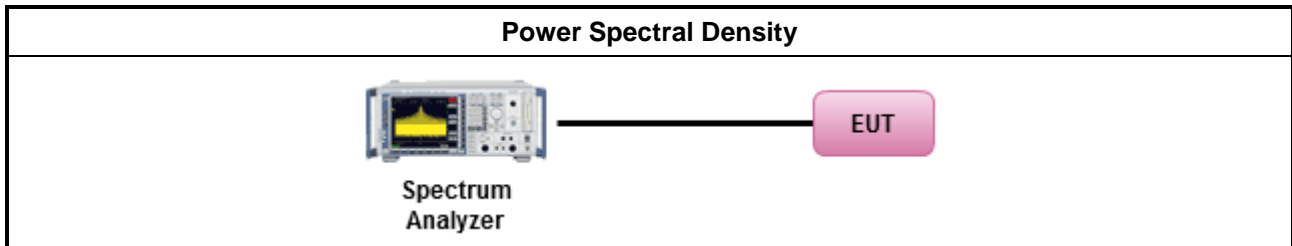

3.4.5 Test Result of Power Spectral Density

Refer as Appendix D

3.5 Time of Occupancy (Dwell Time)

3.5.1 Time of Occupancy (Dwell Time) Limit

| 20dB Bandwidth and Carrier Frequency Separation Limit for Frequency Hopping Systems | |
|---|--------------------------|
| ▪ 902-928 MHz Band: | |
| | ▪ 0.4s in N x 0.4 period |
| ▪ 2400-2483.5 MHz Band: | |
| | ▪ 0.4s in N x 0.4 period |
| ▪ 5725-5850 MHz Band: | |
| | ▪ 0.4s in N x 0.4 period |
| N: Number of Hopping Frequencies | |


3.5.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.5.3 Test Procedures

| Test Method | |
|-------------|--|
| ▪ | Refer as ANSI C63.10-2013, clause 7.8.4 for dwell time measurement. |
| ▪ | Bluetooth ACL packets can be 1, 3, or 5 time slots. Following as dwell time. Operate DH5 at maximum dwell time and maximum duty cycle. |
| ▪ | The DH5 packet can cover up to 5 time slots. Operate DH5 at maximum dwell time and maximum duty cycle. A maximum length packet has duration of 5 time slots. The hopping rate is 1600 hops/second so the maximum dwell time is 5/1600 seconds, or 3.125ms. DH5 Packet permit maximum $1600 / 79 / 6 = 3.37$ hops per second in each channel. |

3.5.4 Test Setup

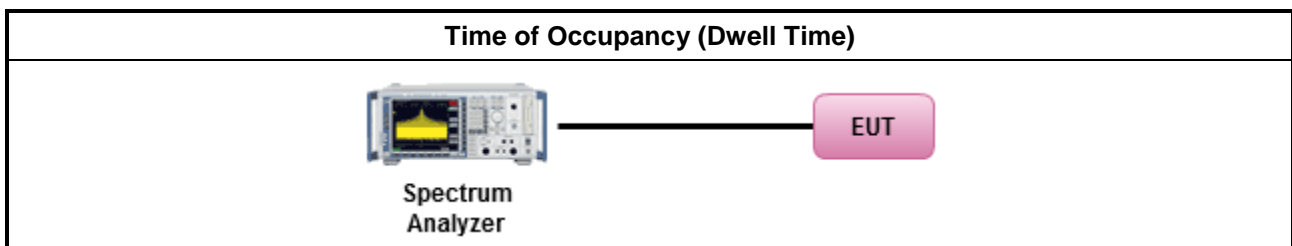

3.5.5 Test Result of Time of Occupancy (Dwell Time)

Refer as Appendix E

3.6 Emissions in Non-restricted Frequency Bands

3.6.1 Emissions in Non-restricted Frequency Bands Limit

| Un-restricted Band Emissions Limit | |
|------------------------------------|-------------|
| RF output power procedure | Limit (dBc) |
| Peak output power procedure | 20 |
| Average output power procedure | 30 |

Note 1: If the peak output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum measured in-band peak PSD level.

Note 2: If the average output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the power in any 100 kHz outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum measured in-band average PSD level.


3.6.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.6.3 Test Procedures

| Test Method |
|---|
| <ul style="list-style-type: none"> Refer as ANSI C63.10-2013, clause 7.8.8 for unwanted emissions into non-restricted bands. |

3.6.4 Test Setup

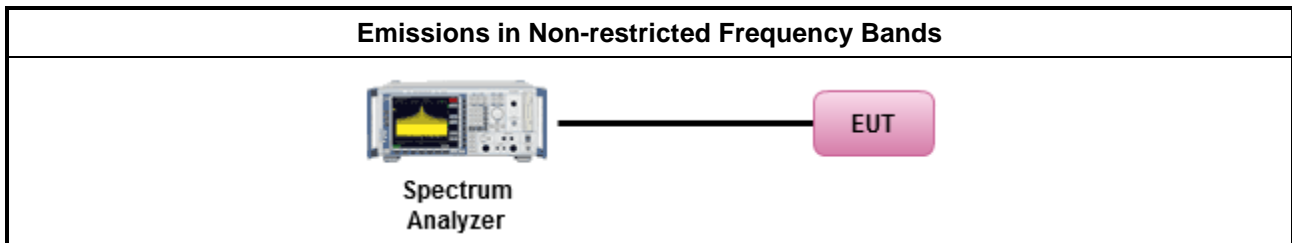

3.6.5 Test Result of Emissions in Non-restricted Frequency Bands

Refer as Appendix F



3.7 Emissions in Restricted Frequency Bands

3.7.1 Emissions in Restricted Frequency Bands Limit

| Restricted Band Emissions Limit | | | |
|---------------------------------|-----------------------|-------------------------|----------------------|
| Frequency Range (MHz) | Field Strength (uV/m) | Field Strength (dBuV/m) | Measure Distance (m) |
| 0.009~0.490 | 2400/F(kHz) | 48.5 - 13.8 | 300 |
| 0.490~1.705 | 24000/F(kHz) | 33.8 - 23 | 30 |
| 1.705~30.0 | 30 | 29 | 30 |
| 30~88 | 100 | 40 | 3 |
| 88~216 | 150 | 43.5 | 3 |
| 216~960 | 200 | 46 | 3 |
| Above 960 | 500 | 54 | 3 |

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB / decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.


3.7.2 Measuring Instruments


Refer a test equipment and calibration data table in this test report.

3.7.3 Test Procedures

| Test Method | | | | | | | |
|-------------|--|--|--|--|--|--|---|
| | <ul style="list-style-type: none"> ▪ The average emission levels shall be measured in [hopping duty factor]. | | | | | | |
| | <ul style="list-style-type: none"> ▪ Refer as ANSI C63.10; clause 6.10.3 band-edge testing shall be performed at the lowest frequency channel and highest frequency channel within the allowed operating band. | | | | | | |
| | <ul style="list-style-type: none"> ▪ For the transmitter unwanted emissions shall be measured using following options below: <table border="1" style="width: 100%; margin-top: 5px;"> <tbody> <tr> <td style="width: 5%;"></td> <td> <ul style="list-style-type: none"> ▪ Refer as ANSI C63.10, clause 4.1.4.2.1 QP value. </td> </tr> <tr> <td style="width: 5%;"></td> <td> <ul style="list-style-type: none"> ▪ Refer as ANSI C63.10, clause 4.1.4.2.2 measurement procedure peak. </td> </tr> <tr> <td style="width: 5%;"></td> <td> <ul style="list-style-type: none"> ▪ Refer as ANSI C63.10, clause 4.1.4.2.4 average value of hopping pulsed emissions. </td> </tr> </tbody> </table> | | <ul style="list-style-type: none"> ▪ Refer as ANSI C63.10, clause 4.1.4.2.1 QP value. | | <ul style="list-style-type: none"> ▪ Refer as ANSI C63.10, clause 4.1.4.2.2 measurement procedure peak. | | <ul style="list-style-type: none"> ▪ Refer as ANSI C63.10, clause 4.1.4.2.4 average value of hopping pulsed emissions. |
| | <ul style="list-style-type: none"> ▪ Refer as ANSI C63.10, clause 4.1.4.2.1 QP value. | | | | | | |
| | <ul style="list-style-type: none"> ▪ Refer as ANSI C63.10, clause 4.1.4.2.2 measurement procedure peak. | | | | | | |
| | <ul style="list-style-type: none"> ▪ Refer as ANSI C63.10, clause 4.1.4.2.4 average value of hopping pulsed emissions. | | | | | | |

3.7.4 Test Setup

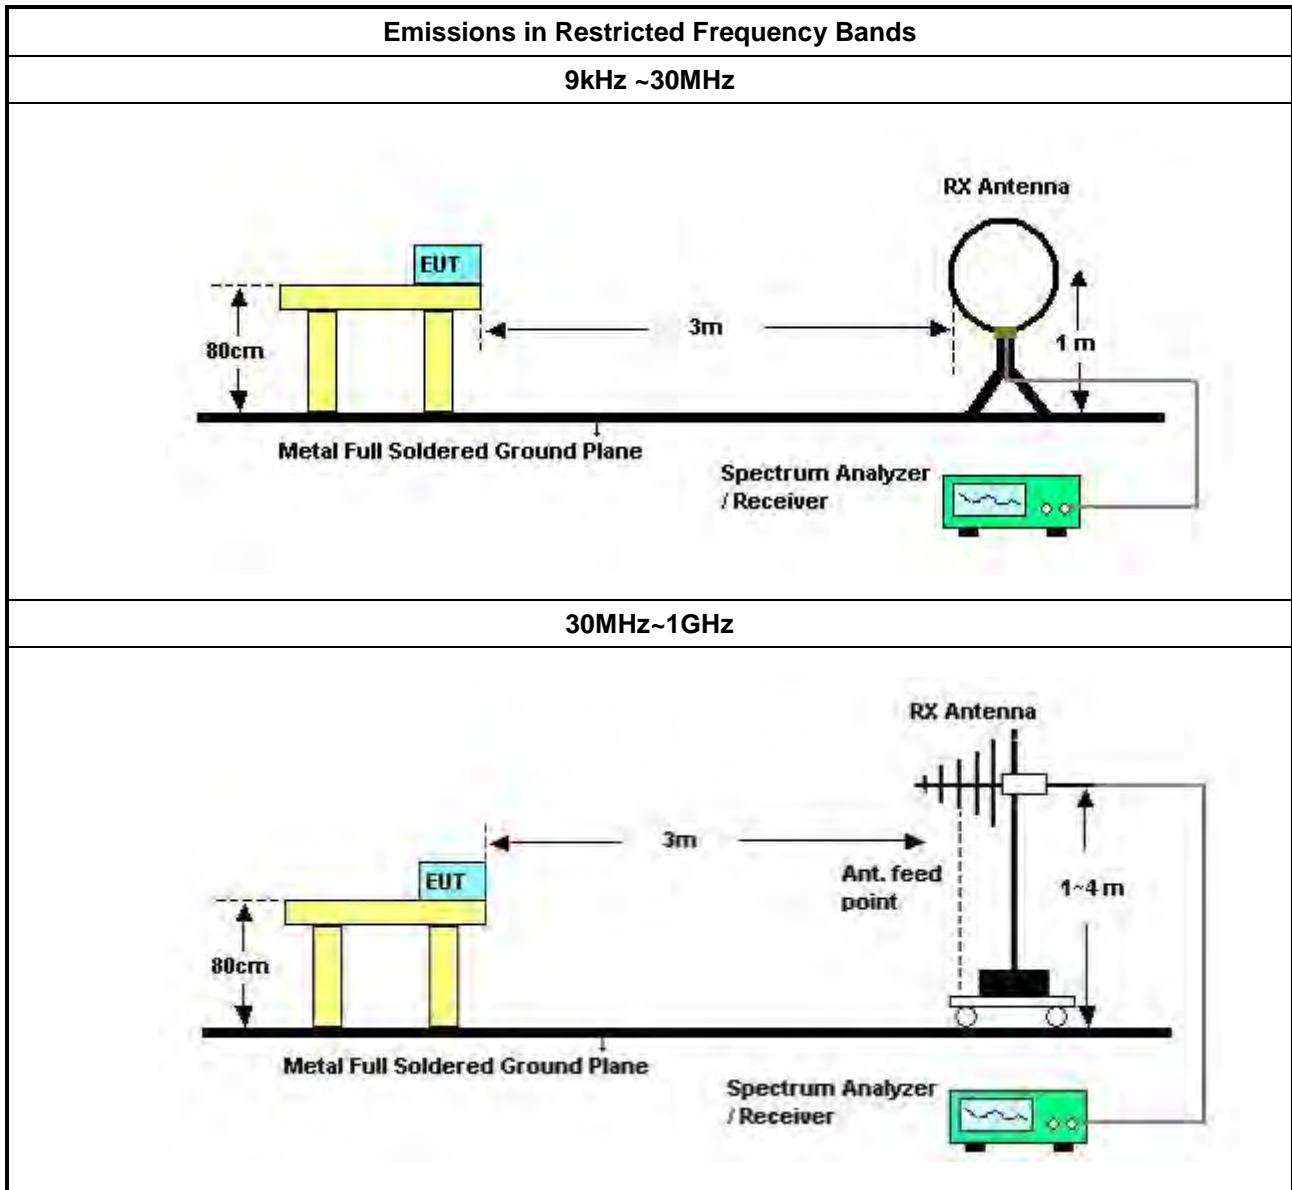

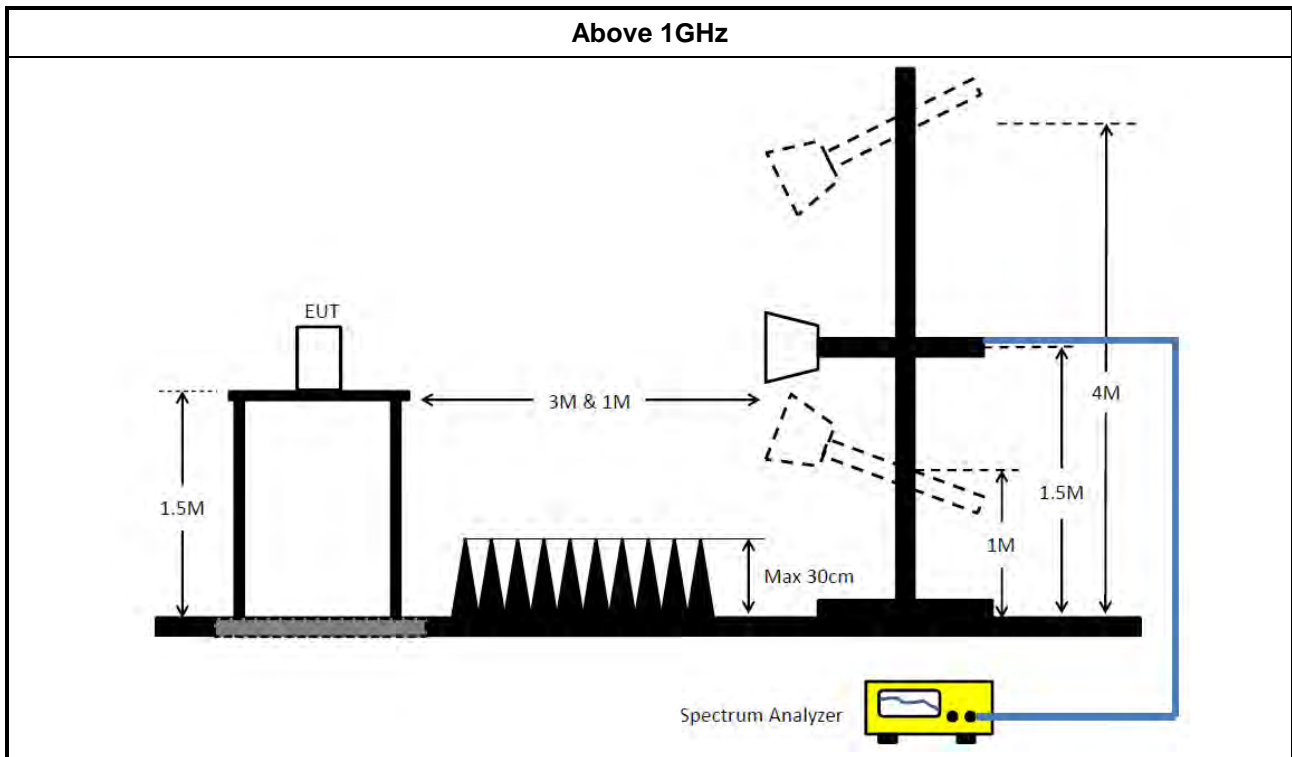

3.7.5 Measurement Results Calculation

The measured Level is calculated using:

Corrected Reading: Antenna factor (AF) + Cable loss (CL) + Read level (Raw) - Preamp factor (PA)(if applicable) = Level.

3.7.6 Emissions in Restricted Frequency Bands (Below 30MHz)

There is a comparison data of both open-field test site and alternative test site - semi-Anechoic chamber according to KDB414788 Radiated Test Site, and the result came out very similar.

All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.

The radiated emissions were investigated from 9 kHz or the lowest frequency generated within the device, up to the 10th harmonic or 40 GHz, whichever is appropriate.

3.7.7 Test Result of Emissions in Restricted Frequency Bands

Refer as Appendix G



4 Test Equipment and Calibration Data

| Instrument | Brand | Model No. | Serial No. | Characteristics | Calibration Date | Calibration Due Date | Remark |
|-----------------------------------|-----------------|--------------------|------------------|-----------------|------------------|----------------------|-----------------------|
| EMI Receiver | Agilent | N9038A | My52260123 | 9kHz ~ 8.4GHz | Feb. 20, 2023 | Feb. 19, 2024 | Conduction (CO01-CB) |
| LISN | F.C.C. | FCC-LISN-50-16-2 | 04083 | 150kHz ~ 100MHz | Feb. 16, 2023 | Feb. 15, 2024 | Conduction (CO01-CB) |
| LISN | Schwarzbeck | NSLK 8127 | 8127647 | 9kHz ~ 30MHz | Apr. 27, 2023 | Apr. 26, 2024 | Conduction (CO01-CB) |
| Pulse Limiter | Rohde & Schwarz | ESH3-Z2 | 100430 | 9kHz ~ 30MHz | Feb. 09, 2023 | Feb. 08, 2024 | Conduction (CO01-CB) |
| COND Cable | Woken | Cable | Low cable-CO01 | 9kHz ~ 30MHz | Oct. 18, 2022 | Oct. 17, 2023 | Conduction (CO01-CB) |
| Software | SPORTON | SENSE | V5.10 | - | N.C.R. | N.C.R. | Conduction (CO01-CB) |
| Loop Antenna | Teseq | HLA 6120 | 31244 | 9kHz - 30 MHz | Mar. 23, 2023 | Mar. 22, 2024 | Radiation (03CH05-CB) |
| 3m Semi Anechoic Chamber NSA | TDK | SAC-3M | 03CH05-CB | 30 MHz ~ 1 GHz | Aug. 03, 2022 | Aug. 02, 2023 | Radiation (03CH05-CB) |
| 3m Semi Anechoic Chamber NSA | TDK | SAC-3M | 03CH05-CB | 30 MHz ~ 1 GHz | Aug. 02, 2023 | Aug. 01, 2024 | Radiation (03CH05-CB) |
| 3m Semi Anechoic Chamber VSWR | TDK | SAC-3M | 03CH05-CB | 1GHz ~18GHz 3m | Nov. 06, 2022 | Nov. 05, 2023 | Radiation (03CH05-CB) |
| Bilog Antenna with 6dB Attenuator | TESEQ & EMCI | CBL 6112D & N-6-06 | 35236 & AT-N0610 | 30MHz ~ 2GHz | Mar. 24, 2023 | Mar. 23, 2024 | Radiation (03CH05-CB) |
| Horn Antenna | SCHWARZBECK | BBHA9120D | BBHA 9120 D-1291 | 1GHz~18GHz | Jun. 08, 2023 | Jun. 07, 2024 | Radiation (03CH05-CB) |
| Horn Antenna | Schwarzbeck | BBHA 9170 | BBHA9170252 | 15GHz ~ 40GHz | Aug. 22, 2022 | Aug. 21, 2023 | Radiation (03CH05-CB) |
| Amplifier | EMCI | EMC330N | 980331 | 20MHz ~ 3GHz | May 03, 2023 | May 02, 2024 | Radiation (03CH05-CB) |
| Pre-Amplifier | EMCI | EMC12630SE | 980287 | 1GHz ~ 26.5GHz | Jun. 30, 2023 | Jun. 29, 2024 | Radiation (03CH05-CB) |
| Pre-Amplifier | SGH | SGH184 | 20221107-3 | 18GHz ~ 40GHz | Nov. 16, 2022 | Nov. 15, 2023 | Radiation (03CH05-CB) |
| Spectrum Analyzer | R&S | FSP40 | 100304 | 9kHz ~ 40GHz | Apr. 18, 2023 | Apr. 17, 2024 | Radiation (03CH05-CB) |
| EMI Test Receiver | R&S | ESCS | 826547/017 | 9kHz ~ 2.75GHz | Jun. 13, 2023 | Jun. 12, 2024 | Radiation (03CH05-CB) |
| RF Cable-low | Woken | RG402 | Low Cable-04+23 | 30MHz~1GHz | Oct. 03, 2022 | Oct. 02, 2023 | Radiation (03CH05-CB) |



| Instrument | Brand | Model No. | Serial No. | Characteristics | Calibration Date | Calibration Due Date | Remark |
|-------------------|---------|-----------|------------------|-----------------|------------------|----------------------|-----------------------|
| RF Cable-high | Woken | RG402 | High Cable-28 | 1GHz~18GHz | Oct. 03, 2022 | Oct. 02, 2023 | Radiation (03CH05-CB) |
| RF Cable-high | Woken | RG402 | High Cable-04+28 | 1GHz~18GHz | Oct. 03, 2022 | Oct. 02, 2023 | Radiation (03CH05-CB) |
| High Cable | Woken | WCA0929M | 40G#5+6 | 1GHz ~ 40 GHz | Dec. 07, 2022 | Dec. 06, 2023 | Radiation (03CH05-CB) |
| High Cable | Woken | WCA0929M | 40G#5 | 1GHz ~ 40 GHz | Dec. 07, 2022 | Dec. 06, 2023 | Radiation (03CH05-CB) |
| High Cable | Woken | WCA0929M | 40G#6 | 1GHz ~ 40 GHz | Dec. 07, 2022 | Dec. 06, 2023 | Radiation (03CH05-CB) |
| Test Software | SPORTON | SENSE | V5.10 | - | N.C.R. | N.C.R. | Radiation (03CH05-CB) |
| Spectrum analyzer | R&S | FSV40 | 100979 | 9kHz~40GHz | May 29, 2023 | May 28, 2024 | Conducted (TH01-CB) |
| Switch | SPTCB | SP-SWI | SWI-01 | 1 GHz ~26.5 GHz | Oct. 04, 2022 | Oct. 03, 2023 | Conducted (TH01-CB) |
| RF Cable-high | Woken | RG402 | High Cable-06 | 1 GHz – 18 GHz | Oct. 03, 2022 | Oct. 02, 2023 | Conducted (TH01-CB) |
| RF Cable-high | Woken | RG402 | High Cable-07 | 1 GHz – 18 GHz | Oct. 03, 2022 | Oct. 02, 2023 | Conducted (TH01-CB) |
| RF Cable-high | Woken | RG402 | High Cable-08 | 1 GHz – 18 GHz | Oct. 03, 2022 | Oct. 02, 2023 | Conducted (TH01-CB) |
| RF Cable-high | Woken | RG402 | High Cable-09 | 1 GHz – 18 GHz | Oct. 03, 2022 | Oct. 02, 2023 | Conducted (TH01-CB) |
| RF Cable-high | Woken | RG402 | High Cable-10 | 1 GHz – 18 GHz | Oct. 03, 2022 | Oct. 02, 2023 | Conducted (TH01-CB) |
| RF Cable-high | Woken | RG402 | High Cable-30 | 1 GHz – 18 GHz | Oct. 03, 2022 | Oct. 02, 2023 | Conducted (TH01-CB) |
| Power Sensor | Agilent | E9327A | US40442088 | 50MHz~18GHz | Feb. 22, 2023 | Feb. 21, 2024 | Conducted (TH01-CB) |
| Power Meter | Agilent | E4416A | GB41291199 | 50MHz~18GHz | Feb. 22, 2023 | Feb. 21, 2024 | Conducted (TH01-CB) |
| Test Software | SPORTON | SENSE | V5.10 | - | N.C.R. | N.C.R. | Conducted (TH01-CB) |


Note: Calibration Interval of instruments listed above is one year.


NCR means Non-Calibration required.



Summary

| Mode | Result | Type | Freq (Hz) | Level (dBuV) | Limit (dBuV) | Margin (dB) | Condition |
|--------|--------|------|-----------|--------------|--------------|-------------|-----------|
| Mode 3 | Pass | QP | 204k | 55.40 | 63.44 | -8.04 | Neutral |

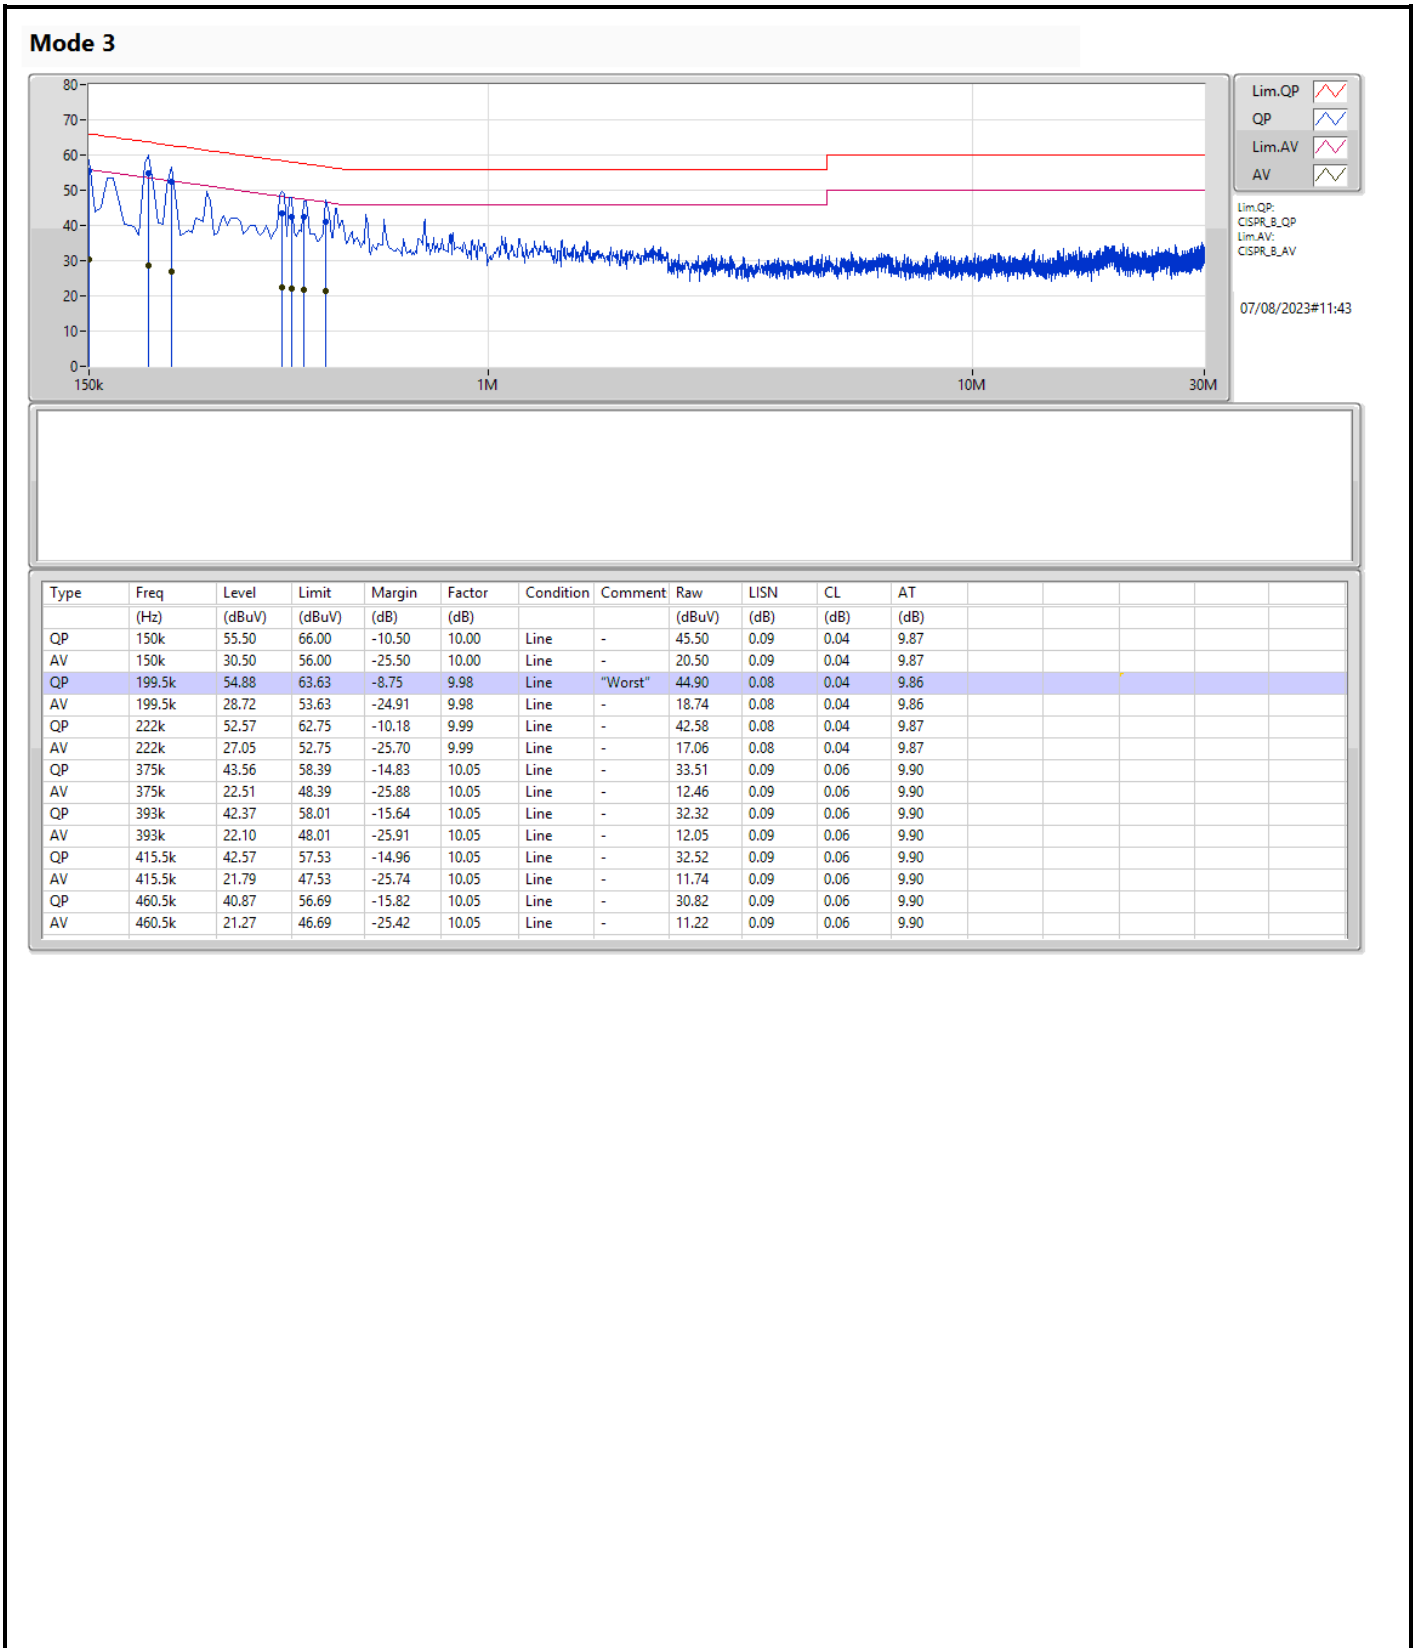

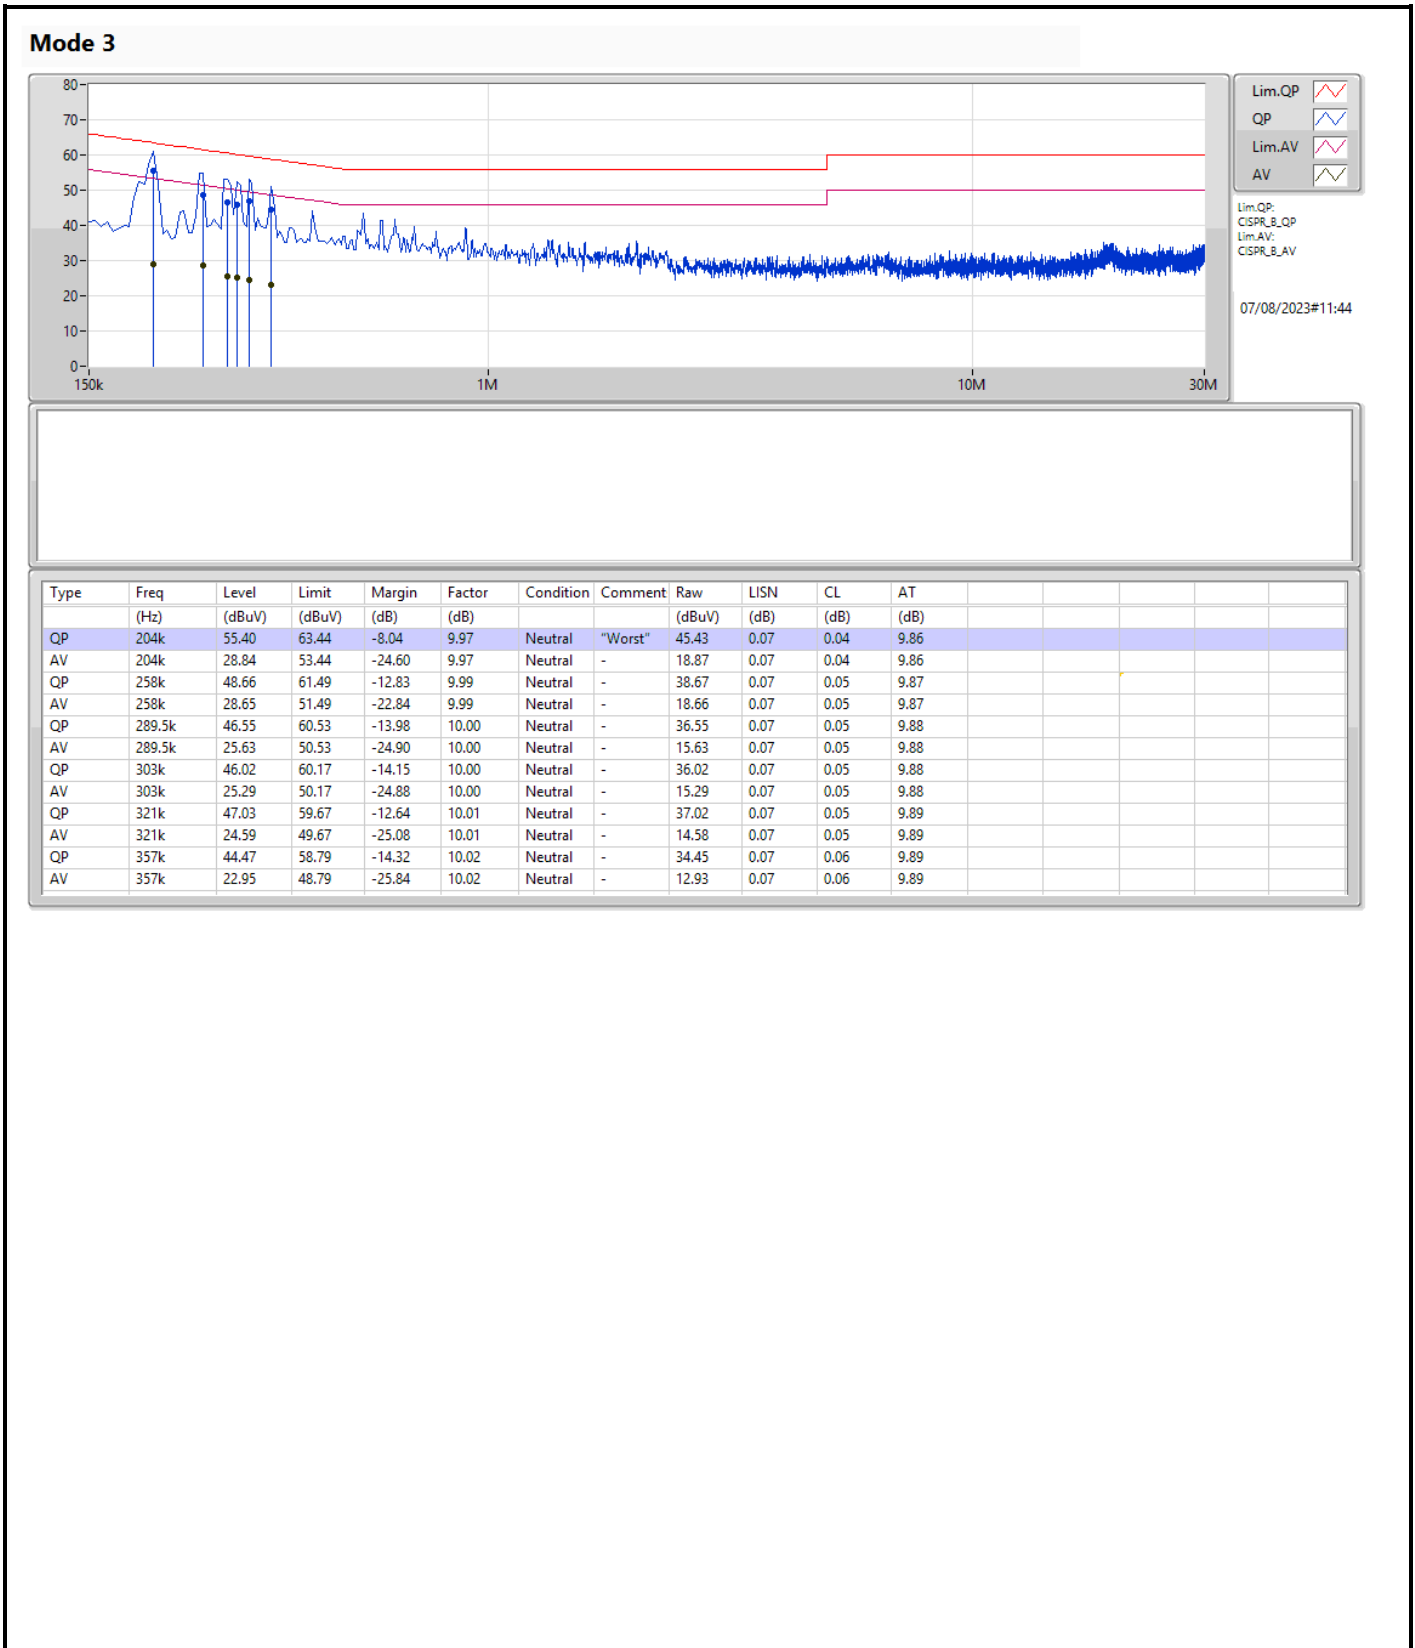



Summary

| Mode | Max-N dB (Hz) | Max-OBW (Hz) | ITU-Code | Min-N dB (Hz) | Min-OBW (Hz) |
|------------|------------------|-----------------|----------|------------------|-----------------|
| 902-928MHz | - | - | - | - | - |
| Sub-G | 304.844k | 89.017k | 89K0G1D | 304.531k | 88.308k |


Max-N dB = Maximum 20dB down bandwidth; Max-OBW = Maximum 99% occupied bandwidth;
Min-N dB = Minimum 20dB down bandwidth; Min-OBW = Minimum 99% occupied bandwidth



Result

| Mode | Result | Limit (Hz) | Port 1-N dB (Hz) | Port 1-OBW (Hz) |
|-----------|--------|------------|------------------|-----------------|
| Sub-G | - | - | - | - |
| 920MHz | Pass | Inf | 304.844k | 88.308k |
| 927.35MHz | Pass | Inf | 304.531k | 89.017k |

Port X-N dB = Port X 20dB down bandwidth;
Port X-OBW = Port X 99% occupied bandwidth

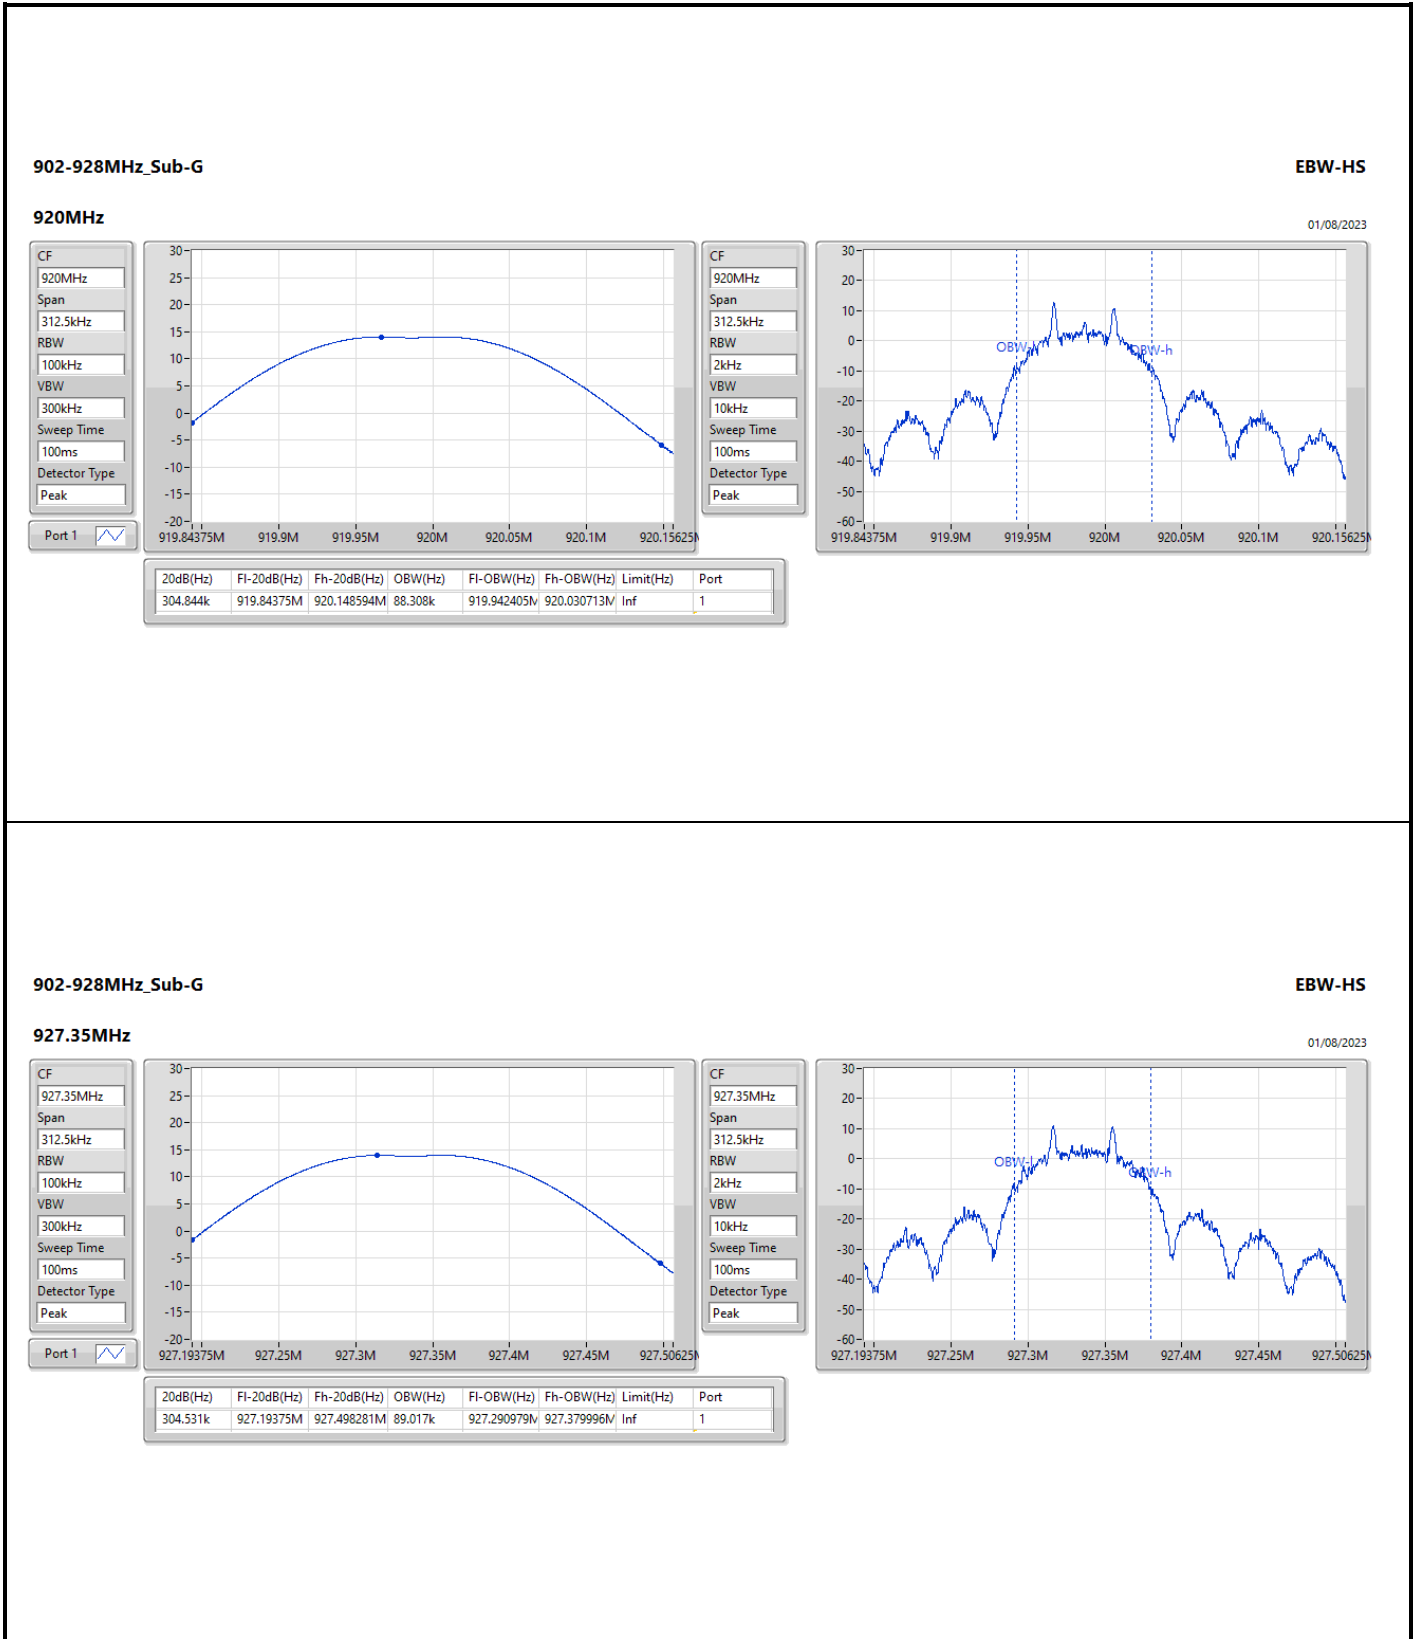

902-928MHz_Sub-G

EBW-HS

927.35MHz

01/08/2023

CF: 927.35MHz

Span: 312.5kHz

RBW: 100kHz

VBW: 300kHz

Sweep Time: 100ms

Detector Type: Peak



| 20dB(Hz) | Fl-20dB(Hz) | Fh-20dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|----------|-------------|-------------|---------|-------------|-------------|-----------|------|
| 304.531k | 927.19375M | 927.498281M | 89.017k | 927.290979M | 927.379996M | Inf | 1 |

CF: 927.35MHz

Span: 312.5kHz

RBW: 2kHz

VBW: 10kHz

Sweep Time: 100ms

Detector Type: Peak






Summary

| Mode | Max-Space (Hz) | Min-Space (Hz) |
|------------|-------------------|-------------------|
| 902-928MHz | - | - |
| Sub-G | 7.35M | 7.35M |



Result

| Mode | Result | F _l (Hz) | F _h (Hz) | Ch.Space (Hz) | Limit (Hz) |
|--------|--------|------------------------|------------------------|------------------|---------------|
| Sub-G | - | - | - | - | - |
| 920MHz | Pass | 919.96875M | 927.31875M | 7.35M | 304.844k |

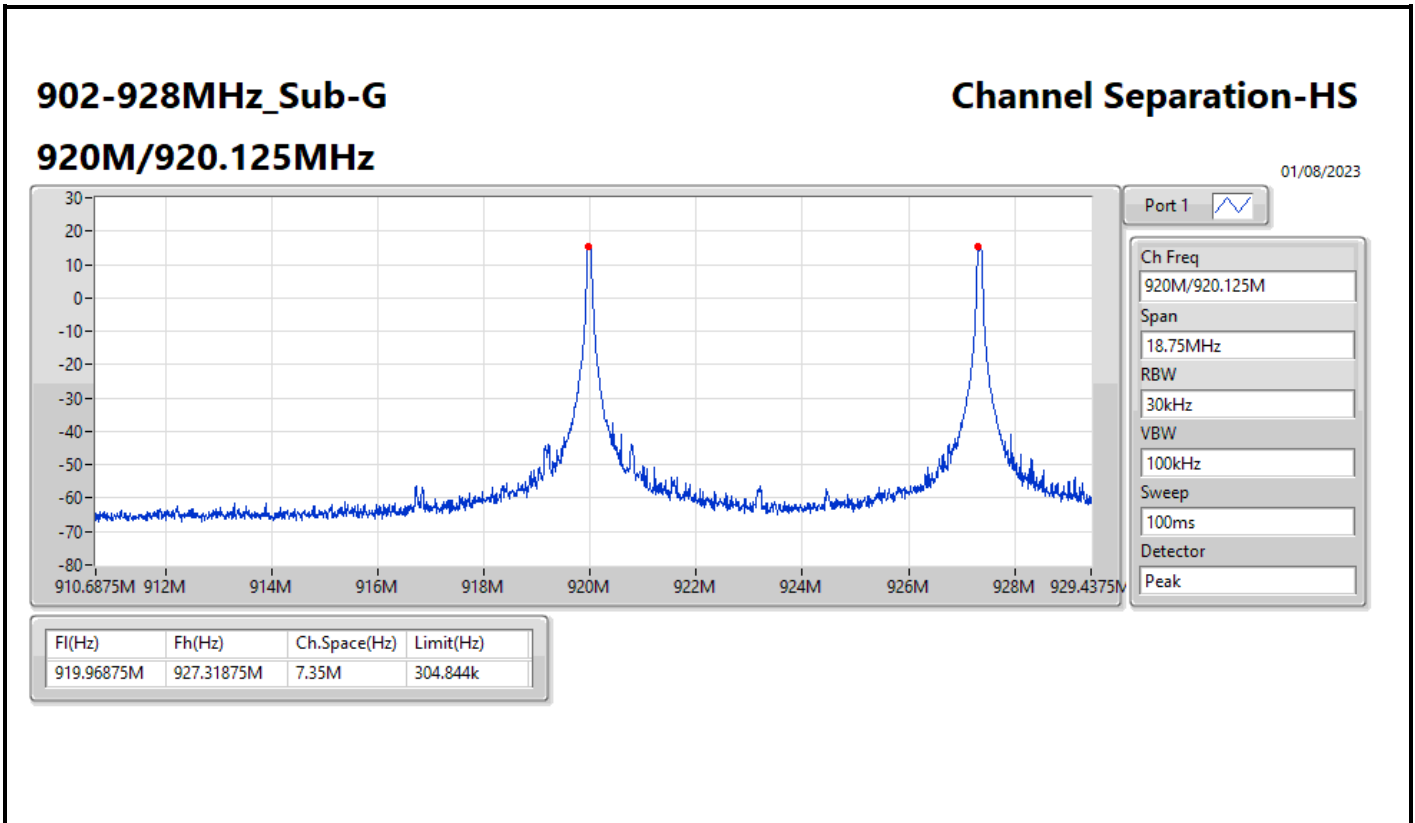



Summary

| Mode | Total Power (dBm) | Power (W) |
|------------|----------------------|--------------|
| 902-928MHz | - | - |
| Sub-G | 14.19 | 0.02624 |



Result

| Mode | Result | DG (dBi) | Total Power (dBm) | Power Limit (dBm) |
|-----------|--------|-------------|----------------------|----------------------|
| Sub-G | - | - | - | - |
| 920MHz | Pass | 1.66 | 14.19 | 30.00 |
| 927.35MHz | Pass | 1.66 | 14.11 | 30.00 |

DG = Directional Gain; Port X = Port X output power



Summary

| Mode | PD (dBm/RBW) |
|------------|-----------------|
| 902-928MHz | - |
| Sub-G | 7.88 |



RBW = 3kHz;



Result

| Mode | Result | DG (dBi) | PD (dBm/RBW) | PD Limit (dBm/RBW) |
|-----------|--------|----------|--------------|--------------------|
| Sub-G | - | - | - | - |
| 920MHz | Pass | 1.66 | 7.88 | 8.00 |
| 927.35MHz | Pass | 1.66 | 7.73 | 8.00 |

DG = Directional Gain; RBW = 3kHz;
PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;

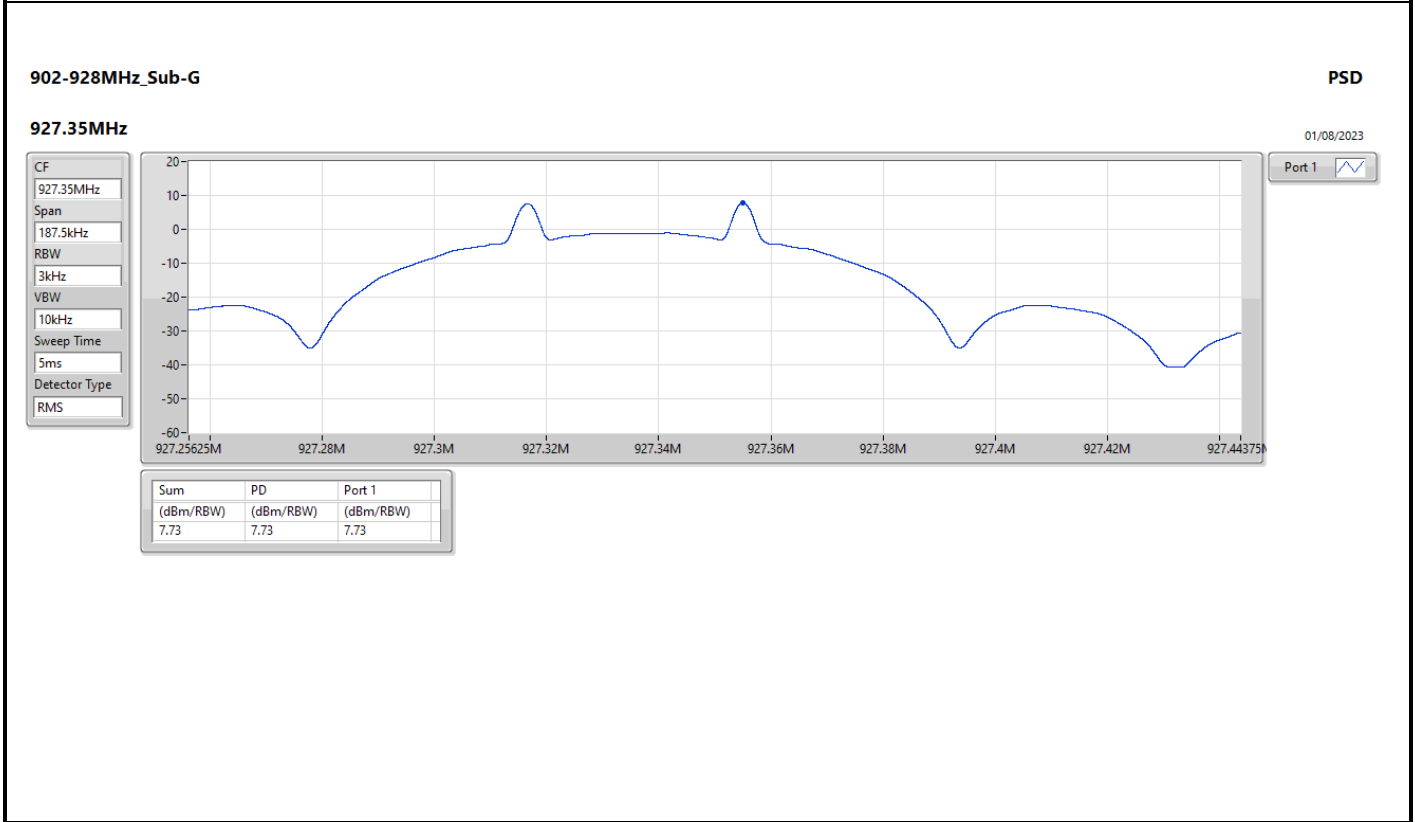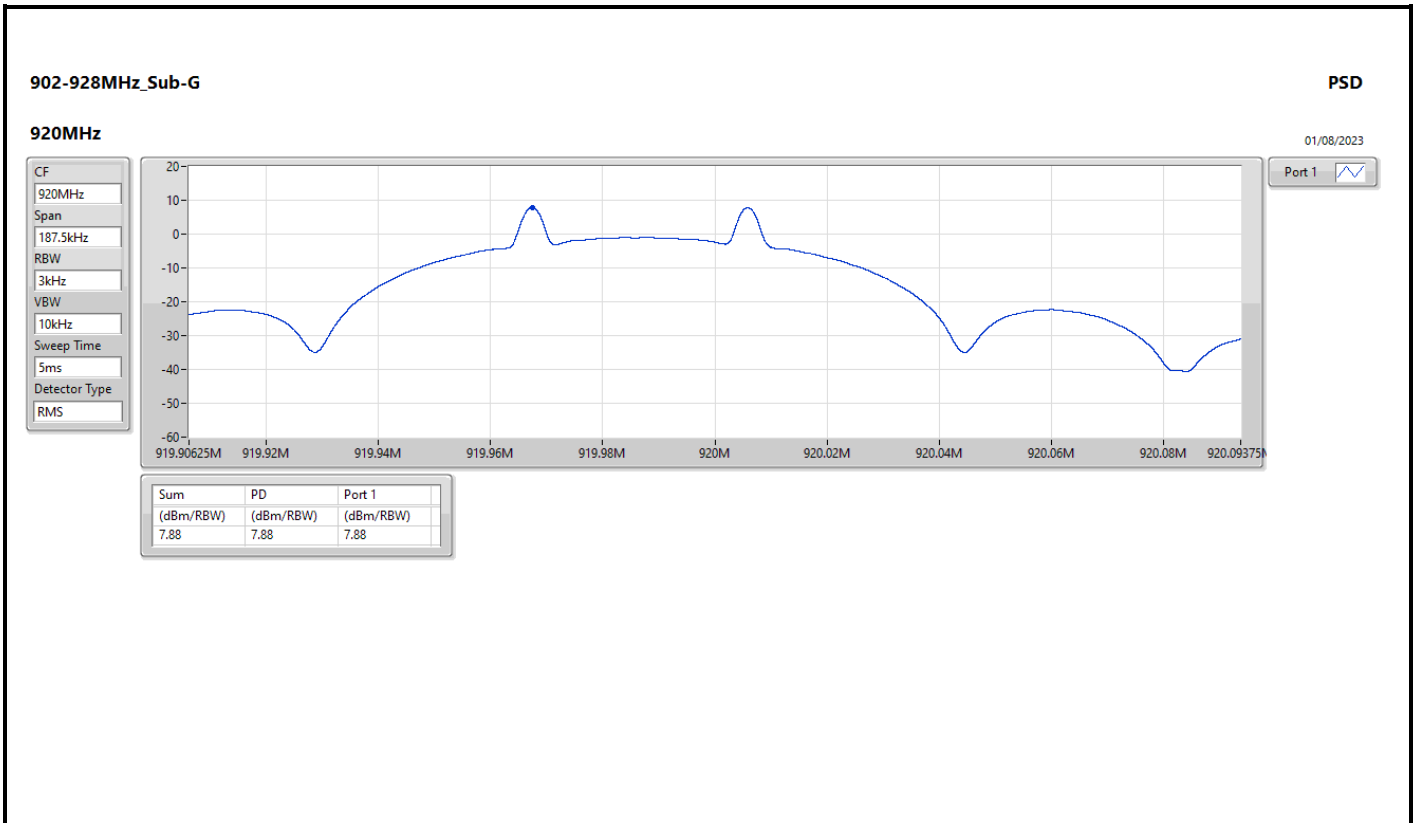




Summary

| Mode | Max-Dwell (s) |
|------------|------------------|
| 902-928MHz | - |
| Sub-G | 154.85m__ |



Result

| Mode | Result | Period (s) | Dwell (s) | Limit (s) | Tx On (s) |
|--------|--------|------------|-----------|-----------|-----------|
| Sub-G | - | - | - | - | - |
| 920MHz | Pass | 1 | 154.85m_ | 400m | 15.485m |

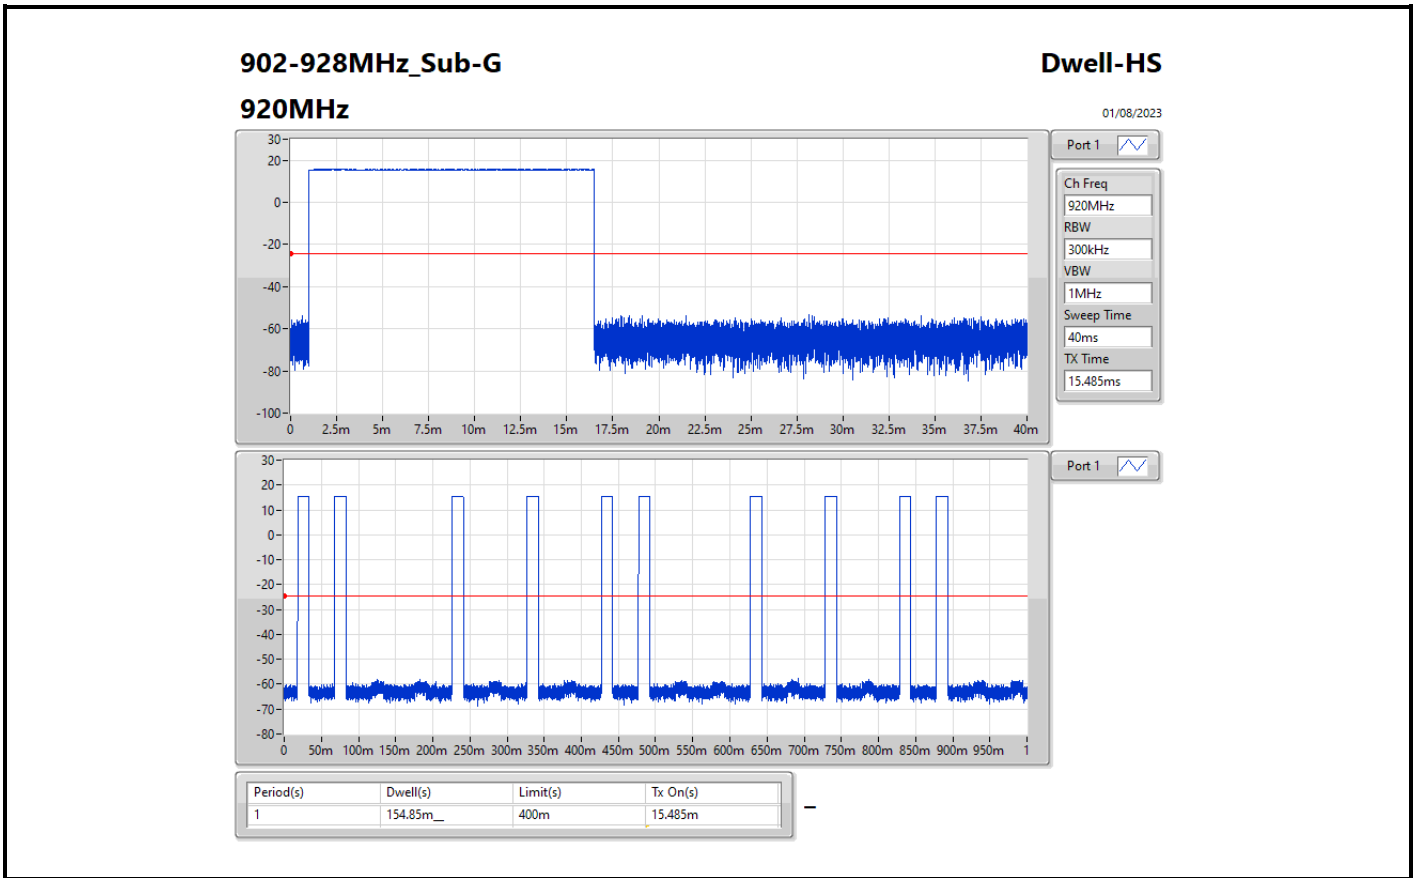





Summary

| Mode | Result | Ref (Hz) | Ref (dBm) | Limit (dBm) | Freq (Hz) | Level (dBm) | Freq (Hz) | Level (dBm) | Freq (Hz) | Level (dBm) | Freq (Hz) | Level (dBm) | Freq (Hz) | Level (dBm) | Port |
|------------|--------|----------|-----------|-------------|-----------|-------------|-----------|-------------|-----------|-------------|-----------|-------------|-----------|-------------|------|
| 902-928MHz | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - |
| Sub-G | Pass | 927.32M | 14.03 | -15.97 | 850.9M | -55.44 | 888.92M | -51.89 | 928M | -42.46 | 928M | -43.92 | 6.94495G | -50.35 | 1 |



Result

| Mode | Result | Ref (Hz) | Ref (dBm) | Limit (dBm) | Freq (Hz) | Level (dBm) | Freq (Hz) | Level (dBm) | Freq (Hz) | Level (dBm) | Freq (Hz) | Level (dBm) | Freq (Hz) | Level (dBm) | Port |
|-----------|--------|----------|-----------|-------------|-----------|-------------|-----------|-------------|-----------|-------------|-----------|-------------|-----------|-------------|------|
| Sub-G | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - |
| 920MHz | Pass | 919.99M | 14.23 | -15.77 | 55.99M | -54.68 | 892.12M | -52.80 | 902M | -54.98 | 931.84M | -53.19 | 6.95627G | -50.68 | 1 |
| 927.35MHz | Pass | 927.32M | 14.03 | -15.97 | 850.9M | -55.44 | 888.92M | -51.89 | 928M | -42.46 | 928M | -43.92 | 6.94495G | -50.35 | 1 |

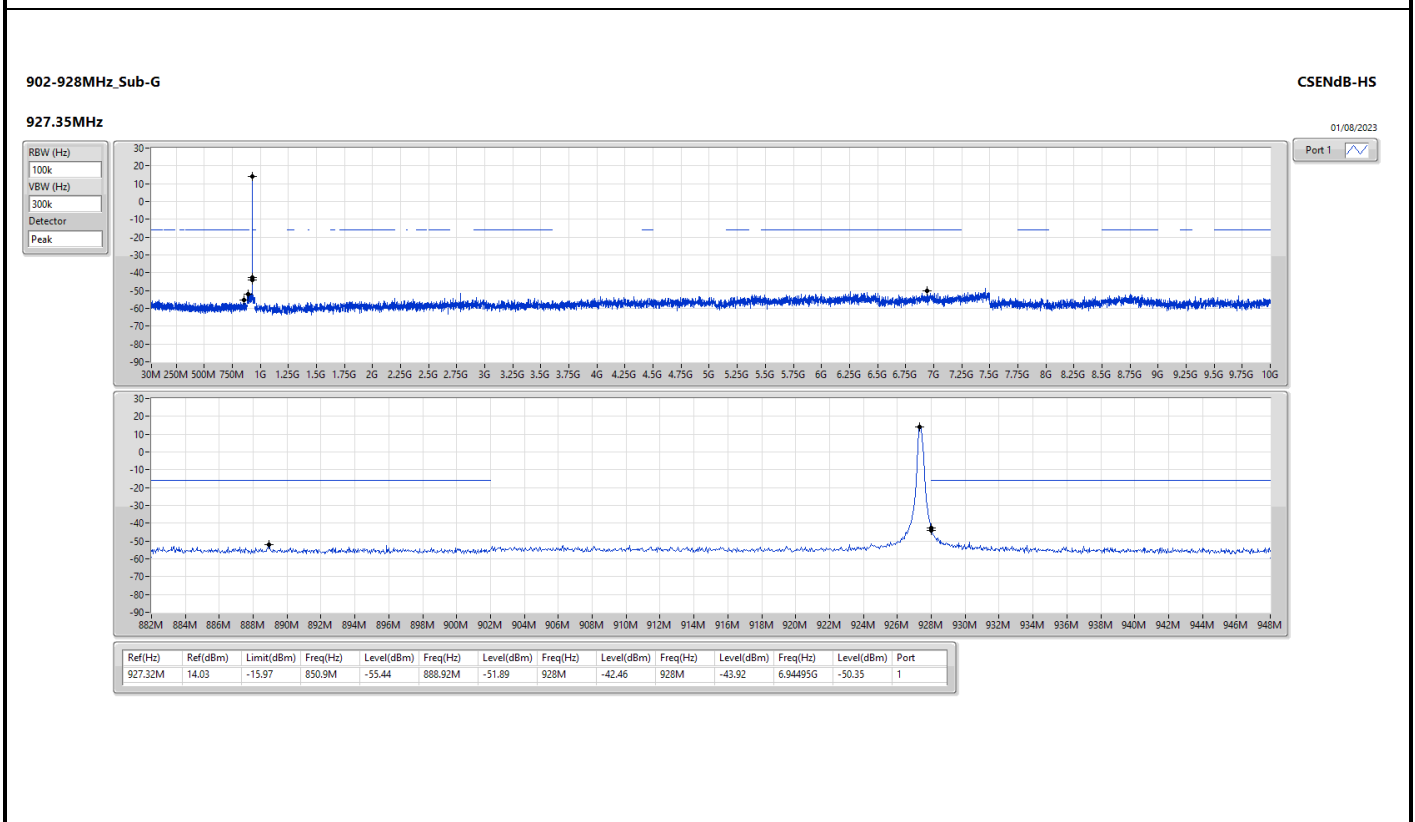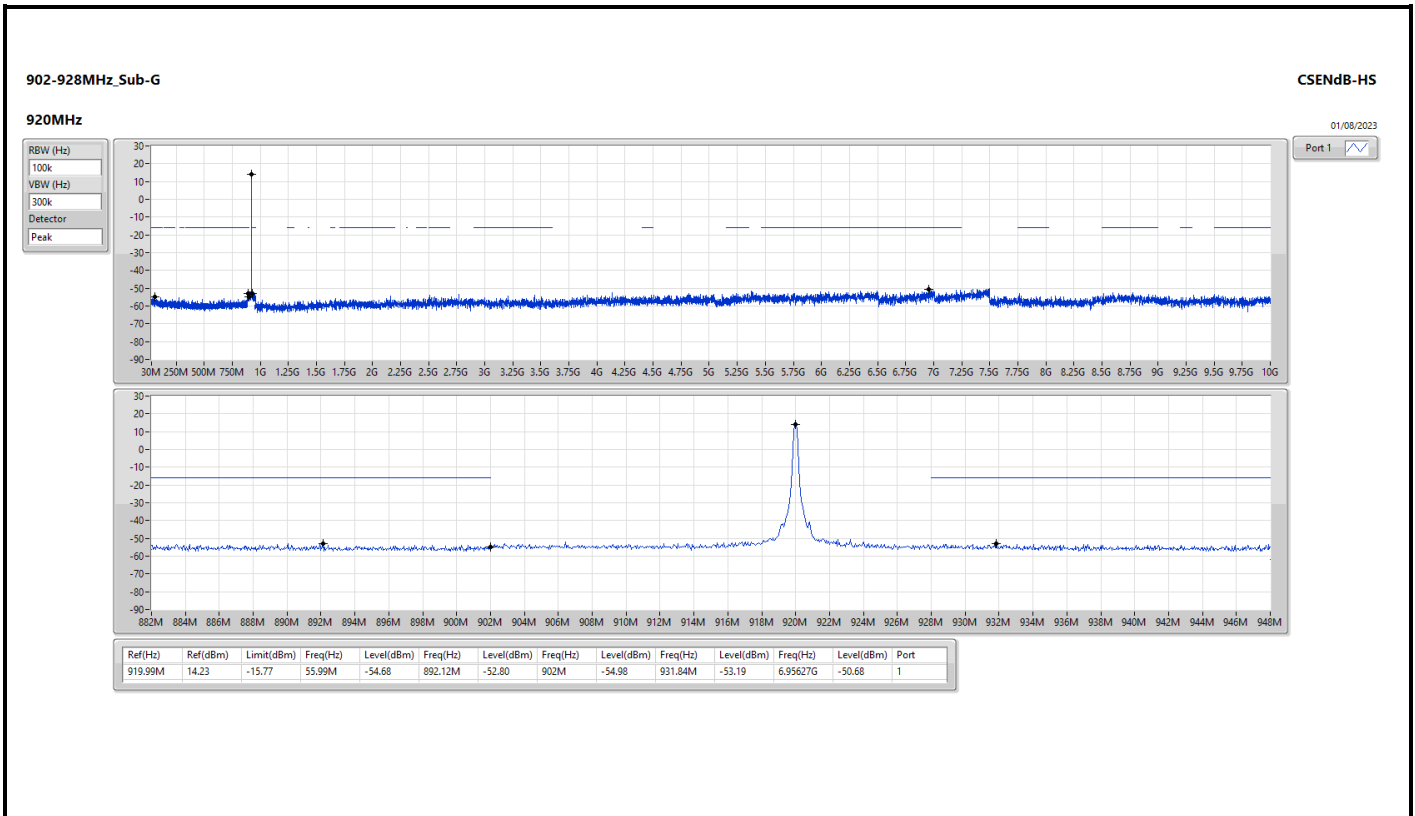




Summary


| Mode | Result | Type | Freq (Hz) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Condition |
|--------|--------|------|-----------|----------------|----------------|-------------|-----------|
| Mode 3 | Pass | PK | 77.53M | 35.77 | 40.00 | -4.23 | Vertical |

Mode 3

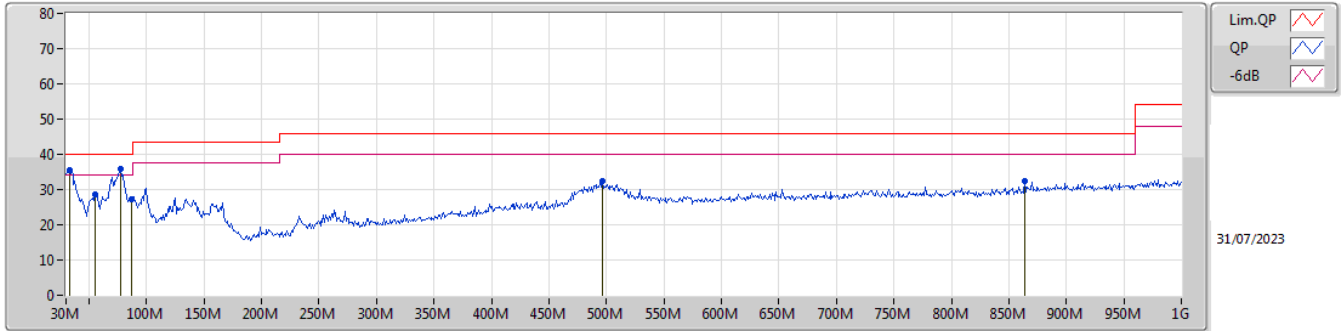

| Type | Freq (Hz) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Factor (dB/m) | Dist (m) | Condition | Azimuth (°) | Height (m) | Comment | Raw (dBuV/m) | AF (dB/m) | CL (dB) | PA (dB) |
|------|-----------|----------------|----------------|-------------|---------------|----------|-----------|-------------|------------|---------|--------------|-----------|---------|---------|
| PK | 32.91M | 35.62 | 40.00 | -4.38 | -8.02 | 3 | Vertical | 6 | 1.00 | - | 43.64 | 22.55 | 1.05 | 31.62 |
| PK | 55.22M | 28.61 | 40.00 | -11.39 | -17.72 | 3 | Vertical | 240 | 1.00 | - | 46.33 | 12.85 | 1.31 | 31.88 |
| PK | 77.53M | 35.77 | 40.00 | -4.23 | -17.80 | 3 | Vertical | 56 | 1.00 | "Worst" | 53.57 | 12.63 | 1.53 | 31.96 |
| PK | 87.23M | 27.37 | 40.00 | -12.63 | -16.09 | 3 | Vertical | 39 | 1.00 | - | 43.46 | 14.24 | 1.60 | 31.93 |
| PK | 496.57M | 32.42 | 46.00 | -13.58 | -5.06 | 3 | Vertical | 217 | 1.00 | - | 37.48 | 23.24 | 3.97 | 32.27 |
| PK | 864.2M | 32.25 | 46.00 | -13.75 | -1.07 | 3 | Vertical | 294 | 1.50 | - | 33.32 | 26.03 | 5.48 | 32.58 |

Mode 3

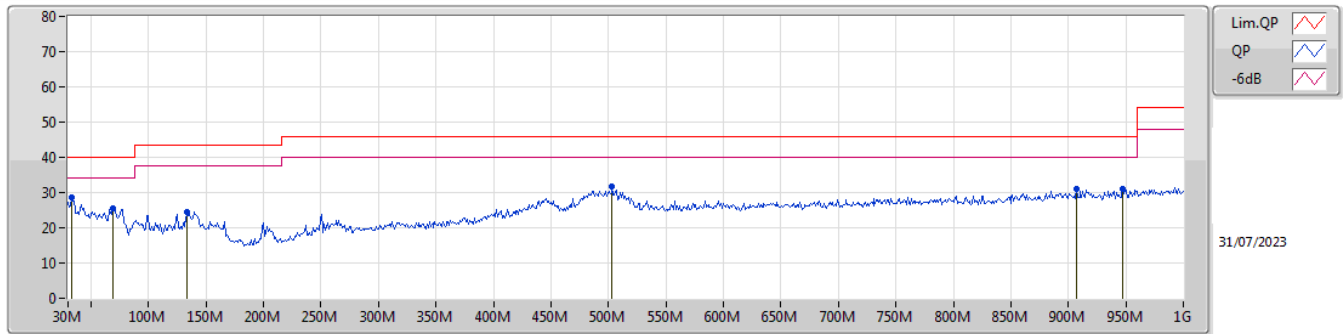

| Type | Freq (Hz) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Factor (dB/m) | Dist (m) | Condition | Azimuth (°) | Height (m) | Comment | Raw (dBuV/m) | AF (dB/m) | CL (dB) | PA (dB) |
|------|-----------|----------------|----------------|-------------|---------------|----------|------------|-------------|------------|---------|--------------|-----------|---------|---------|
| PK | 32.91M | 28.45 | 40.00 | -11.55 | -8.02 | 3 | Horizontal | 146 | 1.00 | "Worst" | 36.47 | 22.55 | 1.05 | 31.62 |
| PK | 68.8M | 25.37 | 40.00 | -14.63 | -18.11 | 3 | Horizontal | 248 | 1.50 | - | 43.48 | 12.35 | 1.44 | 31.90 |
| PK | 133.79M | 24.54 | 43.50 | -18.96 | -12.25 | 3 | Horizontal | 0 | 1.50 | - | 36.79 | 17.76 | 1.96 | 31.97 |
| PK | 503.36M | 31.74 | 46.00 | -14.26 | -4.97 | 3 | Horizontal | 203 | 1.00 | - | 36.71 | 23.31 | 4.00 | 32.28 |
| PK | 906.88M | 31.12 | 46.00 | -14.88 | -0.41 | 3 | Horizontal | 83 | 1.50 | - | 31.53 | 26.38 | 5.67 | 32.46 |
| PK | 947.62M | 31.16 | 46.00 | -14.84 | -0.17 | 3 | Horizontal | 137 | 1.00 | - | 31.33 | 26.69 | 5.69 | 32.55 |




Summary

| Mode | Result | Type | Freq (Hz) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Dist (m) | Condition | Azimuth (°) | Height (m) | Comments |
|------------|--------|------|-----------|----------------|----------------|-------------|----------|-----------|-------------|------------|----------|
| 902-928MHz | - | - | - | - | - | - | - | - | - | - | - |
| Sub-G | Pass | AV | 2.76G | 53.10 | 54.00 | -0.90 | 3 | Vertical | 354 | 1.08 | - |

902-928MHz_Sub-G

920MHz_TX

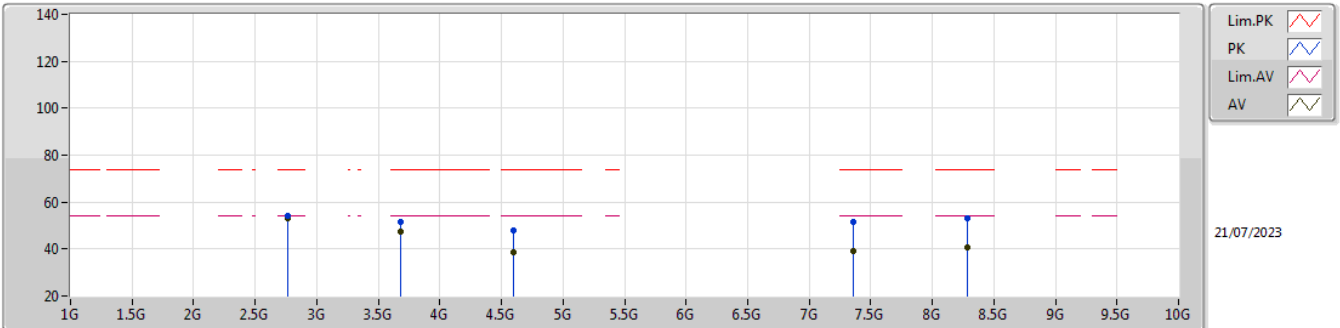


EUT_Y_1TX
 Setting 165
 05-M-G-4

| Type | Freq (Hz) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw (dBuV) | Dist (m) | Condition | Azimuth (°) | Height (m) | Comment | AF (dB) | CL (dB) | PA (dB) |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|-----------|----------------|---------------|---------|------------|------------|------------|
| PK | 2.76G | 54.36 | 74.00 | -19.64 | 57.83 | 3 | Vertical | 354 | 1.08 | - | 28.40 | 4.68 | 36.55 |
| AV | 2.76G | 53.10 | 54.00 | -0.90 | 56.57 | 3 | Vertical | 354 | 1.08 | - | 28.40 | 4.68 | 36.55 |
| PK | 3.68G | 51.43 | 74.00 | -22.57 | 52.42 | 3 | Vertical | 216 | 2.70 | - | 29.76 | 5.34 | 36.09 |
| AV | 3.68G | 47.60 | 54.00 | -6.40 | 48.59 | 3 | Vertical | 216 | 2.70 | - | 29.76 | 5.34 | 36.09 |
| PK | 4.6G | 47.75 | 74.00 | -26.25 | 45.81 | 3 | Vertical | 60 | 2.43 | - | 31.80 | 5.80 | 35.66 |
| AV | 4.6G | 38.37 | 54.00 | -15.63 | 36.43 | 3 | Vertical | 60 | 2.43 | - | 31.80 | 5.80 | 35.66 |
| PK | 7.35946G | 51.71 | 74.00 | -22.29 | 42.32 | 3 | Vertical | 14 | 1.84 | - | 36.68 | 7.40 | 34.69 |
| AV | 7.35946G | 39.26 | 54.00 | -14.74 | 29.87 | 3 | Vertical | 14 | 1.84 | - | 36.68 | 7.40 | 34.69 |
| PK | 8.28393G | 52.88 | 74.00 | -21.12 | 42.12 | 3 | Vertical | 343 | 1.80 | - | 37.10 | 7.90 | 34.24 |
| AV | 8.28393G | 40.46 | 54.00 | -13.54 | 29.70 | 3 | Vertical | 343 | 1.80 | - | 37.10 | 7.90 | 34.24 |

902-928MHz_Sub-G

920MHz_TX

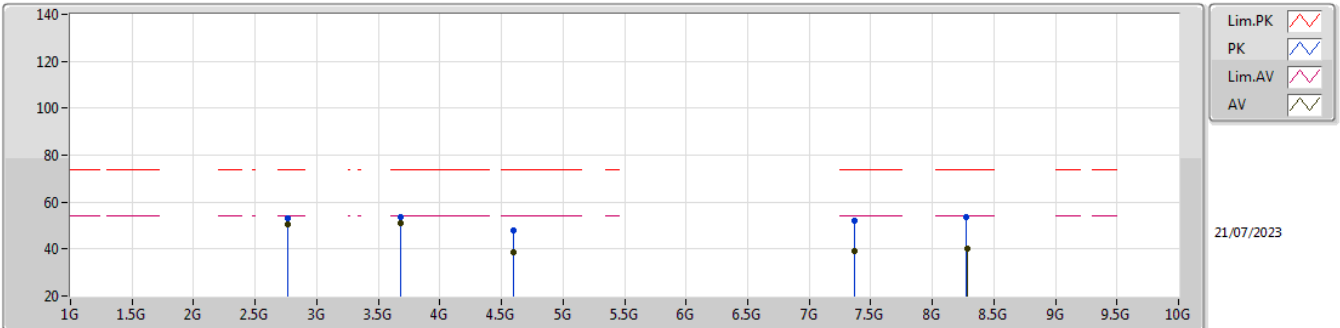


EUT_Y_1TX
Setting 165
05-M-G-4

| Type | Freq (Hz) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw (dBuV) | Dist (m) | Condition | Azimuth (°) | Height (m) | Comment | AF (dB) | CL (dB) | PA (dB) |
|------|-----------|----------------|----------------|-------------|------------|----------|------------|-------------|------------|---------|---------|---------|---------|
| PK | 2.7599G | 53.13 | 74.00 | -20.87 | 56.60 | 3 | Horizontal | 56 | 2.52 | - | 28.40 | 4.68 | 36.55 |
| AV | 2.7599G | 50.63 | 54.00 | -3.37 | 54.10 | 3 | Horizontal | 56 | 2.52 | - | 28.40 | 4.68 | 36.55 |
| PK | 3.6801G | 53.74 | 74.00 | -20.26 | 54.73 | 3 | Horizontal | 23 | 2.69 | - | 29.76 | 5.34 | 36.09 |
| AV | 3.6801G | 51.29 | 54.00 | -2.71 | 52.28 | 3 | Horizontal | 23 | 2.69 | - | 29.76 | 5.34 | 36.09 |
| PK | 4.5996G | 47.80 | 74.00 | -26.20 | 45.86 | 3 | Horizontal | 14 | 2.29 | - | 31.80 | 5.80 | 35.66 |
| AV | 4.6G | 38.40 | 54.00 | -15.60 | 36.46 | 3 | Horizontal | 14 | 2.29 | - | 31.80 | 5.80 | 35.66 |
| PK | 8.27826G | 53.78 | 74.00 | -20.22 | 43.02 | 3 | Horizontal | 201 | 1.80 | - | 37.10 | 7.90 | 34.24 |
| AV | 8.28056G | 40.40 | 54.00 | -13.60 | 29.64 | 3 | Horizontal | 201 | 1.80 | - | 37.10 | 7.90 | 34.24 |
| PK | 7.36397G | 52.21 | 74.00 | -21.79 | 42.82 | 3 | Horizontal | 286.4 | 1.80 | - | 36.67 | 7.40 | 34.68 |
| AV | 7.36397G | 39.25 | 54.00 | -14.75 | 29.86 | 3 | Horizontal | 286.4 | 1.80 | - | 36.67 | 7.40 | 34.68 |

902-928MHz_Sub-G

927.35MHz_TX

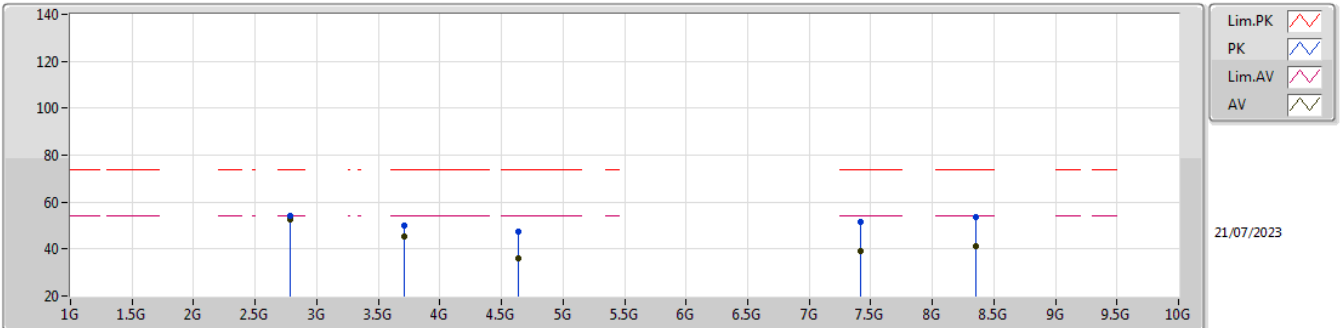


EUT_Y_1TX
 Setting 150
 05-M-G-4

| Type | Freq (Hz) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw (dBuV) | Dist (m) | Condition | Azimuth (°) | Height (m) | Comment | AF (dB) | CL (dB) | PA (dB) |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|-----------|----------------|---------------|---------|------------|------------|------------|
| PK | 2.78195G | 54.04 | 74.00 | -19.96 | 57.29 | 3 | Vertical | 349 | 2.31 | - | 28.60 | 4.69 | 36.54 |
| AV | 2.78205G | 52.67 | 54.00 | -1.33 | 55.92 | 3 | Vertical | 349 | 2.31 | - | 28.60 | 4.69 | 36.54 |
| PK | 3.70924G | 49.87 | 74.00 | -24.13 | 50.71 | 3 | Vertical | 212 | 2.51 | - | 29.86 | 5.35 | 36.05 |
| AV | 3.70938G | 45.58 | 54.00 | -8.42 | 46.42 | 3 | Vertical | 212 | 2.51 | - | 29.86 | 5.35 | 36.05 |
| PK | 4.63681G | 47.17 | 74.00 | -26.83 | 45.13 | 3 | Vertical | 336 | 2.94 | - | 31.87 | 5.82 | 35.65 |
| AV | 4.63665G | 35.86 | 54.00 | -18.14 | 33.82 | 3 | Vertical | 336 | 2.94 | - | 31.87 | 5.82 | 35.65 |
| PK | 7.42066G | 51.67 | 74.00 | -22.33 | 42.26 | 3 | Vertical | 18 | 1.80 | - | 36.56 | 7.42 | 34.57 |
| AV | 7.41894G | 39.21 | 54.00 | -14.79 | 29.81 | 3 | Vertical | 18 | 1.80 | - | 36.56 | 7.42 | 34.58 |
| PK | 8.34946G | 53.56 | 74.00 | -20.44 | 42.74 | 3 | Vertical | 358 | 2.58 | - | 37.10 | 7.90 | 34.18 |
| AV | 8.34974G | 41.24 | 54.00 | -12.76 | 30.42 | 3 | Vertical | 358 | 2.58 | - | 37.10 | 7.90 | 34.18 |

902-928MHz_Sub-G

927.35MHz_TX

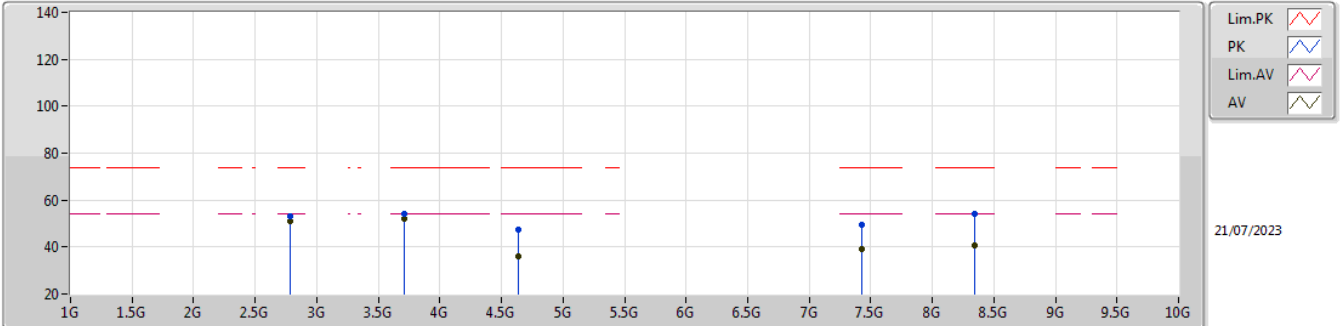

EUT_Y_1TX
Setting 150
05-M-G-4

| Type | Freq (Hz) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw (dBuV) | Dist (m) | Condition | Azimuth (°) | Height (m) | Comment | AF (dB) | CL (dB) | PA (dB) |
|------|-----------|----------------|----------------|-------------|------------|----------|------------|-------------|------------|---------|---------|---------|---------|
| PK | 2.78207G | 53.19 | 74.00 | -20.81 | 56.44 | 3 | Horizontal | 244 | 2.49 | - | 28.60 | 4.69 | 36.54 |
| AV | 2.78203G | 51.16 | 54.00 | -2.84 | 54.41 | 3 | Horizontal | 244 | 2.49 | - | 28.60 | 4.69 | 36.54 |
| PK | 3.7093G | 54.31 | 74.00 | -19.69 | 55.15 | 3 | Horizontal | 312 | 2.19 | - | 29.86 | 5.35 | 36.05 |
| AV | 3.7093G | 51.86 | 54.00 | -2.14 | 52.70 | 3 | Horizontal | 312 | 2.19 | - | 29.86 | 5.35 | 36.05 |
| PK | 4.63705G | 47.17 | 74.00 | -26.83 | 45.13 | 3 | Horizontal | 334 | 1.18 | - | 31.87 | 5.82 | 35.65 |
| AV | 4.63663G | 35.98 | 54.00 | -18.02 | 33.94 | 3 | Horizontal | 334 | 1.18 | - | 31.87 | 5.82 | 35.65 |
| PK | 7.42345G | 49.28 | 74.00 | -24.72 | 39.88 | 3 | Horizontal | 3 | 1.76 | - | 36.55 | 7.42 | 34.57 |
| AV | 7.42345G | 39.29 | 54.00 | -14.71 | 29.89 | 3 | Horizontal | 3 | 1.76 | - | 36.55 | 7.42 | 34.57 |
| PK | 8.34505G | 54.03 | 74.00 | -19.97 | 43.22 | 3 | Horizontal | 211 | 1.80 | - | 37.10 | 7.90 | 34.19 |
| AV | 8.34505G | 40.89 | 54.00 | -13.11 | 30.08 | 3 | Horizontal | 211 | 1.80 | - | 37.10 | 7.90 | 34.19 |