



Canada

# EMC & RF Test Report

As per

## RSS-247 Issue 2:2017 & FCC Part 15 Subpart 15.247

Unlicensed Intentional Radiators  
DTS System

on the

### ECB601/ECB501

Issued by:

**TÜV SÜD Canada Inc.**  
11 Gordon Collins Dr,  
Gormley, ON, L0H 1G0  
Canada  
Ph: (905) 883-7255

Testing produced for

Prepared by:

Min Xie,  
Sr. Project Engineer  
Reviewed by

ecobee

See Appendix A for full client &  
EUT details.

Scott Drysdale,  
Reginal Manager,  
EMC



Registration #  
6844A-3




Testing Laboratory  
Certificate #2955.02

Report Issued:  
5/26/2023




Registration #  
CA6844

Client	<b>Ecobee Inc.</b>	
Product	<b>ECB601/ECB501</b>	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247	

## Table of Contents

Table of Contents .....	2
Report Scope .....	3
Summary .....	4
Test Results Summary .....	5
Notes, Justifications, or Deviations .....	6
Sample Calculation(s).....	7
Applicable Standards, Specifications and Methods.....	8
Document Revision Status .....	9
Definitions and Acronyms .....	10
Testing Facility .....	11
Calibrations and Accreditations .....	11
Testing Environmental Conditions and Dates .....	12
Detailed Test Results Section .....	13
Transmitter Spurious Radiated Emissions .....	14
Power Line Conducted Emissions .....	34
Appendix A – EUT Summary.....	39
Appendix B – EUT and Test Setup Photos.....	42

Client	<b>Ecobee Inc.</b>	
Product	<b>ECB601/ECB501</b>	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247	

## Report Scope

This report addresses the EMC verification testing and test results of the **Ecobee Inc.’s Model: ECB601/ECB501 (2.4 GHz DTS)** and is herein referred to as EUT (Equipment Under Test). The EUT was tested for compliance against the following standards:


RSS-247 Issue 2:2017

FCC Part 15 Subpart C 15.247

Test procedures, results, justifications, and engineering considerations, if any, follow later in this report. The purpose of this report is to verify that the EUT is still in compliance with the rules after a C2PC. Refer to the original test report, TÜV SÜD Canada Report # **7169010244RA-001 (DTS – 2.4 GHz Thread)** for full testing and test results.

This report does not imply product endorsement by any government, accreditation agency, or TÜV SÜD Canada Inc.

Opinions or interpretations expressed in this report, if any, are outside the scope of TÜV SÜD Canada Inc. accreditations. Any opinions expressed do not necessarily reflect the opinions of TÜV SÜD Canada Inc., unless otherwise stated.


Client	<b>Ecobee Inc.</b>	
Product	<b>ECB601/ECB501</b>	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247	

## Summary

The results contained in this report relate only to the item(s) tested.

EUT:	<b>ECB601/ECB501</b>
FCC Certification #, FCC ID:	WR955470766937
Industry Canada Certification #, IC:	7981A-55470766937
EUT passed all tests performed	Yes
Tests conducted by	Min Xie
Report reviewed by	Scott Drysdale


For testing dates, see "Testing Environmental Conditions and Dates".

Client	<b>Ecobee Inc.</b>	
Product	<b>ECB601/ECB501</b>	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247	

### **Test Results Summary**

<b>Standard/Method</b>	<b>Description</b>	<b>Class/Limit</b>	<b>Result</b>
FCC 15.207 RSS-GEN (Table 3)	Power Line Conducted Emissions	QuasiPeak Average	Pass
FCC 15.209 RSS-GEN (Table 4)	Spurious Radiated Emissions	QuasiPeak Average	Pass
<b>Overall Result</b>			<b>Pass</b>

If the product as tested or otherwise complies with the specification, the EUT is deemed to comply with the requirement and is deemed a 'PASS' grade. If not 'FAIL' grade will be issued. Note that 'PASS' / 'FAIL' grade is independent of any measurement uncertainties. A 'PASS' / 'FAIL' grade within measurement uncertainty is marked with a '\*'.

Client	<b>Ecobee Inc.</b>	
Product	<b>ECB601/ECB501</b>	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247	


### ***Notes, Justifications, or Deviations***

The following notes, justifications for tests not performed or deviations from the above listed specifications apply:

This report is only an update based on Class II Permissive. Refer to the original test report, TÜV SÜD Canada Report # **7169010244RA-001 (DTS-2.4GHz Thread)**, for full testing and test results.

As per the manufacturer, the transmitter in the new sample is electrically the same to the sample previously tested. Non transmitter components were replaced with new parts. The following test was re-evaluated on the EUT to verify if this change did not degrade the radiated data previously reported.

- Spurious radiated emission
- Restricted band Band Edge measurements
- Power line conducted emission

Client	<b>Ecobee Inc.</b>	
Product	<b>ECB601/ECB501</b>	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247	

### **Sample Calculation(s)**

#### **Radiated Emission Test**

E-Field Level = Received Signal + Antenna Factor + Cable Loss – Pre-Amp Gain

E-Field Level = 50dB $\mu$ V + 10dB/m + 2dB – 20dB

E-Field Level = 42dB $\mu$ V/m

Margin = Limit – E-Field Level

Margin = 50dB $\mu$ V/m – 42dB $\mu$ V/m

Margin = 8.0 dB (pass)

#### **Power Line Conducted Emission Test**

E-Field Level = Received Signal + Attenuation Factor + Cable Loss + LISN Factor


E-Field Level = 50dB $\mu$ V + 10dB + 2.5dB + 0.5dB

E-Field Level = 63dB $\mu$ V

Margin = Limit – E-Field Level

Margin = 73dB $\mu$ V – 63dB $\mu$ V


Margin = 10.0 dB (pass)

Client	<b>Ecobee Inc.</b>	
Product	<b>ECB601/ECB501</b>	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247	

## Applicable Standards, Specifications and Methods


- ANSI C63.4:2014    Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
- ANSI C63.10:2013    American National Standard For Testing Unlicensed Wireless Devices
- CFR 47 FCC 15 Subpart C    Code of Federal Regulations – Radio Frequency Devices, Intentional Radiators
- FCC KDB 558074: 2019    FCC KDB 558074 Digital Transmission Systems, measurements and procedures
- FCC KDB 447498: 2015    RF exposure procedures and equipment authorization policies for mobile and portable devices
- RSS-GEN Issue 5: 2018+A1:2019+A2:2021    General Requirements and Information for the Certification of Radio Apparatus
- RSS-247 Issue 2:2017    Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices
- ISO 17025:2017    General Requirements for the Competence of Testing and Calibration Laboratories



Client	<b>Ecobee Inc.</b>	
Product	<b>ECB601/ECB501</b>	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247	

## Document Revision Status

Revision	Date	Description	Initials
000	2023-05-26	Initial Release	MX

Client	<b>Ecobee Inc.</b>	
Product	<b>ECB601/ECB501</b>	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247	

## Definitions and Acronyms

The following definitions and acronyms are applicable in this report.  
See also ANSI C63.14.

**DTS** – Digital Transmission System  
**LISN** – Line Impedance Stabilization Network  
**NCR** – No Calibration Required  
**NSA** – Normalized Site Attenuation  
**N/A** – Not Applicable  
**RF** – Radio Frequency

**AE** – Auxiliary Equipment. A digital accessory that feeds data into or receives data from another device (host) that in turn, controls its operation.

**Antenna Port** – Port, other than a broadcast receiver tuner port, for connection of an antenna used for intentional transmission and/or reception of radiated RF energy.


**BW** – Bandwidth. Unless otherwise stated, this refers to the 6 dB bandwidth.

**EMC** – Electro-Magnetic Compatibility. The ability of an equipment or system to function satisfactorily in its electromagnetic environment without introducing intolerable electromagnetic disturbances to anything in that environment.

**EMI** – Electro-Magnetic Immunity. The ability to maintain a specified performance when the equipment is subjected to disturbance (unwanted) signals of specified levels.

**EUT** – Equipment Under Test. A device or system being evaluated for compliance that is representative of a product to be marketed.

**ITE** – Information Technology Equipment. Has a primary function of entry, storage, display, retrieval, transmission, processing, switching, or control of data and/or telecommunication messages and which may be equipped with one or more ports typically for information transfer.


Client	<b>Ecobee Inc.</b>	
Product	<b>ECB601/ECB501</b>	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247	

## Testing Facility

Testing for EMC on the EUT was carried out at TÜV SÜD Canada testing lab near Toronto, Ontario. The testing lab has calibrated 3m semi-anechoic chambers which allow measurements on a EUT that has a maximum width or length of up to 2m and a height of up to 3m. The testing lab also has a calibrated 10m Open Area Test Site (OATS). The chambers are equipped with a turntable that is capable of testing devices up to 5000lb in weight and are equipped with a mast that controls the polarization and height of the antenna. Control of the mast occurs in the control room adjoining the shielded chamber. This facility is capable of testing products that are rated for single phase or 3-phase AC input and DC capability is also available. Radiated emission measurements are performed using a BiLog antenna and a Horn antenna where applicable. Conducted emissions, unless otherwise stated, are performed using a LISN and using the vertical ground plane if applicable.

### **Calibrations and Accreditations**


The 3m semi-anechoic chamber is registered with Federal Communications Commission (FCC, CA6844), Innovation, Science and Economic Development Canada (ISED, 6844A-3) and Voluntary Control Council for Interference (VCCI, R-14023, G-20072, C-14498, and T-20060). This chamber was calibrated for Normalized Site Attenuation (NSA) using test procedures outlined in ANSI C63.4 "Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz". The chamber is lined with ferrite tiles and absorption cones to minimize any undesired reflections. The NSA data is kept on file at TÜV SÜD Canada. For radiated susceptibility testing, a 16 point field calibration has been performed on the chamber. The field uniformity data is kept on file at TÜV SÜD Canada. TÜV SÜD Canada Inc. is accredited to ISO 17025 by A2LA with Testing Certificate #2955.02. The laboratory's current scope of accreditation listing can be found as listed on the A2LA website. All measuring equipment is calibrated on an annual or biennial basis as listed for each respective test.

Client	<b>Ecobee Inc.</b>	
Product	<b>ECB601/ECB501</b>	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247	


### ***Testing Environmental Conditions and Dates***

Following environmental conditions were recorded in the facility during time of testing

<b>Date</b>	<b>Test</b>	<b>Initials</b>	<b>Temperature (°C)</b>	<b>Humidity (%)</b>	<b>Pressure (kPa)</b>
2023-02-28	Spurious Emissions	MX	21.5	19.9	100.6
2023-03-01	Spurious Emissions	MX	20.8	20.8	101.2
2023-03-01	Power Line Conducted Emissions	MX	20.8	20.8	101.2

Client	<b>Ecobee Inc.</b>	 Canada
Product	<b>ECB601/ECB501</b>	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247	

## Detailed Test Results Section

Client	<b>Ecobee Inc.</b>	
Product	<b>ECB601/ECB501</b>	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247	

## ***Transmitter Spurious Radiated Emissions***

### **Purpose**

The purpose of this test is to ensure that the RF energy unintentionally emitted from the EUT does not exceed the limits listed below as defined in the applicable test standard, as measured from a receiving antenna. This helps protect broadcast radio services such as television, FM radio, pagers, cellular telephones, emergency services, and so on, from unwanted interference.

### **Limits and Method**

The method is as defined in FCC KDB 558074 Section 12.2 and ANSI C63.10.

The limits, as defined in 15.247(d) for unintentional radiated emissions, apply for those emissions that fall in the restricted bands, as defined in Section 15.205(a). These emissions must comply with the radiated emission limits specified in Section 15.209(a).

All unintentional emissions must also meet the ‘Spurious Conducted Emissions’ requirements of -30 dBc or greater. See also ‘Antenna Spurious Conducted Emissions’ for further details.


<b>Frequency</b>	<b>Field Strength Limit (<math>\mu\text{V/m}</math>)</b>	<b>Field Strength at 3m (<math>\text{dB}\mu\text{V/m}</math>)</b>
0.009 MHz – 0.490 MHz	2400/F(kHz) <sup>a</sup> (at 300m)	128.5 to 93.8 <sup>a</sup>
0.490 MHz – 1.705 MHz	24000/F(kHz) <sup>a</sup> (at 30m)	73.8 to 63.0 <sup>a</sup>
1.705 MHz – 30 MHz	30 <sup>a</sup> (at 30m)	69.5 <sup>a</sup>
30 MHz – 88 MHz	100 <sup>a</sup> (at 3m)	40.0 <sup>a</sup>
88 MHz – 216 MHz	150 <sup>a</sup> (at 3m)	43.5 <sup>a</sup>
216 MHz – 960 MHz	200 <sup>a</sup> (at 3m)	46.0 <sup>a</sup>
Above 960 MHz	500 <sup>a</sup> (at 3m)	54.0 <sup>a</sup>
Above 1000 MHz	500 <sup>b</sup> (at 3m)	54.0 <sup>b</sup>
Above 1000 MHz	5 mV/m <sup>c</sup> (at 3m)	74.0 <sup>c</sup>

<sup>a</sup>Limit is with Quasi Peak detector with bandwidths as defined in CISPR-16-1-1


<sup>b</sup>Limit is with 1 MHz measurement bandwidth and using an Average detector

<sup>c</sup>Limit is with 1 MHz measurement bandwidth and using a Peak detector

Based on ANSI C63.4 Section 4.2, if the Peak detector measurements do not exceed the Quasi-Peak limits, where defined, then the EUT is deemed to have passed the requirements.

Client	<b>Ecobee Inc.</b>	
Product	<b>ECB601/ECB501</b>	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247	

### Typical Radiated Emissions Setup

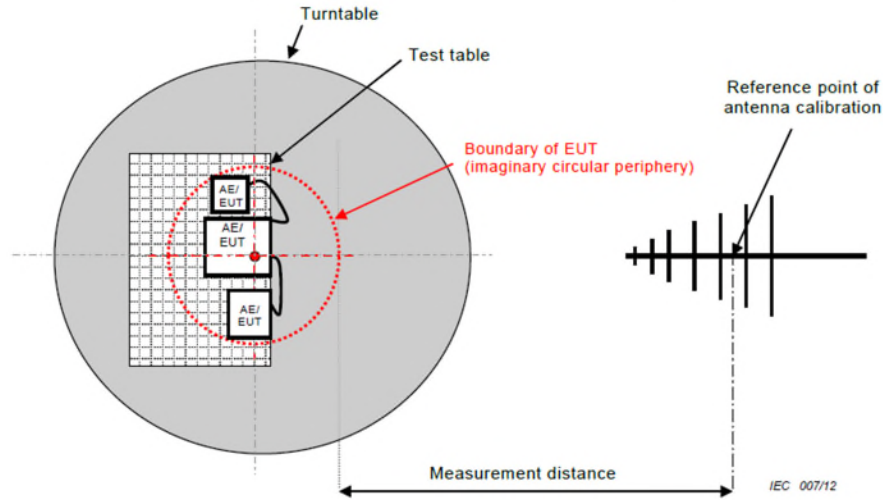

### Measurement Uncertainty

The expanded measurement uncertainty is calculated in accordance with CISPR 16-4-2 and is  $\pm 5.67\text{dB}$  for 30MHz – 1GHz and  $\pm 4.58\text{dB}$  for 1GHz – 18GHz with a 'k=2' coverage factor and a 95% confidence level.


### Preliminary Graphs

The graphs shown below are maximized peak measurement graphs measured with a resolution bandwidth greater than or equal to the final required detector over a full 0-360°. This peaking process is done as a worst-case measurement and enables the detection of frequencies of concern for final measurement. For final measurements with the appropriate detector, where applicable, please refer to the tables under Final Measurements.

In accordance with FCC Part 15, Subpart A, Section 15.33, the device was scanned to the 10<sup>th</sup> harmonic (a minimum of 24.835 GHz).

Devices scanned may be scanned at alternate test distances and in accordance with FCC Part 15, Subpart A, Section 15.31, an extrapolation factor of 20 dB/decade was used above 30 MHz and 40 dB/decade below 30 MHz. For example, for 1 meter measurements, an extrapolation factor 9.5 dB from 20 Log (1m / 3m) is applied.


Peak output power for low, middle, and high channels were checked. The worst case was used for the spurious emissions.

Client	<b>Ecobee Inc.</b>	
Product	<b>ECB601/ECB501</b>	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247	


Band-edge measurement graphs are shown for illustration purposes. See final measurement section for all measurements.

### Spurious Emissions

Mid Channel – 30 MHz – 1 GHz  
Horizontal - Peak Emission Graph

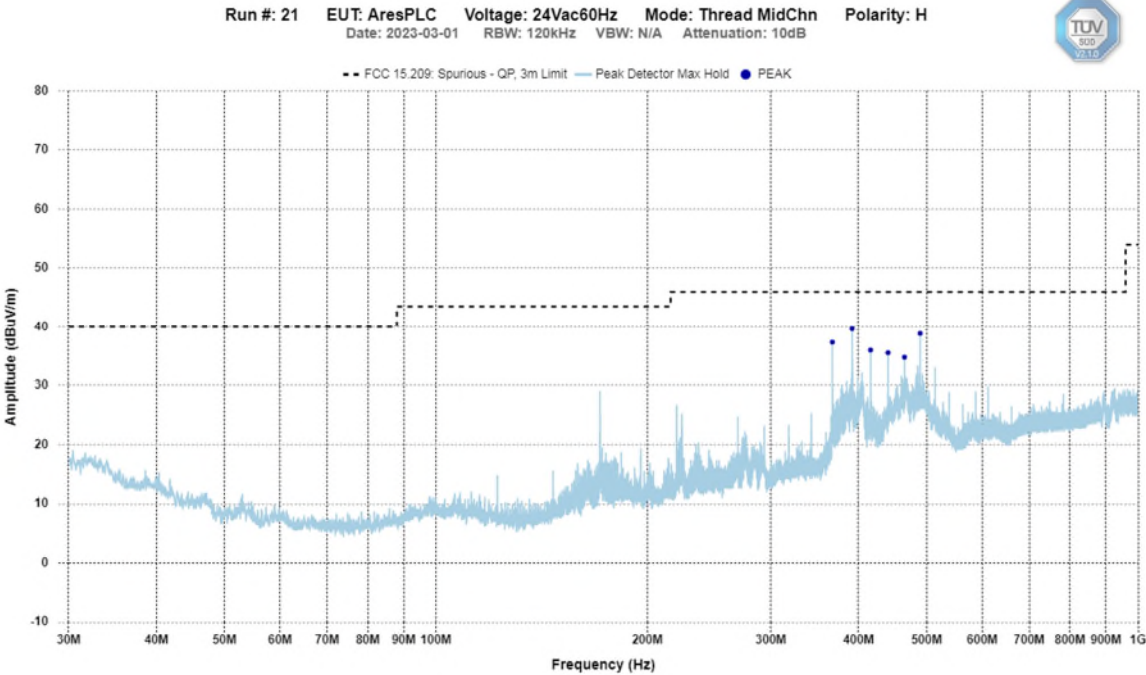





Client	<b>Ecobee Inc.</b>	
Product	<b>ECB601/ECB501</b>	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247	


Mid Channel – 1 GHz – 6 GHz  
Horizontal - Peak Emission Graph


Run #: 6 EUT: Ares PLC Voltage: 24Vac60Hz Mode: Thread MidChn Polarity: H  
Date: 2023-02-28 RBW: 1MHz VBW: N/A Attenuation: 10dB

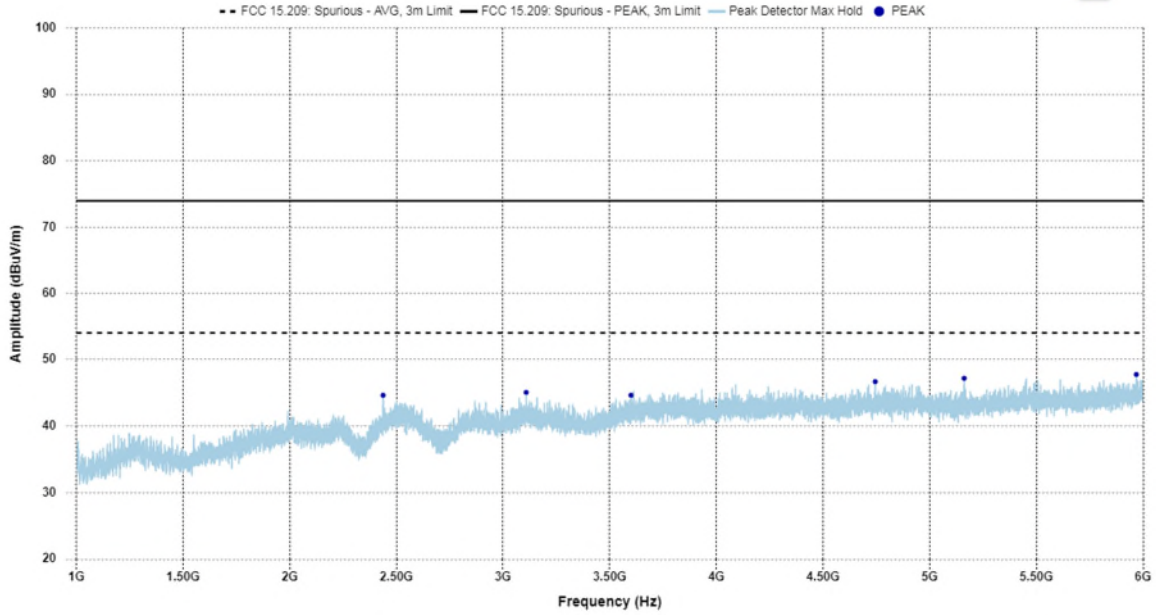


Client	<b>Ecobee Inc.</b>	
Product	<b>ECB601/ECB501</b>	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247	

**Mid Channel – 6 GHz – 12 GHz  
Horizontal - Peak Emission Graph**

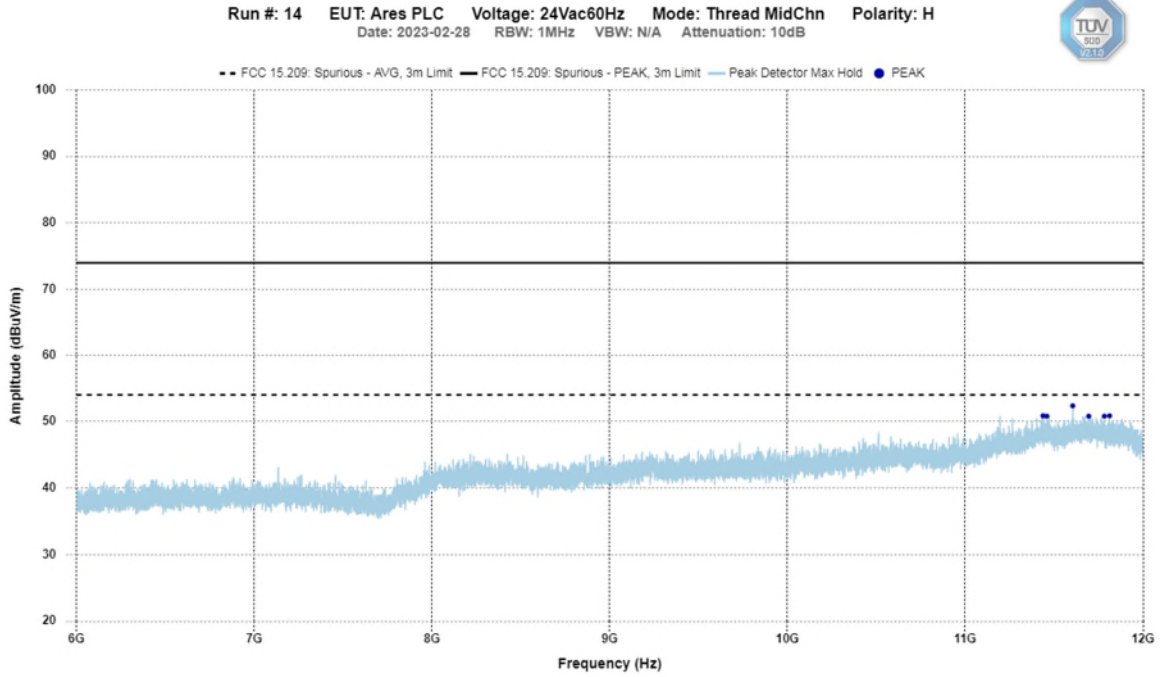


Client	<b>Ecobee Inc.</b>	
Product	<b>ECB601/ECB501</b>	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247	

Mid Channel – 12 GHz – 18 GHz  
Horizontal - Peak Emission Graph

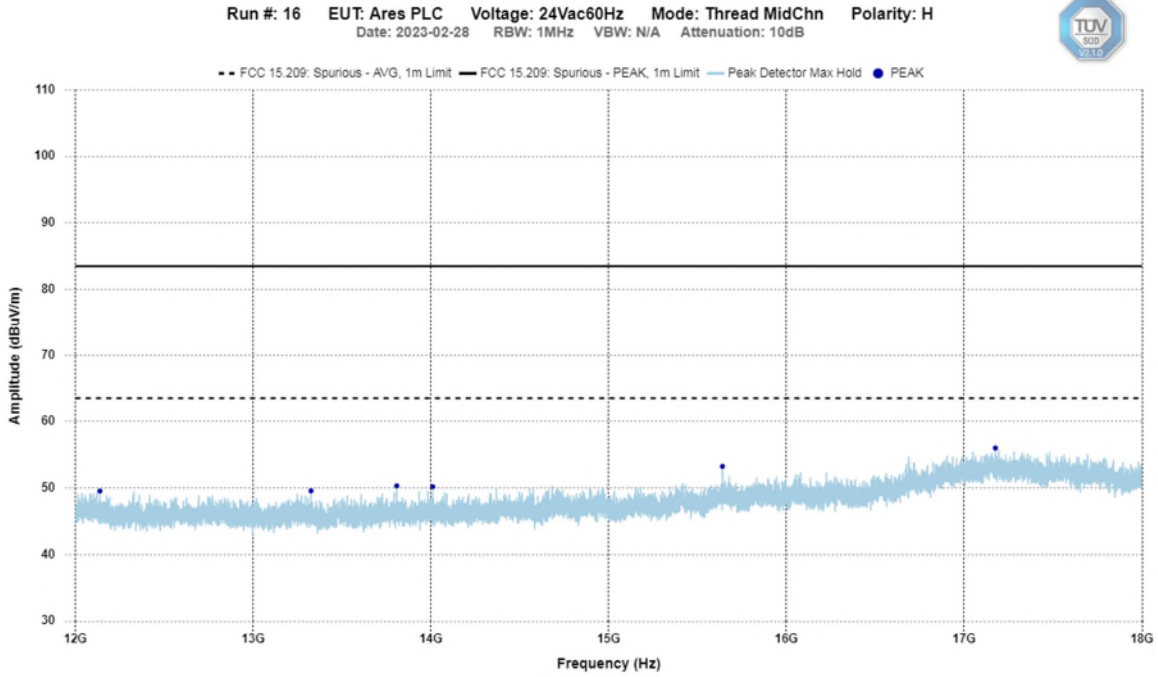



**Plot was taken at a 1 meter distance. All emissions were noise floor of measurement instrument. No emissions were found in this frequency range.**

Client	<b>Ecobee Inc.</b>	
Product	<b>ECB601/ECB501</b>	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247	


Mid Channel – 30 MHz – 1 GHz  
Vertical - Peak Emission Graph


Run #: 21    EUT: AresPLC    Voltage: 24Vac60Hz    Mode: Thread MidChn    Polarity: V  
Date: 2023-03-01    RBW: 120kHz    VBW: N/A    Attenuation: 10dB

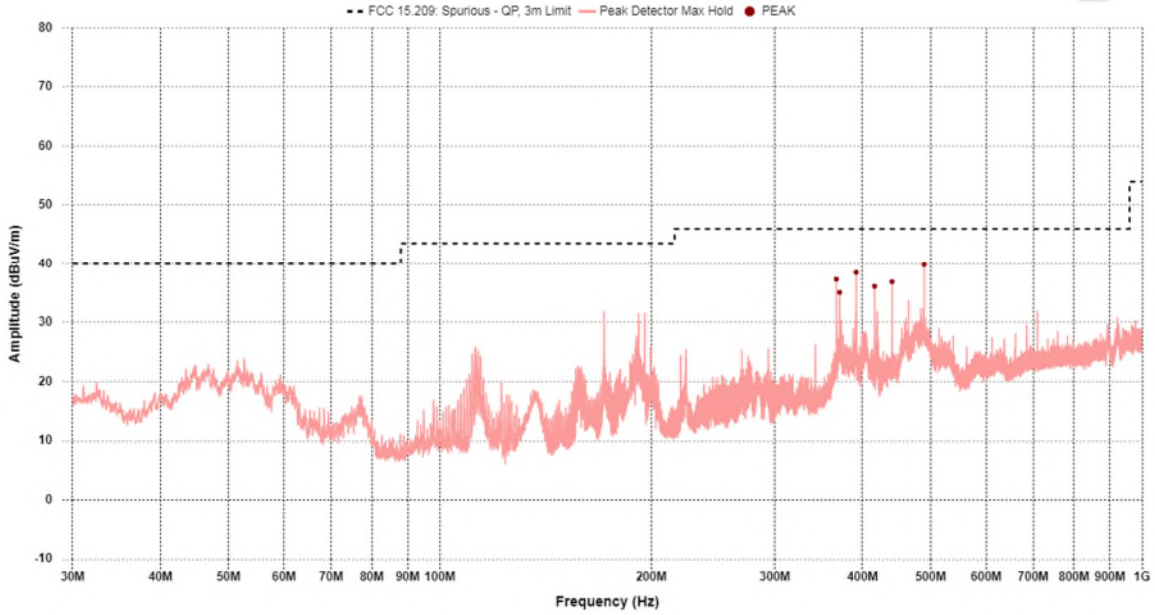

Client	<b>Ecobee Inc.</b>	
Product	<b>ECB601/ECB501</b>	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247	


Mid Channel – 1 GHz – 6 GHz  
Vertical - Peak Emission Graph

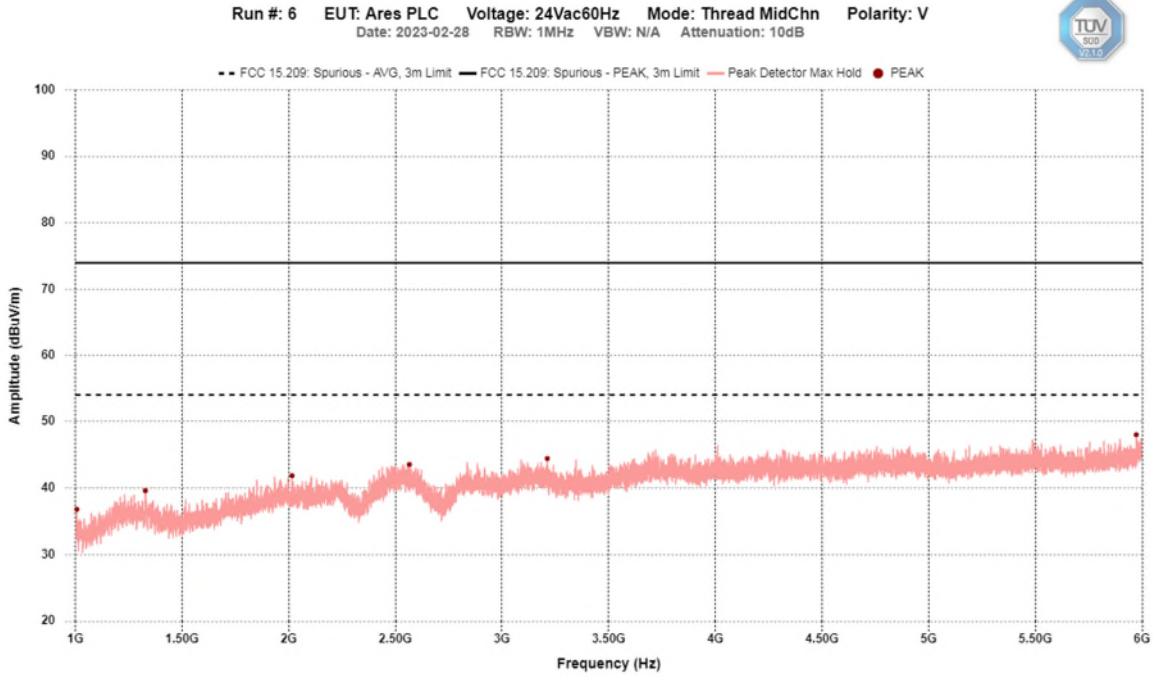


Client	<b>Ecobee Inc.</b>	
Product	<b>ECB601/ECB501</b>	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247	


Mid Channel – 6 GHz – 12 GHz  
Vertical - Peak Emission Graph

Run #: 14 EUT: Ares PLC Voltage: 24Vac60Hz Mode: Thread MidChn Polarity: V  
Date: 2023-02-28 RBW: 1MHz VBW: N/A Attenuation: 10dB

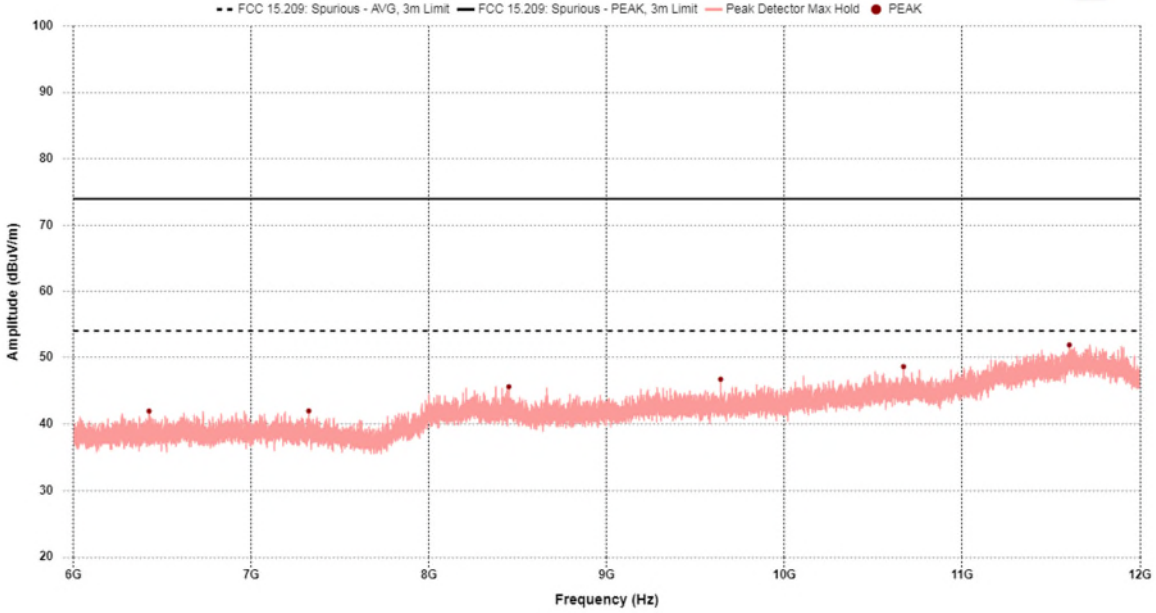


Client	<b>Ecobee Inc.</b>	
Product	<b>ECB601/ECB501</b>	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247	

Mid Channel – 12 GHz – 18 GHz  
Vertical - Peak Emission Graph

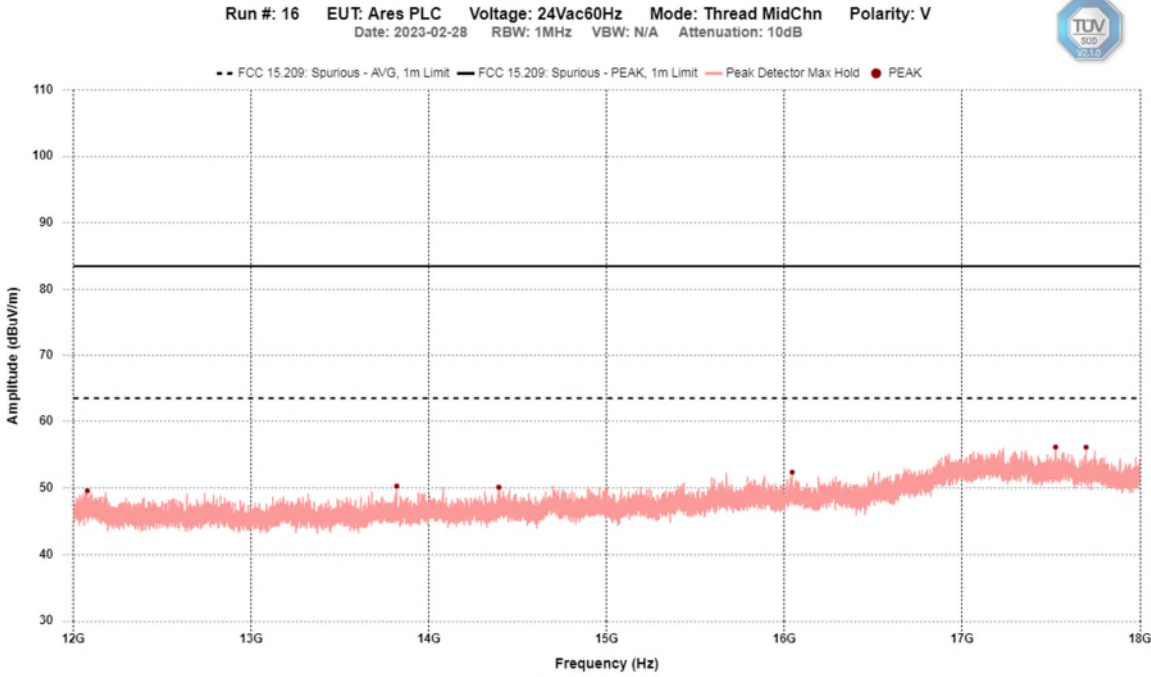


**Plot was taken at a 1 meter distance. All emissions were noise floor of measurement instrument. No emissions were found in this frequency range.**

Client	<b>Ecobee Inc.</b>	
Product	<b>ECB601/ECB501</b>	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247	

## EB601 – Thread


### Band Edge – Low Edge Horizontal - Peak Emission

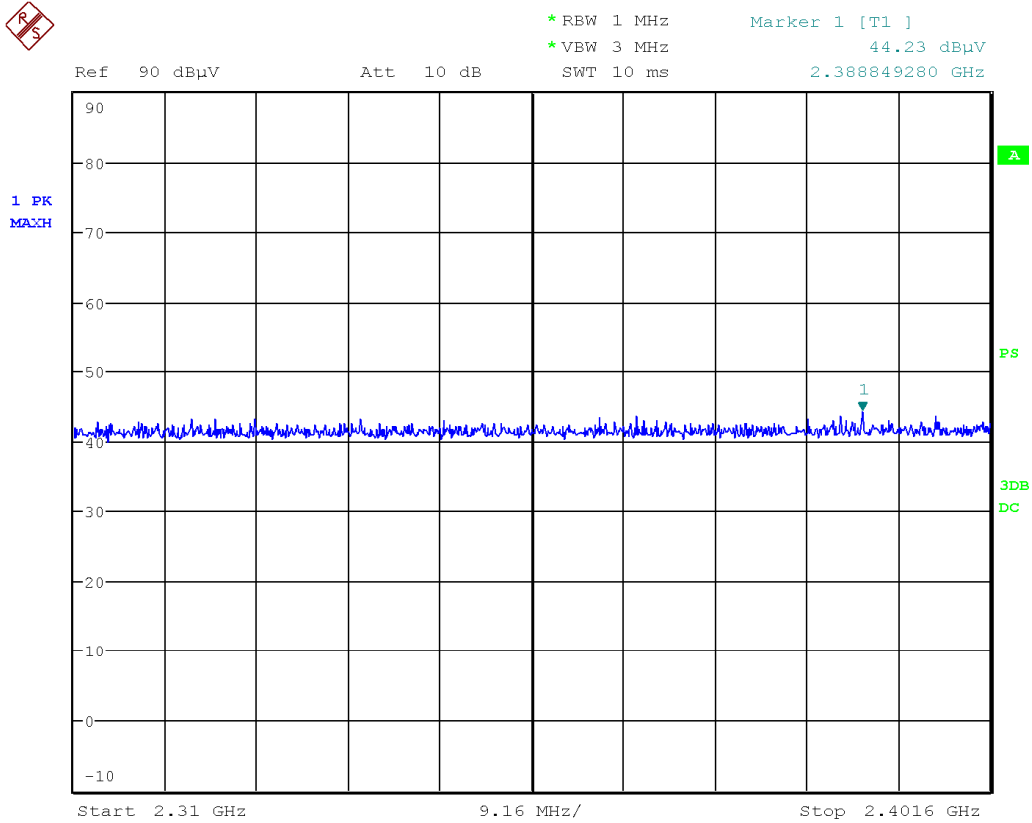


Date: 1.MAR.2023 12:48:46

Note: Restricted band Band Edge plot was taken at a 3m measurement distance. The marker shows the raw value. See the Final Measurements and Results section below for correct values.



Client	Ecobee Inc.	
Product	ECB601/ECB501	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247	


**Band Edge – Low Edge  
Vertical - Peak Emission**

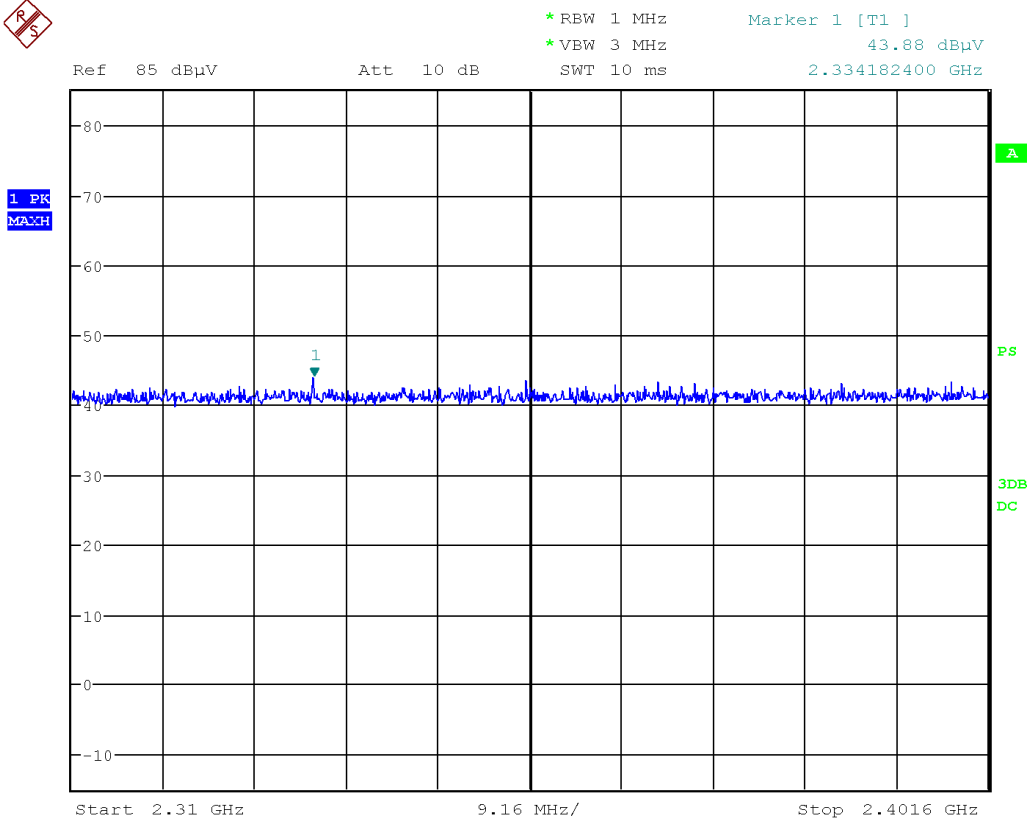

Date: 1.MAR.2023 12:57:52

Note: Restricted band Band Edge plot was taken at a 3m measurement distance. The marker shows the raw value. See the Final Measurements and Results section below for correct values.


© TÜV SÜD Canada Inc. This test report shall not be reproduced except in full, without written approval of TÜV SÜD Canada Inc.

Client	<b>Ecobee Inc.</b>	
Product	<b>ECB601/ECB501</b>	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247	

**Band Edge – Low Edge  
Horizontal - Average Emission**




\* REW 1 MHz      Marker 1 [T1 ]  
 \* VBW 10 Hz      29.43 dBµV  
 SWT 7.4 s      2.393612480 GHz

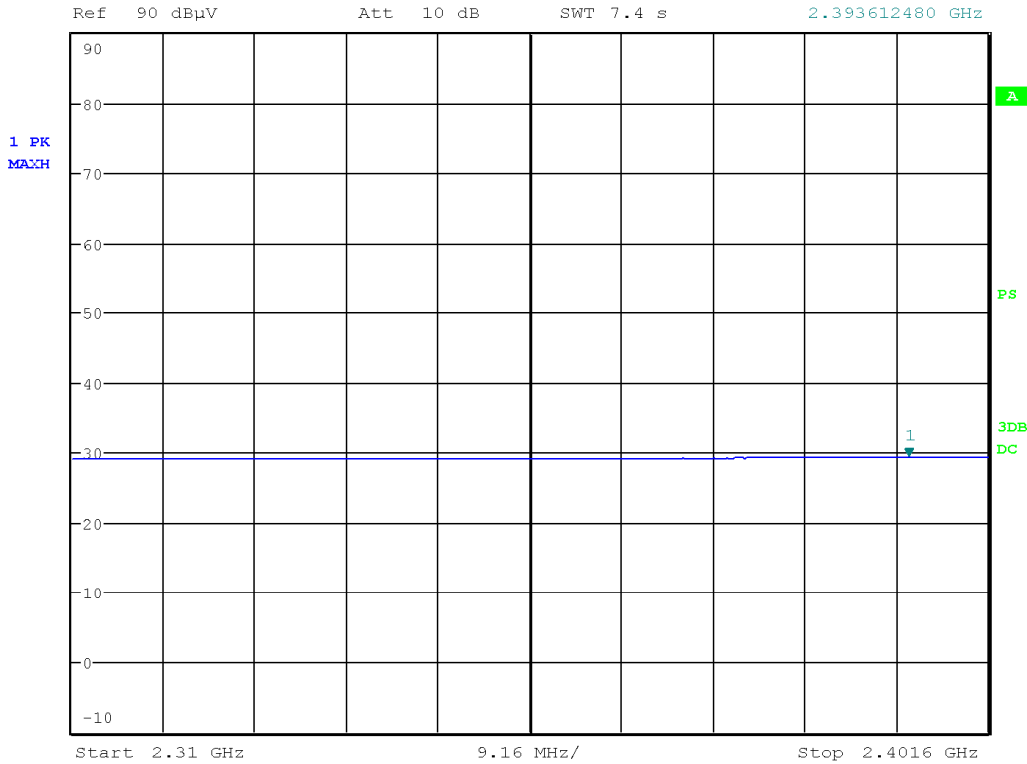


Date: 1.MAR.2023 12:49:16

Note: Restricted band Band Edge plot was taken at a 3m measurement distance. The marker shows the raw value. See the Final Measurements and Results section below for correct values.


Client	<b>Ecobee Inc.</b>	
Product	<b>ECB601/ECB501</b>	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247	

**Band Edge – Low Edge  
Vertical - Average Emission**

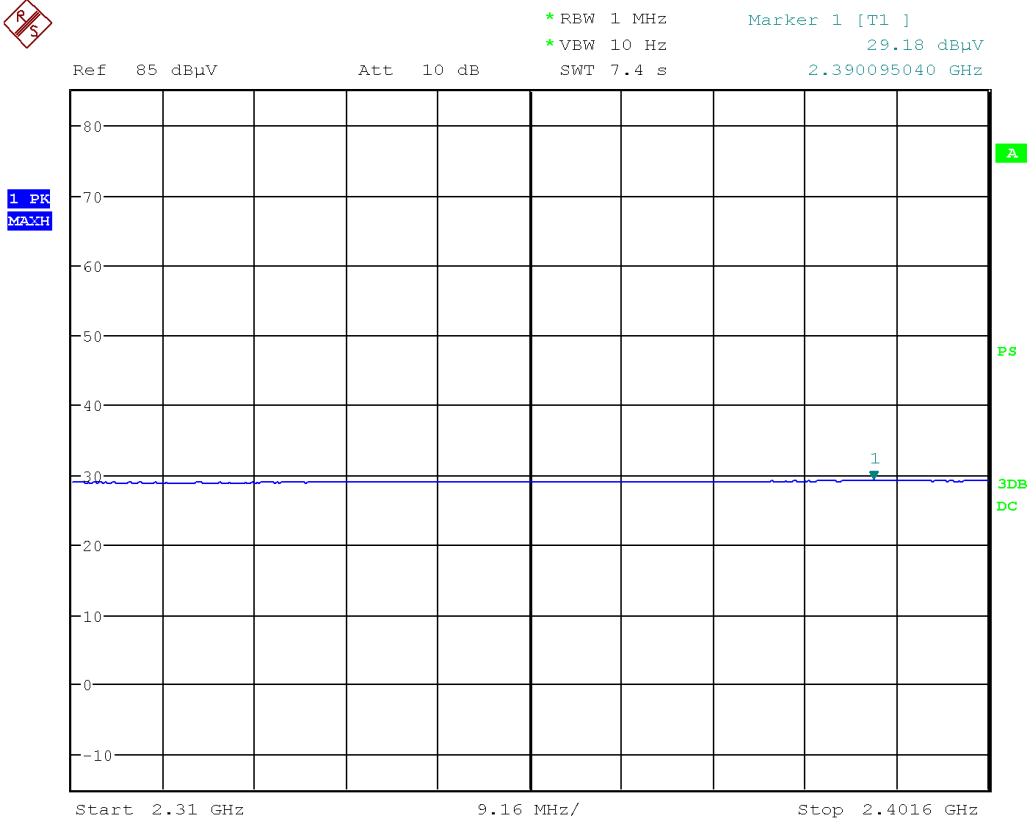


Date: 1.MAR.2023 12:58:22

Note: Restricted band Band Edge plot was taken at a 3m measurement distance. The marker shows the raw value. See the Final Measurements and Results section below for correct values.

Client	<b>Ecobee Inc.</b>	
Product	<b>ECB601/ECB501</b>	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247	


**Band Edge – High Edge  
Horizontal - Peak Emission**

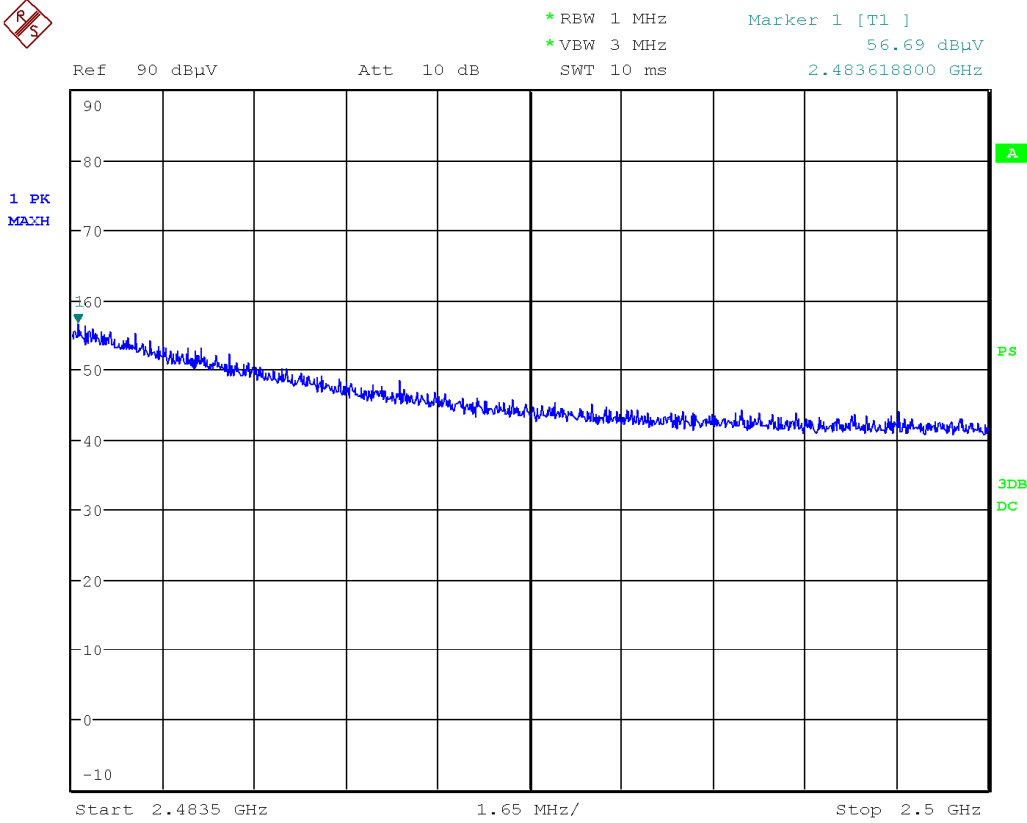


Date: 1.MAR.2023 12:48:13

Note: Restricted band Band Edge plot was taken at a 3m measurement distance. The marker shows the raw value. See the Final Measurements and Results section below for correct values.

© TÜV SÜD Canada Inc. This test report shall not be reproduced except in full, without written approval of TÜV SÜD Canada Inc.


Client	<b>Ecobee Inc.</b>	
Product	<b>ECB601/ECB501</b>	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247	

**Band Edge – High Edge  
Vertical - Peak Emission**

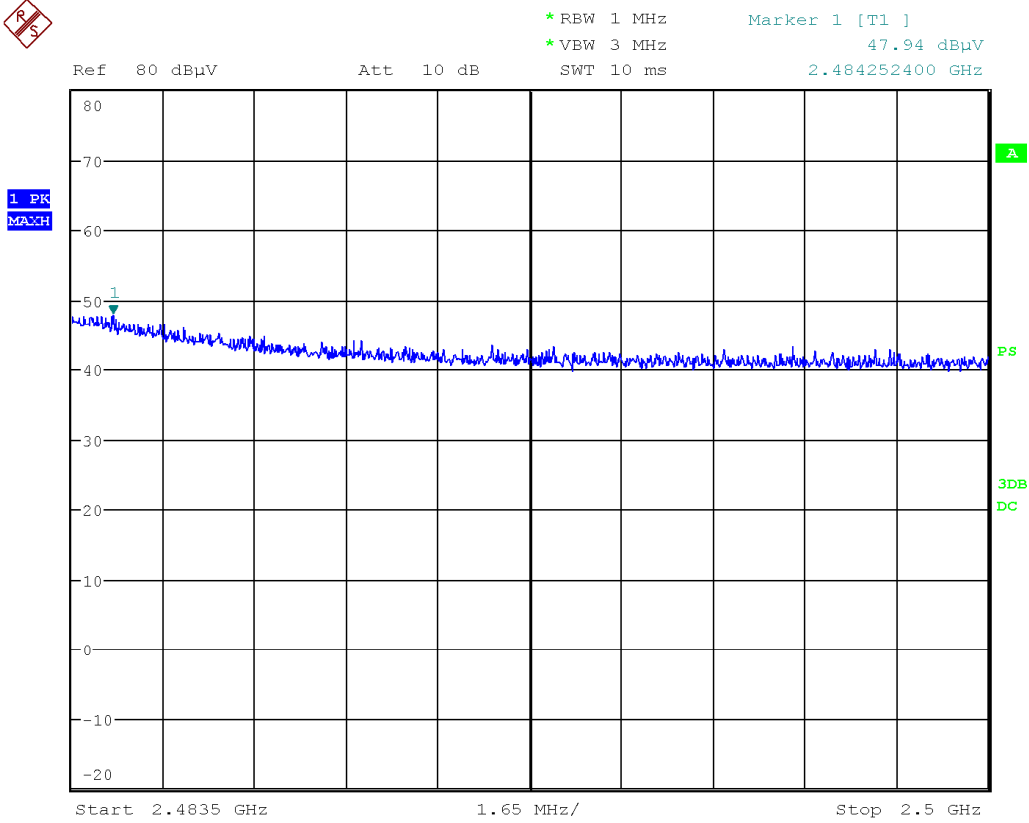


Date: 1.MAR.2023 12:57:18

Note: Restricted band Band Edge plot was taken at a 3m measurement distance. The marker shows the raw value. See the Final Measurements and Results section below for correct values.

Client	<b>Ecobee Inc.</b>	
Product	<b>ECB601/ECB501</b>	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247	


**Band Edge – High Edge  
Horizontal - Average Emission**

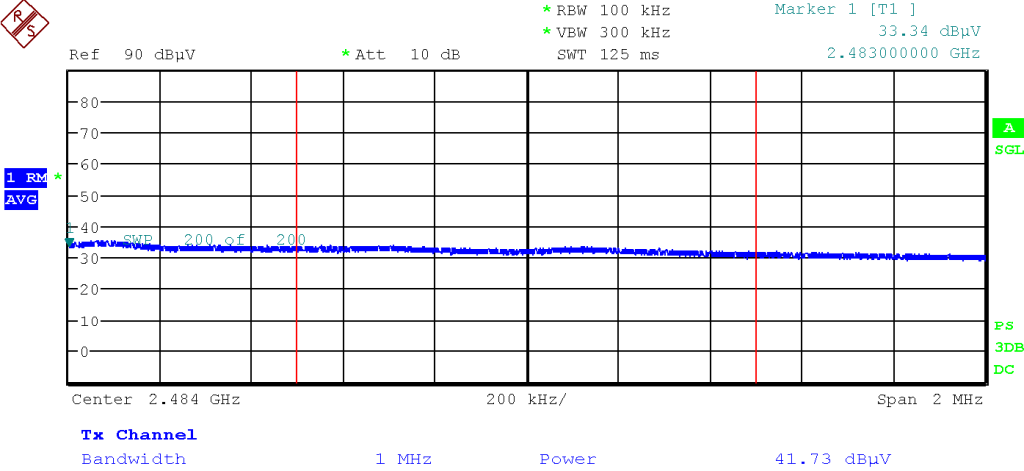


Date: 1.MAR.2023 12:45:44

Note: Restricted band Band Edge plot was taken at a 3m measurement distance. Integration method was used to measure band edge average emissions. See the Final Measurements and Results section below for correct values.

© TÜV SÜD Canada Inc. This test report shall not be reproduced except in full, without written approval of TÜV SÜD Canada Inc.


Client	<b>Ecobee Inc.</b>	
Product	<b>ECB601/ECB501</b>	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247	

**Band Edge – High Edge  
Vertical - Average Emission**

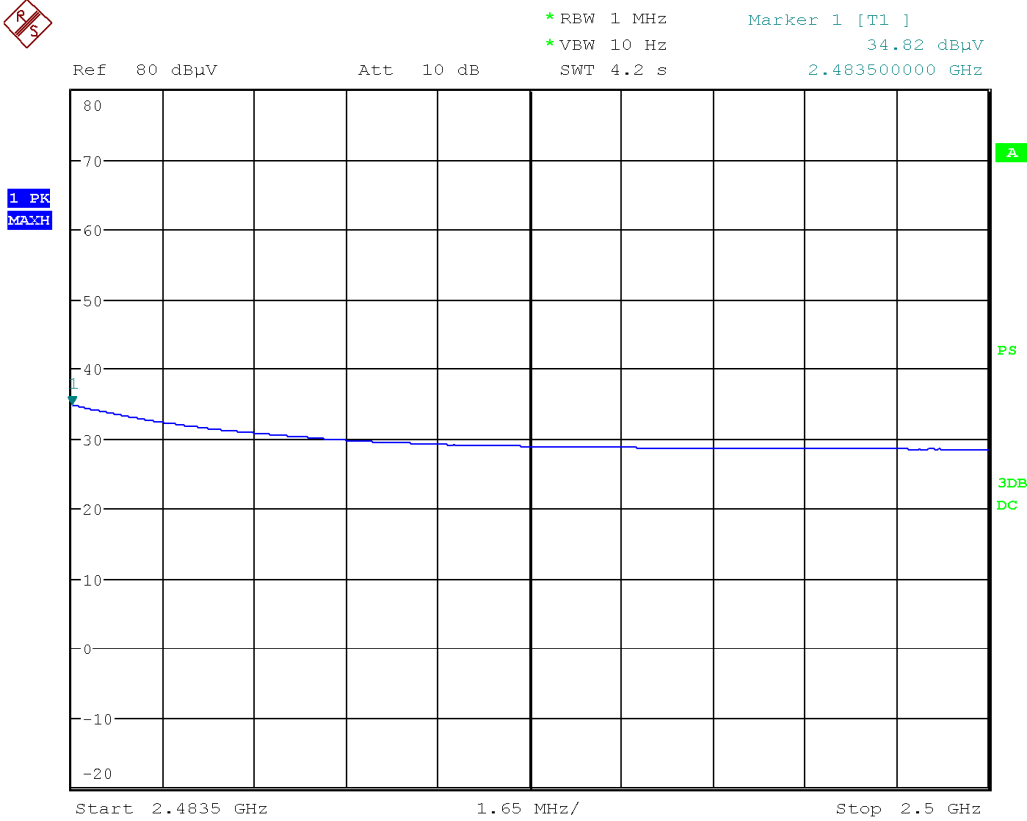

Date: 1.MAR.2023 12:57:36

Note: Restricted band Band Edge plot was taken at a 3m measurement distance. The marker shows the raw value. See the Final Measurements and Results section below for correct values.

Client	<b>Ecobee Inc.</b>	
Product	<b>ECB601/ECB501</b>	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247	

## Final Measurements and Results

The EUT passed. Low, middle, and high bands were measured.


In accordance with 15.247(d), only frequencies exceeding the 15.209 limit that occur within the bands listed in 15.205 need to be verified with a final detector. Emissions outside the restricted bands were measured for informational purposes.

The measurements were maximized by rotating the turn table over a full 0-360 rotation and the antenna height was varied from 1 m to 4 m.

Superius Emission Measurement table

EUT Name		EB601				
Limit		FCC 15.209, Spurious				
Power Supply		24Vac60Hz				
Frequency (Hz)	Detector	Correction Factor (dB)	Level (dBuV/m)	QP Limit (dBuV/m)	QP Margin (dB)	Test Result
<b>Horizontal</b>						
391.71M	QP	-9.3	40.1	46.0	5.9	Pass
489.63M	PEAK	-6.6	38.9	46.0	7.1	Pass
367.23M	PEAK	-9.7	37.4	46.0	8.6	Pass
416.16M	PEAK	-9.4	36.0	46.0	10.0	Pass
440.67M	PEAK	-8.9	35.6	46.0	10.4	Pass
465.15M	PEAK	-7.5	34.8	46.0	11.2	Pass
<b>Vertical</b>						
489.63M	QP	-6.6	39.5	46.0	6.5	Pass
391.71M	PEAK	-9.3	38.5	46.0	7.5	Pass
367.2M	PEAK	-9.7	37.3	46.0	8.7	Pass
440.67M	PEAK	-8.9	36.9	46.0	9.1	Pass
416.19M	PEAK	-9.4	36.1	46.0	9.9	Pass
371.07M	PEAK	-9.6	35.1	46.0	10.9	Pass




Client	<b>Ecobee Inc.</b>	
Product	<b>ECB601/ECB501</b>	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247	

## Band Edge Measurement

Test Frequency (MHz)	Detection Mode	Antenna Polarity (Horz/Vert)	Received Signal (dBµV)	Antenna Factor (dB/m)	Cable Factor (dB)	Attenuator (dB)	Pre-Amp Gain (dB)	Level (dBµV/m)	Emission Limit (dBµV/m)	Margin (dB)	Result
High Channel (CH 49)											
14dBm											
2478.4	Peak	Horz	95.9	32.1	3.2	10.0	-33.6	107.7			PASS
2478.4	Avg	Horz	93.3	32.1	3.2	10.0	-33.6	105.1			PASS
2478.4	Peak	Vert	87.2	32.1	3.2	10.0	-33.6	99.0			PASS
2478.4	Avg	Vert	84.4	32.1	3.2	10.0	-33.6	96.2			PASS
2388.8	Peak	Horz	44.2	32.2	3.2	10.0	-33.8	55.8	74.0	18.2	PASS
2393.6	Avg	Horz	29.4	32.1	3.2	10.0	-33.8	41.0	54.0	13.0	PASS
2334.2	Peak	Vert	43.9	31.8	3.2	10.0	-33.8	55.0	74.0	19.0	PASS
2390.1	Avg	Vert	29.2	32.2	3.2	10.0	-33.8	40.8	54.0	13.2	PASS
2483.6	Peak	Horz	56.7	32.2	3.2	10.0	-33.6	68.5	74.0	5.5	PASS
2483.5	Avg	Horz	41.7	32.2	3.2	10.0	-33.6	53.5	54.0	0.5	PASS
2484.3	Peak	Vert	47.9	32.2	3.2	10.0	-33.6	59.8	74.0	14.2	PASS
2483.5	Avg	Vert	34.8	32.2	3.2	10.0	-33.6	46.6	54.0	7.4	PASS

## Test Equipment List

Equipment	Model No.	Manufacturer	Last Calibration Date	Next Calibration Date	Asset #
Spectrum Analyzer	ESU 40	Rohde & Schwarz	Feb. 11, 2022	Feb. 11, 2024	GEMC 233
BiLog Antenna	3142-C	ETS-Lindgren	Dec. 7, 2022	Dec. 7, 2024	GEMC 8
Horn Antenna 2 – 18 GHz	WBH218HN	Q-par	Jun. 8, 2022	Jun. 8, 2024	GEMC 6375
Horn Antenna 1 – 18 GHz	3117	ETS-Lindgren	Mar. 11, 2022	Mar. 11, 2024	GEMC 340
Pre-Amp 9 kHz – 1 GHz	CPA9230	Chase	Sept 16, 2022	Sept 16, 2024	GEMC 301
Pre-Amp 1 – 26.5 GHz	HP 8449B	HP	Mar. 11, 2022	Mar. 11, 2024	GEMC 189
RF Cable <1GHz	LMR-400	LexTec	NCR	NCR	GEMC 274
RF Cable <1GHz	Sucoflex 104A	Huber+Suhner	NCR	NCR	GEMC 271
RF Cable >1GHz	EMC2	MegaPhase	NCR	NCR	GEMC 369
Emissions Software	V2.1.0	TUV SUD Canada, Inc.	NCR	NCR	GEMC 361

Client	<b>Ecobee Inc.</b>	
Product	<b>ECB601/ECB501</b>	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247	

## **Power Line Conducted Emissions**

### **Purpose**

The purpose of this test is to ensure that the RF energy unintentionally emitted from the EUT's power line does not exceed the limits listed below as defined in the applicable test standard, as measured from a LISN. This helps protect lower frequency radio services such as AM radio, shortwave radio, amateur radio operators, maritime radio, CB radio, and so on, from unwanted interference.

### **Limits and Method**

The limits are as defined in 47 CFR FCC Part 15 Section 15.207


Method is as defined in ANSI C63.4

Average Limits		Quasi-Peak Limits	
150 kHz – 500 kHz	56 to 46* dB $\mu$ V	150 kHz – 500 kHz	66 to 56* dB $\mu$ V
500 kHz – 5 MHz	46 dB $\mu$ V	500 kHz – 5 MHz	56 dB $\mu$ V
5 MHz – 30 MHz	50 dB $\mu$ V	5 MHz – 30 MHz	60 dB $\mu$ V


\* Decreases linearly with the logarithm of the frequency

Both Quasi-Peak and Average limits are applicable and each is specified as being measured with a resolution bandwidth of 9 kHz. For Quasi-Peak, a video bandwidth at least three times greater than the resolution bandwidth is used.

Based on ANSI C63.4 Section 4.2, if the Peak or Quasi-Peak detector measurements do not exceed the Average limits, then the EUT is deemed to have passed the requirements.

Client	<b>Ecobee Inc.</b>	
Product	<b>ECB601/ECB501</b>	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247	

### Typical Setup Diagram

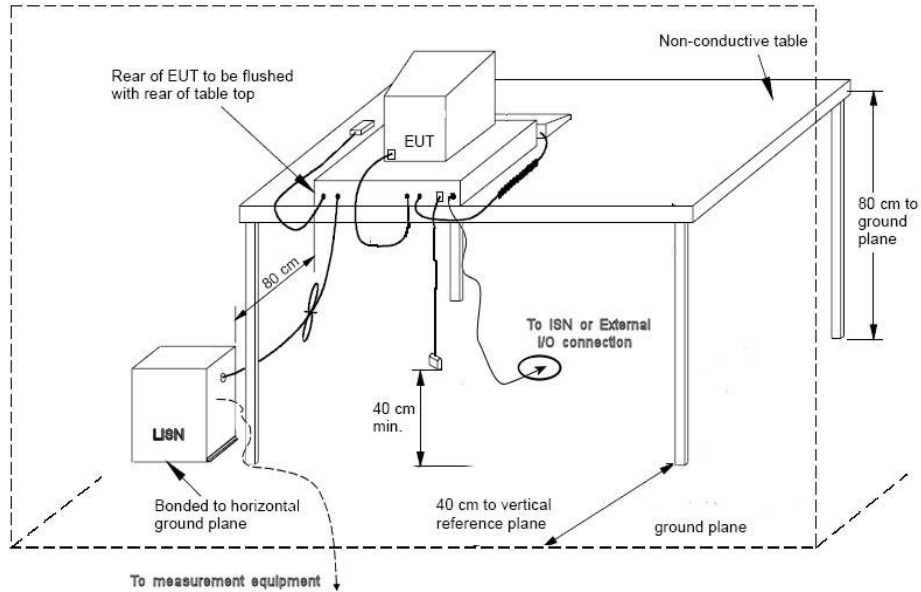


### Measurement Uncertainty

The expanded measurement uncertainty is calculated in accordance with CISPR 16-4-2 and is  $\pm 2.27\text{dB}$  with a 'k=2' coverage factor and a 95% confidence level.


### Preliminary Graphs

The graphs shown below are maximized peak measurement graphs measured with a resolution bandwidth greater than or equal to the final required detector. This peaking process is done as a worst case measurement and enables the detection of frequencies of concern for final measurement. For final measurements with the appropriate detector, where applicable, please refer to the tables under Final Measurements.


Client	<b>Ecobee Inc.</b>	
Product	<b>ECB601/ECB501</b>	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247	


## ECB601

### Line 1 (L1) – 120Vac 60Hz

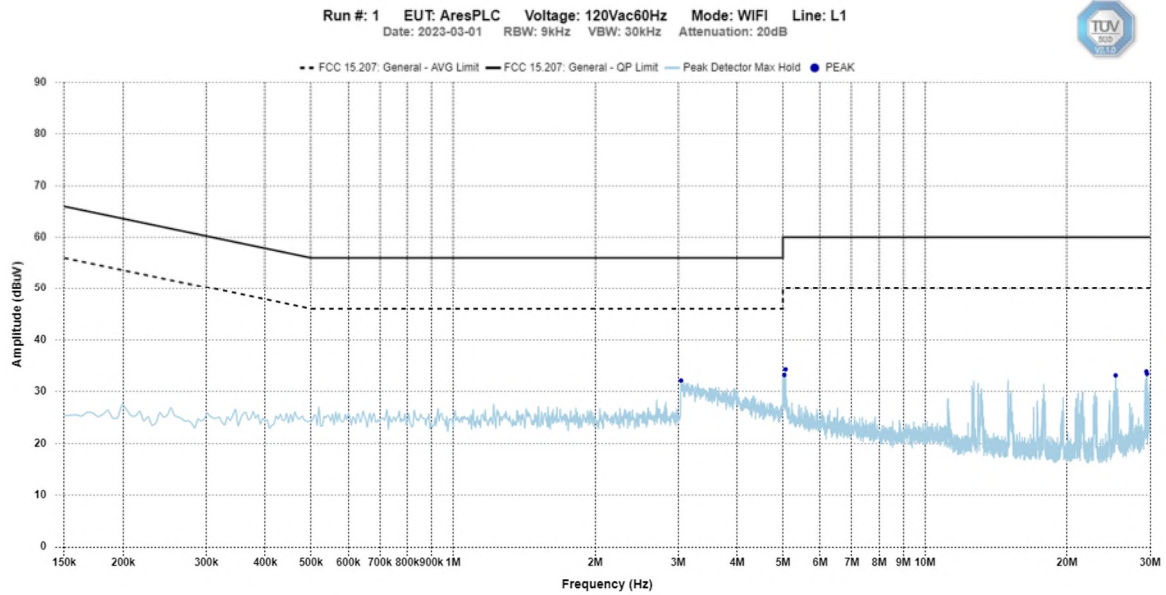

### Line 2 (L2) – 120Vac 60Hz

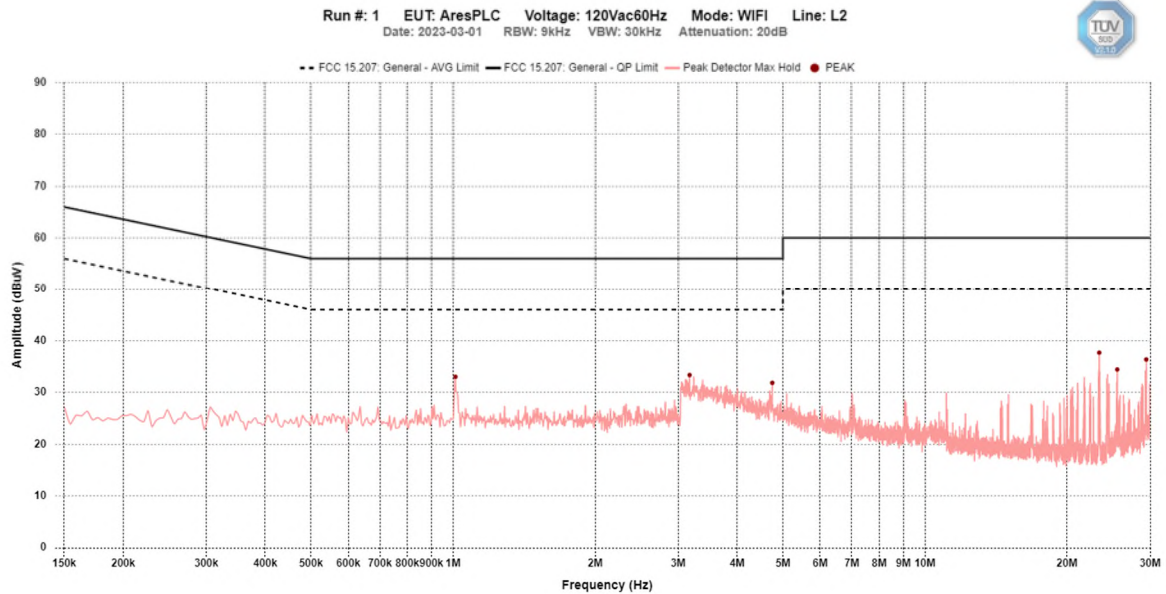

Client	<b>Ecobee Inc.</b>	
Product	<b>ECB601/ECB501</b>	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247	

## Final Measurements

Average and Quasi-Peak Emissions Table

EUT Name		AresPLC						
Limit		FCC 15.207, General						
Power Supply		120Vac60Hz						
Frequency (Hz)	Detector	Correction Factor (dB)	Level (dBuV)	QP Limit (dBuV)	AVG Limit (dBuV)	QP Margin (dB)	AVG Margin (dB)	Test Result
<b>Line 1</b>								
3.0432M	PEAK	10.2	32.1	56.0	46.0	23.9	13.9	Pass
5.0656M	PEAK	10.3	34.3	60.0	50.0	25.7	15.7	Pass
29.4677M	PEAK	11.4	33.9	60.0	50.0	26.1	16.1	Pass
29.5612M	PEAK	11.4	33.4	60.0	50.0	26.6	16.6	Pass
5.0344M	PEAK	10.3	33.2	60.0	50.0	26.8	16.8	Pass
25.365M	PEAK	11.1	33.1	60.0	50.0	26.9	16.9	Pass
<b>Line 2</b>								
23.4139M	PEAK	10.9	37.7	60.0	50.0	22.3	12.3	Pass
3.1724M	PEAK	10.2	33.4	56.0	46.0	22.6	12.6	Pass
1.012M	PEAK	10.2	33.0	56.0	46.0	23.0	13.0	Pass
29.4499M	PEAK	11.1	36.4	60.0	50.0	23.6	13.6	Pass
4.7493M	PEAK	10.3	31.8	56.0	46.0	24.2	14.2	Pass
25.5655M	PEAK	10.9	34.4	60.0	50.0	25.6	15.6	Pass


Note:

Peak = Peak measurement

AVG = Average measurement

QP = Quasi-Peak measurement


See 'Appendix B – EUT, Peripherals and Test Setup Photos' for photos showing the test set-up for the highest line conducted emission

Client	<b>Ecobee Inc.</b>	
Product	<b>ECB601/ECB501</b>	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247	


## Test Equipment List

Equipment	Model No.	Manufacturer	Last Calibration Date	Next Calibration Date	Asset #
Spectrum Analyzer	ESL 6	Rohde & Schwarz	Feb. 17, 2023	Feb. 17, 2025	GEMC 160
LISN	FCC-LISN-50/250-16-2-01	FCC	Feb. 23, 2023	Feb. 23, 2025	GEMC 303
RF Cable 3m	LMR-400-3M-50Ω-MN-MN	LexTec	NCR	NCR	GEMC 276
Attenuator 10 dB	6N10W-10	Inmet	NCR	NCR	GEMC 348
Emissions Software	V2.1.0	TUV SUD Canada, Inc.	NCR	NCR	GEMC 361

FCC\_ICES003\_CE\_Rev1

Client	<b>Ecobee Inc.</b>	 Canada
Product	<b>ECB601/ECB501</b>	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247	

**Appendix A – EUT Summary**


Client	<b>Ecobee Inc.</b>	
Product	<b>ECB601/ECB501</b>	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247	

For further details for filing purposes, refer to filing package.

### General EUT Description


<b>Client</b>	
Organization / Address	Ecobee Inc. 25 Dockside Drive. Suite 700 Toronto, ON. M5A 0B5, Canada
Contact	John Russomanno
Phone	416-809-2405
Email	johnr@ecobee.com
<b>EUT Details</b>	
EUT Name	ECB601/ECB501
FCC ID	WR955470766937
IC	7981A-55470766937
Equipment Category	Unlicensed transmitter
Basic EUT Functionality	EUT is a smart thermostat that have a 2400 – 2483.5 MHz DTS (802.11 b/g/n) and FHSS transmitters and a 902 – 928 MHz FHSS/Hybrid transmitter. 5150-5250 MHz and 5725-5850 MHz UNII transmitter.
Input Voltage and Frequency	24 Vac 60 Hz
Connectors available on EUT	1 (terminals for HVAC control)
Peripherals Required for Test	120 Vac – 24 Vac step down transformer.
Release type	Final
Intentional Radiator Frequency Range	2400 – 2483.5 MHz for DTS and FHSS 902 – 928 MHz FHSS/Hybrid 5150-5250 MHz and 5725-5850 MHz UNII transmitter.
Antenna	Flexible PCB antennas
Type of Transmitter	Hybrid, Frequency Hopping and Digitally Modulated
Modulation	FSK for Sub Gig Various for 2.4 GHz 802.11 b/g/n, FSK, etc
EUT Configuration	Test software was configured to transmit continuously at 100% duty cycle and to control



Client	<b>Ecobee Inc.</b>	
Product	<b>ECB601/ECB501</b>	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247	

	hopping through its pseudo random sequence or single channel. Channels tested: Lowest and Highest
--	--

Note the EUT is considered to have been received the date of the commencement of the first test, unless otherwise stated. For a close-up picture of the EUT, see ‘Appendix B – EUT and Test Setup Photos’.

Client	<b>Ecobee Inc.</b>	 Canada
Product	<b>ECB601/ECB501</b>	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247	

## Appendix B – EUT and Test Setup Photos

Refer to the files separate from this test report