

Test Report

Test report no.: 21116501-24768-0

Date of issue: 2022-05-02

Test result: The test item - **passed** - and complies with below listed standards.

Applicant

SICK AG

Manufacturer

SICK AG

Test Item

RMS-E

RF-Spectrum Testing according to:

FCC 47 CFR Part 15

Radio Frequency Devices, Subpart C -
§15.255 Operation within the bands 57-71GHz


Tested by
(name, function, signature)

Sebastian Janoschka
Lab Manager RF


signature

Approved by
(name, function, signature)

Andreas Bender
Deputy Managing Director


signature

Applicant and Test item details

Applicant	SICK AG Merkurring 20 22143, Hamburg, Germany Phone: (phone number) Fax: (fax number)
Manufacturer	SICK AG Merkurring 20 22143, Hamburg, Germany
Test item description	Radar measurement sensor
Model/Type reference	RMS-E
FCC ID	WRMRMS-E
Frequency	61.0 GHz – 61.5 GHz
Antenna	Integrated patch antenna
Power supply	9.0 to 32.0 V DC
Temperature range	-40 °C to +65 °C

Disclaimer and Notes

The content of this test report relates to the mentioned test sample(s) only.
Without a written permit of IBL-Lab GmbH, this test report shall not be reproduced, except in full.

The last valid version is available at TAMSys®.

Copyright ©: All rights reserved by IBL-Lab GmbH

Within this test report, a point / comma is used as a decimal separator.
If otherwise, a detailed note is added adjoined to its use.

IBL-Lab GmbH does not take test samples. The samples used for testing are provided by the applicant.

Decision rule:

Decision rule based on simple acceptance without guard bands, binary statement, based on mutually agreed uncertainty tolerances with expansion factor k=2 according to ILAC-G8:09/2019

1 TABLE OF CONTENTS

1	TABLE OF CONTENTS	3
2	GENERAL INFORMATION	4
2.1	Administrative details	4
2.2	Possible test case verdicts	4
2.3	Observations	5
2.4	Opinions and interpretations	5
2.5	Revision History	5
2.6	Further documents	5
3	ENVIRONMENTAL & TEST CONDITIONS	6
3.1	Environmental conditions	6
3.2	Normal and extreme test conditions	6
4	TEST STANDARDS AND REFERENCES	6
5	EQUIPMENT UNDER TEST (EUT)	7
5.1	Product description	7
5.2	Description of test item	7
5.3	Technical data of test item	7
5.4	Additional information	7
5.5	Antenna characteristics	8
6	SUMMARY OF TEST RESULTS	9
7	TEST RESULTS	10
7.1	Conducted emissions	10
7.2	Occupied bandwidth (§2.1049)	13
7.3	Radiated EIRP	16
7.4	Frequency stability (§2.1055 & §15.255(f))	19
7.5	Field strength of emissions (spurious and harmonics)	28
8	Test Setup Description	50
8.1	AC conducted	51
8.2	Semi Anechoic Chamber with Ground Plane	52
8.3	Fully Anechoic Chamber	54
8.4	Radiated measurements > 18 GHz	55
8.5	Radiated measurements > 50 GHz	55
8.6	Radiated measurements > EIRP power	56
9	Measurement procedures	58
9.1	Radiated spurious emissions from 9 kHz to 30 MHz	58
9.2	Radiated spurious emissions from 30 MHz to 1 GHz	59
9.3	Radiated spurious emissions from 1 GHz to 18 GHz	60
9.4	Radiated spurious emissions above 18 GHz	61
10	MEASUREMENT UNCERTAINTIES	62
Annex 1	EUT Photographs, external	63
Annex 2	EUT Photographs, internal	66
Annex 3	Test Setup Photographs	73

2 GENERAL INFORMATION

2.1 Administrative details

Testing laboratory	IBL-Lab GmbH Heinrich-Hertz-Allee 7 66386 Sankt Ingbert / Germany Fon: +49 6894 38938-0 Fax: +49 6894 38938-99 URL: www.ib-lenhardt.de E-Mail: info@ib-lenhardt.de
Accreditation	<p>The testing laboratory is accredited by Deutsche Akkreditierungsstelle GmbH (DAkKS) in compliance with DIN EN ISO/IEC 17025:2018.</p> <p>Scope of testing and registration number:</p> <ul style="list-style-type: none"> • Electronics D-PL-21375-01-01 • Electromagnetic Compatibility D-PL-21375-01-02 • Electromagnetic Compatibility and Telecommunication (FCC requirements) D-PL-21375-01-03 Testing Laboratory Designation Number DE0024 • Telecommunication (TC) and Electromagnetic Compatibility (EMC) for Canadian Standards D-PL-21375-01-04 ISED Company Number 27156 Testing Laboratory CAB Identifier DE0020 • Telecommunication (TC) D-PL-21375-01-05 <p>Website DAkKS: https://www.dakks.de/</p> <p>The Deutsche Akkreditierungsstelle GmbH (DAkKS) is also a signatory to the ILAC Mutual Recognition Arrangement</p>
Testing location	IBL-Lab GmbH Heinrich-Hertz-Allee 7 66386 St. Ingbert / Germany
Date of receipt of test samples	2021-10-28
Start – End of tests	2022-03-01 – 2022-03-18

2.2 Possible test case verdicts

Test sample meets the requirements	P (PASS)
Test sample does not meet the requirements	F (FAIL)
Test case does not apply to the test sample	N/A (Not applicable)
Test case not performed	N/P (Not performed)

2.3 Observations

No additional observations other than the reported observations within this test report have been made.

2.4 Opinions and interpretations

No appropriate opinions or interpretations according ISO/IEC 17025:2017 clause 7.8.7 are within this test report.

2.5 Revision History

-0 Initial Version

2.6 Further documents

List of further applicable documents belonging to the present test report:
– no additional documents –

3 ENVIRONMENTAL & TEST CONDITIONS

3.1 Environmental conditions

Temperature	20°C ± 5°C
Relative humidity	25-75% r.H.
Barometric Pressure	860-1060 mbar
Power supply	230 V AC ± 5%

3.2 Normal and extreme test conditions

	minimum	normal	maximum
Temperature	-40 °C	20 °C	+65 °C
Relative humidity	-/-	45 % r.h.	-/-
Power supply	9.0 V DC	24.0 V DC	32.0 V DC

4 TEST STANDARDS AND REFERENCES

Test standard (accredited)	Description
FCC 47 CFR Part 15	Radio Frequency Devices, Subpart C - §15.255 Operation within the bands 57-71GHz

Reference	Description
ANSI C63.4-2014	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
ANSI C63.10-2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices

5 EQUIPMENT UNDER TEST (EUT)

5.1 Product description

Test item description	Radar measurement sensor
-----------------------	--------------------------

5.2 Description of test item

Model name*	RMS-E
Serial number*	21049905
Hardware status*	V1.0
Software status*	1.3.062B

*: as declared by applicant

5.3 Technical data of test item

Operational frequency band*	61.0 GHz – 61.5 GHz
Type of radio transmission*	modulated carrier
Modulation type*	FMCW
Number of channels*	1
Channel bandwidth*	< 1 GHz
Channel spacing*	N/A
Receiver category*	N/A
Receiver bandwidth*	N/A
Duty cycle*	~5%
Antenna*	Integrated patch antenna
Rated RF output power*	< 50 dBm
Power supply*	9.0 to 32.0 V DC
Temperature range*	-40 °C to +65 °C

*: as declared by applicant

5.4 Additional information

Model differences	None – Engineering sample “RMS-A” with Serial number 21049905 was used for testing purposes. As declared by customer this sample and configuration will be branded RMS-E. For further details please refer to document “RMSAE_declaration_labelling_20220405.pdf”
Ancillaries tested with	none
Additional equipment used for testing	none

5.5 Antenna characteristics

RMS-A

Antenna Specification

Device-Family Name	RMS1000
Type Name	RMS1731C-636111
Model Name	RMS-A

Technical Data

- Patch antenna 3 Tx x 4 Rx columns
- Max. Tx Gain 15 dBi

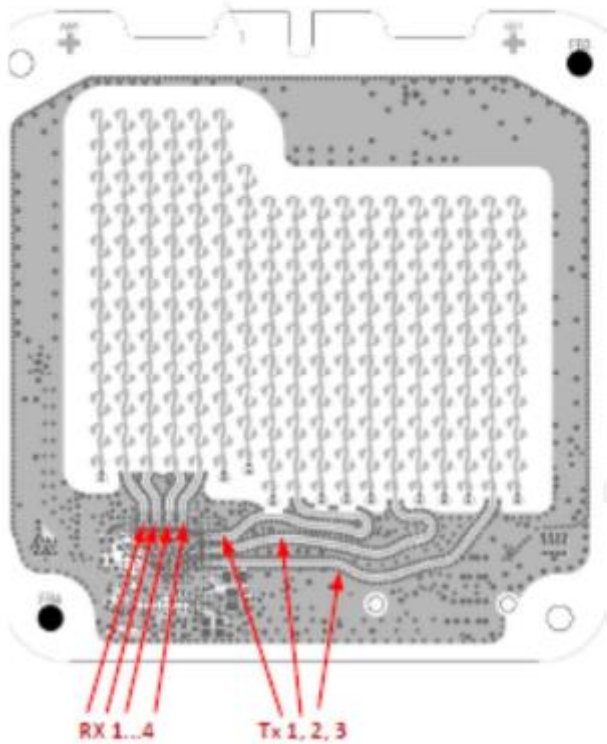


Figure 1: RMS-A Antenna array

6 SUMMARY OF TEST RESULTS

Test specification

FCC 47 CFR Part 15.255

Clause	Requirement / Test case	Test Conditions	Result / Remark	Verdict
§ 15.207 (a)	Conducted emissions	Normal	< limit	P
§15.255(e) / §2.1049	Occupied bandwidth (6dB bandwidth)	Normal	416.4 MHz	P
§15.255(c)	Radiated EIRP	Normal	15.41 dBm Peak 1.53 dBm AVG	P
§15.215(c) / §15.255(f)	Transmitter frequency stability	Normal/Extreme	Within band	P
§15.255(d) / §15.209(a)	Field strength of emissions (spurious & harmonics)	Normal	< limit	P

Notes

FCC's Millimeter Wave Test Procedures:

I. A radiated method of measurements in order to demonstrate compliance with the various regulatory requirements has been chosen in consideration of test equipment availability and the limitations of many external harmonic mixers. A conducted method of measurement could be employed if EUT and mixer waveguides both are accessible and of the same type (WG number) and if waveguide sections and transitions can be found. Another potential problem is that the peak power output may exceed the +20 dBm input power limit of many commercially available mixers. For these reasons a radiated method is preferred.

Comments and observations

none

7 TEST RESULTS

7.1 Conducted emissions

Description / Limits

§15.207 (a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 µH/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency of emission [MHz]	Conducted limit [dBµV]	
	Quasi-Peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5.0	56	46
5.0 – 30	60	50

*Decreases with the logarithm of the frequency.

§15.207 (c) Measurements to demonstrate compliance with the conducted limits are not required for devices which only employ battery power for operation and which do not operate from the AC power lines or contain provisions for operation while connected to the AC power lines. Devices that include, or make provisions for, the use of battery chargers which permit operating while charging, AC adapters or battery eliminators or that connect to the AC power lines indirectly, obtaining their power through another device which is connected to the AC power lines, shall be tested to demonstrate compliance with the conducted limits.

Test setup: see 8.1

Test results:


See next pages!

Note:

Testing was performed with a test mode comparable to normal operation mode.

Plot no. 1: conducted emissions, L1

Full Spectrum

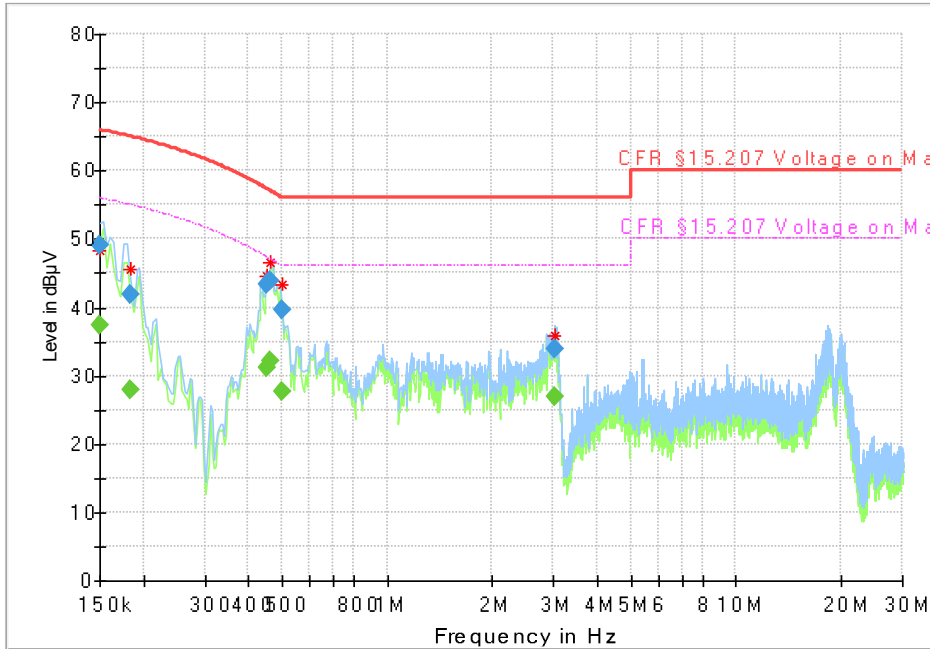


Final Result

Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.150000	---	37.27	56.00	18.73	15000.0	9.000	L1	10.8
0.150000	49.21	---	66.00	16.79	15000.0	9.000	L1	10.8
0.183350	---	27.83	55.05	27.21	15000.0	9.000	L1	9.9
0.183350	41.89	---	65.05	23.16	15000.0	9.000	L1	9.9
0.452000	---	31.15	47.37	16.22	15000.0	9.000	L1	10.1
0.452000	43.33	---	57.37	14.04	15000.0	9.000	L1	10.1
0.462656	---	32.20	47.07	14.86	15000.0	9.000	L1	10.1
0.462656	43.89	---	57.07	13.18	15000.0	9.000	L1	10.1
0.497775	---	27.75	46.06	18.31	15000.0	9.000	L1	10.1
0.497775	39.69	---	56.06	16.37	15000.0	9.000	L1	10.1
3.019100	---	26.80	46.00	19.20	15000.0	9.000	L1	9.9
3.019100	33.86	---	56.00	22.14	15000.0	9.000	L1	9.9

Plot no. 2: conducted emissions, N

Full Spectrum

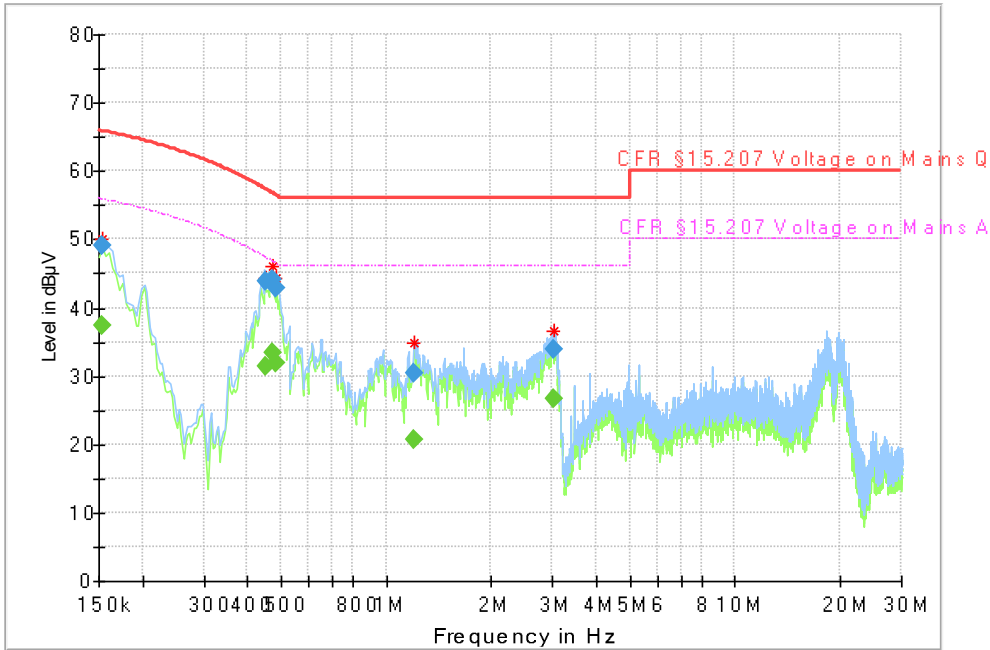


Final Result

Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.152962	---	37.50	55.92	18.42	15000.0	9.000	N	10.7
0.152962	49.22	---	65.92	16.70	15000.0	9.000	N	10.7
0.453000	---	31.33	47.34	16.01	15000.0	9.000	N	10.1
0.453000	43.79	---	57.34	13.56	15000.0	9.000	N	10.1
0.470119	---	33.50	46.85	13.36	15000.0	9.000	N	10.1
0.470119	44.02	---	56.85	12.83	15000.0	9.000	N	10.1
0.481312	---	31.88	46.53	14.65	15000.0	9.000	N	10.1
0.481312	42.77	---	56.53	13.76	15000.0	9.000	N	10.1
1.206712	---	20.79	46.00	25.21	15000.0	9.000	N	9.9
1.206712	30.52	---	56.00	25.48	15000.0	9.000	N	9.9
3.015100	---	26.78	46.00	19.22	15000.0	9.000	N	9.9
3.015100	33.88	---	56.00	22.12	15000.0	9.000	N	9.9

7.2 Occupied bandwidth (§2.1049)
<p>Description</p> <p>§2.1049 Measurements required: Occupied bandwidth. The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured.</p>
<p>Limits</p> <p>The radar device's occupied bandwidth (i.e. 99% emission bandwidth) shall be contained in the 57-71GHz frequency band. FCC §15.255 € (1): For the purposes of this paragraph, emission bandwidth is defined as the instantaneous frequency range occupied by a steady state radiated signal with modulation, outside which the radiated power spectral density never exceeds 6 dB below the maximum radiated power spectral density in the band, as measured with a 100 kHz resolution bandwidth spectrum analyzer. The center frequency must be stationary during the measurement interval, even if not stationary during normal operation (e.g., for frequency hopping devices).</p>
<p>Test procedure</p> <p>ANSI C63.10, 6.9.3 The occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission. The following procedure shall be used for measuring 99% power bandwidth: a) The instrument center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be between 1.5 times and 5.0 times the OBW. b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW, and VBW shall be approximately three times the RBW, unless otherwise specified by the applicable requirement. c) Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than [10 log (OBW/RBW)] below the reference level. Specific guidance is given in 4.1.5.2. d) Step a) through step c) might require iteration to adjust within the specified range. e) Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used. f) Use the 99% power bandwidth function of the instrument (if available) and report the measured bandwidth. g) If the instrument does not have a 99% power bandwidth function, then the trace data points are recovered and directly summed in linear power terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5% of the total is reached; that frequency is recorded as the upper frequency. The 99% power bandwidth is the difference between these two frequencies. h) The occupied bandwidth shall be reported by providing plot(s) of the measuring instrument display; the plot axes and the scale units per division shall be clearly labeled. Tabular data may be reported in addition to the plot(s).</p>
<p>Note</p> <p>Measurements with the peak detector are also suitable to demonstrate compliance of an EUT, as long as the required resolution bandwidth is used, because peak detection will yield amplitudes equal to or greater than amplitudes measured with RMS detector. The measurement data from a spectrum analyser peak detector will represent the worst-case results (see ANSI C63.10).</p>
<p>Test setup: 8.4</p>

Test results under normal test conditions:				
EUT mode	Test conditions	f _L [GHz]	f _H [GHz]	OBW [MHz]
Normal operating	Normal - 6dB	61.062	61.478	416.4
Normal operating	Normal - 99%	61.061	61.478	417.5

Plot no. 3: 6 dB bandwidth

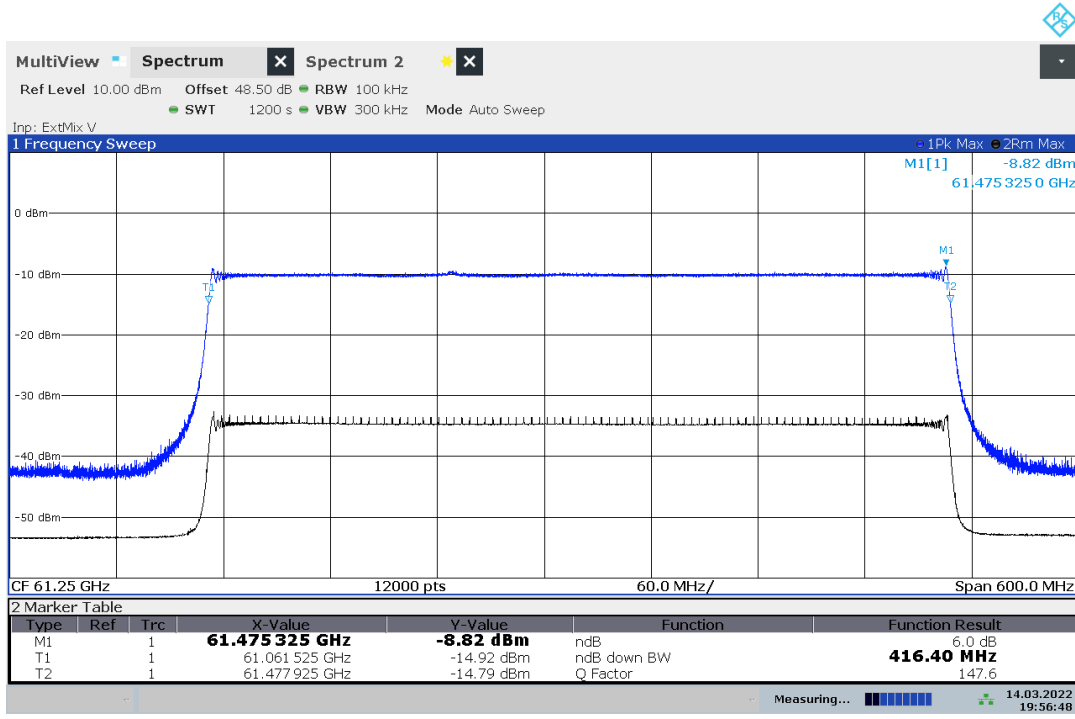

19:56:48 14.03.2022

TR no.: 21116501-24768-0

2022-05-02

Plot no. 4: 99 % bandwidth



20:28:32 14.03.2022

7.3 Radiated EIRP

§ 15.255 (c) (4) The peak power shall be measured with an RF detector that has a detection bandwidth that encompasses the 57-71 GHz band and has a video bandwidth of at least 10 MHz. The average emission levels shall be measured over the actual time period during which transmission occurs.

Limits

The average power of any emission shall not exceed 40 dBm and the peak power of any emission shall not exceed 43 dBm

Test procedure

According to ANSI C63.10, 9.11 Measurement of the fundamental emission using an RF detector and substitution.

Test setup: 8.5


Test results:

EUT mode	Temperature / Voltage	Peak Power	Mean Power	Duty Cycle
Normal operating	T _{nom} / V _{nom}	15.41 dBm	1.53 dBm	3.94 %


TR no.: 21116501-24768-0

2022-05-02

Plot no. 5: Screenshot DSO, zoomed in on burst, burst timing

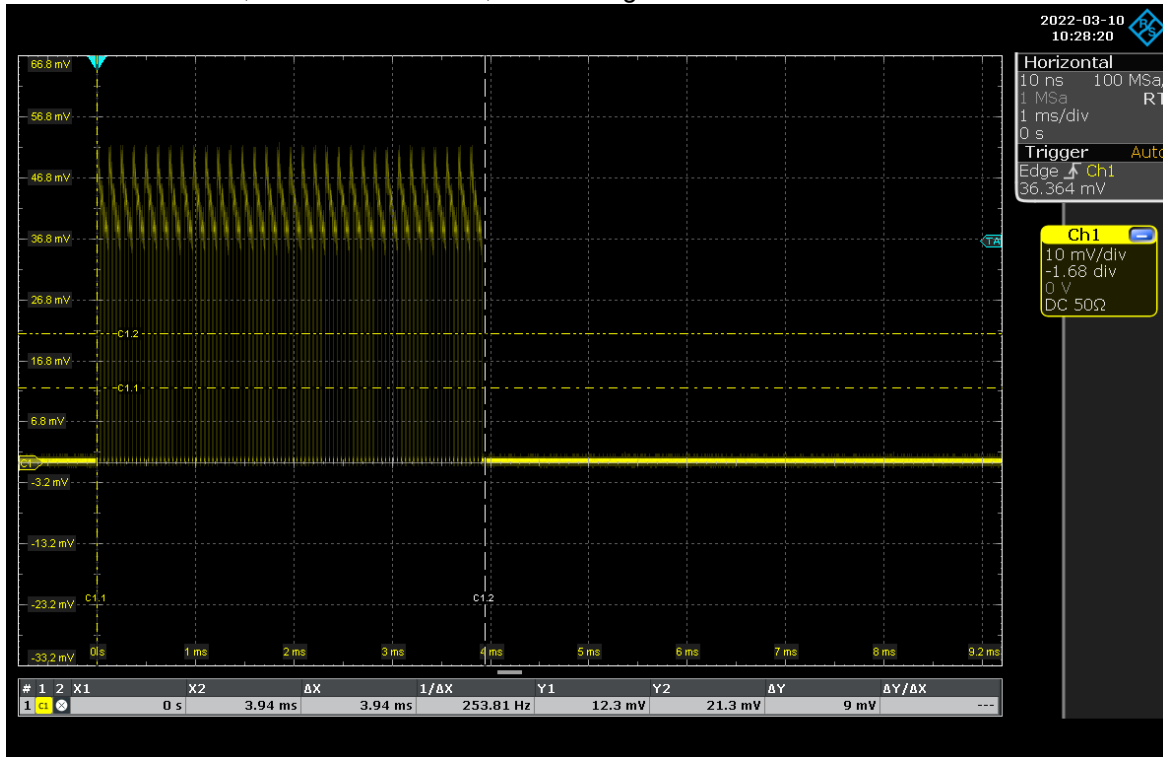


Plot no. 6: Screenshot DSO, burst timing

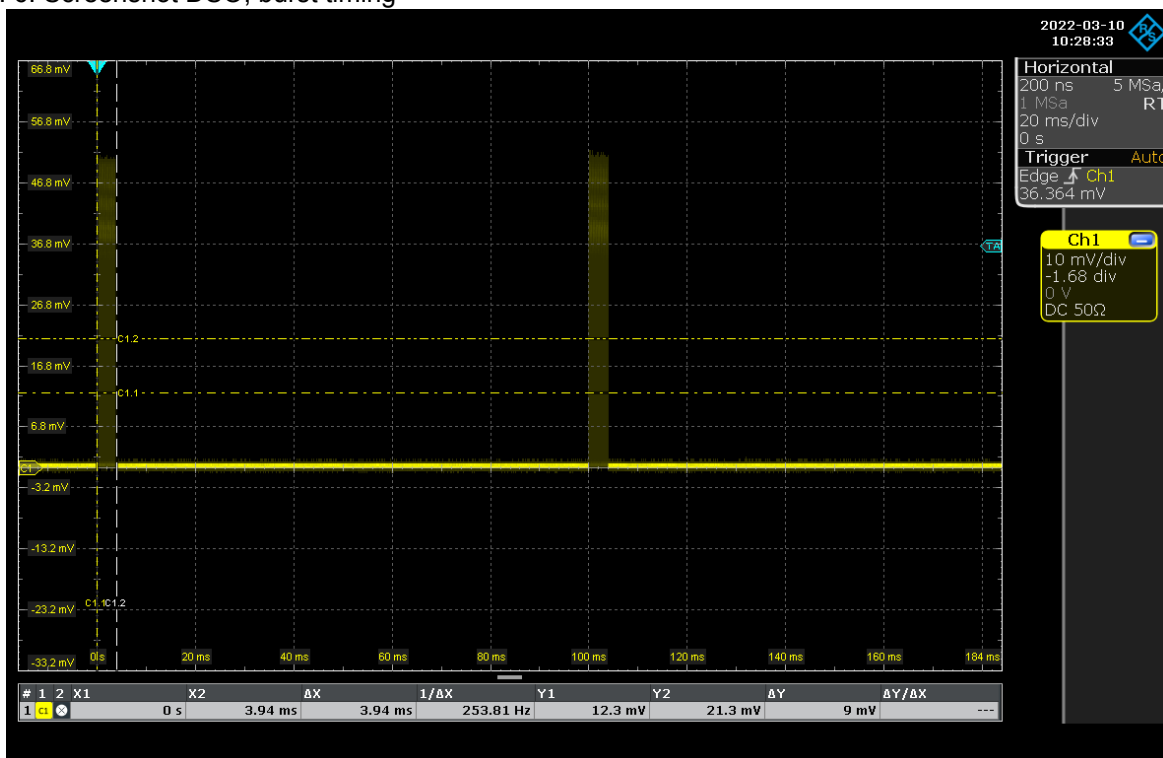


TR no.: 21116501-24768-0

2022-05-02

Plot no. 7: Screenshot DSO, burst timing

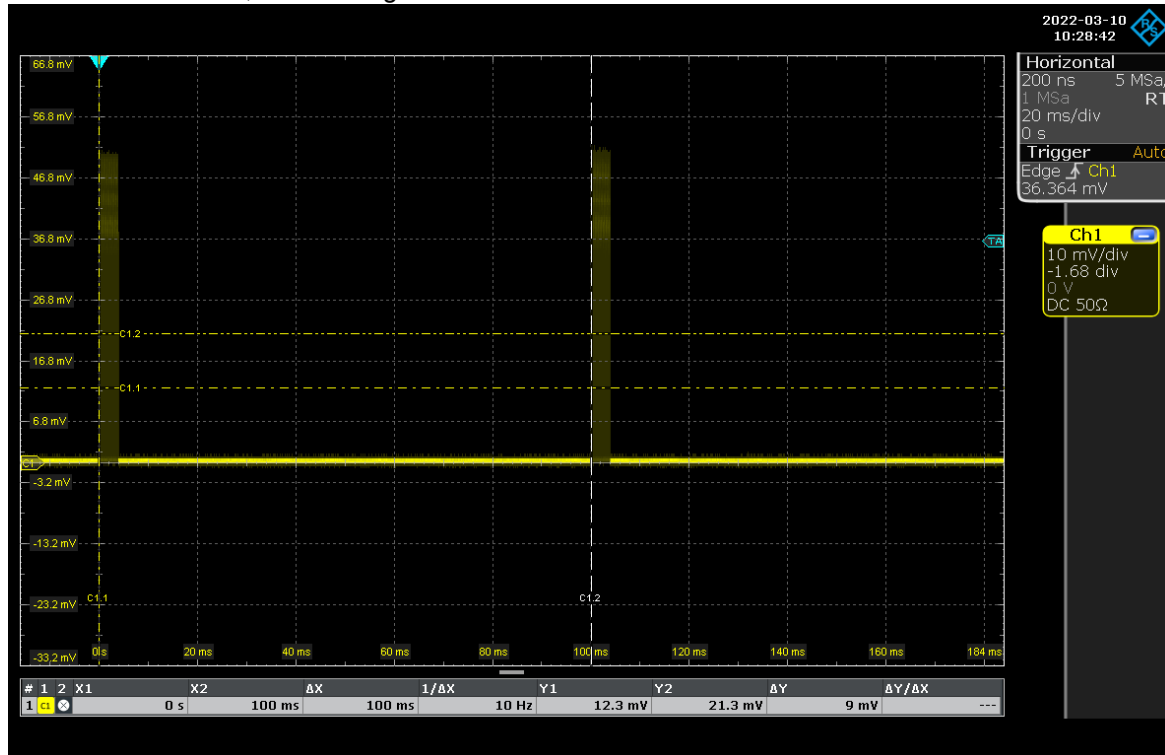

Plot no. 8: Screenshot DSO, Peak, AVG Values

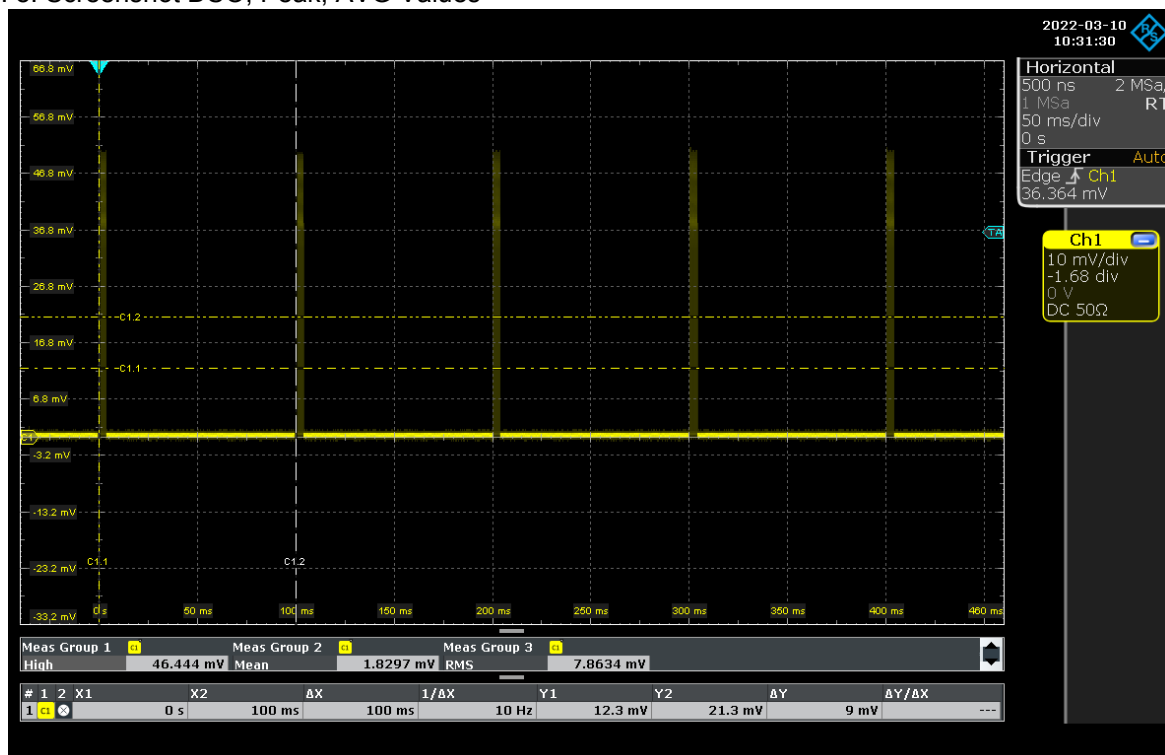

7.4 Frequency stability (§2.1055 & §15.255(f))

Description

§2.1055 Measurements required: Frequency stability.

(a) The frequency stability shall be measured with variation of ambient temperature as follows:

- (1) From -30° to $+50^{\circ}$ centigrade for all equipment except that specified in paragraphs (a) (2) and (3) of this section.
- (b) Frequency measurements shall be made at the extremes of the specified temperature range and at intervals of not more than 10° centigrade through the range. A period of time sufficient to stabilize all of the components of the oscillator circuit at each temperature level shall be allowed prior to frequency measurement. The short term transient effects on the frequency of the transmitter due to keying (except for broadcast transmitters) and any heating element cycling normally occurring at each ambient temperature level also shall be shown. Only the portion or portions of the transmitter containing the frequency determining and stabilizing circuitry need be subjected to the temperature variation test.

(d) The frequency stability shall be measured with variation of primary supply voltage as follows:

- (1) Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.
- (2) For hand carried, battery powered equipment, reduce primary supply voltage to the battery operating end point which shall be specified by the manufacturer.
- (3) The supply voltage shall be measured at the input to the cable normally provided with the equipment, or at the power supply terminals if cables are not normally provided. Effects on frequency of transmitter keying (except for broadcast transmitters) and any heating element cycling at the nominal supply voltage and at each extreme also shall be shown.

Limits

§15.255 Operation within the band 57-71 GHz

- (f) Frequency stability. Fundamental emissions must be contained within the frequency bands specified in this section during all conditions of operation. Equipment is presumed to operate over the temperature range -20 to $+50$ degrees Celsius with an input voltage variation of 85% to 115% of rated input voltage, unless justification is presented to demonstrate otherwise.

Test procedure

ANSI C63.10, 6.9.3

The occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission.

The following procedure shall be used for measuring 99% power bandwidth:

- a) The instrument center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be between 1.5 times and 5.0 times the OBW.
- b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW, and VBW shall be approximately three times the RBW, unless otherwise specified by the applicable requirement.
- c) Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than $[10 \log(\text{OBW}/\text{RBW})]$ below the reference level. Specific guidance is given in 4.1.5.2.
- d) Step a) through step c) might require iteration to adjust within the specified range.
- e) Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
- f) Use the 99% power bandwidth function of the instrument (if available) and report the measured bandwidth.
- g) If the instrument does not have a 99% power bandwidth function, then the trace data points are recovered and directly summed in linear power terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5% of the total is reached; that frequency is recorded as the upper frequency. The 99% power bandwidth is the difference between these two frequencies.
- h) The occupied bandwidth shall be reported by providing plot(s) of the measuring instrument display; the plot axes and the scale units per division shall be clearly labeled. Tabular data may be reported in addition to the plot(s).

Test results / Note


See following plots.

Test results under normal and extreme test conditions:				
EUT mode	Test conditions	f_L [GHz]	f_H [GHz]	99% OBW [MHz]
Normal operating mode	-40 °C	61.062	61.480	418.223
Normal operating mode	-30 °C	61.062	61.480	418.159
Normal operating mode	-20 °C	61.062	61.480	418.224
Normal operating mode	-10 °C	61.062	61.480	418.307
Normal operating mode	0 °C	61.062	61.479	417.330
Normal operating mode	10 °C	61.061	61.480	418.372
Normal operating mode	20 °C / V _{min}	61.061	61.479	418.243
Normal operating mode	20 °C / V _{nom}	61.061	61.479	418.320
Normal operating mode	20 °C / V _{max}	61.061	61.479	418.359
Normal operating mode	30 °C	61.061	61.479	417.408
Normal operating mode	40 °C	61.060	61.479	418.397
Normal operating mode	50 °C	61.060	61.479	418.431
Normal operating mode	60 °C	61.060	61.478	418.505
Normal operating mode	65 °C	61.062	61.479	418.590
Voltage variation				
Input voltage variation does not affect the transmitted signal (see plots for ambient/normal temperature).				


TR no.: 21116501-24768-0

2022-05-02

Plot no. 9: 99% OBW, Peak detector, -40 °C

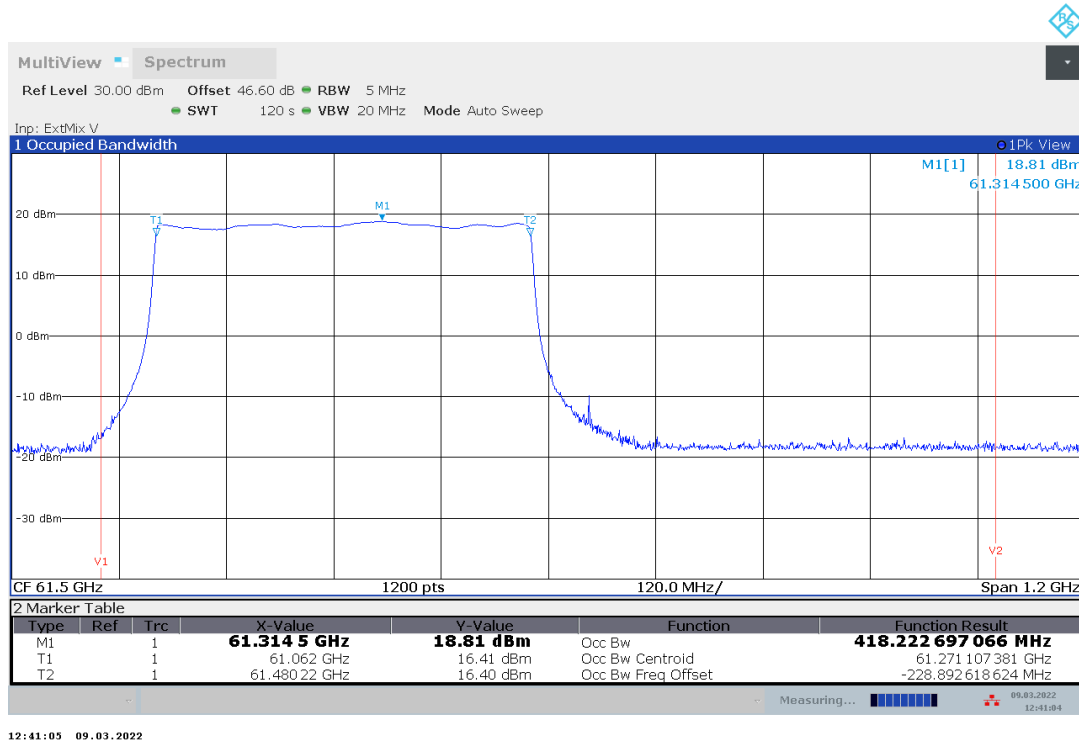


Plot no. 10: 99% OBW, Peak detector, -30 °C

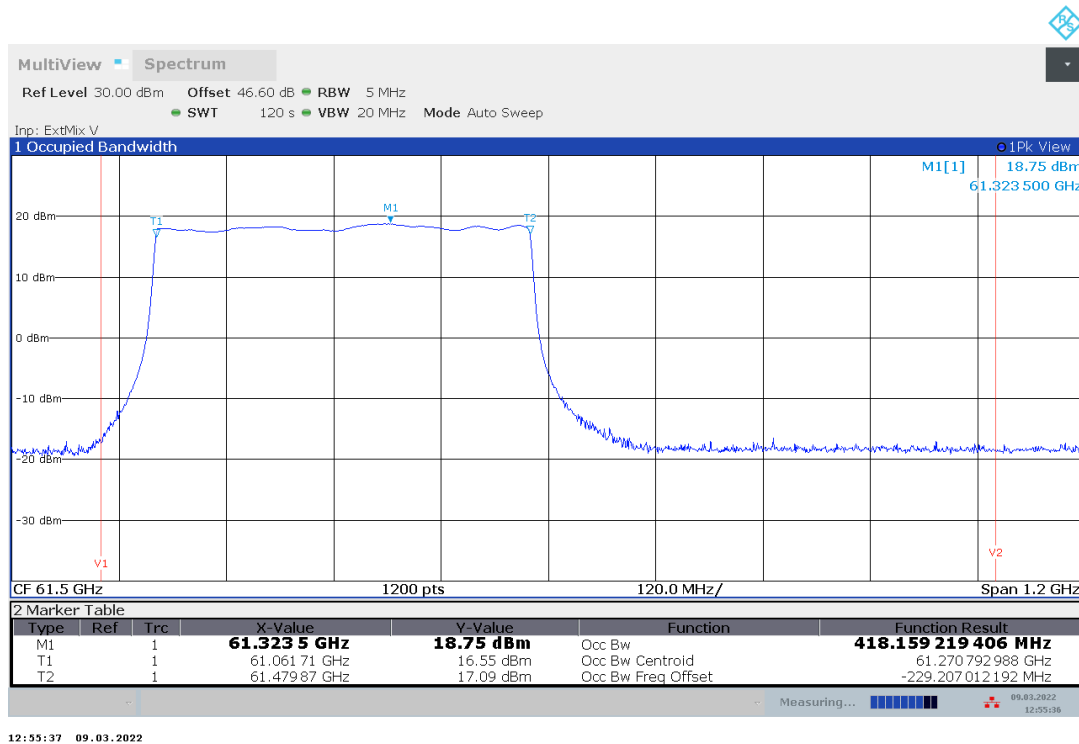


TR no.: 21116501-24768-0

2022-05-02

Plot no. 11: 99% OBW, Peak detector, -20 °C

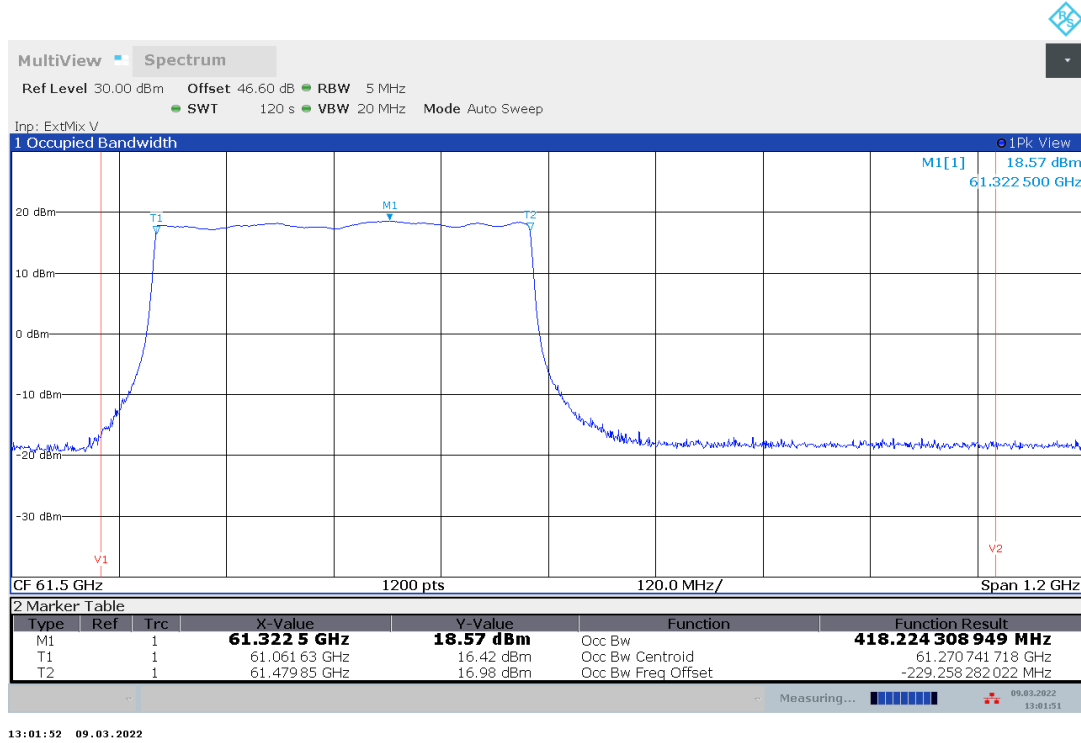


Plot no. 12: 99% OBW, Peak detector, -10 °C

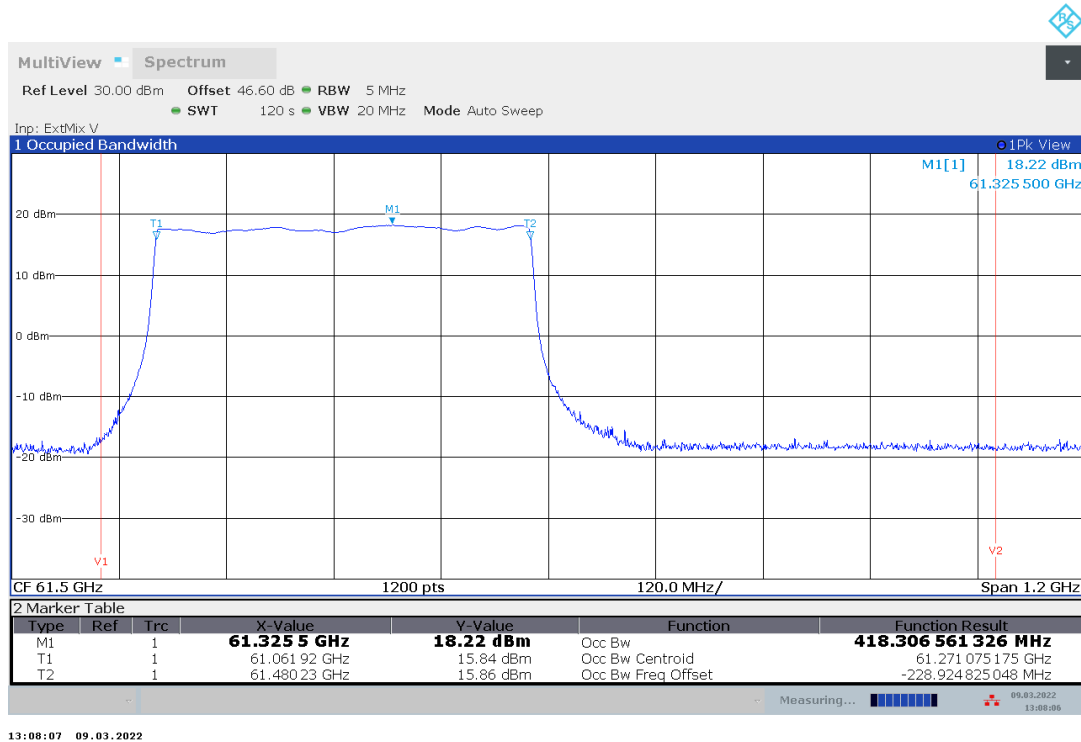


TR no.: 21116501-24768-0

2022-05-02

Plot no. 13: 99% OBW, Peak detector, +0 °C

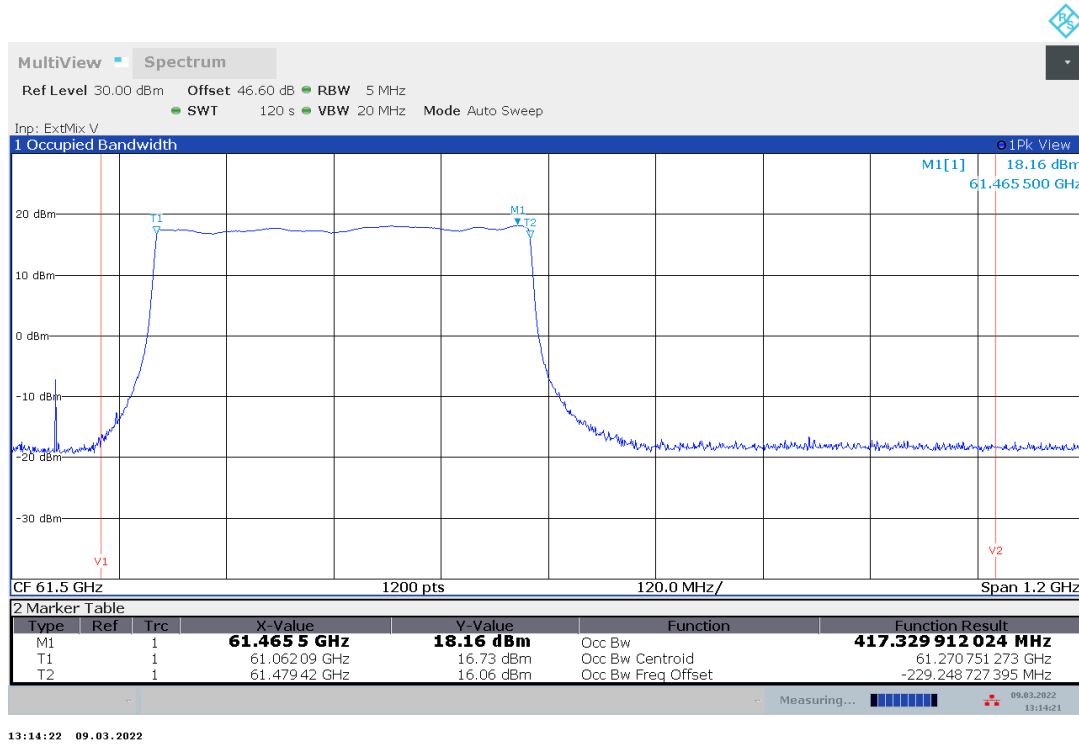


Plot no. 14: 99% OBW, Peak detector, +10 °C

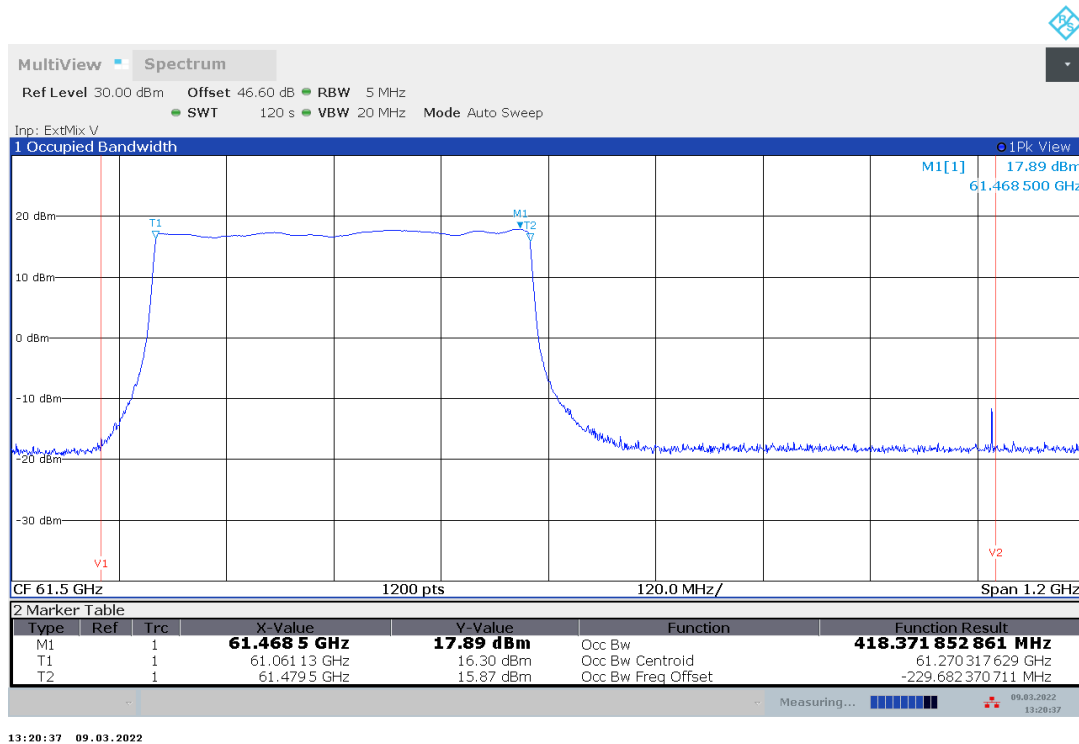


TR no.: 21116501-24768-0

2022-05-02

Plot no. 15: 99% OBW, Peak detector, +20 °C, V_{min}

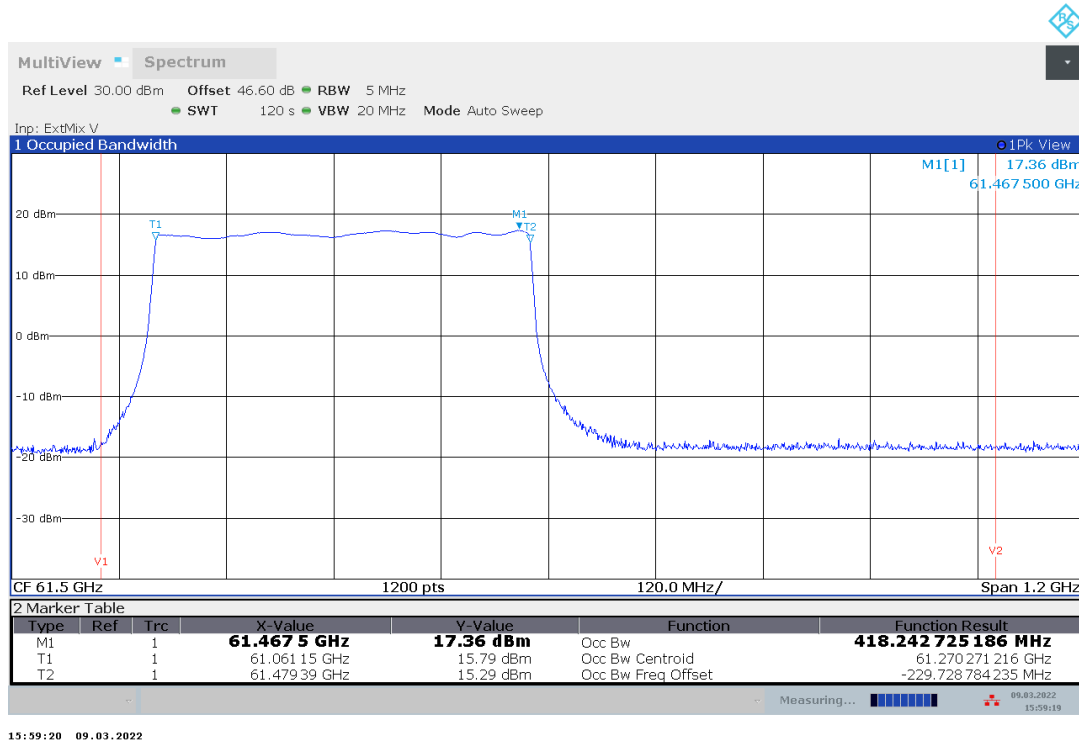


Plot no. 16: 99% OBW, Peak detector, +20 °C, V_{nom}

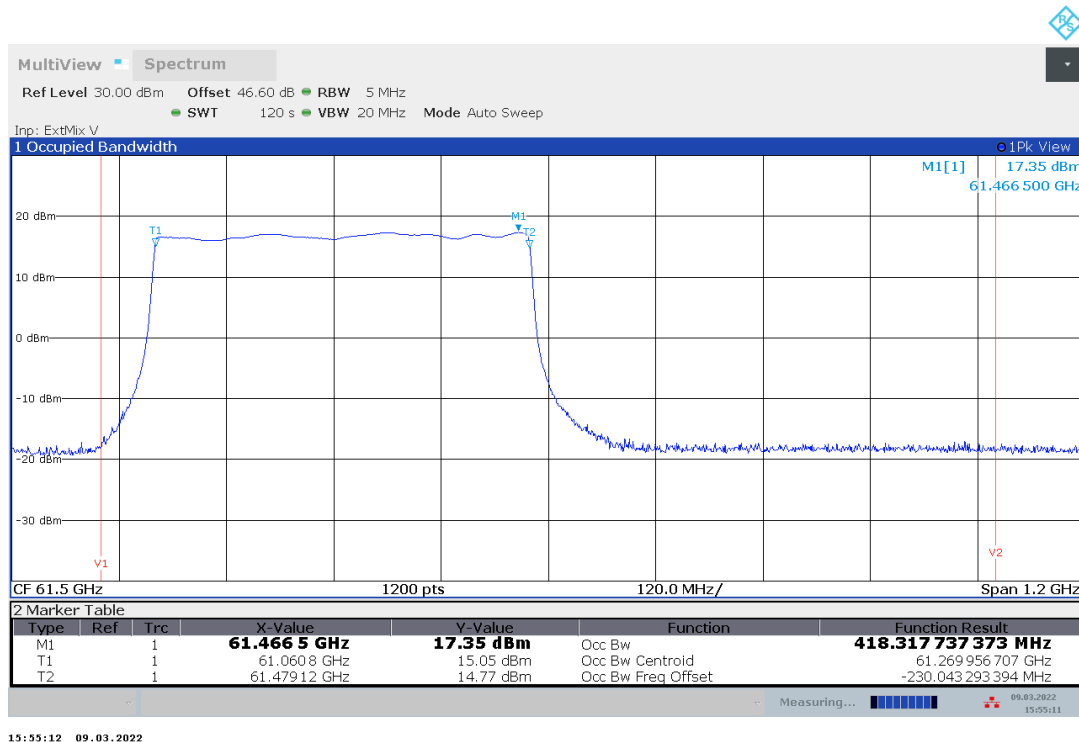


TR no.: 21116501-24768-0

2022-05-02

Plot no. 17: 99% OBW, Peak detector, +20 °C, V_{max}

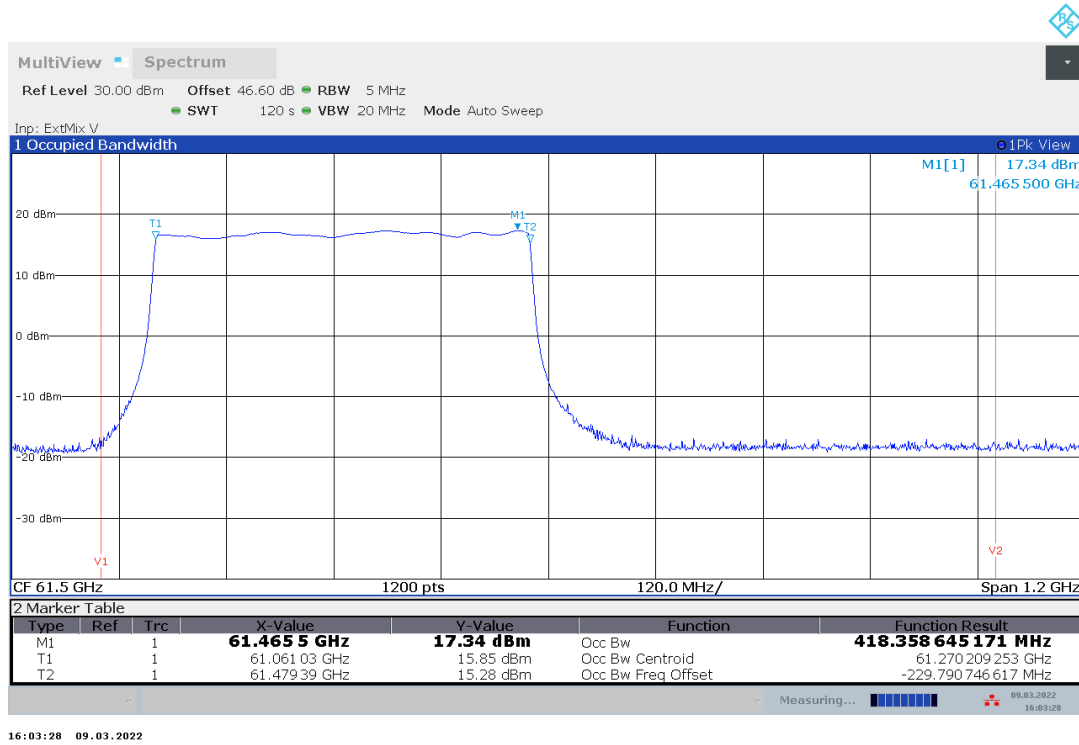


Plot no. 18: 99% OBW, Peak detector, +30 °C

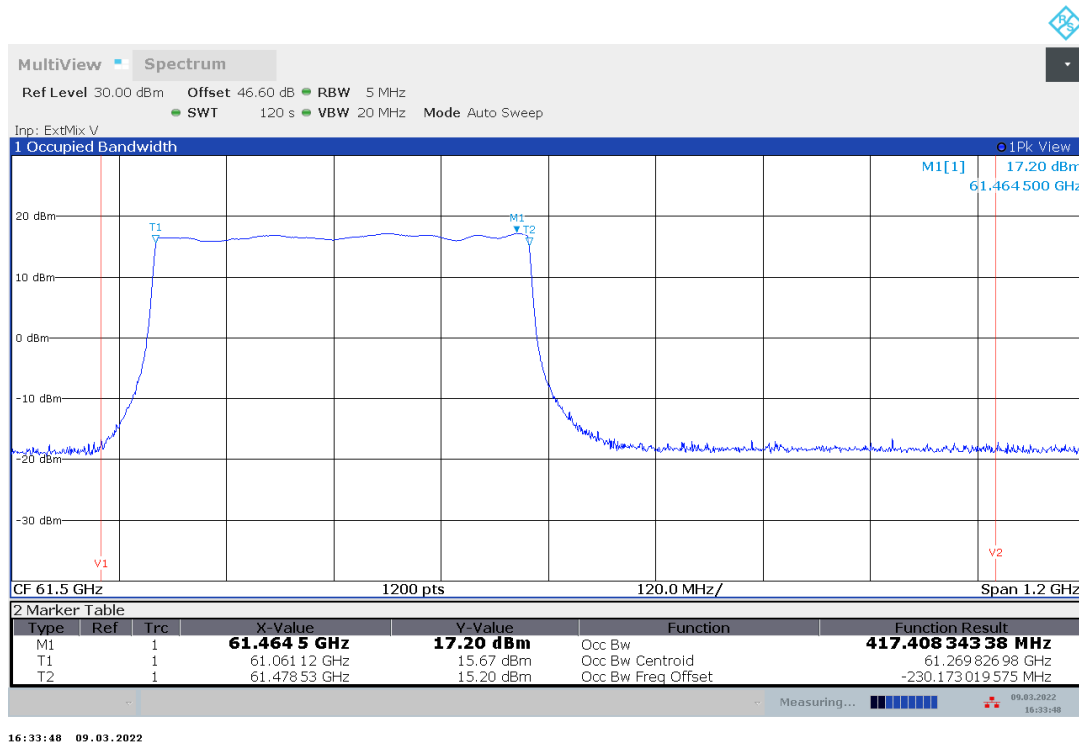


TR no.: 21116501-24768-0

2022-05-02

Plot no. 19: 99% OBW, Peak detector, +40 °C

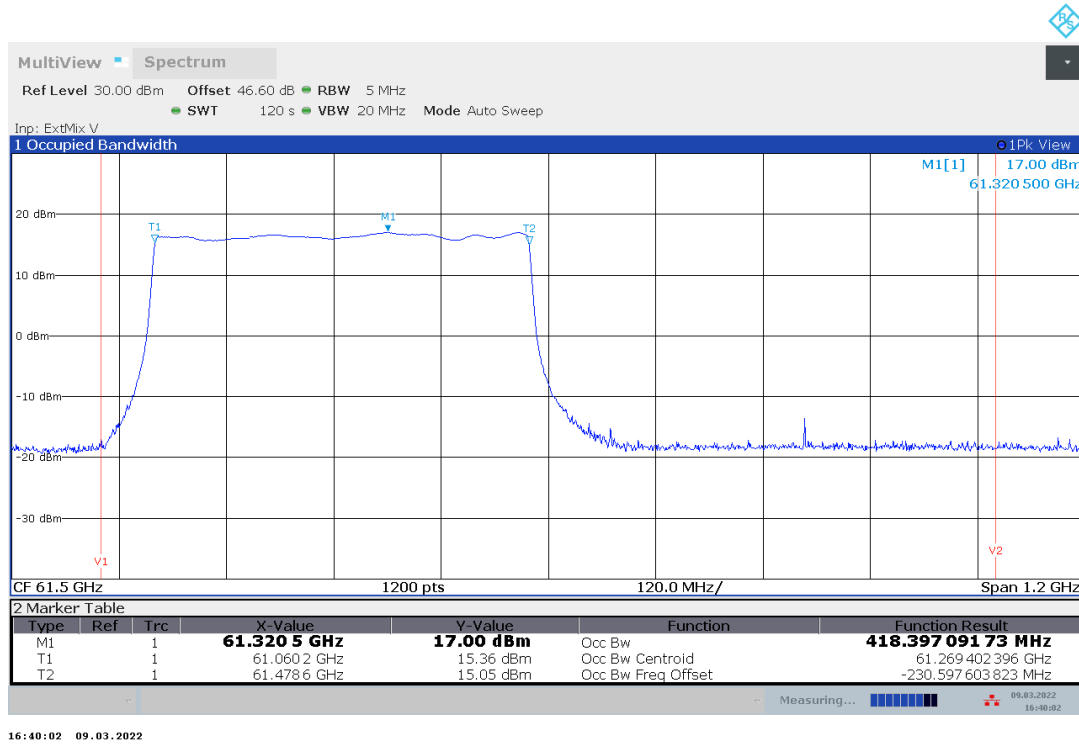


Plot no. 20: 99% OBW, Peak detector, +50 °C

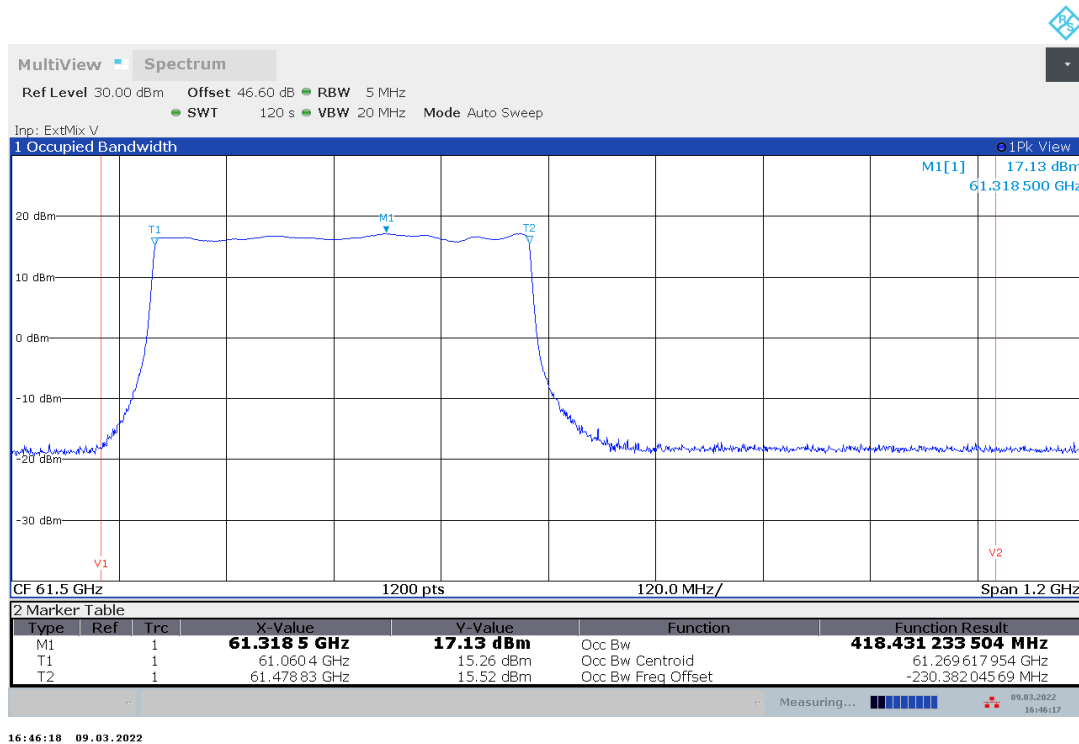


TR no.: 21116501-24768-0

2022-05-02

Plot no. 21: 99% OBW, Peak detector, +60 °C

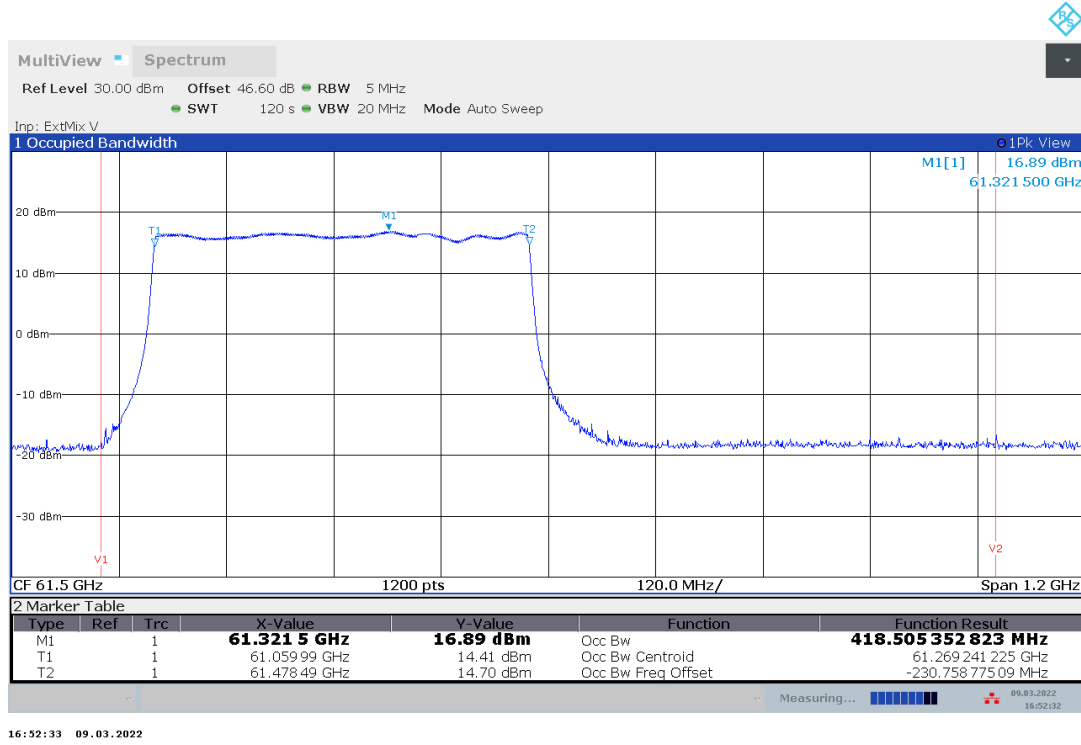

Plot no. 22: 99% OBW, Peak detector, +65 °C

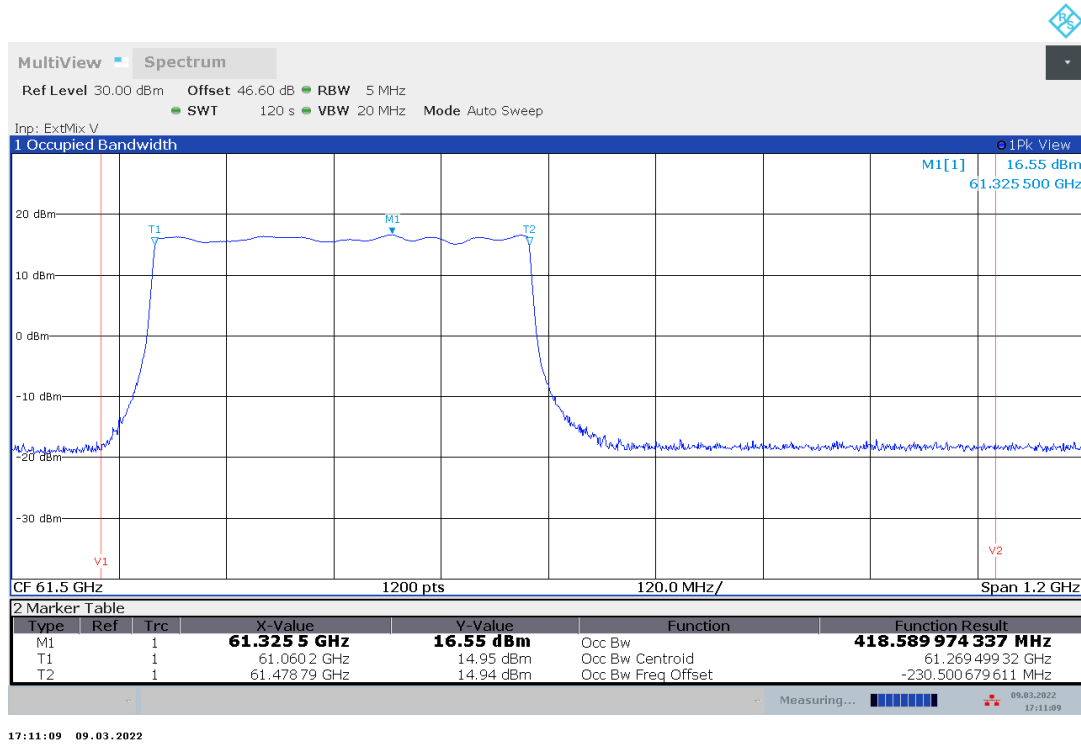

7.5 Field strength of emissions (spurious and harmonics)

Description / Limits

§15.255 (d) (1) The power density of any emissions outside the 57-71 GHz band shall consist solely of spurious emissions.

§15.255 (d) (2)

Radiated emissions below 40 GHz shall not exceed the general limits in § 15.209.:

Frequency	Field Strength	Measurement distance
0.009 – 0.490 MHz	2400/F[kHz] $\mu\text{V/m}$	300 m
0.490 – 1.705 MHz	24000/F[kHz] $\mu\text{V/m}$	30 m
1.705 – 30.0 MHz	30.0 $\mu\text{V/m}$ / 29.5 dB $\mu\text{V/m}$	30 m
30 – 88 MHz	100 $\mu\text{V/m}$ / 40.0 dB $\mu\text{V/m}$	3 m
88 – 216 MHz	150 $\mu\text{V/m}$ / 43.5 dB $\mu\text{V/m}$	3 m
216 – 960 MHz	200 $\mu\text{V/m}$ / 46.0 dB $\mu\text{V/m}$	3 m
960 – 100 000 MHz	500 $\mu\text{V/m}$ / 54.0 dB $\mu\text{V/m}$	3 m

§15.255 (d) (3) Between 40 GHz and 200 GHz, the level of these emissions shall not exceed 90 pW/cm² at a distance of 3 meters.

§15.255 (d) (4) The levels of the spurious emissions shall not exceed the level of the fundamental emission.

Test procedure

§15.31 (c) Except as otherwise indicated in §15.256, for swept frequency equipment, measurements shall be made with the frequency sweep stopped at those frequencies chosen for the measurements to be reported.

§15.31 (m) Measurements on intentional radiators or receivers, other than TV broadcast receivers, shall be performed and, if required, reported for each band in which the device can be operated with the device operating at the number of frequencies in each band specified in the following table:

Frequency range	Number of frequencies	Location
< 1MHz bandwidth	1	middle
1 – 10 MHz bandwidth	2	1 near bottom and 1 near top
> 10 MHz bandwidth	3	1 near bottom / middle / top

§15.35 (b) Unless otherwise specified, on any frequency or frequencies above 1000 MHz, the radiated emission limits are based on the use of measurement instrumentation employing an average detector function. Unless otherwise specified, measurements above 1000 MHz shall be performed using a minimum resolution bandwidth of 1 MHz. When average radiated emission measurements are specified in this part, including average emission measurements below 1000 MHz, there also is a limit on the peak level of the radio frequency emissions. Unless otherwise specified, e.g., see §§15.250, 15.252, 15.253(d), 15.255, 15.256, and 15.509 through 15.519, the limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device, e.g., the total peak power level. Note that the use of a pulse desensitization correction factor may be needed to determine the total peak emission level. The instruction manual or application note for the measurement instrument should be consulted for determining pulse desensitization factors, as necessary.

§15.35 (c) Unless otherwise specified, e.g., §§15.255(b), and 15.256(l)(5), when the radiated emission limits are expressed in terms of the average value of the emission, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value. The exact method of calculating the average field strength shall be submitted with any application for certification or shall be retained in the measurement data file for equipment subject to Supplier's Declaration of Conformity.

Calculation of the far field distance (Rayleigh distance):

The aperture dimensions of these horn antennas shall be small enough so that the measurement distance in meters is equal to or greater than the Rayleigh distance (i.e. $R_m = 2D^2 / \lambda$), where D is the largest linear dimension (i.e. width or height) of the antenna aperture in m and λ is the free-space wavelength in meters at the frequency of measurement.

Antenna type	Frequency range [GHz]	D [m]	Highest frequency in use [GHz]	Far field distance R_m [m]
20240-20	18.0 – 26.5	0.0520	26.5	0.478
22240-20	26.5 – 40.0	0.0342	40	0.312
23240-20	33.0 – 50.0	0.0280	50	0.261
24240-20	40.0 – 60.0	0.0230	60	0.212
25240-20	50.0 – 75.0	0.0185	75	0.171
26240-20	60.0 – 90.0	0.0150	90	0.135
27240-20	75.0 – 110	0.0124	110	0.113

Typical test distances

Up to 18 GHz:	3.00 m
18 – 60 GHz:	0.50 m
50 – 75 GHz:	1.00 m
75 – 200 GHz:	0.25 m
In-band:	1.00 m


Test setup: 8.1 – 8.4

Test distance correction factor of 20dB/decade is already considered in the plots / result table.

Test results:

Channel / Mode	Frequency [GHz]	Detector	Test distance [m]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
No critical emissions found, please refer to plots.						
-/-	-/-	-/-	-/-	-/-	-/-	-/-

Plot no. 23: radiated emissions 9 kHz – 30 MHz, loop antenna, cw low

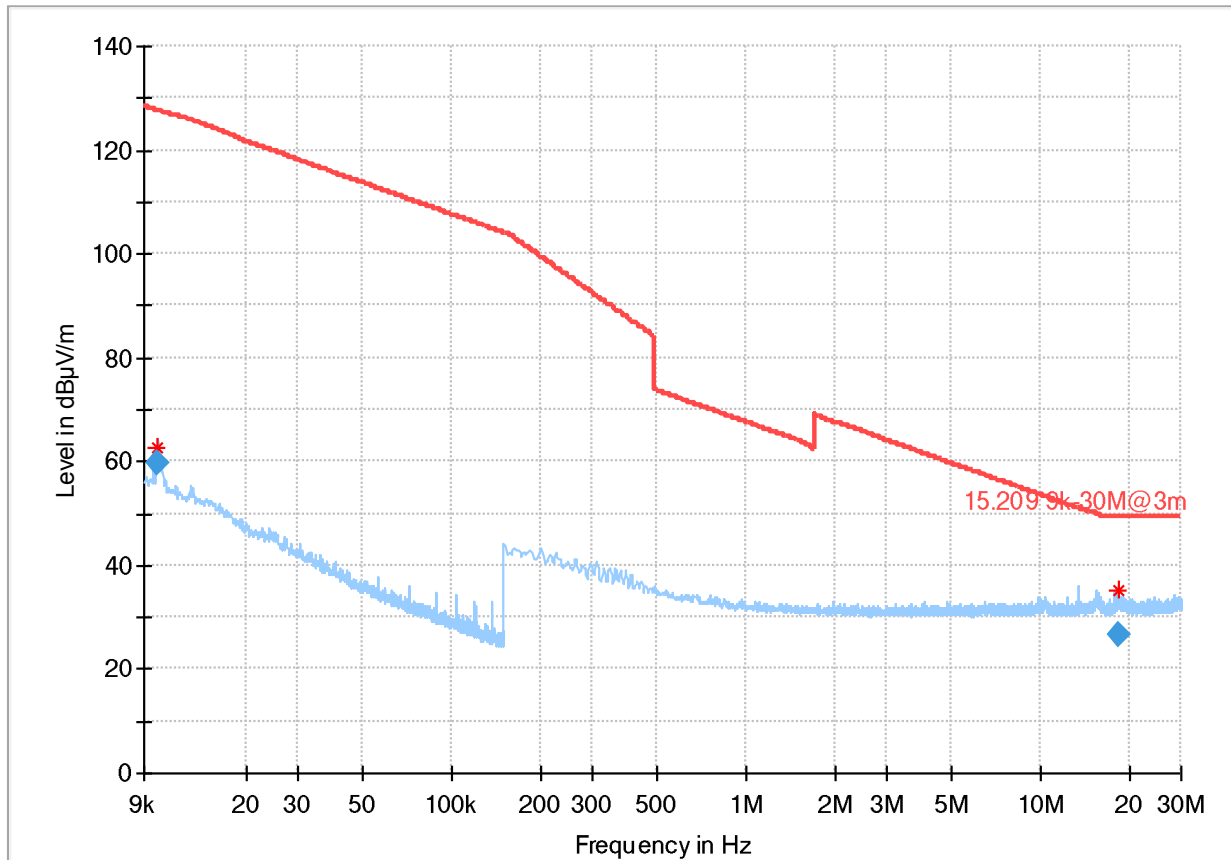


— Preview Result 1-PK+ * Critical_Freqs PK+ — 15.209 9k-30M@3m
◆ Final_Result QPK × MaxPeak-PK+ (Single) + QuasiPeak-QPK (Single)

Final Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Azimuth (deg)	Corr. (dB/m)
0.010050	59.90	127.57	67.67	100.0	0.200	V	111.0	20.9
18.343500	26.76	49.54	22.78	100.0	9.000	V	-30.0	20.5

Plot no. 24: radiated emissions 9 kHz – 30 MHz, loop antenna, cw mid

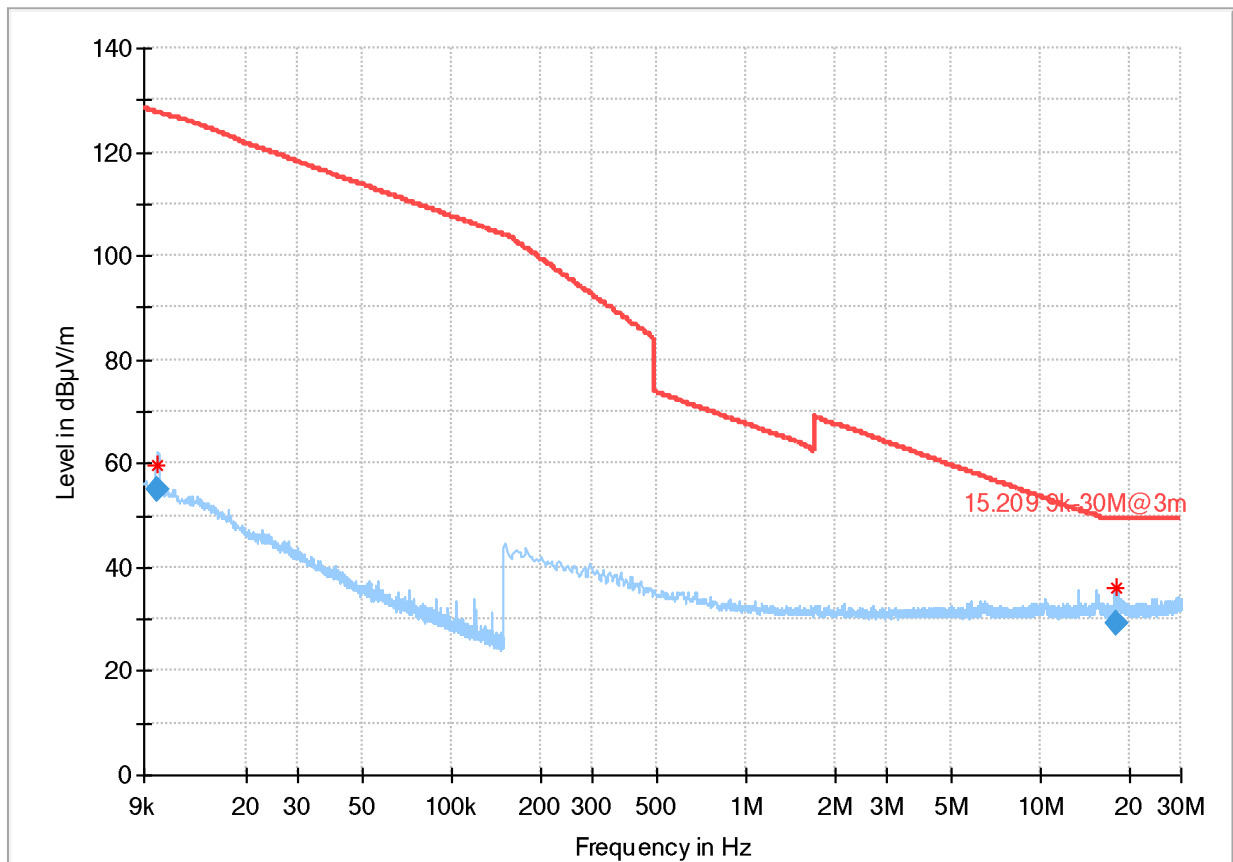


— Preview Result 1-PK+ * Critical_Freqs PK+ — 15.209 9k-30M@3m
◆ Final_Result QPK × MaxPeak-PK+ (Single) + QuasiPeak-QPK (Single)

Final Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Azimuth (deg)	Corr. (dB/m)
0.010000	55.00	127.60	72.60	100.0	0.200	V	-30.0	20.9
18.154500	29.23	49.54	20.31	100.0	9.000	V	48.0	20.5

Plot no. 25: radiated emissions 9 kHz – 30 MHz, loop antenna, cw high

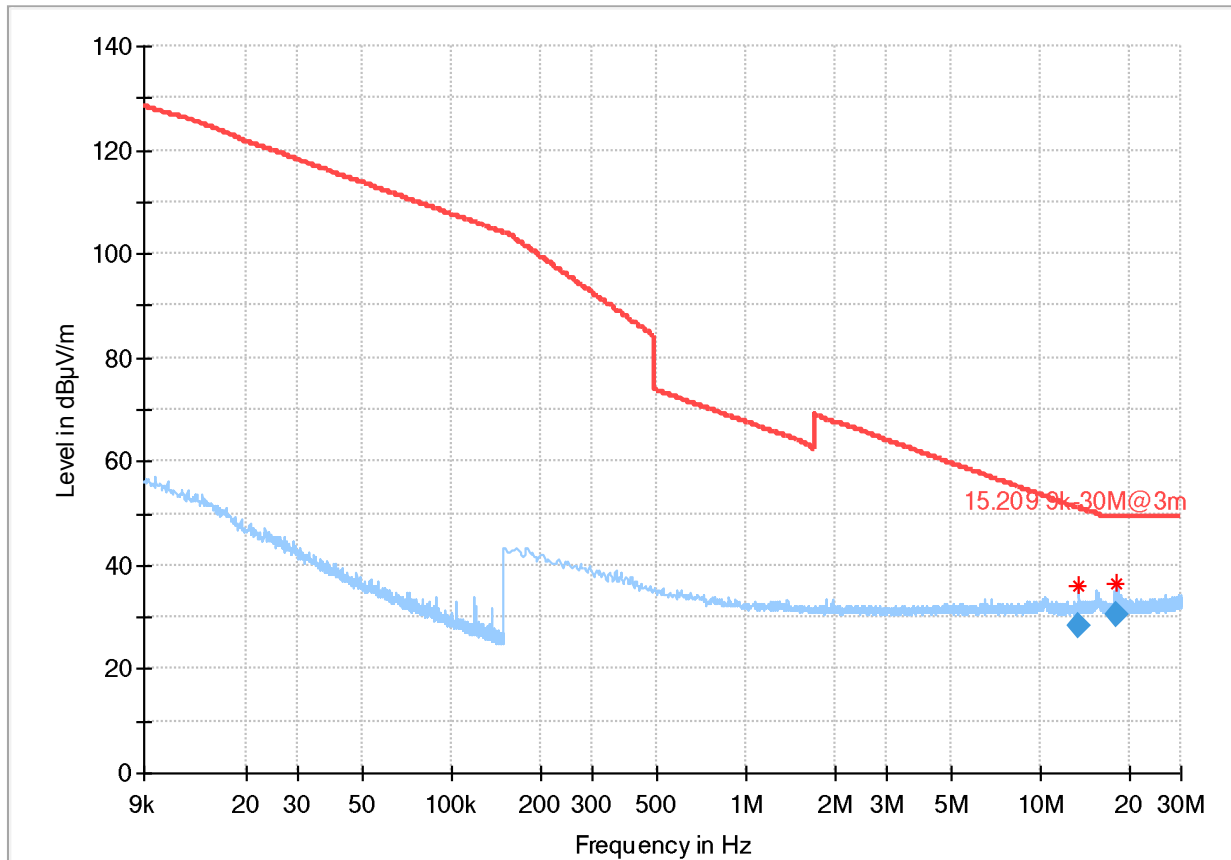


- Preview Result 1-PK+
- * Critical_Freqs PK+
- 15.209 9k-30M@3m
- ◆ Final_Result QPK
- × MaxPeak-PK+ (Single)
- + QuasiPeak-QPK (Single)

Final Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Azimuth (deg)	Corr. (dB/m)
13.560000	28.15	50.94	22.79	100.0	9.000	V	138.0	20.5
18.152250	30.54	49.54	19.00	100.0	9.000	V	260.0	20.5

Plot no. 26: radiated emissions 30 MHz – 1 GHz, hor./vert. polarization, cw low

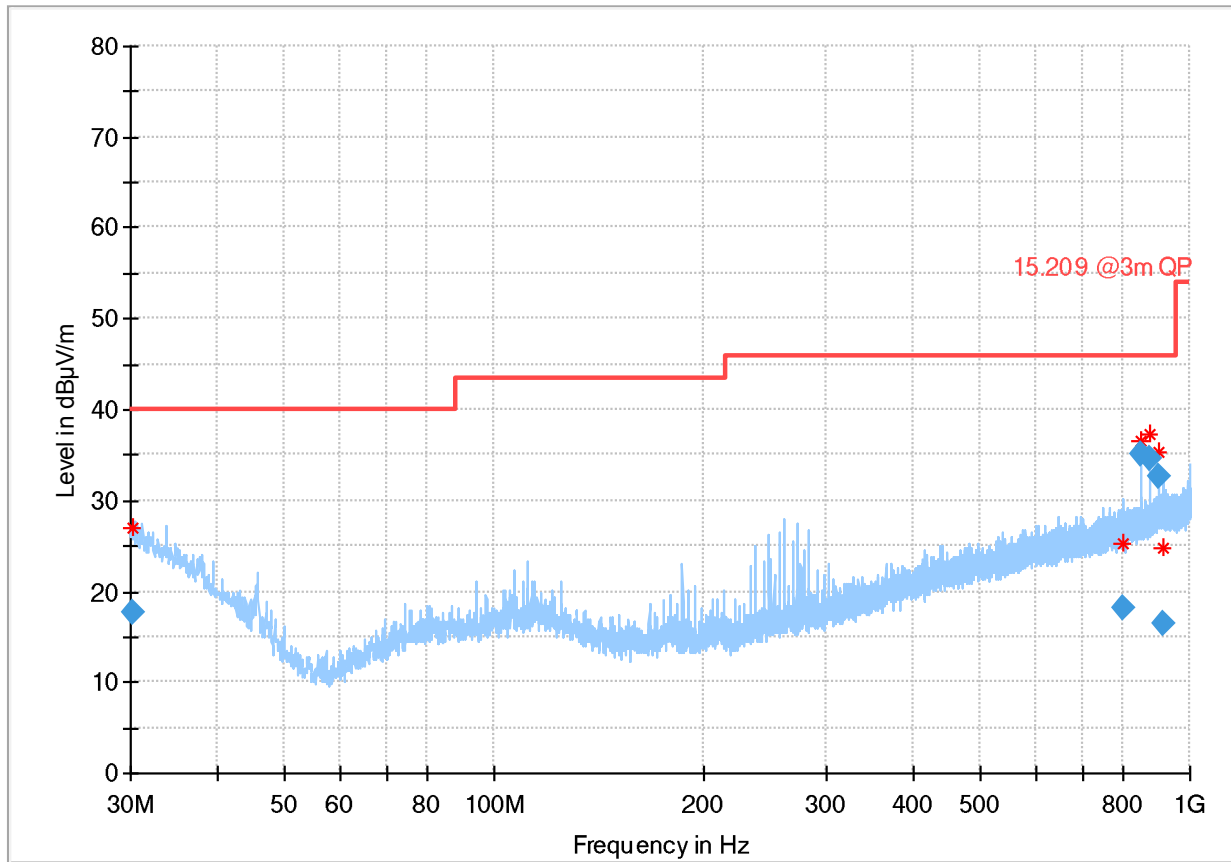


- Preview Result 1-PK+
- 15.209 @3m QP
- * Critical_Freqs PK+
- ◆ Final_Result QPK

Final Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
30.125000	17.58	40.00	22.42	100.0	120.000	337.0	H	247.0
800.053500	18.16	46.00	27.84	100.0	120.000	195.0	H	15.0
850.013000	34.97	46.00	11.03	100.0	120.000	164.0	V	331.0
875.015500	34.69	46.00	11.31	100.0	120.000	166.0	V	320.0
899.993000	32.71	46.00	13.29	100.0	120.000	150.0	V	0.0
914.288500	16.49	46.00	29.51	100.0	120.000	250.0	V	18.0

Plot no. 27: radiated emissions 30 MHz – 1 GHz, hor./vert. polarization, cw mid

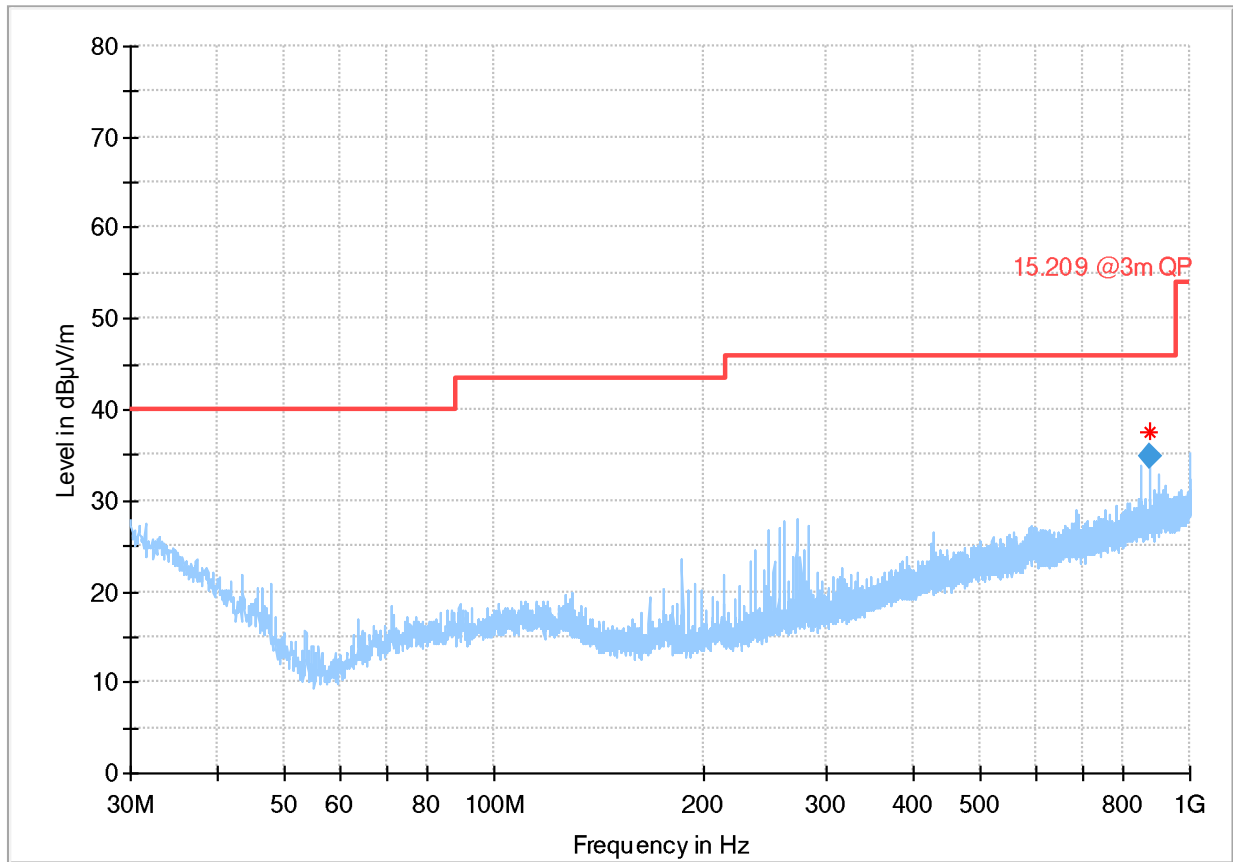


◆ Preview Result 1-PK+
◆ Final_Result QPK
 * Critical_Freqs PK+
× MaxPeak-PK+ (Single)
 — 15.209 @3m QP
+ QuasiPeak-QPK (Single)

Final Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
875.015500	34.87	46.00	11.13	100.0	120.000	154.0	V	326.0

Plot no. 28: radiated emissions 30 MHz – 1 GHz, hor./vert. polarization, cw high

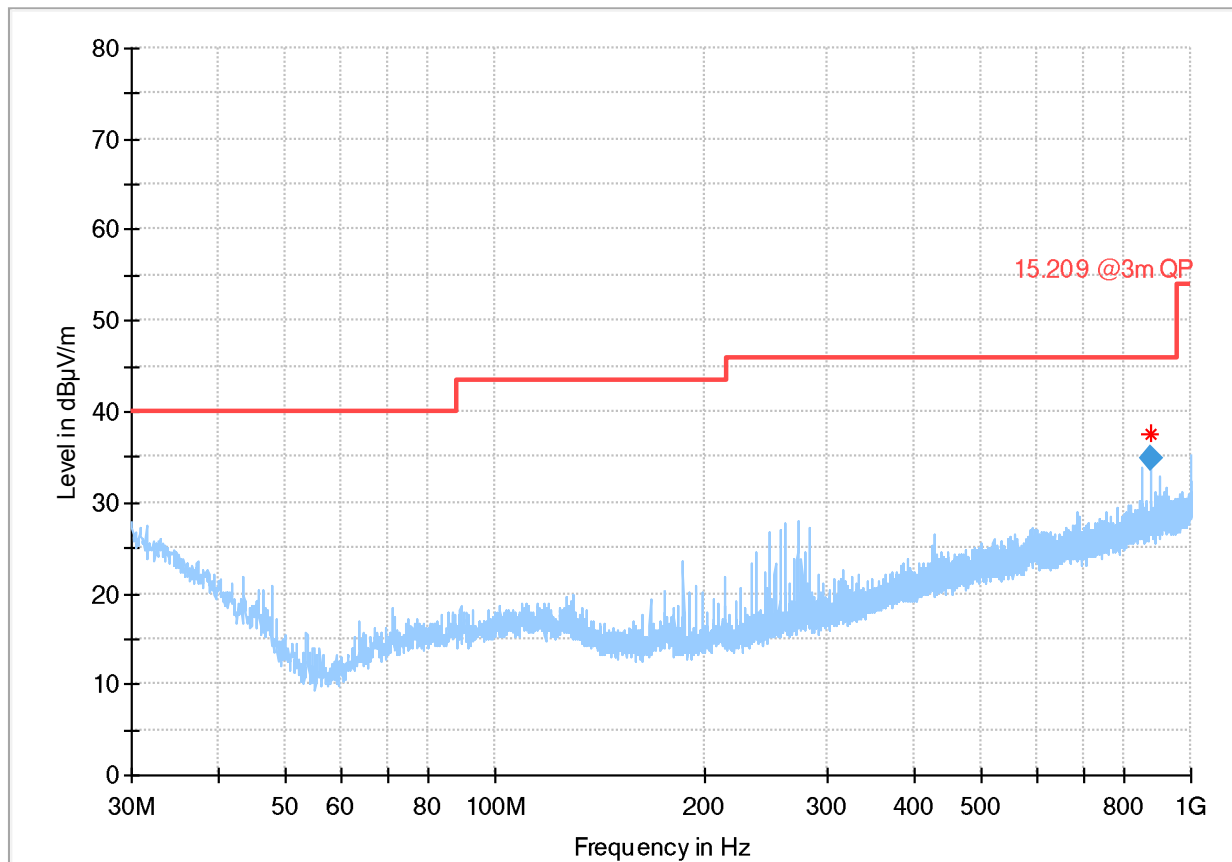


◆ Preview Result 1-PK+
◆ Final_Result QPK
 * Critical_Freqs PK+
× MaxPeak-PK+ (Single)
 — 15.209 @3m QP
+ QuasiPeak-QPK (Single)

Final Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
875.015500	34.97	46.00	11.03	100.0	120.000	167.0	V	322.0

Plot no. 29: radiated emissions 1 GHz – 18 GHz, hor./vert. polarization, cw low

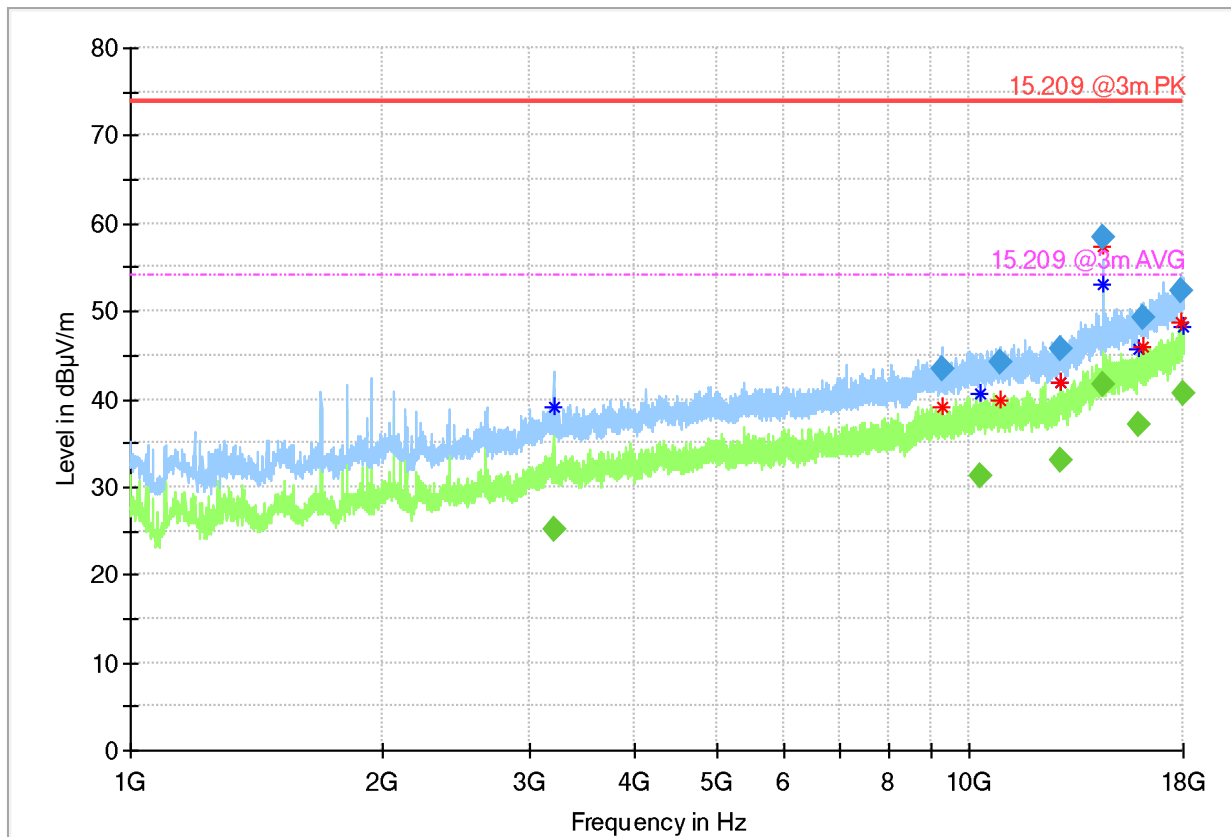


- ◆ Preview Result 2-AVG
- ◆ Preview Result 1-PK+
- * Critical_Freqs PK+
- 15.209 @3m PK
- * Critical_Freqs AVG
- - - 15.209 @3m AVG
- ◆ Final_Result PK+
- ◆ Final_Result AVG

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol
3193.000000	---	25.03	54.00	28.97	100.0	1000.000	150.0	V
9264.444444	43.38	---	74.00	30.62	100.0	1000.000	150.0	H
10299.944444	---	31.24	54.00	22.76	100.0	1000.000	150.0	H
10867.150000	44.24	---	74.00	29.76	100.0	1000.000	150.0	V
12839.555556	---	33.07	54.00	20.93	100.0	1000.000	150.0	V
12873.961111	45.60	---	74.00	28.40	100.0	1000.000	150.0	V
14399.972222	58.31	---	74.00	15.69	100.0	1000.000	150.0	H
14400.722222	---	41.60	54.00	12.40	100.0	1000.000	150.0	H
15948.666667	---	37.06	54.00	16.94	100.0	1000.000	150.0	H
16169.261111	49.33	---	74.00	24.67	100.0	1000.000	150.0	V
17886.066667	52.35	---	74.00	21.65	100.0	1000.000	150.0	V
17975.444444	---	40.68	54.00	13.32	100.0	1000.000	150.0	V

Plot no. 30: radiated emissions 1 GHz – 18 GHz, hor./vert. polarization, cw mid

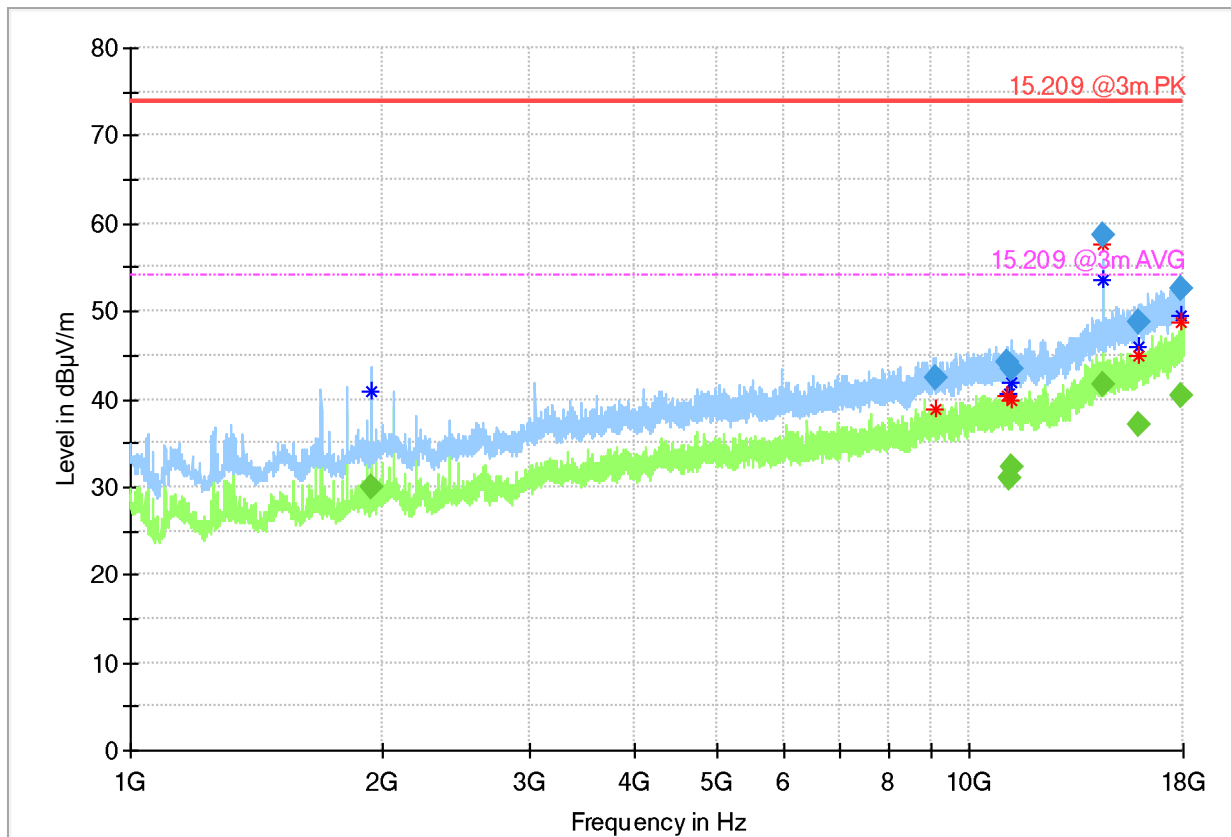


- Preview Result 2-AVG
- Preview Result 1-PK+
- * Critical_Freqs AVG
- * Critical_Freqs PK+
- 15.209 @3m PK
- - - 15.209 @3m AVG
- ◆ Final_Result PK+
- ◆ Final_Result AVG

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol
1936.888889	---	29.86	54.00	24.14	100.0	1000.000	150.0	V
9095.027778	42.52	---	74.00	31.48	100.0	1000.000	150.0	H
11108.944444	44.23	---	74.00	29.77	100.0	1000.000	150.0	V
11171.666667	---	31.10	54.00	22.90	100.0	1000.000	150.0	H
11210.777778	43.50	---	74.00	30.50	100.0	1000.000	150.0	V
11250.055556	---	32.13	54.00	21.87	100.0	1000.000	150.0	H
14399.972222	58.68	---	74.00	15.32	100.0	1000.000	150.0	H
14400.722222	---	41.57	54.00	12.43	100.0	1000.000	150.0	H
15891.850000	48.70	---	74.00	25.30	100.0	1000.000	150.0	H
15918.444444	---	37.04	54.00	16.96	100.0	1000.000	150.0	H
17875.333333	---	40.26	54.00	13.74	100.0	1000.000	150.0	V
17936.316667	52.66	---	74.00	21.34	100.0	1000.000	150.0	H

Plot no. 31: radiated emissions 1 GHz – 18 GHz, hor./vert. polarization, cw high

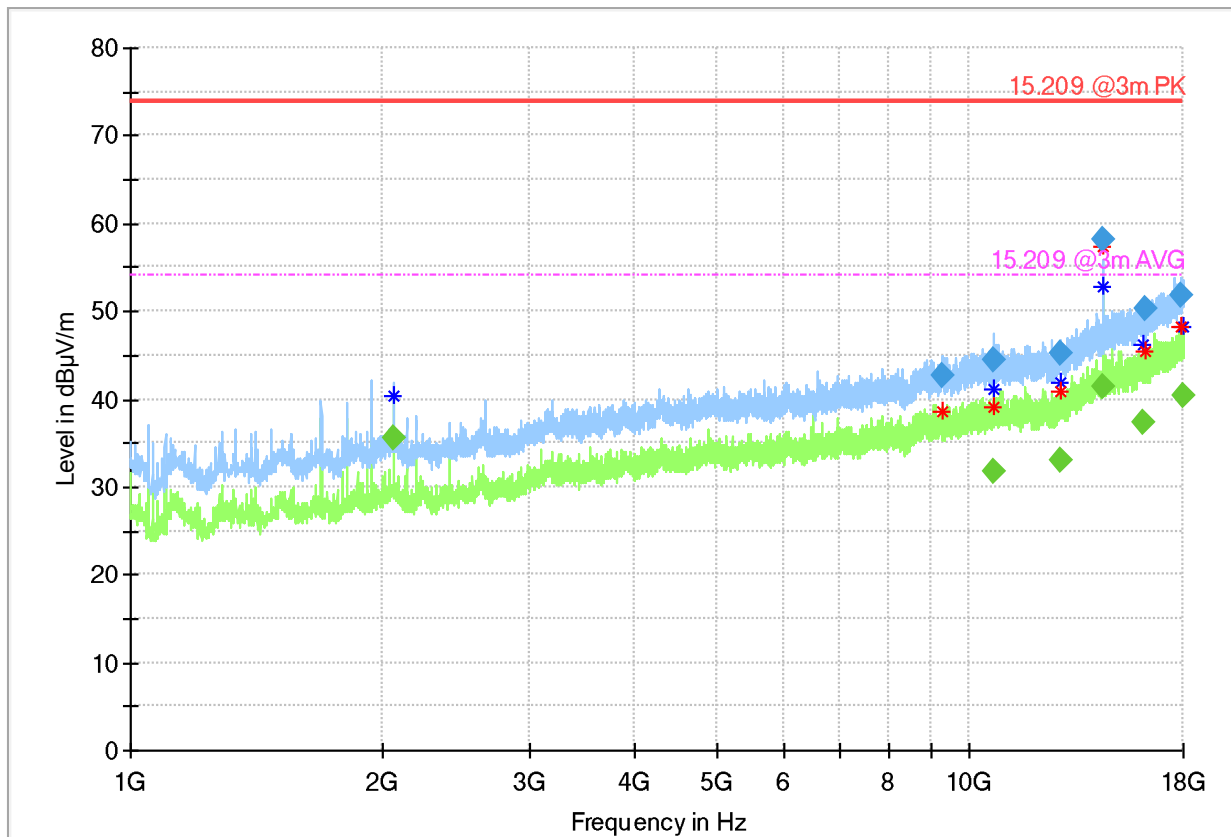


- Preview Result 2-AVG
- Preview Result 1-PK+
- * Critical_Freqs PK+
- 15.209 @3m PK
- * Critical_Freqs AVG
- ◆ Final_Result PK+
- ◆ Final_Result AVG
- - - 15.209 @3m AVG


Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol
2062.500000	---	35.54	54.00	18.46	100.0	1000.000	150.0	V
9281.444444	42.58	---	74.00	31.42	100.0	1000.000	150.0	V
10716.819444	44.41	---	74.00	29.59	100.0	1000.000	150.0	H
10720.222222	---	31.77	54.00	22.23	100.0	1000.000	150.0	V
12827.758333	45.27	---	74.00	28.73	100.0	1000.000	150.0	V
12839.555556	---	33.07	54.00	20.93	100.0	1000.000	150.0	H
14399.927778	58.26	---	74.00	15.74	100.0	1000.000	150.0	H
14400.722222	---	41.36	54.00	12.64	100.0	1000.000	150.0	H
16085.611111	---	37.37	54.00	16.63	100.0	1000.000	150.0	V
16195.466667	50.16	---	74.00	23.84	100.0	1000.000	150.0	H
17854.405556	51.70	---	74.00	22.30	100.0	1000.000	150.0	H
17956.555556	---	40.46	54.00	13.54	100.0	1000.000	150.0	H


Plot no. 32: radiated emissions 18 GHz – 26.5 GHz, hor./vert. polarization, cw low

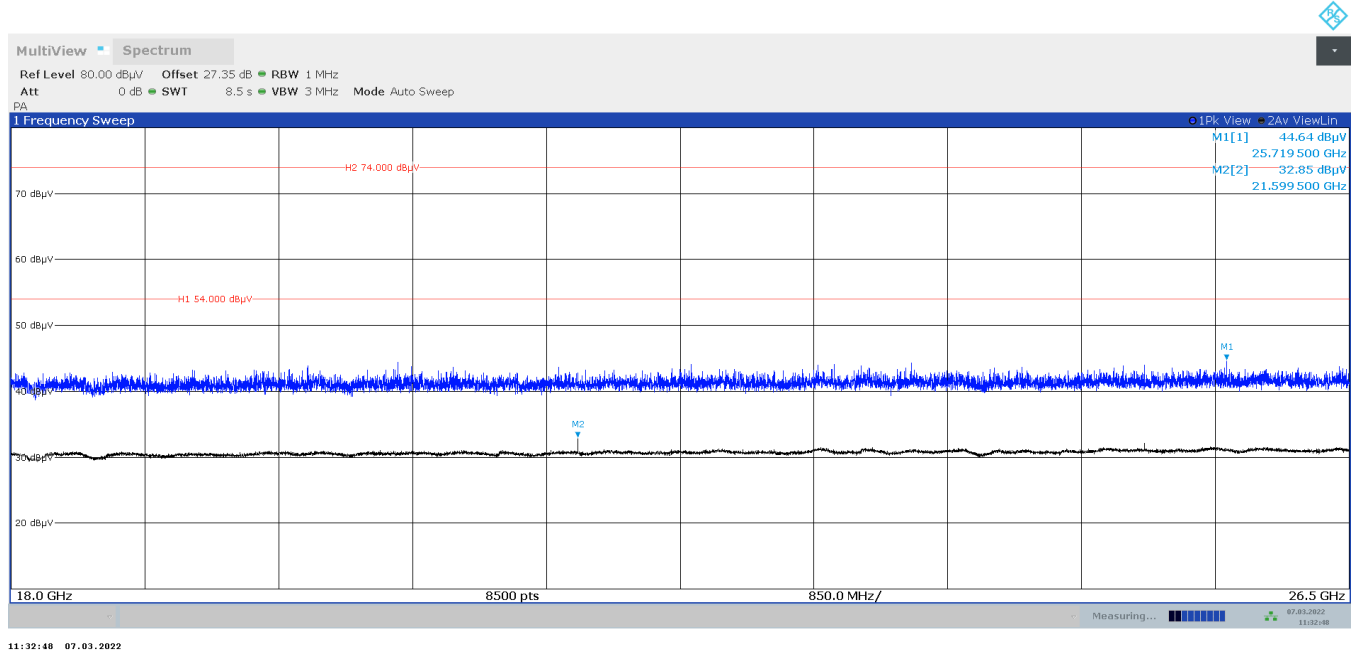


Plot no. 33: radiated emissions 18 GHz – 26.5 GHz, hor./vert. polarization, cw mid

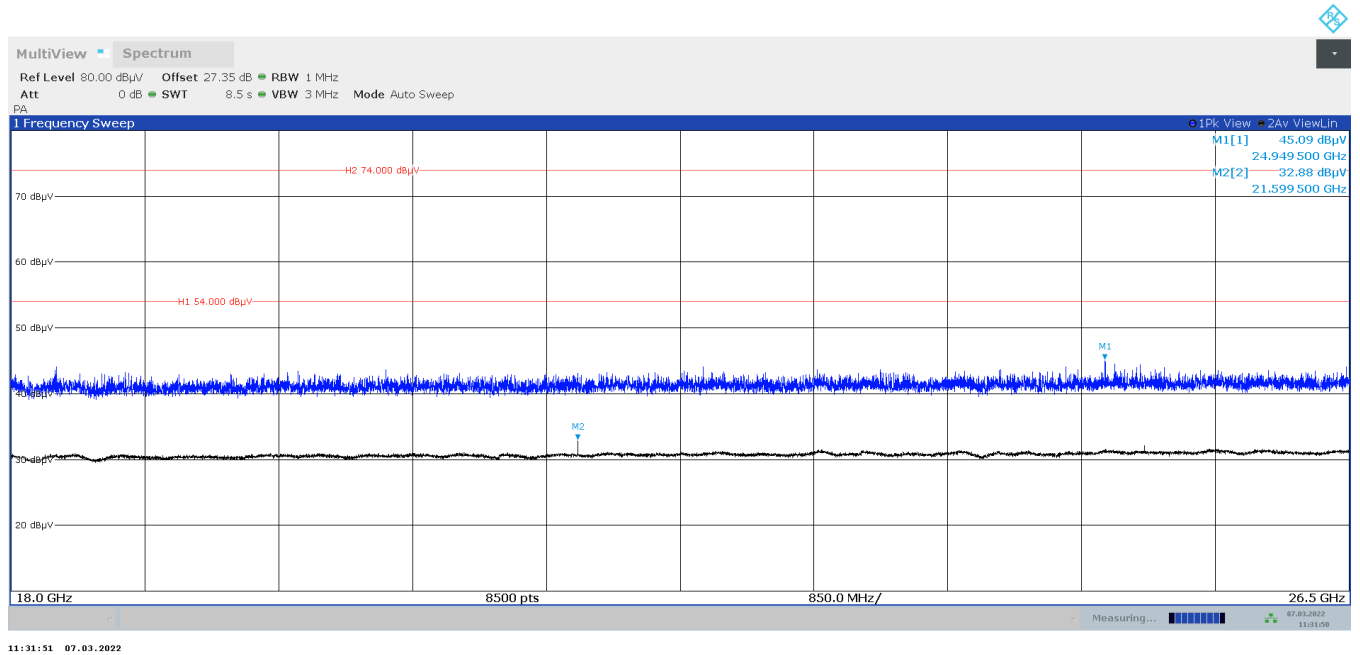


Plot no. 34: radiated emissions 18 GHz – 26.5 GHz, hor./vert. polarization, cw high

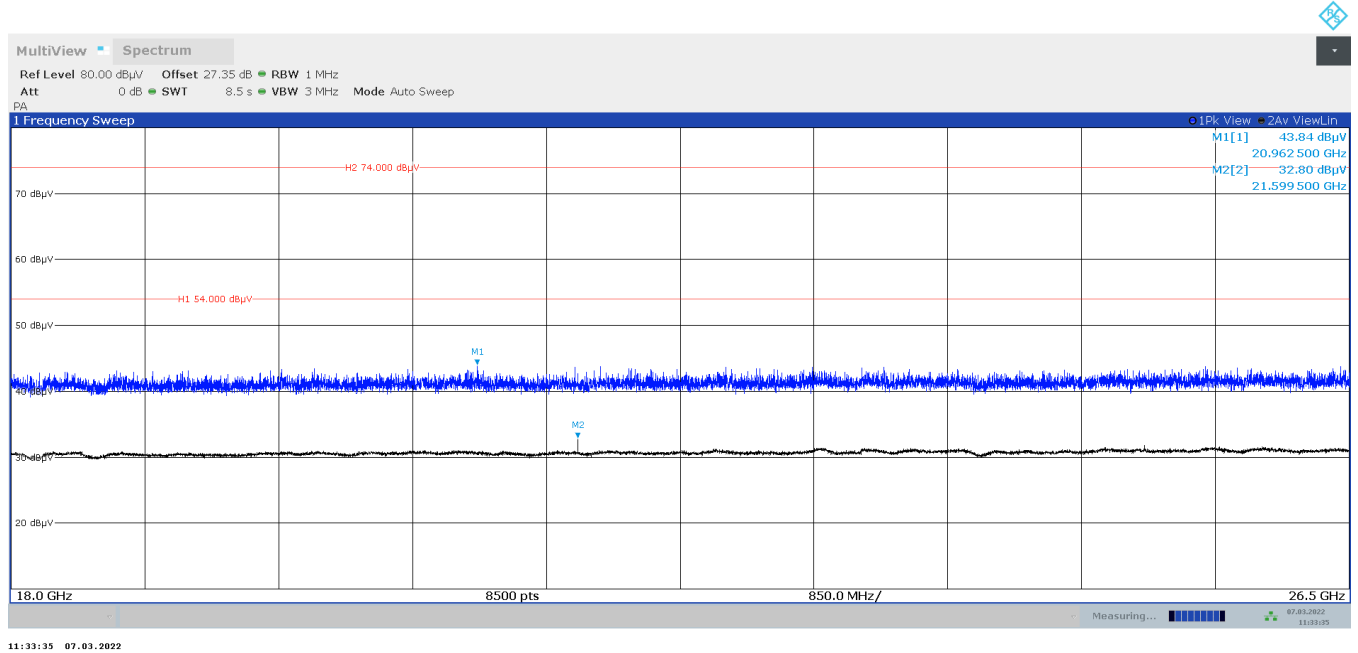

Plot no. 35: radiated emissions 26.5 GHz – 40 GHz, hor./vert. polarization, cw low

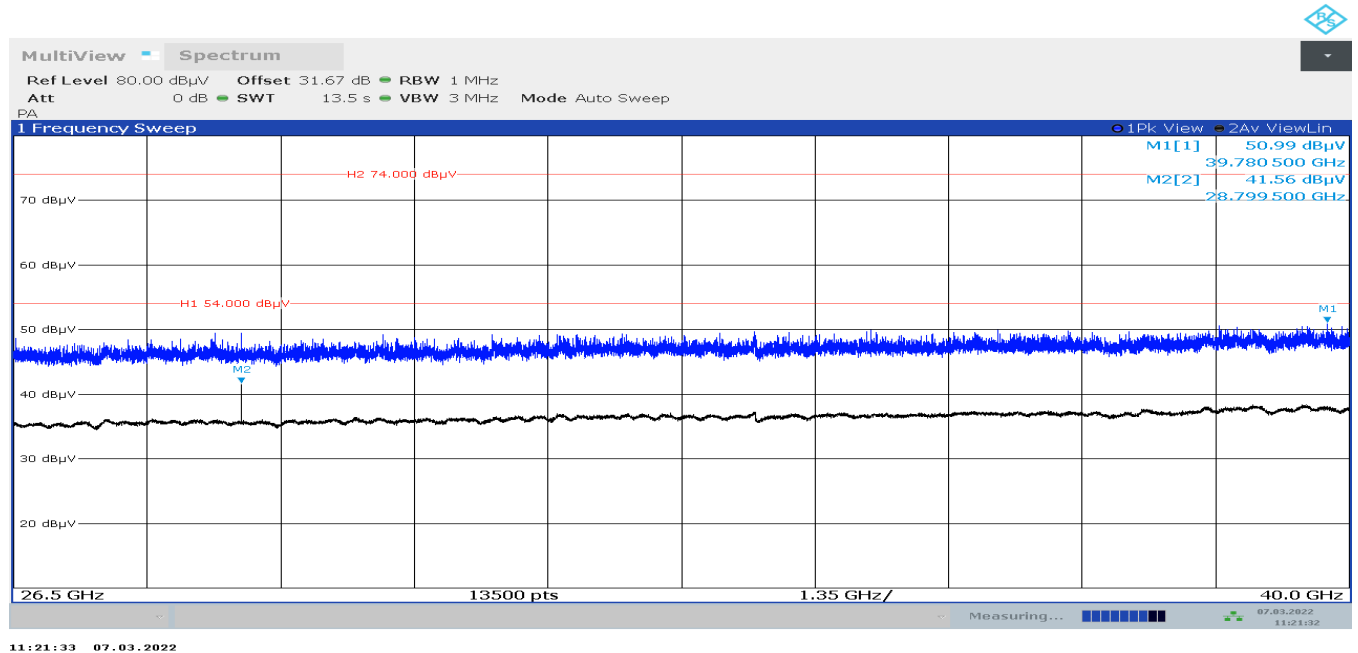


Plot no. 36: radiated emissions 26.5 GHz – 40 GHz, hor./vert. polarization, cw mid

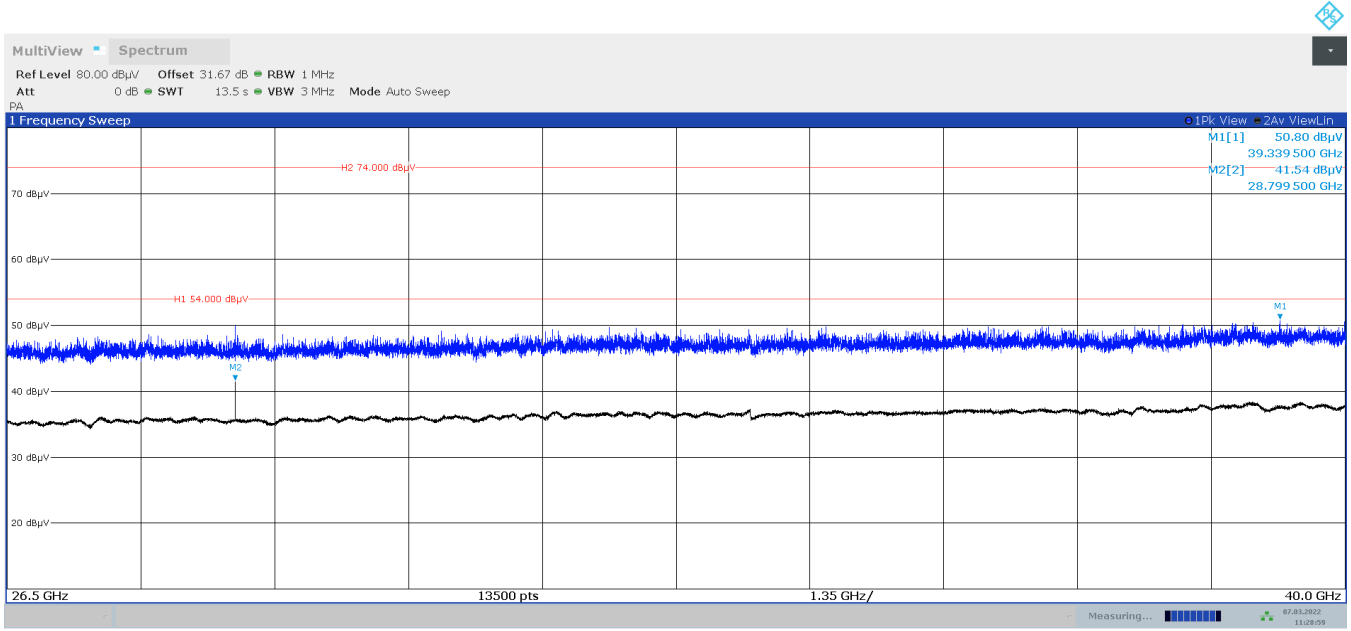


11:28:59 07.03.2022

Plot no. 37: radiated emissions 26.5 GHz – 40 GHz, hor./vert. polarization, cw high

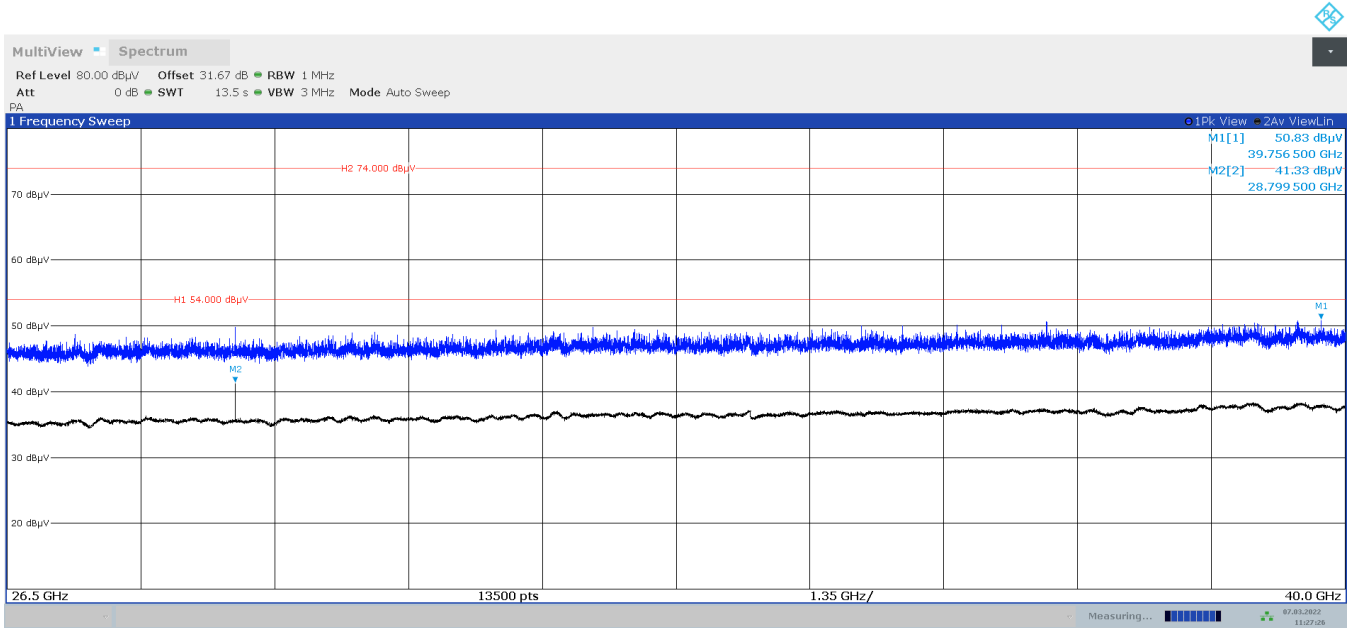


11:27:27 07.03.2022

Plot no. 38: radiated emissions 40 GHz – 60 GHz, hor./vert. polarization, cw low

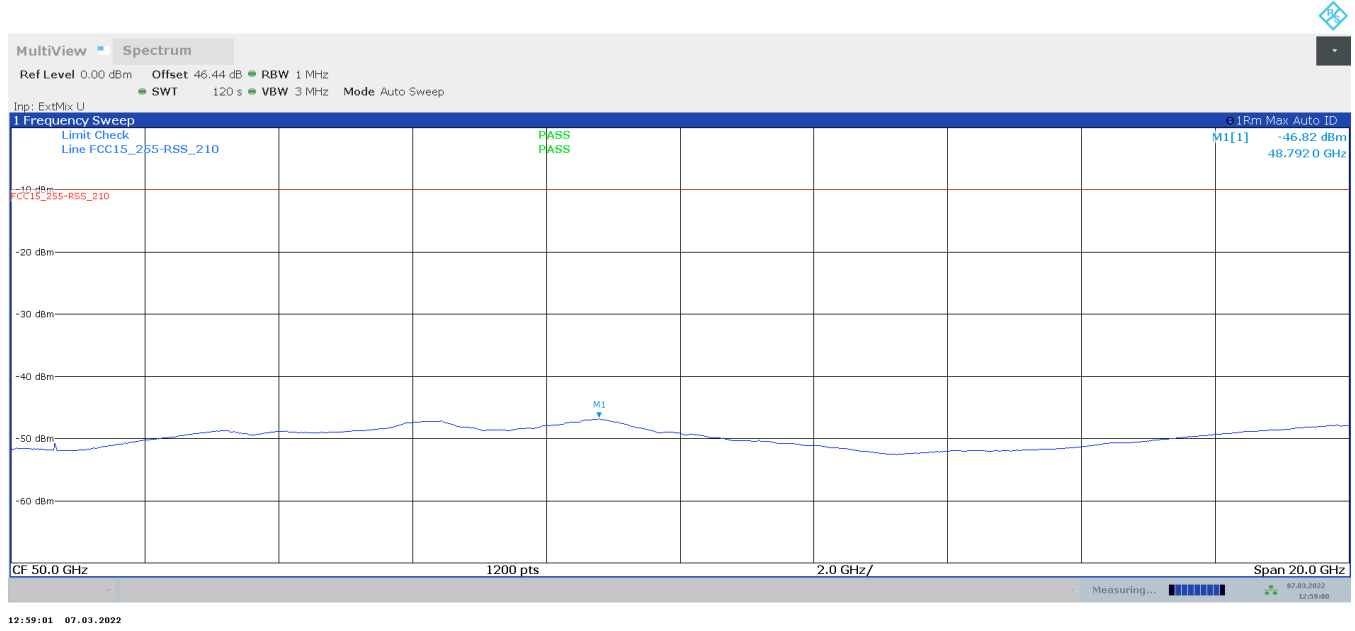


Plot no. 39: radiated emissions 40 GHz – 60 GHz, hor./vert. polarization, cw mid

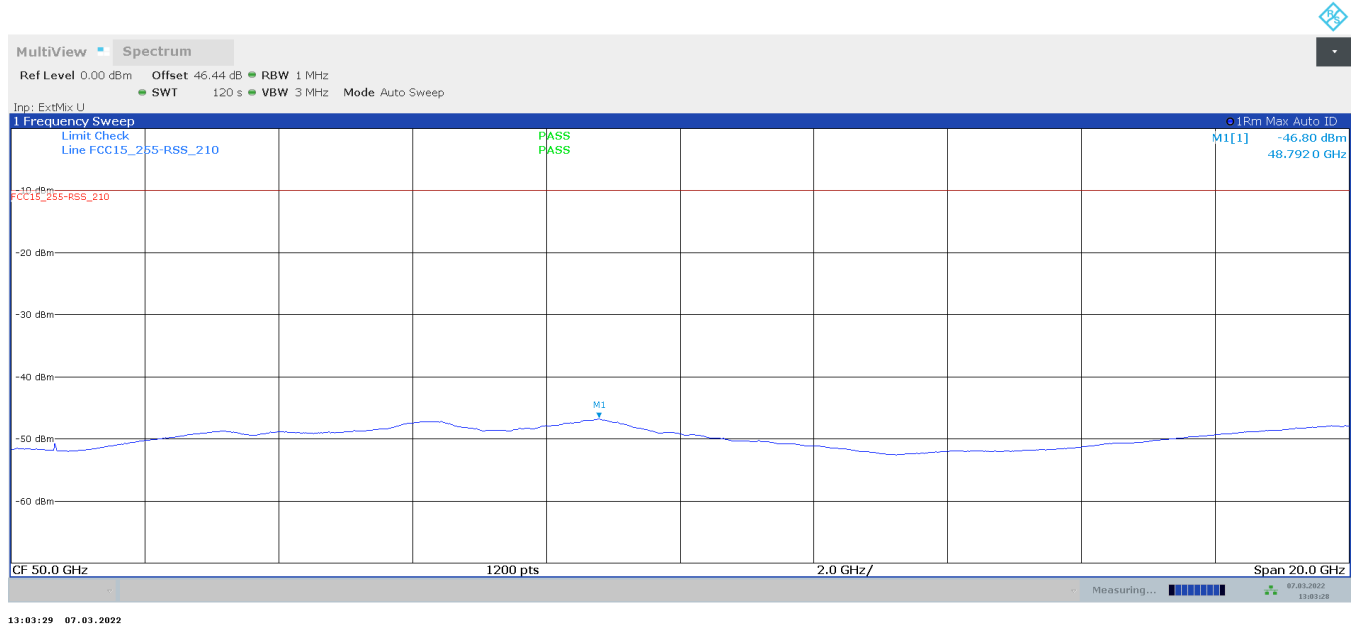


TR no.: 21116501-24768-0

2022-05-02


Plot no. 40: radiated emissions 40 GHz – 60 GHz, hor./vert. polarization, cw high

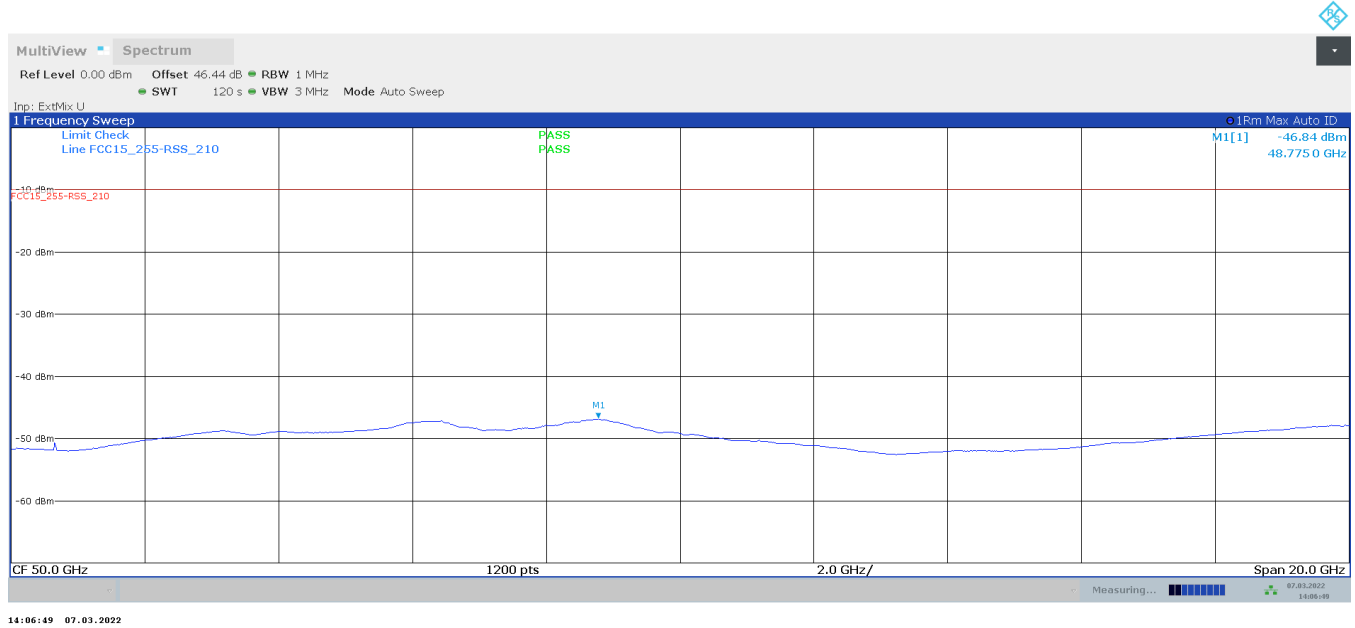

Plot no. 41: radiated emissions 60 GHz – 84 GHz, hor./vert. polarization, cw low

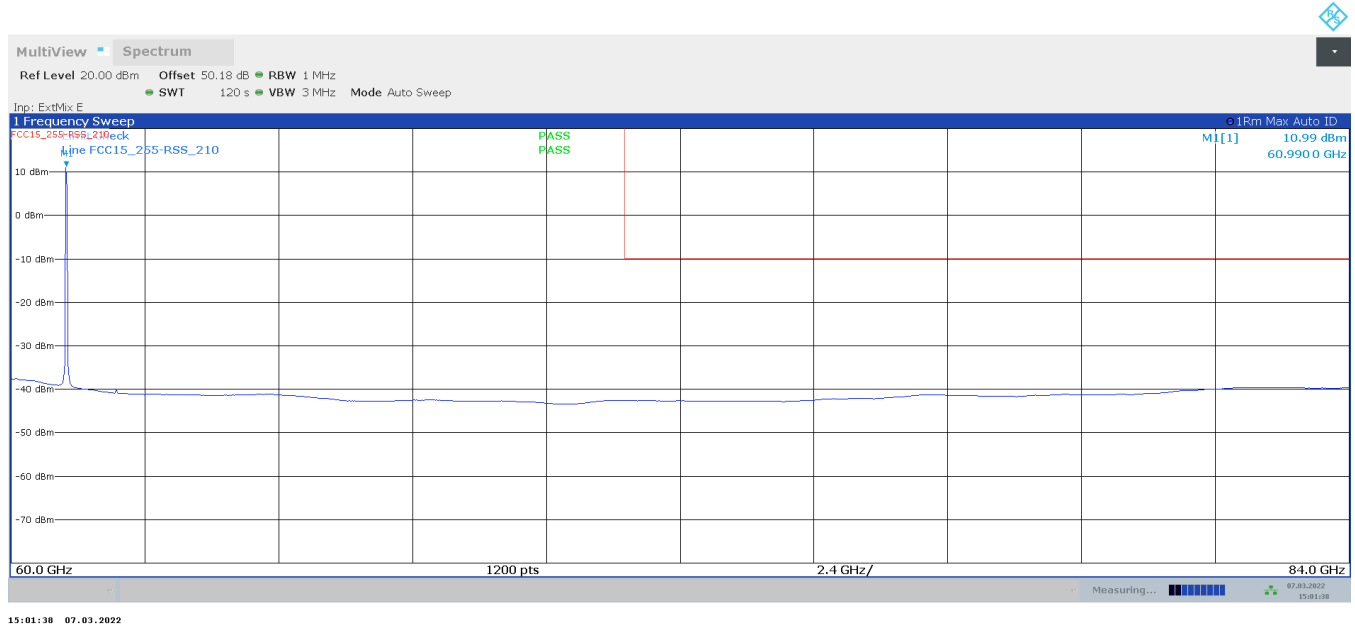


Plot no. 42: radiated emissions 60 GHz – 84 GHz, hor./vert. polarization, cw mid

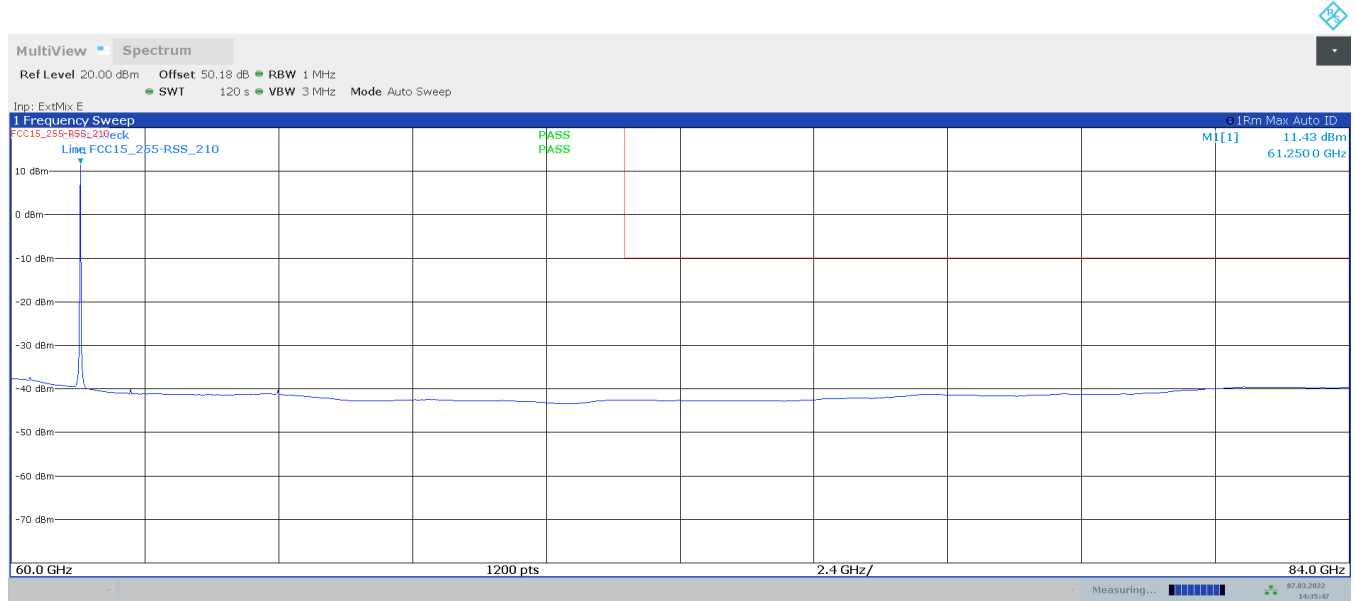


14:35:47 07.03.2022

Plot no. 43: radiated emissions 60 GHz – 84 GHz, hor./vert. polarization, cw high

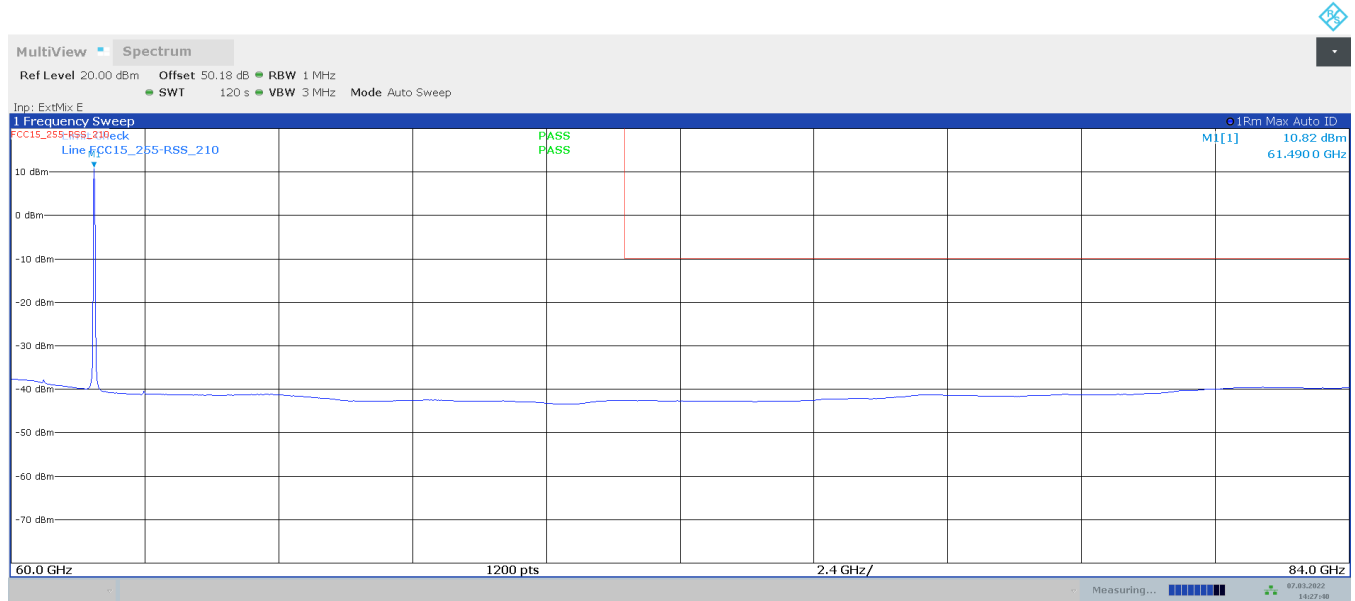


14:27:41 07.03.2022


Plot no. 44: radiated emissions 75 GHz – 110 GHz, hor./vert. polarization, cw low

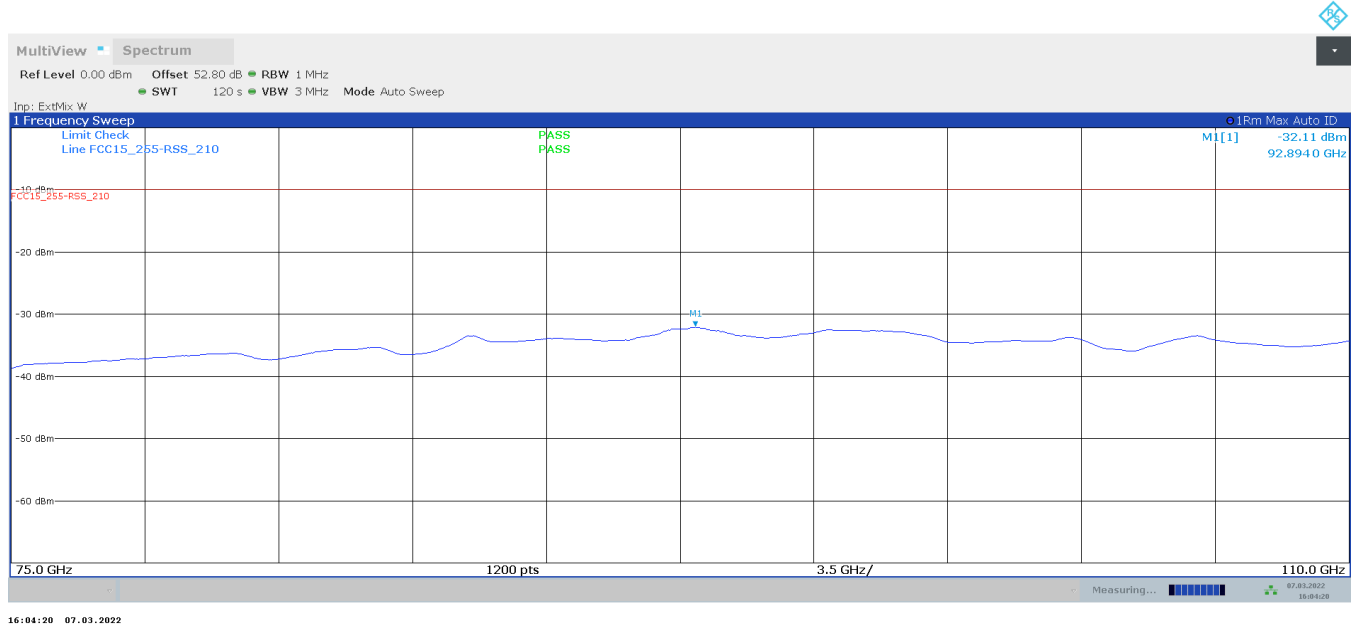


Plot no. 45: radiated emissions 75 GHz – 110 GHz, hor./vert. polarization, cw mid

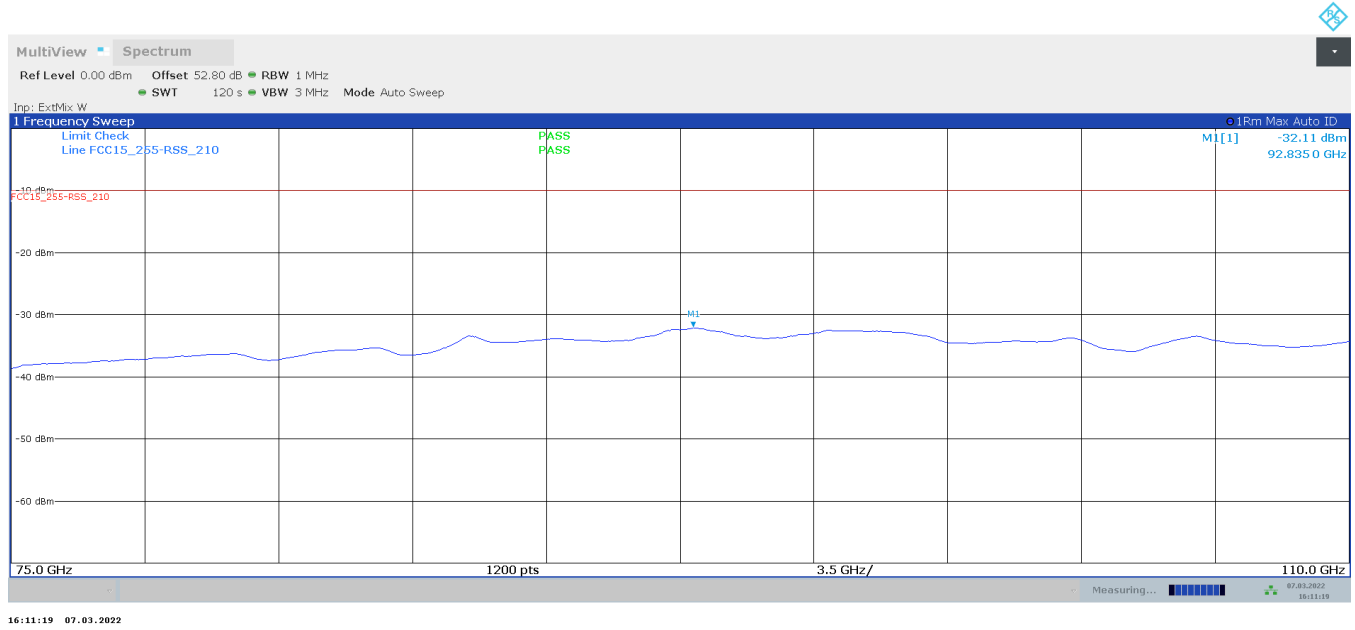


Plot no. 46: radiated emissions 75 GHz – 110 GHz, hor./vert. polarization, cw high

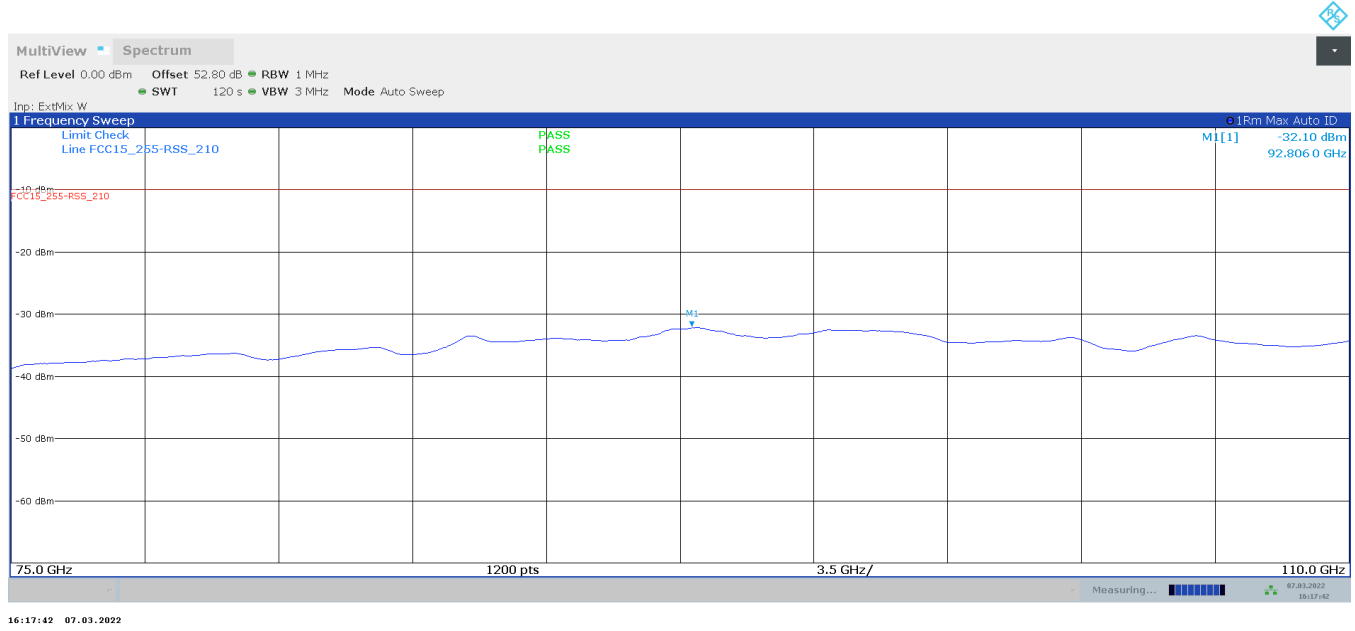


Plot no. 47: radiated emissions 110 GHz – 170 GHz, hor./vert. polarization, cw low

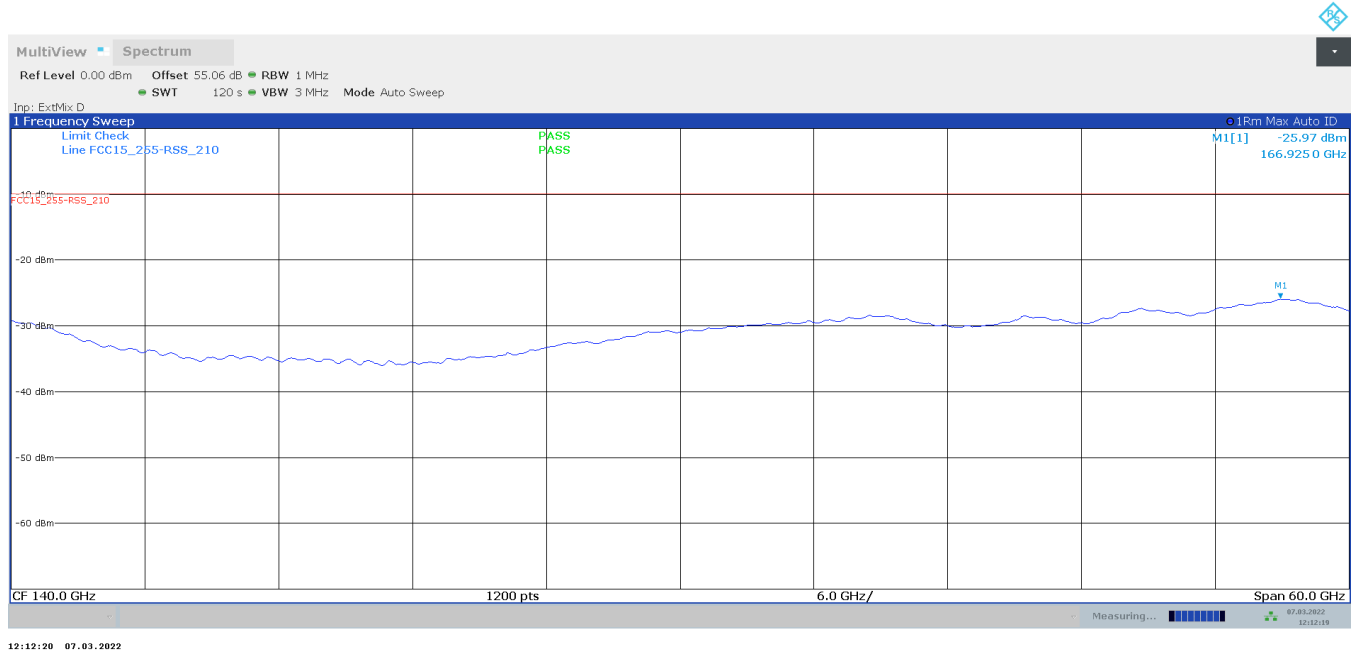


Plot no. 48: radiated emissions 110 GHz – 170 GHz, hor./vert. polarization, cw mid

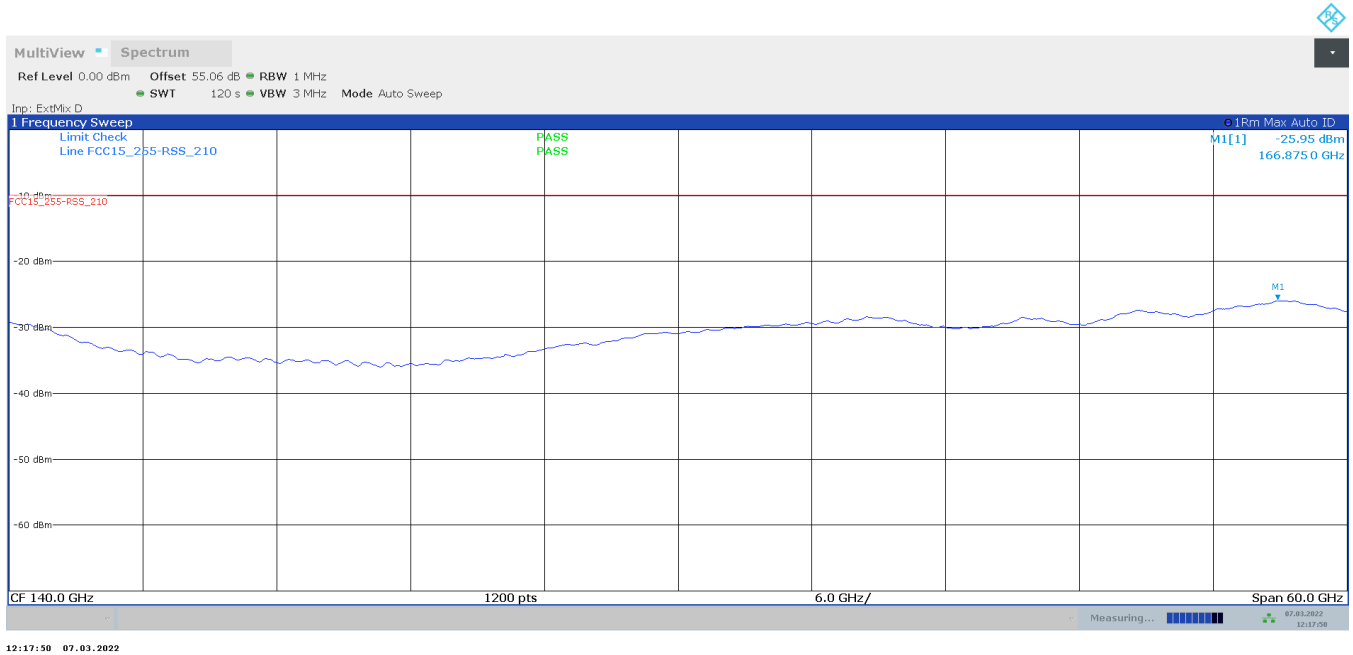


Plot no. 49: radiated emissions 110 GHz – 170 GHz, hor./vert. polarization, cw high

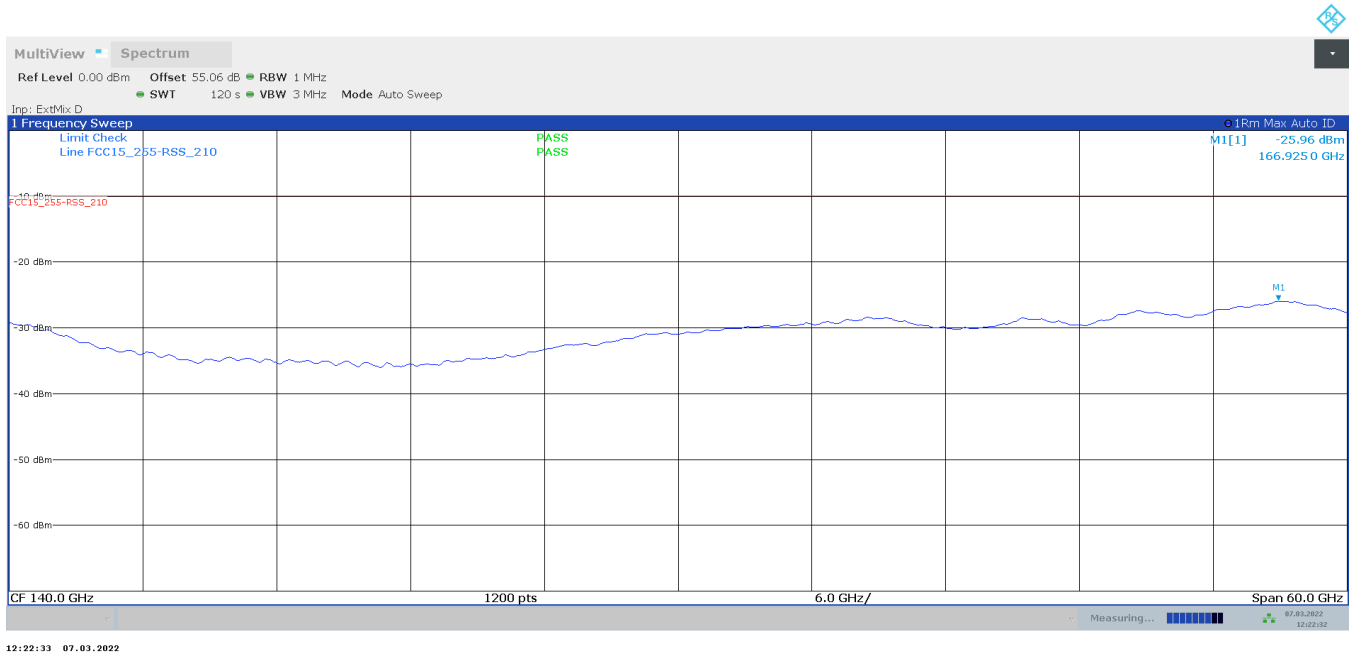


Plot no. 50: radiated emissions 170 GHz – 220 GHz, hor./vert. polarization, cw low

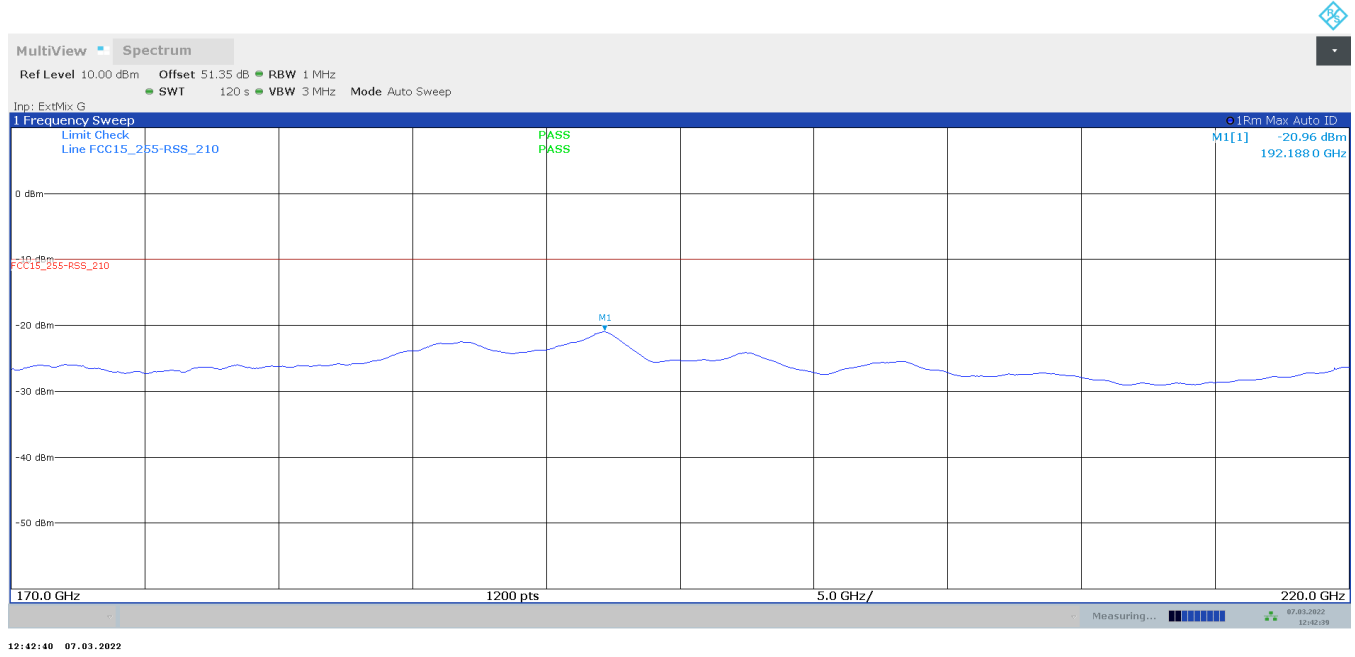

Plot no. 51: radiated emissions 170 GHz – 220 GHz, hor./vert. polarization, cw mid

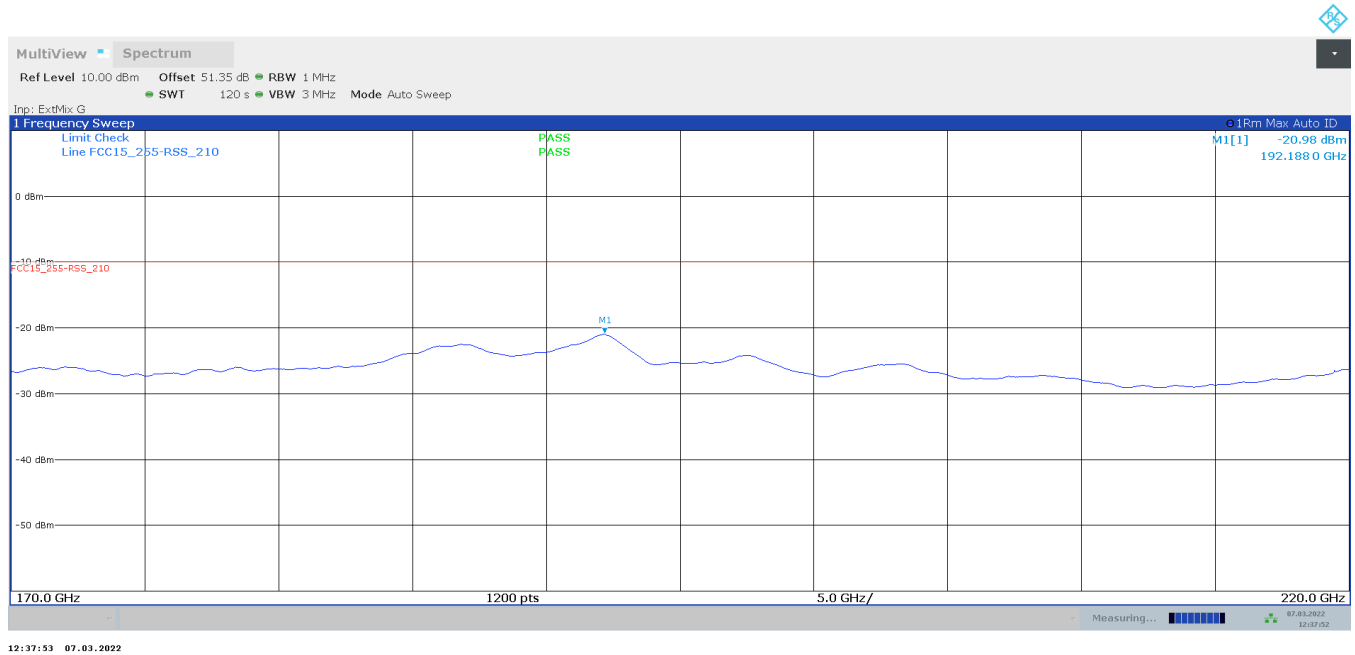

Plot no. 52: radiated emissions 170 GHz – 220 GHz, hor./vert. polarization, cw high

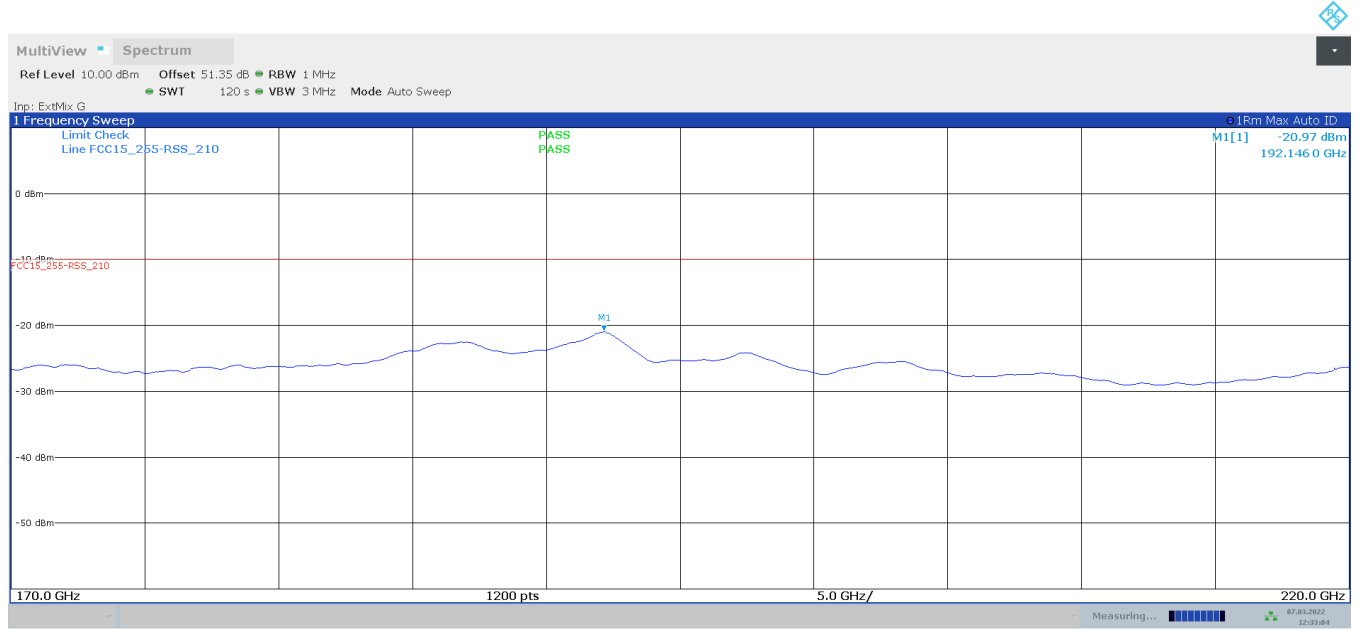


12:33:05 07.03.2022

8 Test Setup Description

Typically, the calibrations of the test apparatus are commissioned to and performed by an accredited calibration laboratory. The calibration intervals are determined in accordance with the DIN EN ISO/IEC 17025. In addition to the external calibrations, the laboratory executes comparison measurements with other calibrated test systems or effective verifications. Cyclically chamber inspections and range calibrations are performed. Where possible resp. necessary, RF generating and signaling equipment as well as measuring receivers and analyzers are connected to an external high-precision 10 MHz reference (GPS-based frequency standard).

In order to simplify the identification of the equipment used at some special tests, some items of test equipment and ancillaries can be provided with an identifier or number in the equipment list below (Lab/Item).

8.1 AC conducted

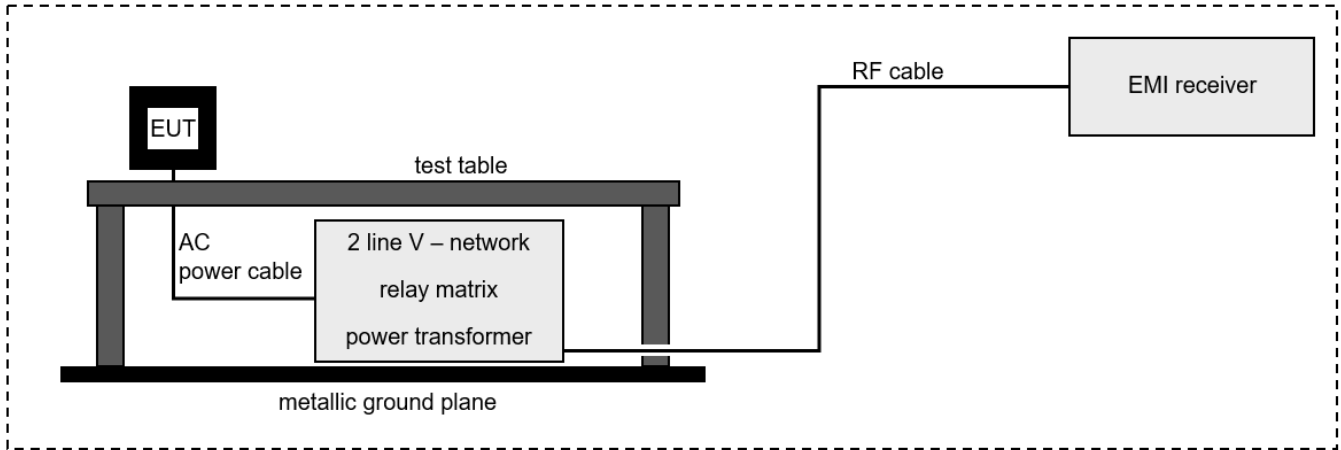

$$FS = UR + CF + VC$$

(FS-field strength; UR-voltage at the receiver; CR-loss of the cable and filter; VC-correction factor of the ISN)

Example calculation:


$$FS [dB\mu V/m] = 37.62 [dB\mu V/m] + 9.90 [dB] + 0.23 [dB] = 47.75 [dB\mu V/m] (244.06 \mu V/m)$$

List of test equipment used:

No.	Equipment	Manufacturer	Type	Serial No.	IBL No.	Kind of Calibration	Last / Next Calibration
1	Open Switch and Control Platform	Rohde & Schwarz	OSP-B200S2	101443	LAB000239	ZW	-
2	EMI Test Receiver	Rohde & Schwarz	ESW26	101481	LAB000236	K	2021-07-01 → 12M → 2022-07-01
3	Two-Line V-Network	Rohde & Schwarz	ENV216	102597	LAB000220	K	2020-09-17 → 24M → 2022-09-17

8.2 Semi Anechoic Chamber with Ground Plane

Radiated measurements are performed in vertical and horizontal plane in the frequency range 30 MHz to 1 GHz in a Semi Anechoic Chamber with a metallic ground plane. The EUT is positioned on a non-conductive test table with a height of 0.80 m above the metallic ground plane that covers the whole chamber. The receiving antennas conform to specification ANSI C63.10-2013, American National Standard for Testing Unlicensed Wireless Devices. These antennas can be moved over the height range between 1.0 m and 4.5 m in order to search for maximum field strength emitted from the EUT. The measurement distances between EUT and receiving antennas are indicated in the test setups for the various frequency ranges. For each measurement, the EUT is rotated in all three axes until the maximum field strength is received. The wanted and unwanted emissions are received by a spectrum analyzer where the detector modes and resolution bandwidths over various frequency ranges are set according to requirement ANSI C63.

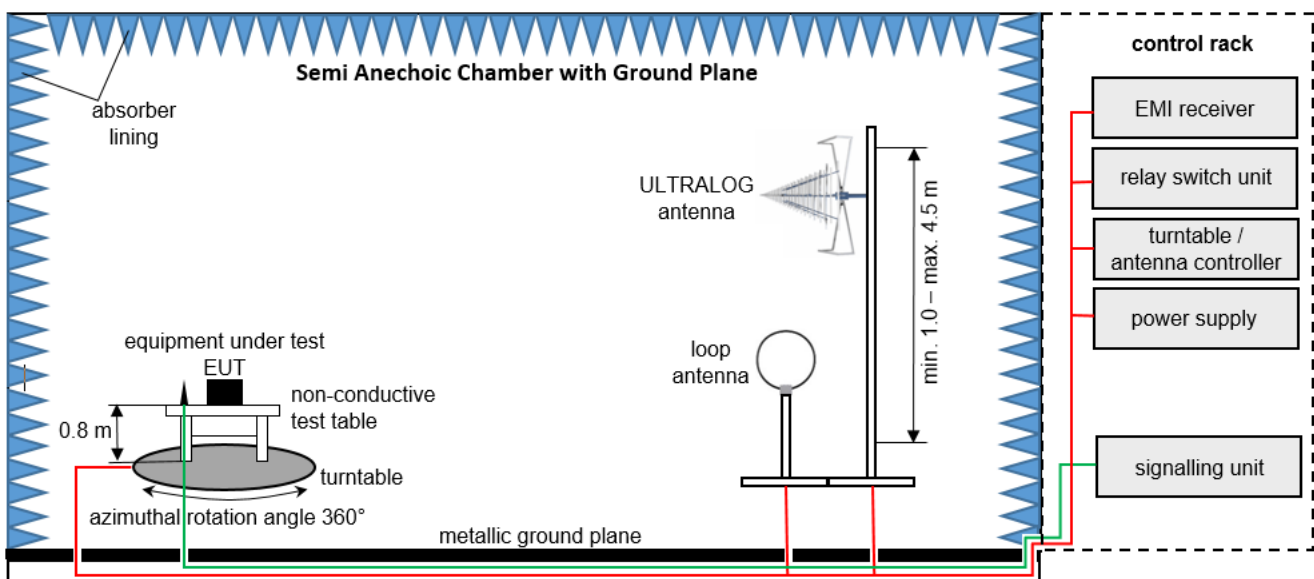

Measurement distance: ULTRALOG antenna 3 m; loop antenna 3 m

EMC32 software version: 11.10.00

$$FS = UR + CL + AF$$

(FS-field strength; UR-voltage at the receiver; CL-loss of the cable; AF-antenna factor)


Example calculation:

$$FS \text{ [dB}\mu\text{V/m]} = 12.35 \text{ [dB}\mu\text{V/m]} + 1.90 \text{ [dB]} + 16.80 \text{ [dB/m]} = 31.05 \text{ [dB}\mu\text{V/m]} \text{ (35.69 } \mu\text{V/m)}$$

List of test equipment used:

No.	Equipment	Manufacturer	Type	Serial No.	IBL No.	Kind of Calibration	Last / Next Calibration
1	Power Supply	Elektro-Automatik GmbH & Co. KG	EA-PSI 9080-40 T	2000230001	LAB000313	NE	–
2	Test table	innco systems GmbH	PT1208-080-RH	-	LAB000306	NE	–
3	Positioner	maturu GmbH	TD 1.5-10KG		LAB000258	NE	–
4	Compressed Air	Implotex	1-850-30	-	LAB000256	NE	–
5	EMI Test Receiver	Rohde & Schwarz	ESW26	101481	LAB000236	K	2021-07-01 → 12M → 2022-07-01
6	Semi-Anechoic Chamber (SAC)	Albatross Projects GmbH	SAC 5 (Babylon 5)	20168.PRB	LAB000235	ZW	2020-08-24 → 36M → 2023-08-24
7	Measurement Software	Rohde & Schwarz	EMC32 V11.00.10		LAB000226	NE	–
8	Turntable	maturu GmbH	TT2.0-2t	TT2.0-2t/921	LAB000225	NE	–
9	Antenna Mast	maturu GmbH	CAM4.0-P	CAM4.0-P/316	LAB000224	NE	–
10	Antenna Mast	maturu GmbH	BAM4.5-P	BAM4.5-P/272	LAB000223	NE	–
11	Controller	maturu GmbH	FCU 3.0	10082	LAB000222	NE	–
12	Power Supply	Elektro-Automatik GmbH & Co. KG	PS 2042-10 B	2878350292	LAB000191	NE	–
13	Open Switch and Control Platform	Rohde & Schwarz	OSP200 Base Unit 2HU	101748	LAB000149	NE	–
14	Antenna	Rohde & Schwarz	HF907	102898	LAB000124	K	2020-04-23 → 36M → 2023-04-23
15	Antenna	Rohde & Schwarz	HL562E	102001	LAB000123	K	2020-07-05 → 36M → 2023-07-05
16	Antenna	Rohde & Schwarz	HFH2-Z2E - Active Loop Antenna	100954	LAB000108	K	2020-03-25 → 36M → 2023-03-25
17	Pre-Amplifier	Schwarzbeck Mess-Elektronik OHG	BBV 9718 C	84	LAB000169	NE	–

8.3 Fully Anechoic Chamber

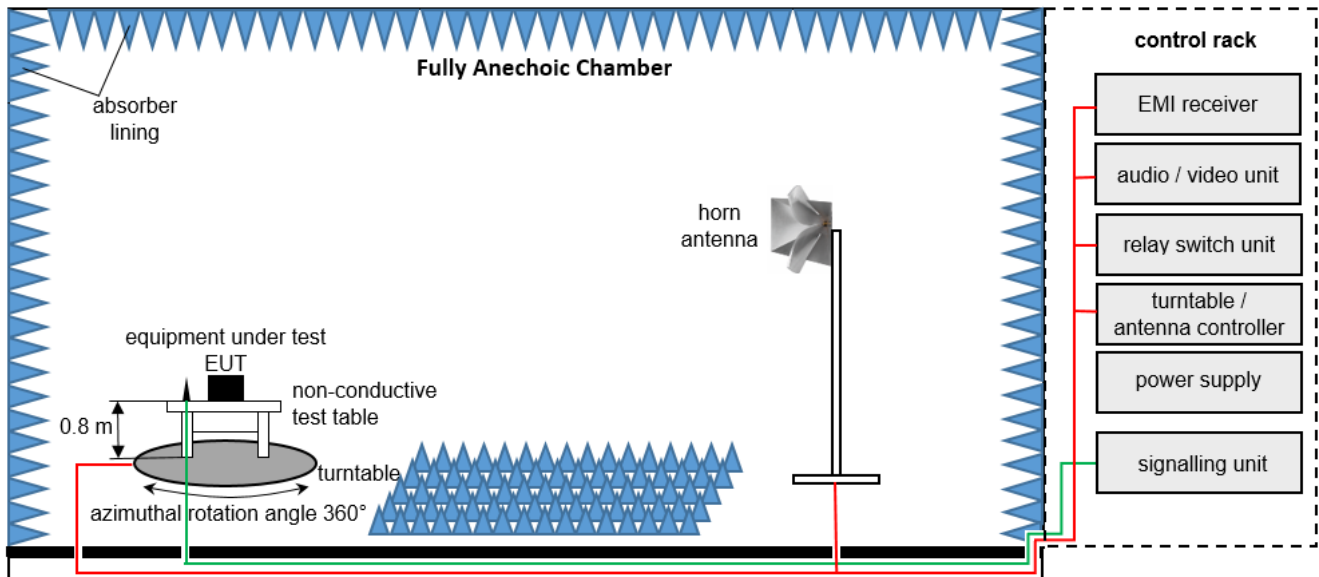

Measurement distance: horn antenna 3 m

EMC32 software version: 11.10.00

$$FS = UR + CA + AF$$

(FS-field strength; UR-voltage at the receiver; CA-loss of the signal path; AF-antenna factor)

Example calculation:


$$FS [dB\mu V/m] = 40.0 [dB\mu V/m] + (-35.8) [dB] + 32.9 [dB/m] = 37.1 [dB\mu V/m] (71.61 \mu V/m)$$

List of test equipment used:


No.	Equipment	Manufacturer	Type	Serial No.	IBL No.	Kind of Calibration	Last / Next Calibration
1	Power Supply	Elektro-Automatik GmbH & Co. KG	EA-PSI 9080-40 T	2000230001	LAB000313	NA	-
2	Test table	innco systems GmbH	PT1208-080-RH	-	LAB000306	NA	-
3	Positioner	matur GmbH	TD 1.5-10KG		LAB000258	NA	-
4	Compressed Air	Implotex	1-850-30	-	LAB000256	NA	-
5	EMI Test Receiver	Rohde & Schwarz	ESW26	101481	LAB000236	K	2021-07-01 → 12M → 2022-07-01
6	Semi-Anechoic Chamber (SAC)	Albatross Projects GmbH	SAC 5 (Babylon 5)	20168.PRB	LAB000235	CM	2020-07-23 → 12M → 2023-07-23
7	Measurement Software	Rohde & Schwarz	EMC32 V11.00.10		LAB000226	NA	-
8	Turntable	matur GmbH	TT2.0-2t	TT2.0-2t/921	LAB000225	NA	-
9	Antenna Mast	matur GmbH	CAM4.0-P	CAM4.0-P/316	LAB000224	NA	-
10	Antenna Mast	matur GmbH	BAM4.5-P	BAM4.5-P/272	LAB000223	NA	-
11	Controller	matur GmbH	FCU 3.0	10082	LAB000222	NA	-
12	Power Supply	Elektro-Automatik GmbH & Co. KG	PS 2042-10 B	2878350292	LAB000191	NA	-
13	Open Switch and Control Platform	Rohde & Schwarz	OSP200 Base Unit 2HU	101748	LAB000149	NA	-
14	Antenna	Rohde & Schwarz	HF907	102898	LAB000124	K	2020-04-23 → 36M → 2023-04-23
15	Antenna	Rohde & Schwarz	HL562E	102001	LAB000123	K	2020-07-05 → 36M → 2023-07-05
16	Antenna	Rohde & Schwarz	HFH2-Z2E - Active Loop Antenna	100954	LAB000108	K	2020-03-25 → 36M → 2023-03-25
17	Pre-Amplifier	Schwarzbeck Mess-Elektronik OHG	BBV 9718 C	84	LAB000169	NA	-

*CM = cyclic maintenance within calibration interval

8.4 Radiated measurements > 18 GHz

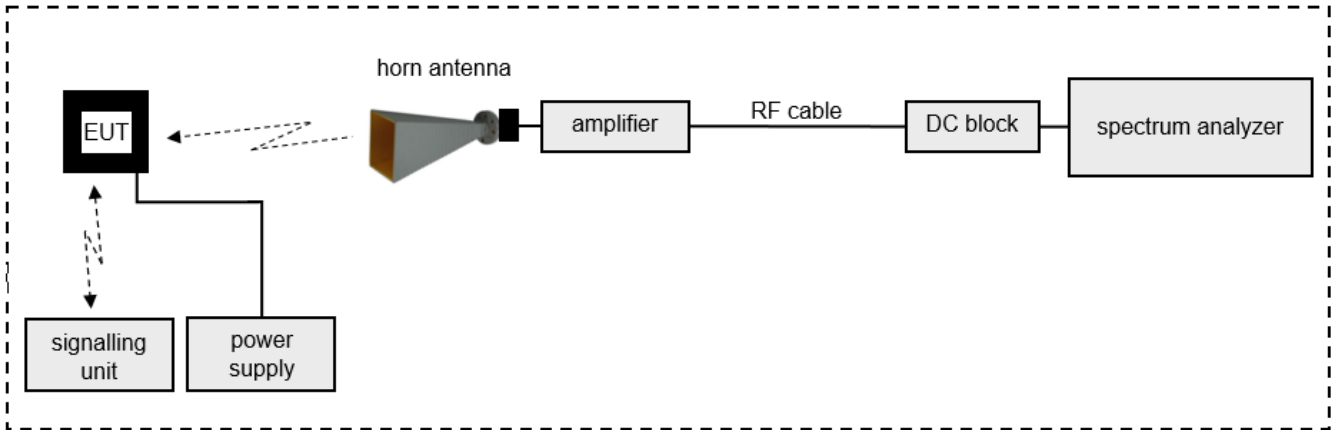

8.5 Radiated measurements > 50 GHz

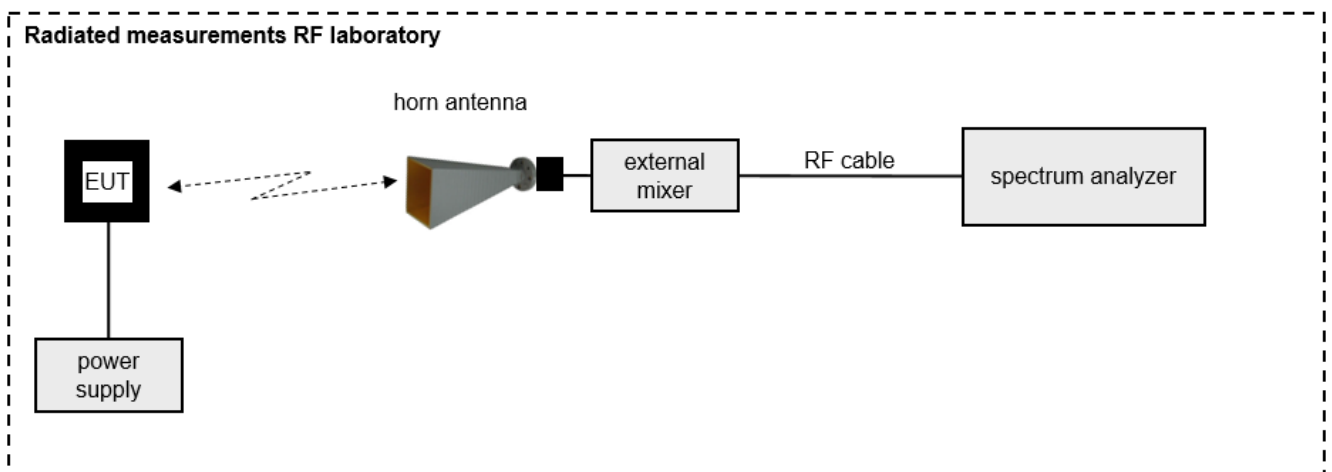

Measurement distance: horn antenna e.g. 50 cm

$$FS = UR + CA + AF$$


(FS-field strength; UR-voltage at the receiver; CA-loss signal path & distance correction; AF-antenna factor)

Example calculation:

$$FS \text{ [dB}\mu\text{V/m]} = 40.0 \text{ [dB}\mu\text{V/m]} + (-60.1) \text{ [dB]} + 36.74 \text{ [dB/m]} = 16.64 \text{ [dB}\mu\text{V/m]} \text{ (6.79 } \mu\text{V/m)}$$

Note: conversion loss of mixer is already included in analyzer value.

8.6 Radiated measurements > EIRP power

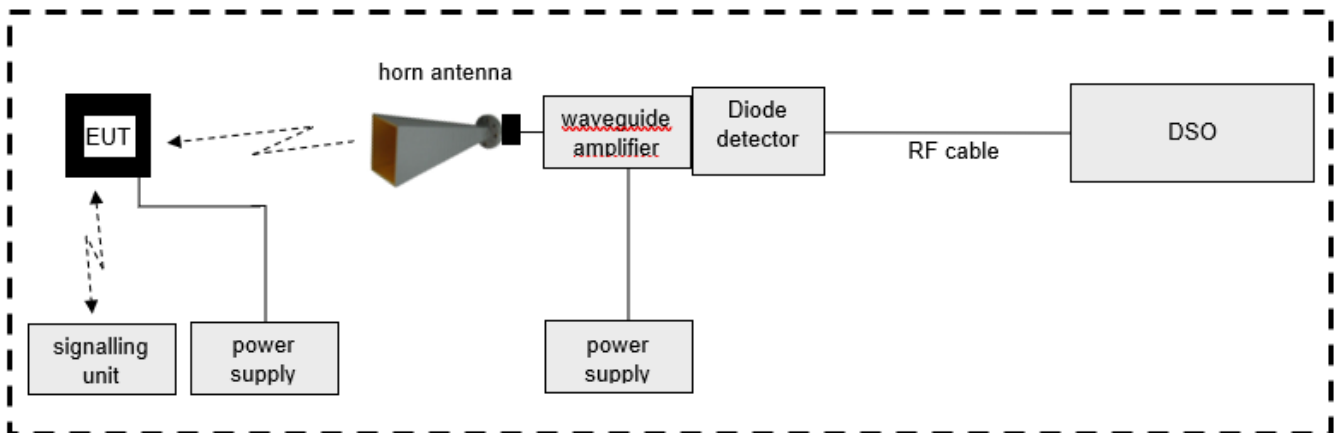

According to ANSI 63.10 9.11 Measurement of the fundamental emission using an RF detector.

List of test equipment used:

No.	Equipment	Manufacturer	Type	Serial No.	IBL No.	Kind of Calibration	Last / Next Calibration
1	Test table	innco systems GmbH	PT0707-RH light	–	LAB000303	–	–
2	Spectrum Analyser	Rohde & Schwarz	FSW43	101391	LAB000289	NA	–
3	Power Supply	Elektro-Automatik GmbH & Co. KG	PS 2042-10 B	2878350263	LAB000190	NA	–
4	WG-Coax-Adapter	Flann Microwave Ltd	23373-TF30 UG383/U	273385	LAB000185	ZW	2021-09-01 → 36M → 2022-09-01
5	WG-Coax-Adapter	Flann Microwave Ltd	22093-TF30 UG599/U	273263	LAB000183	ZW	2021-09-01 → 36M → 2022-09-01
6	WG-Coax-Adapter	Flann Microwave Ltd	20093-TF30 UBR220	273374	LAB000181	ZW	2021-09-01 → 36M → 2022-09-01
7	Coaxial Cable	Huber & Suhner	SF101/1.0m	503989/1	LAB000163	ZW	2021-08-16 → 12M → 2022-08-16
8	Coaxial Cable	Huber & Suhner	SF101/0.5m	504118/1	LAB000162	ZW	2021-08-16 → 12M → 2022-08-16
9	Coaxial Cable	Huber & Suhner	ST18/48"	2276454-01	LAB000157	ZW	2021-08-16 → 12M → 2022-08-16
10	Coaxial Cable	Rosenberger	LU7-022-1000	34	LAB000154	NA	–
11	Coaxial Cable	Rosenberger	LU7-022-1000	33	LAB000153	NA	–
12	Antenna	Flann Microwave Ltd	27240-20	273367	LAB000137	ZW	2021-09-01 → 36M → 2022-09-01
13	Antenna	Flann Microwave Ltd	25240-20	272860	LAB000133	ZW	2021-09-01 → 36M → 2022-09-01
14	Antenna	Flann Microwave Ltd	23240-20	273430	LAB000132	ZW	2021-09-01 → 36M → 2022-09-01
15	Antenna	Flann Microwave Ltd	22240-20	270448	LAB000130	K	2020-06-29 → 36M → 2023-06-29
16	Antenna	Flann Microwave Ltd	20240-20	266403	LAB000128	K	2020-06-29 → 36M → 2023-06-29
17	Harmonic Mixer	Rohde & Schwarz	FS-Z110	102000	LAB000114	K	2021-04-07 → 12M → 2022-04-07
18	Harmonic Mixer	Rohde & Schwarz	FS-Z75	102015	LAB000112	K	2021-03-31 → 12M → 2022-03-31
19	Spectrum Analyser	Rohde & Schwarz	FSW50	101450	LAB000111	K	2021-07-22 → 12M → 2022-07-22
20	Antenna Mast	Schwarzbeck Mess-Elektronik OHG	AM 9104	99	LAB000109	NA	–
21	Climatic Chamber	CTS GmbH	T-65/50	204002	LAB000110	ZW	2021-06-18 → 12M → 2022-06-18
21	Pre-Amplifier	Eravant	SBL-9531443565-0808-E1	13790-01	LAB000439	ZW	2021-10-21 → 12M → 2022-10-21
22	Pre-Amplifier	Eravant	SBL-5037533550-1515-E1	13793-01	LAB000438	ZW	2021-09-15 → 12M → 2022-09-15
23	Detector Diode	Eravant	SFD-503753-15SF-P1	13789-01	LAB000436	NE	–

9 Measurement procedures

9.1 Radiated spurious emissions from 9 kHz to 30 MHz

Test setup

- The EUT is set up according to its intended use, as described in the user manual or as defined by the manufacturer.
- In case of floor standing equipment, it is placed in the middle of the turn table.
In case of tabletop equipment it is placed on a non-conductive table with a height of 80 cm.
- Additional equipment, cables, ... necessary for testing, are positioned like under normal operation.
- Interface cables, e.g. power supply, network, ... are connected to the connection box in the turn table.
- EUT is powered on and set into operation.

Pre-scan

- Turntable performs an azimuthal rotation from 0° to 315° in 45° steps.
- For each turntable step the EMI-receiver/spectrum analyser performs a positive-peak/max-hold sweep (=worst-case). Data is transferred to EMI-software and recorded. EMI-software will show the maximum level of all single sweeps as the final result for the pre-scan.

Final measurement

- Significant emissions found during the pre-scan will be maximized by the EMI-software by rotating the turntable from 0° to 360°.
- Loop antenna is rotated with special 3D adapter set to find maximum level of emissions.
- Plot of the pre-scan with frequencies of identified emissions including levels, correction factors, turn table position and settings of measuring equipment is recorded.

Distance correction (extrapolation)

- When performing measurements on test distances other than defined in the rules, the results shall be extrapolated to the specified distance by conservatively presuming that the field strength decays at 40 dB/decade of distance in the region closer than λ in m divided by 2π (i.e., $\lambda/2\pi$), and at 20 dB/decade of distance beyond that, using the measurement of a single point at the radial angle that produces the maximum emission.

This correction is already included in the limit line of corresponding measurement plots.

Detailed requirements can be found in e.g. ANSI C63.4 / C63.10

9.2 Radiated spurious emissions from 30 MHz to 1 GHz

Test setup

- The EUT is set up according to its intended use, as described in the user manual or as defined by the manufacturer.
- In case of floor standing equipment, it is placed in the middle of the turn table.
In case of tabletop equipment it is placed on a non-conductive table with a height of 80 cm.
- Additional equipment, cables, ... necessary for testing, are positioned like under normal operation.
- Interface cables, e.g. power supply, network, ... are connected to the connection box in the turn table.
- EUT is powered on and set into operation.

Pre-scan

- Turntable performs an azimuthal rotation from 0° to 315° in 45° steps.
- Antenna polarisation is changed (H-V / V-H) and antenna height is changed from 1 meter to 4 meters.
- For each turntable step / antenna polarisation / antenna height the EMI-receiver/spectrum analyser performs a positive-peak/max-hold sweep (=worst-case). Data is transferred to EMI-software and recorded. EMI-software will show the maximum level of all single sweeps as the final result for the pre-scan.

Final measurement

- Significant emissions found during the pre-scan will be maximized by the EMI-software based on evaluated data during the pre-scan by rotating the turntable and changing antenna height and polarisation.
- Final measurement will be performed with measuring equipment settings as defined in the applicable test standards (e.g. ANSI C6.4).
- Plot of the pre-scan with frequencies of identified emissions including levels, correction factors, turn table position, antenna polarisation and settings of measuring equipment is recorded.

Distance correction (extrapolation)

- When performing measurements on test distances other than defined in the rules, the results shall be extrapolated to the specified distance by conservatively presuming that the field strength decays at 20 dB/decade of distance beyond the region λ in m divided by 2π (i.e., $\lambda/2\pi$), using the measurement of a single point at the radial angle that produces the maximum emission.
This correction is already included in the corresponding measurement plots.

Detailed requirements can be found in e.g. ANSI C63.4 / C63.10

9.3 Radiated spurious emissions from 1 GHz to 18 GHz

Test setup

- The EUT is set up according to its intended use, as described in the user manual or as defined by the manufacturer.
- In case of floor standing equipment, it is placed in the middle of the turn table.
In case of tabletop equipment it is placed on a non-conductive table with a height of 80 cm.
- Additional equipment, cables, ... necessary for testing, are positioned like under normal operation.
- Interface cables, e.g. power supply, network, ... are connected to the connection box in the turn table.
- EUT is powered on and set into operation.

Pre-scan

- Turntable performs an azimuthal rotation from 0° to 315° in 45° steps.
- Antenna polarisation is changed (H-V / V-H) and antenna height is changed from 1 meter to 4 meters.
- For each turntable step / antenna polarisation / antenna height the EMI-receiver/spectrum analyser performs a positive-peak/max-hold sweep (=worst-case). Data is transferred to EMI-software and recorded. EMI-software will show the maximum level of all single sweeps as the final result for the pre-scan.

Final measurement

- Significant emissions found during the pre-scan will be maximized by the EMI-software based on evaluated data during the pre-scan by rotating the turntable and changing antenna height and polarisation.
- Final measurement will be performed with measuring equipment settings as defined in the applicable test standards (e.g. ANSI C6.4).
- Plot of the pre-scan with frequencies of identified emissions including levels, correction factors, turn table position, antenna polarisation and settings of measuring equipment is recorded.

Distance correction (extrapolation)

- When performing measurements on test distances other than defined in the rules, the results shall be extrapolated to the specified distance by conservatively presuming that the field strength decays at 20 dB/decade of distance beyond the region λ in m divided by 2π (i.e., $\lambda/2\pi$), using the measurement of a single point at the radial angle that produces the maximum emission.
This correction is already included in the corresponding measurement plots.

Detailed requirements can be found in e.g. ANSI C63.4 / C63.10

9.4 Radiated spurious emissions above 18 GHz

Test setup

- The EUT is set up according to its intended use, as described in the user manual or as defined by the manufacturer.
- Additional equipment, cables, ... necessary for testing, are positioned like under normal operation.
- EUT is powered on and set into operation.
- Test distance depends on EUT size and test antenna size (farfield conditions shall be met).

Pre-scan

- The test antenna is handheld and moved carefully over the EUT to cover the EUT's whole sphere and for different polarizations of the antenna.

Final measurement

- Significant emissions found during the pre-scan will be maximized, i.e. position and antenna orientation causing the highest emissions with Peak and RMS detector
- Final measurement will be performed with measuring equipment settings as defined in the applicable test standards (e.g. ANSI C63.4 / C63.10).
- Final plot showing measurement data, levels, frequency, measuring time, bandwidth, correction factor, margin to the limit and limit is recorded.

Note

- In case of measurements with external harmonic mixers (e.g. above 50 GHz) special care is taken to avoid possible overloading of the external mixer's input.
- As external harmonic mixers may generate false images, care is taken to ensure that any emission measured by the spectrum analyzer is indeed radiated from the EUT and not internally generated by the external harmonic mixer. Signal identification feature of spectrum analyzer is used to eliminate/reduce images of the external harmonic mixer.

Distance correction (extrapolation)

- When performing measurements on test distances other than defined in the rules, the results shall be extrapolated to the specified distance by conservatively presuming that the field strength decays at 20 dB/decade of distance beyond the region λ in m divided by 2π (i.e., $\lambda/2\pi$), using the measurement of a single point at the radial angle that produces the maximum emission.
This correction is already included in the corresponding measurement plots.

Detailed requirements can be found in e.g. ANSI C63.4 / C63.10

10 MEASUREMENT UNCERTAINTIES

Radio frequency	$\leq \pm 10$ ppm
Radiated emission	$\leq \pm 6$ dB
Temperature	$\leq \pm 1$ °C
Humidity	$\leq \pm 5$ %
DC and low frequency voltages	$\leq \pm 3$ %

The indicated expanded measurement uncertainty corresponds to the standard measurement uncertainty for the measurement results multiplied by the coverage factor $k = 2$. It was determined in accordance with EA-4/02 M:2013. The true value is located in the corresponding interval with a probability of 95 %.