



Product Service

Choose certainty.  
Add value.

August 27, 2014

Page 1 of 63

## Prüfbericht / Test Report

Nr. / No. 70204-40564-5 (Edition 2)

Applicant: BM Innovations GmbH  
Type of equipment: Transceiver  
Type designation: BM-USBRTX4US  
Order No.: --  
Test standards: FCC Code of Federal Regulations,  
CFR 47, Part 15,  
Sections 15.107, 15.109, 15.111(a), 15.205, 15.207, 15.215 and 15.249  
  
Industry Canada Radio Standards Specifications  
RSS-GEN Issue 3, Sections 6.2, 7.2.2 and 7.2.4 and  
RSS-210 Issue 8, Section A2.9 (Category I Equipment)

### **Note:**

The test data of this report is related only to the individual item which has been tested. This report shall not be reproduced except in full extent without the written approval of the testing laboratory.



## Table of Contents

1	Description of the Equipment Under Test (EUT) .....	3
2	Administrative Data .....	4
3	Identification of the Test Laboratory .....	5
4	Summary .....	6
5	Operation Mode and Configuration of EUT .....	7
6	Measurement Procedures .....	8
6.1	Conducted Output Power .....	8
6.2	Bandwidth Measurements .....	10
6.3	Conducted AC Powerline Emission .....	12
6.4	Radiated Emission Measurement 9 kHz to 30 MHz .....	14
6.5	Radiated Emission in Fully or Semi Anechoic Room .....	16
6.6	Radiated Emission at Alternative Test Site .....	18
6.7	Antenna Power Conduction Emission of Receivers .....	20
7	Photographs Taken During Testing .....	22
8	Test Results for Transmitter .....	28
8.1	Conducted Output Power .....	30
8.2	Occupied Bandwidth .....	32
8.3	Bandwidth of the Emission .....	36
8.4	Designation of Emissions .....	38
8.5	Restricted Bands of Operation .....	39
8.6	Conducted Powerline Emission Measurement 150 kHz to 30 MHz .....	40
8.7	Radiated Emission Measurement 9 kHz to 30 MHz .....	43
8.8	Radiated Emission Measurement 30 MHz to 10 GHz .....	45
8.9	Exposure of Humans to RF Fields .....	49
9	Test Results for Receiver .....	51
9.1	Conducted Powerline Emission Measurement 150 kHz to 30 MHz .....	52
9.2	Radiated Emission Measurement 30 MHz to 10.0 GHz .....	55
9.3	Antenna Power Conduction Emission of Receivers 9 kHz to 10.0 GHz .....	58
10	Referenced Regulations .....	59
11	Test Equipment List with Calibration Data .....	61
12	Revision History .....	63



## 1 Description of the Equipment Under Test (EUT)

### General data of EUT

Type designation <sup>1</sup> :	BM-USBRTX4US
Parts <sup>2</sup> :	USB cable, Board, Antenna
Serial number(s):	000047
Manufacturer:	BM Innovations GmbH
Type of equipment:	Transceiver
Version:	As received
FCC ID:	WRO-BM-USBRTX4
Industry Canada ID:	8288A-BMUSBRTX4
Additional parts/accessories:	--

### Technical data of EUT

Application frequency range:	902 - 928 MHz
Frequency range:	902 – 928 MHz
Operating frequency:	915 MHz
Type of modulation:	GFSK
Pulse train:	1
Pulse width:	1
Number of RF-channels:	1
Channel spacing:	--
Designation of emissions <sup>3</sup> :	
Type of antenna:	External antenna
Size/length of antenna:	21 cm
Connection of antenna:	<input checked="" type="checkbox"/> detachable <input type="checkbox"/> not detachable
Type of power supply:	DC supply
Specifications for power supply:	nominal voltage: 5.0 V nominal frequency: DC Hz

<sup>1</sup> Type designation of the system if EUT consists of more than one part.

<sup>2</sup> Type designations of the parts of the system, if applicable.

<sup>3</sup> Also known as "Class of Emission".



## 2 Administrative Data

### Application details

Applicant (full address):	BM Innovations GmbH Mainburger Str. 3 85413 Hörgerthausen
Contact person:	Mr. Hans-Günter Betz
Order number:	--
Receipt of EUT:	2014-04-22
Date(s) of test:	2014-05-13 to 2014-05-15
Note(s):	--

### Report details

Report number:	70204-40564-5
Edition:	2
Issue date:	August 27, 2014



### 3 Identification of the Test Laboratory

#### Details of the Test Laboratory

Company name:	TÜV SÜD Product Service GmbH
Address:	Aeussere Fruehlingstrasse 45 D-94315 Straubing Germany
Laboratory accreditation:	DAkKS Registration No. D-PL-11321-11-01
FCC test site registration number	90926
Industry Canada test site registration:	3050A-2
Contact person:	Mr. Johann Roidt
	Phone: +49 9421 5522-0 Fax: +49 9421 5522-99

## 4 Summary

### Summary of test results

The tested sample complies with the requirements set forth in the

**Code of Federal Regulations CFR 47, Part 15, Sections 15.107, 15.109, 15.111(a), 15.205, 15.207, 15.215 and 15.249**

of the Federal Communication Commission (FCC) and the

**Radio Standards Specifications  
RSS-GEN Issue 3, Sections 6.2, 7.2.2 and 7.2.4 and  
RSS-210 Issue 8, Section A2.9 (Category I Equipment)**

of Industry Canada (IC).

### Personnel involved in this report

Laboratory Manager:



Mr. Johann Roidt



Responsible for testing:

Mr. Martin Steindl / Markus Biberger

Responsible for test report:

Mr. Markus Biberger



## 5 Operation Mode and Configuration of EUT

### Operation Mode(s)

Operating mode 1: Continuous transmitting  
 Operating mode 2: The EUT is receiving

### Configuration(s) of EUT

The EUT is connected to a test notebook via USB cable. At the notebook a special test software for receiving and transmitting mode ist running.

### List of ports and cables

No.	Description	Classification <sup>4</sup>	Cable type	Cable length
1	USB cable	--	--	2m

### List of devices connected to EUT

No.	Description	Type designation	Serial no. or ID	Manufacturer
1	Notebook	D600	--	DELL

### List of support devices

No.	Description	Type designation	Serial no. or ID	Manufacturer
--	--	--	--	--

<sup>4</sup> Ports shall be classified as ac power, dc power or signal/control port.

## 6 Measurement Procedures

### 6.1 Conducted Output Power


#### Measurement Procedure:

Rules and specifications: CFR 47 Part 2, section 2.1046(a)  
 IC RSS-Gen Issue 3, section 4.8

Guide: CFR 47 Part 2, section 2.1046 / IC RSS-Gen Issue 3

Conducted output power is measured at the RF output terminals (e.g. antenna connector if antenna is detachable) when the transmitter is adjusted in accordance with the tune-up procedure, if applicable. The RF output terminals are connected to a spectrum analyzer and/or a power meter with appropriate sensor. If required, a resistive matching network equal to the impedance specified or employed for the antenna is used as well as dc block and appropriate attenuators (50 Ohms). The electrical characteristics of the radio frequency load attached to the output terminals shall be stated, if applicable.

If a spectrum analyzer is used and no other settings are specified resolution bandwidth shall be selected according to the carrier frequency  $f_c$  and set to 10 kHz ( $150 \text{ kHz} \leq f_c < 30 \text{ MHz}$ ), 100 kHz ( $30 \text{ MHz} \leq f_c < 1 \text{ GHz}$ ) or 1 MHz ( $f_c \geq 1 \text{ GHz}$ ). The video bandwidth shall be at least three times greater than the resolution bandwidth. The settings used have to be indicated within the appropriate test record(s).

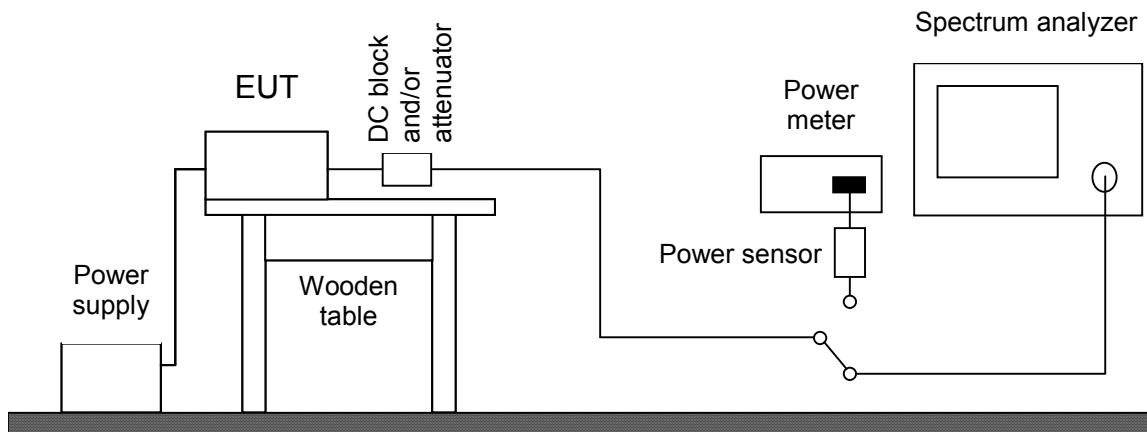




Test instruments used:

Type	Designation	Inv.-no.	Serial No. or ID	Manufacturer
<input checked="" type="checkbox"/> Spectrum analyzer	FSP30	1666	100063	Rohde & Schwarz
<input checked="" type="checkbox"/> EMI test receiver	ESPI7	1711	836914/0002	Rohde & Schwarz
<input type="checkbox"/> EMI test receiver	ESMI	1569	839379/013 839587/006	Rohde & Schwarz
<input type="checkbox"/> Power meter	NRVS	1264	836856/015	Rohde & Schwarz
<input type="checkbox"/> Peak power sensor	NRV-Z31	1701	8579604.03	Rohde & Schwarz
<input type="checkbox"/> Power sensor	NRV-Z52	1499	837901/030	Rohde & Schwarz
<input type="checkbox"/> Power sensor	NRV-Z4	1034	863828/015	Rohde & Schwarz
<input type="checkbox"/> DC-block	7006	1636	A2798	Weinschel
<input type="checkbox"/> Attenuator	4776-10	1638	9412	Narda
<input type="checkbox"/> Attenuator	4776-20	1639	9503	Narda

## 6.2 Bandwidth Measurements

Measurement Procedure:	
Rules and specifications:	CFR 47 Part 2, section 2.202(a) CFR 47 Part 15, section 15.215(c) IC RSS-Gen Issue 3, sections 4.6.1 and 4.6.2 IC RSS-210 Issue 8, section A1.1.3 ANSI C63.4, annex H.6
Guide:	ANSI C63.4 / IC RSS-Gen Issue 3, sections 4.6.1 and 4.6.2
Measurement setup:	<input checked="" type="checkbox"/> Conducted: See below <input type="checkbox"/> Radiated: Radiated Emission in Fully or Semi Anechoic Room (6.5)
<p>If antenna is detachable bandwidth measurements shall be performed at the antenna connector (conducted measurement) when the transmitter is adjusted in accordance with the tune-up procedure, if applicable. The RF output terminals are connected to a spectrum analyzer. If required, a resistive matching network equal to the impedance specified or employed for the antenna is used as well as dc block and appropriate attenuators (50 Ohms). The electrical characteristics of the radio frequency load attached to the output terminals shall be stated, if applicable.</p> <p>If radiated measurements are performed the same test setups and instruments are used as with radiated emission measurements for the appropriate frequency range.</p> <p>The analyzer settings are specified by the test description of the appropriate test record(s).</p>	

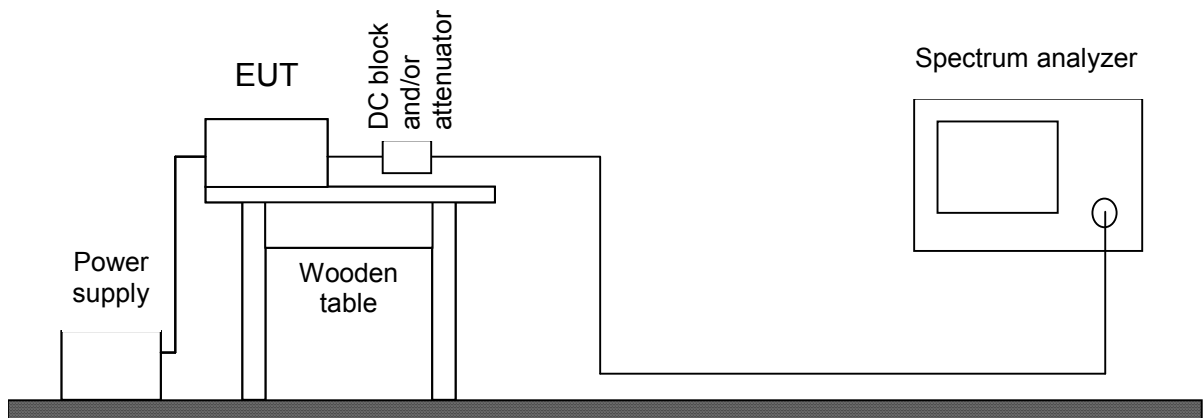

Test instruments used for conducted measurements:

Type	Designation	Inv.-no.	Serial No. or ID	Manufacturer
<input checked="" type="checkbox"/> Spectrum analyzer	FSP30	1666	100036	Rohde & Schwarz
<input type="checkbox"/> EMI test receiver	ESPI7	1711	836914/0002	Rohde & Schwarz
<input type="checkbox"/> EMI test receiver	ESMI	1569	839379/013 839587/006	Rohde & Schwarz
<input type="checkbox"/> Power meter	NRVS	1264	836856/015	Rohde & Schwarz
<input type="checkbox"/> Peak power sensor	NRV-Z31	1701	8579604.03	Rohde & Schwarz
<input type="checkbox"/> Power sensor	NRV-Z52	1499	837901/030	Rohde & Schwarz
<input type="checkbox"/> Power sensor	NRV-Z4	1034	863828/015	Rohde & Schwarz
<input type="checkbox"/> DC-block	7006	1636	A2798	Weinschel
<input type="checkbox"/> Attenuator	4776-10	1638	9412	Narda
<input type="checkbox"/> Attenuator	4776-20	1639	9503	Narda

### 6.3 Conducted AC Powerline Emission

**Measurement Procedure:**

Rules and specifications: CFR 47 Part 15, sections 15.107 and 15.207  
 IC RSS-GEN Issue 3, section 7.2.4

Guide: ANSI C63.4 (CISPR 22)


Conducted emission tests in the frequency range 150 kHz to 30 MHz are performed using Line Impedance Stabilization Networks (LISNs). To simplify testing with quasi-peak and average detector the following procedure is used:

First the whole spectrum of emission caused by the equipment under test (EUT) is recorded with detector set to peak using CISPR bandwidth of 10 kHz. After that all emission levels having less margin than 10 dB to or exceeding the average limit are retested with detector set to quasi-peak.

If average limit is kept with quasi-peak levels no additional scan with average detector is necessary. In cases of emission levels between quasi-peak and average limit an additional scan with detector set to average is performed.

According to ANSI C63.4, section 13.1.3.1, testing of intentional radiators with detachable antenna shall be performed using a suitable dummy load connected to the antenna output terminals. Otherwise, the tests shall be made with the antenna connected and, if adjustable, fully extended.

Testing with dummy load may be necessary to distinguish (unintentional) conducted emissions on the supply lines from (intentional) emissions radiated by the antenna and coupling directly to supply lines and/or LISN. Usage of dummy load has to be stated in the appropriate test record(s) and notes should be added to clarify the test setup.

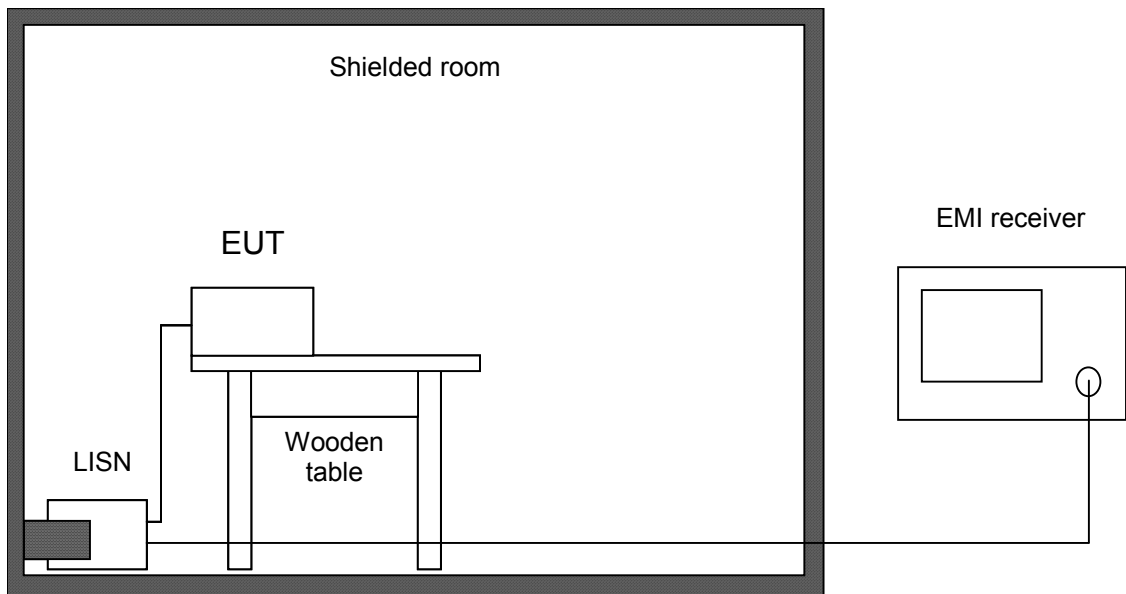




Test instruments used:

Type	Designation	Inv.-no.	Serial No. or ID	Manufacturer
<input checked="" type="checkbox"/> Test receiver	ESHS 10	1028	860043/016	Rohde & Schwarz
<input checked="" type="checkbox"/> V-network	ESH 3-Z5	1059	894785/005	Rohde & Schwarz
<input type="checkbox"/> V-network	ESH 3-Z5	1218	830952/025	Rohde & Schwarz
<input type="checkbox"/> Artificial mains network	ESH 2-Z5	1536	842966/004	Rohde & Schwarz
<input type="checkbox"/> Shielded room	No. 1	1451	---	Albatross
<input checked="" type="checkbox"/> Shielded room	No. 4	1454	3FD 100 544	Euroshield

## 6.4 Radiated Emission Measurement 9 kHz to 30 MHz

Measurement Procedure:	
Rules and specifications:	CFR 47 Part 15, sections 15.215(b) and 15.231(b)(3) IC RSS-210 Issue 8, section A1.1.2(b)
Guide:	ANSI C63.4
<p>Radiated emission in the frequency range 9 kHz to 30 MHz is measured using an active loop antenna. First the whole spectrum of emission caused by the equipment is recorded at a distance of 3 meters in a fully or semi anechoic room with the detector of the spectrum analyzer or EMI receiver set to peak. This configuration is also used for recording the spectrum of intentional radiators.</p> <p>Hand-held or body-worn devices are rotated through three orthogonal axes to determine which attitude and configuration produces the highest emission relative to the limit and therefore shall be used for final testing. EUT is rotated all around to find the maximum levels of emissions. Equipment and cables are placed and moved within the range of position likely to find their maximum emissions.</p> <p>If worst case emission of the EUT cannot be recorded with EUT in standard position and loop antenna in vertical polarization the EUT (or the radiating part of the EUT) is rotated by 90 degrees instead of changing the loop antenna to horizontal polarization. This procedure is selected to minimize the influence of the environment (e.g. effects caused by the floor especially with longer distances).</p> <p>Final measurement is performed at a test distance D of 30 meters using an open field test site. In case the regulation requires testing at other distances, the result is extrapolated by either making measurements at an additional distance D of 10 meters to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). In cases of very low emissions measurements are performed at shorter distances and results are extrapolated to the required distance. The provisions of CFR 47 Part 15 sections 15.31(d) and (f)(2) apply. According to CFR 47 Part 15 section 15.209(d) final measurement is performed with detector function set to quasi-peak except for the frequency bands 9 to 90 kHz and 110 to 490 kHz where, for non-pulsed operation, average detector is employed.</p> <p>If the radiated emission limits are expressed in terms of the average value of the emission there also is a peak limit corresponding to 20 dB above the maximum permitted average limit. Additionally, if pulsed operation is employed, the average field strength is determined by averaging over one complete pulse train, including blanking intervals, as specified in CFR 47 Part 15 section 15.35(c). If the pulse train exceeds 0.1 second that 0.1 second interval during which the value of the emission is at its maximum is selected for calculation. The pulse train correction is added to the peak value of the emission to get the average value.</p>	

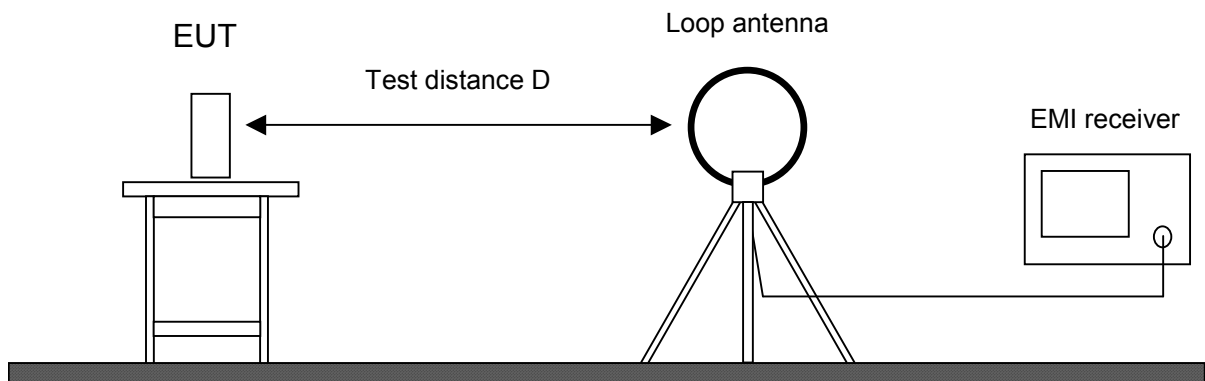



Test instruments used:


Type	Designation	Inv.-no.	Serial No. or ID	Manufacturer
<input type="checkbox"/> Spectrum analyzer	FSP30	1666	100036	Rohde & Schwarz
<input type="checkbox"/> EMI test receiver	ESMI	1569	839379/013 839587/006	Rohde & Schwarz
<input checked="" type="checkbox"/> EMI test receiver	ESU8	2044	100232	Rohde & Schwarz
<input type="checkbox"/> Test receiver	ESHS 10	1028	860043/016	Rohde & Schwarz
<input type="checkbox"/> Preamplifier	Cabin no. 2 CPA9231A	1716	3557	Schaffner
<input checked="" type="checkbox"/> Loop antenna	HFH2-Z2	1016	882964/1	Rohde & Schwarz
<input type="checkbox"/> Fully anechoic room	No. 2	1452	---	Albatross
<input type="checkbox"/> Semi anechoic room	No. 3	1453	---	Siemens
<input checked="" type="checkbox"/> Semi anechoic room	No. 8	2057	---	Albatross



## 6.5 Radiated Emission in Fully or Semi Anechoic Room

Measurement Procedure:	
Rules and specifications:	CFR 47 Part 15, sections 15.109, 15.215(b) and 15.249 IC RSS-GEN Issue 3, section 6.1 IC RSS-210 Issue 8, section A2.9
Guide:	ANSI C63.4
<p>Radiated emission in fully or semi anechoic room is measured in the frequency range from 30 MHz to the maximum frequency as specified in CFR 47 Part 15 section 15.33.</p> <p>Measurements are made in both the horizontal and vertical planes of polarization using a spectrum analyzer with the detector function set to peak and resolution as well as video bandwidth set to 100 kHz (below 1 GHz) or 1 MHz (above 1 GHz).</p> <p>Testing up to 1 GHz is performed with a linear polarized logarithmic periodic antenna combined with a 4:1 broadband dipole ("Trilog broadband antenna"). For testing above 1 GHz horn antennas are used.</p> <p>All tests below 8.2 GHz are performed at a test distance D of 3 meters. For higher frequencies the test distance may be reduced (e.g. to 1 meter) due to the sensitivity of the measuring instrument(s) and the test results are calculated according to CFR 47 Part 15 section 15.31(f)(1) using an extrapolation factor of 20 dB/decade. If required, preamplifiers are used for the whole frequency range. Special care is taken to avoid overload, using appropriate attenuators and filters, if necessary.</p> <p>If the radiated emission limits are expressed in terms of the average value of the emission there also is a peak limit corresponding to 20 dB above the maximum permitted average limit. Additionally, if pulsed operation is employed, the average field strength is determined by averaging over one complete pulse train, including blanking intervals, as specified in CFR 47 Part 15 section 15.35(c). If the pulse train exceeds 0.1 second that 0.1 second interval during which the value of the emission is at its maximum is selected for calculation. The pulse train correction is added to the peak value of the emission to get the average value.</p> <p>Hand-held or body-worn devices are rotated through three orthogonal axes to determine which attitude and configuration produces the highest emission relative to the limit and therefore shall be used for final testing.</p> <p>During testing the EUT is rotated all around to find the maximum levels of emissions. Equipment and cables are placed and moved within the range of position likely to find their maximum emissions.</p> <p>For final testing below 1 GHz a semi anechoic room complying with the NSA requirements of ANSI C63.4 for alternative test sites is used (see 6.6). If prescans are recorded in fully anechoic room they are indicated appropriately.</p>	



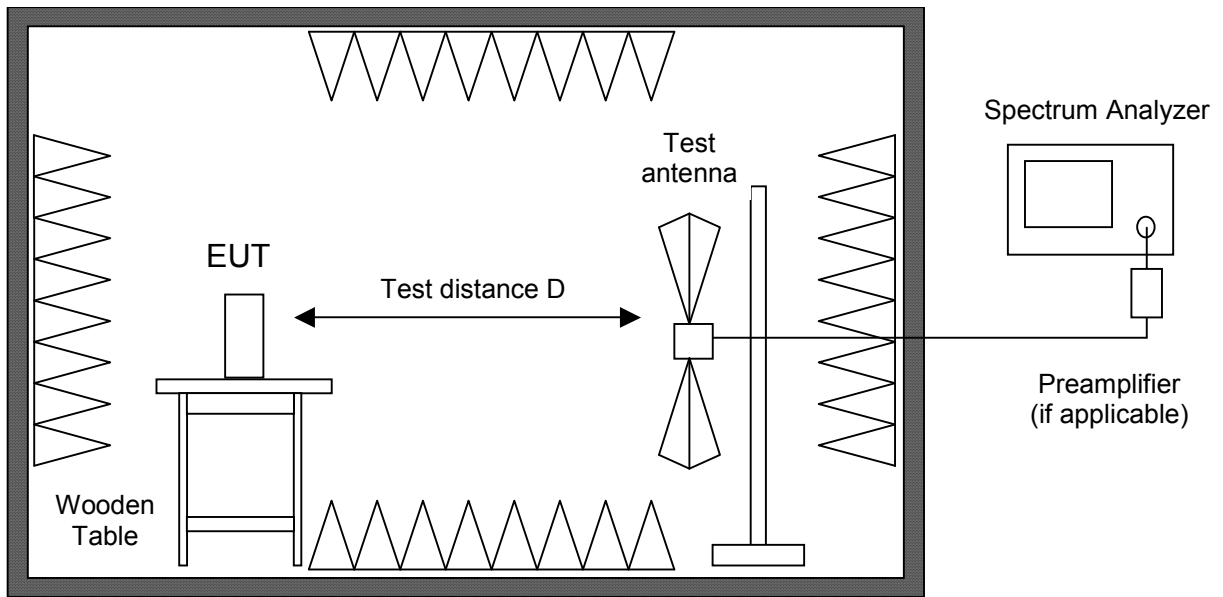


Fully or semi anechoic room

Test instruments used:

Type		Designation	Inv.-no.	Serial No. or ID	Manufacturer
<input checked="" type="checkbox"/>	Spectrum analyzer	FSP30	1666	100036	Rohde & Schwarz
<input checked="" type="checkbox"/>	EMI test receiver	Cabin no. 3 ESPI7	2010	101018	Rohde & Schwarz
<input type="checkbox"/>	EMI test receiver	ESU8	2044	100232	Rohde & Schwarz
<input type="checkbox"/>	EMI test receiver	ESMI	1569	839379/013 839587/006	Rohde & Schwarz
<input type="checkbox"/>	Preamplifier	Cabin no. 2 CPA9231A	1716	3557	Schaffner
<input type="checkbox"/>	Preamplifier	R14601	1142	13120026	Advantest
<input checked="" type="checkbox"/>	Preamplifier (1 - 8 GHz)	AFS3-00100800-32-LN	1684	847743	Miteq
<input type="checkbox"/>	Preamplifier (0.5 - 8 GHz)	AMF-4D-005080-25-13P	1685	860149	Miteq
<input checked="" type="checkbox"/>	Preamplifier (8 - 18 GHz)	ACO/180-3530	1484	32641	CTT
<input type="checkbox"/>	External Mixer	WM782A	1576	845881/005	Tektronix
<input type="checkbox"/>	Harmonic Mixer Accessories	FS-Z30	1577	624413/003	Rohde & Schwarz
<input type="checkbox"/>	Trilog antenna	Cabin no. 2 VULB 9163	1802	9163-214	Schwarzbeck
<input type="checkbox"/>	Trilog antenna	Cabin no. 3 VULB 9163	1722	9163-188	Schwarzbeck
<input type="checkbox"/>	Trilog antenna	Cabin no. 8 VULB 9163	2058	9163-408	Schwarzbeck
<input checked="" type="checkbox"/>	Horn antenna	3115	1516	9508-4553	EMCO
<input type="checkbox"/>	Horn antenna	3160-03	1010	9112-1003	EMCO
<input checked="" type="checkbox"/>	Horn antenna	3160-04	1011	9112-1001	EMCO
<input checked="" type="checkbox"/>	Horn antenna	3160-05	1012	9112-1001	EMCO
<input checked="" type="checkbox"/>	Horn antenna	3160-06	1013	9112-1001	EMCO
<input type="checkbox"/>	Horn antenna	3160-07	1014	9112-1008	EMCO
<input type="checkbox"/>	Horn antenna	3160-08	1015	9112-1002	EMCO
<input type="checkbox"/>	Horn antenna	3160-09	1265	9403-1025	EMCO
<input type="checkbox"/>	Horn antenna	3160-10	1575	399185	EMCO
<input checked="" type="checkbox"/>	Fully anechoic room	No. 2	1452	---	Albatross
<input type="checkbox"/>	Semi anechoic room	No. 3	1453	---	Siemens
<input type="checkbox"/>	Semi anechoic room	No. 8	2057	---	Albatross

## 6.6 Radiated Emission at Alternative Test Site

Measurement Procedure:	
Rules and specifications:	CFR 47 Part 15, sections 15.109, 15.215(b) and 15.249 IC RSS-GEN Issue 3, section 6.1 IC RSS-210 Issue 8, section A2.9
Guide:	ANSI C63.4
<p>Radiated emission in the frequency range 30 MHz to 1 GHz is measured within a semi-anechoic room with groundplane complying with the NSA requirements of ANSI C63.4 for alternative test sites. A linear polarized logarithmic periodic antenna combined with a 4:1 broadband dipole ("Trilog broadband antenna") is used. The measurement bandwidth of the test receiver is set to 120 kHz with quasi-peak detector selected.</p> <p>If the radiated emission limits are expressed in terms of the average value of the emission there also is a peak limit corresponding to 20 dB above the maximum permitted average limit. Additionally, if pulsed operation is employed, the average field strength is determined by averaging over one complete pulse train, including blanking intervals, as specified in CFR 47 Part 15 section 15.35(c). If the pulse train exceeds 0.1 second that 0.1 second interval during which the value of the emission is at its maximum is selected for calculation. The pulse train correction is added to the peak value of the emission to get the average value.</p> <p>Hand-held or body-worn devices are tested in the position producing the highest emission relative to the limit as verified by prescans in fully anechoic room.</p> <p>If no prescan in a fully anechoic room is used first a peak scan is performed in four positions to get the whole spectrum of emission caused by EUT with the measuring antenna raised and lowered from 1 to 4 m to find table position, antenna height and antenna polarization for the maximum emission levels.</p> <p>Data reduction is applied to these results to select those levels having less margin than 10 dB to or exceeding the limit using subranges and limited number of maximums. Further maximization is following.</p> <p>With detector of the test receiver set to quasi-peak final measurements are performed immediately after frequency zoom (for drifting disturbances) and maximum adjustment.</p> <p>Equipment and cables are placed and moved within the range of position likely to find their maximum emissions.</p> <p>In cases where prescans in a fully anechoic room are taken (e. g. if EUT is operating for a short time only or battery is discharged quickly) final measurements with quasi-peak detector are performed manually at frequencies indicated by prescan with EUT rotating all around and receiving antenna raising and lowering within 1 meter to 4 meters to find the maximum levels of emission.</p> <p>Equipment and cables are placed and moved within the range of position likely to find their maximum emissions.</p> <p>For measuring emissions of intentional radiators and receivers a test distance D of 3 meters is selected. Testing of unintentional radiators is performed at a distance of 10 meters. If limits specified for 3 meters shall be used for measurements performed at 10 meters distance the limits are calculated according to CFR 47 Part 15 section 15.31(d) and (f)(1) using an inverse linear-distance extrapolation factor of 20 dB/decade.</p>	

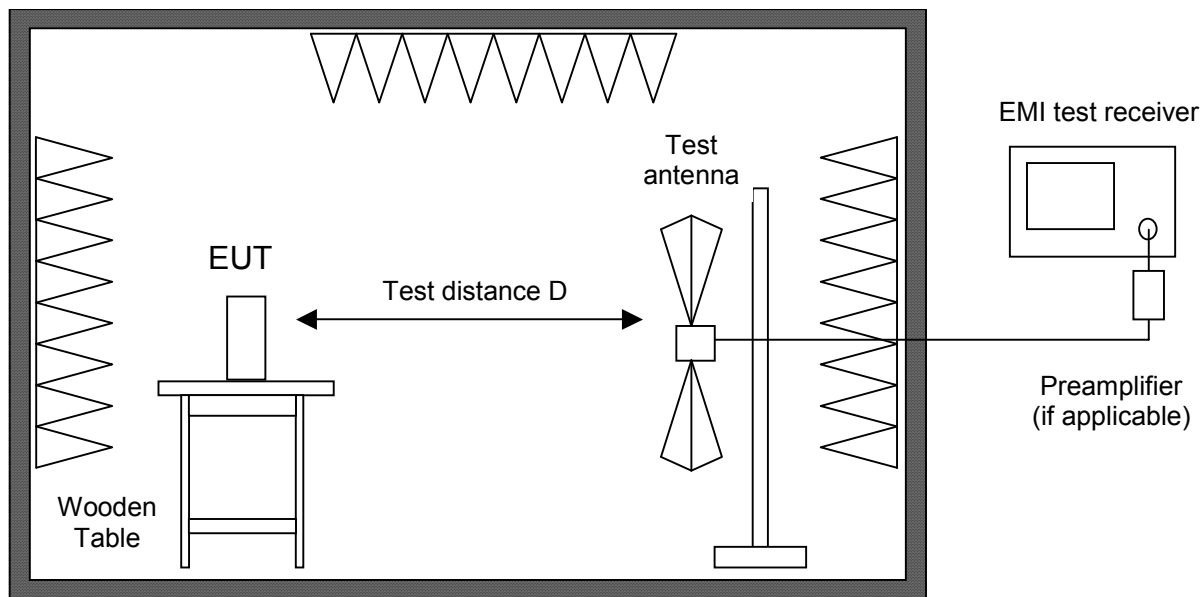

Alternate test site (semi anechoic room)

Test instruments used:

Type		Designation	Inv.-no.	Serial No. or ID	Manufacturer
<input checked="" type="checkbox"/>	EMI test receiver	ESU8	2044	100232	Rohde & Schwarz
<input checked="" type="checkbox"/>	Trilog antenna	Cabin no. 2 VULB 9163	1802	9163-214	Schwarzbeck
<input type="checkbox"/>	Trilog antenna	Cabin no. 8 VULB 9163	2058	9163-408	Schwarzbeck
<input checked="" type="checkbox"/>	Semi anechoic room	No. 8	2057	---	Albatross

## 6.7 Antenna Power Conduction Emission of Receivers

### Measurement Procedure:


Rules and specifications: CFR 47 Part 15, section 15.111(a)  
IC RSS-Gen Issue 3, sections 6.2

Guide: ANSI C63.4

The receiver antenna terminal is connected to the spectrum analyzer. If required, a resistive matching network equal to the impedance specified or employed for the antenna is used as well as dc block and appropriate attenuators (50 Ohms). The power at the antenna terminal is measured in the frequency range as specified in CFR 47 Part 15 section 15.33.

The peak detector of the spectrum analyzer is selected and resolution as well as video bandwidth are set to 100 kHz (below 1 GHz) or 1 MHz (above 1 GHz).

If required, preamplifiers are used. Special care is taken to avoid overload (using appropriate attenuators and filters if necessary).

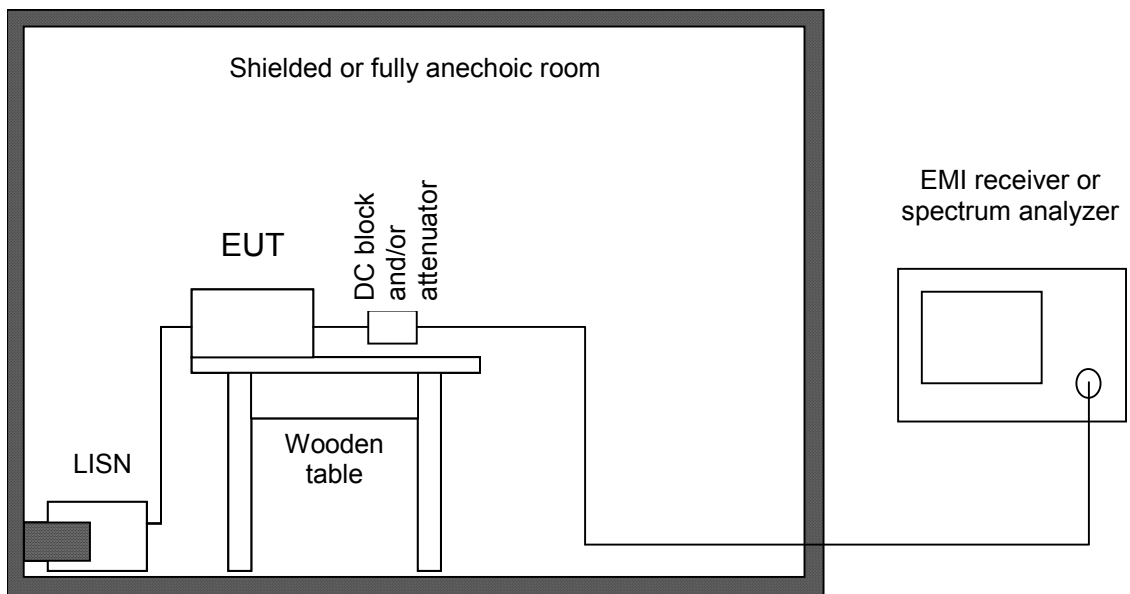



Test instruments used:


Type	Designation	Inv.-no.	Serial No. or ID	Manufacturer
<input checked="" type="checkbox"/> Spectrum analyzer	FSP30	1666	100036	Rohde & Schwarz
<input type="checkbox"/> EMI test receiver	ESMI	1569	839379/013 839587/006	Rohde & Schwarz
<input checked="" type="checkbox"/> EMI test receiver	ESU8	2044	100232	Rohde & Schwarz
<input type="checkbox"/> DC-block	7006	1636	A2798	Weinschel
<input type="checkbox"/> Attenuator	4776-10	1638	9412	Narda
<input type="checkbox"/> Attenuator	4776-20	1639	9503	Narda
<input checked="" type="checkbox"/> Preamplifier	Cabin no. 2 CPA9231A	1716	3557	Schaffner
<input checked="" type="checkbox"/> Preamplifier (1 - 8 GHz)	AFS3-00100800-32-LN	1684	847743	Miteq
<input type="checkbox"/> Preamplifier (0.5 - 8 GHz)	AMF-4D-005080-25-13P	1685	860149	Miteq
<input checked="" type="checkbox"/> Preamplifier (8 - 18 GHz)	ACO/180-3530	1484	32641	CTT
<input type="checkbox"/> Shielded room	No. 1	1451	---	Albatross
<input type="checkbox"/> Fully anechoic room	No. 2	1452	---	Albatross
<input type="checkbox"/> Semi anechoic room	No. 3	1453	---	Siemens
<input type="checkbox"/> Shielded room	No. 4	1454	3FD 100 544	Euroshield
<input type="checkbox"/> Semi anechoic room	No. 8	2057	---	Albatross




---

## **7 Photographs Taken During Testing**

## Test setup for conducted AC powerline emission measurement

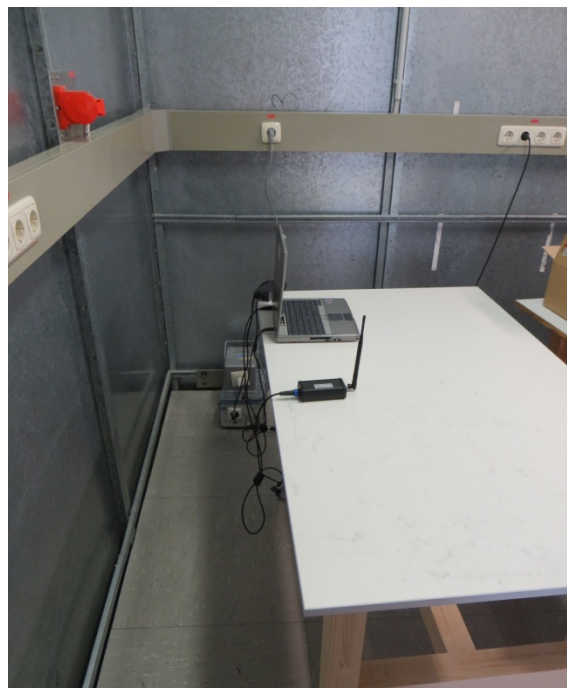

## Test setup for radiated emission measurement 9 kHz – 30 MHz


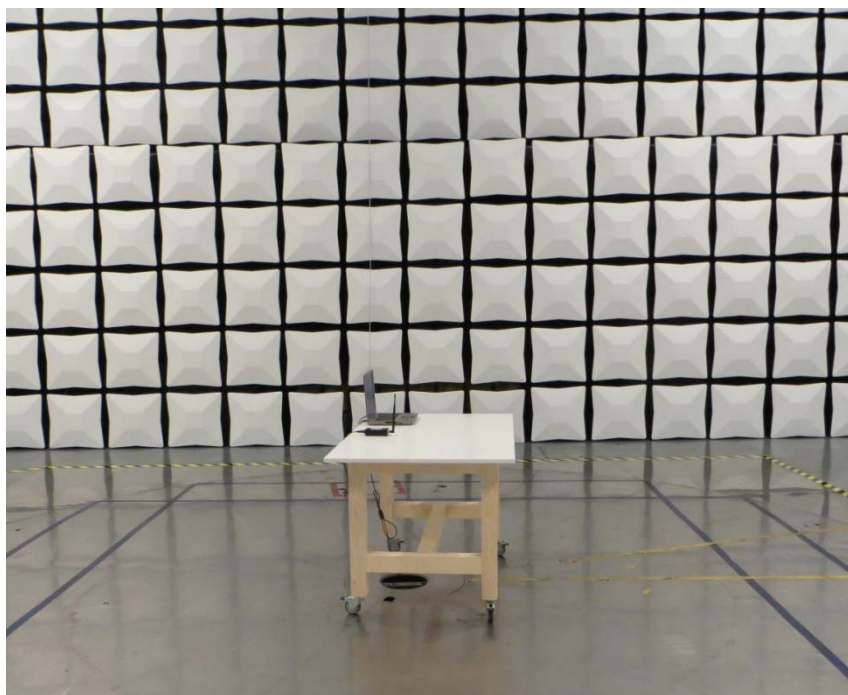




## Test setup for radiated emission measurement (fully anechoic room)



## Test setup for radiated emission measurement (alternate test site)

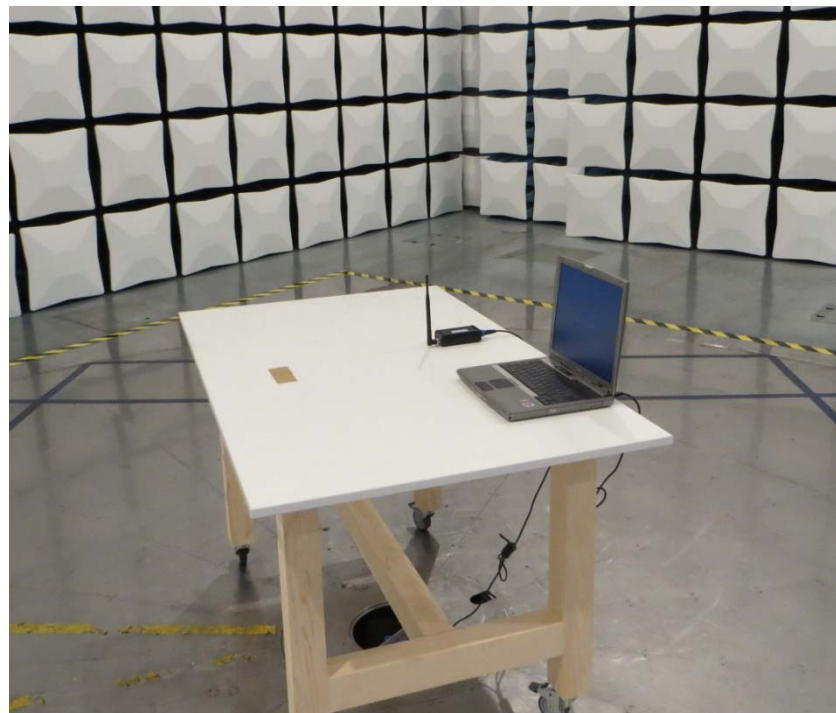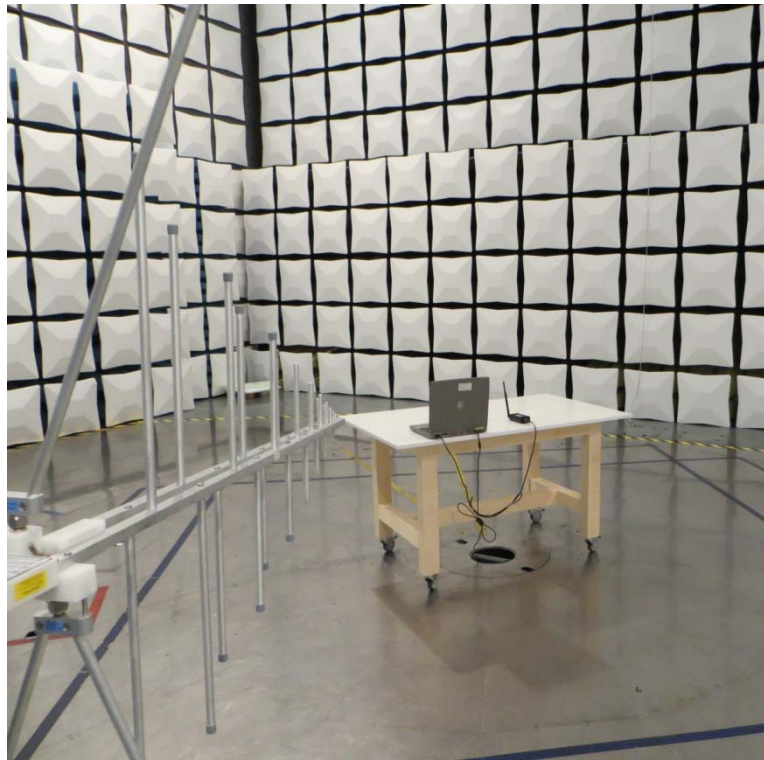

## Test setup for antenna power conduction emission of receivers measurement





## 8 Test Results for Transmitter

FCC CFR 47 Parts 2 and 15			
<i>Section(s)</i>	<i>Test</i>	<i>Page</i>	<i>Result</i>
2.1046(a)	Conducted output power	30	Recorded
2.202(a)	Occupied bandwidth	32	Recorded
15.215(c)	Bandwidth of the emission	36	Test passed
2.201, 2.202	Class of emission	38	Calculated
15.35(c)	Pulse train measurement for pulsed operation	---	Not applicable
15.205(a)	Restricted bands of operation	39	Test passed
15.207	Conducted AC powerline emission 150 kHz to 30 MHz	40	Test passed
15.205(b) 15.249	Radiated emission 9 kHz to 30 MHz	43	Test passed
15.205(b) 15.215(b) 15.249	Radiated emission 30 MHz to 10 GHz	45	Test passed



<b>IC RSS-Gen Issue 3</b>			
<i>Section(s)</i>	<i>Test</i>	<i>Page</i>	<i>Result</i>
4.8	Transmitter output power (conducted)	30	Recorded
4.6.1	Occupied Bandwidth	32	Recorded
8	Designation of emissions	38	Calculated
4.5	Pulsed operation	---	Not applicable
7.2.4	Conducted AC powerline emission 150 kHz to 30 MHz	40	Test passed
2.2(a)	Restricted bands and unwanted emission frequencies	39	Test passed
7.2.2(b)(c), 7.2.5	Unwanted emissions 9 kHz to 30 MHz	43	Test passed
7.2.2(b)(c), 7.2.5	Unwanted emissions 30 MHz to 10 GHz	45	Test passed
5.5	Exposure of Humans to RF Fields	49	Exempted from SAR and RF evaluation

<b>IC RSS-210 Issue 8</b>			
<i>Section(s)</i>	<i>Test</i>	<i>Page</i>	<i>Result</i>
A2.9	Unwanted emissions 9 kHz to 30 MHz	43	Test passed
A2.9	Unwanted emissions 30 MHz to 10 GHz	45	Test passed

## 8.1 Conducted Output Power


Rules and specifications:	CFR 47 Part 2, section 2.1046(a) IC RSS-Gen Issue 3, section 4.8
Guide:	CFR 47 Part 2, section 2.1046 / IC RSS-Gen Issue 3
Description:	Conducted output power shall be measured at the RF output terminals (e.g. antenna connector if antenna is detachable) when the transmitter is adjusted in accordance with the tune-up procedure, if applicable. The electrical characteristics of the radio frequency load attached to the output terminals when this test is made shall be stated.
Measurement procedure:	Conducted Output Power (6.1)

Comment:	--
Date of test:	2015-05-14
Test site:	Unshielded room

Test Result:	Test passed
--------------	-------------

Antenna gain:		2,3 dBi					
Mode	Frequency (MHz)	Power Type	Reading (dBm)	Correction (dB)	Output Power (dBm)	Limit (dBm)	Margin (dB)
TX	915,9	Peak	-38,8	0,0	-38,8		

- Note 1:* If applicable, PEP (peak envelope power) and RMS values are measured using a power meter with appropriate sensor.
- Note 2:* If applicable, peak or average values are measured using a spectrum analyzer with resolution and video bandwidth set to: RBW = 10MHz; VBW = 10MHz
- Note 3:* If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power limit is reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

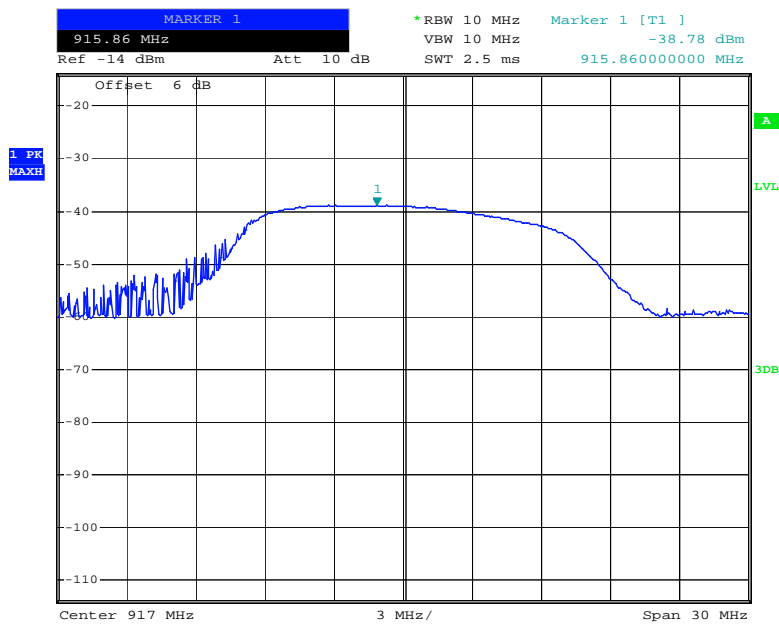


## 8.2 Occupied Bandwidth

Rules and specifications:	CFR 47 Part 2, section 2.202(a) ANSI C63.4, annex H.6	
Guide:	ANSI C63.4	
Description:	<p>The occupied bandwidth according to CFR 47 Part 2, section 2.202(a), is measured as the 99% emission bandwidth, i.e. below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5% of the total mean power radiated by a given emission.</p> <p>The occupied bandwidth according to ANSI C63.4, annex H.6; is measured as the frequency range defined by the points that are 26 dB down relative to the maximum level of the modulated carrier.</p> <p>The resolution bandwidth of the spectrum analyzer shall be set to a value greater than 5.0% of the allowed bandwidth. If no bandwidth specifications are given, the following guidelines are used:</p>	
	Fundamental frequency	Minimum resolution bandwidth
	9 kHz to 30 MHz	1 kHz
	30 MHz to 1000 MHz	10 kHz
	1000 MHz to 40 GHz	100 kHz
	The video bandwidth shall be at least three times greater than the resolution bandwidth.	
Measurement procedure:	Bandwidth Measurements (6.2)	

Comment:	
Date of test:	2014-05-14
Test site:	Fully anechoic room, cabin no. 2



### Occupied Bandwidth (99 %):

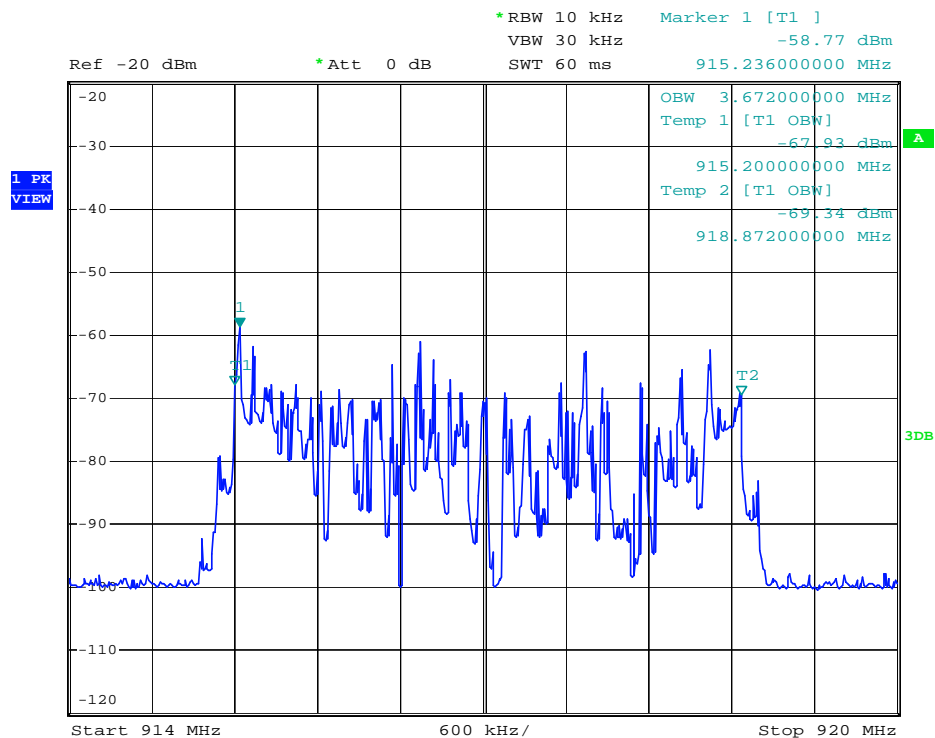

Occupied Bandwidth (99 %):	<b>3672 kHz</b>
----------------------------	-----------------




## Occupied Bandwidth (continued)

Rules and specifications:	IC RSS-Gen Issue 3, section 4.6.1
Guide:	IC RSS-Gen Issue 3, section 4.6.1
Description:	<p>If not specified in the applicable RSS the occupied bandwidth is measured as the 99% emission bandwidth.</p> <p>The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts. The resolution bandwidth shall be set to as close to 1% of the selected span as is possible without being below 1%. The video bandwidth shall be set to 3 times the resolution bandwidth.</p> <p>The trace data points are recovered and are directly summed in linear terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached and that frequency recorded. The process is repeated for the highest frequency data points. This frequency is also recorded. The span between the two recorded frequencies is the occupied bandwidth.</p>
Measurement procedure:	Bandwidth Measurements (6.2)

Comment:	
Date of test:	2014-05-14
Test site:	Fully anechoic room, cabin no. 2

### Occupied Bandwidth (99 %):


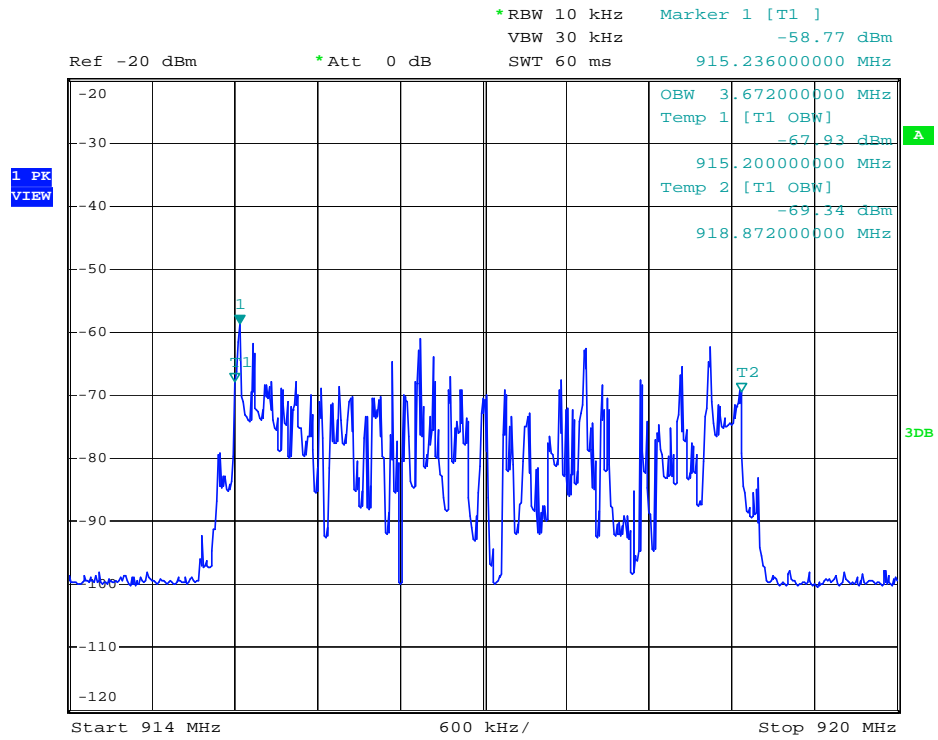


Occupied Bandwidth (99 %): **3672 kHz**

### 8.3 Bandwidth of the Emission

Rules and specifications:	CFR 47 Part 15, section 15.215(c)	
Guide:	ANSI C63.4	
Description:	<p>The 20 dB bandwidth of the emission is measured as the frequency range defined by the points that are 20 dB down relative to the maximum level of the modulated carrier.</p> <p>For intentional radiators operating under the alternative provisions to the general emission limits the requirement to contain the 20 dB bandwidth of the emission within the specified frequency band includes the effects from frequency sweeping, frequency hopping and other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage. If a frequency stability is not specified in the regulations, it is recommended that the fundamental emission be kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation.</p> <p>The resolution bandwidth of the spectrum analyzer shall be set to a value greater than 5.0% of the allowed bandwidth. If no bandwidth specifications are given, the following guidelines are used:</p>	
	Fundamental frequency	Minimum resolution bandwidth
	9 kHz to 30 MHz	1 kHz
	30 MHz to 1000 MHz	10 kHz
	1000 MHz to 40 GHz	100 kHz
The video bandwidth shall be at least three times greater than the resolution bandwidth.		
Measurement procedure:	Bandwidth Measurements (6.2)	

Comment:	
Date of test:	2014-05-14
Test site:	Fully anechoic room, cabin no. 2

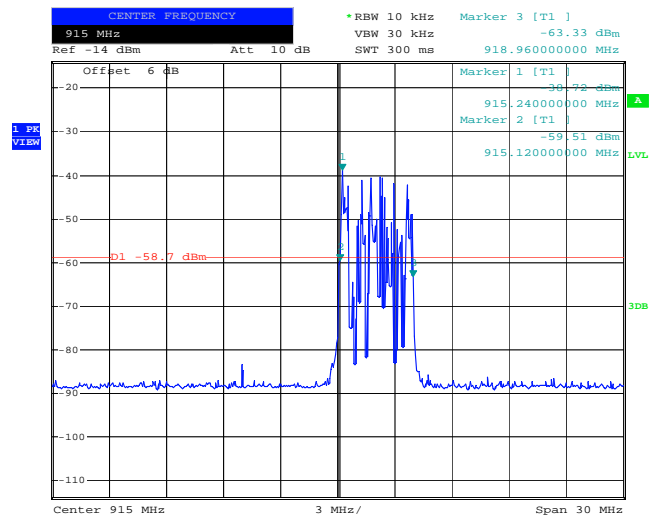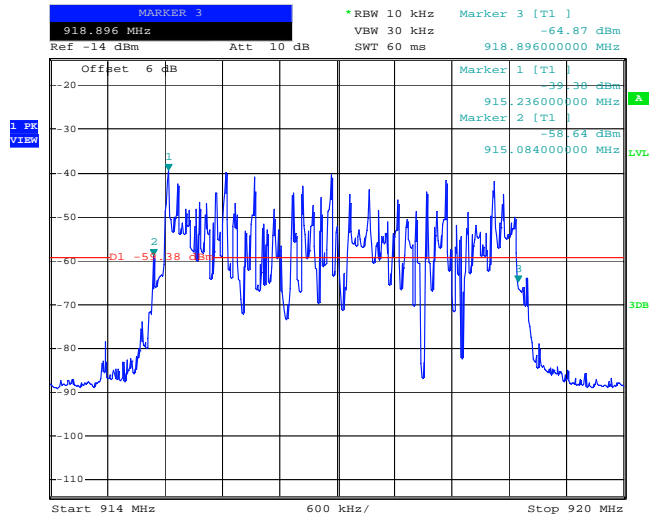

Permitted frequency band:	<b>902 - 928 MHz</b>	
20 dB bandwidth:	<b>3812 kHz</b>	
Carrier frequency stability:	<input type="checkbox"/> specified	<input checked="" type="checkbox"/> not specified
Maximum frequency tolerances:	+ ..... kHz - ..... kHz	
Bandwidth of the emission:	..... kHz	<b>within permitted frequency band<sup>5</sup>:</b> <input checked="" type="checkbox"/> yes <input type="checkbox"/> no

Test Result:	Test passed
--------------	-------------

<sup>5</sup> If a frequency stability is not specified, it is recommended that the fundamental emission is kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation.



## 8.4 Designation of Emissions

Rules and specifications:	CFR 47 Part 2, sections 2.201 and 2.202 IC RSS-Gen Issue 3, sections 8
Guide:	ANSI C63.4 / TRC-43

Type of modulation:	Frequency Modulation
---------------------	----------------------


$B_n$ = Necessary Bandwidth	$B_n = 2DK + B$
M = Modulation frequency	M = 90 kHz
D = Peak deviation	D = 125 kHz
K = Overall numerical factor	K = 1
Calculation:	$B_n = 2 \cdot (125 \text{ kHz}) + 2 \cdot (90 \text{ kHz}) \cdot 1 = 430 \text{ kHz}$

Designation of Emissions:	<b>430KF1D</b>
---------------------------	----------------

## 8.5 Restricted Bands of Operation

Rules and specifications:	CFR 47 Part 15, section 15.205(a) IC RSS-210 Issue 8, section 7.2.2(a)
Guide:	ANSI C63.4
Limit:	Only spurious emissions are permitted in any of the frequency bands listed in CFR 47 Part 15, section 15.205(a) or IC RSS-210 Issue 7, section 2.2(a).
Measurement procedure:	Radiated Emission in Fully or Semi Anechoic Room (6.5)

Comment:	
Date of test:	2014-05-13
Test site:	Fully anechoic room, cabin no. 2
Test distance:	3 meters

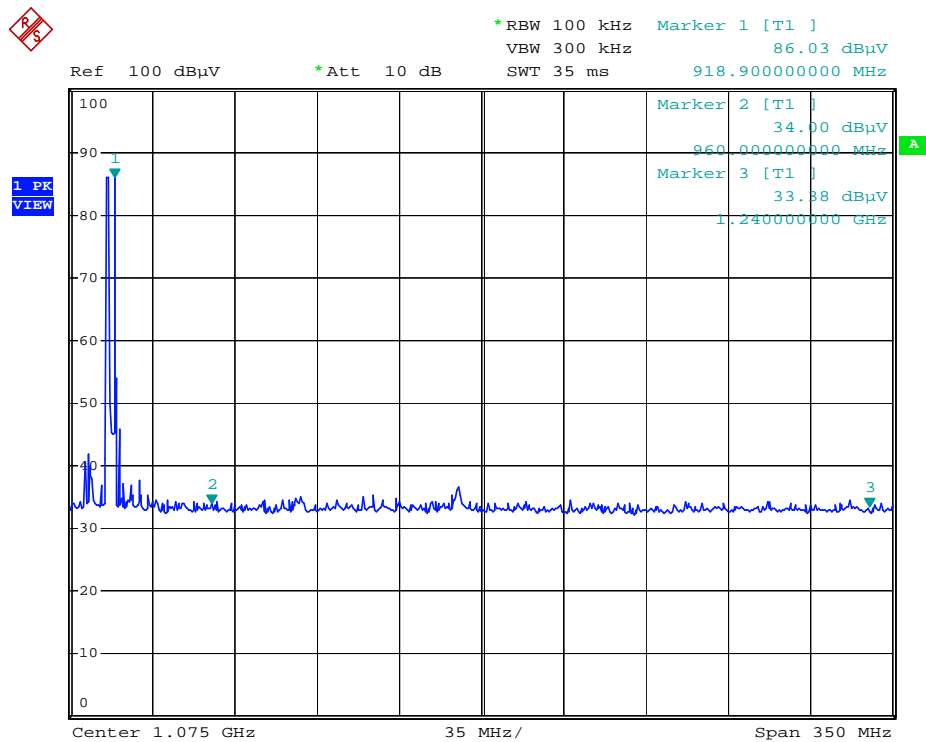

Test Result:	Test passed
--------------	-------------



## 8.6 Conducted Powerline Emission Measurement 150 kHz to 30 MHz

Rules and specifications:	CFR 47 Part 15, section 15.207 IC RSS-GEN Issue 3, section 7.2.4		
Guide:	ANSI C63.4 / CISPR 22		
Limit:	Frequency of Emission (MHz)	Conducted Limit (dBµV)	
		Quasi-peak	Average
	0.15 - 0.5	66 to 56	56 to 46
	0.5 - 5	56	46
	5 - 30	60	50
Measurement procedure:	Conducted AC Powerline Emission (6.3)		

Comment:	With dummy load connected to the antenna output terminals
Date of test:	2014-05-14
Test site:	Shielded room, cabin no. 1


Test Result:	Test passed
--------------	-------------




Tested on: L1 (operating mode 1)

Frequency (MHz)	Detector	Reading Value (dBµV)	Correction Factor (dB)	Final Value (dBµV)	Limit (dBµV)	Margin (dB)
0,155	Quasi-Peak	52,7	0,0	52,7	65,7	13,0
0,220	Quasi-Peak	46,4	0,0	46,4	62,8	16,4
0,235	Quasi-Peak	47,2	0,0	47,2	62,3	15,1
0,265	Average	40,9	0,0	40,9	51,3	10,4
0,300	Average	42,7	0,0	42,7	50,2	7,5
0,305	Quasi-Peak	44,5	0,0	44,5	60,1	15,6
0,425	Quasi-Peak	44,4	0,0	44,4	57,3	12,9
0,440	Quasi-Peak	45,6	0,0	45,6	57,1	11,5
0,595	Quasi-Peak	45,1	0,0	45,1	56,0	10,9
0,670	Quasi-Peak	42,4	0,0	42,4	56,0	13,6

L1 (QP)

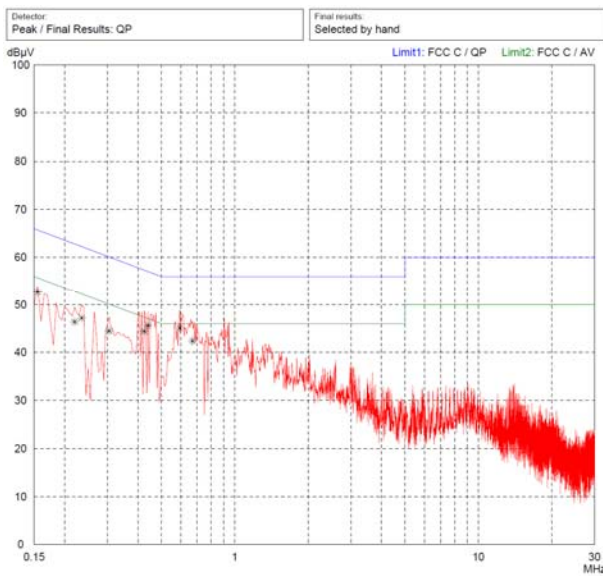


L1 (AV)

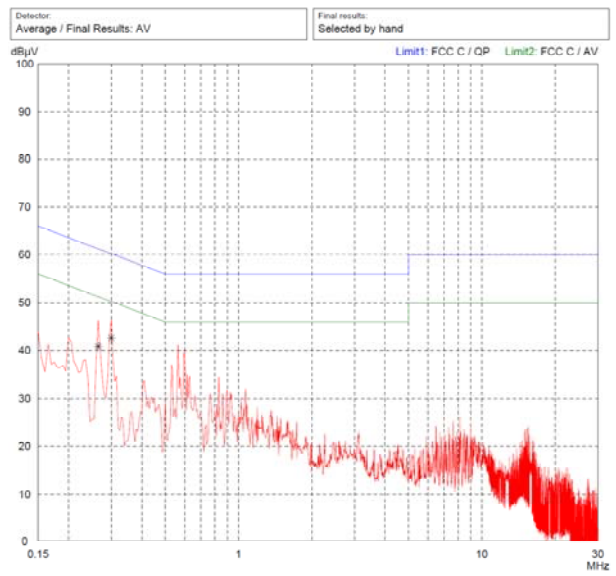


Tested on: N (operating mode 1)

Frequency (MHz)	Detector	Reading Value (dBµV)	Correction Factor (dB)	Final Value (dBµV)	Limit (dBµV)	Margin (dB)
0,150	Quasi-Peak	52,7	0,0	52,7	66,0	13,3
0,220	Quasi-Peak	50,1	0,0	50,1	62,8	12,7
0,230	Quasi-Peak	50,7	0,0	50,7	62,4	11,7
0,260	Average	35,3	0,0	35,3	51,4	16,1
0,300	Quasi-Peak	35,6	0,0	35,6	60,2	24,6
0,300	Average	48,4	0,0	48,4	50,2	1,8
0,400	Quasi-Peak	45,9	0,0	45,9	57,9	12,0
0,465	Quasi-Peak	47,3	0,0	47,3	56,6	9,3
0,595	Quasi-Peak	45,7	0,0	45,7	56,0	10,3
0,680	Quasi-Peak	40,8	0,0	40,8	56,0	15,2
0,915	Quasi-Peak	42,5	0,0	42,5	56,0	13,5

N (QP)

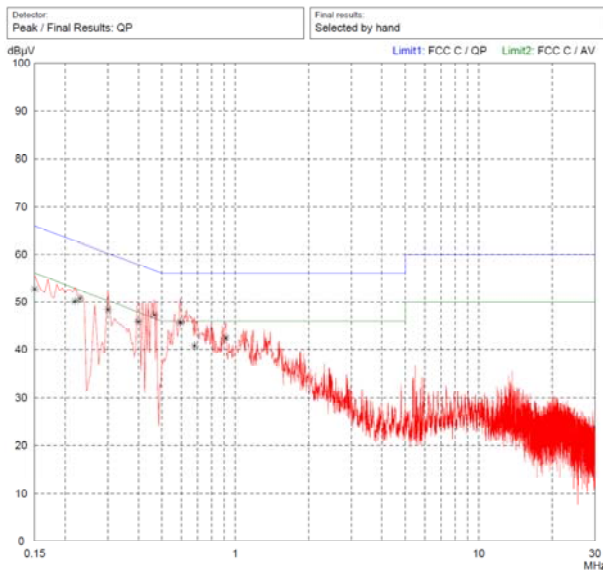

N (AV)

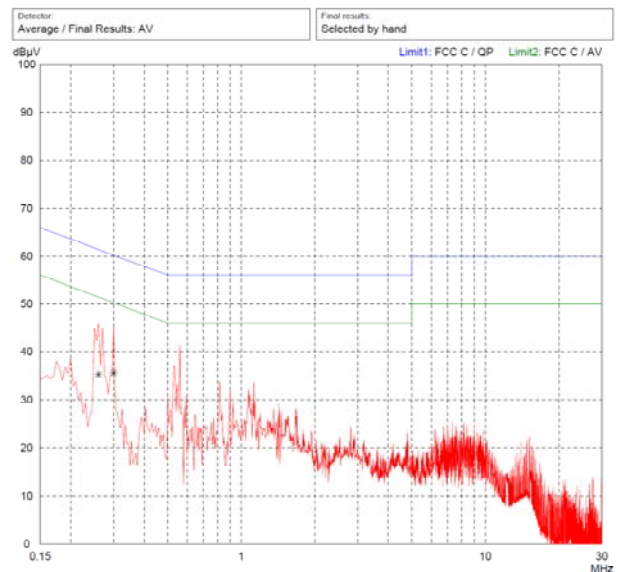

**Sample calculation of final values:**

$$\text{Final Value (dB}\mu\text{V)} = \text{Reading Value (dB}\mu\text{V)} + \text{Correction Factor (dB)}$$



## 8.7 Radiated Emission Measurement 9 kHz to 30 MHz


Rules and specifications:	CFR 47 Part 15, sections 15.215(b) and 15.231(b)(3) IC RSS-210 Issue 8, section A1.1.2(b)			
Guide:	ANSI C63.4			
Limit:	Frequency of Emission (MHz)	Field Strength ( $\mu\text{V}/\text{m}$ )	Field Strength ( $\text{dB}\mu\text{V}/\text{m}$ )	Measurement Distance d (meters)
	0.009 - 0.490	2400/F(kHz)	67.6 - 20 · log(F(kHz))	300
	0.490 - 1.705	24000/F(kHz)	87.6 - 20 · log(F(kHz))	30
	1.705 - 30.000	30	29.5	30
	Additionally, the level of any unwanted emissions shall not exceed the level of the fundamental emission.			
Measurement procedure:	Radiated Emission Measurement 9 kHz to 30 MHz (6.4)			

Comment:	
Date of test:	2014-05-14
Test site:	Open field test site

Test Result:	Test passed
--------------	-------------

Operating mode 1:

Frequency (MHz)	Detector	Distance		Reading Value ( $\text{dB}\mu\text{V}$ )	Correction Factor ( $\text{dB}/\text{m}$ )	Extrapolation Factor (dB)	Pulse Train Correction (dB)	Final Value ( $\text{dB}\mu\text{V}/\text{m}$ )	Limit ( $\text{dB}\mu\text{V}/\text{m}$ )	Margin (dB)
		d1 (m)	d (m)							
no result	Quasi-Peak									

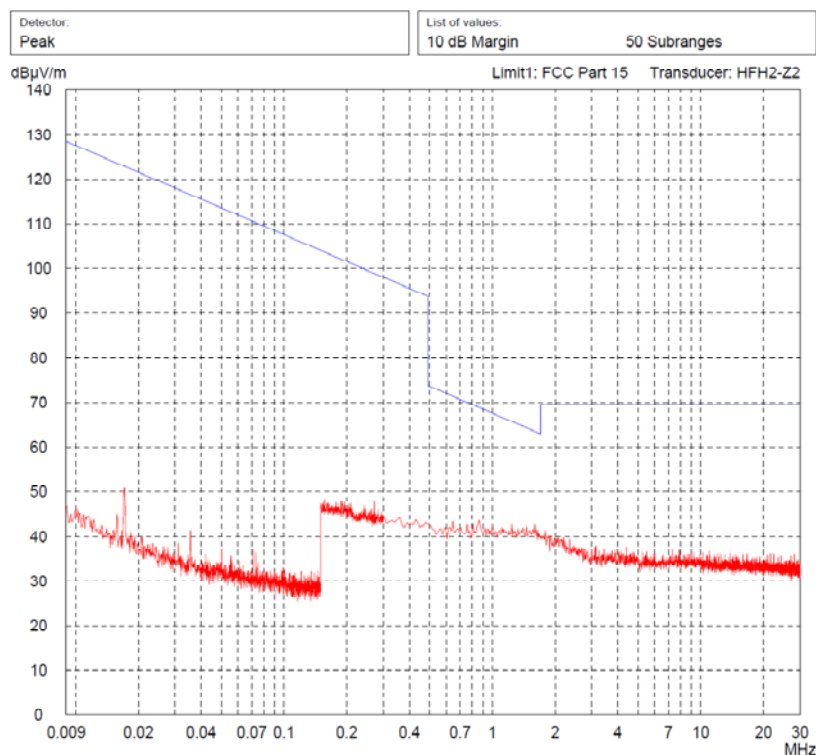

**Sample calculation of final values:**

$$\begin{aligned} \text{Extrapolation Factor (dB)} &= (\text{Log}(d) - \text{Log}(d_1)) \cdot \text{Extrapolation Factor (dB/decade)} \\ \text{Final Value (dB}\mu\text{V/m)} &= \text{Reading Value } d_1 \text{ (dB}\mu\text{V)} + \text{Correction Factor (dB/m)} \\ &\quad + \text{Extrapolation Factor (dB)} + \text{Pulse Train Correction (dB)} \end{aligned}$$

Note: Extrapolation factor (dB) and final value (dBµV/m) are relating to distance d.



## 8.8 Radiated Emission Measurement 30 MHz to 10 GHz

Rules and specifications:	CFR 47 Part 15, sections 15.215(b) and 15.249 IC RSS-210 Issue 8, section A2.9		
Guide:	ANSI C63.4		
Limit:	Frequency of Emission (MHz)	Field Strength ( $\mu\text{V}/\text{m}$ )	Field Strength ( $\text{dB}\mu\text{V}/\text{m}$ )
	30 - 88	100	40.0
	88 - 216	150	43.5
	216 - 960	200	46.0
	Above 960	500	54.0
	Additionally, the level of any unwanted emissions shall not exceed the level of the fundamental emission.		
Measurement procedures:	Radiated Emission in Fully or Semi Anechoic Room (6.5) Radiated Emission at Alternative Test Site (6.6)		

Comment:	
Date of test:	2014-05-13
Test site:	Frequencies $\leq$ 1 GHz: Semi-anechoic room, cabin no. 8 Frequencies $>$ 1 GHz: Fully anechoic room, cabin no. 2
Test distance:	3 meters







Test Result:	Test passed
--------------	-------------





Operating mode 1:

Frequency (MHz)	Antenna Polarization	Detector	Receiver Reading (dBµV)	Correction Factor (dB/m)	Pulse Train Correction (dB)	Final Value (dBµV/m)	Limit (dBµV/m)	Margin (dB)
88,588	horizontal	Quasi-Peak	18,5	12,4		30,9	43,5	12,6
166,188	vertical	Quasi-Peak	19,7	11,8		31,6	43,5	12,0
168,516	horizontal	Quasi-Peak	24,1	11,9		36,0	43,5	7,5
883,212	horizontal	Quasi-Peak	18,4	26,5		44,8	46,0	1,2
915,410	horizontal	Quasi-Peak	41,1	26,8		67,9		
1066,000	vertical	Peak	24,5	28,0		52,5	54,0	1,5
1324,000	vertical	Peak	16,8	29,0		45,8	54,0	8,2
1666,000	horizontal	Peak	18,5	30,6		49,1	54,0	4,9
1984,000	vertical	Peak	14,5	32,2		46,6	54,0	7,4
5185,000	horizontal	Peak	10,7	34,6		45,3	54,0	8,7
5261,000	vertical	Peak	9,5	34,7		44,2	54,0	9,8
7349,300	horizontal	Peak	9,6	39,1		48,7	54,0	5,3
8068,400	vertical	Peak	10,0	39,7		49,7	54,0	4,3

### Horizontal Polarisation

### Vertical Polarisation

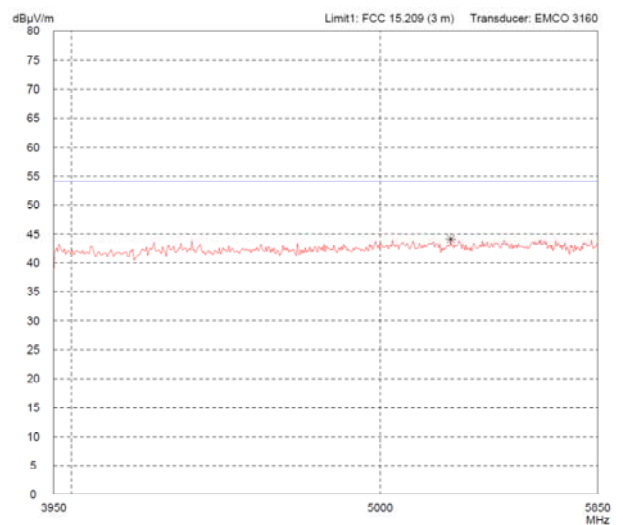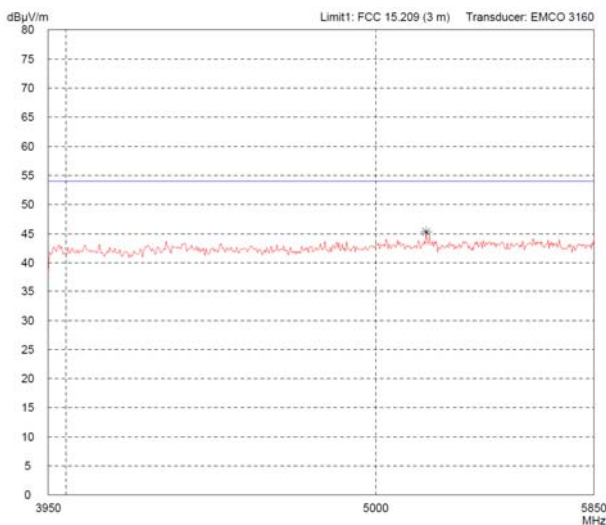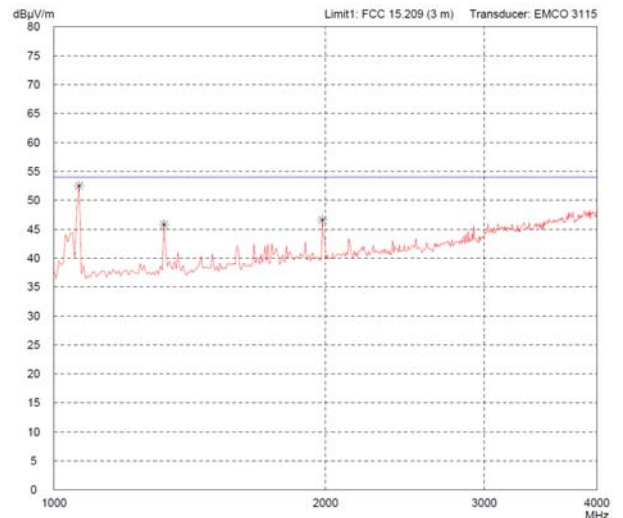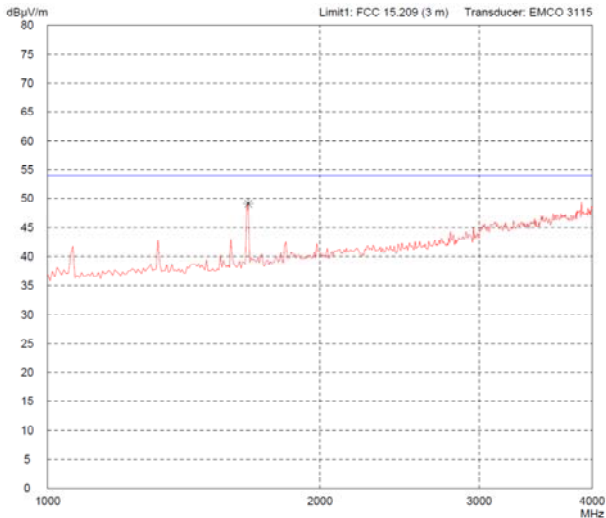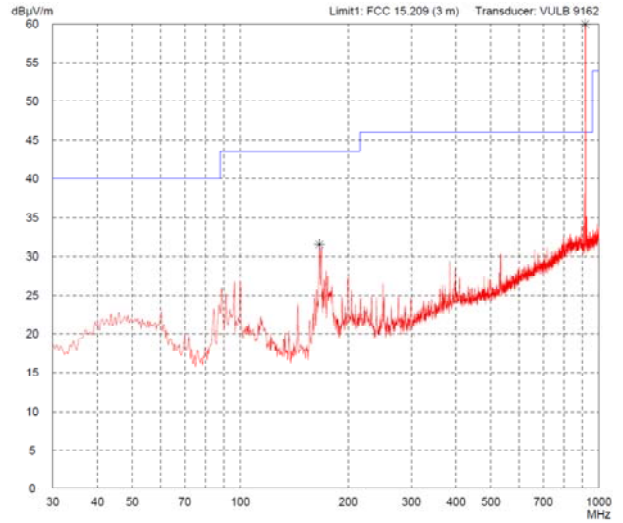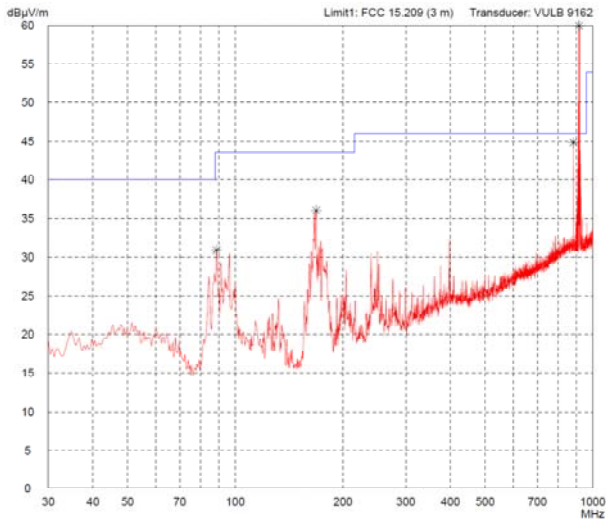

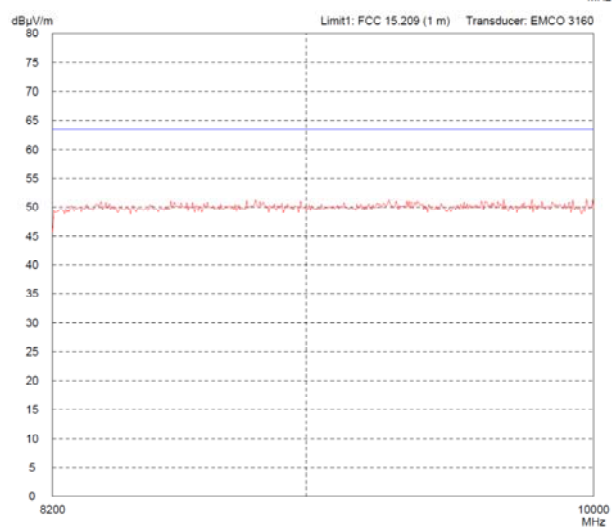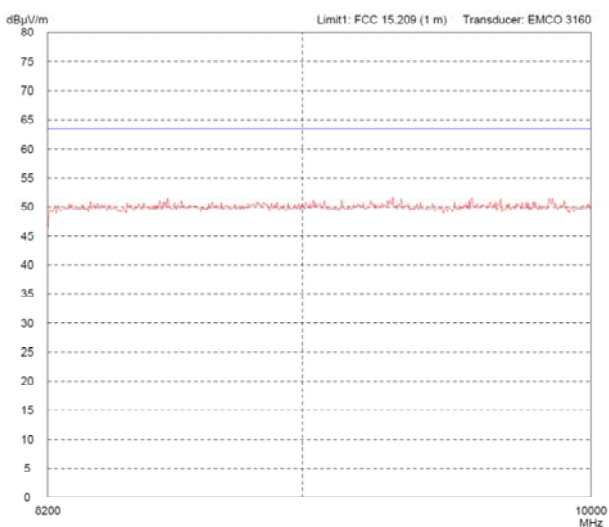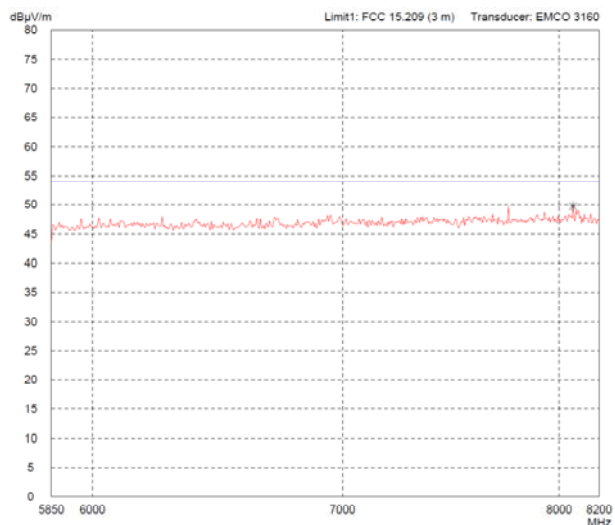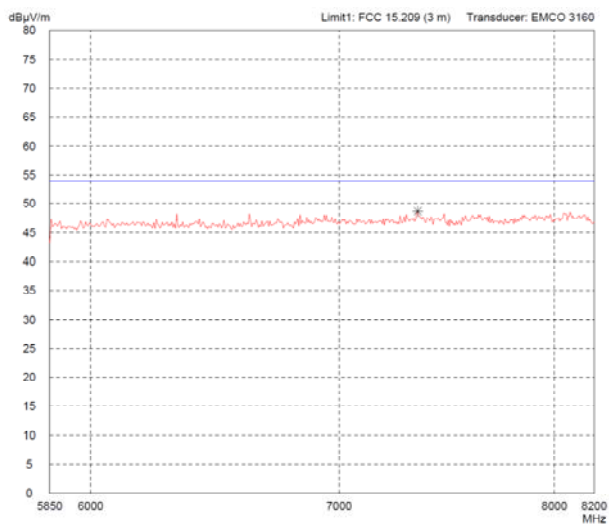



## 8.9 Exposure of Humans to RF Fields

Rules and specifications:	IC RSS-Gen Issue 3, section 5.6
Guide:	IC RSS-102 Issue 4, section 2.5

Exposure of Humans to RF Fields	Applicable	Declared by applicant	Measured	Exemption	
<b>The antenna is</b>					
<input checked="" type="checkbox"/> detachable					
<p>The conducted output power (CP in watts) is measured at the antenna connector:</p> <p style="text-align: center;"><math>CP = 132 \text{ nW}</math></p> <p>The effective isotropic radiated power (EIRP in watts) is calculated using</p> <p><input checked="" type="checkbox"/> the numerical antenna gain: <math>G = 2.3 \text{ dBi}</math></p> <p style="text-align: center;"><math>EIRP = G \cdot CP \Rightarrow EIRP = 225 \text{ nW}</math></p> <p><input checked="" type="checkbox"/> the field strength<sup>6</sup> in V/m: <math>FS = 2454.7 \text{ } \mu\text{V/m}</math></p> <p style="text-align: center;"><math>EIRP = \frac{(FS \cdot D)^2}{30} \Rightarrow EIRP = 1.81 \text{ } \mu\text{W}</math></p> <p>with:</p> <p>Distance between the antennas in m: <math>D = 3 \text{ m}</math></p>			<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
<input type="checkbox"/> not detachable					
<p>A field strength measurement is used to determine the effective isotropic radiated power (EIRP in watts) given by<sup>6</sup>:</p> <p style="text-align: center;"><math>EIRP = \frac{(FS \cdot D)^2}{30} \Rightarrow EIRP = \dots\dots\dots \text{ W}</math></p> <p>with:</p> <p>Field strength in V/m: <math>FS = \dots\dots\dots \text{ V/m}</math></p> <p>Distance between the two antennas in m: <math>D = \dots\dots\dots \text{ m}</math></p>			<input type="checkbox"/>	<input type="checkbox"/>	
<b>Selection of output power</b>					
<p>The output power TP is the higher of the conducted or effective isotropic radiated power (e.i.r.p.):</p> <p style="text-align: center;"><math>TP = 1.81 \text{ } \mu\text{W}</math></p>					

<sup>6</sup> The conversion formula is valid only for properly matched antennas. In other cases the transmitter output power may have to be measured by a terminated measurement when applying the exemption clauses. If an open area test site is used for field strength measurement, the effect due to the metal ground reflecting plane should be subtracted from the maximum field strength value in order to reference it to free space, before calculating TP.



Exposure of Humans to RF Fields (continued)	Applicable	Declared by applicant	Measured	Exemption			
<b>Separation distance between the user and the transmitting device is</b>							
<input checked="" type="checkbox"/> less than or equal to 20 cm <input type="checkbox"/> greater than 20 cm		<input checked="" type="checkbox"/>					
<b>Transmitting device is</b>							
<input type="checkbox"/> in the vicinity of the human head <input checked="" type="checkbox"/> body-worn		<input checked="" type="checkbox"/>					
<b>SAR evaluation</b>							
<p>SAR evaluation is required if the separation distance between the user and the device is less than or equal to 20 cm.</p> <p><input type="checkbox"/> The device operates from 3 kHz up to 1 GHz inclusively and with output power (i.e. the higher of the conducted or equivalent isotropically radiated power (e.i.r.p.) source-based, time-averaged output power) that is less than or equal to 200 mW for general public use and 1000 mW for controlled use.</p> <p><input type="checkbox"/>;</p> <p><input type="checkbox"/> The device operates above 1 GHz and up to 2.2 GHz inclusively and with output power (i.e. the higher of the conducted or radiated (e.i.r.p.) source-based, time-averaged output power) that is less than or equal to 100 W for general public use and 500 W for controlled use.</p> <p><input type="checkbox"/> The device operates above 2.2 GHz and up to 3 GHz inclusively and with output power (i.e. the higher of the conducted or radiated (e.i.r.p.) source-based, time-averaged output power) that is less than or equal to 20 mW for general public use and 100 mW for controlled use.</p> <p><input type="checkbox"/> The device operates above 3 GHz and up to 6 GHz inclusively and with output power (i.e. the higher of the conducted or radiated (e.i.r.p.) source-based, time-averaged output power) that is less than or equal to 10 mW for general public use and 50 mW for controlled use.</p> <p><input type="checkbox"/> SAR evaluation is documented in test report no. ....</p>				<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<b>RF exposure evaluation</b>							
<p>RF exposure evaluation is required if the separation distance between the user and the device is greater than 20 cm.</p> <p><input checked="" type="checkbox"/> The device operates below 1.5 GHz and the maximum e.i.r.p. of the device is equal to or less than 2.5 W.</p> <p><input type="checkbox"/> The device operates at or above 1.5 GHz and the maximum e.i.r.p. of the device is equal to or less than 5 W.</p> <p><input type="checkbox"/> RF exposure evaluation is documented in test report no. ....</p>				<input checked="" type="checkbox"/>	<input type="checkbox"/>		



## 9 Test Results for Receiver

FCC CFR 47 Part 15			
<i>Section(s)</i>	<i>Test</i>	<i>Page</i>	<i>Result</i>
15.107	Conducted AC powerline emission 150 kHz to 30 MHz	52	Test passed
15.109	Radiated emission 30 MHz to 10.0 GHz	55	Test passed
15.111(a)	Antenna power conduction emission of receivers 9 kHz to 10.0 GHz	58	Test passed

IC RSS-Gen Issue 3			
<i>Section(s)</i>	<i>Test</i>	<i>Page</i>	<i>Result</i>
7.2.4	Conducted AC powerline emission 150 kHz to 30 MHz	52	Test passed
6.1	Receiver spurious emissions (radiated) 30 MHz to 10.0 GHz	55	Test passed
6.2	Receiver spurious emissions (antenna conducted) 9 kHz to 10.0 GHz	58	Test passed



## 9.1 Conducted Powerline Emission Measurement 150 kHz to 30 MHz

Rules and specifications:	CFR 47 Part 15, section 15.107 IC RSS-Gen Issue 3, section 7.2.4		
Guide:	ANSI C63.4 / CISPR 22		
Limit:	Frequency of Emission (MHz)	Conducted Limit (dB $\mu$ V)	
		Quasi-peak	Average
	0.15 - 0.5	66 to 56	56 to 46
	0.5 - 5	56	46
	5 - 30	60	50
Measurement procedure:	Conducted AC Powerline Emission (6.3)		


Comment:	
Date of test:	2014-05-15
Test site:	Shielded room, cabin no. 4

Test Result:	Test passed
--------------	-------------


Tested on: L1

Frequency (MHz)	Detector	Reading Value (dBµV)	Correction Factor (dB)	Final Value (dBµV)	Limit (dBµV)	Margin (dB)
0,155	Quasi-Peak	52,7	0,0	52,7	65,7	13,0
0,265	Average	41,1	0,0	41,1	51,3	10,2
0,300	Quasi-Peak	48,5	0,0	48,5	60,2	11,7
0,300	Average	42,9	0,0	42,9	50,2	7,3
0,430	Quasi-Peak	44,7	0,0	44,7	57,3	12,6
0,470	Quasi-Peak	44,9	0,0	44,9	56,5	11,6
0,600	Quasi-Peak	47,5	0,0	47,5	56,0	8,5
0,670	Quasi-Peak	41,5	0,0	41,5	56,0	14,5
0,950	Quasi-Peak	43,1	0,0	43,1	56,0	12,9

L1 (QP)

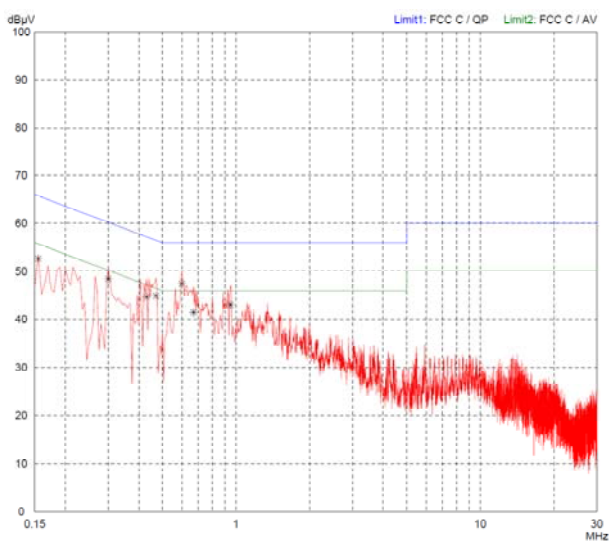


L1 (AV)

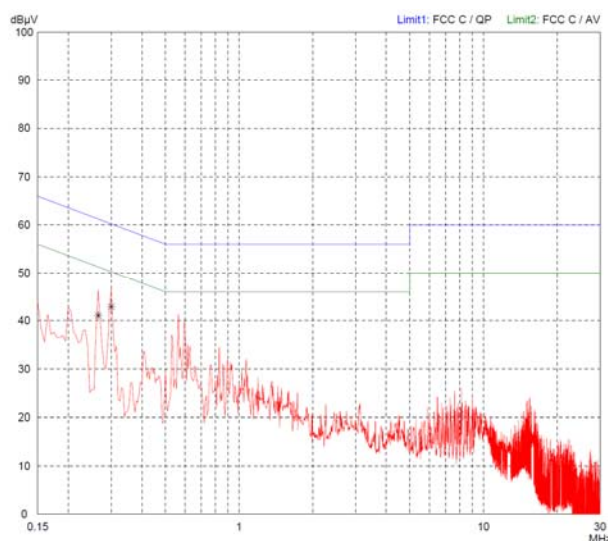


Tested on: N

Frequency (MHz)	Detector	Reading Value (dBµV)	Correction Factor (dB)	Final Value (dBµV)	Limit (dBµV)	Margin (dB)
0,160	Quasi-Peak	51,1	0,0	51,1	65,5	14,4
0,260	Quasi-Peak	40,2	0,0	40,2	61,4	21,2
0,260	Average	35,6	0,0	35,6	51,4	15,8
0,295	Quasi-Peak	47,0	0,0	47,0	60,4	13,4
0,300	Average	35,7	0,0	35,7	50,2	14,5
0,415	Average	45,3	0,0	45,3	57,5	12,2
0,450	Quasi-Peak	44,9	0,0	44,9	56,9	12,0
0,570	Quasi-Peak	41,8	0,0	41,8	56,0	14,2
0,765	Quasi-Peak	43,1	0,0	43,1	56,0	12,9
0,900	Quasi-Peak	41,9	0,0	41,9	56,0	14,1

N (QP)

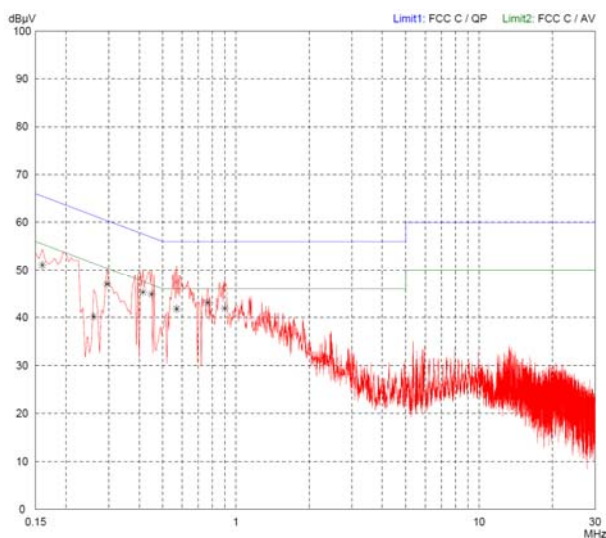

N (AV)

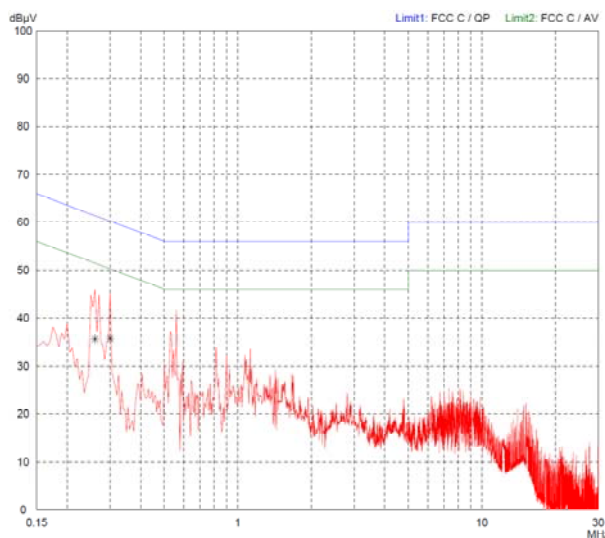

**Sample calculation of final values:**

$$\text{Final Value (dB}\mu\text{V)} = \text{Reading Value (dB}\mu\text{V)} + \text{Correction Factor (dB)}$$

## 9.2 Radiated Emission Measurement 30 MHz to 10.0 GHz

Rules and specifications:	CFR 47 Part 15, section 15.109 (Class B) IC RSS-Gen Issue 3, sections 6.1		
Guide:	ANSI C63.4		
Limit:	Frequency of Emission (MHz)	Field Strength ( $\mu\text{V}/\text{m}$ )	Field Strength ( $\text{dB}\mu\text{V}/\text{m}$ )
	30 - 88	100	40.0
	88 - 216	150	43.5
	216 - 960	200	46.0
	Above 960	500	54.0
Measurement procedures:	Radiated Emission in Fully or Semi Anechoic Room (6.5) Radiated Emission at Alternative Test Site (6.6)		







Comment:	
Date of test:	2015-05-14
Test site:	Frequencies $\leq 1$ GHz: Semi-anechoic room, cabin no. 8 Frequencies $> 1$ GHz: Fully anechoic room, cabin no. 2
Test distance:	3 meters

Test Result:	Test passed
--------------	-------------


Frequency (MHz)	Antenna Polarization	Detector	Receiver Reading ( $\text{dB}\mu\text{V}$ )	Correction Factor ( $\text{dB}/\text{m}$ )	Final Value ( $\text{dB}\mu\text{V}/\text{m}$ )	Limit ( $\text{dB}\mu\text{V}/\text{m}$ )	Margin (dB)
33,880	horizontal	Quasi-Peak	16,8	13,7	30,4	40,0	9,6
39,700	horizontal	Quasi-Peak	24,3	15,3	39,6	40,0	0,4
94,020	vertical	Quasi-Peak	24,0	13,8	37,8	43,5	5,7
95,960	horizontal	Quasi-Peak	25,7	14,2	39,9	43,5	3,6
99,840	horizontal	Quasi-Peak	23,8	14,7	38,4	43,5	5,1
99,840	vertical	Quasi-Peak	23,1	14,7	37,8	43,5	5,7
165,800	vertical	Quasi-Peak	21,8	11,8	33,7	43,5	9,8
383,080	vertical	Quasi-Peak	19,7	18,5	38,2	46,0	7,8
497,540	vertical	Quasi-Peak	16,3	20,5	36,8	46,0	9,2
662,440	vertical	Quasi-Peak	15,3	23,2	38,5	46,0	7,5
798,240	vertical	Quasi-Peak	13,1	25,2	38,3	46,0	7,7
1060,000	horizontal	Quasi-Peak	19,8	28,0	47,7	54,0	6,3
1060,000	vertical	Quasi-Peak	19,8	28,0	47,7	54,0	6,3
1660,000	vertical	Quasi-Peak	15,1	30,5	45,6	54,0	8,4
1990,000	vertical	Quasi-Peak	11,9	32,2	44,1	54,0	9,9

### Horizontal Polarisation

### Vertical Polarisation

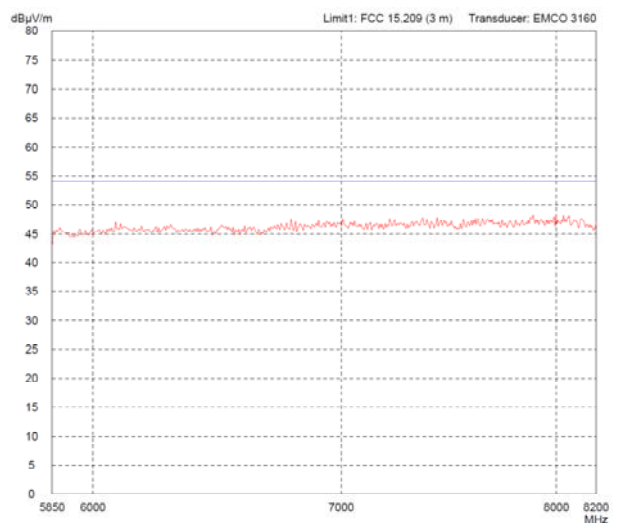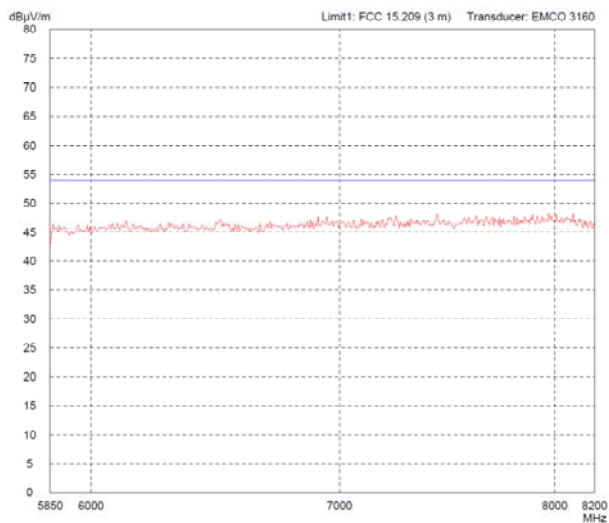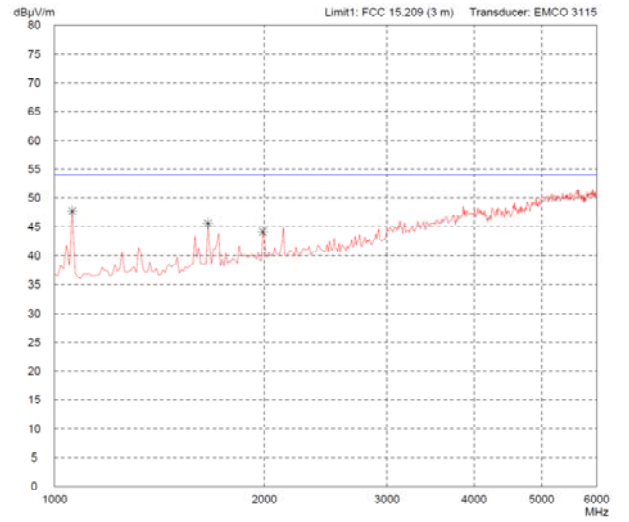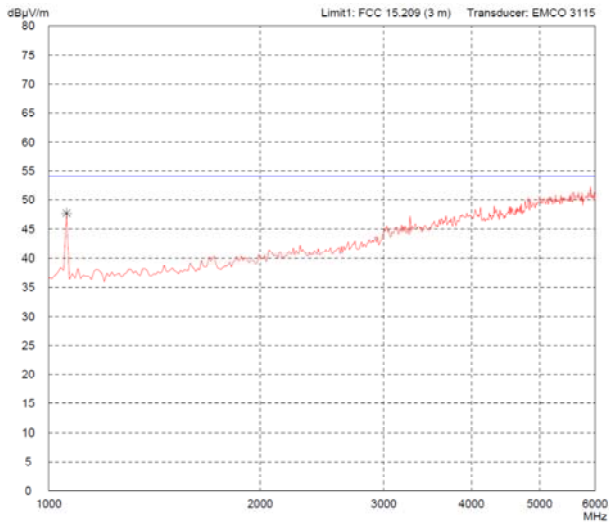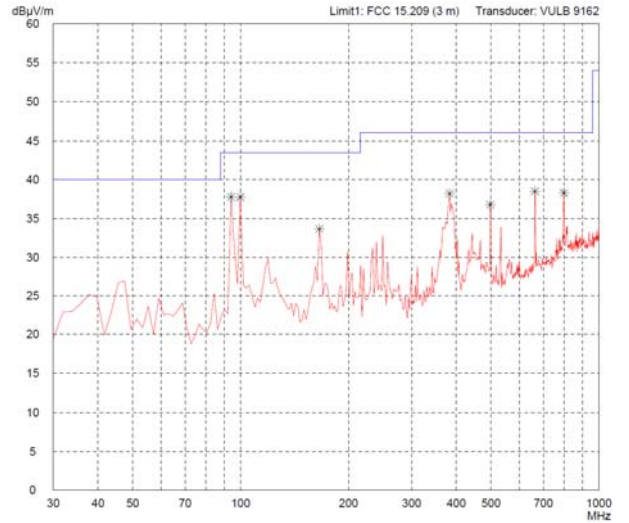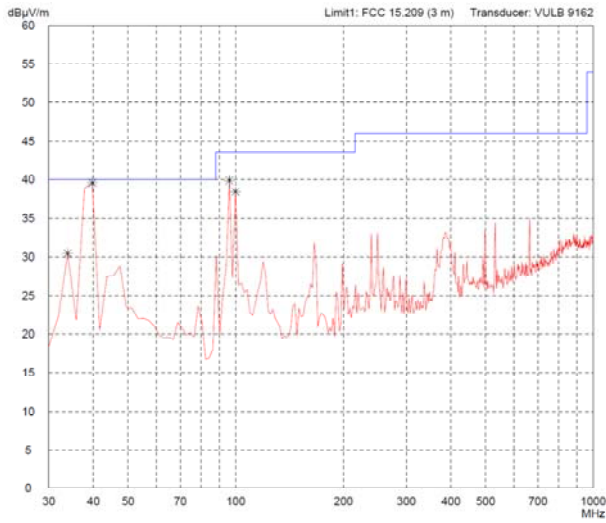



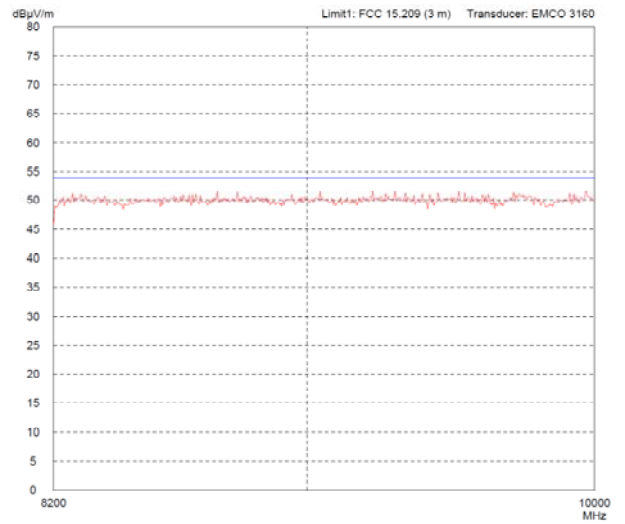

**Sample calculation of field final values:**

$$\text{Final Value (dB}\mu\text{V/m)} = \text{Reading Value (dB}\mu\text{V)} + \text{Correction Factor (dB/m)}$$



### 9.3 Antenna Power Conduction Emission of Receivers 9 kHz to 10.0 GHz

Rules and specifications:	CFR 47 Part 15, section 15.111(a) IC RSS-Gen Issue 3, sections 6.2		
Guide:	ANSI C63.4		
Limit:	Frequency of Emission (MHz)	Antenna power conduction limits for receivers	
		CFR 47 Part 15	IC RSS-Gen
	30 - 1000	2 nW (-57 dBm)	2 nW (-57 dBm)
	Above 1000	2 nW (-57 dBm)	5 nW (-53 dBm)
Measurement procedure:	Antenna Power Conduction Emission of Receivers (6.7)		

Comment:	
Date of test:	2015-05-14
Test site:	Shielded room, cabin no. 1
Tested on:	Antenna port

Test Result:	Test passed
--------------	-------------

Frequency (MHz)	Detector	Reading Value (dBm)	Correction Factor (dB)	Final Value (dBm)	CFR 47 Part 15		RSS-210	
					Limit (dBm)	Margin (dB)	Limit (dBm)	Margin (dB)
no results					-57,0		-57,0	

Note: Margin to limit > 10 dB!

#### Sample calculation of final values:

$$\text{Final Value (dBm)} = \text{Reading Value (dBm)} + \text{Correction Factor (dB)}$$

## 10 Referenced Regulations

All tests were performed with reference to the following regulations and standards:

<input checked="" type="checkbox"/>	CFR 47 Part 2	Code of Federal Regulations Part 2 (Frequency allocation and radio treaty matters; General rules and regulations) of the Federal Communication Commission (FCC)	October 1, 2013
<input checked="" type="checkbox"/>	CFR 47 Part 15	Code of Federal Regulations Part 15 (Radio Frequency Devices) of the Federal Communication Commission (FCC)	October 1, 2013
<input checked="" type="checkbox"/>	ANSI C63.4	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz	December 11, 2003 (published on January 30, 2004)
<input type="checkbox"/>	ANSI C63.4	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz	June 7, 2009 (published on September 15, 2009)
<input checked="" type="checkbox"/>	RSS-Gen	Radio Standards Specification RSS-Gen Issue 3 containing General Requirements and Information for the Certification of Radiocommunication Equipment, published by Industry Canada	December 2010
<input checked="" type="checkbox"/>	RSS-210	Radio Standards Specification RSS-210 Issue 8 for Low Power Licence-Exempt Radiocommunication Devices (All Frequency Bands): Category I Equipment, published by Industry Canada	December 2010
<input type="checkbox"/>	RSS-310	Radio Standards Specification RSS-310 Issue 3 for Low-power Licence-exempt Radiocommunication Devices (All Frequency Bands): Category II Equipment, published by Industry Canada	December 2010
<input checked="" type="checkbox"/>	RSS-102	Radio Standards Specification RSS-102 Issue 4: Radio Frequency (RF) Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands), published by Industry Canada	March 2010, footnote 13 updated December 2010
<input type="checkbox"/>	ICES-003	Interference-Causing Equipment Standard ICES-003 Issue 5 (Information Technology Equipment (ITE) - Limits and methods of measurement), published by Industry Canada	August 2012
<input checked="" type="checkbox"/>	CISPR 22	Third Edition of the International Special Committee on Radio Interference (CISPR), Pub. 22, "Information Technology Equipment – Radio Disturbance Characteristics – Limits and Methods of Measurement"	1997



---

<input type="checkbox"/>	CAN/CSA CISPR 22-10	Information technology equipment - Radio disturbance characteristics - Limits and methods of measurement (Adopted IEC CISPR 22:2008, sixth edition, 2008-09)	2010
<input checked="" type="checkbox"/>	TRC-43	Designation of Emissions, Class of Station and Nature of Service, published by Industry Canada	November 2012



## 11 Test Equipment List with Calibration Data

Type	Inv.-No.	Type Designation	Serial Number	Manufacturer	Calibration Organization	Last Calibration	Next Calibration
EMI test receiver	1028	ESHS10	860043/016	Rohde & Schwarz	Rohde & Schwarz	03/2013	09/2014
EMI test receiver	2010	ESPI7	101018	Rohde & Schwarz	Rohde & Schwarz	11/2012	05/2014
EMI test receiver	2044	ESU8	100232	Rohde & Schwarz	Rohde & Schwarz	01/2014	06/2015
Spectrum analyser	1666	FSP30	100063	Rohde & Schwarz	Rohde & Schwarz	11/2012	05/2014
Preamplifier	1484	ACO/180-3530	32641	CTT	TÜV SÜD PS-EMC-STR	06/2013	06/2015
Preamplifier	1651	CPA9231A	3393	Schaffner Electrotest	TÜV SÜD PS-EMC-STR	09/2012	09/2014
Preamplifier	1684	AFS3-00100800-32-LN	847743	MITEQ	TÜV SÜD PS-EMC-STR	10/2013	04/2015
Preamplifier	1685	AMF-4D-005080-25-13P	860149	MITEQ	TÜV SÜD PS-EMC-STR	08/2013	11/2015
Preamplifier	1716	CPA9231A	3557	Schaffner EMC Systems	TÜV SÜD PS-EMC-STR	01/2014	06/2015
Preamplifier	2076	AFS3-00100800-32-LN	1344017	MITEQ			
V-network	1059	ESH3-Z5	894785/005	Rohde & Schwarz	Rohde & Schwarz	08/2013	08/2015
Double ridged waveguide horn antenna	1516	3115	9508-4553	EMCO Elektronik	Seibersdorf Laboratories	11/2012	11/2014
Horn antenna	1010	3160-03	9112 -1003	EMCO Elektronik		see note 1	
Horn antenna	1011	3160-04	9112-1001	EMCO Elektronik		see note 1	
Horn antenna	1012	3160-05	9112-1001	EMCO Elektronik		see note 1	
Horn antenna	1013	3160-06	9112-1001	EMCO Elektronik		see note 1	
Loop antenna	1016	HFH2-Z2	882964/0001	Rohde & Schwarz	Rohde & Schwarz	11/2012	05/2014
TRILOG Broadband Antenna	1802	VULB 9163	9163-214	Schwarzbeck	Rohde & Schwarz	05/2013	11/2014



- Note 1: No calibration required.
- Note 2: Not calibrated separately but with the whole test system when recording calibration data.
- Note 3: No calibration required. Devices are checked before use.
- Note 4: No calibration required. Devices are checked by calibrated equipment during test.

## 12 Revision History

Revision History			
<i>Edition</i>	<i>Date</i>	<i>Issued by</i>	<i>Modifications</i>
1	2014-05-30	M. Biberger	First Edition
2	2014-08-27	J. Roidt (aw)	Page 38: Designation of Emissions corrected