


Report No.: T191111W02-RP4


Test Mode	IEEE 802.11n 40 MHz / 5670 MHz	Temp/Hum	22.1(°C)/ 58%RH
Test Item	Band Edge	Test Date	December 23, 2019
Polarize	Horizontal	Test Engineer	Jerry Chang
Detector	Peak		

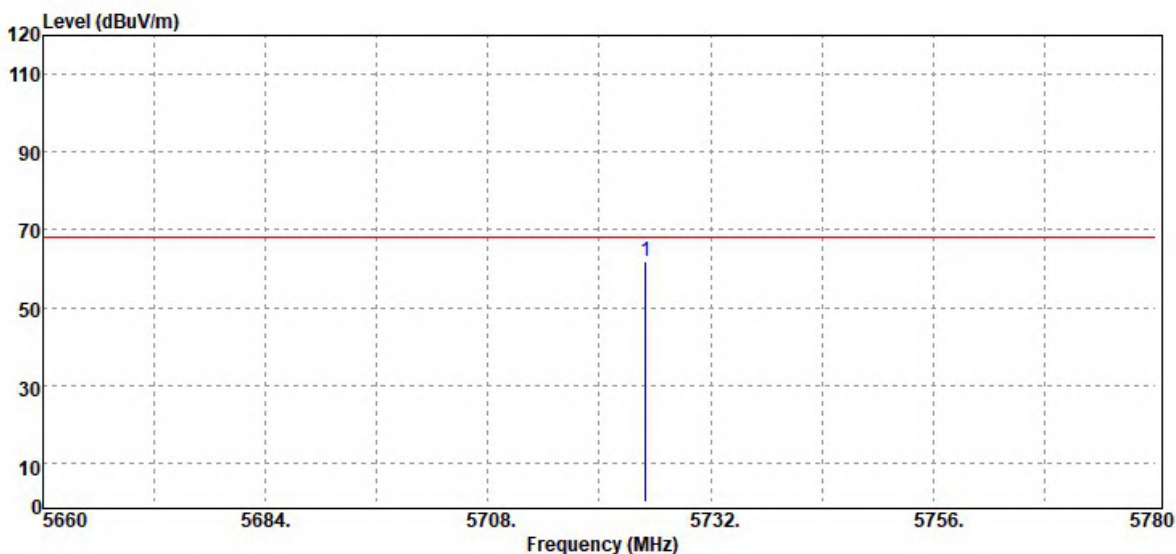

Frequency (MHz)	Detector Mode PK/QP/AV	Spectrum Reading Level dB μ V	Factor dB	Actual FS dB μ V/m	Limit @3m dB μ V/m	Margin dB
5725.00	Peak	55.52	6.34	61.86	68.20	-6.34

Report No.: T191111W02-RP4


Test Mode	IEEE 802.11ac VHT80 / 5530 MHz	Temp/Hum	22.1(°C)/ 58%RH
Test Item	Band Edge	Test Date	December 24, 2019
Polarize	Vertical	Test Engineer	Jerry Chang
Detector	Peak and Average		

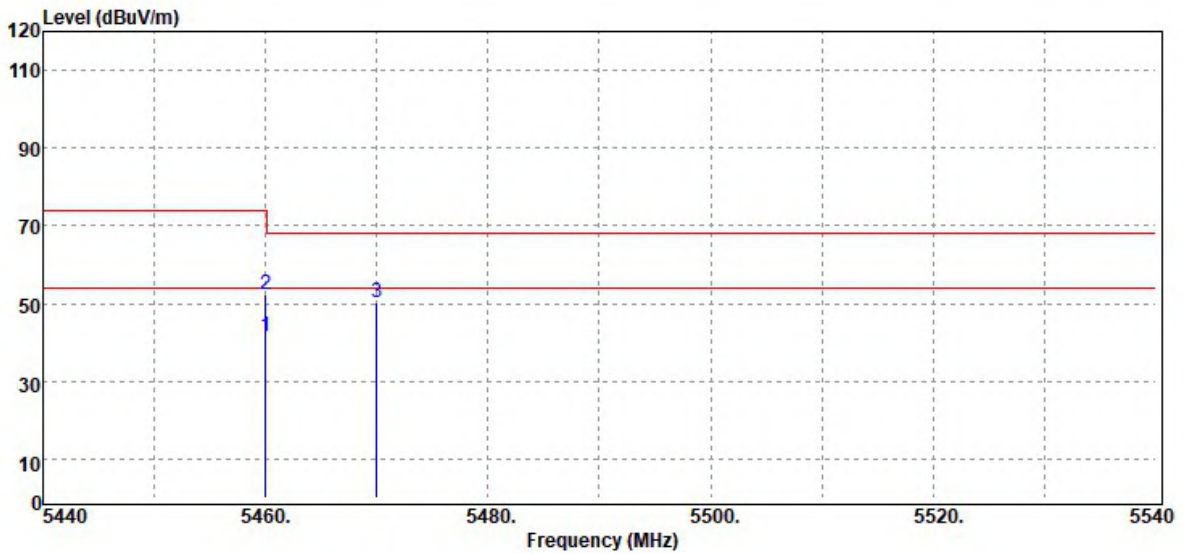

Frequency (MHz)	Detector Mode PK/QP/AV	Spectrum Reading Level dB μ V	Factor dB	Actual FS dB μ V/m	Limit @3m dB μ V/m	Margin dB
5460.00	Average	35.87	5.63	41.50	54.00	-12.50
5460.00	Peak	46.61	5.63	52.24	74.00	-21.76
5470.00	Peak	44.75	5.65	50.40	68.20	-17.80

Report No.: T191111W02-RP4


Test Mode	IEEE 802.11ac VHT80 / 5530 MHz	Temp/Hum	22.1(°C)/ 58%RH
Test Item	Band Edge	Test Date	December 24, 2019
Polarize	Horizontal	Test Engineer	Jerry Chang
Detector	Peak and Average		

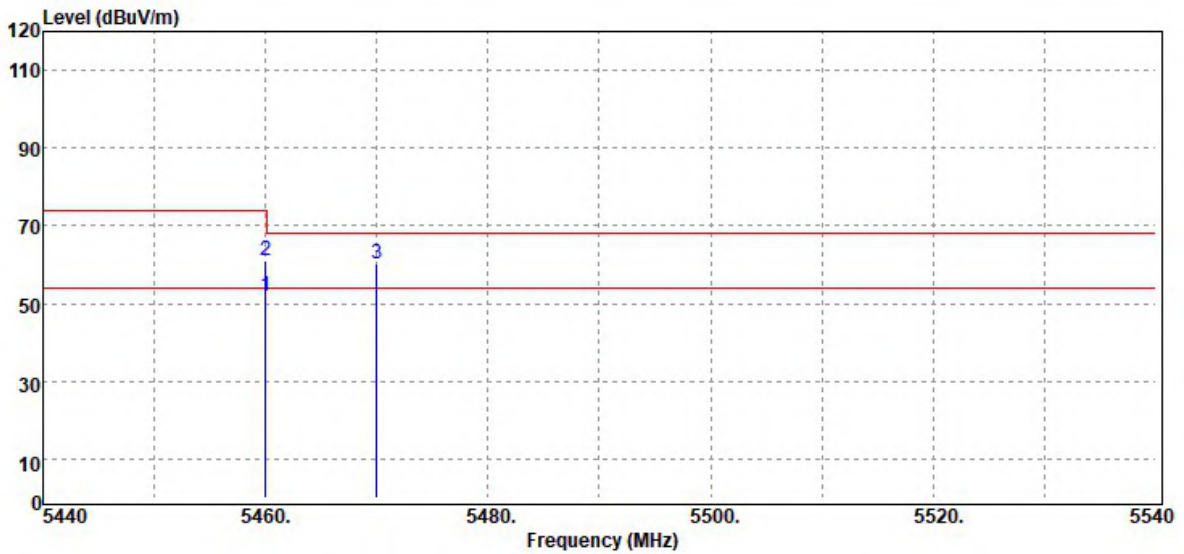

Frequency (MHz)	Detector Mode PK/QP/AV	Spectrum Reading Level dB μ V	Factor dB	Actual FS dB μ V/m	Limit @3m dB μ V/m	Margin dB
5460.00	Average	46.29	5.63	51.92	54.00	-2.08
5460.00	Peak	55.55	5.63	61.18	74.00	-12.82
5470.00	Peak	54.43	5.65	60.08	68.20	-8.12

Report No.: T191111W02-RP4


Test Mode	IEEE 802.11ac VHT80 / 5610 MHz	Temp/Hum	19.1(°C)/ 54%RH
Test Item	Band Edge	Test Date	April 15, 2020
Polarize	Vertical	Test Engineer	Jerry Chang
Detector	Peak and Average		

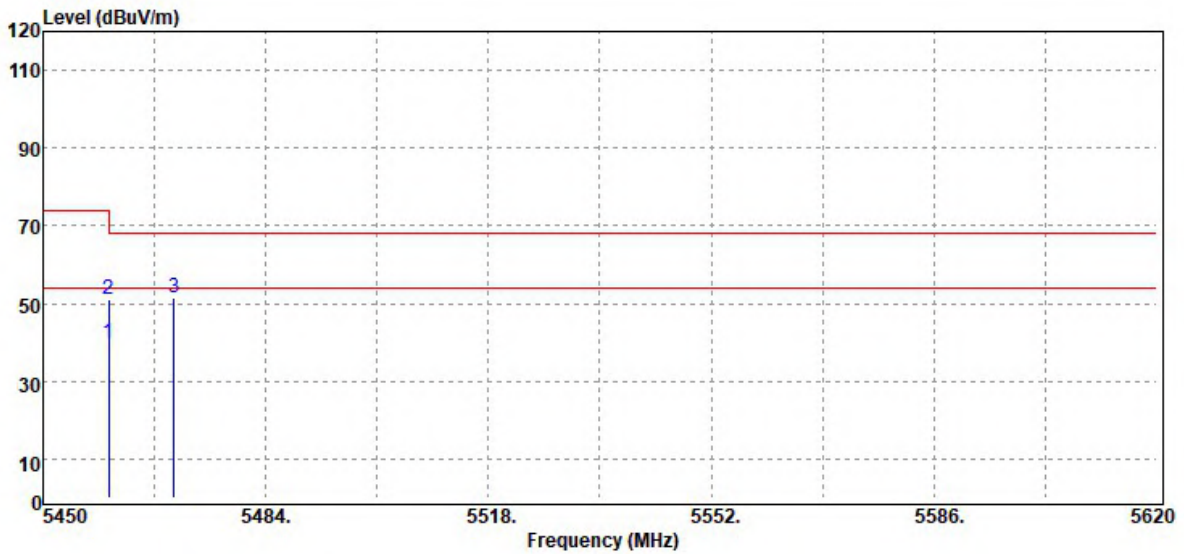

Frequency (MHz)	Detector Mode PK/QP/AV	Spectrum Reading Level dB μ V	Factor dB	Actual FS dB μ V/m	Limit @3m dB μ V/m	Margin dB
5460.00	Average	33.94	6.11	40.05	54.00	-13.95
5460.00	Peak	44.99	6.11	51.10	74.00	-22.90
5470.00	Peak	45.26	6.14	51.40	68.20	-16.80

Report No.: T191111W02-RP4

Test Mode	IEEE 802.11ac VHT80 / 5610 MHz	Temp/Hum	19.1(°C)/ 54%RH
Test Item	Band Edge	Test Date	April 15, 2020
Polarize	Horizontal	Test Engineer	Jerry Chang
Detector	Peak and Average		

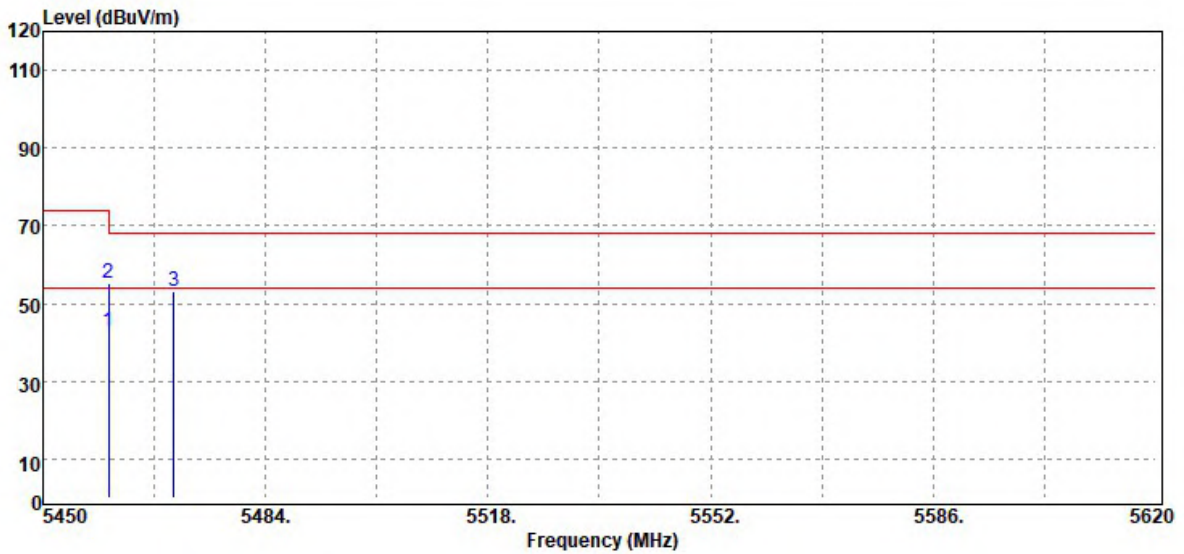


Frequency (MHz)	Detector Mode PK/QP/AV	Spectrum Reading Level dB μ V	Factor dB	Actual FS dB μ V/m	Limit @3m dB μ V/m	Margin dB
5460.00	Average	36.84	6.11	42.95	54.00	-11.05
5460.00	Peak	48.98	6.11	55.09	74.00	-18.91
5470.00	Peak	46.87	6.14	53.01	68.20	-15.19

Report No.: T191111W02-RP4

Test Data for UNII-3


Test Mode	IEEE 802.11a / 5745 MHz	Temp/Hum	22.1(°C)/ 58%RH
Test Item	Band Edge	Test Date	December 23, 2019
Polarize	Vertical	Test Engineer	Jerry Chang
Detector	Peak		

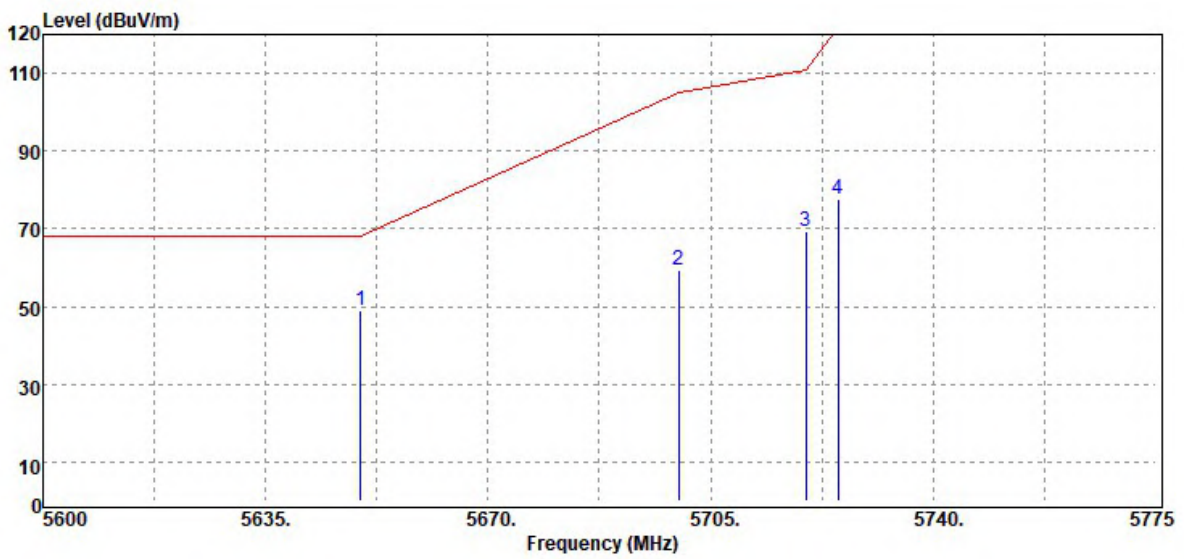

Frequency (MHz)	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
5650.00	Peak	42.88	6.04	48.92	68.20	-19.28
5700.00	Peak	53.11	6.32	59.43	105.20	-45.77
5720.00	Peak	62.85	6.33	69.18	110.80	-41.62
5725.00	Peak	71.17	6.34	77.51	122.20	-44.69

Report No.: T191111W02-RP4


Test Mode	IEEE 802.11a / 5745 MHz	Temp/Hum	22.1(°C)/ 58%RH
Test Item	Band Edge	Test Date	December 23, 2019
Polarize	Horizontal	Test Engineer	Jerry Chang
Detector	Peak		

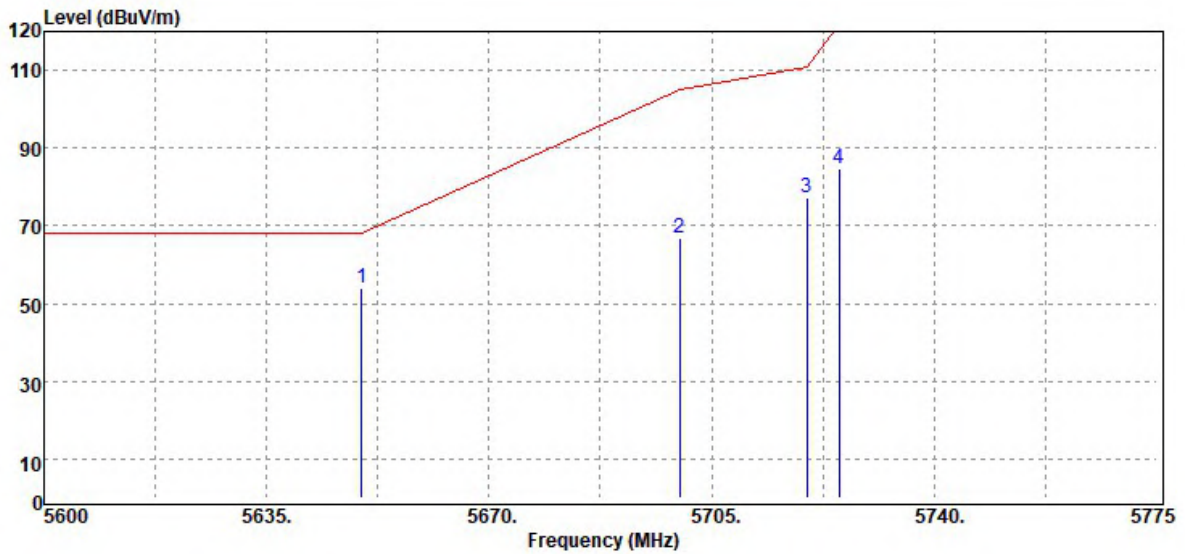

Frequency (MHz)	Detector Mode PK/QP/AV	Spectrum Reading Level dB μ V	Factor dB	Actual FS dB μ V/m	Limit @3m dB μ V/m	Margin dB
5650.00	Peak	47.89	6.04	53.93	68.20	-14.27
5700.00	Peak	60.35	6.32	66.67	105.20	-38.53
5720.00	Peak	70.77	6.33	77.10	110.80	-33.70
5725.00	Peak	78.31	6.34	84.65	122.20	-37.55

Report No.: T191111W02-RP4


Test Mode	IEEE 802.11a / 5825 MHz	Temp/Hum	22.1(°C)/ 58%RH
Test Item	Band Edge	Test Date	December 23, 2019
Polarize	Vertical	Test Engineer	Jerry Chang
Detector	Peak		

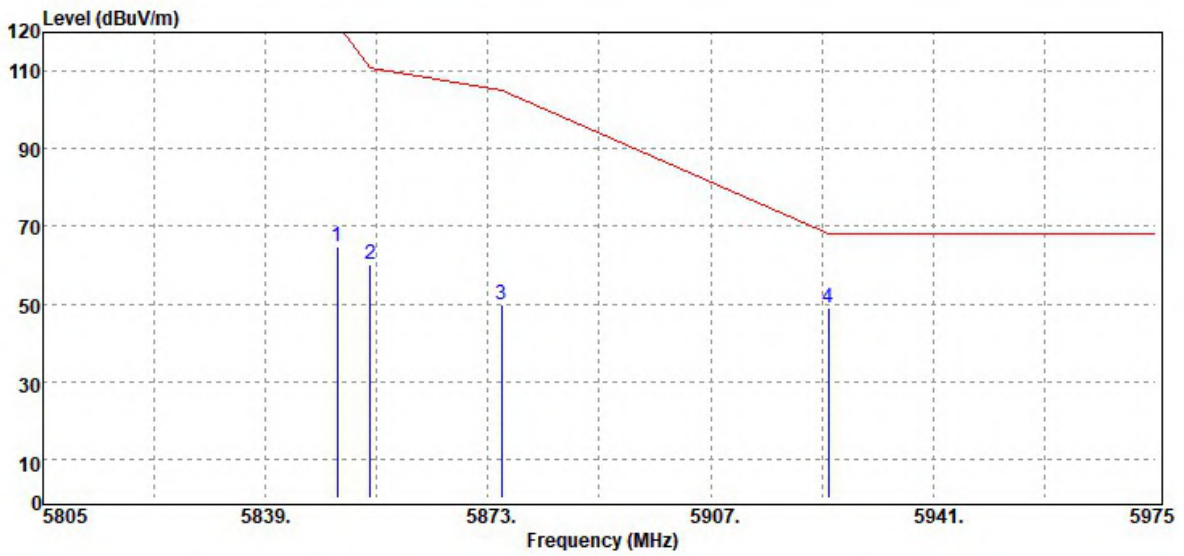

Frequency (MHz)	Detector Mode PK/QP/AV	Spectrum Reading Level dB μ V	Factor dB	Actual FS dB μ V/m	Limit @3m dB μ V/m	Margin dB
5850.00	Peak	58.27	6.39	64.66	122.20	-57.54
5855.00	Peak	53.82	6.38	60.20	110.80	-50.60
5875.00	Peak	43.47	6.37	49.84	105.20	-55.36
5925.00	Peak	42.46	6.42	48.88	68.20	-19.32

Report No.: T191111W02-RP4


Test Mode	IEEE 802.11a / 5825 MHz	Temp/Hum	22.1(°C)/ 58%RH
Test Item	Band Edge	Test Date	December 23, 2019
Polarize	Horizontal	Test Engineer	Jerry Chang
Detector	Peak		

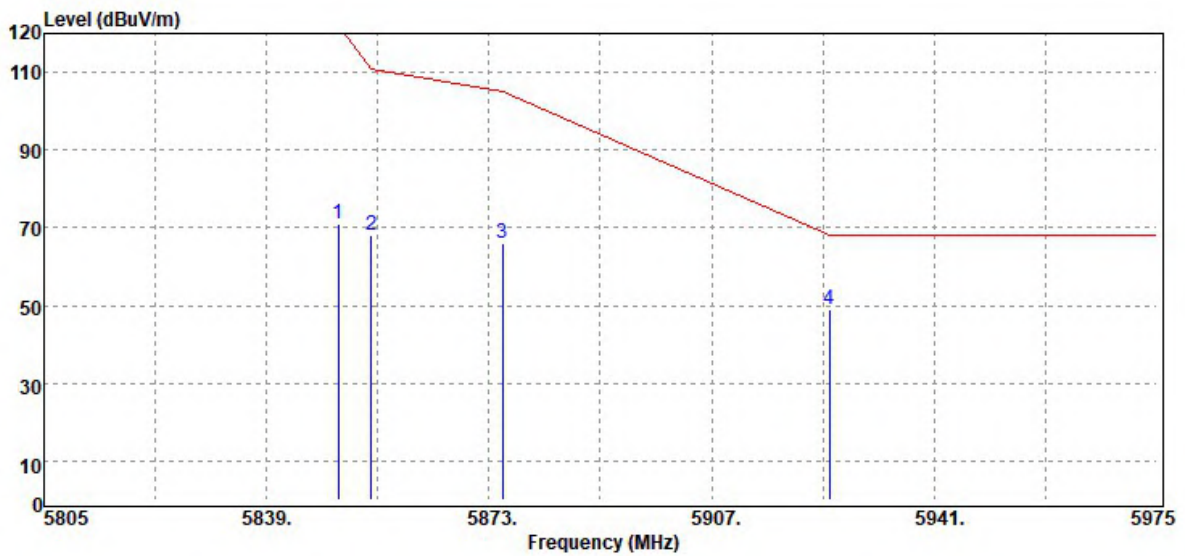

Frequency (MHz)	Detector Mode PK/QP/AV	Spectrum Reading Level dB μ V	Factor dB	Actual FS dB μ V/m	Limit @3m dB μ V/m	Margin dB
5850.00	Peak	64.69	6.39	71.08	122.20	-51.12
5855.00	Peak	61.61	6.38	67.99	110.80	-42.81
5875.00	Peak	59.83	6.37	66.20	105.20	-39.00
5925.00	Peak	42.70	6.42	49.12	68.20	-19.08

Report No.: T191111W02-RP4


Test Mode	IEEE 802.11n 20 MHz / 5745 MHz	Temp/Hum	22.1(°C)/ 58%RH
Test Item	Band Edge	Test Date	December 23, 2019
Polarize	Vertical	Test Engineer	Jerry Chang
Detector	Peak		

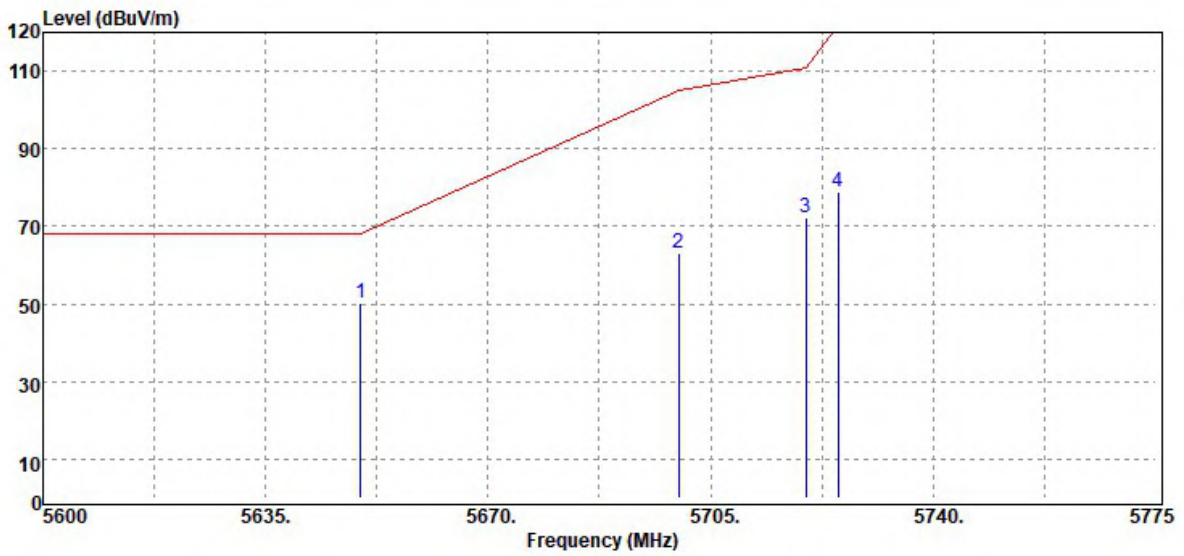

Frequency (MHz)	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
5650.00	Peak	44.00	6.04	50.04	68.20	-18.16
5700.00	Peak	56.80	6.32	63.12	105.20	-42.08
5720.00	Peak	66.03	6.33	72.36	110.80	-38.44
5725.00	Peak	72.49	6.34	78.83	122.20	-43.37

Report No.: T191111W02-RP4


Test Mode	IEEE 802.11n 20 MHz / 5745 MHz	Temp/Hum	22.1(°C)/ 58%RH
Test Item	Band Edge	Test Date	December 23, 2019
Polarize	Horizontal	Test Engineer	Jerry Chang
Detector	Peak		

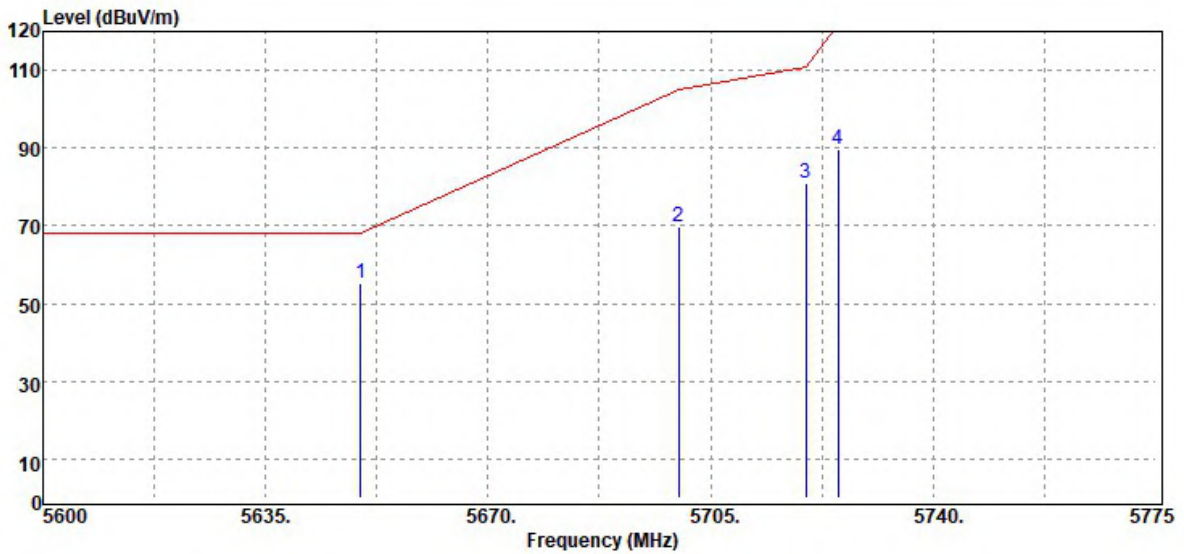

Frequency (MHz)	Detector Mode PK/QP/AV	Spectrum Reading Level dB μ V	Factor dB	Actual FS dB μ V/m	Limit @3m dB μ V/m	Margin dB
5650.00	Peak	49.15	6.04	55.19	68.20	-13.01
5700.00	Peak	63.36	6.32	69.68	105.20	-35.52
5720.00	Peak	74.68	6.33	81.01	110.80	-29.79
5725.00	Peak	83.35	6.34	89.69	122.20	-32.51

Report No.: T191111W02-RP4


Test Mode	IEEE 802.11n 20 MHz / 5825 MHz	Temp/Hum	22.1(°C)/ 58%RH
Test Item	Band Edge	Test Date	December 23, 2019
Polarize	Vertical	Test Engineer	Jerry Chang
Detector	Peak		

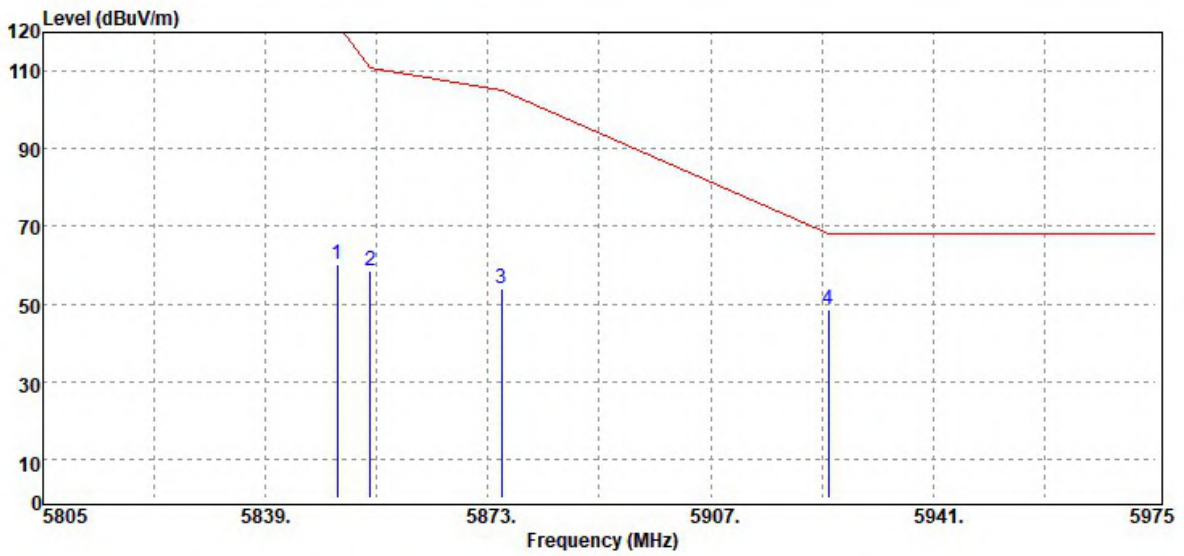

Frequency (MHz)	Detector Mode PK/QP/AV	Spectrum Reading Level dB μ V	Factor dB	Actual FS dB μ V/m	Limit @3m dB μ V/m	Margin dB
5850.00	Peak	53.66	6.39	60.05	122.20	-62.15
5855.00	Peak	52.27	6.38	58.65	110.80	-52.15
5875.00	Peak	47.50	6.37	53.87	105.20	-51.33
5925.00	Peak	42.04	6.42	48.46	68.20	-19.74

Report No.: T191111W02-RP4


Test Mode	IEEE 802.11n 20 MHz / 5825 MHz	Temp/Hum	22.1(°C)/ 58%RH
Test Item	Band Edge	Test Date	December 23, 2019
Polarize	Horizontal	Test Engineer	Jerry Chang
Detector	Peak		

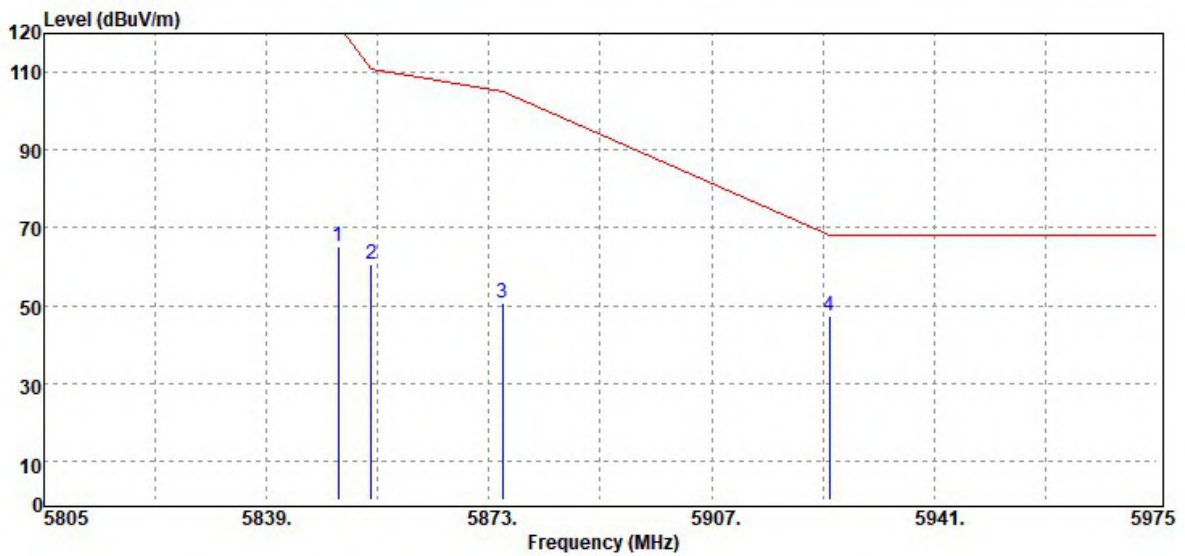

Frequency (MHz)	Detector Mode PK/QP/AV	Spectrum Reading Level dB μ V	Factor dB	Actual FS dB μ V/m	Limit @3m dB μ V/m	Margin dB
5850.00	Peak	58.74	6.39	65.13	122.20	-57.07
5855.00	Peak	54.44	6.38	60.82	110.80	-49.98
5875.00	Peak	44.37	6.37	50.74	105.20	-54.46
5925.00	Peak	40.78	6.42	47.20	68.20	-21.00

Report No.: T191111W02-RP4


Test Mode	IEEE 802.11n 40 MHz/ 5755 MHz	Temp/Hum	22.1(°C)/ 58%RH
Test Item	Band Edge	Test Date	December 24, 2019
Polarize	Vertical	Test Engineer	Jerry Chang
Detector	Peak		

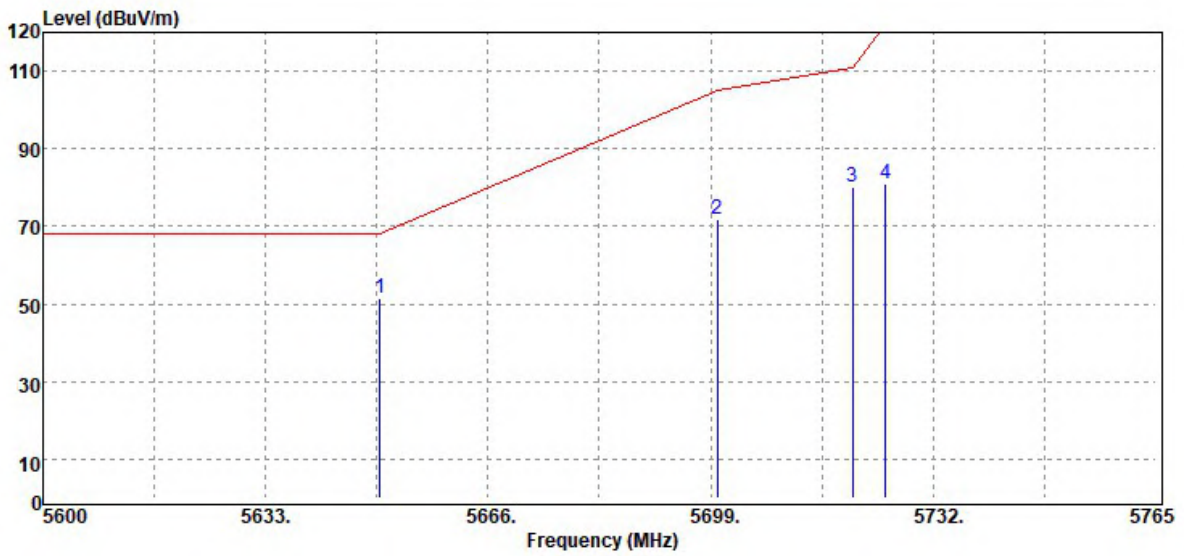

Frequency (MHz)	Detector Mode PK/QP/AV	Spectrum Reading Level dB μ V	Factor dB	Actual FS dB μ V/m	Limit @3m dB μ V/m	Margin dB
5650.00	Peak	45.50	6.04	51.54	68.20	-16.66
5700.00	Peak	65.54	6.32	71.86	105.20	-33.34
5720.00	Peak	73.73	6.33	80.06	110.80	-30.74
5725.00	Peak	74.64	6.34	80.98	122.20	-41.22

Report No.: T191111W02-RP4


Test Mode	IEEE 802.11n 40 MHz/ 5755 MHz	Temp/Hum	22.1(°C)/ 58%RH
Test Item	Band Edge	Test Date	December 24, 2019
Polarize	Horizontal	Test Engineer	Jerry Chang
Detector	Peak		

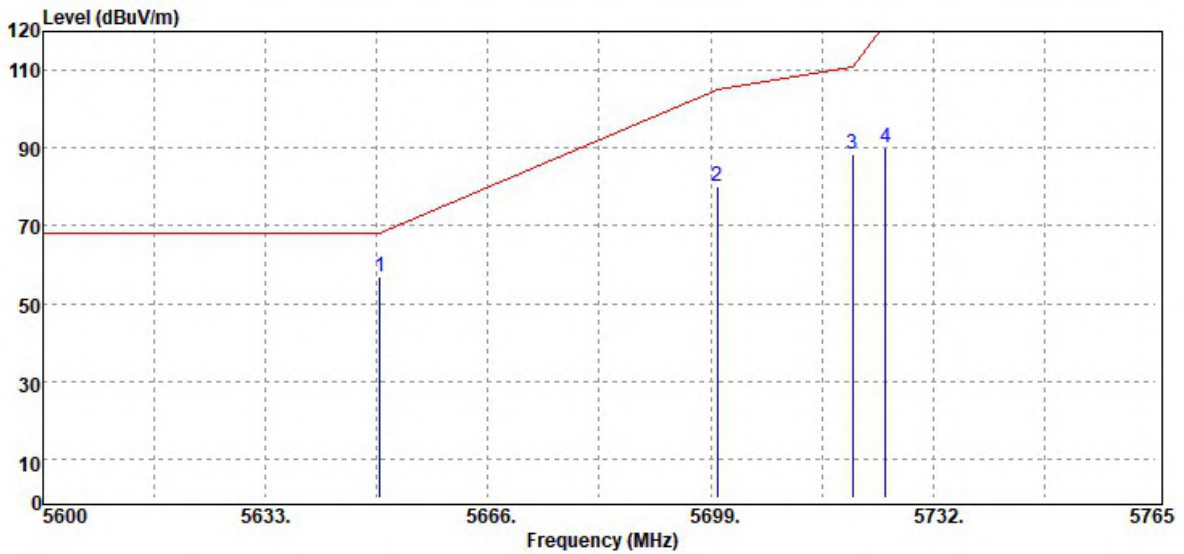

Frequency (MHz)	Detector Mode PK/QP/AV	Spectrum Reading Level dB μ V	Factor dB	Actual FS dB μ V/m	Limit @3m dB μ V/m	Margin dB
5650.00	Peak	50.85	6.04	56.89	68.20	-11.31
5700.00	Peak	73.64	6.32	79.96	105.20	-25.24
5720.00	Peak	82.24	6.33	88.57	110.80	-22.23
5725.00	Peak	83.62	6.34	89.96	122.20	-32.24

Report No.: T191111W02-RP4


Test Mode	IEEE 802.11n 40 MHz/ 5795 MHz	Temp/Hum	22.1(°C)/ 58%RH
Test Item	Band Edge	Test Date	December 24, 2019
Polarize	Vertical	Test Engineer	Jerry Chang
Detector	Peak		

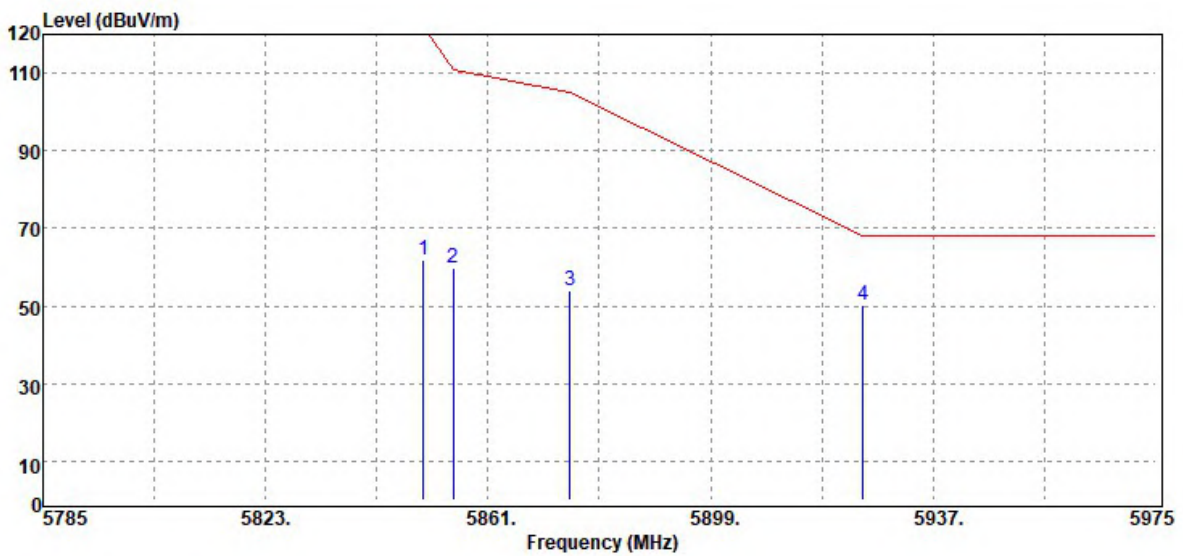

Frequency (MHz)	Detector Mode PK/QP/AV	Spectrum Reading Level dB μ V	Factor dB	Actual FS dB μ V/m	Limit @3m dB μ V/m	Margin dB
5850.00	Peak	55.37	6.39	61.76	122.20	-60.44
5855.00	Peak	53.59	6.38	59.97	110.80	-50.83
5875.00	Peak	47.66	6.37	54.03	105.20	-51.17
5925.00	Peak	43.95	6.42	50.37	68.20	-17.83

Report No.: T191111W02-RP4


Test Mode	IEEE 802.11n 40 MHz/ 5795 MHz	Temp/Hum	22.1(°C)/ 58%RH
Test Item	Band Edge	Test Date	December 24, 2019
Polarize	Horizontal	Test Engineer	Jerry Chang
Detector	Peak		

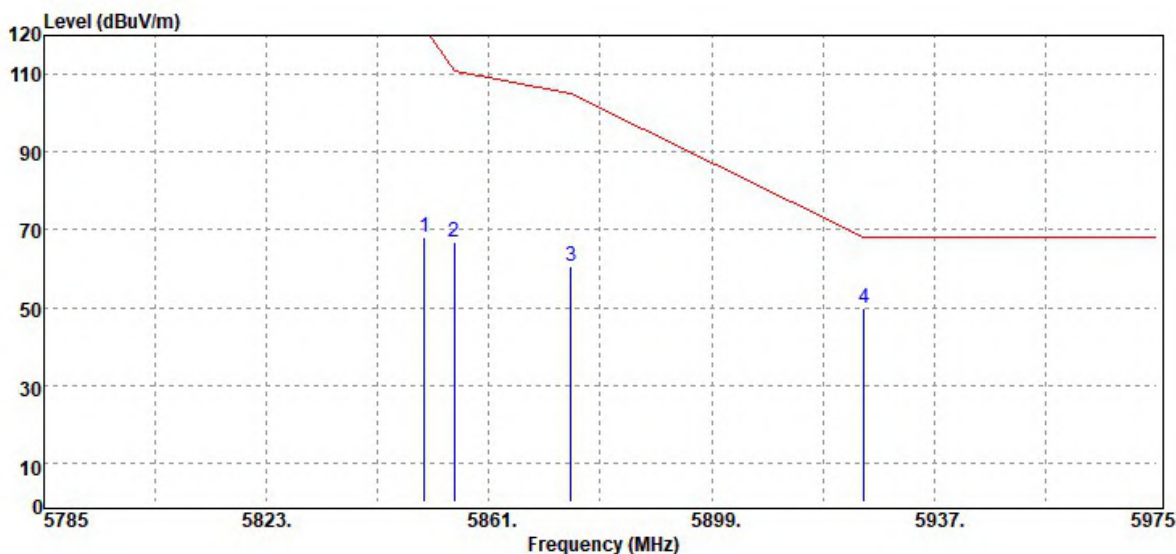

Frequency (MHz)	Detector Mode PK/QP/AV	Spectrum Reading Level dB μ V	Factor dB	Actual FS dB μ V/m	Limit @3m dB μ V/m	Margin dB
5850.00	Peak	61.77	6.39	68.16	122.20	-54.04
5855.00	Peak	60.26	6.38	66.64	110.80	-44.16
5875.00	Peak	54.07	6.37	60.44	105.20	-44.76
5925.00	Peak	43.22	6.42	49.64	68.20	-18.56

Report No.: T191111W02-RP4


Test Mode	IEEE 802.11ac VHT80 / 5775 MHz	Temp/Hum	22.1(°C)/ 58%RH
Test Item	Band Edge	Test Date	December 24, 2019
Polarize	Vertical	Test Engineer	Jerry Chang
Detector	Peak		

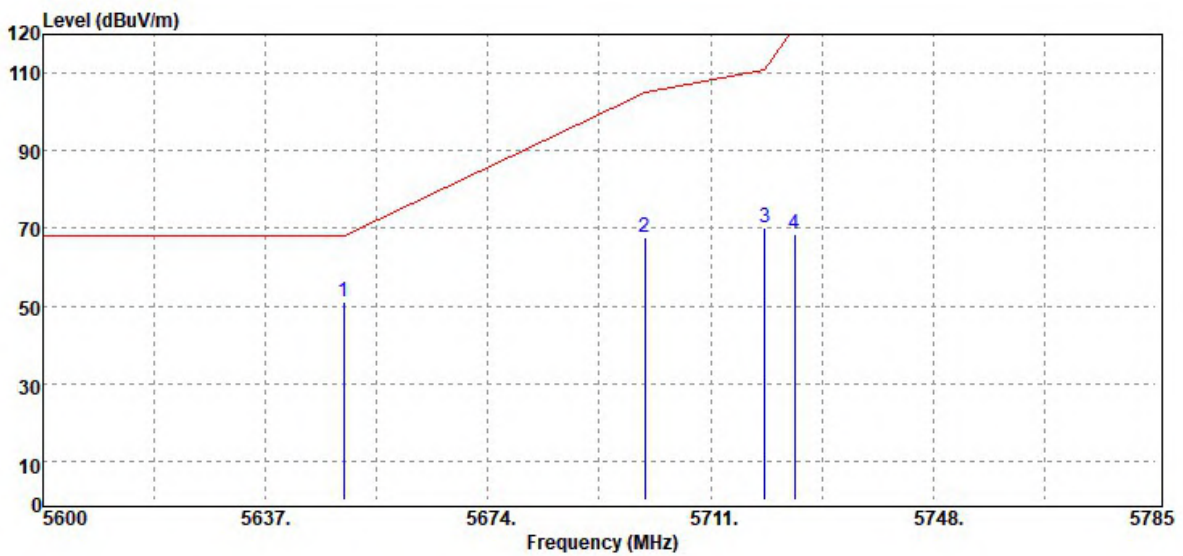

Frequency (MHz)	Detector Mode PK/QP/AV	Spectrum Reading Level dB μ V	Factor dB	Actual FS dB μ V/m	Limit @3m dB μ V/m	Margin dB
5650.00	Peak	44.93	6.04	50.97	68.20	-17.23
5700.00	Peak	61.33	6.32	67.65	105.20	-37.55
5720.00	Peak	63.65	6.33	69.98	110.80	-40.82
5725.00	Peak	62.16	6.34	68.50	122.20	-53.70

Report No.: T191111W02-RP4


Test Mode	IEEE 802.11ac VHT80 / 5775 MHz	Temp/Hum	22.1(°C)/ 58%RH
Test Item	Band Edge	Test Date	December 24, 2019
Polarize	Horizontal	Test Engineer	Jerry Chang
Detector	Peak		

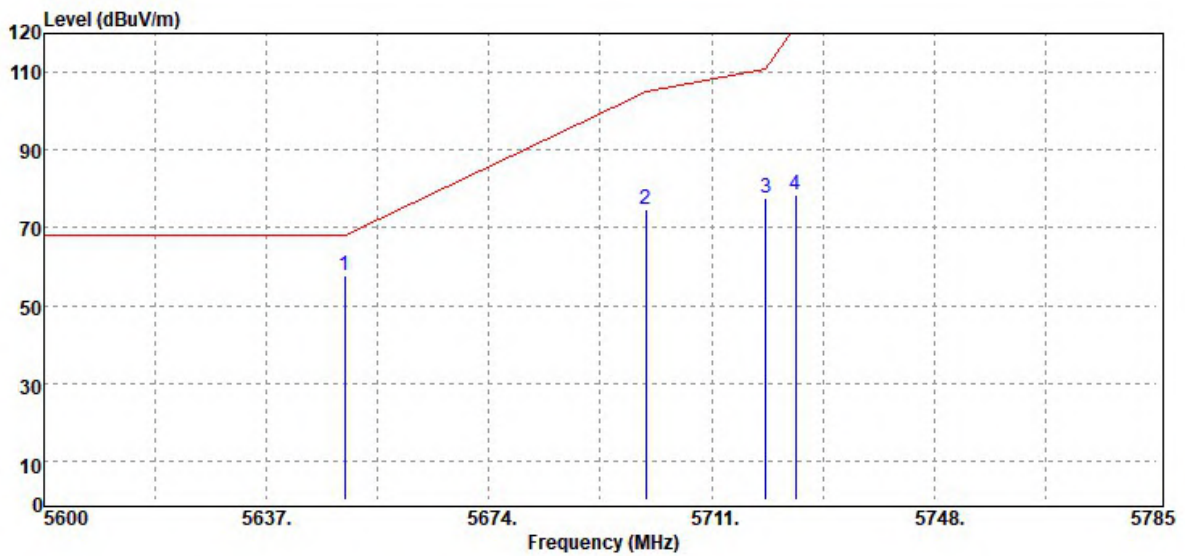

Frequency (MHz)	Detector Mode PK/QP/AV	Spectrum Reading Level dB μ V	Factor dB	Actual FS dB μ V/m	Limit @3m dB μ V/m	Margin dB
5650.00	Peak	51.56	6.04	57.60	68.20	-10.60
5700.00	Peak	68.63	6.32	74.95	105.20	-30.25
5720.00	Peak	71.11	6.33	77.44	110.80	-33.36
5725.00	Peak	71.99	6.34	78.33	122.20	-43.87

Report No.: T191111W02-RP4


Test Mode	IEEE 802.11ac VHT80 / 5775 MHz	Temp/Hum	22.1(°C)/ 58%RH
Test Item	Band Edge	Test Date	December 24, 2019
Polarize	Vertical	Test Engineer	Jerry Chang
Detector	Peak		

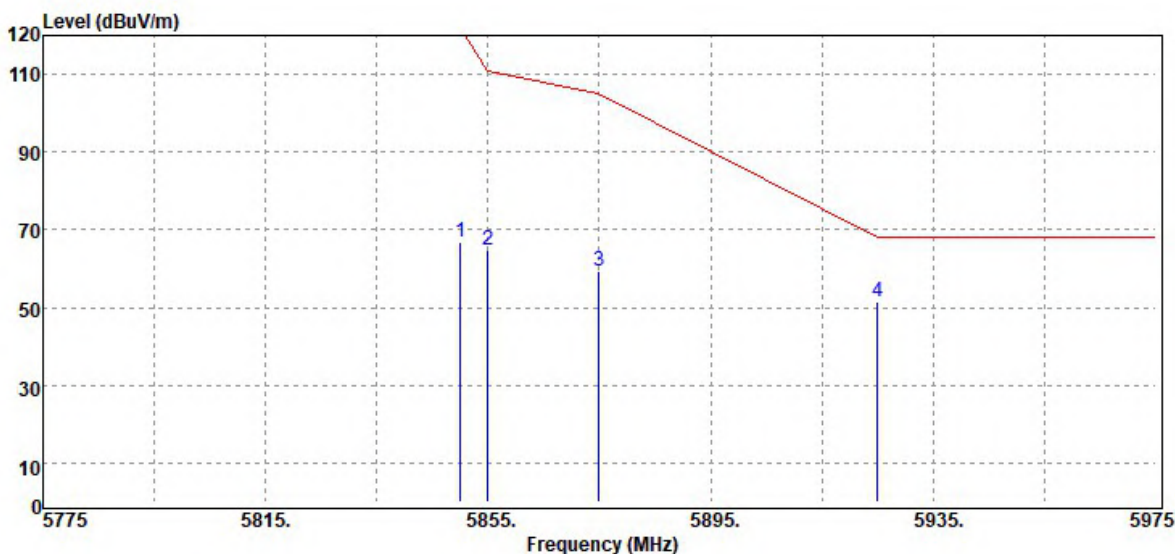

Frequency (MHz)	Detector Mode PK/QP/AV	Spectrum Reading Level dB μ V	Factor dB	Actual FS dB μ V/m	Limit @3m dB μ V/m	Margin dB
5850.00	Peak	60.46	6.39	66.85	122.20	-55.35
5855.00	Peak	58.26	6.38	64.64	110.80	-46.16
5875.00	Peak	53.00	6.37	59.37	105.20	-45.83
5925.00	Peak	45.14	6.42	51.56	68.20	-16.64

Report No.: T191111W02-RP4

Test Mode	IEEE 802.11ac VHT80 / 5775 MHz	Temp/Hum	22.1(°C)/ 58%RH
Test Item	Band Edge	Test Date	December 24, 2019
Polarize	Horizontal	Test Engineer	Jerry Chang
Detector	Peak		

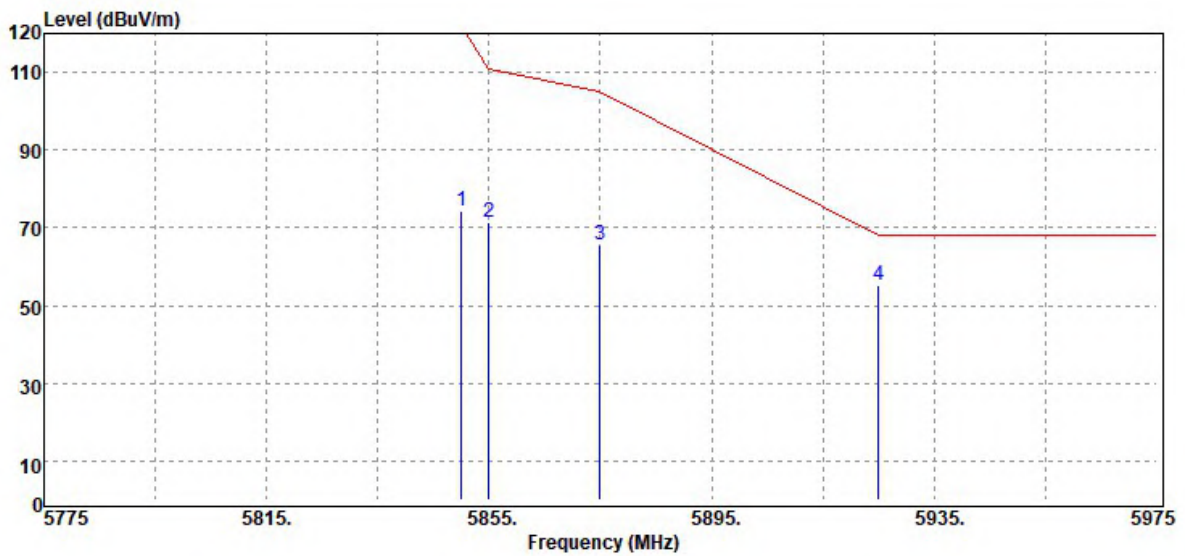


Frequency (MHz)	Detector Mode PK/QP/AV	Spectrum Reading Level dB μ V	Factor dB	Actual FS dB μ V/m	Limit @3m dB μ V/m	Margin dB
5850.00	Peak	68.08	6.39	74.47	122.20	-47.73
5855.00	Peak	65.16	6.38	71.54	110.80	-39.26
5875.00	Peak	59.29	6.37	65.66	105.20	-39.54
5925.00	Peak	48.92	6.42	55.34	68.20	-12.86

Report No.: T191111W02-RP4

Below 1G Test Data

PCB Antenna

Test Mode	Mode 1	Temp/Hum	19.1(°C)/ 54%RH
Test Item	30MHz-1GHz	Test Date	December 31, 2019
Polarize	Vertical	Test Engineer	Jerry Chang
Detector	Peak		

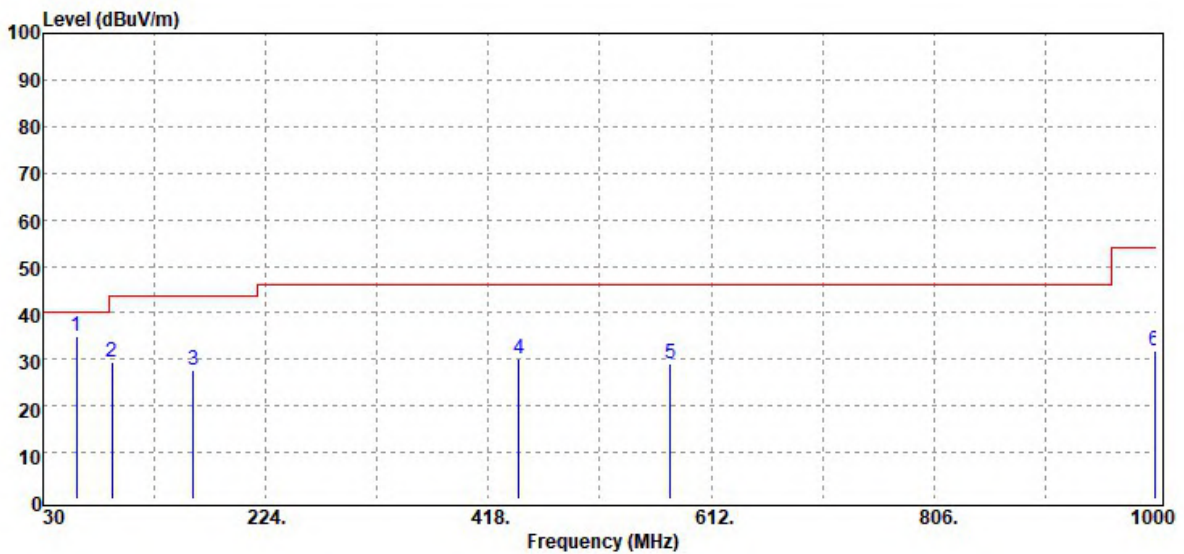


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dB μ V	Factor dB	Actual FS dB μ V/m	Limit @3m dB μ V/m	Margin dB
59.10	Peak	50.99	-15.96	35.03	40.00	-4.97
90.14	Peak	44.50	-15.23	29.27	43.50	-14.23
160.95	Peak	37.87	-10.18	27.69	43.50	-15.81
444.19	Peak	34.21	-4.11	30.10	46.00	-15.90
576.11	Peak	31.06	-1.82	29.24	46.00	-16.76
998.06	Peak	26.50	5.20	31.70	54.00	-22.30

Note: 1. No emission found between lowest internal used/generated frequency to 30MHz(9KHz~30MHz)
2. For below 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit.

Report No.: T191111W02-RP4

Test Mode	Mode 1	Temp/Hum	19.1(°C)/ 54%RH
Test Item	30MHz-1GHz	Test Date	December 31, 2019
Polarize	Horizontal	Test Engineer	Jerry Chang
Detector	Peak		

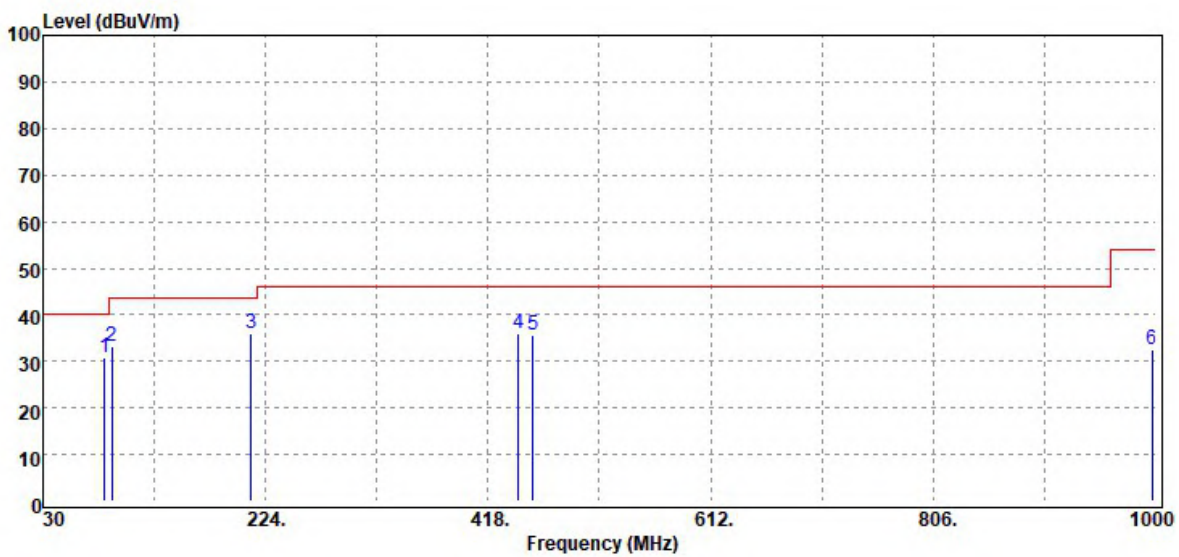


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dB μ V	Factor dB	Actual FS dB μ V/m	Limit @3m dB μ V/m	Margin dB
83.35	Peak	46.15	-15.52	30.63	40.00	-9.37
90.14	Peak	48.54	-15.23	33.31	43.50	-10.19
211.39	Peak	47.62	-11.57	36.05	43.50	-7.45
444.19	Peak	40.13	-4.11	36.02	46.00	-9.98
456.80	Peak	39.27	-3.76	35.51	46.00	-10.49
997.09	Peak	27.35	5.21	32.56	54.00	-21.44

Note: 1. No emission found between lowest internal used/generated frequency to 30MHz(9KHz~30MHz)
 2. For below 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit.

Report No.: T191111W02-RP4

Chip Antenna

Test Mode	Mode 1	Temp/Hum	22.5(°C)/ 59%RH
Test Item	30MHz-1GHz	Test Date	November 29, 2019
Polarize	Vertical	Test Engineer	Jerry Chang
Detector	Peak		

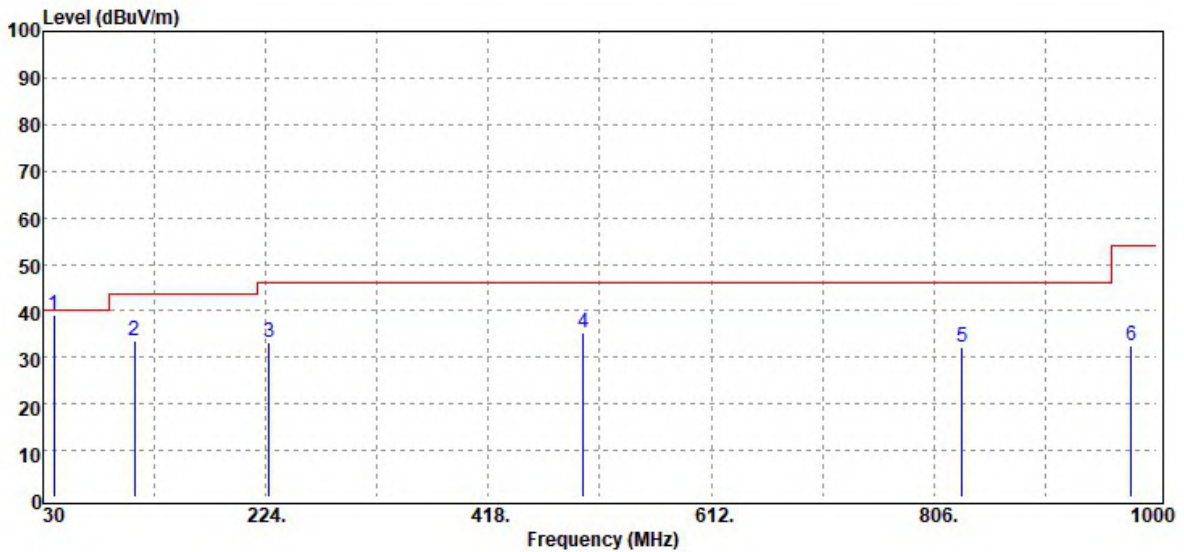


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBµV	Factor dB	Actual FS dBµV/m	Limit @3m dBµV/m	Margin dB
39.70	Peak	48.49	-9.31	39.18	40.00	-0.82
109.54	Peak	43.68	-10.16	33.52	43.50	-9.98
226.91	Peak	44.34	-11.01	33.33	46.00	-12.67
500.45	Peak	38.35	-2.93	35.42	46.00	-10.58
830.25	Peak	28.83	3.28	32.11	46.00	-13.89
977.69	Peak	26.95	5.53	32.48	54.00	-21.52

Note: 1. No emission found between lowest internal used/generated frequency to 30MHz(9KHz~30MHz)
 2. For below 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit.

Report No.: T191111W02-RP4

Test Mode	Mode 1	Temp/Hum	22.5(°C)/ 59%RH
Test Item	30MHz-1GHz	Test Date	November 29, 2019
Polarize	Horizontal	Test Engineer	Jerry Chang
Detector	Peak		

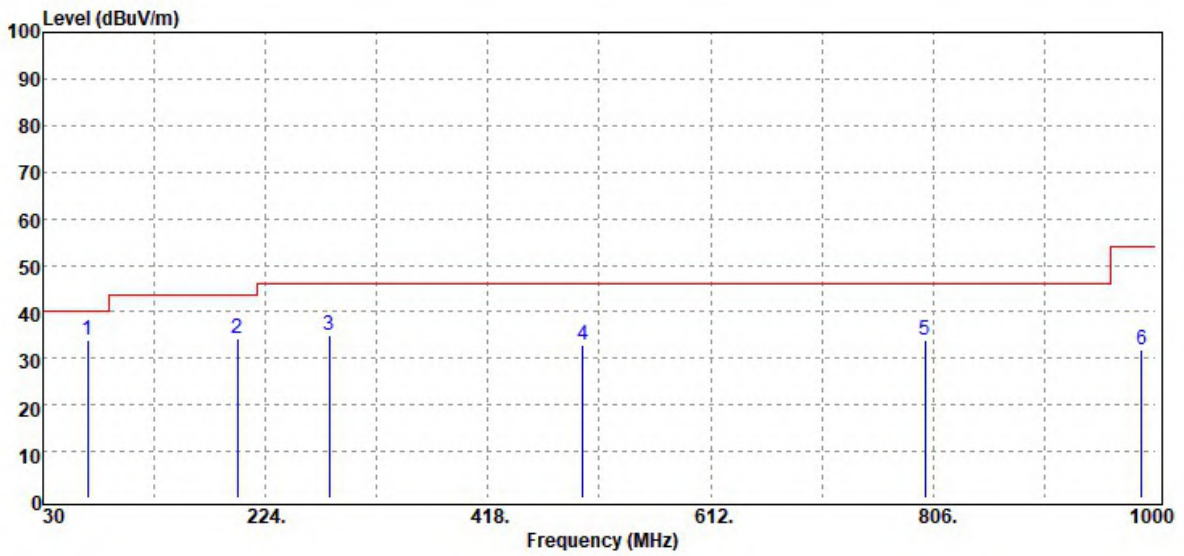


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dB μ V	Factor dB	Actual FS dB μ V/m	Limit @3m dB μ V/m	Margin dB
68.80	Peak	48.77	-14.93	33.84	40.00	-6.16
199.75	Peak	43.63	-9.29	34.34	43.50	-9.16
279.29	Peak	43.25	-8.40	34.85	46.00	-11.15
500.45	Peak	35.74	-2.93	32.81	46.00	-13.19
799.21	Peak	32.54	1.52	34.06	46.00	-11.94
987.39	Peak	26.50	5.46	31.96	54.00	-22.04

Note: 1. No emission found between lowest internal used/generated frequency to 30MHz(9KHz~30MHz)
 2. For below 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit.

Report No.: T191111W02-RP4

Dipole Antenna

Test Mode	Mode 1	Temp/Hum	22.1(°C)/ 58%RH
Test Item	30MHz-1GHz	Test Date	December 26, 2019
Polarize	Vertical	Test Engineer	Jerry Chang
Detector	Peak		

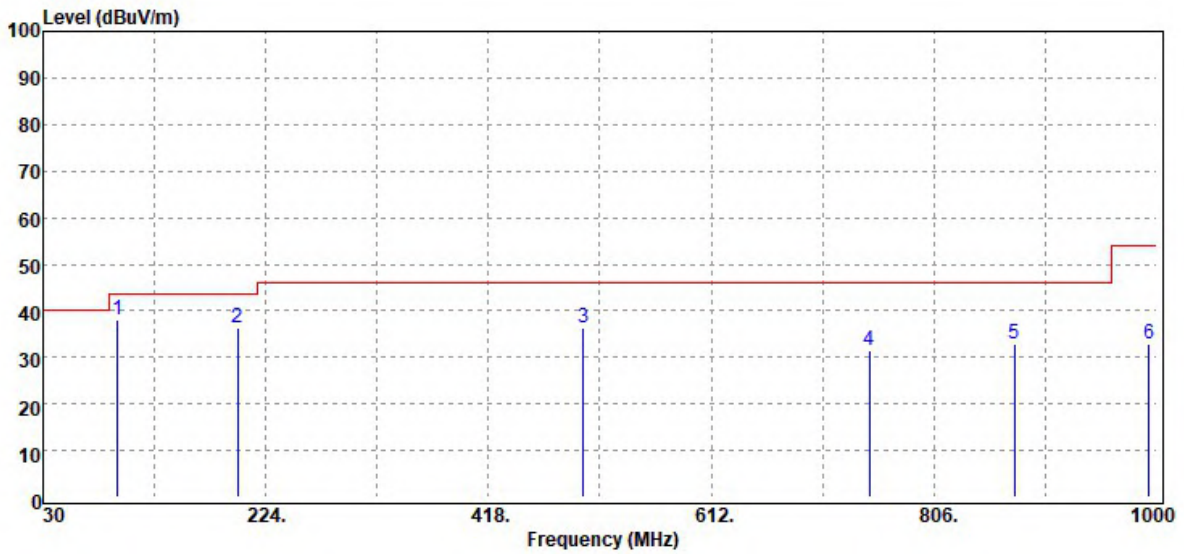


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBµV	Factor dB	Actual FS dBUV/m	Limit @3m dBUV/m	Margin dB
94.99	Peak	52.28	-14.24	38.04	43.50	-5.46
199.75	Peak	45.66	-9.29	36.37	43.50	-7.13
500.45	Peak	39.18	-2.93	36.25	46.00	-9.75
749.74	Peak	29.34	2.12	31.46	46.00	-14.54
875.84	Peak	29.56	3.30	32.86	46.00	-13.14
993.21	Peak	27.84	5.17	33.01	54.00	-20.99

Note: 1. No emission found between lowest internal used/generated frequency to 30MHz(9KHz~30MHz)
 2. For below 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit.

Report No.: T191111W02-RP4

Test Mode	Mode 1	Temp/Hum	22.1(°C)/ 58%RH
Test Item	30MHz-1GHz	Test Date	December 26, 2019
Polarize	Horizontal	Test Engineer	Jerry Chang
Detector	Peak		

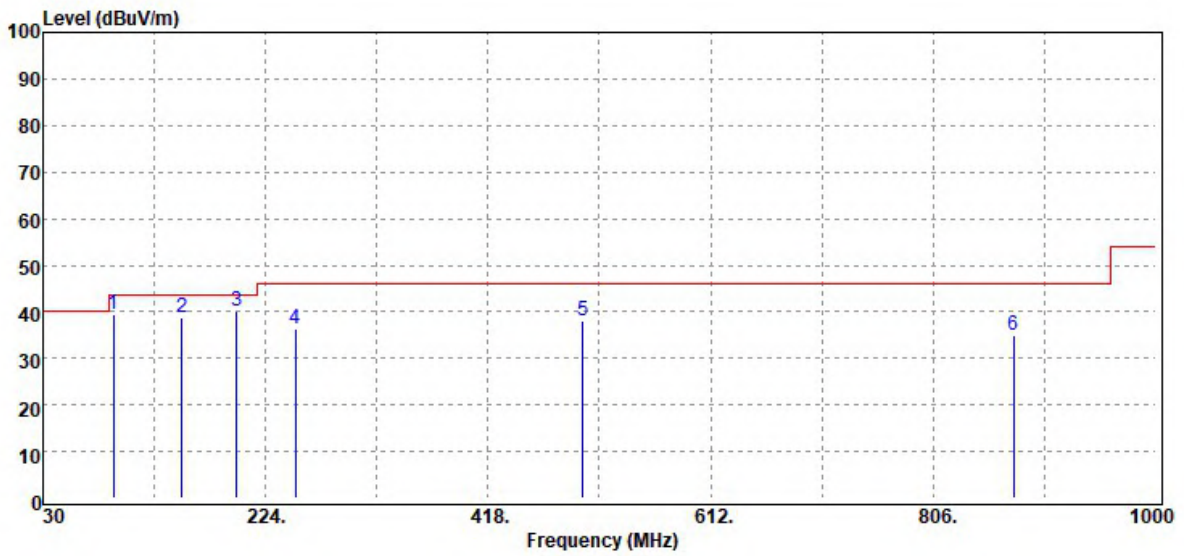

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dB μ V	Factor dB	Actual FS dB μ V/m	Limit @3m dB μ V/m	Margin dB
91.11	Peak	54.46	-15.12	39.34	43.50	-4.16
151.25	Peak	48.53	-9.90	38.63	43.50	-4.87
198.78	Peak	49.38	-9.26	40.12	43.50	-3.38
250.19	Peak	46.78	-10.40	36.38	46.00	-9.62
500.45	Peak	41.14	-2.93	38.21	46.00	-7.79
875.84	Peak	31.55	3.30	34.85	46.00	-11.15

Note: 1. No emission found between lowest internal used/generated frequency to 30MHz(9KHz~30MHz)
 2. For below 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit.


Report No.: T191111W02-RP4

Above 1G

PCB Antenna

Test Data for UNII-1

Test Mode	IEEE 802.11a / 5180MHZ	Temp/Hum	19.1(°C)/ 54%RH
Test Item	Harmonic	Test Date	December 26, 2019
Polarize	Vertical	Test Engineer	Jerry Chang
Detector	Peak		

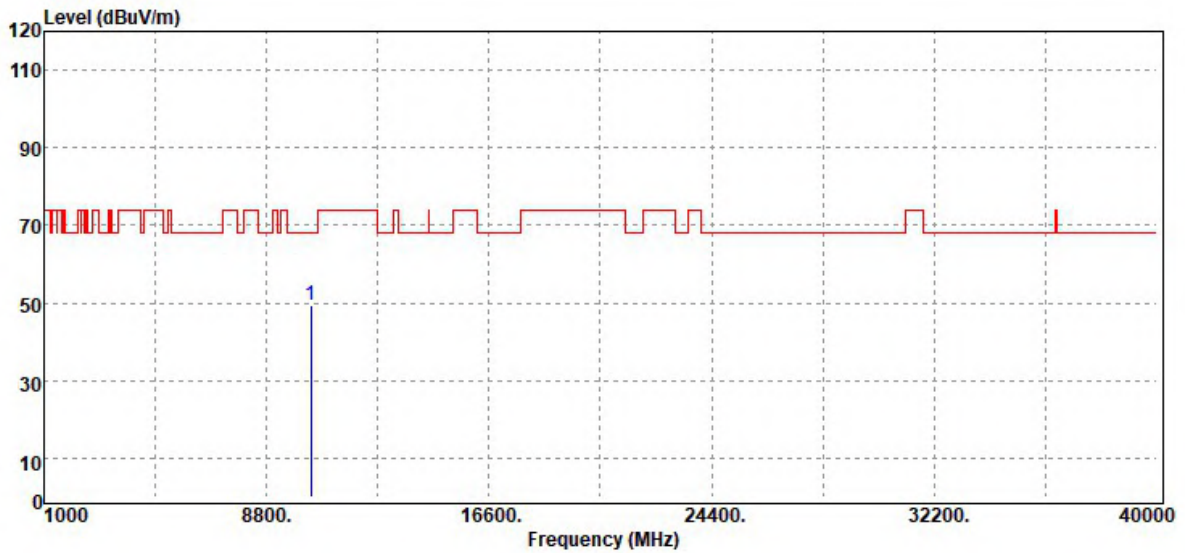


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBuV	Factor dB	Actual FS dBuV/m	Limit @3m dBuV/m	Margin dB
10360.00	Peak	35.11	14.12	49.23	68.20	-18.97
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Report No.: T191111W02-RP4

Test Mode	IEEE 802.11a / 5180MHZ	Temp/Hum	19.1(°C)/ 54%RH
Test Item	Harmonic	Test Date	December 26, 2019
Polarize	Horizontal	Test Engineer	Jerry Chang
Detector	Peak		

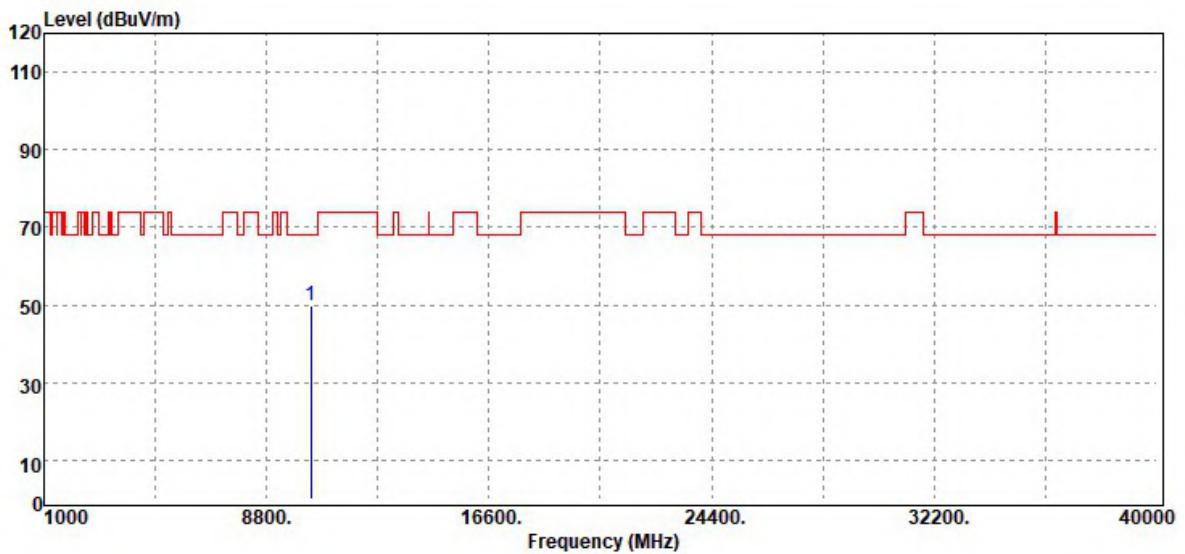


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBuV	Factor dB	Actual FS dBuV/m	Limit @3m dBuV/m	Margin dB
10360.00	Peak	35.52	14.12	49.64	68.20	-18.56
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Report No.: T191111W02-RP4

Test Mode	IEEE 802.11a / 5220 MHz	Temp/Hum	19.1(°C)/ 54%RH
Test Item	Harmonics	Test Date	December 26, 2019
Polarize	Vertical	Test Engineer	Jerry Chang
Detector	Peak		

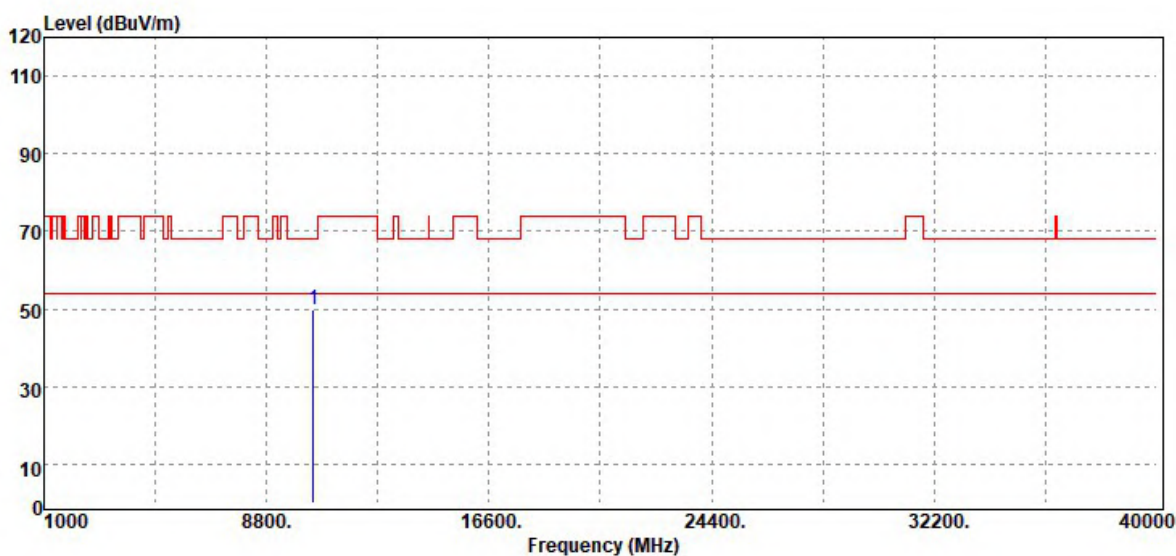


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBuV	Factor dB	Actual FS dBuV/m	Limit @3m dBuV/m	Margin dB
10440.00	Peak	34.61	15.21	49.82	68.20	-18.38
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Report No.: T191111W02-RP4

Test Mode	IEEE 802.11a / 5220 MHz	Temp/Hum	19.1(°C)/ 54%RH
Test Item	Harmonic	Test Date	December 26, 2019
Polarize	Horizontal	Test Engineer	Jerry Chang
Detector	Peak		

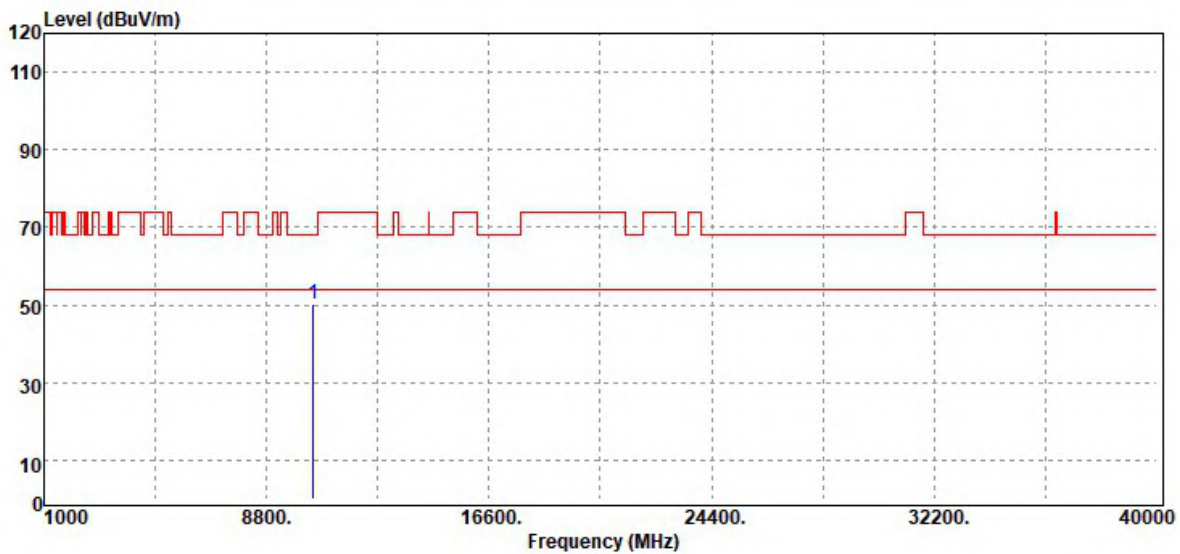


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
10440.00	Peak	34.92	15.21	50.13	68.20	-18.07
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Report No.: T191111W02-RP4

Test Mode	IEEE 802.11a / 5240MHZ	Temp/Hum	19.1(°C)/ 54%RH
Test Item	Harmonic	Test Date	December 26, 2019
Polarize	Vertical	Test Engineer	Jerry Chang
Detector	Peak		

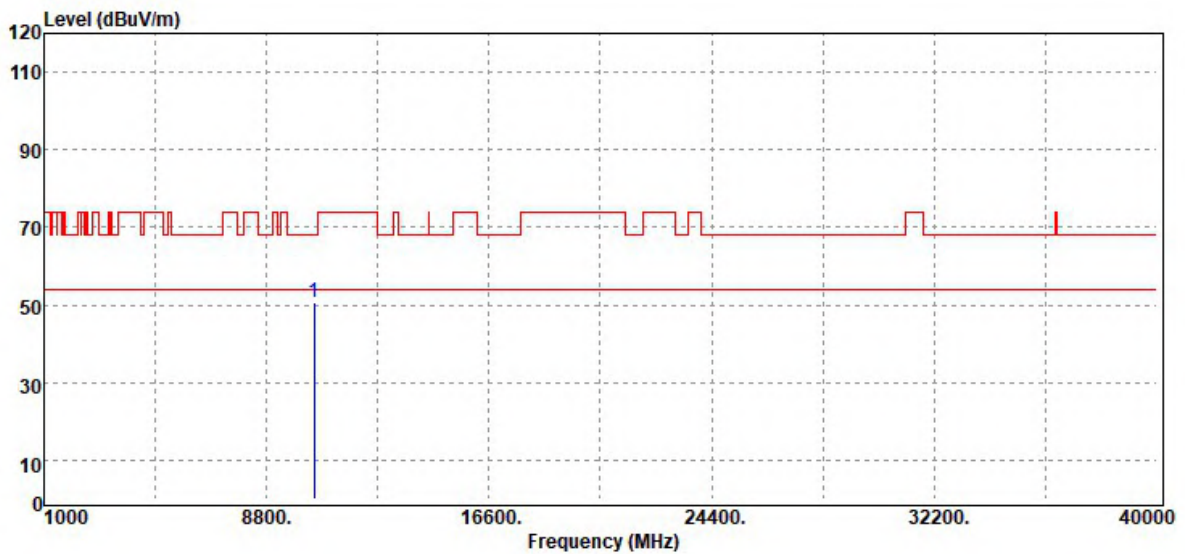


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBuV	Factor dB	Actual FS dBuV/m	Limit @3m dBuV/m	Margin dB
10480.00	Peak	34.62	16.09	50.71	68.20	-17.49
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Report No.: T191111W02-RP4

Test Mode	IEEE 802.11a / 5240MHZ	Temp/Hum	19.1(°C)/ 54%RH
Test Item	Harmonic	Test Date	December 26, 2019
Polarize	Horizontal	Test Engineer	Jerry Chang
Detector	Peak		

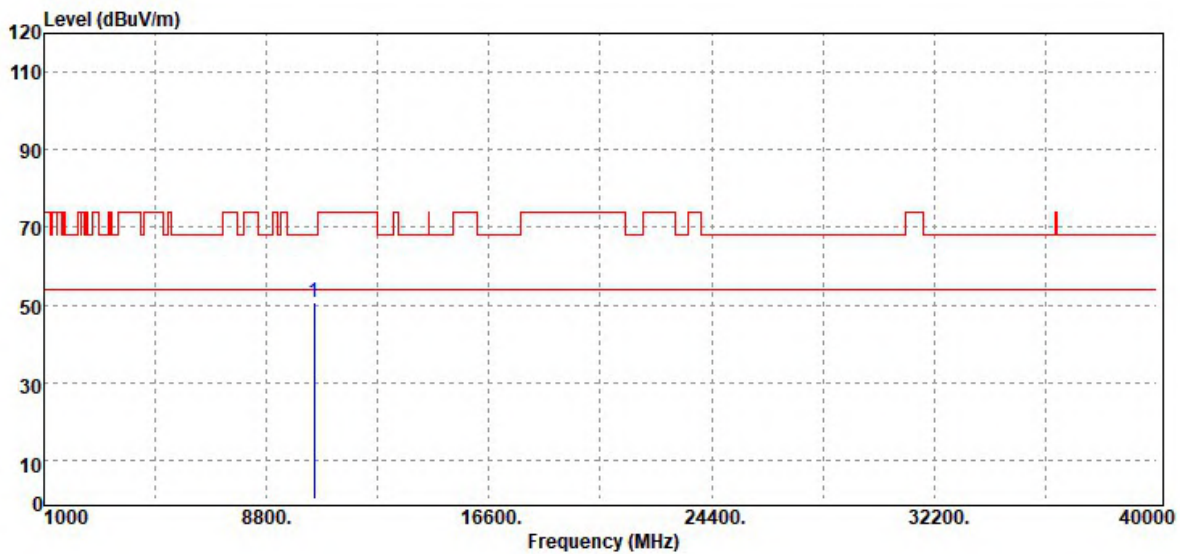


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBµV	Factor dB	Actual FS dBµV/m	Limit @3m dBµV/m	Margin dB
10480.00	Peak	34.71	16.09	50.80	68.20	-17.40
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Report No.: T191111W02-RP4

Test Mode	IEEE 802.11n 20 MHz / 5180MHZ	Temp/Hum	19.1(°C)/ 54%RH
Test Item	Harmonic	Test Date	December 26, 2019
Polarize	Vertical	Test Engineer	Jerry Chang
Detector	Peak		

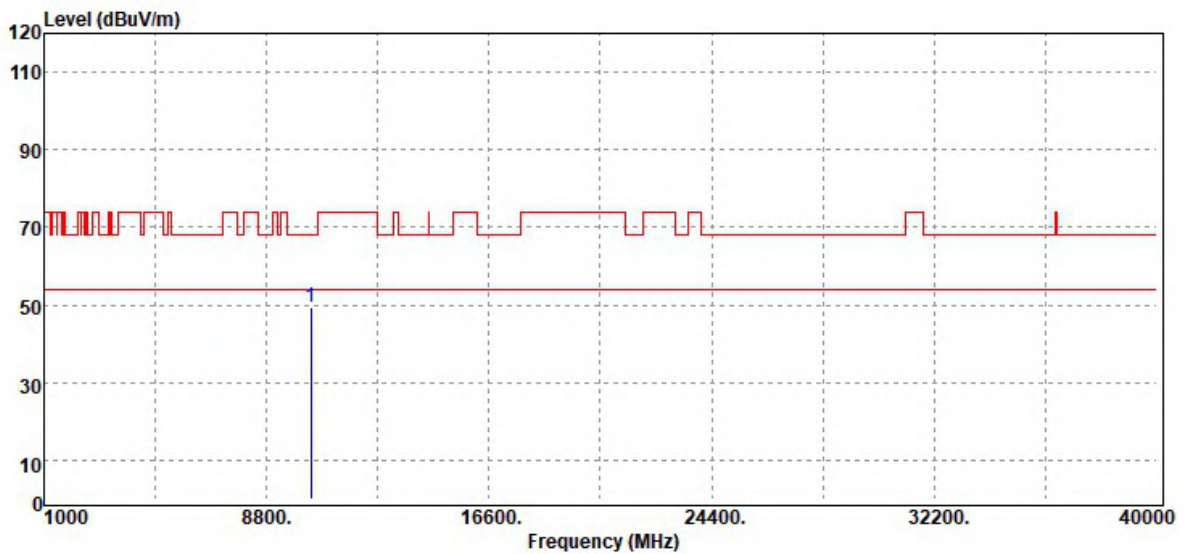


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBuV	Factor dB	Actual FS dBuV/m	Limit @3m dBuV/m	Margin dB
10360.00	Peak	35.27	14.12	49.39	68.20	-18.81
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Report No.: T191111W02-RP4

Test Mode	IEEE 802.11n 20 MHz/ 5180MHZ	Temp/Hum	19.1(°C)/ 54%RH
Test Item	Harmonic	Test Date	December 26, 2019
Polarize	Horizontal	Test Engineer	Jerry Chang
Detector	Peak		

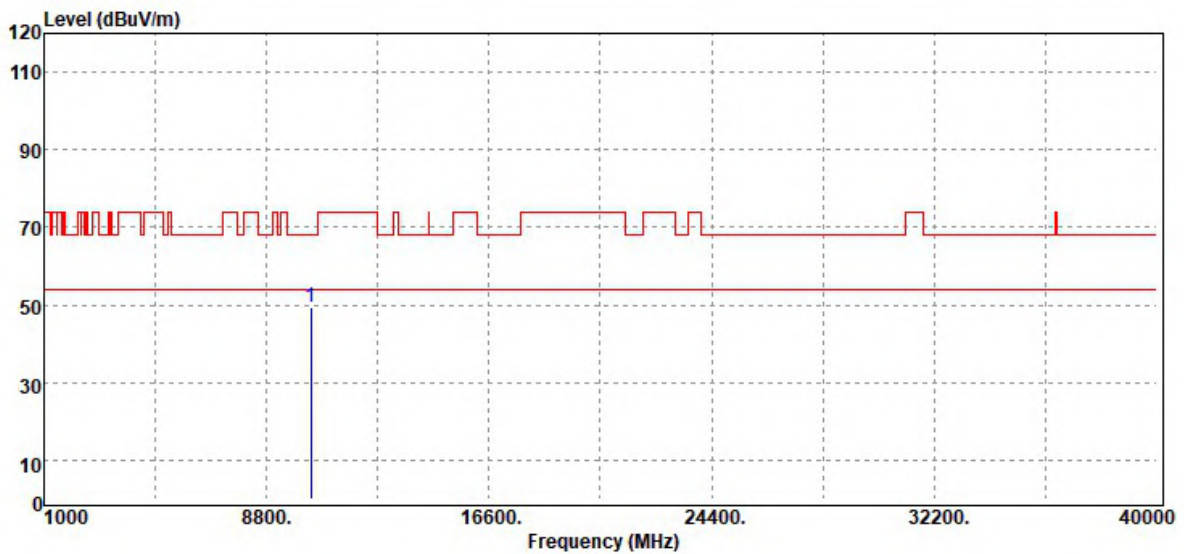


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBuV	Factor dB	Actual FS dBuV/m	Limit @3m dBuV/m	Margin dB
10360.00	Peak	35.25	14.12	49.37	68.20	-18.83
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Report No.: T191111W02-RP4

Test Mode	IEEE 802.11n 20 MHz / 5220MHz	Temp/Hum	19.1(°C)/ 54%RH
Test Item	Harmonic	Test Date	December 26, 2019
Polarize	Vertical	Test Engineer	Jerry Chang
Detector	Peak		

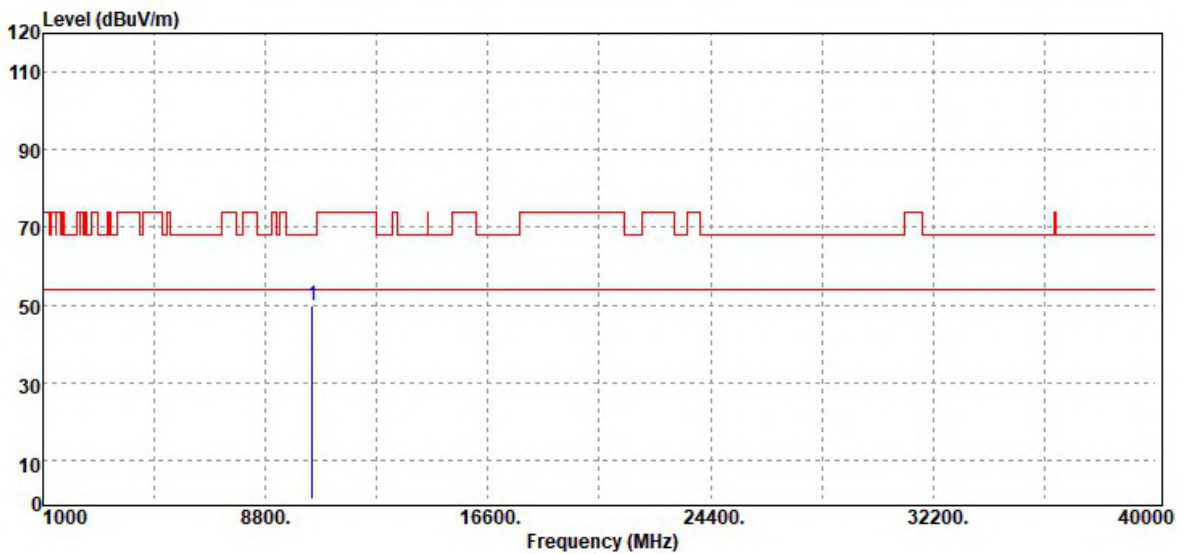


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBuV	Factor dB	Actual FS dBuV/m	Limit @3m dBuV/m	Margin dB
10440.00	Peak	34.46	15.21	49.67	68.20	-18.53
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Report No.: T191111W02-RP4

Test Mode	IEEE 802.11n 20 MHz / 5220MHz	Temp/Hum	19.1(°C)/ 54%RH
Test Item	Harmonic	Test Date	December 26, 2019
Polarize	Horizontal	Test Engineer	Jerry Chang
Detector	Peak		

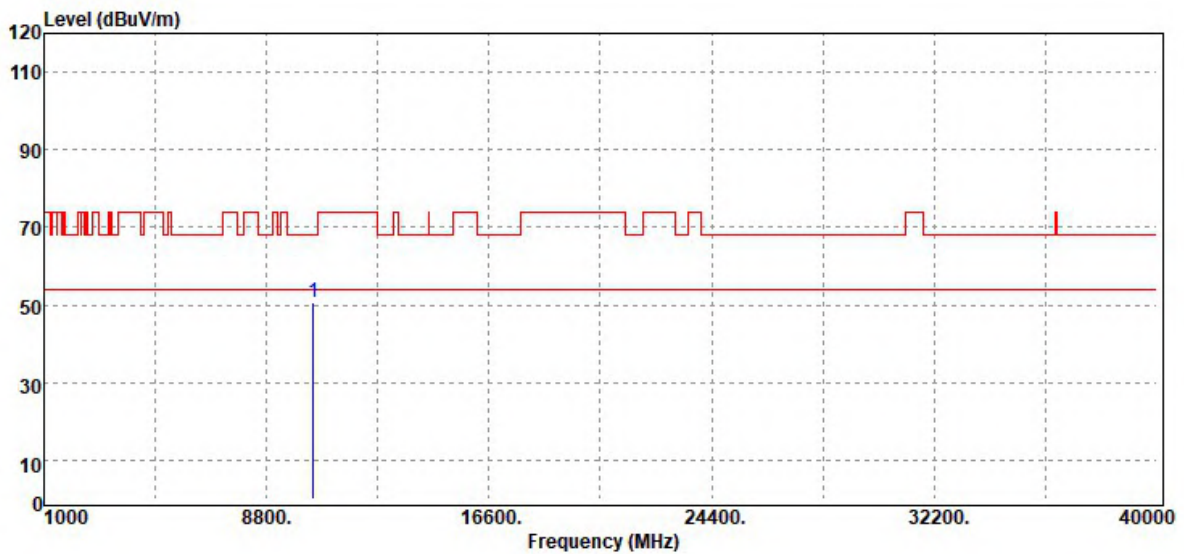


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBµV	Factor dB	Actual FS dBµV/m	Limit @3m dBµV/m	Margin dB
10440.00	Peak	35.45	15.21	50.66	68.20	-17.54
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Report No.: T191111W02-RP4

Test Mode	IEEE 802.11n 20 MHz / 5240MHZ	Temp/Hum	19.1(°C)/ 54%RH
Test Item	Harmonic	Test Date	December 26, 2019
Polarize	Vertical	Test Engineer	Jerry Chang
Detector	Peak		

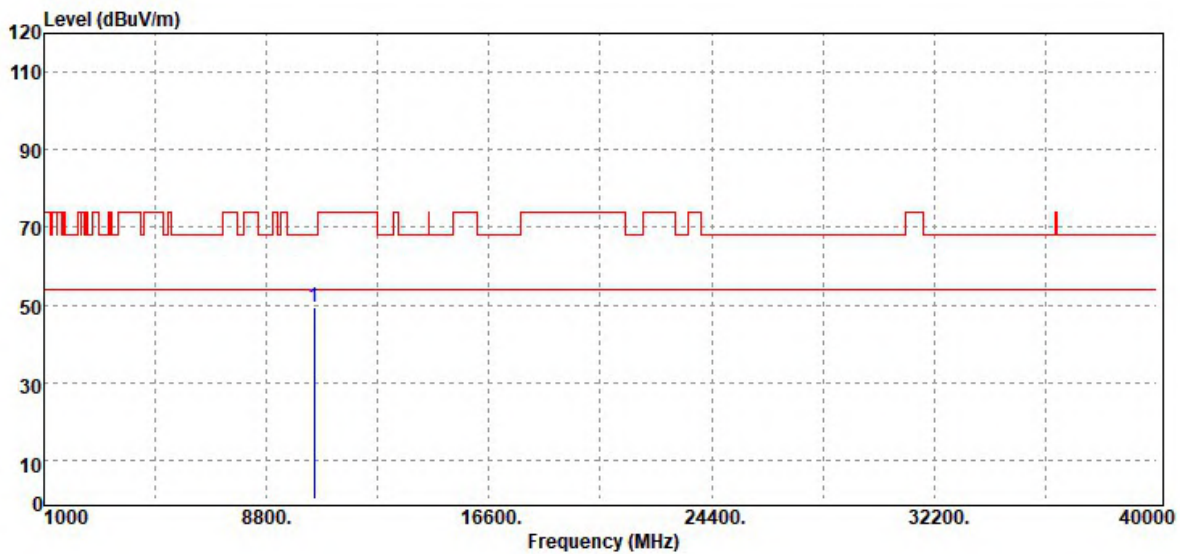


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBuV	Factor dB	Actual FS dBuV/m	Limit @3m dBuV/m	Margin dB
10480.00	Peak	33.52	16.09	49.61	68.20	-18.59
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Report No.: T191111W02-RP4

Test Mode	IEEE 802.11n 20 MHz / 5240MHZ	Temp/Hum	19.1(°C)/ 54%RH
Test Item	Harmonic	Test Date	December 26, 2019
Polarize	Horizontal	Test Engineer	Jerry Chang
Detector	Peak		

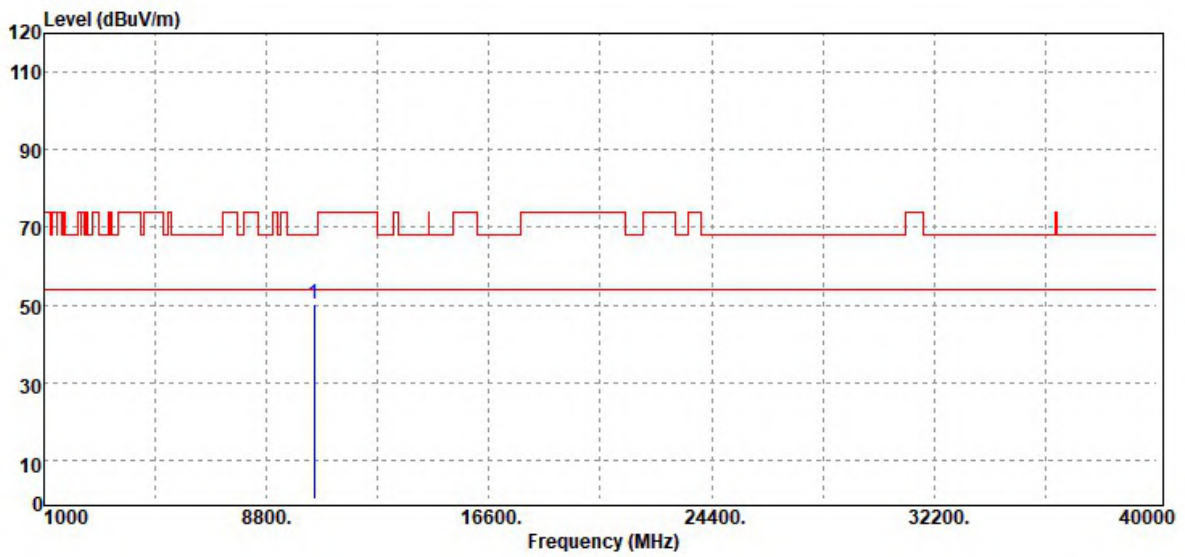


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
10480.00	Peak	34.35	16.09	50.44	68.20	-17.76
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Report No.: T191111W02-RP4

Test Mode	IEEE 802.11n 40 MHz / 5190MHz	Temp/Hum	19.1(°C)/ 54%RH
Test Item	Harmonic	Test Date	December 26, 2019
Polarize	Vertical	Test Engineer	Jerry Chang
Detector	Peak		

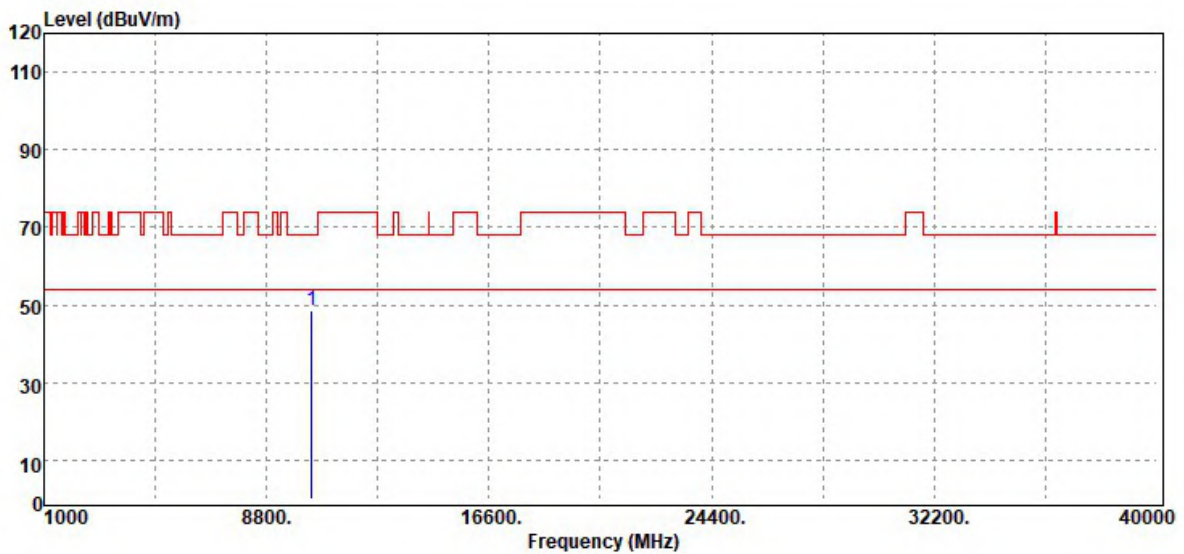


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBuV	Factor dB	Actual FS dBuV/m	Limit @3m dBuV/m	Margin dB
10380.00	Peak	34.18	14.23	48.41	68.20	-19.79
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Report No.: T191111W02-RP4

Test Mode	IEEE 802.11n 40 MHz / 5190MHZ	Temp/Hum	19.1(°C)/ 54%RH
Test Item	Harmonic	Test Date	December 26, 2019
Polarize	Horizontal	Test Engineer	Jerry Chang
Detector	Peak		

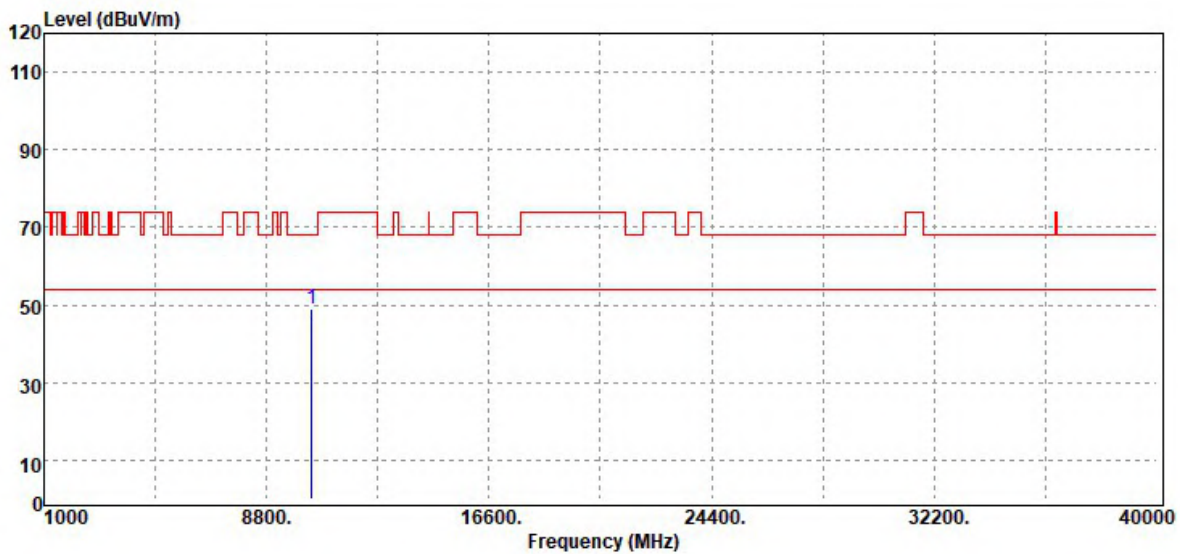


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBuV	Factor dB	Actual FS dBuV/m	Limit @3m dBuV/m	Margin dB
10380.00	Peak	34.58	14.23	48.81	68.20	-19.39
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Report No.: T191111W02-RP4

Test Mode	IEEE 802.11n 40 MHz / 5230MHZ	Temp/Hum	19.1(°C)/ 54%RH
Test Item	Harmonic	Test Date	December 26, 2019
Polarize	Vertical	Test Engineer	Jerry Chang
Detector	Peak		

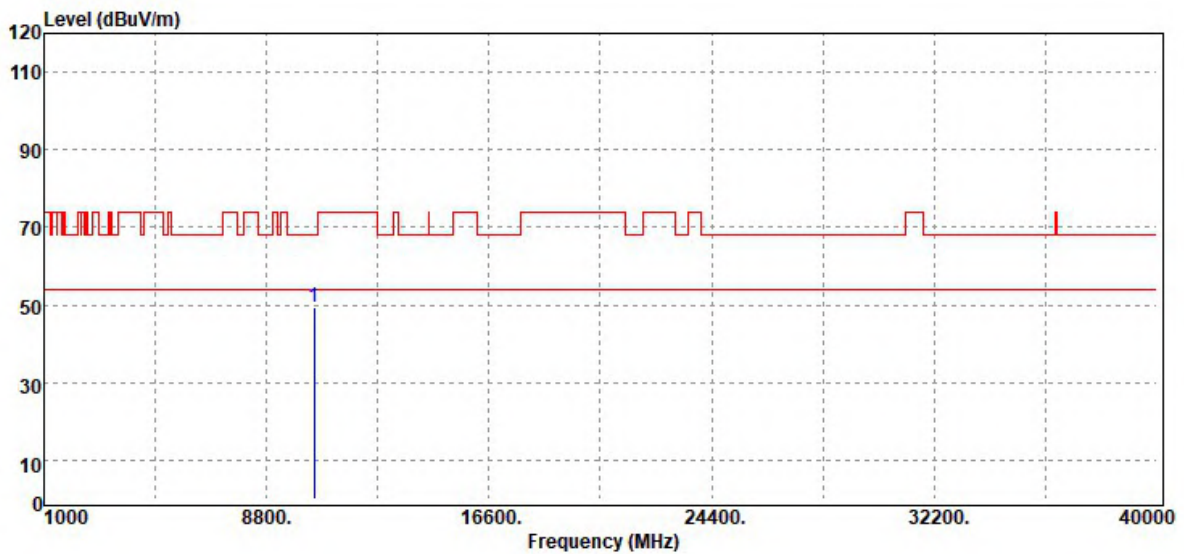


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBuV	Factor dB	Actual FS dBuV/m	Limit @3m dBuV/m	Margin dB
10460.00	Peak	33.77	15.65	49.42	68.20	-18.78
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Report No.: T191111W02-RP4

Test Mode	IEEE 802.11n 40 MHz / 5230MHZ	Temp/Hum	19.1(°C)/ 54%RH
Test Item	Harmonic	Test Date	December 26, 2019
Polarize	Horizontal	Test Engineer	Jerry Chang
Detector	Peak		

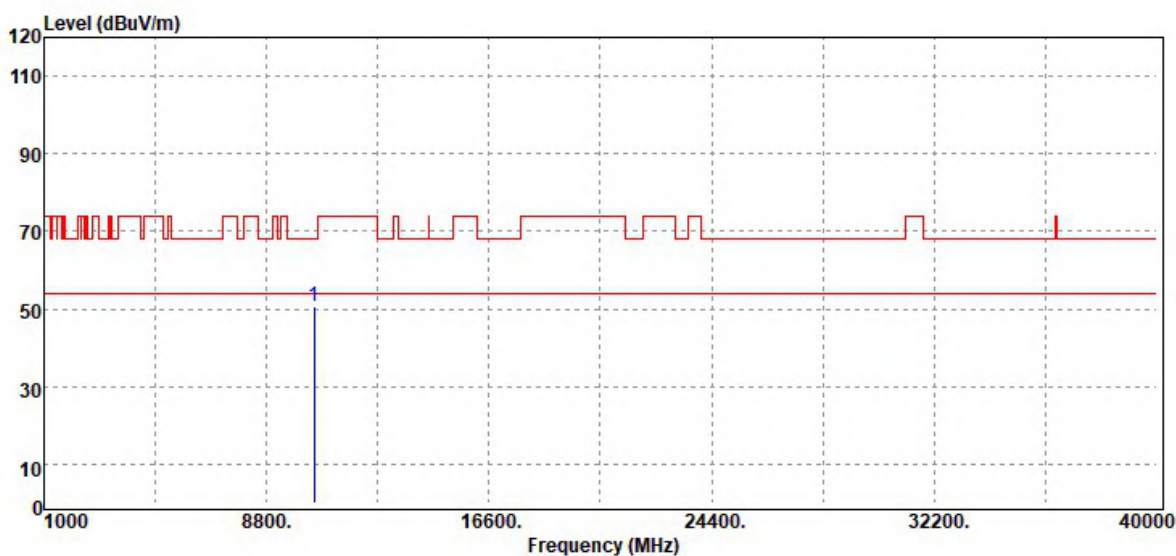


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
10460.00	Peak	34.85	15.65	50.50	68.20	-17.70
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Report No.: T191111W02-RP4

Test Mode	IEEE 802.11ac VHT80 / 5210MHZ	Temp/Hum	19.1(°C)/ 54%RH
Test Item	Harmonic	Test Date	December 26, 2019
Polarize	Vertical	Test Engineer	Jerry Chang
Detector	Peak		

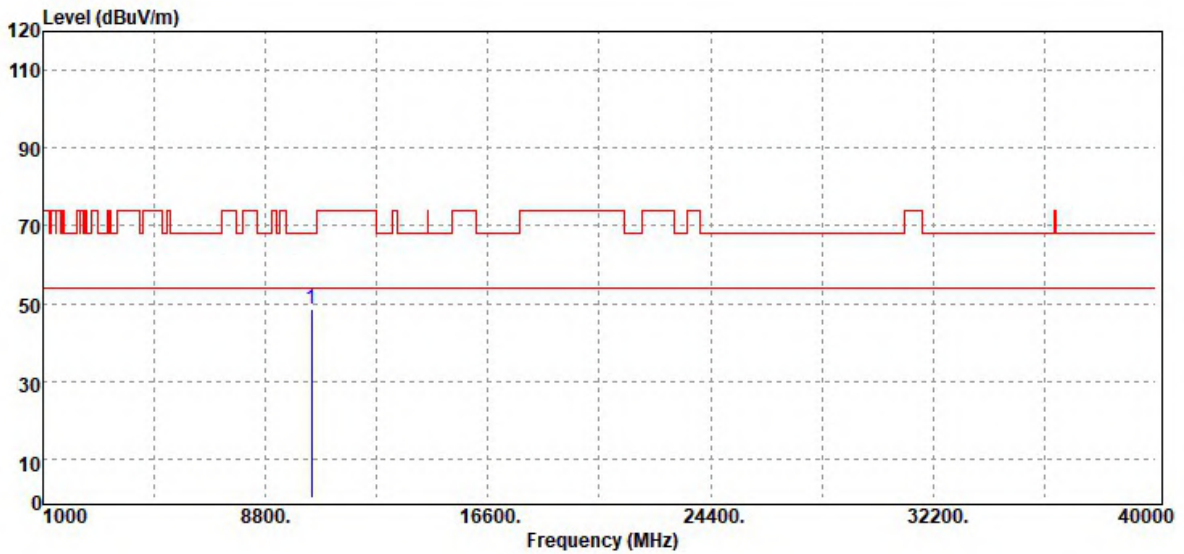


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dB μ V	Factor dB	Actual FS dB μ V/m	Limit @3m dB μ V/m	Margin dB
10420.00	Peak	33.78	14.78	48.56	68.20	-19.64
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Report No.: T191111W02-RP4

Test Mode	IEEE 802.11ac VHT80 / 5210MHZ	Temp/Hum	19.1(°C)/ 54%RH
Test Item	Harmonic	Test Date	December 26, 2019
Polarize	Horizontal	Test Engineer	Jerry Chang
Detector	Peak		

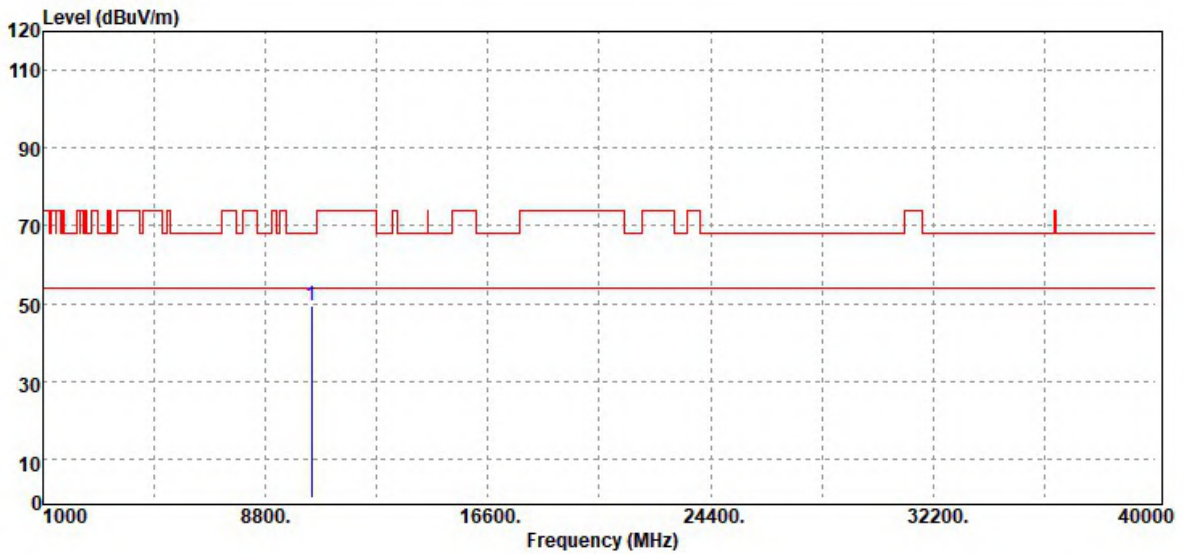

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dB μ V	Factor dB	Actual FS dB μ V/m	Limit @3m dB μ V/m	Margin dB
10420.00	Peak	34.53	14.78	49.31	68.20	-18.89
N/A						


Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Report No.: T191111W02-RP4

Test Data for UNII-2a

Test Mode	IEEE 802.11a / 5260 MHz	Temp/Hum	19.1(°C)/ 54%RH
Test Item	Harmonic	Test Date	December 26, 2019
Polarize	Vertical	Test Engineer	Jerry Chang
Detector	Peak		

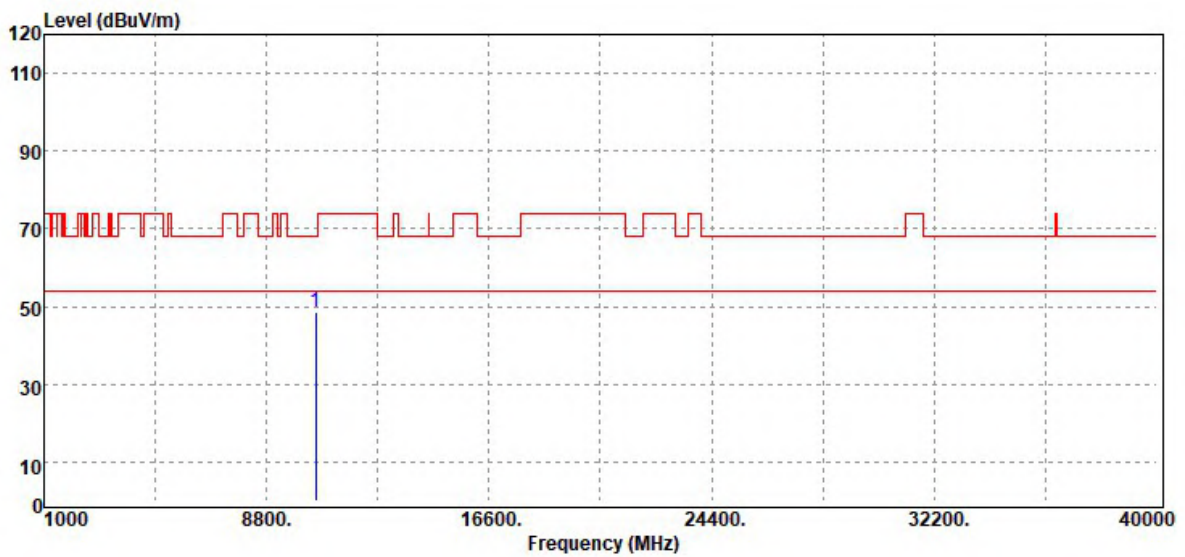


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBµV	Factor dB	Actual FS dBµV/m	Limit @3m dBµV/m	Margin dB
10520.00	Peak	33.14	15.33	48.47	68.20	-19.73
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Report No.: T191111W02-RP4

Test Mode	IEEE 802.11a / 5260 MHz	Temp/Hum	19.1(°C)/ 54%RH
Test Item	Harmonic	Test Date	December 26, 2019
Polarize	Horizontal	Test Engineer	Jerry Chang
Detector	Peak		

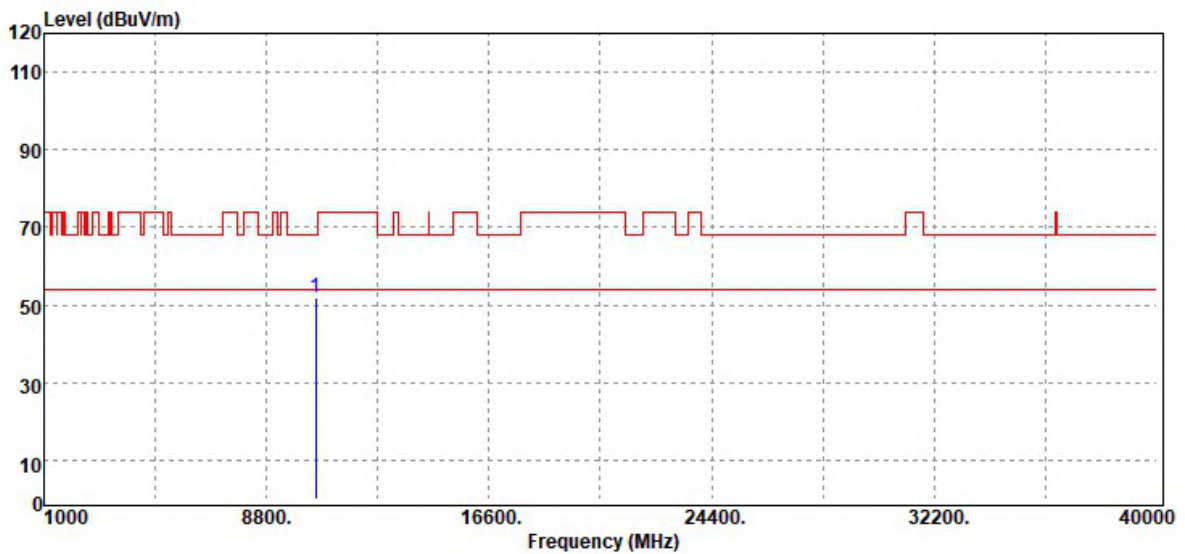


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBuV	Factor dB	Actual FS dBuV/m	Limit @3m dBuV/m	Margin dB
10520.00	Peak	36.61	15.33	51.94	68.20	-16.26
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Report No.: T191111W02-RP4

Test Mode	IEEE 802.11a / 5280 MHz	Temp/Hum	19.1(°C)/ 54%RH
Test Item	Harmonic	Test Date	December 26, 2019
Polarize	Vertical	Test Engineer	Jerry Chang
Detector	Peak		

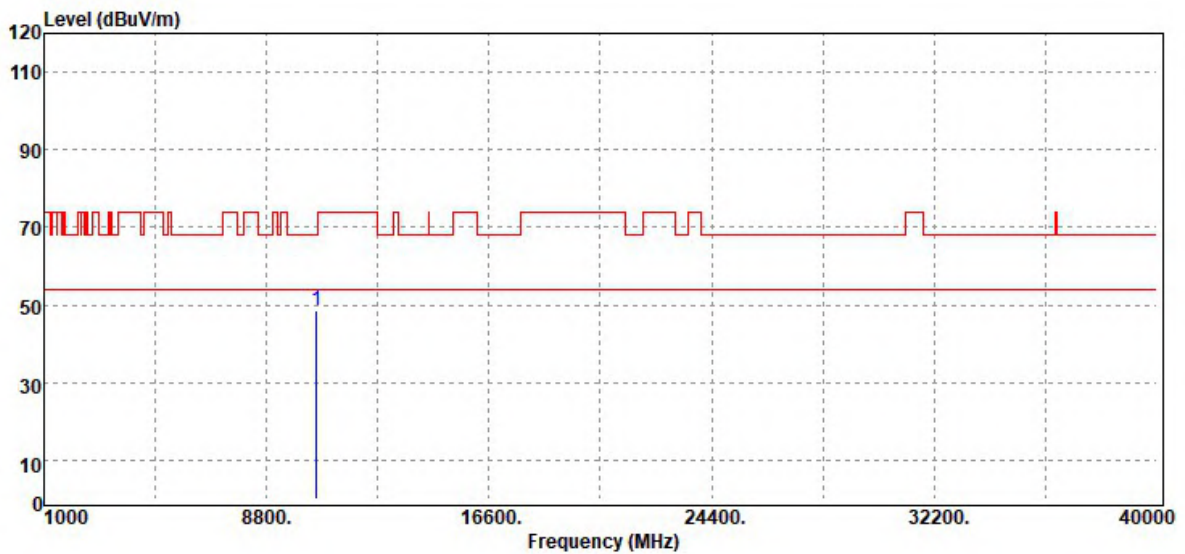


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBuV	Factor dB	Actual FS dBuV/m	Limit @3m dBuV/m	Margin dB
10560.00	Peak	33.90	14.58	48.48	68.20	-19.72
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Report No.: T191111W02-RP4

Test Mode	IEEE 802.11a / 5280 MHz	Temp/Hum	19.1(°C)/ 54%RH
Test Item	Harmonic	Test Date	December 26, 2019
Polarize	Horizontal	Test Engineer	Jerry Chang
Detector	Peak		

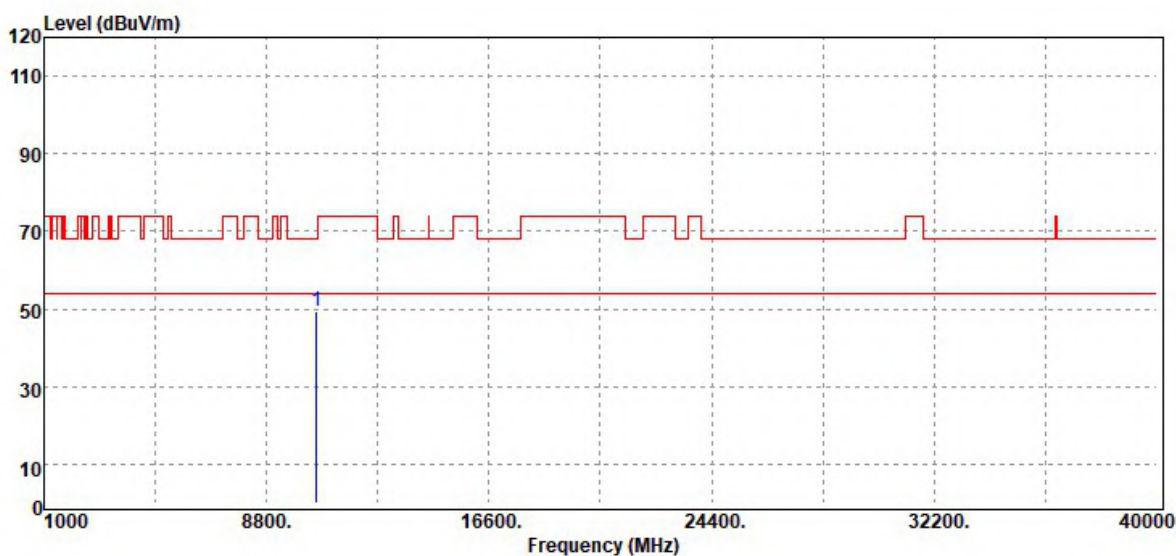


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dB μ V	Factor dB	Actual FS dB μ V/m	Limit @3m dB μ V/m	Margin dB
10560.00	Peak	34.68	14.58	49.26	68.20	-18.94
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Report No.: T191111W02-RP4

Test Mode	IEEE 802.11a / 5320 MHz	Temp/Hum	19.1(°C)/ 54%RH
Test Item	Harmonic	Test Date	December 26, 2019
Polarize	Vertical	Test Engineer	Jerry Chang
Detector	Peak		

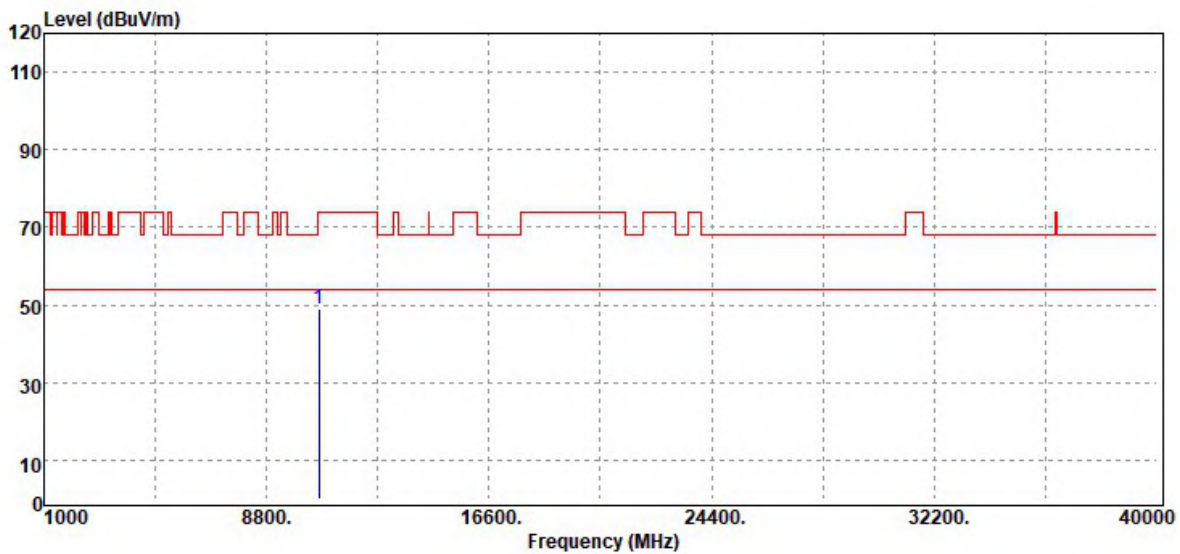


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBuV	Factor dB	Actual FS dBuV/m	Limit @3m dBuV/m	Margin dB
10640.00	Peak	33.82	15.05	48.87	74.00	-25.13
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Report No.: T191111W02-RP4

Test Mode	IEEE 802.11a / 5320 MHz	Temp/Hum	19.1(°C)/ 54%RH
Test Item	Harmonic	Test Date	December 26, 2019
Polarize	Horizontal	Test Engineer	Jerry Chang
Detector	Peak		

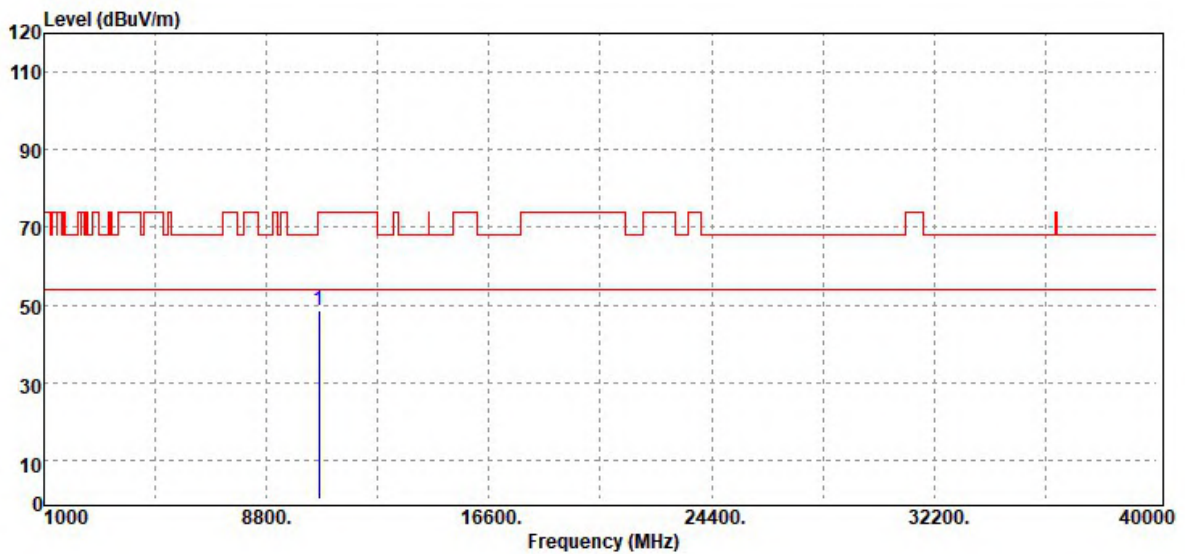


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
10640.00	Peak	33.66	15.05	48.71	74.00	-25.29
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Report No.: T191111W02-RP4

Test Mode	IEEE 802.11n 20 MHz / 5260 MHz	Temp/Hum	19.1(°C)/ 54%RH
Test Item	Harmonic	Test Date	December 26, 2019
Polarize	Vertical	Test Engineer	Jerry Chang
Detector	Peak		

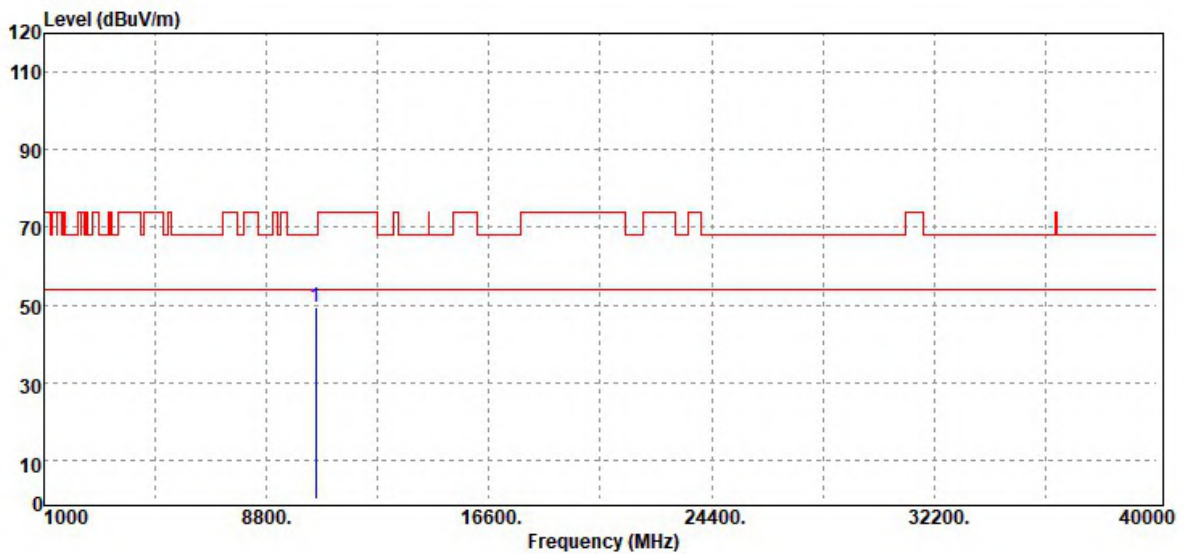


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBuV	Factor dB	Actual FS dBuV/m	Limit @3m dBuV/m	Margin dB
10520.00	Peak	34.24	15.33	49.57	68.20	-18.63
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Report No.: T191111W02-RP4

Test Mode	IEEE 802.11n 20 MHz / 5260 MHz	Temp/Hum	19.1(°C)/ 54%RH
Test Item	Harmonic	Test Date	December 26, 2019
Polarize	Horizontal	Test Engineer	Jerry Chang
Detector	Peak		

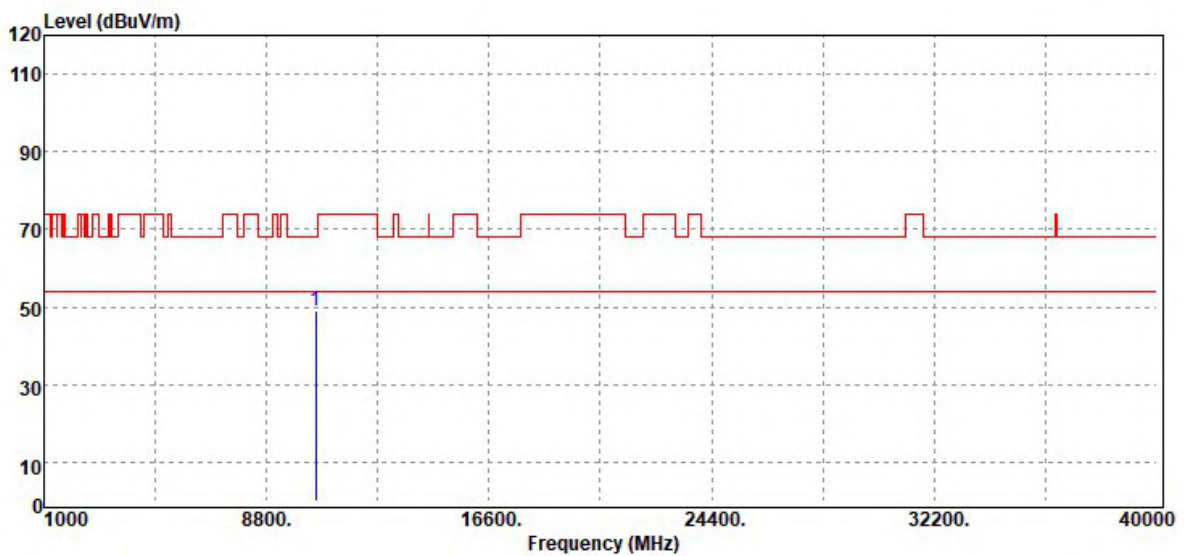


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBuV	Factor dB	Actual FS dBuV/m	Limit @3m dBuV/m	Margin dB
10520.00	Peak	33.73	15.33	49.06	68.20	-19.14
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Report No.: T191111W02-RP4

Test Mode	IEEE 802.11n 20 MHz / 5280 MHz	Temp/Hum	19.1(°C)/ 54%RH
Test Item	Harmonic	Test Date	December 26, 2019
Polarize	Vertical	Test Engineer	Jerry Chang
Detector	Peak		

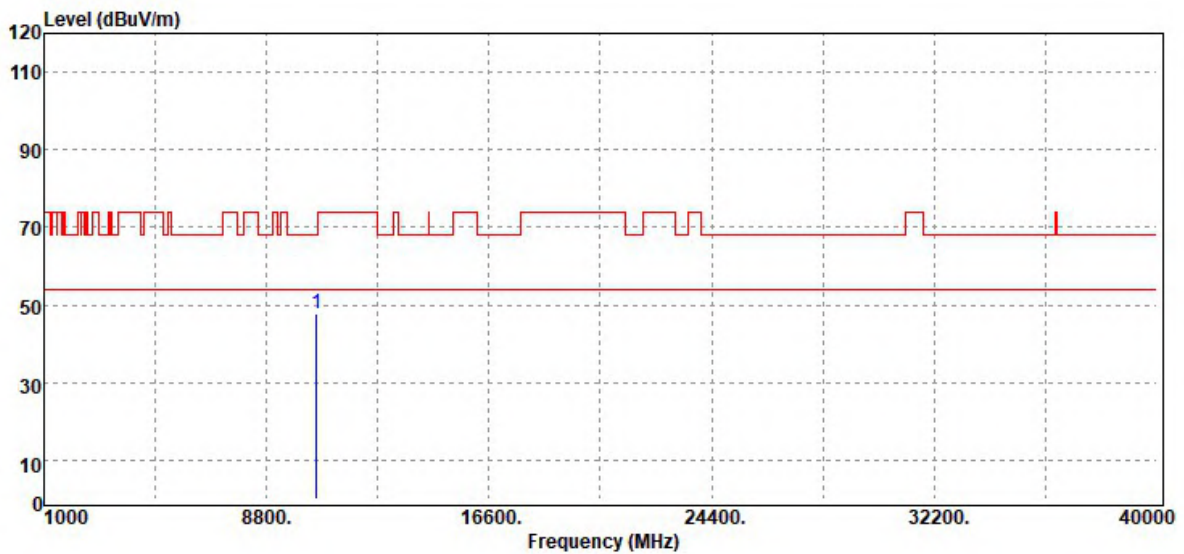


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBuV	Factor dB	Actual FS dBuV/m	Limit @3m dBuV/m	Margin dB
10560.00	Peak	33.25	14.58	47.83	68.20	-20.37
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Report No.: T191111W02-RP4

Test Mode	IEEE 802.11n 20 MHz / 5280 MHz	Temp/Hum	19.1(°C)/ 54%RH
Test Item	Harmonic	Test Date	December 26, 2019
Polarize	Horizontal	Test Engineer	Jerry Chang
Detector	Peak		

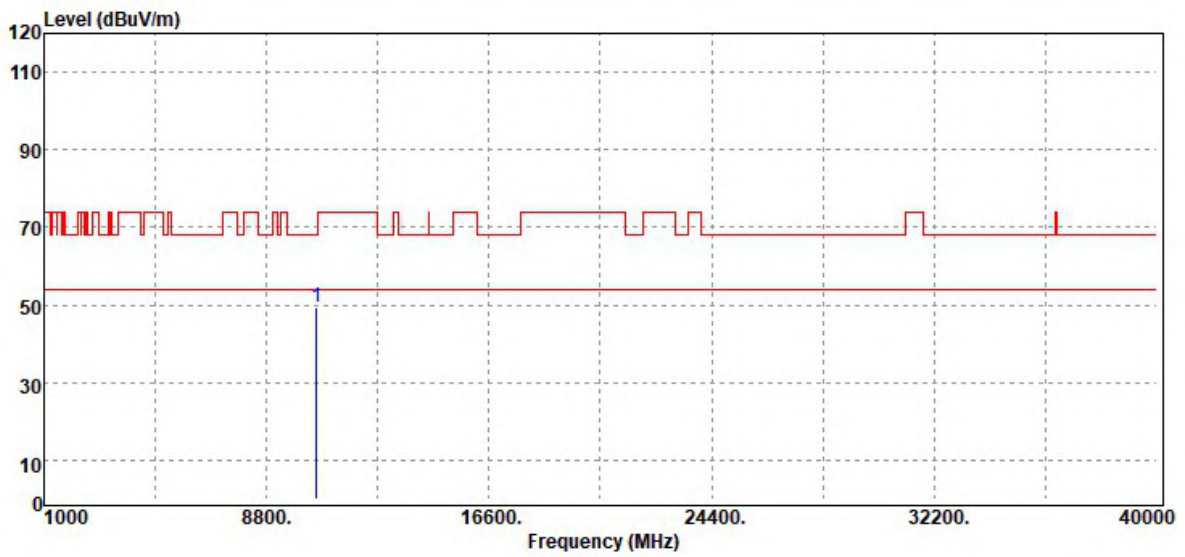


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dB μ V	Factor dB	Actual FS dB μ V/m	Limit @3m dB μ V/m	Margin dB
10560.00	Peak	34.99	14.58	49.57	68.20	-18.63
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Report No.: T191111W02-RP4

Test Mode	IEEE 802.11n 20 MHz / 5320 MHz	Temp/Hum	19.1(°C)/ 54%RH
Test Item	Harmonic	Test Date	December 26, 2019
Polarize	Vertical	Test Engineer	Jerry Chang
Detector	Peak		

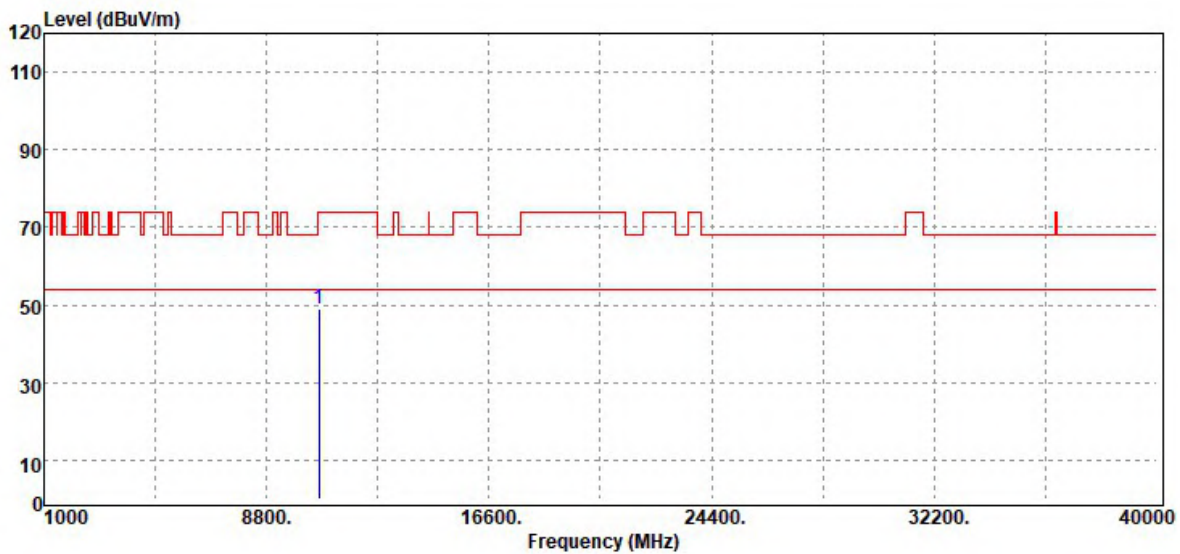


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBuV	Factor dB	Actual FS dBuV/m	Limit @3m dBuV/m	Margin dB
10640.00	Peak	33.85	15.05	48.90	74.00	-25.10
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Report No.: T191111W02-RP4

Test Mode	IEEE 802.11n 20 MHz / 5320 MHz	Temp/Hum	19.1(°C)/ 54%RH
Test Item	Harmonic	Test Date	December 26, 2019
Polarize	Horizontal	Test Engineer	Jerry Chang
Detector	Peak		

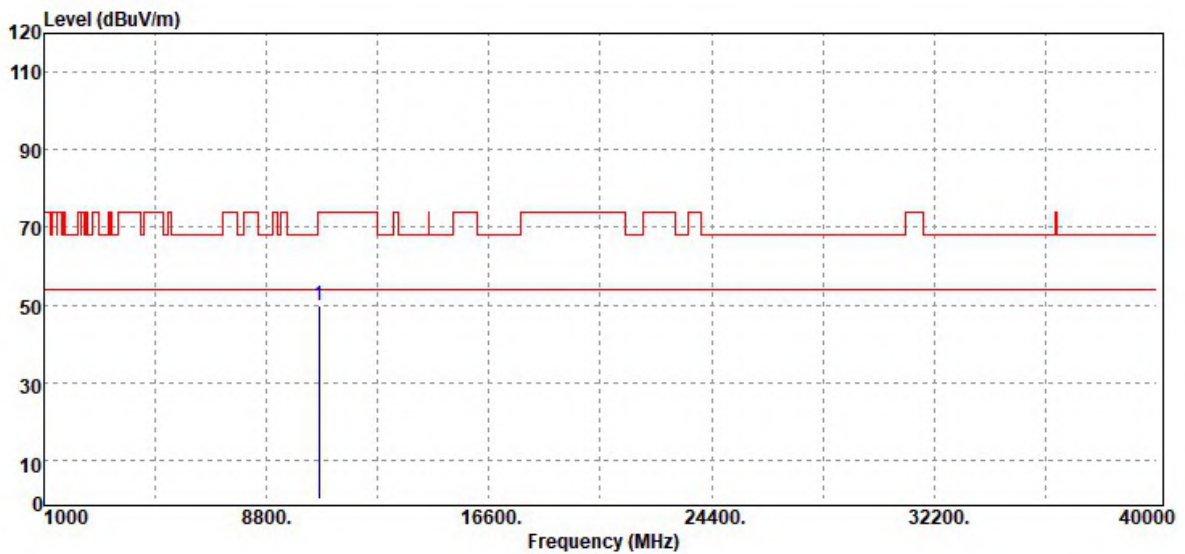


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
10640.00	Peak	34.84	15.05	49.89	74.00	-24.11
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Report No.: T191111W02-RP4

Test Mode	IEEE 802.11n 40 MHz / 5270 MHz	Temp/Hum	19.1(°C)/ 54%RH
Test Item	Harmonic	Test Date	December 26, 2019
Polarize	Vertical	Test Engineer	Jerry Chang
Detector	Peak		

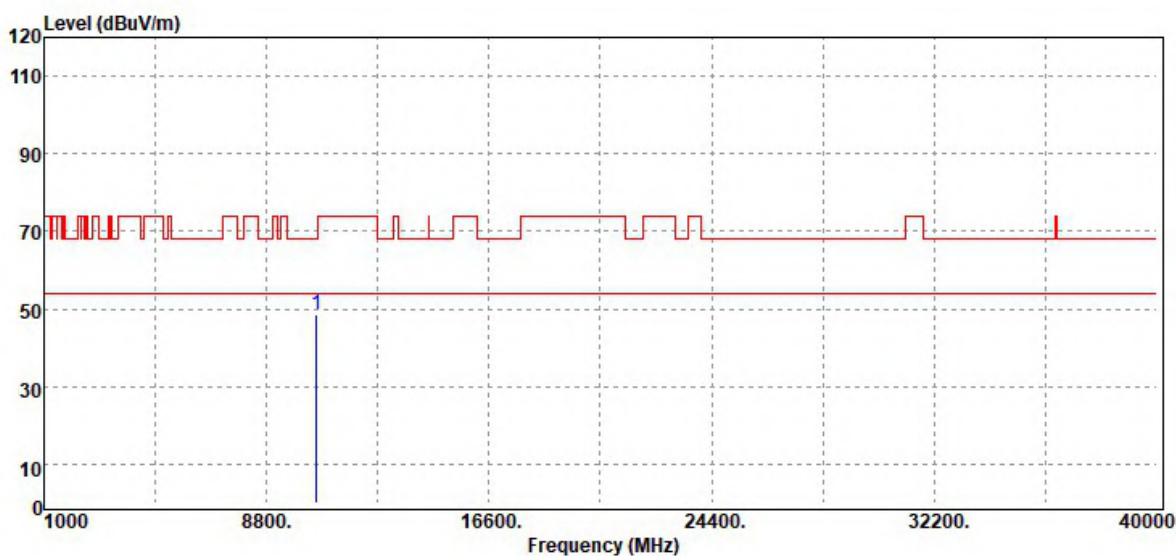


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBuV	Factor dB	Actual FS dBuV/m	Limit @3m dBuV/m	Margin dB
10540.00	Peak	33.76	14.95	48.71	68.20	-19.49
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Report No.: T191111W02-RP4

Test Mode	IEEE 802.11n 40 MHz / 5270 MHz	Temp/Hum	19.1(°C)/ 54%RH
Test Item	Harmonic	Test Date	December 26, 2019
Polarize	Horizontal	Test Engineer	Jerry Chang
Detector	Peak		

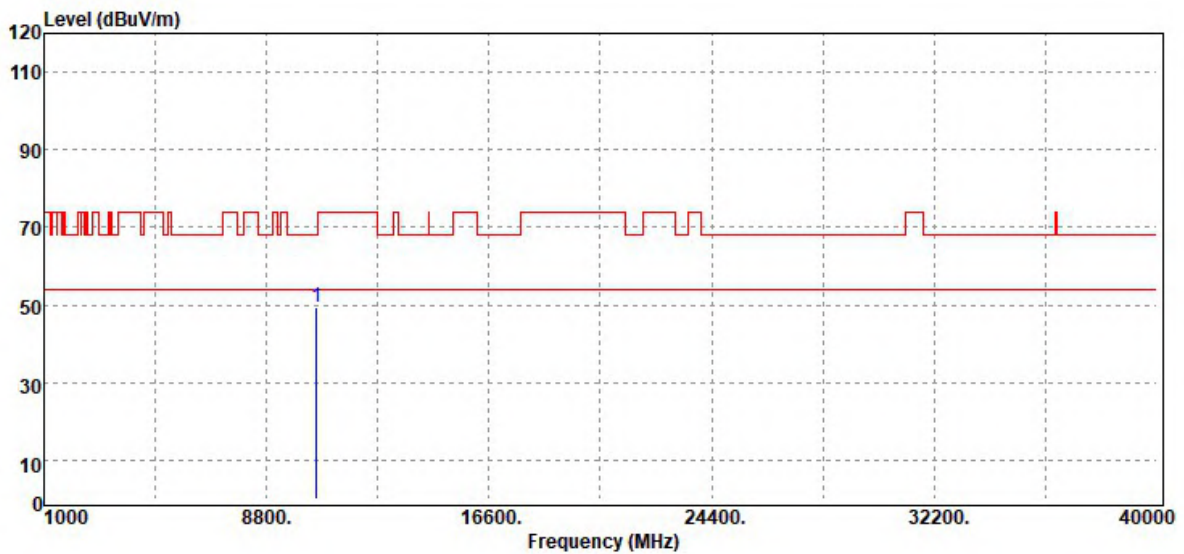


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBuV	Factor dB	Actual FS dBuV/m	Limit @3m dBuV/m	Margin dB
10540.00	Peak	34.33	14.95	49.28	68.20	-18.92
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Report No.: T191111W02-RP4

Test Mode	IEEE 802.11n 40 MHz / 5310 MHz	Temp/Hum	19.1(°C)/ 54%RH
Test Item	Harmonic	Test Date	December 26, 2019
Polarize	Vertical	Test Engineer	Jerry Chang
Detector	Peak		

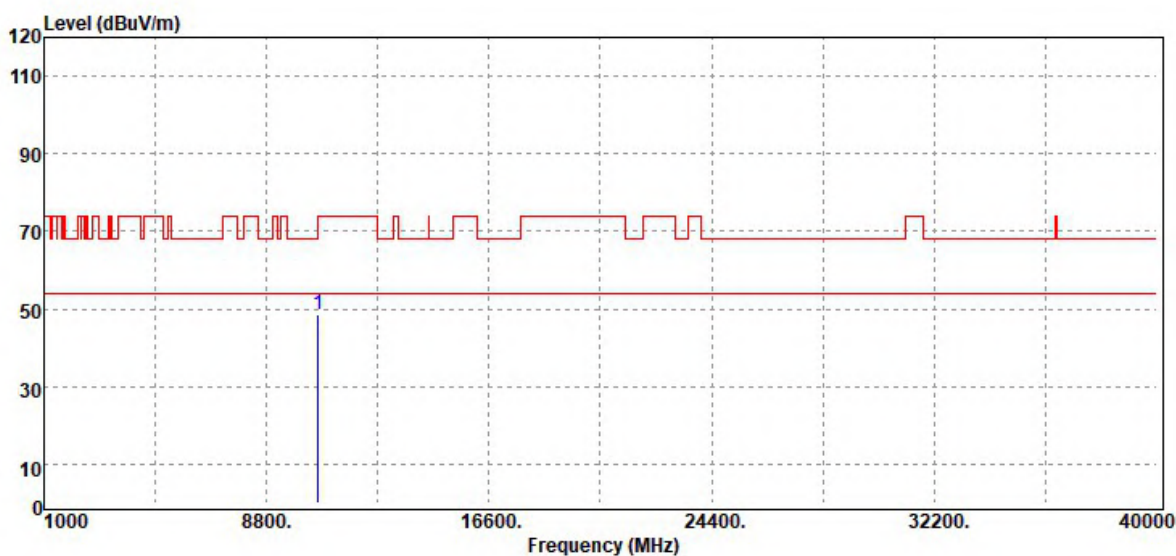


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBuV	Factor dB	Actual FS dBuV/m	Limit @3m dBuV/m	Margin dB
10620.00	Peak	33.64	14.81	48.45	74.00	-25.55
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Report No.: T191111W02-RP4

Test Mode	IEEE 802.11n 40 MHz / 5310 MHz	Temp/Hum	19.1(°C)/ 54%RH
Test Item	Harmonic	Test Date	December 26, 2019
Polarize	Horizontal	Test Engineer	Jerry Chang
Detector	Peak		

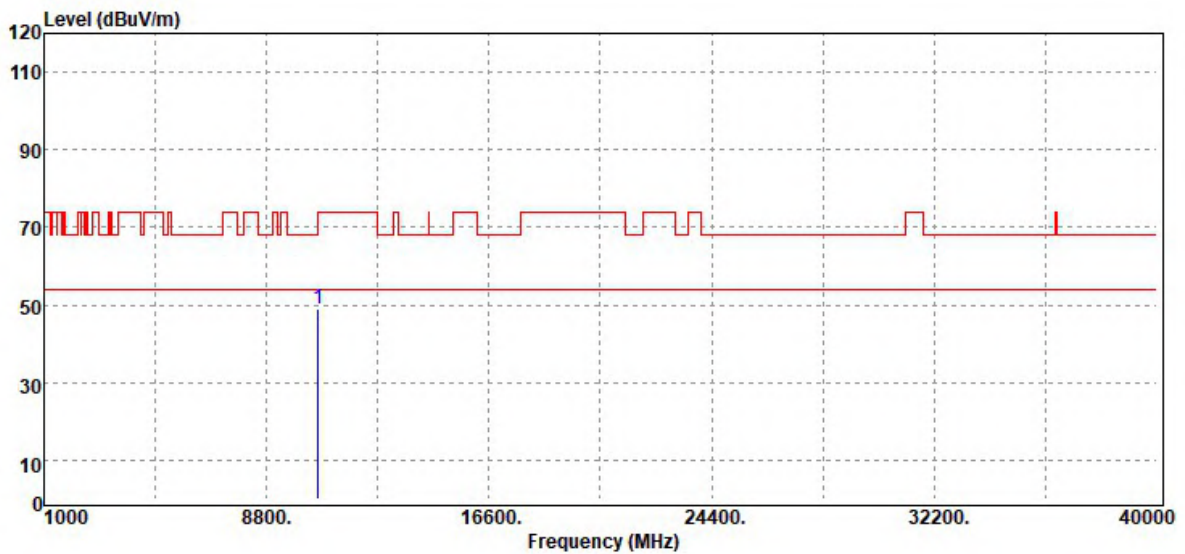


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
10620.00	Peak	34.20	14.81	49.01	74.00	-24.99
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Report No.: T191111W02-RP4

Test Mode	IEEE 802.11ac VHT80 / 5290 MHz	Temp/Hum	19.1(°C)/ 54%RH
Test Item	Harmonic	Test Date	December 26, 2019
Polarize	Vertical	Test Engineer	Jerry Chang
Detector	Peak		

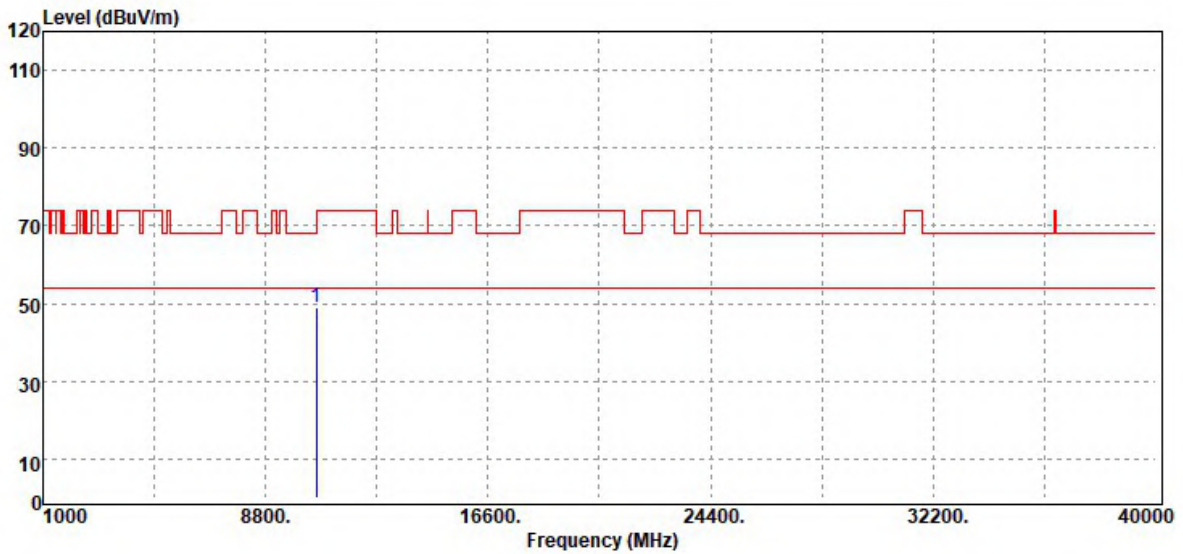


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dB μ V	Factor dB	Actual FS dB μ V/m	Limit @3m dB μ V/m	Margin dB
10580.00	Peak	34.61	14.56	49.17	68.20	-19.03
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Report No.: T191111W02-RP4

Test Mode	IEEE 802.11ac VHT80 / 5290 MHz	Temp/Hum	19.1(°C)/ 54%RH
Test Item	Harmonic	Test Date	December 26, 2019
Polarize	Horizontal	Test Engineer	Jerry Chang
Detector	Peak		

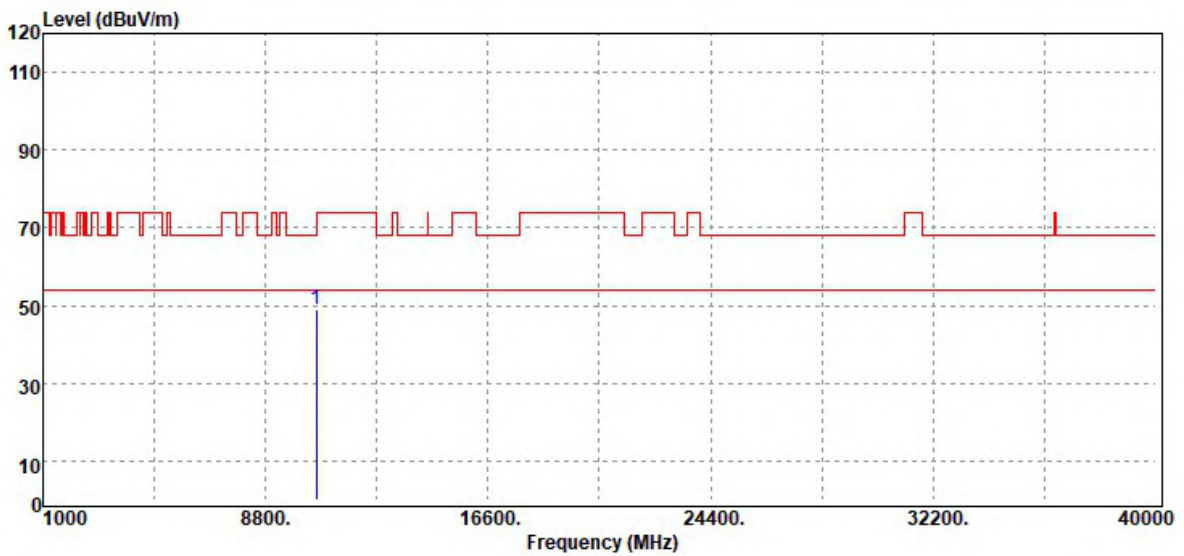

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
10580.00	Peak	34.53	14.56	49.09	68.20	-19.11
N/A						


Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Report No.: T191111W02-RP4

Test Data for UNII-2c

Test Mode	IEEE 802.11a / 5500 MHz	Temp/Hum	19.1(°C)/ 54%RH
Test Item	Harmonic	Test Date	December 26, 2019
Polarize	Vertical	Test Engineer	Jerry Chang
Detector	Peak		

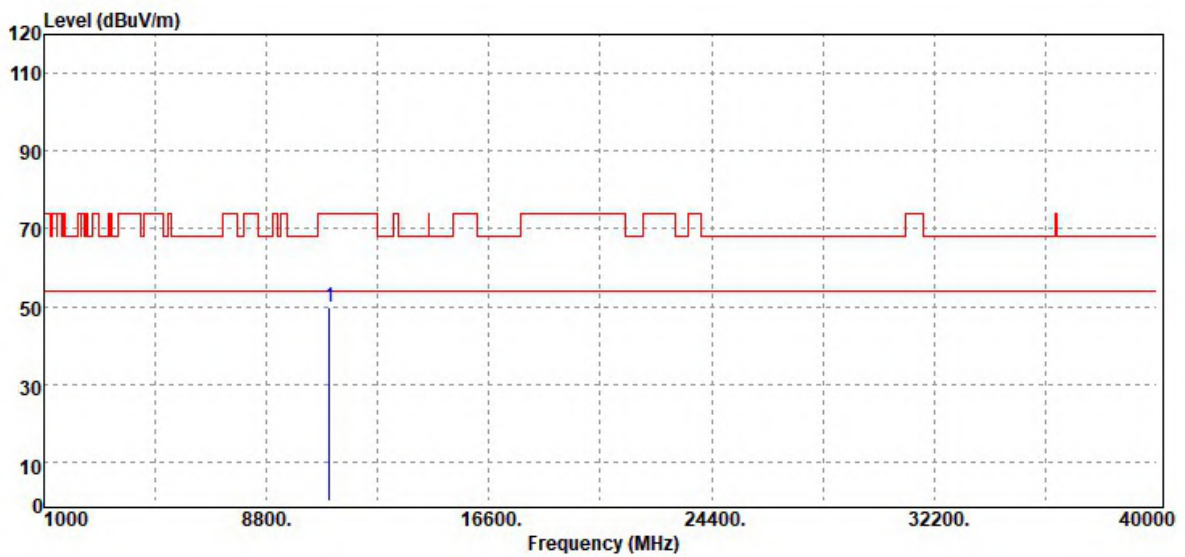


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dB μ V	Factor dB	Actual FS dB μ V/m	Limit @3m dB μ V/m	Margin dB
11000.00	Peak	34.03	15.80	49.83	74.00	-24.17
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Report No.: T191111W02-RP4

Test Mode	IEEE 802.11a / 5500 MHz	Temp/Hum	19.1(°C)/ 54%RH
Test Item	Harmonic	Test Date	December 26, 2019
Polarize	Horizontal	Test Engineer	Jerry Chang
Detector	Peak		

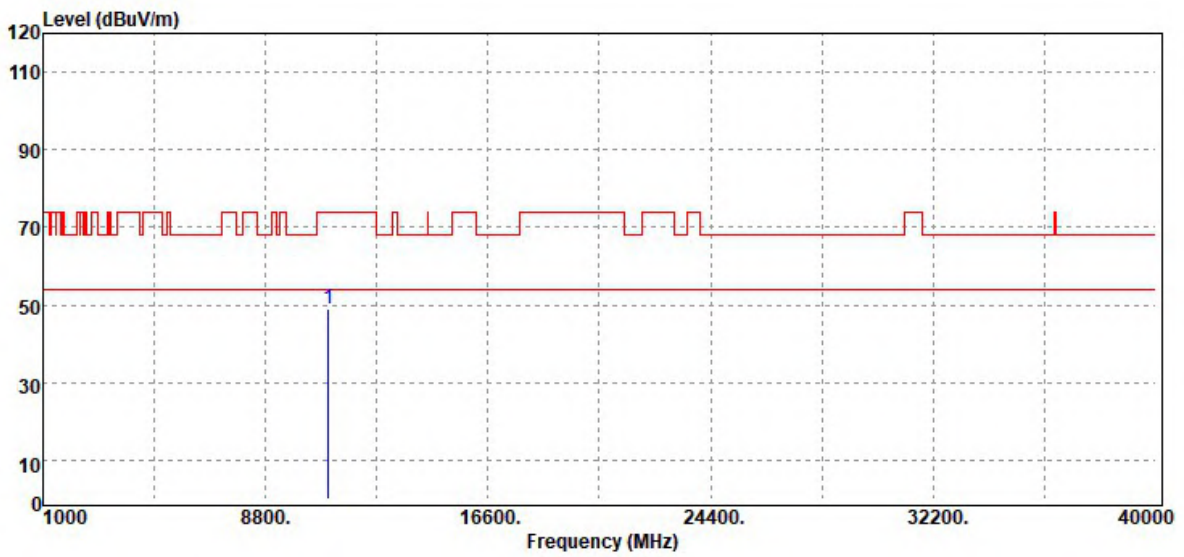


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBuV	Factor dB	Actual FS dBuV/m	Limit @3m dBuV/m	Margin dB
11000.00	Peak	33.24	15.80	49.04	74.00	-24.96
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Report No.: T191111W02-RP4

Test Mode	IEEE 802.11a / 5580 MHz	Temp/Hum	19.1(°C)/ 54%RH
Test Item	Harmonic	Test Date	December 26, 2019
Polarize	Vertical	Test Engineer	Jerry Chang
Detector	Peak		

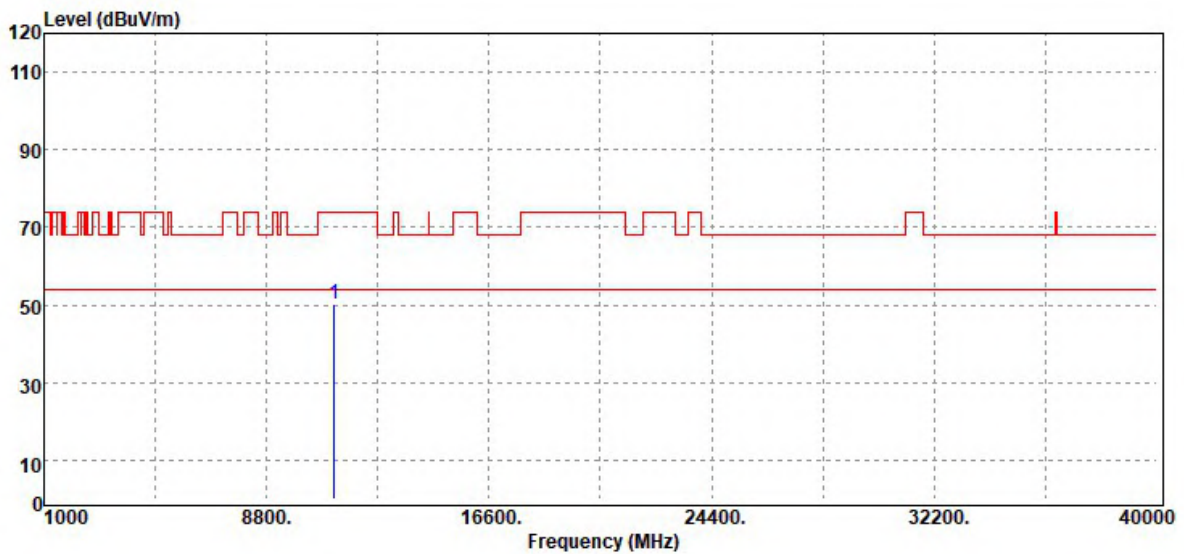


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBuV	Factor dB	Actual FS dBuV/m	Limit @3m dBuV/m	Margin dB
11160.00	Peak	34.06	16.17	50.23	74.00	-23.77
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Report No.: T191111W02-RP4

Test Mode	IEEE 802.11a / 5580 MHz	Temp/Hum	19.1(°C)/ 54%RH
Test Item	Harmonic	Test Date	December 26, 2019
Polarize	Horizontal	Test Engineer	Jerry Chang
Detector	Peak		

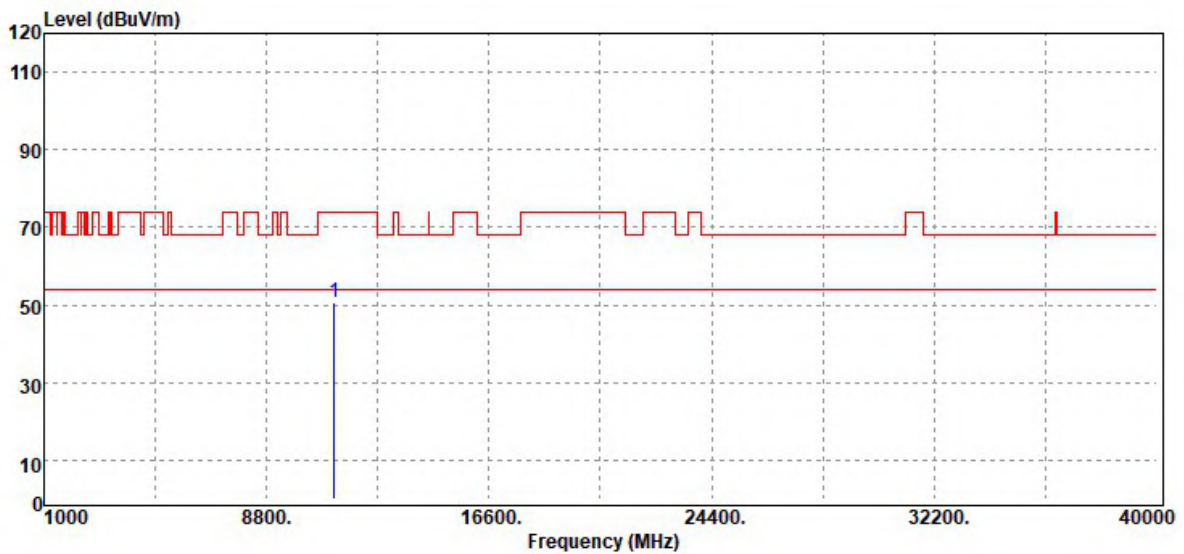


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
11160.00	Peak	34.56	16.17	50.73	74.00	-23.27
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Report No.: T191111W02-RP4

Test Mode	IEEE 802.11a / 5700 MHz	Temp/Hum	19.1(°C)/ 54%RH
Test Item	Harmonic	Test Date	December 26, 2019
Polarize	Vertical	Test Engineer	Jerry Chang
Detector	Peak		

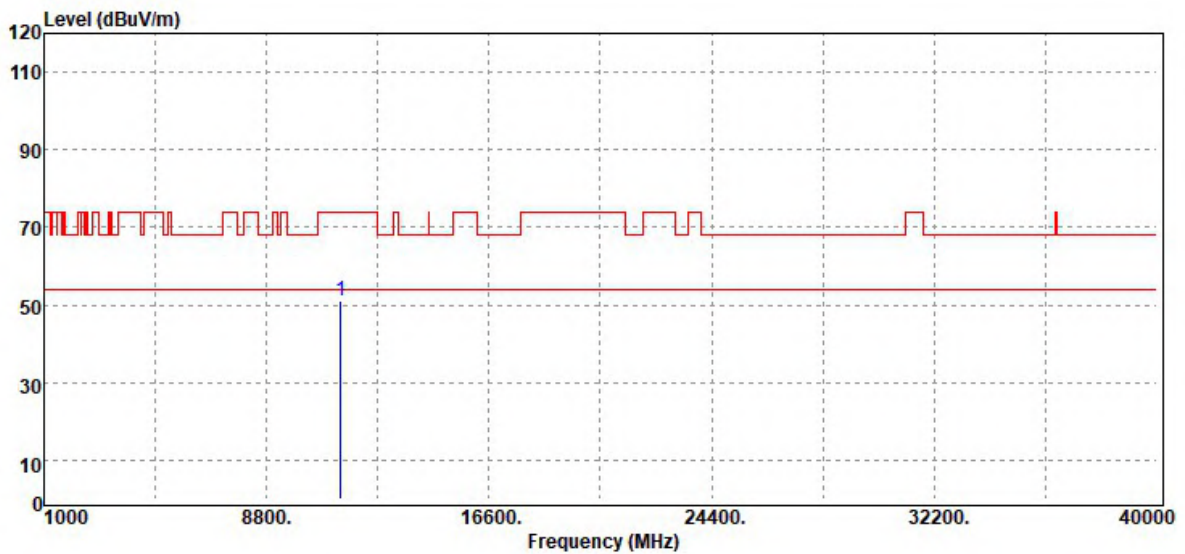


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBuV	Factor dB	Actual FS dBuV/m	Limit @3m dBuV/m	Margin dB
11400.00	Peak	35.27	15.94	51.21	74.00	-22.79
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Report No.: T191111W02-RP4

Test Mode	IEEE 802.11a / 5700 MHz	Temp/Hum	19.1(°C)/ 54%RH
Test Item	Harmonic	Test Date	December 26, 2019
Polarize	Horizontal	Test Engineer	Jerry Chang
Detector	Peak		

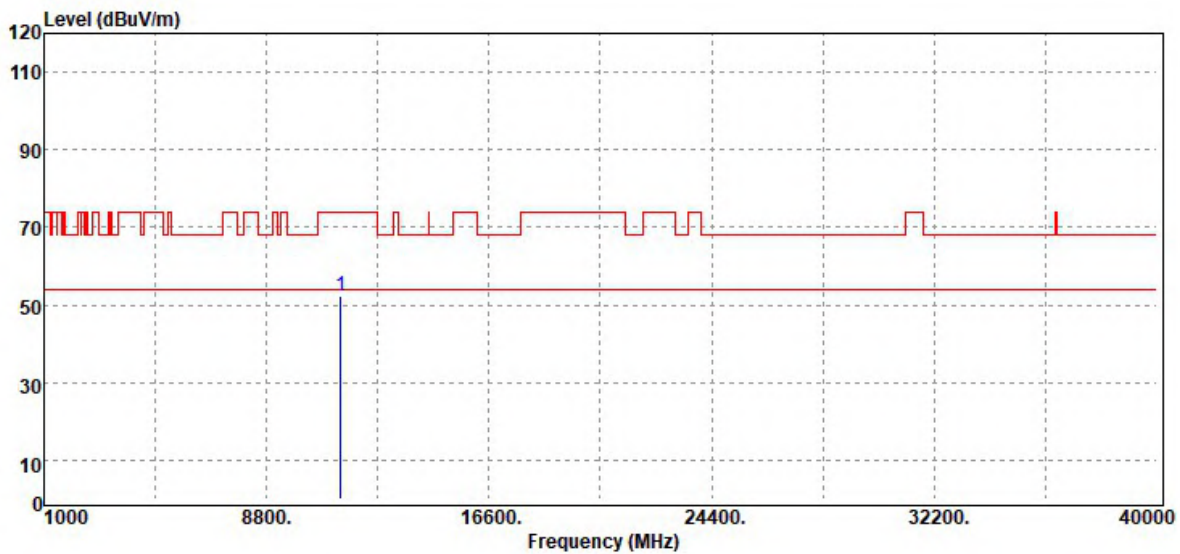


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
11400.00	Peak	36.58	15.94	52.52	74.00	-21.48
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Report No.: T191111W02-RP4

Test Mode	IEEE 802.11n 20 MHz / 5500 MHz	Temp/Hum	19.1(°C)/ 54%RH
Test Item	Harmonic	Test Date	December 26, 2019
Polarize	Vertical	Test Engineer	Jerry Chang
Detector	Peak		

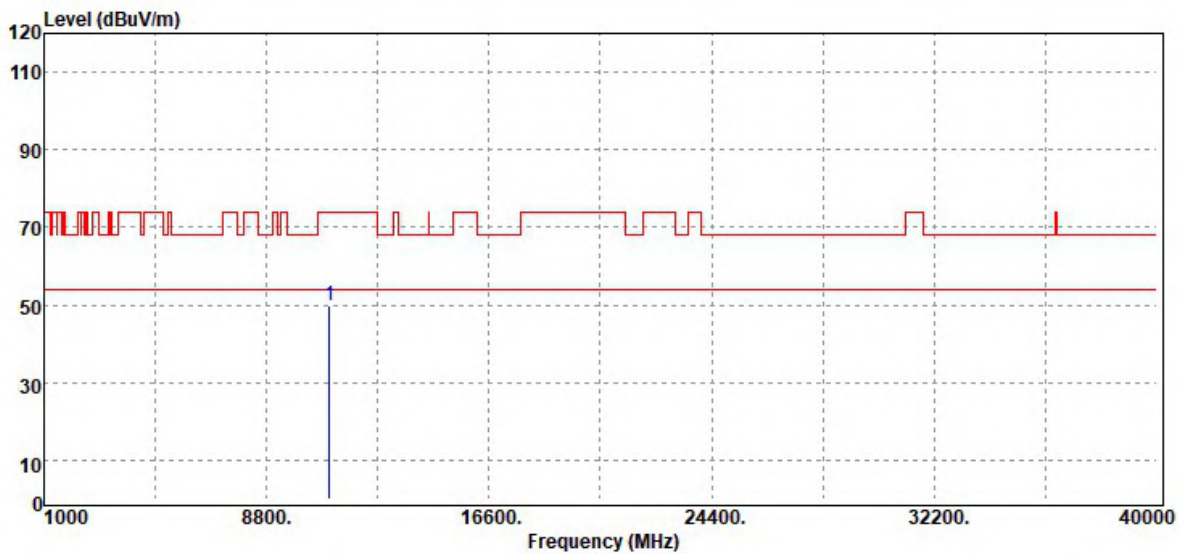


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBuV	Factor dB	Actual FS dBuV/m	Limit @3m dBuV/m	Margin dB
11000.00	Peak	34.14	15.80	49.94	74.00	-24.06
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Report No.: T191111W02-RP4

Test Mode	IEEE 802.11n 20 MHz / 5500 MHz	Temp/Hum	19.1(°C)/ 54%RH
Test Item	Harmonic	Test Date	December 26, 2019
Polarize	Horizontal	Test Engineer	Jerry Chang
Detector	Peak		

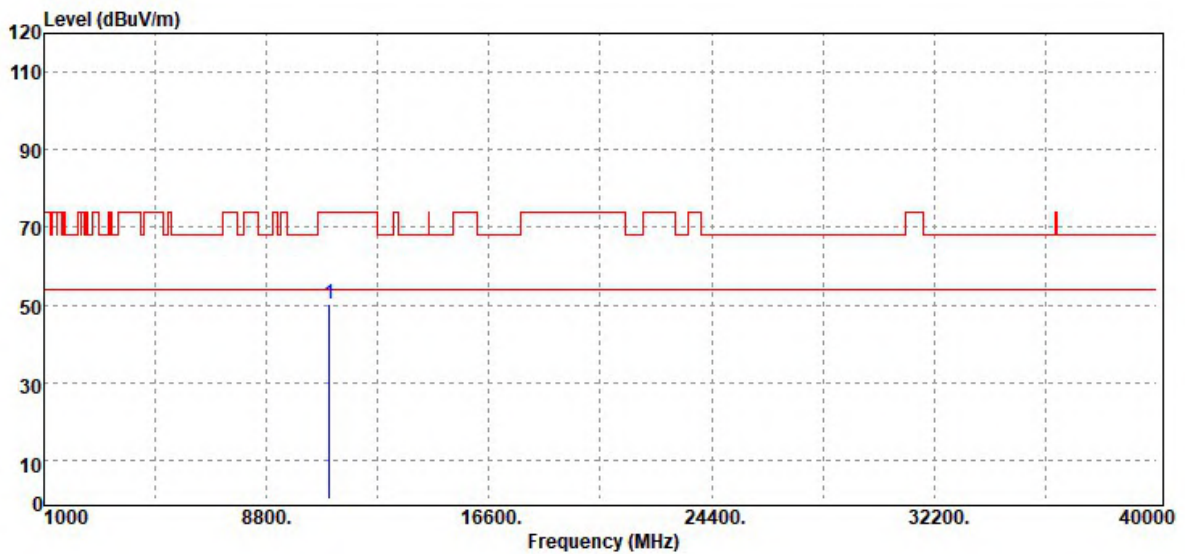


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBuV	Factor dB	Actual FS dBuV/m	Limit @3m dBuV/m	Margin dB
11000.00	Peak	34.61	15.80	50.41	74.00	-23.59
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Report No.: T191111W02-RP4

Test Mode	IEEE 802.11n 20 MHz / 5580 MHz	Temp/Hum	19.1(°C)/ 54%RH
Test Item	Harmonic	Test Date	December 26, 2019
Polarize	Vertical	Test Engineer	Jerry Chang
Detector	Peak		

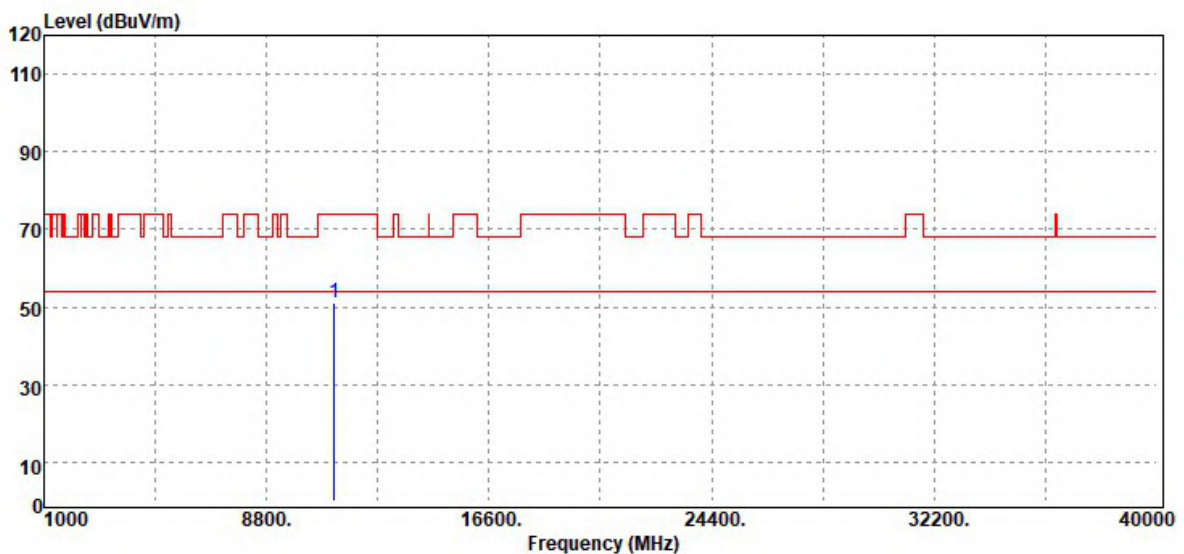


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBuV	Factor dB	Actual FS dBuV/m	Limit @3m dBuV/m	Margin dB
11160.00	Peak	34.75	16.17	50.92	74.00	-23.08
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Report No.: T191111W02-RP4

Test Mode	IEEE 802.11n 20 MHz / 5580 MHz	Temp/Hum	19.1(°C)/ 54%RH
Test Item	Harmonic	Test Date	December 26, 2019
Polarize	Horizontal	Test Engineer	Jerry Chang
Detector	Peak		

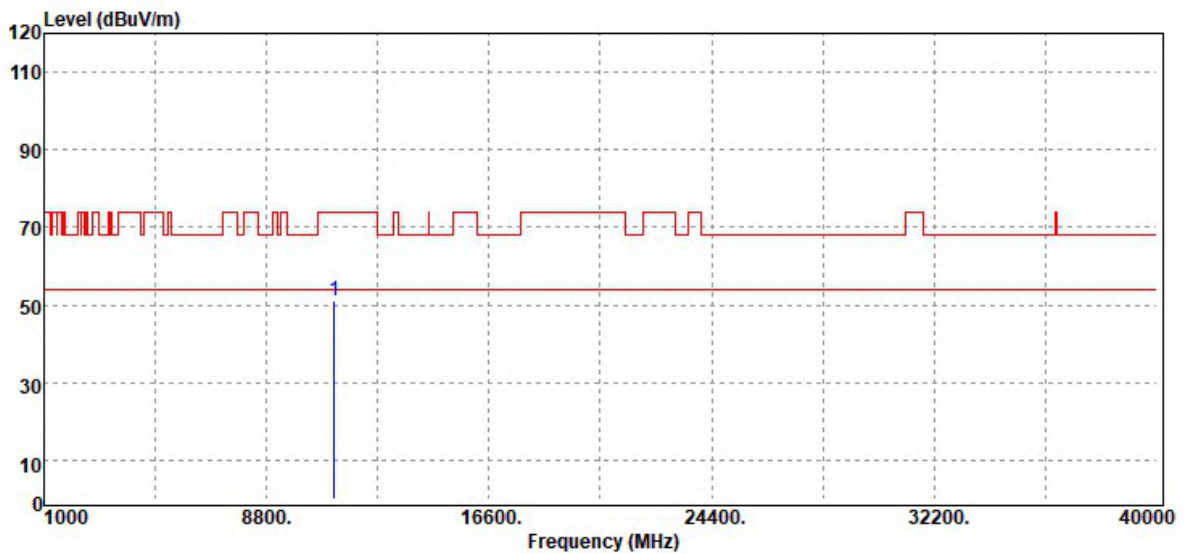


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
11160.00	Peak	34.73	16.17	50.90	74.00	-23.10
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Report No.: T191111W02-RP4

Test Mode	IEEE 802.11n 20 MHz / 5700 MHz	Temp/Hum	19.1(°C)/ 54%RH
Test Item	Harmonic	Test Date	December 26, 2019
Polarize	Vertical	Test Engineer	Jerry Chang
Detector	Peak		

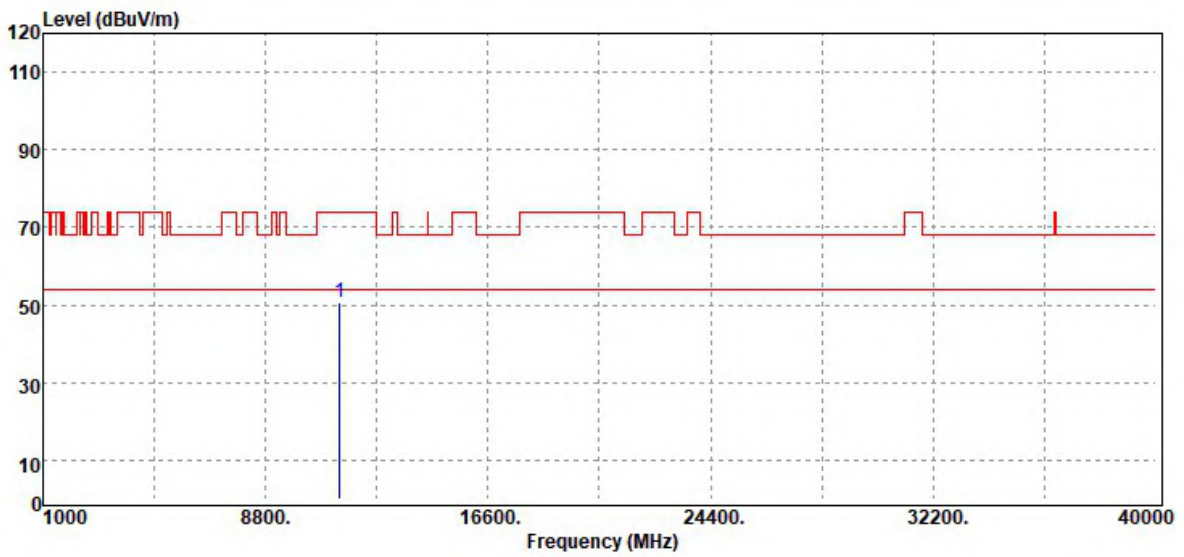


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBuV	Factor dB	Actual FS dBuV/m	Limit @3m dBuV/m	Margin dB
11400.00	Peak	34.61	15.94	50.55	74.00	-23.45
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Report No.: T191111W02-RP4

Test Mode	IEEE 802.11n 20 MHz / 5700 MHz	Temp/Hum	19.1(°C)/ 54%RH
Test Item	Harmonic	Test Date	December 26, 2019
Polarize	Horizontal	Test Engineer	Jerry Chang
Detector	Peak		

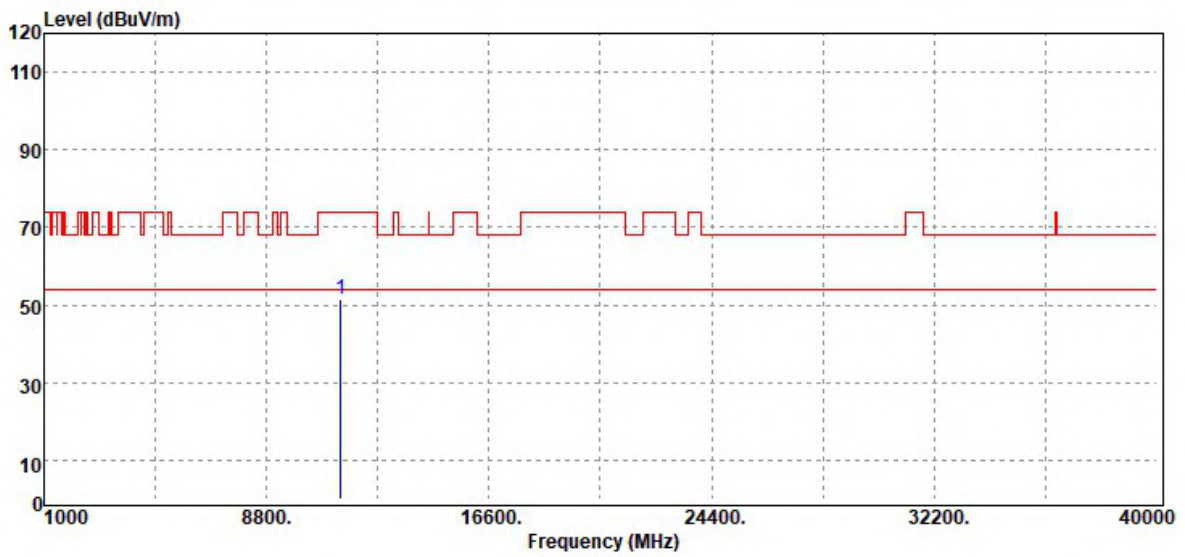


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
11400.00	Peak	35.47	15.94	51.41	74.00	-22.59
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Report No.: T191111W02-RP4

Test Mode	IEEE 802.11n 40 MHz / 5510 MHz	Temp/Hum	19.1(°C)/ 54%RH
Test Item	Harmonic	Test Date	December 26, 2019
Polarize	Vertical	Test Engineer	Jerry Chang
Detector	Peak		

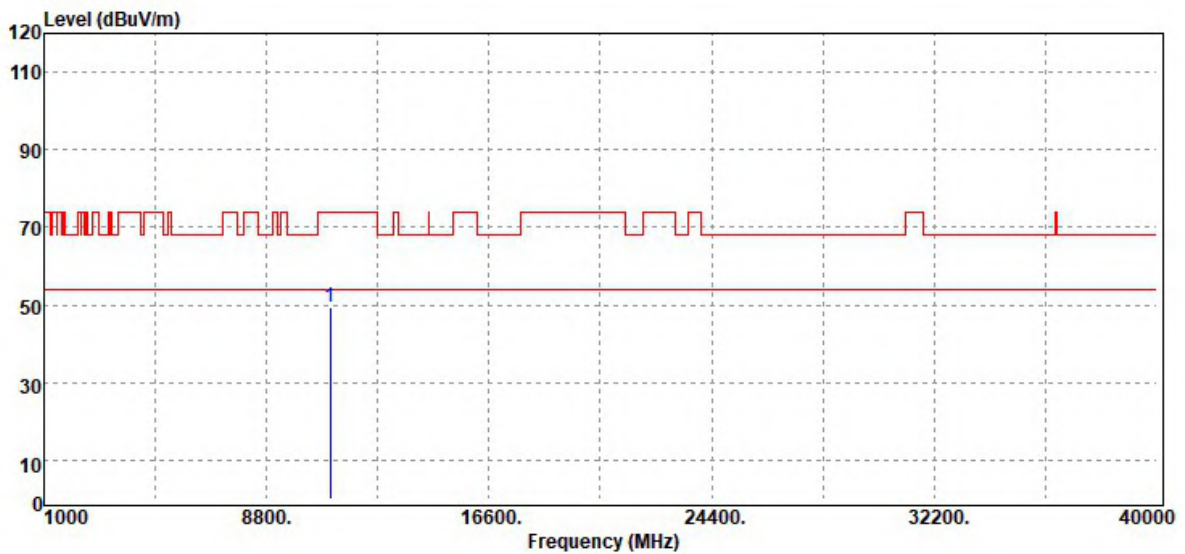


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBuV	Factor dB	Actual FS dBuV/m	Limit @3m dBuV/m	Margin dB
11020.00	Peak	33.65	15.84	49.49	74.00	-24.51
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Report No.: T191111W02-RP4

Test Mode	IEEE 802.11n 40 MHz / 5510 MHz	Temp/Hum	19.1(°C)/ 54%RH
Test Item	Harmonic	Test Date	December 26, 2019
Polarize	Horizontal	Test Engineer	Jerry Chang
Detector	Peak		

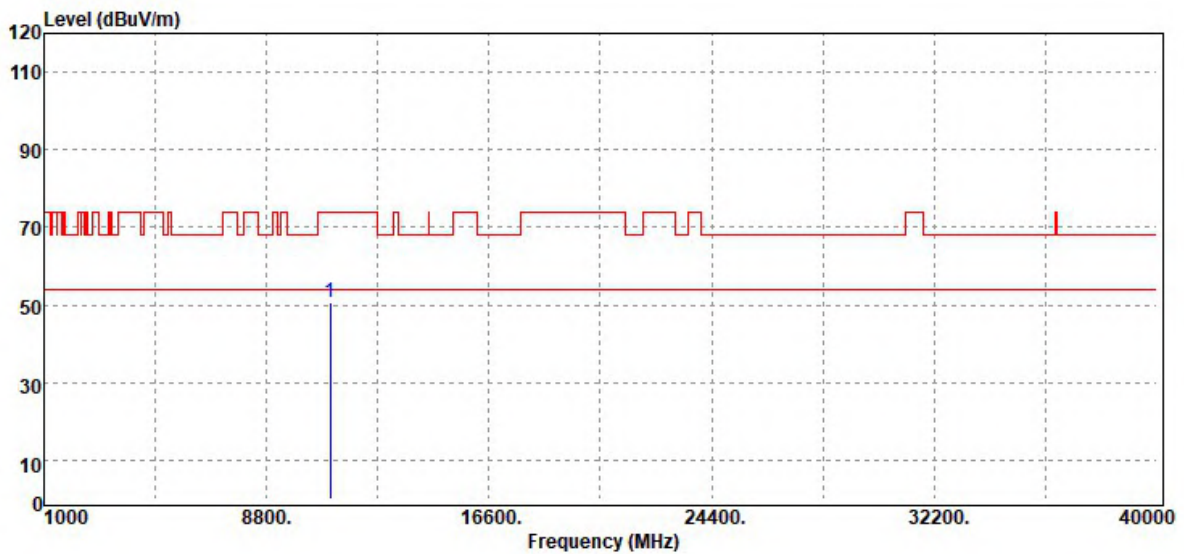


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBuV	Factor dB	Actual FS dBuV/m	Limit @3m dBuV/m	Margin dB
11020.00	Peak	34.69	15.84	50.53	74.00	-23.47
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Report No.: T191111W02-RP4

Test Mode	IEEE 802.11n 40 MHz / 5550 MHz	Temp/Hum	19.1(°C)/ 54%RH
Test Item	Harmonic	Test Date	December 26, 2019
Polarize	Vertical	Test Engineer	Jerry Chang
Detector	Peak		

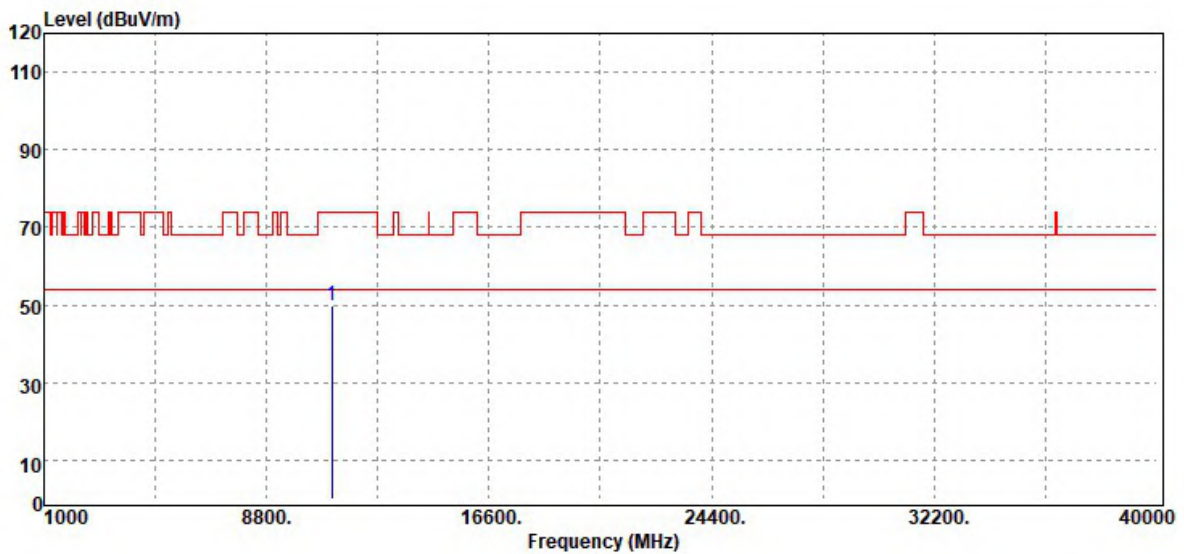


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBuV	Factor dB	Actual FS dBuV/m	Limit @3m dBuV/m	Margin dB
11100.00	Peak	33.54	16.39	49.93	74.00	-24.07
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Report No.: T191111W02-RP4

Test Mode	IEEE 802.11n 40 MHz / 5550 MHz	Temp/Hum	19.1(°C)/ 54%RH
Test Item	Harmonic	Test Date	December 26, 2019
Polarize	Horizontal	Test Engineer	Jerry Chang
Detector	Peak		

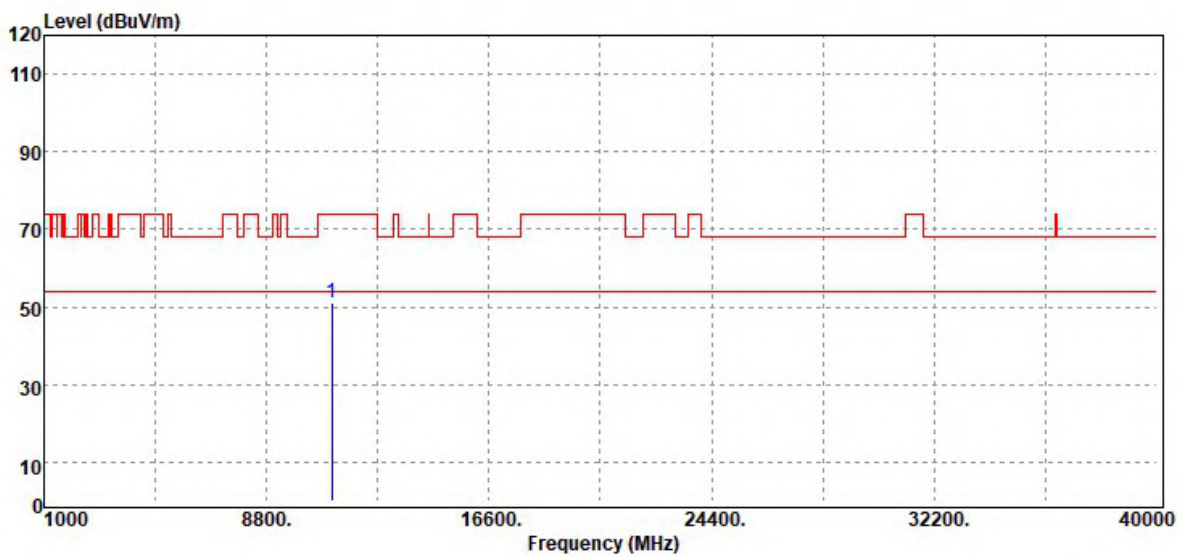


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBuV	Factor dB	Actual FS dBuV/m	Limit @3m dBuV/m	Margin dB
11100.00	Peak	34.84	16.39	51.23	74.00	-22.77
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Report No.: T191111W02-RP4

Test Mode	IEEE 802.11n 40 MHz / 5670 MHz	Temp/Hum	19.1(°C)/ 54%RH
Test Item	Harmonic	Test Date	December 26, 2019
Polarize	Vertical	Test Engineer	Jerry Chang
Detector	Peak		

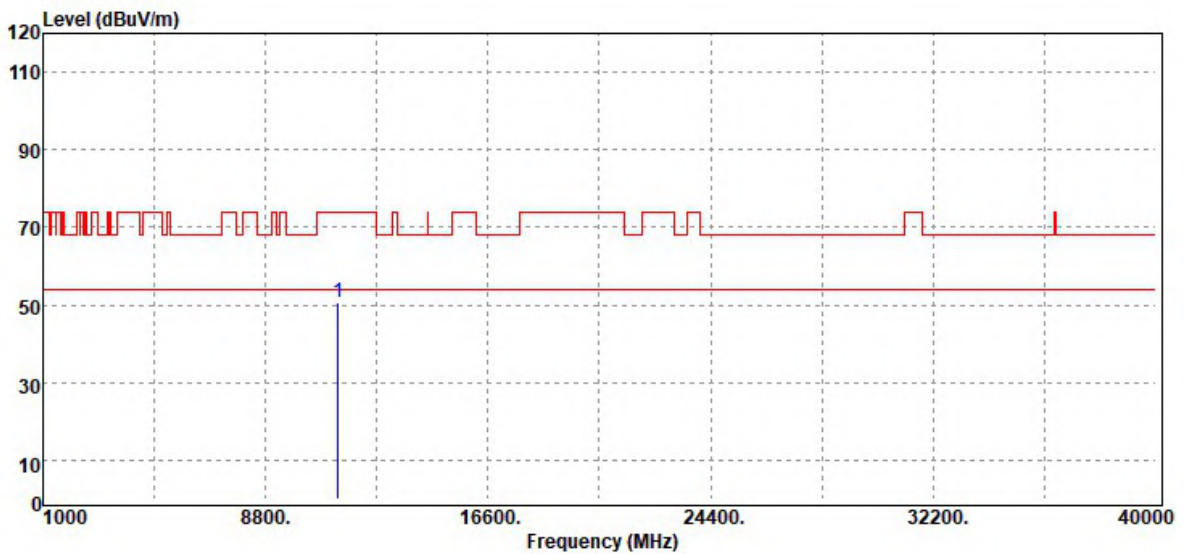


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBuV	Factor dB	Actual FS dBuV/m	Limit @3m dBuV/m	Margin dB
11340.00	Peak	34.66	15.99	50.65	74.00	-23.35
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Report No.: T191111W02-RP4

Test Mode	IEEE 802.11n 40 MHz / 5670 MHz	Temp/Hum	19.1(°C)/ 54%RH
Test Item	Harmonic	Test Date	December 26, 2019
Polarize	Horizontal	Test Engineer	Jerry Chang
Detector	Peak		

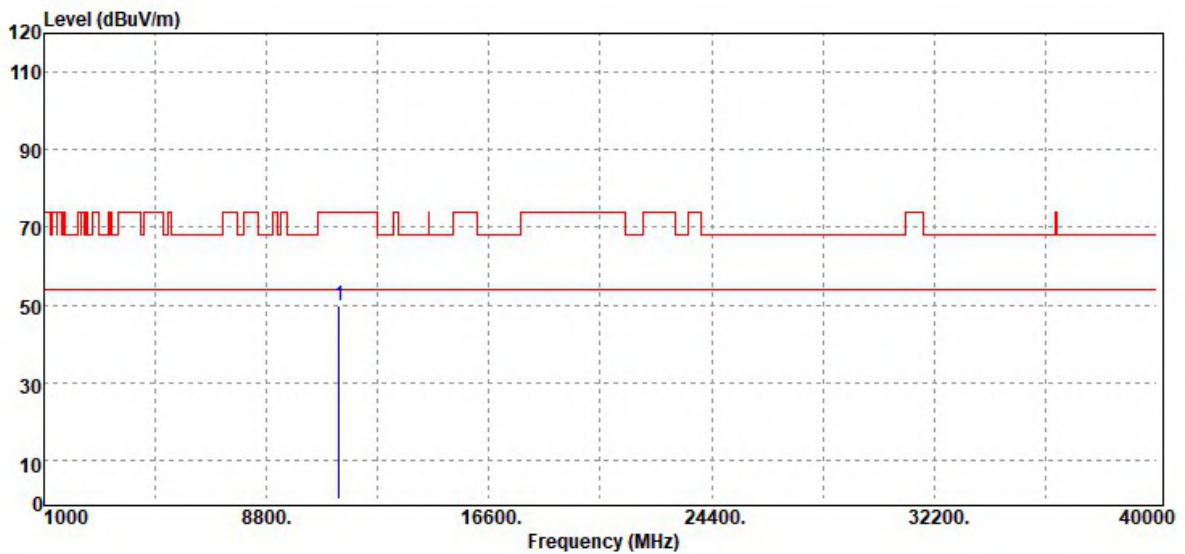


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
11340.00	Peak	34.01	15.99	50.00	74.00	-24.00
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Report No.: T191111W02-RP4

Test Mode	IEEE 802.11ac VHT80 / 5530 MHz	Temp/Hum	19.1(°C)/ 54%RH
Test Item	Harmonic	Test Date	December 26, 2019
Polarize	Vertical	Test Engineer	Jerry Chang
Detector	Peak		

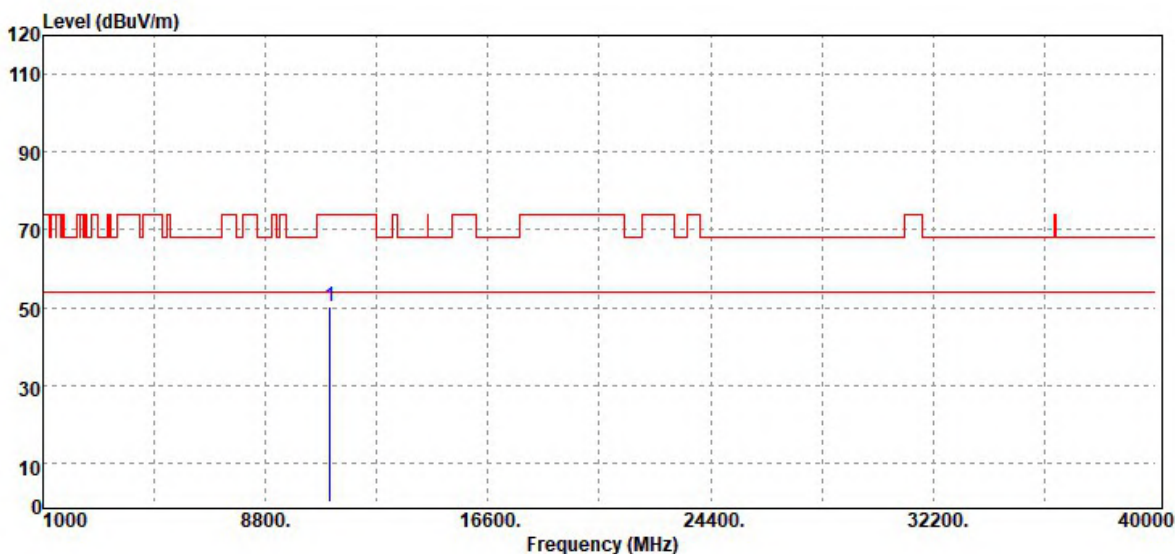


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dB μ V	Factor dB	Actual FS dB μ V/m	Limit @3m dB μ V/m	Margin dB
11060.00	Peak	34.06	16.08	50.14	74.00	-23.86
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Report No.: T191111W02-RP4

Test Mode	IEEE 802.11ac VHT80 / 5530 MHz	Temp/Hum	19.1(°C)/ 54%RH
Test Item	Harmonic	Test Date	December 26, 2019
Polarize	Horizontal	Test Engineer	Jerry Chang
Detector	Peak		

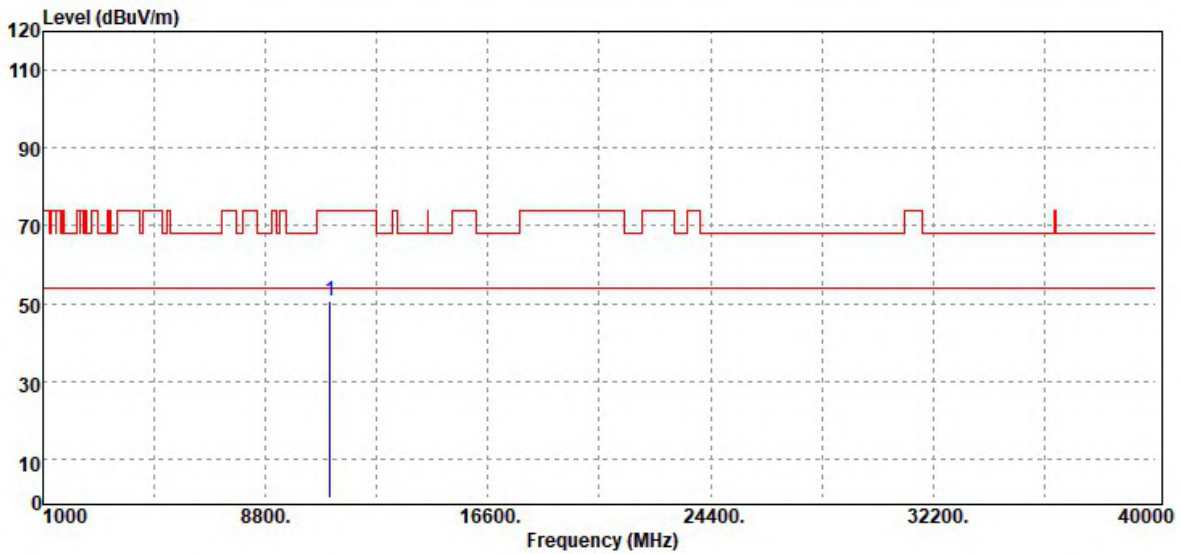


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
11060.00	Peak	34.50	16.08	50.58	74.00	-23.42
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Report No.: T191111W02-RP4

Test Mode	IEEE 802.11ac VHT80 / 5610MHz	Temp/Hum	22.1(°C)/ 58%RH
Test Item	Harmonic	Test Date	April 15, 2020
Polarize	Vertical	Test Engineer	Jerry Chang
Detector	Peak		

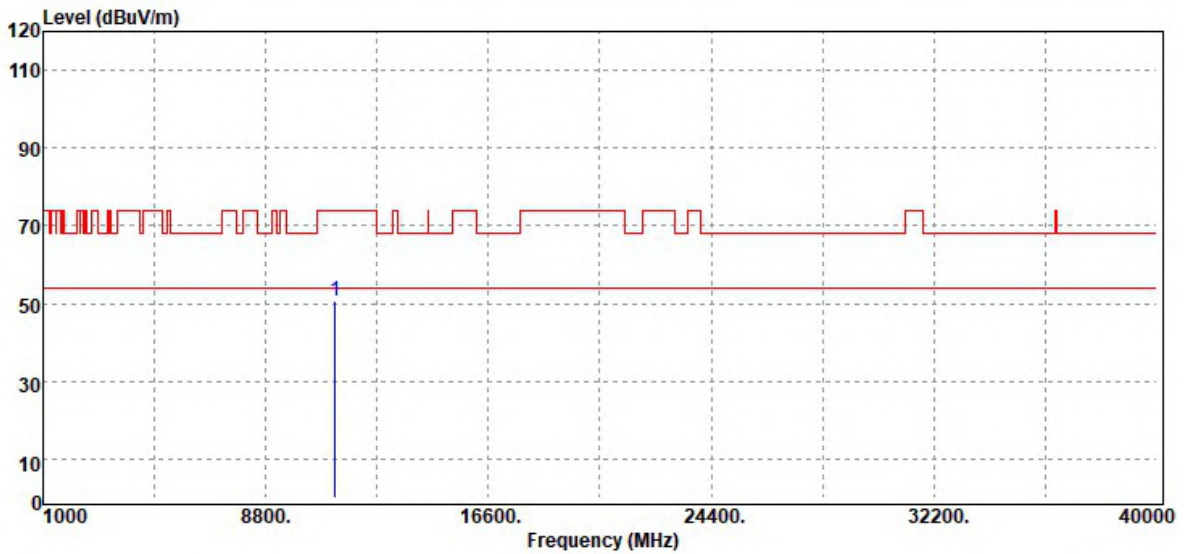


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dB μ V	Factor dB	Actual FS dB μ V/m	Limit @3m dB μ V/m	Margin dB
11220.00	Peak	34.29	16.45	50.74	74.00	-23.26
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Report No.: T191111W02-RP4

Test Mode	IEEE 802.11ac VHT80 / 5610 MHz	Temp/Hum	22.1(°C)/ 58%RH
Test Item	Harmonic	Test Date	April 15, 2020
Polarize	Horizontal	Test Engineer	Jerry Chang
Detector	Peak		

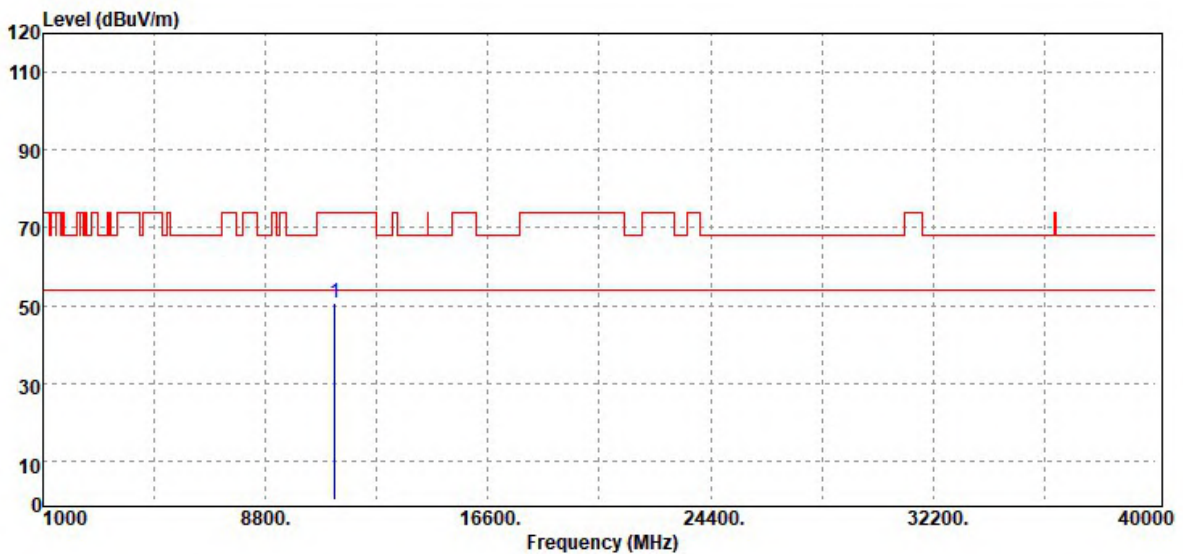

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBuV	Factor dB	Actual FS dBuV/m	Limit @3m dBuV/m	Margin dB
11220.00	Peak	34.13	16.45	50.58	74.00	-23.42
N/A						


Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Report No.: T191111W02-RP4

Test Data for UNII-3

Test Mode	IEEE 802.11a / 5745 MHz	Temp/Hum	19.1(°C)/ 54%RH
Test Item	Harmonic	Test Date	December 26, 2019
Polarize	Vertical	Test Engineer	Jerry Chang
Detector	Peak		

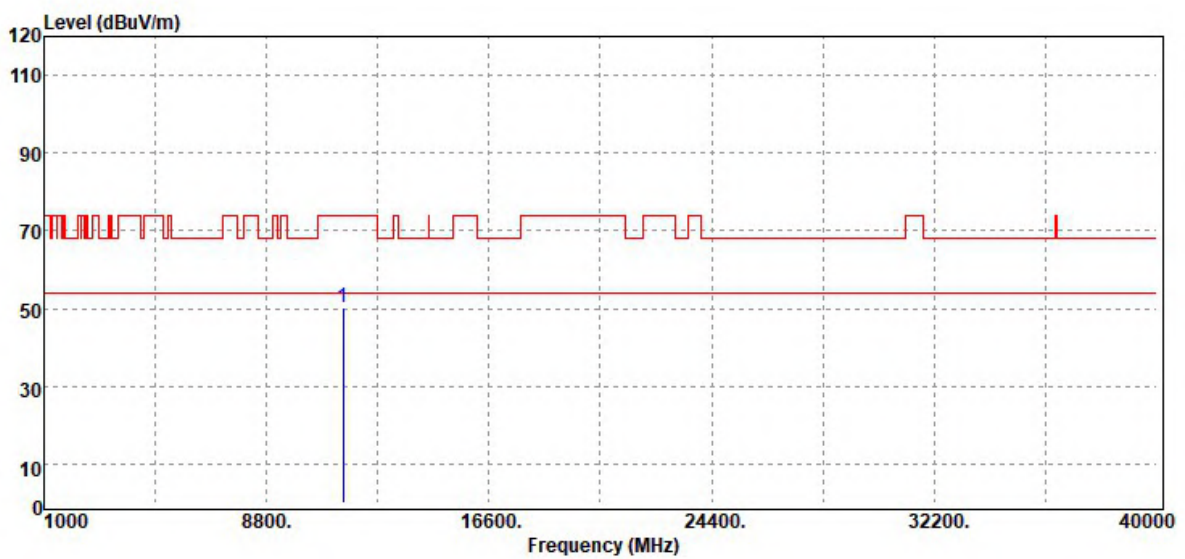


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
11490.00	Peak	34.83	15.57	50.40	74.00	-23.60
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Report No.: T191111W02-RP4

Test Mode	IEEE 802.11a / 5745 MHz	Temp/Hum	19.1(°C)/ 54%RH
Test Item	Harmonic	Test Date	December 26, 2019
Polarize	Horizontal	Test Engineer	Jerry Chang
Detector	Peak		

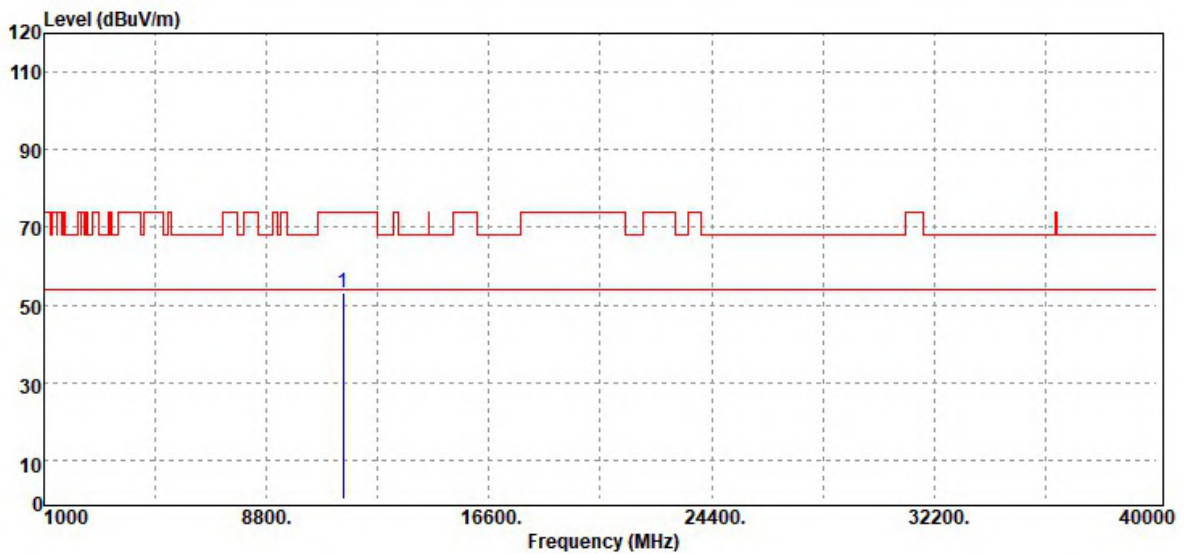


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBuV	Factor dB	Actual FS dBuV/m	Limit @3m dBuV/m	Margin dB
11490.00	Peak	37.52	15.57	53.09	74.00	-20.91
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Report No.: T191111W02-RP4

Test Mode	IEEE 802.11a / 5785 MHz	Temp/Hum	19.1(°C)/ 54%RH
Test Item	Harmonic	Test Date	December 26, 2019
Polarize	Vertical	Test Engineer	Jerry Chang
Detector	Peak		

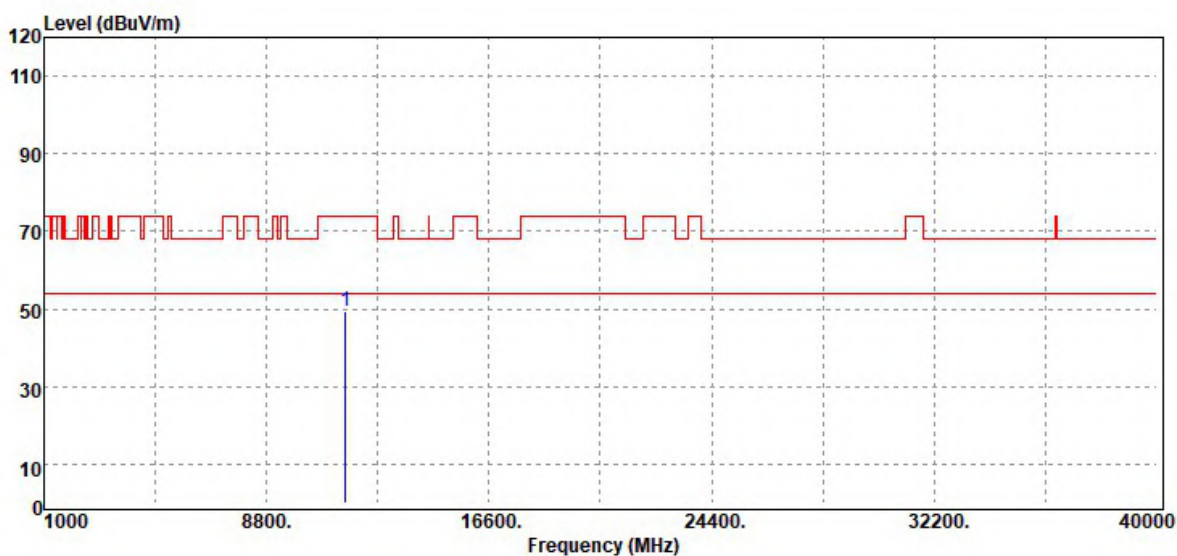


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBuV	Factor dB	Actual FS dBuV/m	Limit @3m dBuV/m	Margin dB
11570.00	Peak	34.09	15.50	49.59	74.00	-24.41
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Report No.: T191111W02-RP4

Test Mode	IEEE 802.11a / 5785 MHz	Temp/Hum	19.1(°C)/ 54%RH
Test Item	Harmonic	Test Date	December 26, 2019
Polarize	Horizontal	Test Engineer	Jerry Chang
Detector	Peak		

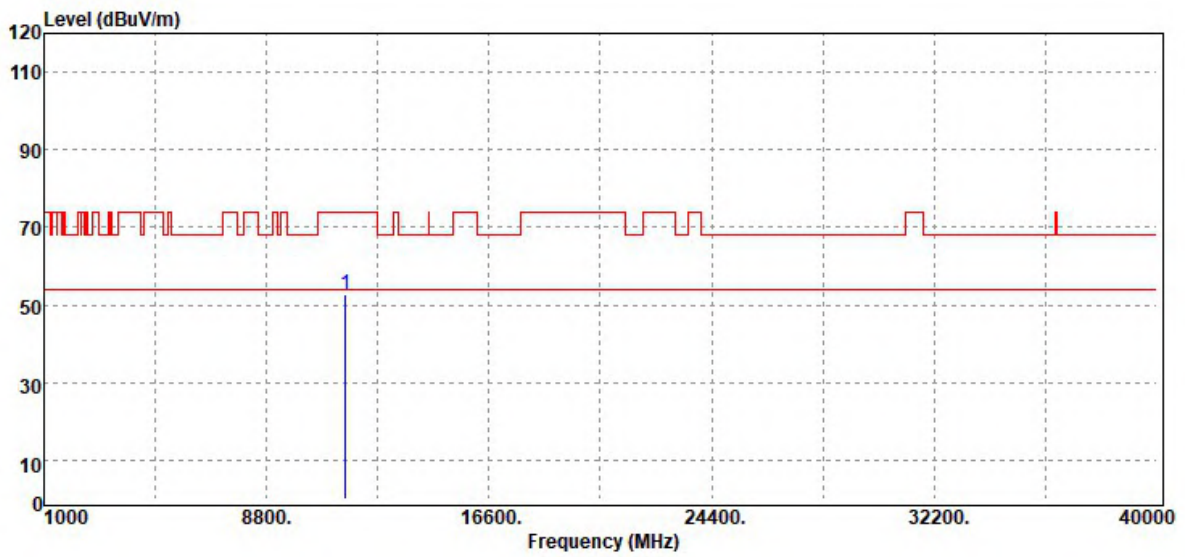


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
11570.00	Peak	37.05	15.50	52.55	74.00	-21.45
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Report No.: T191111W02-RP4

Test Mode	IEEE 802.11a / 5825 MHz	Temp/Hum	19.1(°C)/ 54%RH
Test Item	Harmonic	Test Date	December 26, 2019
Polarize	Vertical	Test Engineer	Jerry Chang
Detector	Peak		

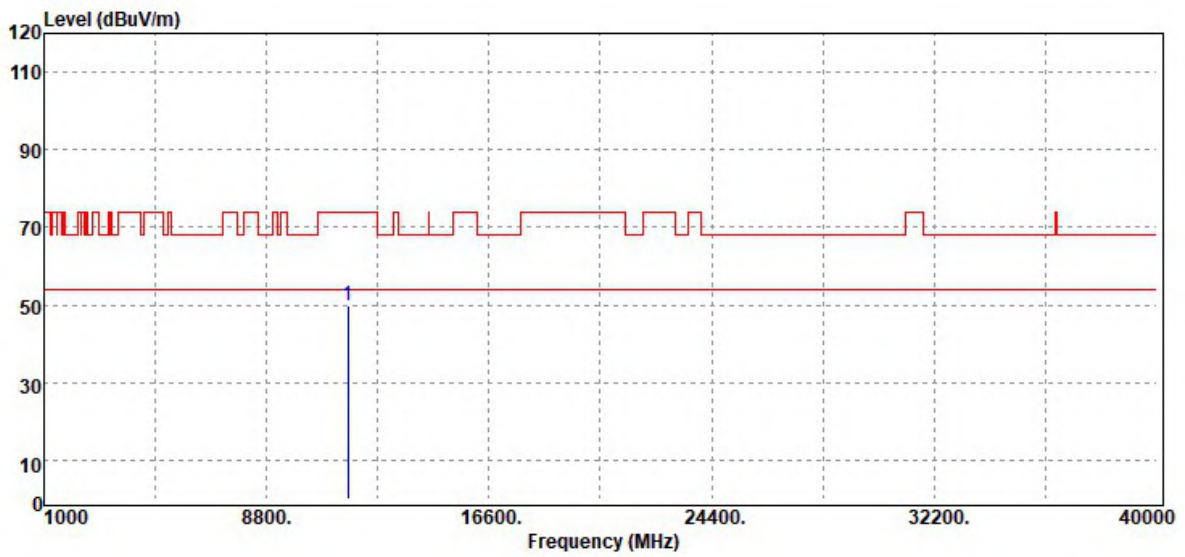


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBuV	Factor dB	Actual FS dBuV/m	Limit @3m dBuV/m	Margin dB
11650.00	Peak	34.10	15.53	49.63	74.00	-24.37
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Report No.: T191111W02-RP4

Test Mode	IEEE 802.11a / 5825 MHz	Temp/Hum	19.1(°C)/ 54%RH
Test Item	Harmonic	Test Date	December 26, 2019
Polarize	Horizontal	Test Engineer	Jerry Chang
Detector	Peak		

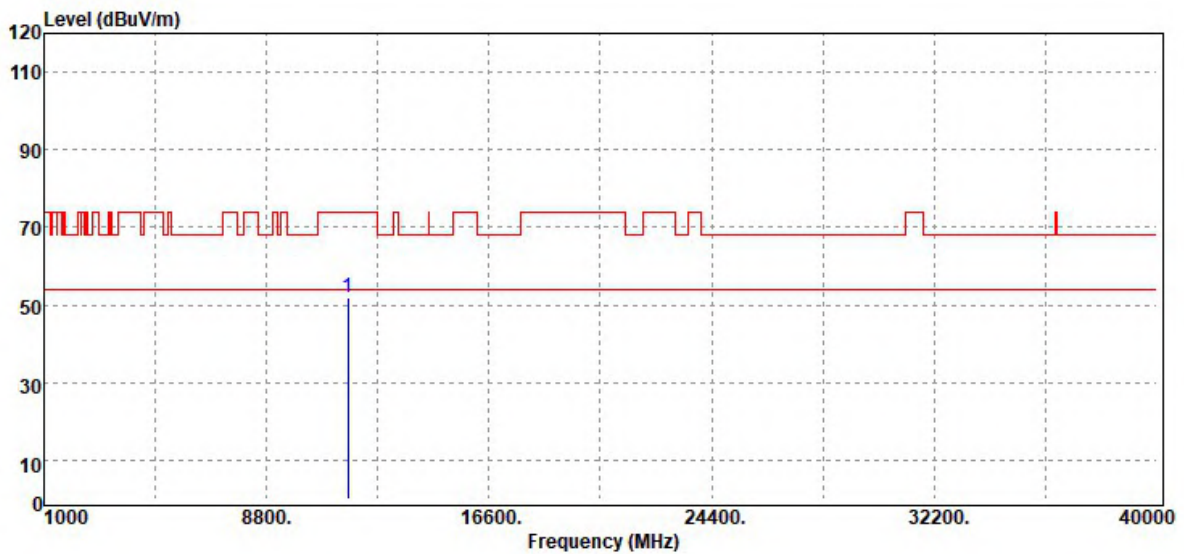


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
11650.00	Peak	36.53	15.53	52.06	74.00	-21.94
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Report No.: T191111W02-RP4

Test Mode	IEEE 802.11n 20 MHz / 5745 MHz	Temp/Hum	19.1(°C)/ 54%RH
Test Item	Harmonic	Test Date	December 26, 2019
Polarize	Vertical	Test Engineer	Jerry Chang
Detector	Peak		

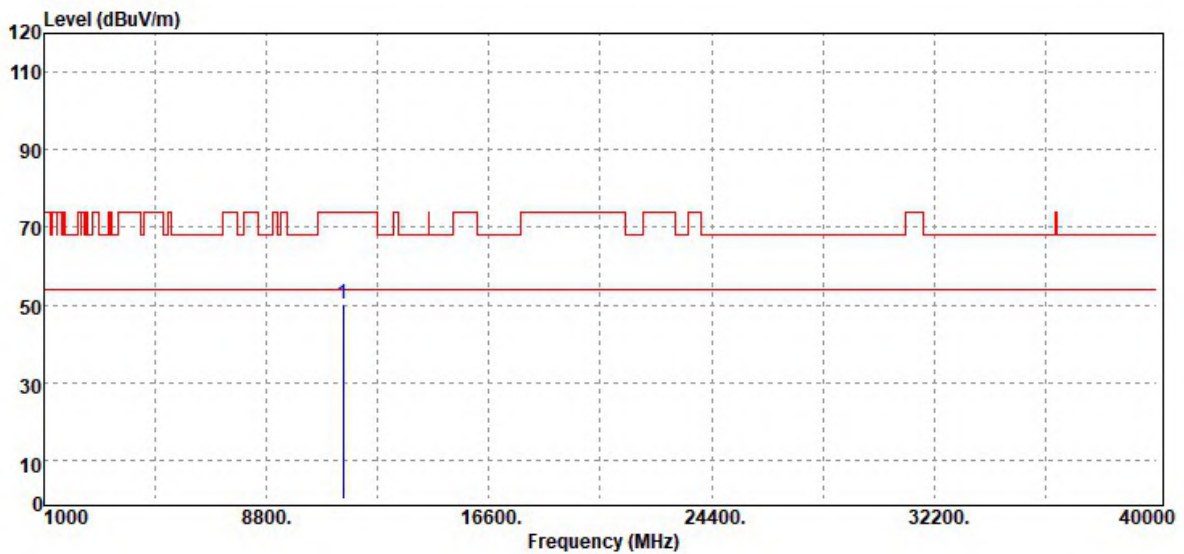


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBuV	Factor dB	Actual FS dBuV/m	Limit @3m dBuV/m	Margin dB
11490.00	Peak	34.76	15.57	50.33	74.00	-23.67
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Report No.: T191111W02-RP4

Test Mode	IEEE 802.11n 20 MHz / 5745 MHz	Temp/Hum	19.1(°C)/ 54%RH
Test Item	Harmonic	Test Date	December 26, 2019
Polarize	Horizontal	Test Engineer	Jerry Chang
Detector	Peak		

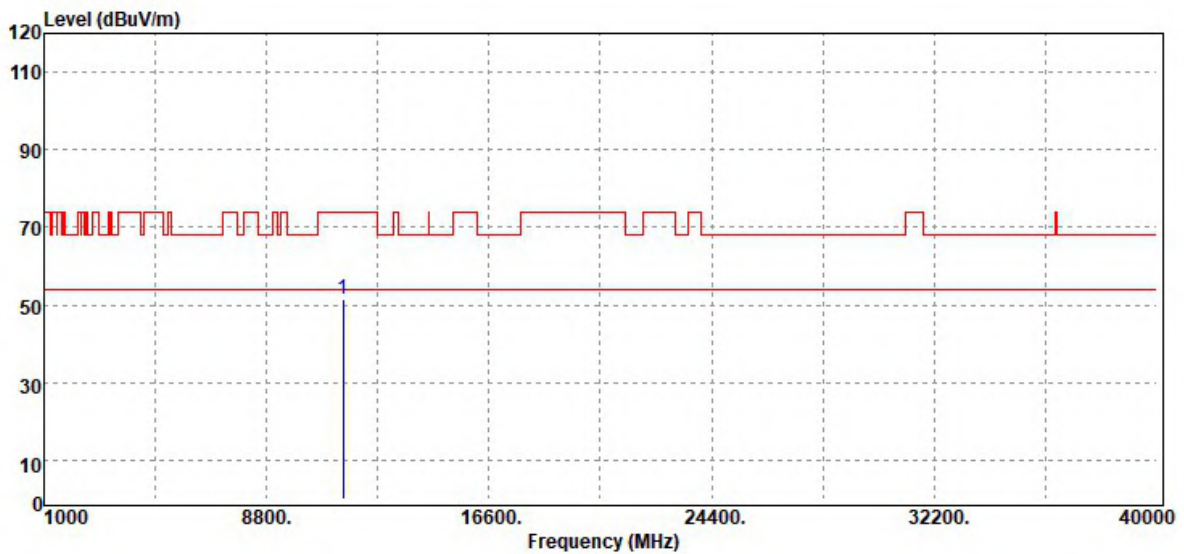


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBuV	Factor dB	Actual FS dBuV/m	Limit @3m dBuV/m	Margin dB
11490.00	Peak	35.81	15.57	51.38	74.00	-22.62
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Report No.: T191111W02-RP4

Test Mode	IEEE 802.11n 20 MHz/ 5785 MHz	Temp/Hum	19.1(°C)/ 54%RH
Test Item	Harmonic	Test Date	December 26, 2019
Polarize	Vertical	Test Engineer	Jerry Chang
Detector	Peak		

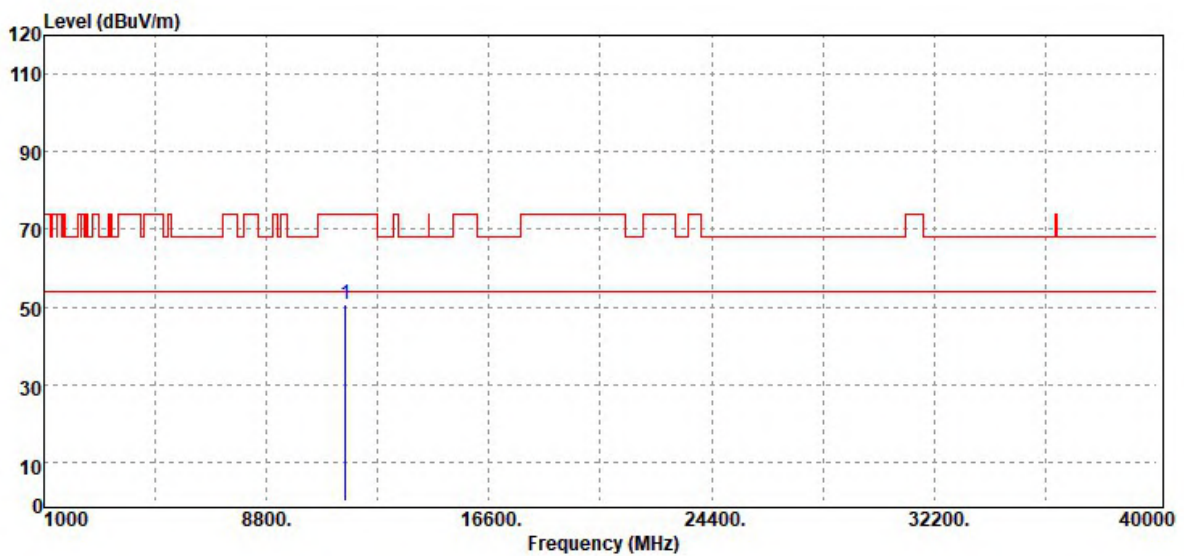


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBuV	Factor dB	Actual FS dBuV/m	Limit @3m dBuV/m	Margin dB
11570.00	Peak	34.97	15.50	50.47	74.00	-23.53
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Report No.: T191111W02-RP4

Test Mode	IEEE 802.11n 20 MHz/ 5785 MHz	Temp/Hum	19.1(°C)/ 54%RH
Test Item	Harmonic	Test Date	December 26, 2019
Polarize	Horizontal	Test Engineer	Jerry Chang
Detector	Peak		

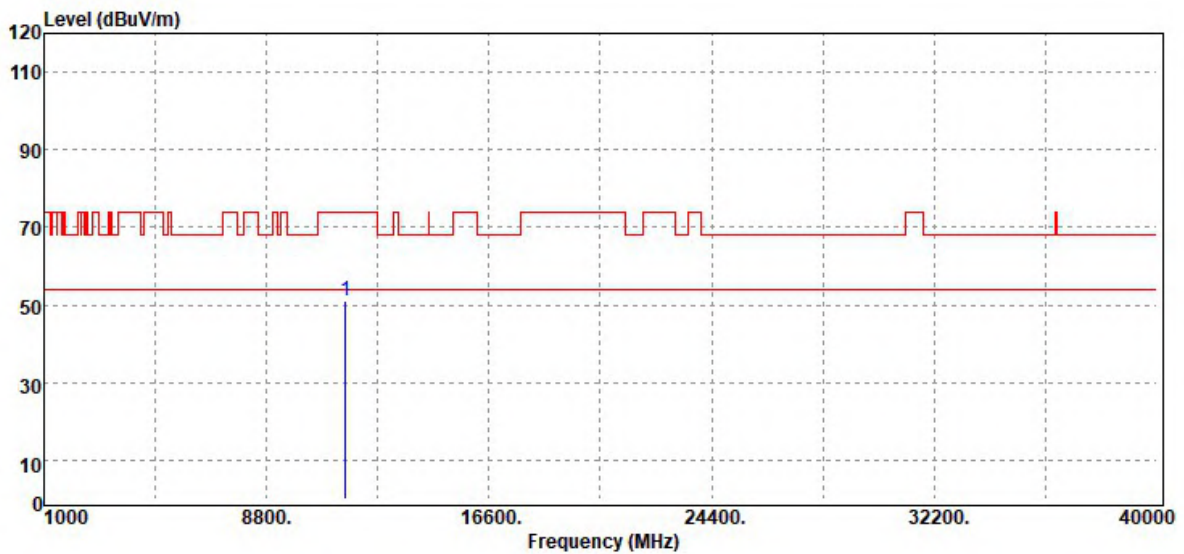


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
11570.00	Peak	35.37	15.50	50.87	74.00	-23.13
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Report No.: T191111W02-RP4

Test Mode	IEEE 802.11n 20 MHz/ 5825 MHz	Temp/Hum	19.1(°C)/ 54%RH
Test Item	Harmonic	Test Date	December 26, 2019
Polarize	Vertical	Test Engineer	Jerry Chang
Detector	Peak		

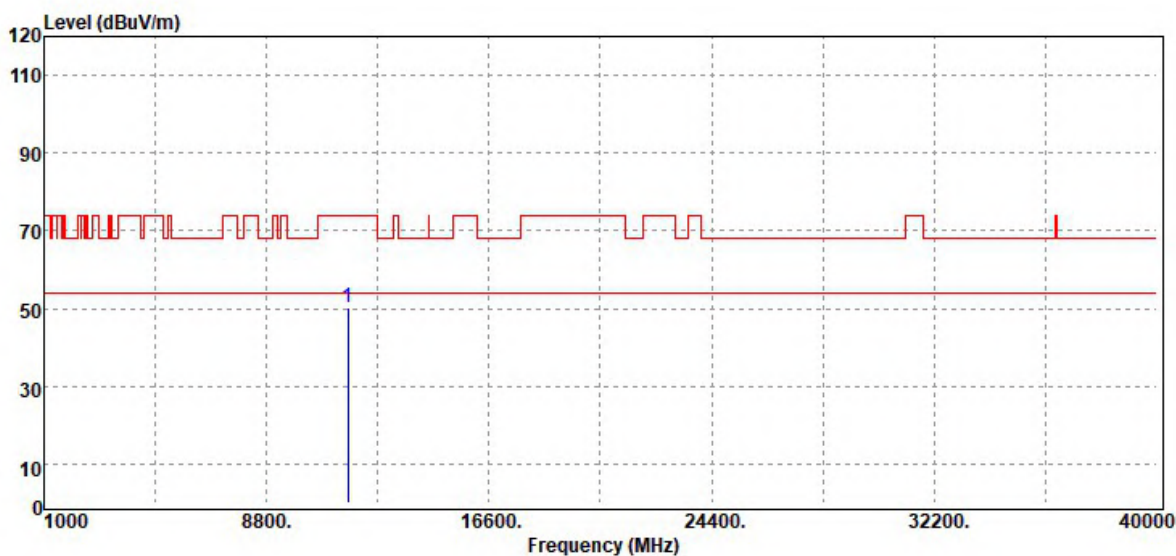


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dB μ V	Factor dB	Actual FS dB μ V/m	Limit @3m dB μ V/m	Margin dB
11650.00	Peak	34.88	15.53	50.41	74.00	-23.59
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Report No.: T191111W02-RP4

Test Mode	IEEE 802.11n 20 MHz/ 5825 MHz	Temp/Hum	19.1(°C)/ 54%RH
Test Item	Harmonic	Test Date	December 26, 2019
Polarize	Horizontal	Test Engineer	Jerry Chang
Detector	Peak		

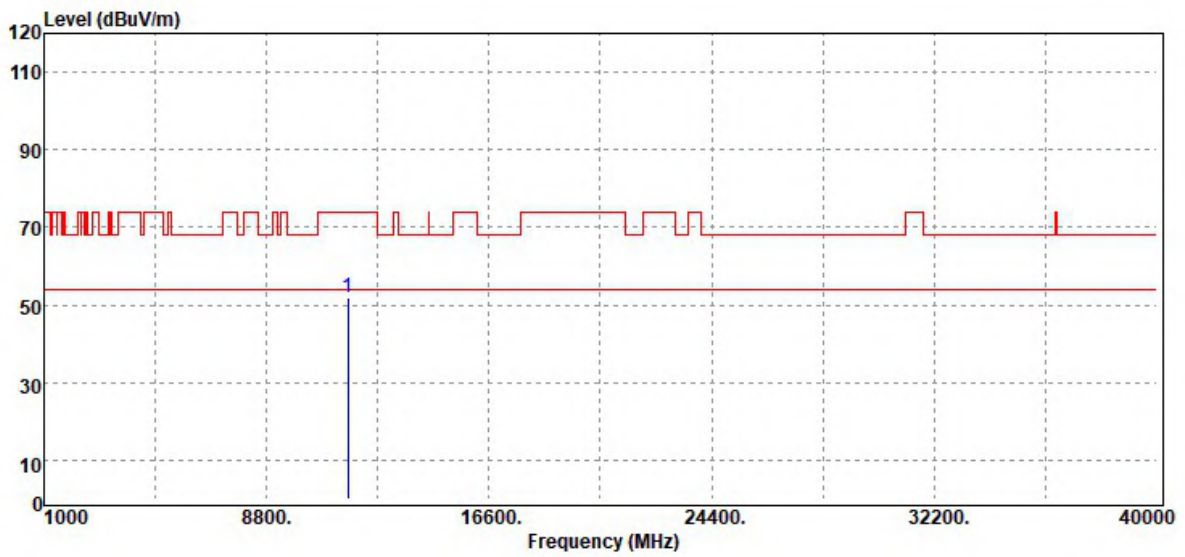


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
11650.00	Peak	36.19	15.53	51.72	74.00	-22.28
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Report No.: T191111W02-RP4

Test Mode	IEEE 802.11n 40 MHz/ 5755 MHz	Temp/Hum	19.1(°C)/ 54%RH
Test Item	Harmonic	Test Date	December 26, 2019
Polarize	Vertical	Test Engineer	Jerry Chang
Detector	Peak		

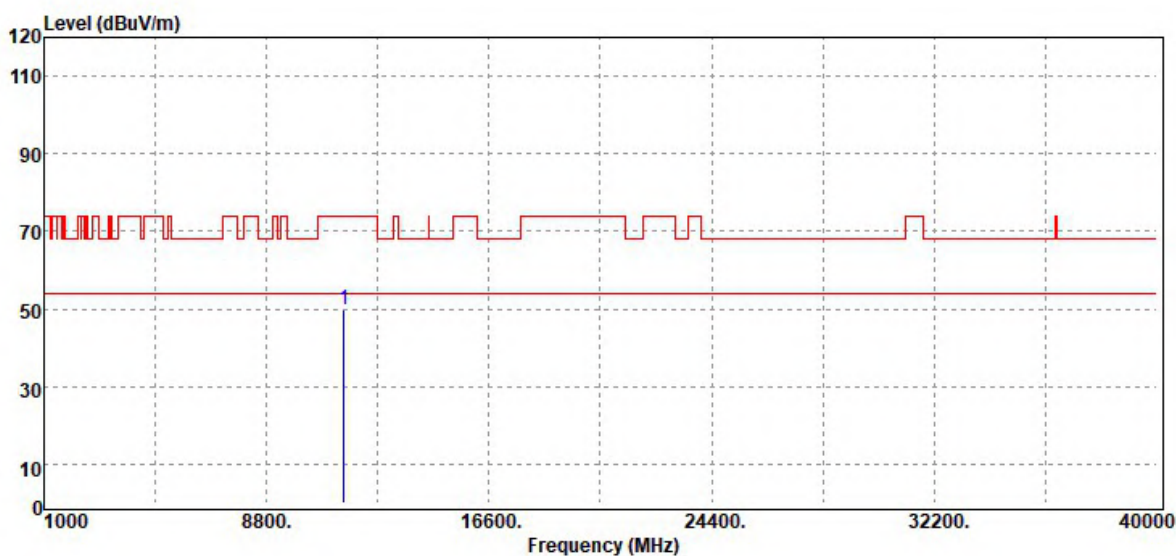


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBuV	Factor dB	Actual FS dBuV/m	Limit @3m dBuV/m	Margin dB
11510.00	Peak	34.39	15.35	49.74	74.00	-24.26
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Report No.: T191111W02-RP4

Test Mode	IEEE 802.11n 40 MHz/ 5755 MHz	Temp/Hum	19.1(°C)/ 54%RH
Test Item	Harmonic	Test Date	December 26, 2019
Polarize	Horizontal	Test Engineer	Jerry Chang
Detector	Peak		

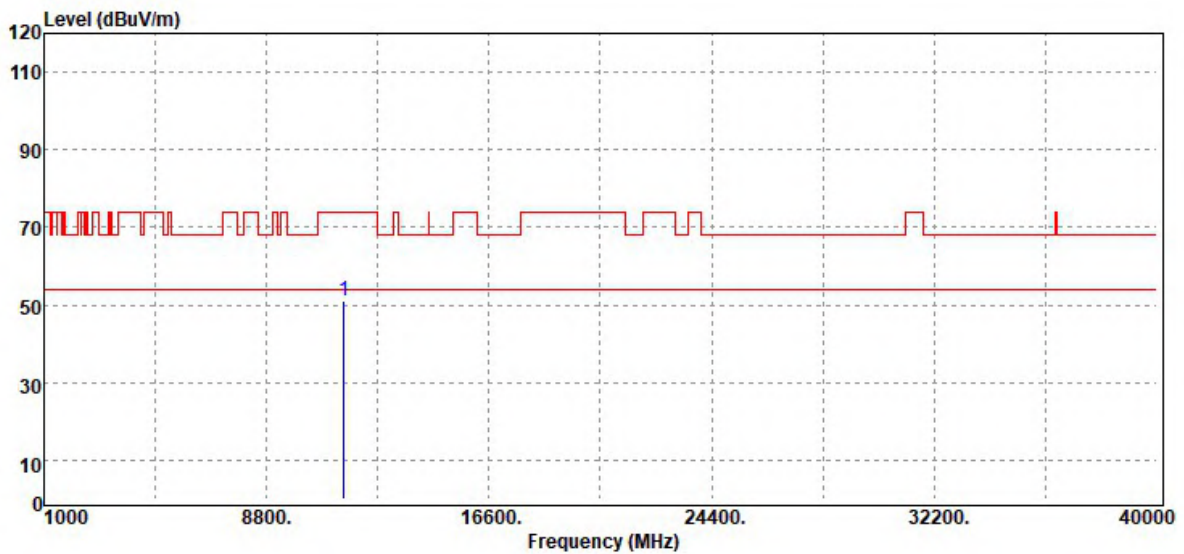


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBuV	Factor dB	Actual FS dBuV/m	Limit @3m dBuV/m	Margin dB
11510.00	Peak	35.66	15.35	51.01	74.00	-22.99
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Report No.: T191111W02-RP4

Test Mode	IEEE 802.11n 40 MHz/ 5795 MHz	Temp/Hum	19.1(°C)/ 54%RH
Test Item	Harmonic	Test Date	December 26, 2019
Polarize	Vertical	Test Engineer	Jerry Chang
Detector	Peak		

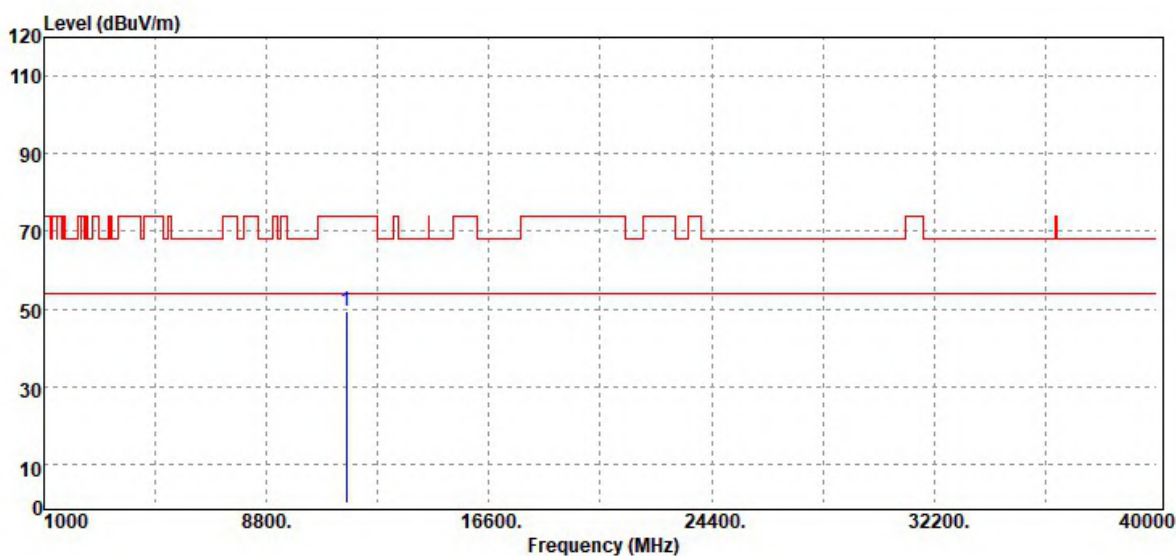


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBuV	Factor dB	Actual FS dBuV/m	Limit @3m dBuV/m	Margin dB
11590.00	Peak	33.71	15.62	49.33	74.00	-24.67
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Report No.: T191111W02-RP4

Test Mode	IEEE 802.11n 40 MHz/ 5795 MHz	Temp/Hum	19.1(°C)/ 54%RH
Test Item	Harmonic	Test Date	December 26, 2019
Polarize	Horizontal	Test Engineer	Jerry Chang
Detector	Peak		

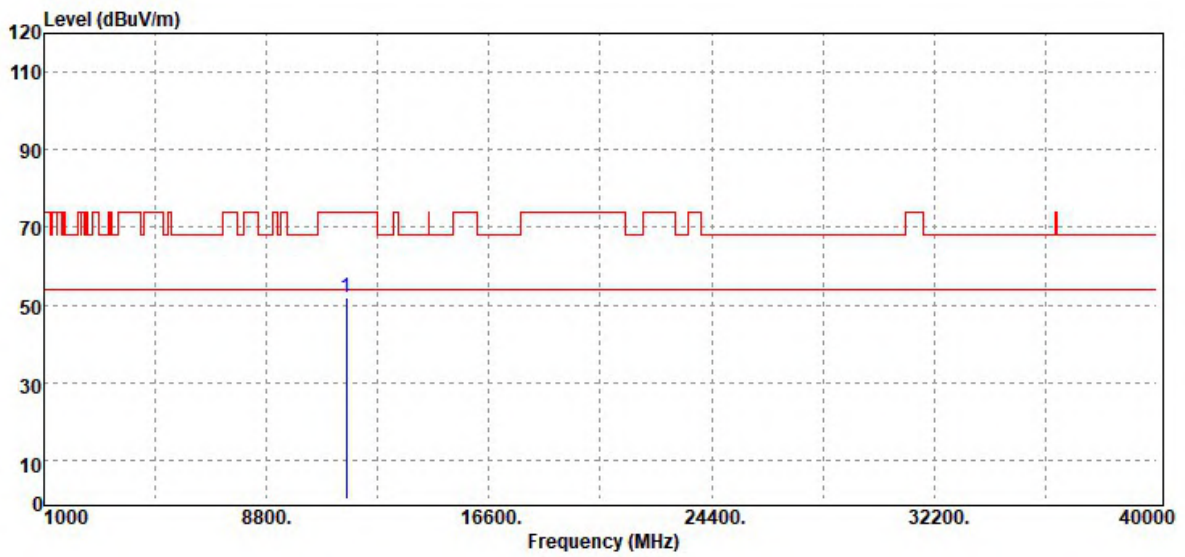


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
11590.00	Peak	36.26	15.62	51.88	74.00	-22.12
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Report No.: T191111W02-RP4

Test Mode	IEEE 802.11ac VHT80/ 5775 MHz	Temp/Hum	19.1(°C)/ 54%RH
Test Item	Harmonic	Test Date	December 26, 2019
Polarize	Vertical	Test Engineer	Jerry Chang
Detector	Peak		

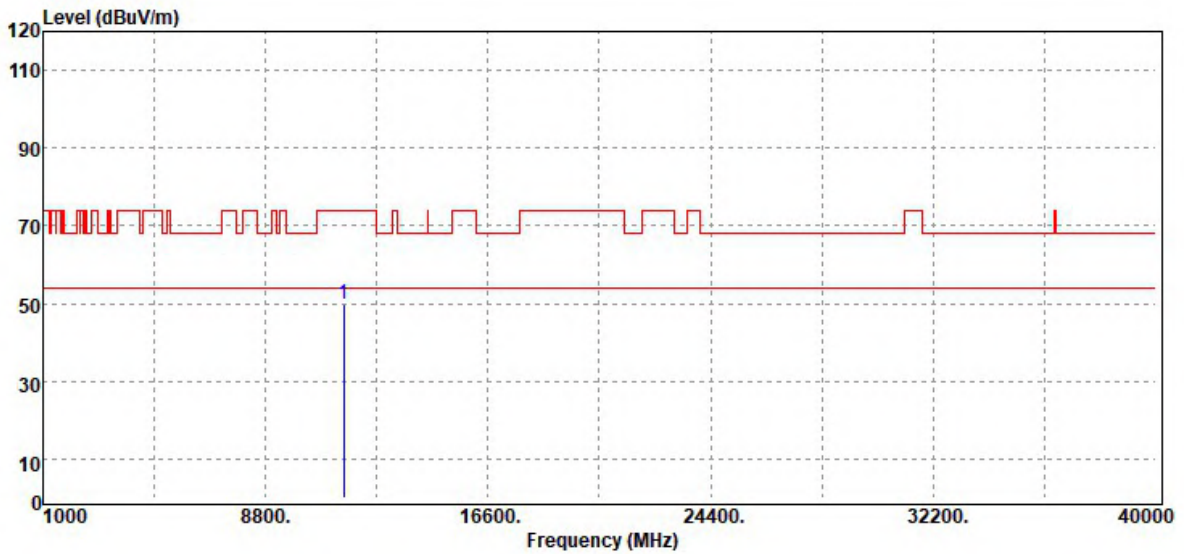


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dB μ V	Factor dB	Actual FS dB μ V/m	Limit @3m dB μ V/m	Margin dB
11550.00	Peak	34.25	15.39	49.64	74.00	-24.36
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Report No.: T191111W02-RP4

Test Mode	IEEE 802.11ac VHT80/ 5775 MHz	Temp/Hum	19.1(°C)/ 54%RH
Test Item	Harmonic	Test Date	December 26, 2019
Polarize	Horizontal	Test Engineer	Jerry Chang
Detector	Peak		

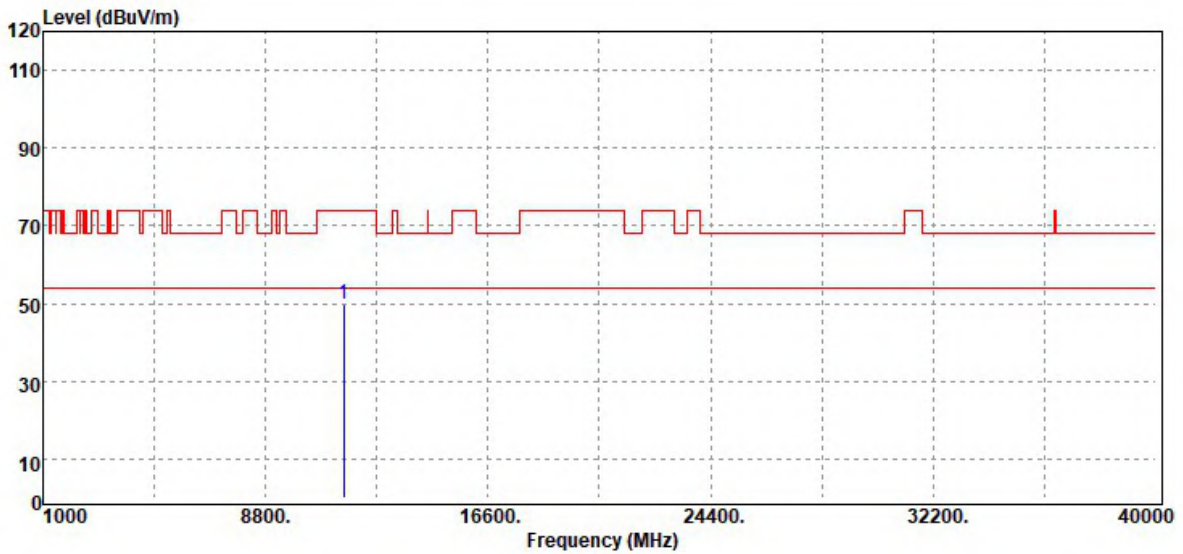

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dB μ V	Factor dB	Actual FS dB μ V/m	Limit @3m dB μ V/m	Margin dB
11550.00	Peak	34.62	15.39	50.01	74.00	-23.99
N/A						

Remark:


1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Report No.: T191111W02-RP4

Chip Antenna

Test Data for UNII-1

Test Mode	IEEE 802.11a / 5180MHZ	Temp/Hum	22.5(°C)/ 59%RH
Test Item	Harmonic	Test Date	November 29, 2019
Polarize	Vertical	Test Engineer	Jerry Chang
Detector	Peak		

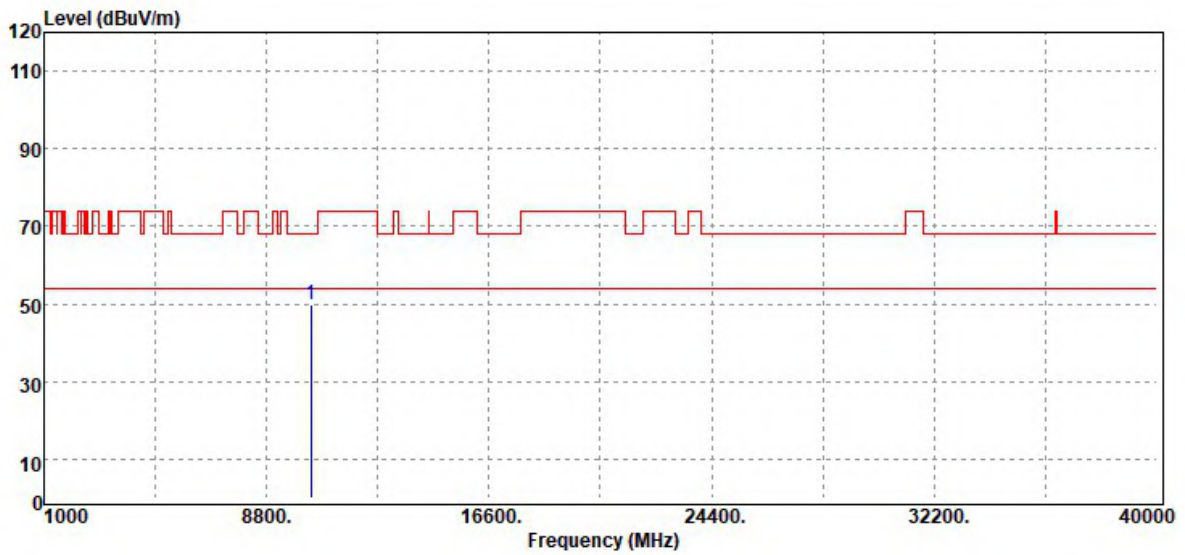


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBµV	Factor dB	Actual FS dBµV/m	Limit @3m dBµV/m	Margin dB
10360.00	Peak	35.56	14.12	49.68	68.20	-18.52
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Report No.: T191111W02-RP4

Test Mode	IEEE 802.11a / 5180MHZ	Temp/Hum	22.5(°C)/ 59%RH
Test Item	Harmonic	Test Date	November 29, 2019
Polarize	Horizontal	Test Engineer	Jerry Chang
Detector	Peak		

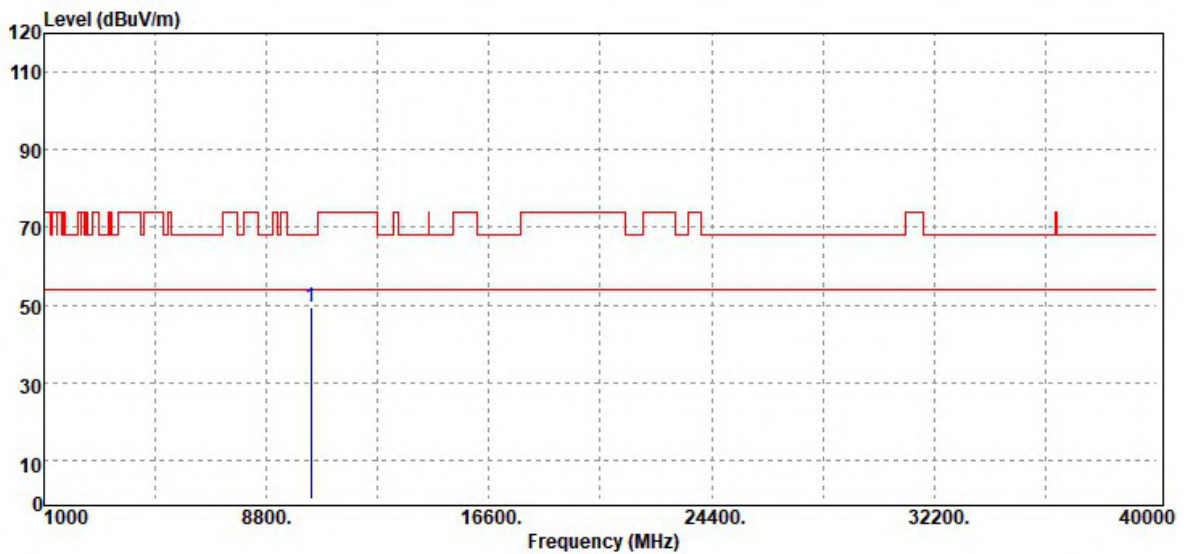


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBuV	Factor dB	Actual FS dBuV/m	Limit @3m dBuV/m	Margin dB
10360.00	Peak	35.33	14.12	49.45	68.20	-18.75
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Report No.: T191111W02-RP4

Test Mode	IEEE 802.11a / 5220 MHz	Temp/Hum	22.5(°C)/ 59%RH
Test Item	Harmonics	Test Date	November 29, 2019
Polarize	Vertical	Test Engineer	Jerry Chang
Detector	Peak		

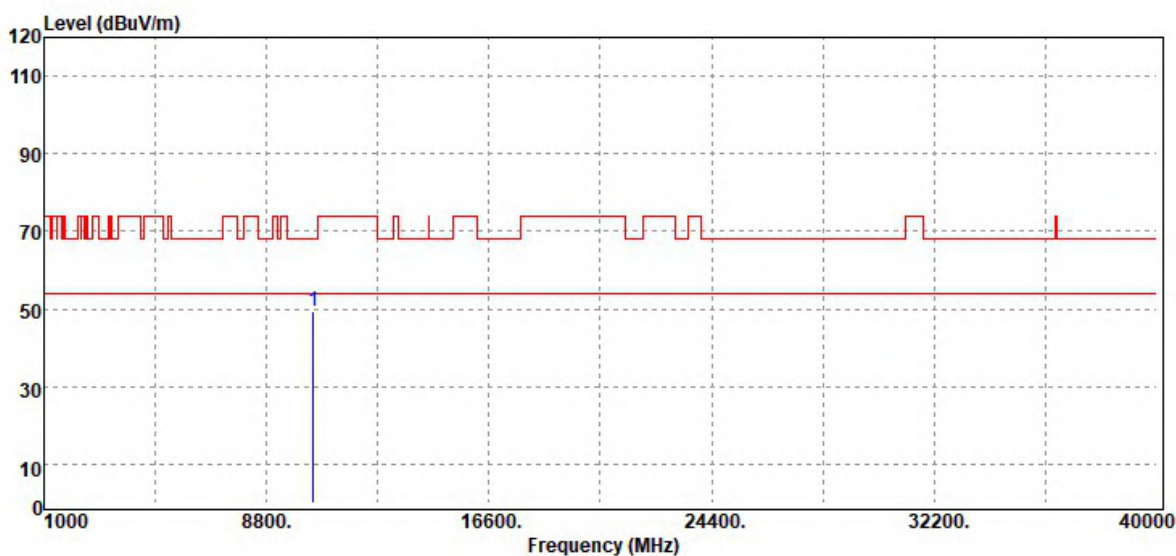


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBuV	Factor dB	Actual FS dBuV/m	Limit @3m dBuV/m	Margin dB
10440.00	Peak	34.29	15.21	49.50	68.20	-18.70
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Report No.: T191111W02-RP4

Test Mode	IEEE 802.11a / 5220 MHz	Temp/Hum	22.5(°C)/ 59%RH
Test Item	Harmonic	Test Date	November 29, 2019
Polarize	Horizontal	Test Engineer	Jerry Chang
Detector	Peak		

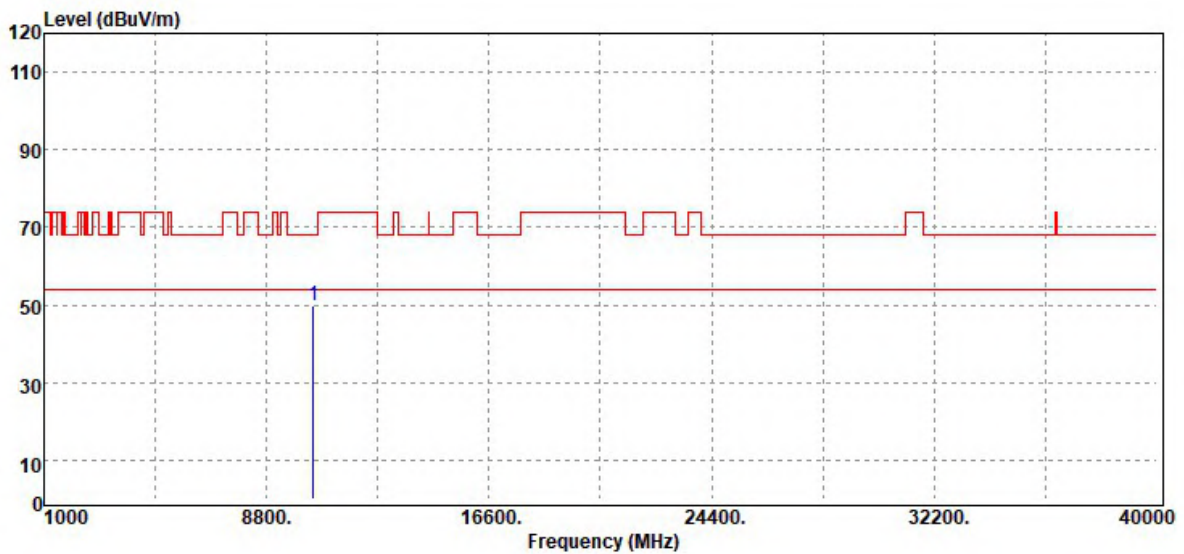


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dB μ V	Factor dB	Actual FS dB μ V/m	Limit @3m dB μ V/m	Margin dB
10440.00	Peak	34.71	15.21	49.92	68.20	-18.28
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Report No.: T191111W02-RP4

Test Mode	IEEE 802.11a / 5240MHZ	Temp/Hum	22.5(°C)/ 59%RH
Test Item	Harmonic	Test Date	November 29, 2019
Polarize	Vertical	Test Engineer	Jerry Chang
Detector	Peak		

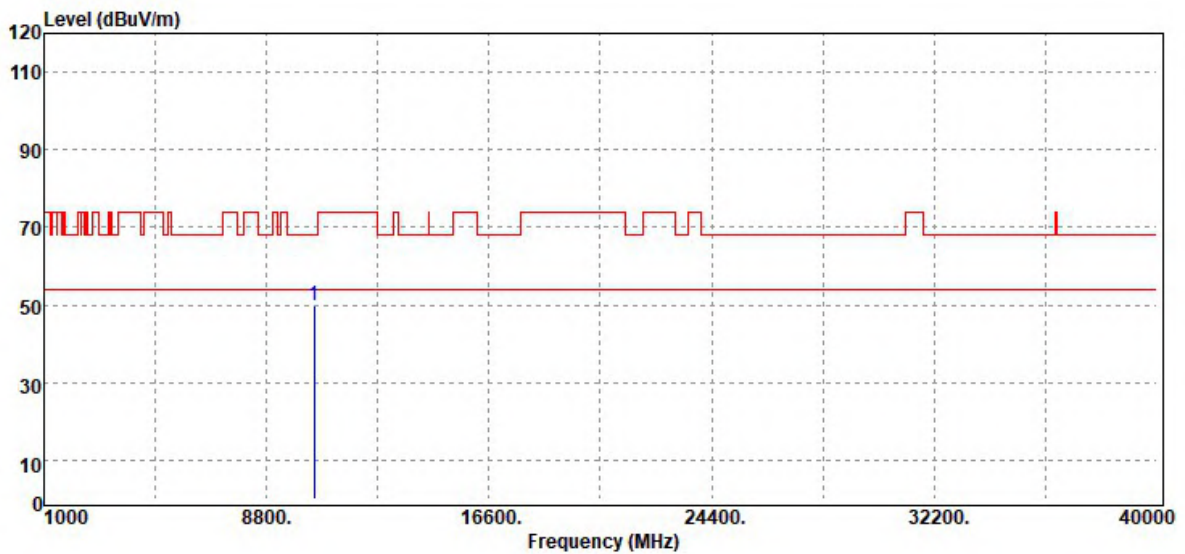


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBuV	Factor dB	Actual FS dBuV/m	Limit @3m dBuV/m	Margin dB
10480.00	Peak	33.85	16.09	49.94	68.20	-18.26
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Report No.: T191111W02-RP4

Test Mode	IEEE 802.11a / 5240MHZ	Temp/Hum	22.5(°C)/ 59%RH
Test Item	Harmonic	Test Date	November 29, 2019
Polarize	Horizontal	Test Engineer	Jerry Chang
Detector	Peak		

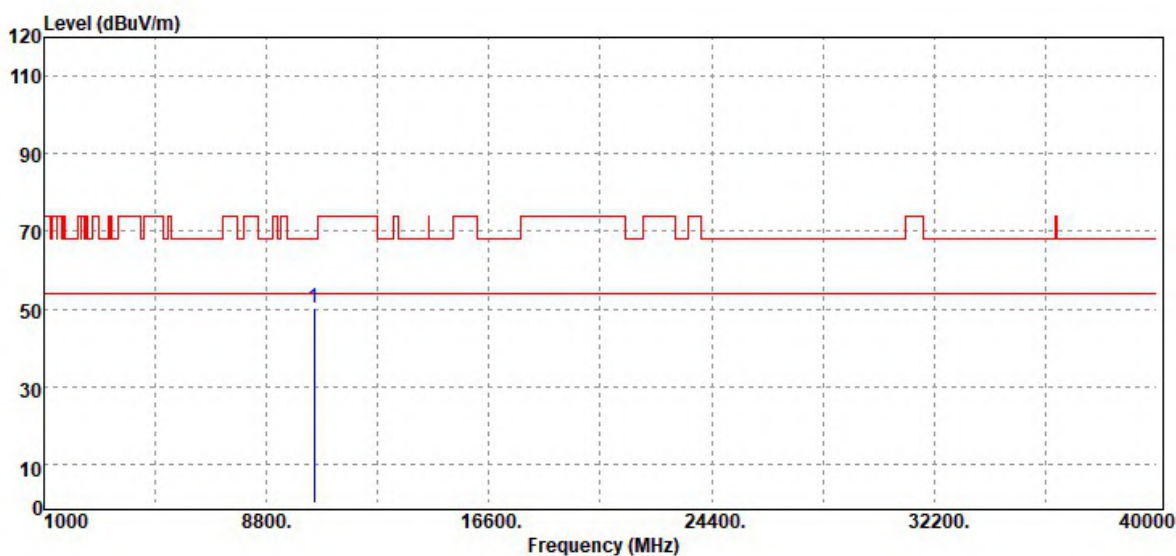


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dB μ V	Factor dB	Actual FS dB μ V/m	Limit @3m dB μ V/m	Margin dB
10480.00	Peak	34.25	16.09	50.34	68.20	-17.86
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Report No.: T191111W02-RP4

Test Mode	IEEE 802.11n 20 MHz / 5180MHZ	Temp/Hum	22.5(°C)/ 59%RH
Test Item	Harmonic	Test Date	November 29, 2019
Polarize	Vertical	Test Engineer	Jerry Chang
Detector	Peak		

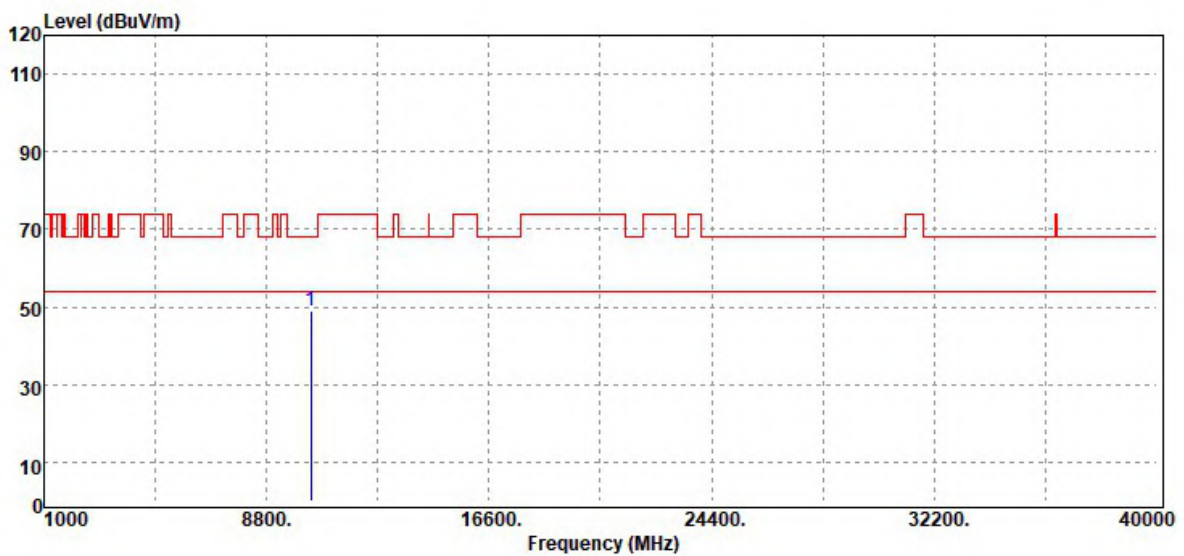


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBuV	Factor dB	Actual FS dBuV/m	Limit @3m dBuV/m	Margin dB
10360.00	Peak	34.87	14.12	48.99	68.20	-19.21
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Report No.: T191111W02-RP4

Test Mode	IEEE 802.11n 20 MHz/ 5180MHz	Temp/Hum	22.5(°C)/ 59%RH
Test Item	Harmonic	Test Date	November 29, 2019
Polarize	Horizontal	Test Engineer	Jerry Chang
Detector	Peak		

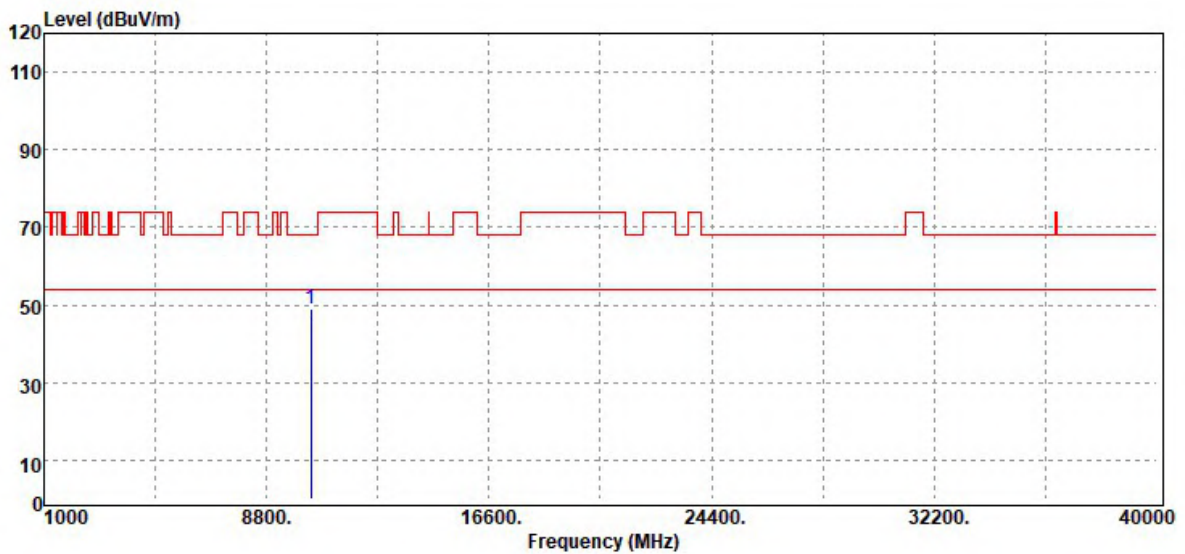


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBuV	Factor dB	Actual FS dBuV/m	Limit @3m dBuV/m	Margin dB
10360.00	Peak	34.93	14.12	49.05	68.20	-19.15
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Report No.: T191111W02-RP4

Test Mode	IEEE 802.11n 20 MHz / 5220MHZ	Temp/Hum	22.5(°C)/ 59%RH
Test Item	Harmonic	Test Date	November 29, 2019
Polarize	Vertical	Test Engineer	Jerry Chang
Detector	Peak		

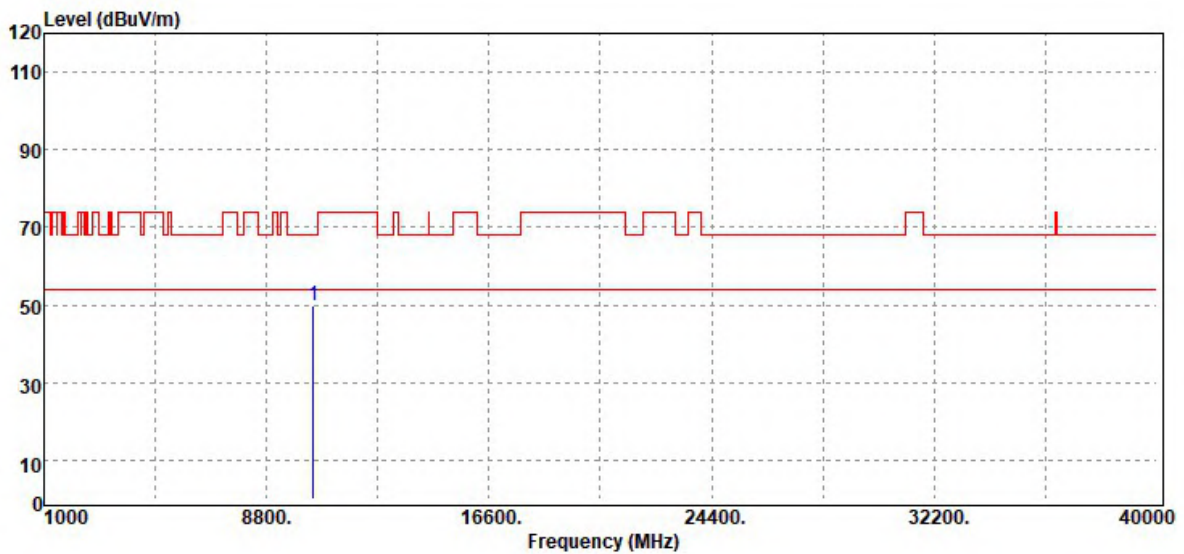


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBuV	Factor dB	Actual FS dBuV/m	Limit @3m dBuV/m	Margin dB
10440.00	Peak	34.81	15.21	50.02	68.20	-18.18
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Report No.: T191111W02-RP4

Test Mode	IEEE 802.11n 20 MHz / 5220MHZ	Temp/Hum	22.5(°C)/ 59%RH
Test Item	Harmonic	Test Date	November 29, 2019
Polarize	Horizontal	Test Engineer	Jerry Chang
Detector	Peak		

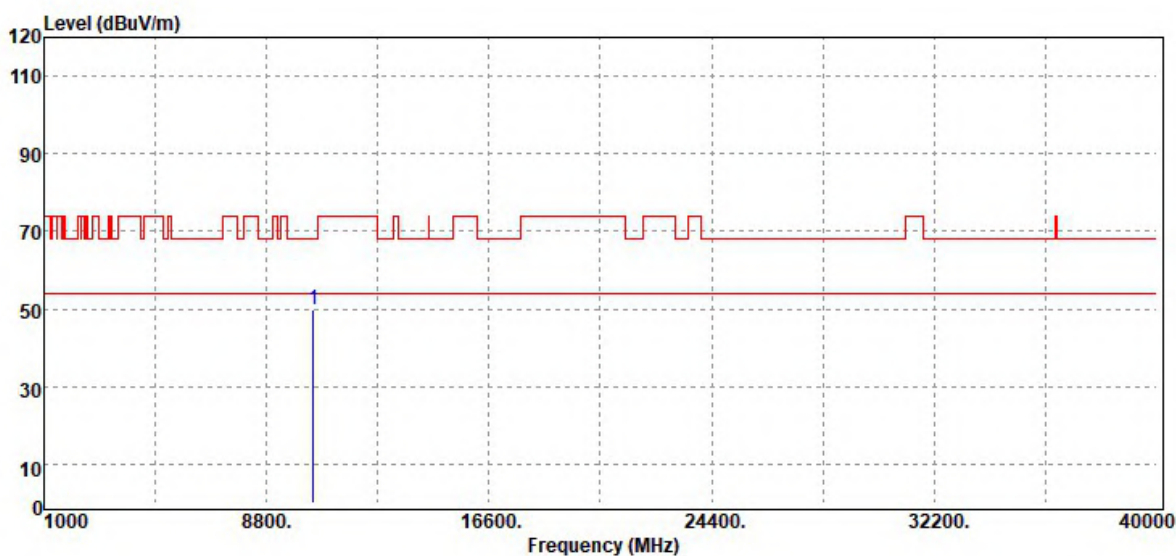


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dB μ V	Factor dB	Actual FS dB μ V/m	Limit @3m dB μ V/m	Margin dB
10440.00	Peak	34.53	15.21	49.74	68.20	-18.46
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Report No.: T191111W02-RP4

Test Mode	IEEE 802.11n 20 MHz / 5240MHZ	Temp/Hum	22.5(°C)/ 59%RH
Test Item	Harmonic	Test Date	November 29, 2019
Polarize	Vertical	Test Engineer	Jerry Chang
Detector	Peak		

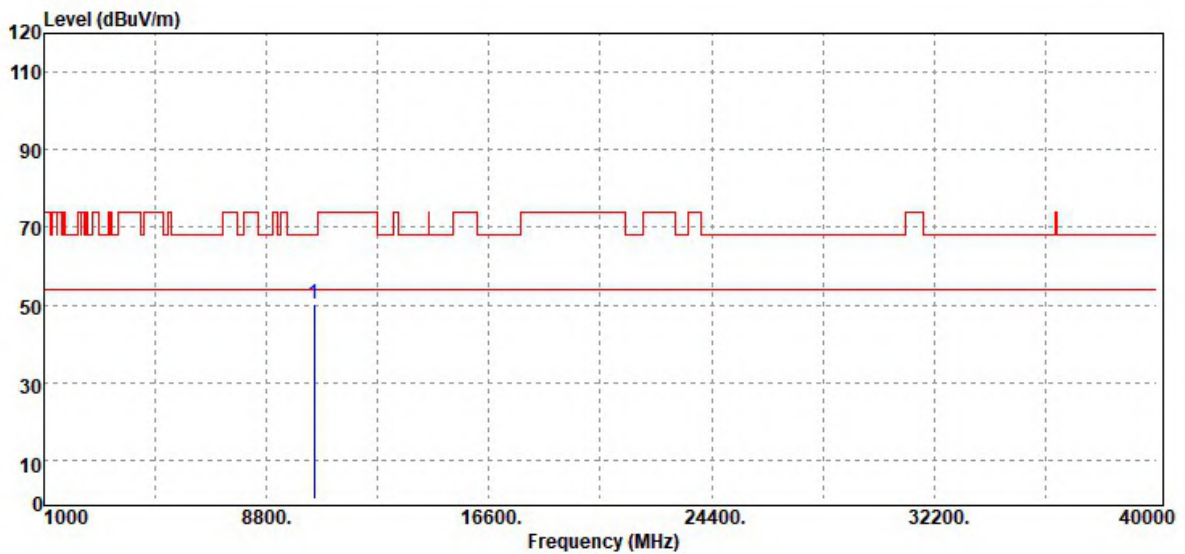


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBuV	Factor dB	Actual FS dBuV/m	Limit @3m dBuV/m	Margin dB
10480.00	Peak	34.16	16.09	50.25	68.20	-17.95
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Report No.: T191111W02-RP4

Test Mode	IEEE 802.11n 20 MHz / 5240MHZ	Temp/Hum	22.5(°C)/ 59%RH
Test Item	Harmonic	Test Date	November 29, 2019
Polarize	Horizontal	Test Engineer	Jerry Chang
Detector	Peak		

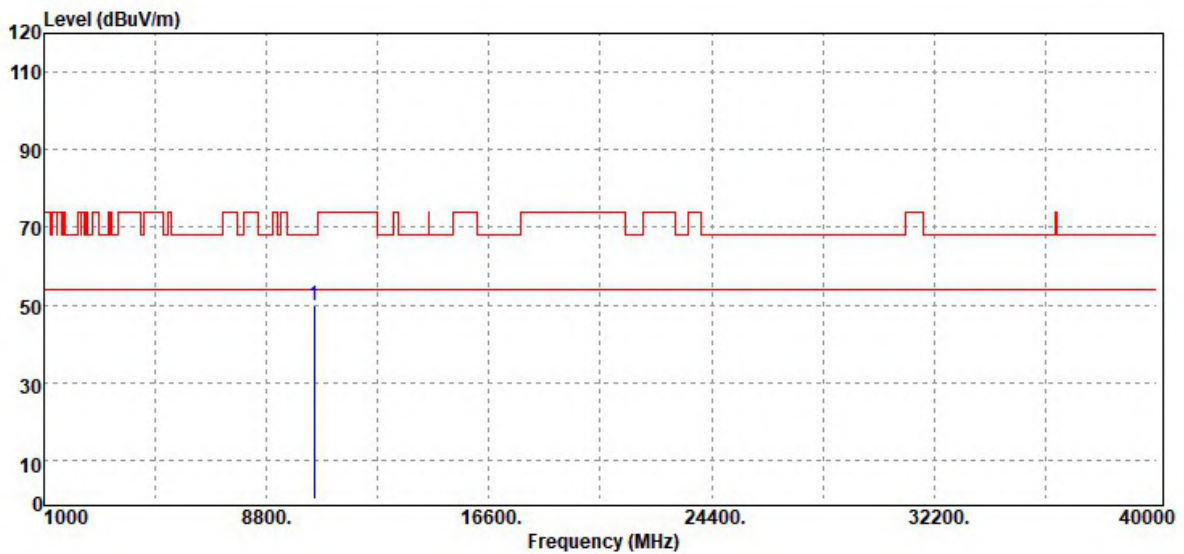


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
10480.00	Peak	33.94	16.09	50.03	68.20	-18.17
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Report No.: T191111W02-RP4

Test Mode	IEEE 802.11n 40 MHz / 5190MHz	Temp/Hum	22.5(°C)/ 59%RH
Test Item	Harmonic	Test Date	November 29, 2019
Polarize	Vertical	Test Engineer	Jerry Chang
Detector	Peak		

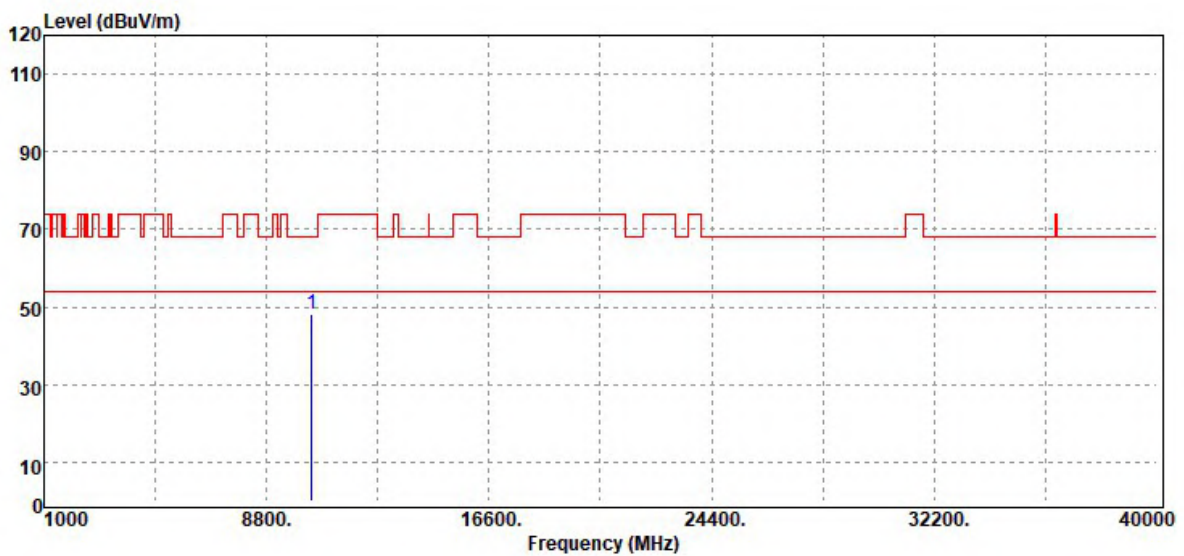


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBuV	Factor dB	Actual FS dBuV/m	Limit @3m dBuV/m	Margin dB
10380.00	Peak	33.81	14.23	48.04	68.20	-20.16
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Report No.: T191111W02-RP4

Test Mode	IEEE 802.11n 40 MHz / 5190MHz	Temp/Hum	22.5(°C)/ 59%RH
Test Item	Harmonic	Test Date	November 29, 2019
Polarize	Horizontal	Test Engineer	Jerry Chang
Detector	Peak		

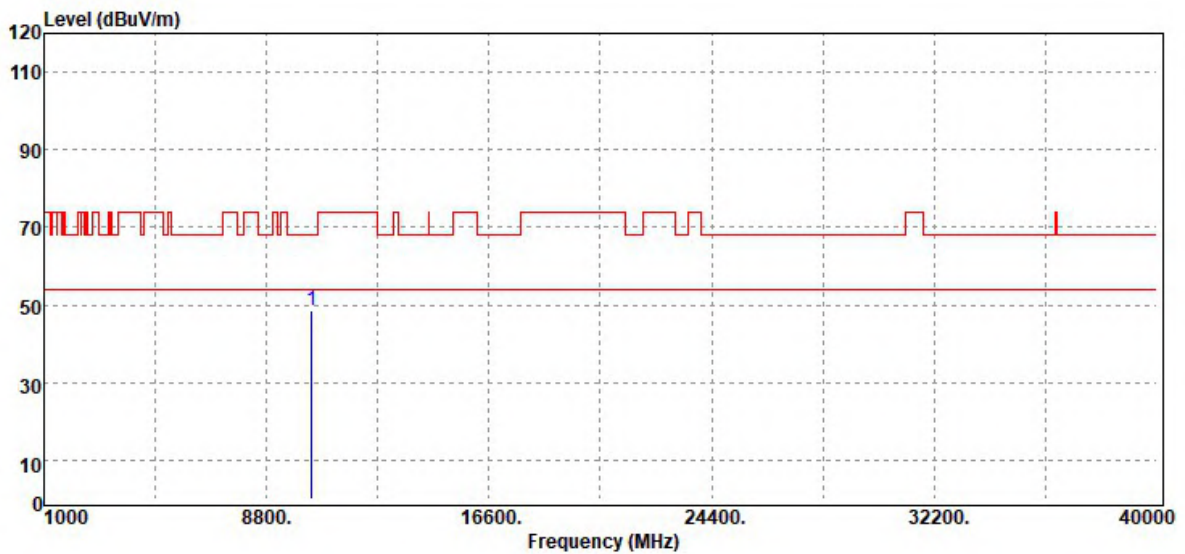


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBuV	Factor dB	Actual FS dBuV/m	Limit @3m dBuV/m	Margin dB
10380.00	Peak	34.41	14.23	48.64	68.20	-19.56
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Report No.: T191111W02-RP4

Test Mode	IEEE 802.11n 40 MHz / 5230MHZ	Temp/Hum	22.5(°C)/ 59%RH
Test Item	Harmonic	Test Date	November 29, 2019
Polarize	Vertical	Test Engineer	Jerry Chang
Detector	Peak		

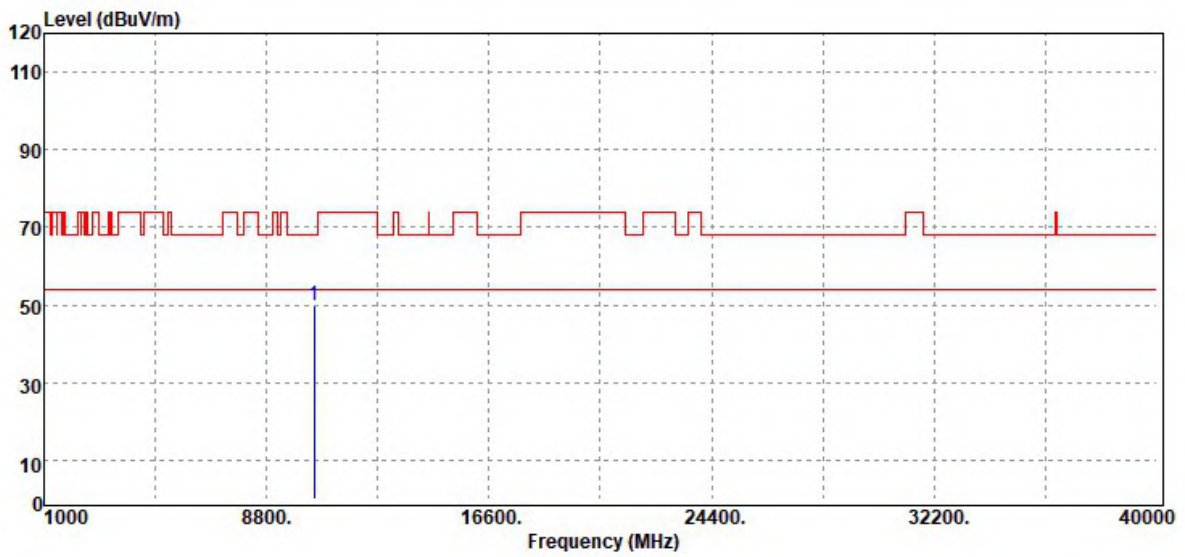


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBuV	Factor dB	Actual FS dBuV/m	Limit @3m dBuV/m	Margin dB
10460.00	Peak	34.37	15.65	50.02	68.20	-18.18
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Report No.: T191111W02-RP4

Test Mode	IEEE 802.11n 40 MHz / 5230MHZ	Temp/Hum	22.5(°C)/ 59%RH
Test Item	Harmonic	Test Date	November 29, 2019
Polarize	Horizontal	Test Engineer	Jerry Chang
Detector	Peak		

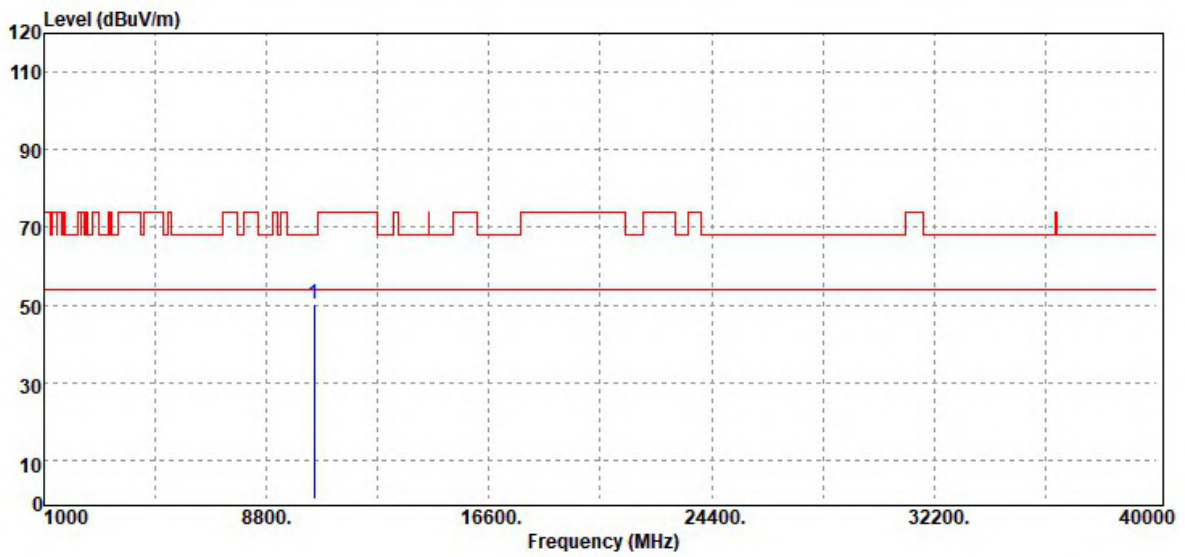


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
10460.00	Peak	34.43	15.65	50.08	68.20	-18.12
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Report No.: T191111W02-RP4

Test Mode	IEEE 802.11ac VHT80 / 5210MHZ	Temp/Hum	22.5(°C)/ 59%RH
Test Item	Harmonic	Test Date	November 29, 2019
Polarize	Vertical	Test Engineer	Jerry Chang
Detector	Peak		

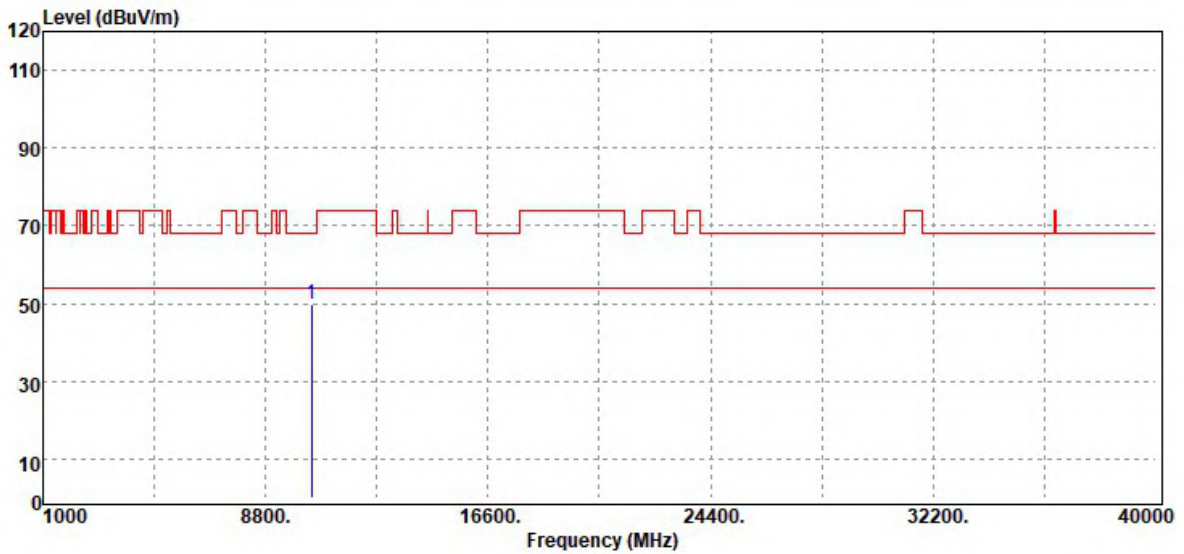


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBµV	Factor dB	Actual FS dBµV/m	Limit @3m dBµV/m	Margin dB
10420.00	Peak	34.85	14.78	49.63	68.20	-18.57
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Report No.: T191111W02-RP4

Test Mode	IEEE 802.11ac VHT80 / 5210MHZ	Temp/Hum	22.5(°C)/ 59%RH
Test Item	Harmonic	Test Date	November 29, 2019
Polarize	Horizontal	Test Engineer	Jerry Chang
Detector	Peak		

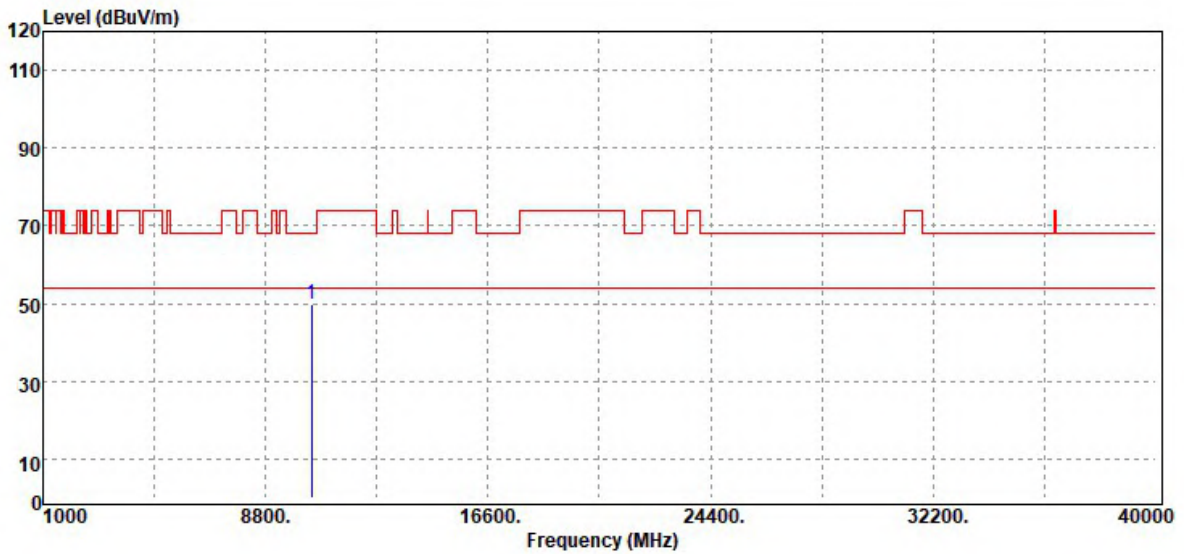

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dB μ V	Factor dB	Actual FS dB μ V/m	Limit @3m dB μ V/m	Margin dB
10420.00	Peak	35.21	14.78	49.99	68.20	-18.21
N/A						


Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Report No.: T191111W02-RP4

Test Data for UNII-2a

Test Mode	IEEE 802.11a / 5260 MHz	Temp/Hum	22.5(°C)/ 59%RH
Test Item	Harmonic	Test Date	November 29, 2019
Polarize	Vertical	Test Engineer	Jerry Chang
Detector	Peak		

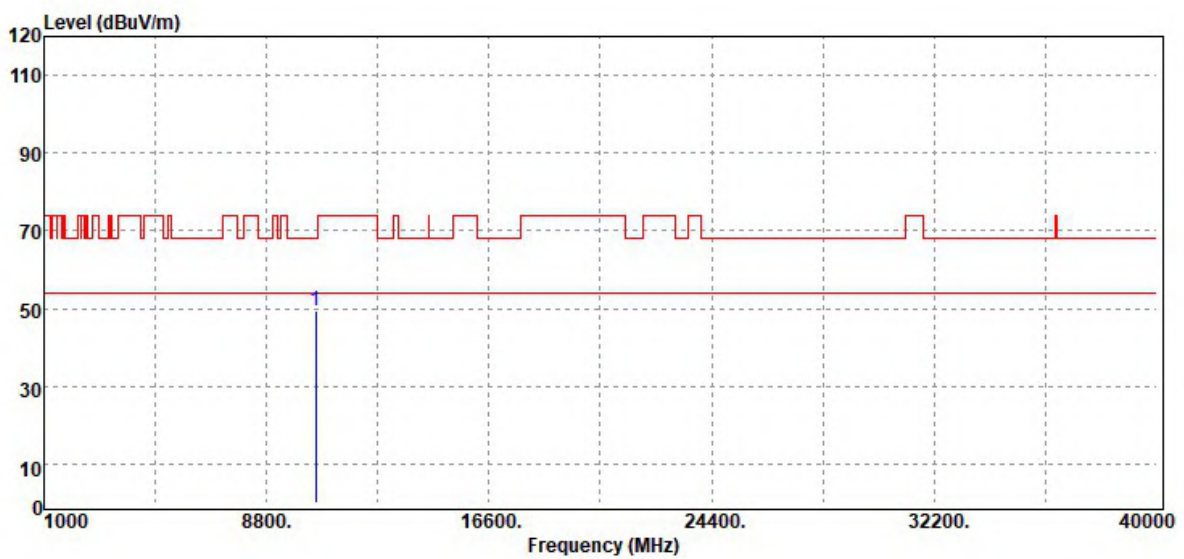

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
10520.00	Peak	34.06	15.33	49.39	68.20	-18.81
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit